




DIMENSIONS



ACCESSORIES



CORD ACCESSORY



MINIMAL TRACK OPTIONS

AWARDS

reddot winner 2020
innovative productreddot winner 2020
lighting designBronze Delta
ADI Awards 2020HONORABLE MENTION
EUROPEAN
PRODUCT
DESIGN
AWARDWINNER
2020archiproducts
DESIGN AWARDS
WINNER 2020

PRODUCT

Name	STICK 22 24V 2M 37° 2700K NT
Reference	A4100120NT
Color	Textured black
RAL	9005
Category	TRACKLIGHTS

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	440 Lm
Power	4,5 W
Power values of the system	5,00 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	37°
Lighting efficiency	82%
Efficacy	98 Lm/W
Current intensity	400 mA
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	III
Voltage	24 Vdc
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Cord length	Max. 2 m
Track type	Minimal Track
Weight	205 g.
Packaged weight	285 g.
Packaging dimensions	322 x 122 x 45mm
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene / Polycarbonate




Stick is a light fitting, designed for accent lighting, which underlines the verticality of the space where it is applied. The light buoyancy of such a light aesthetic piece is one of its greatest attractions.

POLAR DIAGRAM

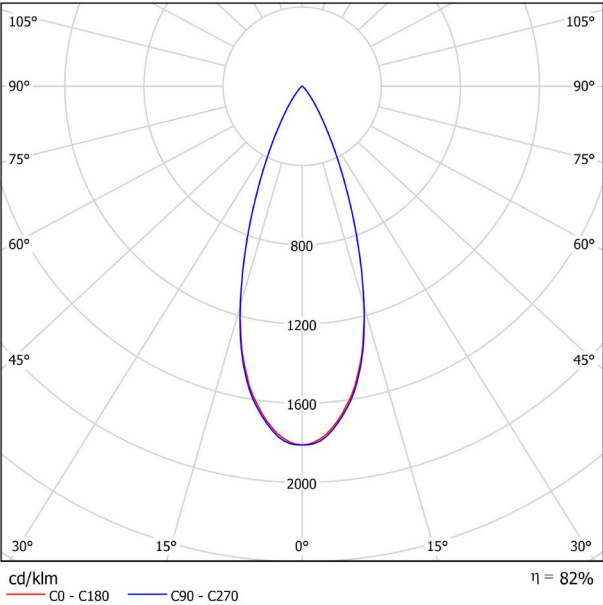


CONICAL DIAGRAM

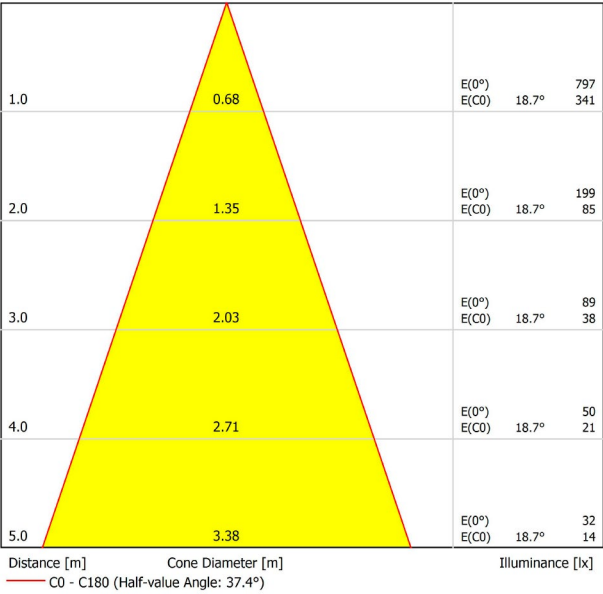




PRODUCT	
Model	Cord Accessory
Reference	02230000N
Colour	N ■ RAL9005
Category	Accessories


DIMENSIONAL DRAWING

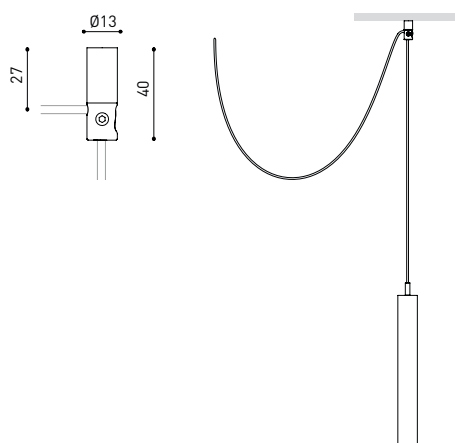



MINIMAL TRACK 24V Profile 2m

A384-00-00- | N |



MINIMAL TRACK 24V Rubber Cable n x 1m

A384-00-01- | N |


n = Total Length of System.

24V | Max. 4A

MINIMAL TRACK 24V Corner 90° 1 Plane

A384-00-02- | N |

Cable Length = 35mm.



MINIMAL TRACK 24V End Cap


A384-00-05- | N |



MINIMAL TRACK 24V Corner 90° 1 Plane Rounded


A384-00-03- | N |

Cable Length = 35mm.



MINIMAL TRACK 24V Connection Box


A384-00-06- | N |




MINIMAL TRACK 24V Corner 90° 2 Planes

A384-00-04- | N |

Cable Length = 100mm.





				P	V	D [A x B x C]
MINIMAL TRACK 24V Power Supply Box	ON/OFF	A384-00-07- NT		40W	24V	280 x 30 x 24mm
		A384-00-08- NT		100W	24V	280 x 30 x 24mm
Included ON/OFF 24Vdc Power Supply.						
MINIMAL TRACK 24V Remote Power Supply	ON/OFF	0434-01-37		60W	24V	180 x 52 x 30mm
		0433-10-22		100W	24V	295 x 43 x 30mm



DROP VOLTAGE TABLE



		CABLE LENGTH (m)			
		<5	<10	<20	<30
POWER (W)	CABLE SECTION (mm²)	TRACK LENGTH (m)			
		<5	<10	<20	<30
40	0,75	30	30	30	30
	1,5	30	30	30	30
60	0,75	30	30	20	10
	1,5	30	30	30	20
100	0,75	20	10	X	X
	1,5	20	20	10	X

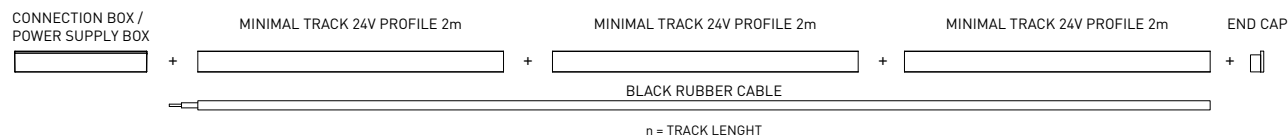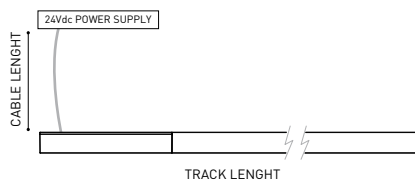

COLOUR | N ■ RAL 9005 | DIM OPTIONS PLEASE CONSULT

MINIMAL TRACK SUSPENSION

ARKOSLIGHT®



MINIMAL TRACK 24V Suspension


Profile 2m	A384-02-00-	N
Profile 2m Initial feed kit	A400-02-10-	N
Profile 2m Middle feed kit*	A400-02-20-	N

* Unidirectional Middle Feed.



MINIMAL TRACK 24V Suspension Straight Joiner


A400-00-02- | N |



MINIMAL TRACK 24V Suspension Corner 90°

A400-00-03- | N |

Cable Length = 85mm.



MINIMAL TRACK 24V Suspension

Rubber Cable n x 1m A400-00-01- | N |


n = Total Length of System.

24V | Max. 4A



MINIMAL TRACK 24V Suspension Kit

A400-02-04- | N |



MINIMAL TRACK 24V Suspension End Caps


A400-00-05- | N |

Two End Caps Included





			P	V	D (A x B x C)
MINIMAL TRACK 24V Suspension Power Supply Box	ON/OFF	A400-00-06- NT	40W	24V	280 x 30 x 36mm
		A400-00-07- NT	100W	24V	280 x 30 x 36mm
MINIMAL TRACK 24V Remote Power Supply	ON/OFF	0434-01-37	60W	24V	180 x 52 x 30mm
		0433-10-22	100W	24V	295 x 43 x 30mm

Included ON/OFF 24Vdc Power Supply



DROP VOLTAGE TABLE

POWER (W)	CABLE SECTION (mm²)	CABLE LENGTH (m)			
		<5	<10	<20	<30
40	0,75	30	30	30	30
	1,5	30	30	30	30
60	0,75	30	30	20	10
	1,5	30	30	30	20
100	0,75	20	10	X	X
	1,5	20	20	10	X

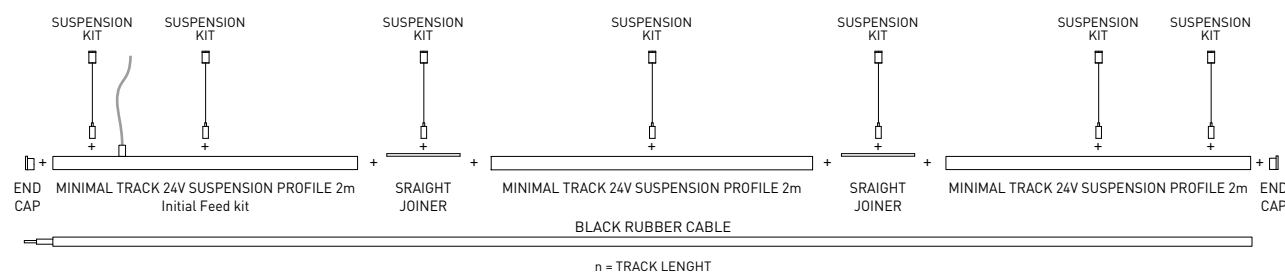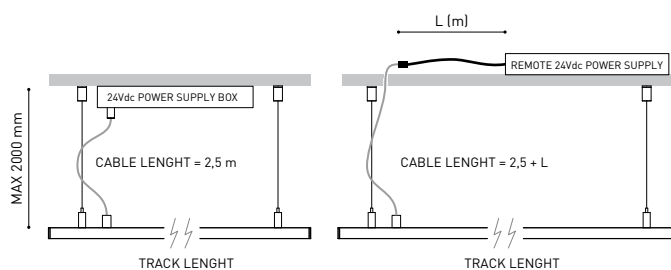

COLOUR | N ■ RAL 9005 | DIM OPTIONS PLEASE CONSULT

Calle N · Pol. Ind. EL OLIVERAL
46394 Ribarroja del Turia · Valencia (Spain)
Tel. +34 961 667 207 · Fax +34 961 667 054
info@arkoslight.com · www.arkoslight.com



WIRE TRIMLESS ACCESSORY


ARKOSLIGHT®

MINIMAL TRACK SUSPENSION



PRODUCT	
Model	Coaxial Timless
Reference	A023-00-03- W N
Colour	W ☐ RAL 9016 N ☐ RAL 9005
Category	Accessories
Fasteners not available	
 REMOTE  INCL  Ø20	

DIMENSIONAL DRAWING




Wire Trimless Accessory is a collection of accessories for fitting tensioners and cables to Arkoslight luminaires suspended directly from the ceiling with any visible ceiling rose or fixings. This achieves a minimalist application with a visually tidy finish.

With Wire Trimless Accessory the items adjacent to the ceiling of the standard product (ceiling roses, fixings, driver boxes, etc.) are concealed by a simple recessed application.

Wire Trimless Accessory reduces the visual impact of the installation leading to extremely minimalist aesthetics. The wires come out of the ceiling material as a part of the structure. This detail creates a much purer, more essential layout, particular when several luminaires are fitted in an arrangement.



DIMENSIONS



ACCESSORIES



CORD ACCESSORY



MINIMAL TRACK OPTIONS

AWARDS

reddot winner 2020
innovative productreddot winner 2020
lighting designBronze Delta
ADI Awards 2020HONORABLE MENTION
EUROPEAN
PRODUCT
DESIGN
AWARDWINNER
2020archiproducts
DESIGN AWARDS
WINNER 2020

PRODUCT

Name	STICK 22 24V 2M 37° 2700K WT
Reference	A4100120WT
Color	Textured white
RAL	9016
Category	TRACKLIGHTS

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	440 Lm
Power	4,5 W
Power values of the system	5,00 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	37°
Lighting efficiency	82%
Efficacy	98 Lm/W
Current intensity	400 mA
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	III
Voltage	24 Vdc
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Cord length	Max. 2 m
Track type	Minimal Track
Weight	205 g.
Packaged weight	285 g.
Packaging dimensions	322 x 122 x 45mm
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene / Polycarbonate




Stick is a light fitting, designed for accent lighting, which underlines the verticality of the space where it is applied. The light buoyancy of such a light aesthetic piece is one of its greatest attractions.

POLAR DIAGRAM

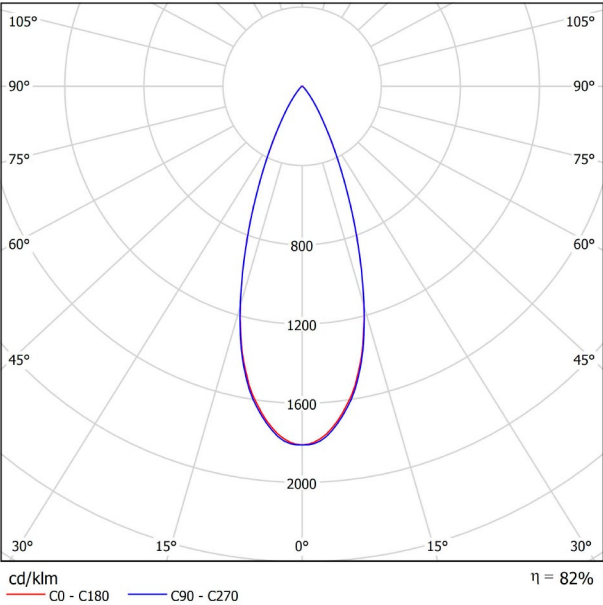


CONICAL DIAGRAM

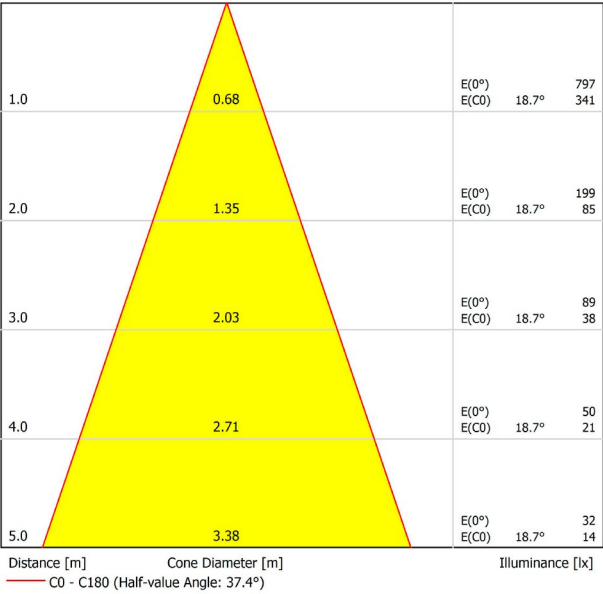




PRODUCT	
Model	Cord Accessory
Reference	02230000N
Colour	N ■ RAL9005
Category	Accessories


DIMENSIONAL DRAWING

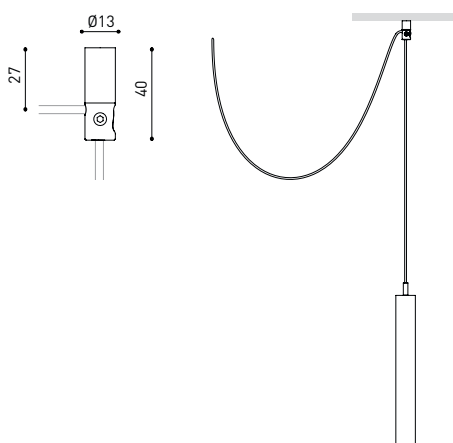



MINIMAL TRACK 24V Profile 2m

A384-00-00- | N |



MINIMAL TRACK 24V Rubber Cable n x 1m

A384-00-01- | N |


n = Total Length of System.

24V | Max. 4A

MINIMAL TRACK 24V Corner 90° 1 Plane

A384-00-02- | N |

Cable Length = 35mm.



MINIMAL TRACK 24V End Cap


A384-00-05- | N |



MINIMAL TRACK 24V Corner 90° 1 Plane Rounded


A384-00-03- | N |

Cable Length = 35mm.



MINIMAL TRACK 24V Connection Box


A384-00-06- | N |




MINIMAL TRACK 24V Corner 90° 2 Planes

A384-00-04- | N |

Cable Length = 100mm.





				P	V	D [A x B x C]
MINIMAL TRACK 24V Power Supply Box	ON/OFF	A384-00-07- NT		40W	24V	280 x 30 x 24mm
		A384-00-08- NT		100W	24V	280 x 30 x 24mm
Included ON/OFF 24Vdc Power Supply.						
MINIMAL TRACK 24V Remote Power Supply	ON/OFF	0434-01-37		60W	24V	180 x 52 x 30mm
		0433-10-22		100W	24V	295 x 43 x 30mm



DROP VOLTAGE TABLE



		CABLE LENGTH (m)			
		<5	<10	<20	<30
POWER (W)	CABLE SECTION (mm²)	TRACK LENGTH (m)			
		<5	<10	<20	<30
40	0,75	30	30	30	30
	1,5	30	30	30	30
60	0,75	30	30	20	10
	1,5	30	30	30	20
100	0,75	20	10	X	X
	1,5	20	20	10	X

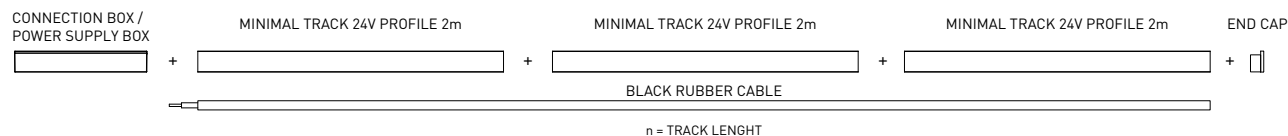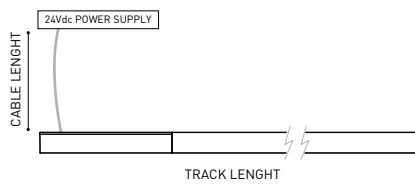

COLOUR | N ■ RAL 9005 | DIM OPTIONS PLEASE CONSULT

MINIMAL TRACK SUSPENSION

ARKOSLIGHT®



MINIMAL TRACK 24V Suspension


Profile 2m	A384-02-00-	N
Profile 2m Initial feed kit	A400-02-10-	N
Profile 2m Middle feed kit*	A400-02-20-	N

* Unidirectional Middle Feed.



MINIMAL TRACK 24V Suspension Straight Joiner


A400-00-02-	N
-------------	---



MINIMAL TRACK 24V Suspension Corner 90°

A400-00-03-	N
-------------	---

Cable Length = 85mm.



MINIMAL TRACK 24V Suspension

Rubber Cable n x 1m	A400-00-01-	N
---------------------	-------------	---


n = Total Length of System.

24V | Max. 4A



MINIMAL TRACK 24V Suspension Kit

A400-02-04-	N
-------------	---




MINIMAL TRACK 24V Suspension End Caps

A400-00-05-	N
-------------	---

Two End Caps Included





			P	V	D [A x B x C]
MINIMAL TRACK 24V Suspension Power Supply Box	ON/OFF	A400-00-06- NT	40W	24V	280 x 30 x 36mm
		A400-00-07- NT	100W	24V	280 x 30 x 36mm
Included ON/OFF 24Vdc Power Supply					
MINIMAL TRACK 24V Remote Power Supply	ON/OFF	0434-01-37	60W	24V	180 x 52 x 30mm
		0433-10-22	100W	24V	295 x 43 x 30mm



DROP VOLTAGE TABLE

POWER (W)	CABLE SECTION (mm²)	CABLE LENGTH (m)			
		<5	<10	<20	<30
40	0,75	30	30	30	30
	1,5	30	30	30	30
60	0,75	30	30	20	10
	1,5	30	30	30	20
100	0,75	20	10	X	X
	1,5	20	20	10	X

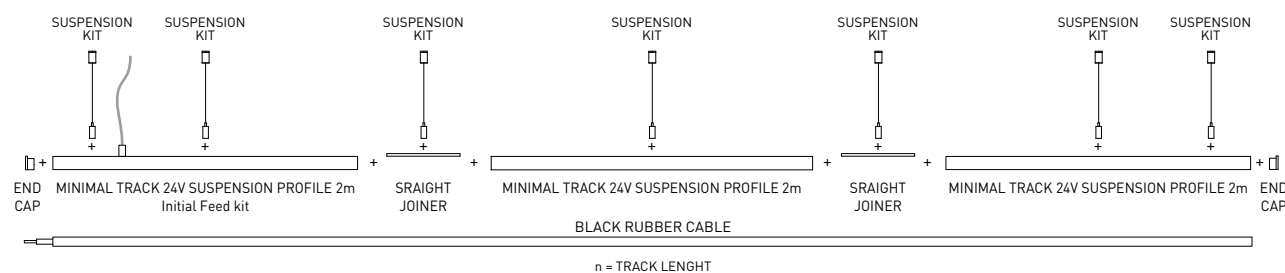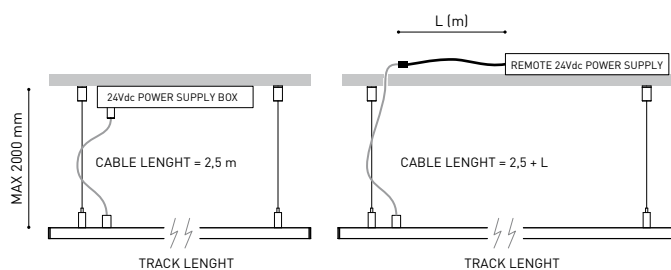

COLOUR | N ■ RAL 9005 | DIM OPTIONS PLEASE CONSULT

Calle N · Pol. Ind. EL OLIVERAL
46394 Ribarroja del Turia · Valencia (Spain)
Tel. +34 961 667 207 · Fax +34 961 667 054
info@arkoslight.com · www.arkoslight.com



WIRE TRIMLESS ACCESSORY


ARKOSLIGHT®

MINIMAL TRACK SUSPENSION



PRODUCT	
Model	Coaxial Timless
Reference	A023-00-03- W N
Colour	W ☐ RAL 9016 N ☐ RAL 9005
Category	Accessories
Fasteners not available	
 REMOTE  INCL  Ø20	

DIMENSIONAL DRAWING




Wire Trimless Accessory is a collection of accessories for fitting tensioners and cables to Arkoslight luminaires suspended directly from the ceiling with any visible ceiling rose or fixings. This achieves a minimalist application with a visually tidy finish.

With Wire Trimless Accessory the items adjacent to the ceiling of the standard product (ceiling roses, fixings, driver boxes, etc.) are concealed by a simple recessed application.

Wire Trimless Accessory reduces the visual impact of the installation leading to extremely minimalist aesthetics. The wires come out of the ceiling material as a part of the structure. This detail creates a much purer, more essential layout, particular when several luminaires are fitted in an arrangement.



DIMENSIONS



ACCESSORIES



CORD ACCESSORY



MINIMAL TRACK OPTIONS

AWARDS

reddot winner 2020
innovative productreddot winner 2020
lighting designBronze Delta
ADI Awards 2020HONORABLE MENTION
EUROPEAN
PRODUCT
DESIGN
AWARDWINNER
2020archiproducts
DESIGN AWARDS
WINNER 2020

PRODUCT

Name	STICK 22 24V 2M 37° 3000K MG
Reference	A4100121MG
Color	Metallized gold
RAL	Electrolytic bath
Category	TRACKLIGHTS

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	475 Lm
Power	4,5 W
Power values of the system	5,00 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	37°
Lighting efficiency	82%
Efficacy	106 Lm/W
Current intensity	400 mA
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	III
Voltage	24 Vdc
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Cord length	Max. 2 m
Track type	Minimal Track
Weight	205 g.
Packaged weight	285 g.
Packaging dimensions	322 x 122 x 45mm
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene / Polycarbonate




Stick is a light fitting, designed for accent lighting, which underlines the verticality of the space where it is applied. The light buoyancy of such a light aesthetic piece is one of its greatest attractions.

POLAR DIAGRAM

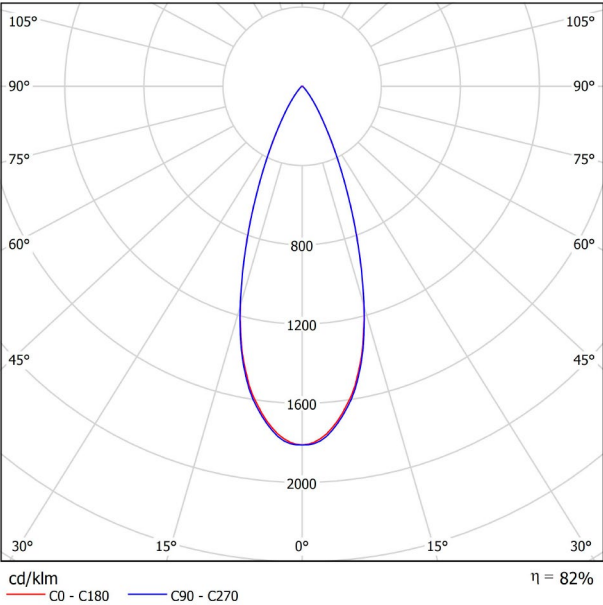


CONICAL DIAGRAM

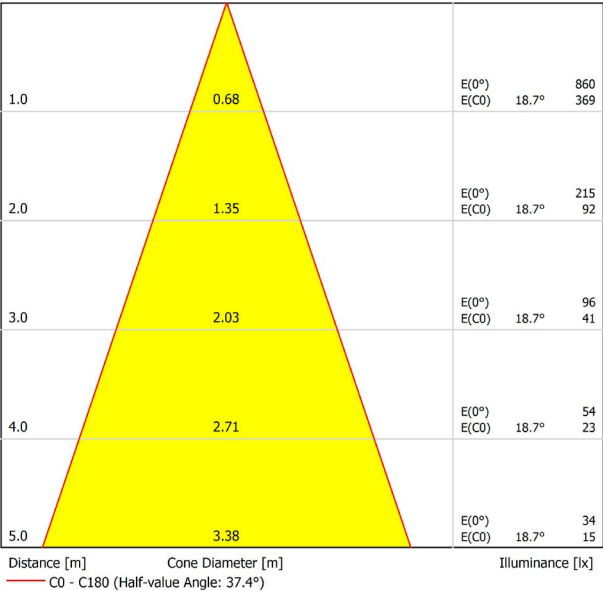




PRODUCT	
Model	Cord Accessory
Reference	02230000N
Colour	N ■ RAL9005
Category	Accessories


DIMENSIONAL DRAWING

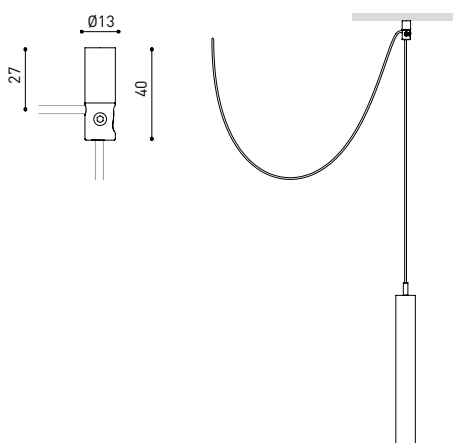



MINIMAL TRACK 24V Profile 2m

A384-00-00- | N |



MINIMAL TRACK 24V Rubber Cable n x 1m

A384-00-01- | N |


n = Total Length of System.

24V | Max. 4A

MINIMAL TRACK 24V Corner 90° 1 Plane

A384-00-02- | N |

Cable Length = 35mm.



MINIMAL TRACK 24V End Cap


A384-00-05- | N |



MINIMAL TRACK 24V Corner 90° 1 Plane Rounded


A384-00-03- | N |

Cable Length = 35mm.



MINIMAL TRACK 24V Connection Box


A384-00-06- | N |




MINIMAL TRACK 24V Corner 90° 2 Planes

A384-00-04- | N |

Cable Length = 100mm.





				P	V	D [A x B x C]
MINIMAL TRACK 24V Power Supply Box	ON/OFF	A384-00-07- NT		40W	24V	280 x 30 x 24mm
		A384-00-08- NT		100W	24V	280 x 30 x 24mm
Included ON/OFF 24Vdc Power Supply.						
MINIMAL TRACK 24V Remote Power Supply	ON/OFF	0434-01-37		60W	24V	180 x 52 x 30mm
		0433-10-22		100W	24V	295 x 43 x 30mm



DROP VOLTAGE TABLE



		CABLE LENGTH [m]			
		<5	<10	<20	<30
POWER [W]	CABLE SECTION [mm²]	TRACK LENGTH [m]			
40	0,75	30	30	30	30
	1,5	30	30	30	30
60	0,75	30	30	20	10
	1,5	30	30	30	20
100	0,75	20	10	X	X
	1,5	20	20	10	X

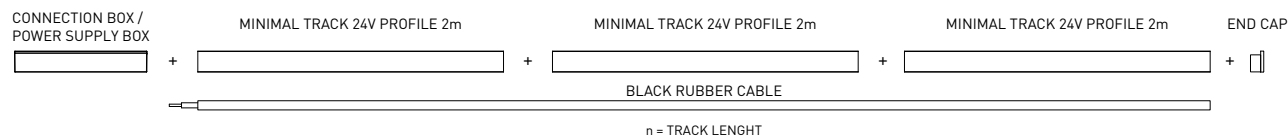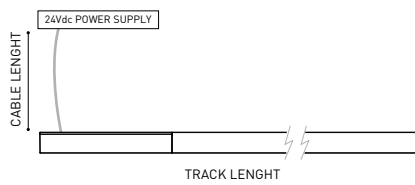

COLOUR | N ■ RAL 9005 | DIM OPTIONS PLEASE CONSULT

MINIMAL TRACK SUSPENSION

ARKOSLIGHT®



MINIMAL TRACK 24V Suspension


Profile 2m	A384-02-00-	N
Profile 2m Initial feed kit	A400-02-10-	N
Profile 2m Middle feed kit*	A400-02-20-	N

* Unidirectional Middle Feed.



MINIMAL TRACK 24V Suspension Straight Joiner


A400-00-02-	N
-------------	---



MINIMAL TRACK 24V Suspension Corner 90°

A400-00-03-	N
-------------	---

Cable Length = 85mm.



MINIMAL TRACK 24V Suspension

Rubber Cable n x 1m	A400-00-01-	N
---------------------	-------------	---


n = Total Length of System.

24V | Max. 4A



MINIMAL TRACK 24V Suspension Kit

A400-02-04-	N
-------------	---




MINIMAL TRACK 24V Suspension End Caps

A400-00-05-	N
-------------	---

Two End Caps Included





			P	V	D [A x B x C]
MINIMAL TRACK 24V Suspension Power Supply Box	ON/OFF	A400-00-06- NT	40W	24V	280 x 30 x 36mm
		A400-00-07- NT	100W	24V	280 x 30 x 36mm
Included ON/OFF 24Vdc Power Supply					
MINIMAL TRACK 24V Remote Power Supply	ON/OFF	0434-01-37	60W	24V	180 x 52 x 30mm
		0433-10-22	100W	24V	295 x 43 x 30mm



DROP VOLTAGE TABLE

POWER (W)	CABLE SECTION (mm²)	CABLE LENGTH (m)			
		<5	<10	<20	<30
40	0,75	30	30	30	30
	1,5	30	30	30	30
60	0,75	30	30	20	10
	1,5	30	30	30	20
100	0,75	20	10	X	X
	1,5	20	20	10	X

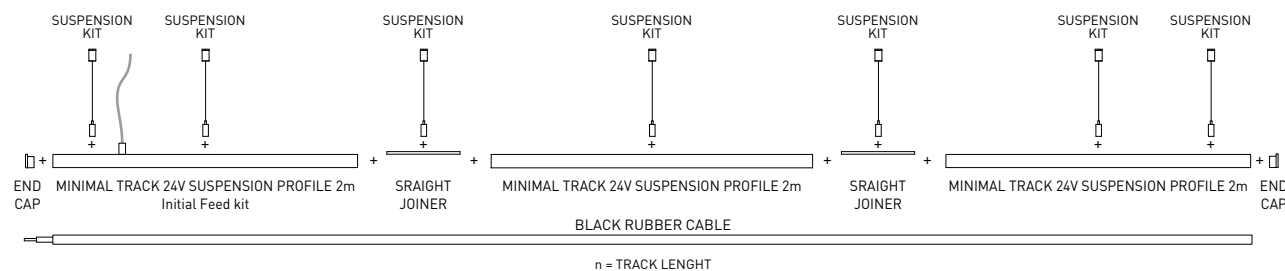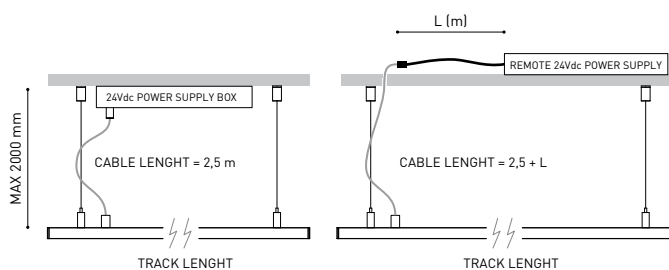

COLOUR | N ■ RAL 9005 | DIM OPTIONS PLEASE CONSULT

Calle N · Pol. Ind. EL OLIVERAL
46394 Ribarroja del Turia · Valencia (Spain)
Tel. +34 961 667 207 · Fax +34 961 667 054
info@arkoslight.com · www.arkoslight.com



WIRE TRIMLESS ACCESSORY


ARKOSLIGHT®

MINIMAL TRACK SUSPENSION



PRODUCT	
Model	Coaxial Timless
Reference	A023-00-03- W N
Colour	W ☐ RAL 9016 N ☐ RAL 9005
Category	Accessories
Fasteners not available	
 REMOTE  INCL  Ø20	

DIMENSIONAL DRAWING




Wire Trimless Accessory is a collection of accessories for fitting tensioners and cables to Arkoslight luminaires suspended directly from the ceiling with any visible ceiling rose or fixings. This achieves a minimalist application with a visually tidy finish.

With Wire Trimless Accessory the items adjacent to the ceiling of the standard product (ceiling roses, fixings, driver boxes, etc.) are concealed by a simple recessed application.

Wire Trimless Accessory reduces the visual impact of the installation leading to extremely minimalist aesthetics. The wires come out of the ceiling material as a part of the structure. This detail creates a much purer, more essential layout, particular when several luminaires are fitted in an arrangement.



DIMENSIONS



ACCESSORIES



CORD ACCESSORY



MINIMAL TRACK OPTIONS

AWARDS

reddot winner 2020
innovative productreddot winner 2020
lighting designBronze Delta
ADI Awards 2020HONORABLE MENTION
EUROPEAN
PRODUCT
DESIGN
AWARDWINNER
2020archiproducts
DESIGN AWARDS
WINNER 2020

PRODUCT

Name	STICK 22 24V 2M 37° 3000K NT
Reference	A4100121NT
Color	Textured black
RAL	9005
Category	TRACKLIGHTS

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	475 Lm
Power	4,5 W
Power values of the system	5,00 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	37°
Lighting efficiency	82%
Efficacy	106 Lm/W
Current intensity	400 mA
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	III
Voltage	24 Vdc
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Cord length	Max. 2 m
Track type	Minimal Track
Weight	205 g.
Packaged weight	285 g.
Packaging dimensions	322 x 122 x 45mm
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene / Polycarbonate




Stick is a light fitting, designed for accent lighting, which underlines the verticality of the space where it is applied. The light buoyancy of such a light aesthetic piece is one of its greatest attractions.

POLAR DIAGRAM

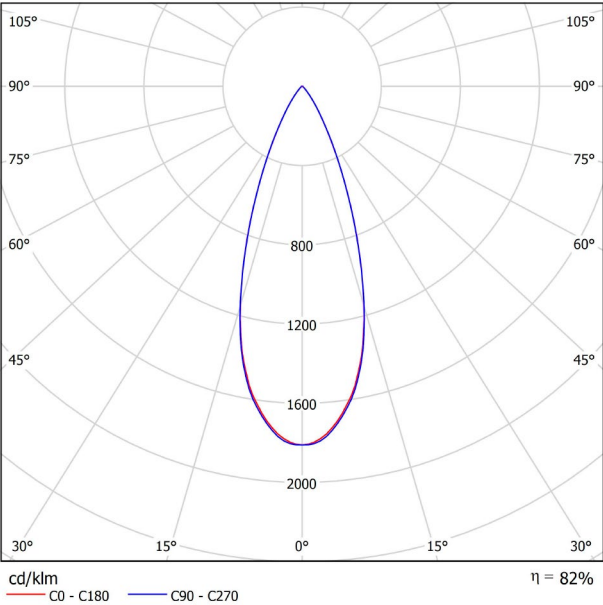


CONICAL DIAGRAM

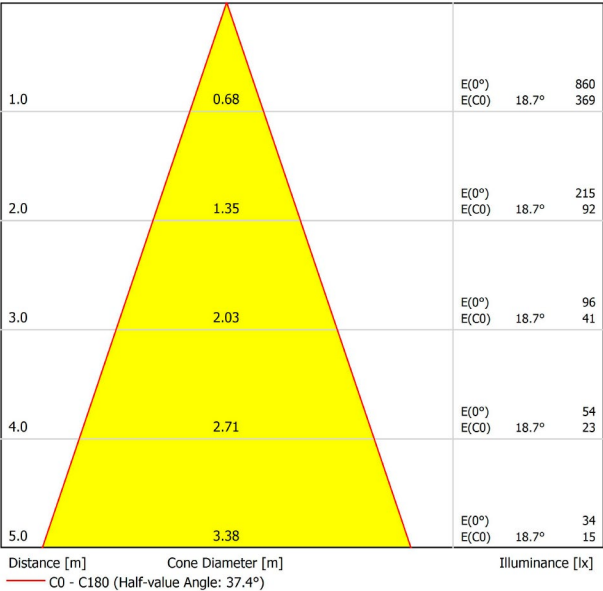




PRODUCT	
Model	Cord Accessory
Reference	02230000N
Colour	N ■ RAL9005
Category	Accessories


DIMENSIONAL DRAWING

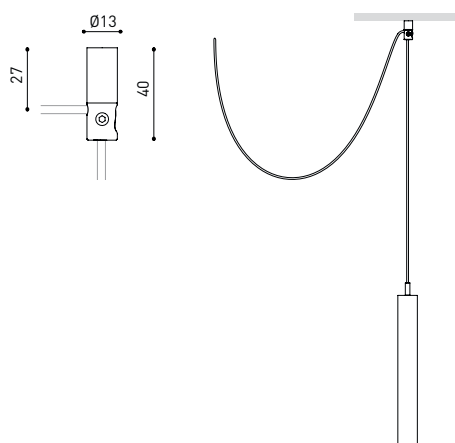



MINIMAL TRACK 24V Profile 2m

A384-00-00- | N |



MINIMAL TRACK 24V Rubber Cable n x 1m

A384-00-01- | N |


n = Total Length of System.

24V | Max. 4A

MINIMAL TRACK 24V Corner 90° 1 Plane

A384-00-02- | N |

Cable Length = 35mm.



MINIMAL TRACK 24V End Cap


A384-00-05- | N |



MINIMAL TRACK 24V Corner 90° 1 Plane Rounded


A384-00-03- | N |

Cable Length = 35mm.



MINIMAL TRACK 24V Connection Box


A384-00-06- | N |




MINIMAL TRACK 24V Corner 90° 2 Planes

A384-00-04- | N |

Cable Length = 100mm.





				P	V	D [A x B x C]
MINIMAL TRACK 24V Power Supply Box	ON/OFF	A384-00-07- NT		40W	24V	280 x 30 x 24mm
		A384-00-08- NT		100W	24V	280 x 30 x 24mm
Included ON/OFF 24Vdc Power Supply.						
MINIMAL TRACK 24V Remote Power Supply	ON/OFF	0434-01-37		60W	24V	180 x 52 x 30mm
		0433-10-22		100W	24V	295 x 43 x 30mm



DROP VOLTAGE TABLE



		CABLE LENGTH (m)			
		<5	<10	<20	<30
POWER (W)	CABLE SECTION (mm²)	TRACK LENGTH (m)			
		<5	<10	<20	<30
40	0,75	30	30	30	30
	1,5	30	30	30	30
60	0,75	30	30	20	10
	1,5	30	30	30	20
100	0,75	20	10	X	X
	1,5	20	20	10	X

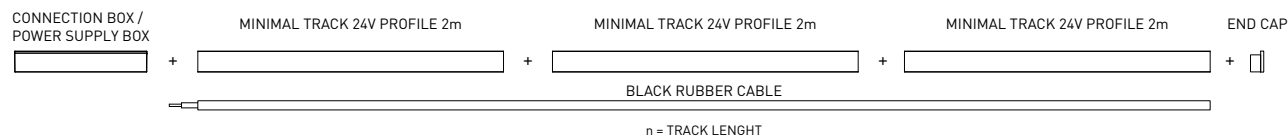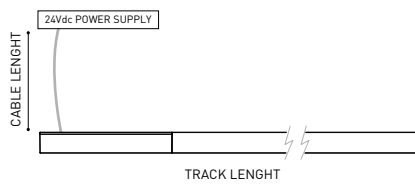

COLOUR | N ■ RAL 9005 | DIM OPTIONS PLEASE CONSULT

MINIMAL TRACK SUSPENSION

ARKOSLIGHT®



MINIMAL TRACK 24V Suspension


Profile 2m	A384-02-00-	N
Profile 2m Initial feed kit	A400-02-10-	N
Profile 2m Middle feed kit*	A400-02-20-	N

* Unidirectional Middle Feed.



MINIMAL TRACK 24V Suspension Straight Joiner


A400-00-02-	N
-------------	---



MINIMAL TRACK 24V Suspension Corner 90°

A400-00-03-	N
-------------	---

Cable Length = 85mm.



MINIMAL TRACK 24V Suspension

Rubber Cable n x 1m	A400-00-01-	N
---------------------	-------------	---


n = Total Length of System.

24V | Max. 4A



MINIMAL TRACK 24V Suspension Kit

A400-02-04-	N
-------------	---




MINIMAL TRACK 24V Suspension End Caps

A400-00-05-	N
-------------	---

Two End Caps Included





			P	V	D [A x B x C]
MINIMAL TRACK 24V Suspension Power Supply Box	ON/OFF	A400-00-06- NT	40W	24V	280 x 30 x 36mm
		A400-00-07- NT	100W	24V	280 x 30 x 36mm
Included ON/OFF 24Vdc Power Supply					
MINIMAL TRACK 24V Remote Power Supply	ON/OFF	0434-01-37	60W	24V	180 x 52 x 30mm
		0433-10-22	100W	24V	295 x 43 x 30mm



DROP VOLTAGE TABLE

POWER (W)	CABLE SECTION (mm²)	CABLE LENGTH (m)			
		<5	<10	<20	<30
40	0,75	30	30	30	30
	1,5	30	30	30	30
60	0,75	30	30	20	10
	1,5	30	30	30	20
100	0,75	20	10	X	X
	1,5	20	20	10	X

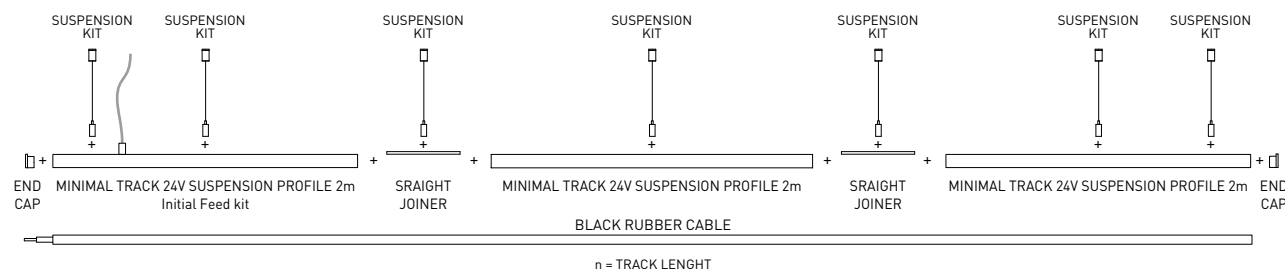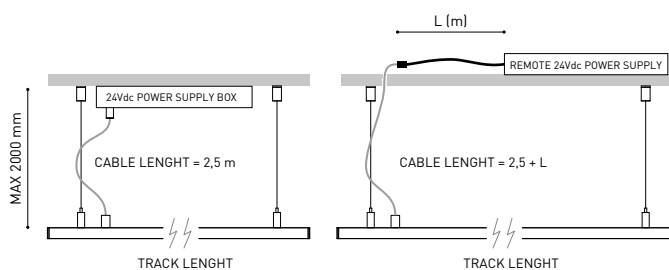

COLOUR | N ■ RAL 9005 | DIM OPTIONS PLEASE CONSULT

Calle N · Pol. Ind. EL OLIVERAL
46394 Ribarroja del Turia · Valencia (Spain)
Tel. +34 961 667 207 · Fax +34 961 667 054
info@arkoslight.com · www.arkoslight.com



WIRE TRIMLESS ACCESSORY


ARKOSLIGHT®

MINIMAL TRACK SUSPENSION



PRODUCT	
Model	Coaxial Timless
Reference	A023-00-03- W N
Colour	W ☐ RAL 9016 N ☐ RAL 9005
Category	Accessories
Fasteners not available	
 REMOTE  INCL  Ø20	

DIMENSIONAL DRAWING




Wire Trimless Accessory is a collection of accessories for fitting tensioners and cables to Arkoslight luminaires suspended directly from the ceiling with any visible ceiling rose or fixings. This achieves a minimalist application with a visually tidy finish.

With Wire Trimless Accessory the items adjacent to the ceiling of the standard product (ceiling roses, fixings, driver boxes, etc.) are concealed by a simple recessed application.

Wire Trimless Accessory reduces the visual impact of the installation leading to extremely minimalist aesthetics. The wires come out of the ceiling material as a part of the structure. This detail creates a much purer, more essential layout, particular when several luminaires are fitted in an arrangement.



DIMENSIONS



ACCESSORIES



CORD ACCESSORY



MINIMAL TRACK OPTIONS

AWARDS

reddot winner 2020
innovative productreddot winner 2020
lighting designBronze Delta
ADI Awards 2020HONORABLE MENTION
EUROPEAN
PRODUCT
DESIGN
AWARDWINNER
2020archiproducts
DESIGN AWARDS
WINNER 2020

PRODUCT

Name	STICK 22 24V 2M 37° 3000K WT
Reference	A4100121WT
Color	Textured white
RAL	9016
Category	TRACKLIGHTS

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	475 Lm
Power	4,5 W
Power values of the system	5,00 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	37°
Lighting efficiency	82%
Efficacy	106 Lm/W
Current intensity	400 mA
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	III
Voltage	24 Vdc
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Cord length	Max. 2 m
Track type	Minimal Track
Weight	205 g.
Packaged weight	285 g.
Packaging dimensions	322 x 122 x 45mm
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene / Polycarbonate




Stick is a light fitting, designed for accent lighting, which underlines the verticality of the space where it is applied. The light buoyancy of such a light aesthetic piece is one of its greatest attractions.

POLAR DIAGRAM

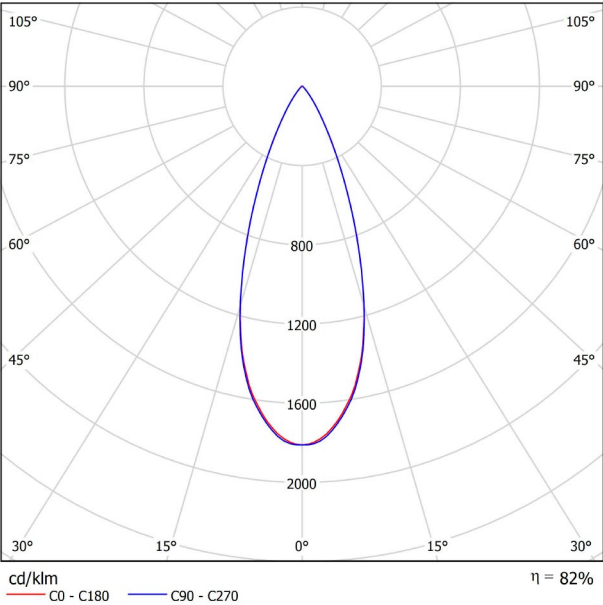


CONICAL DIAGRAM

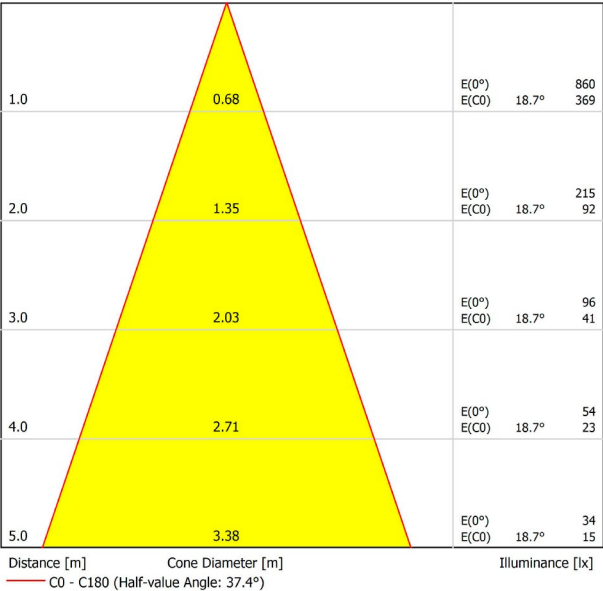




PRODUCT	
Model	Cord Accessory
Reference	02230000N
Colour	N ■ RAL9005
Category	Accessories


DIMENSIONAL DRAWING

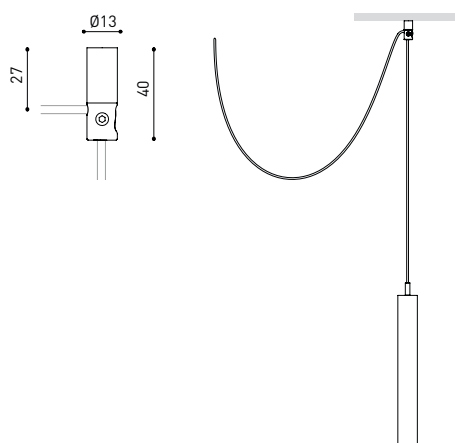



MINIMAL TRACK 24V Profile 2m

A384-00-00- | N |



MINIMAL TRACK 24V Rubber Cable n x 1m

A384-00-01- | N |


n = Total Length of System.

24V | Max. 4A

MINIMAL TRACK 24V Corner 90° 1 Plane

A384-00-02- | N |

Cable Length = 35mm.



MINIMAL TRACK 24V End Cap


A384-00-05- | N |



MINIMAL TRACK 24V Corner 90° 1 Plane Rounded


A384-00-03- | N |

Cable Length = 35mm.



MINIMAL TRACK 24V Connection Box


A384-00-06- | N |




MINIMAL TRACK 24V Corner 90° 2 Planes

A384-00-04- | N |

Cable Length = 100mm.





				P	V	D [A x B x C]
MINIMAL TRACK 24V Power Supply Box	ON/OFF	A384-00-07- NT		40W	24V	280 x 30 x 24mm
		A384-00-08- NT		100W	24V	280 x 30 x 24mm
Included ON/OFF 24Vdc Power Supply.						
MINIMAL TRACK 24V Remote Power Supply	ON/OFF	0434-01-37		60W	24V	180 x 52 x 30mm
		0433-10-22		100W	24V	295 x 43 x 30mm



DROP VOLTAGE TABLE



		CABLE LENGTH (m)			
		<5	<10	<20	<30
POWER (W)	CABLE SECTION (mm²)	TRACK LENGTH (m)			
		<5	<10	<20	<30
40	0,75	30	30	30	30
	1,5	30	30	30	30
60	0,75	30	30	20	10
	1,5	30	30	30	20
100	0,75	20	10	X	X
	1,5	20	20	10	X

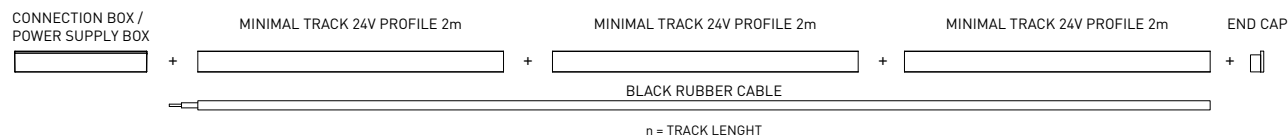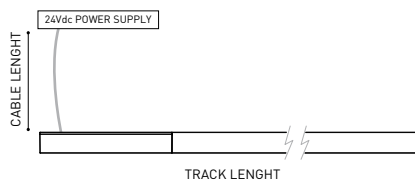

COLOUR | N ■ RAL 9005 | DIM OPTIONS PLEASE CONSULT

MINIMAL TRACK SUSPENSION

ARKOSLIGHT®



MINIMAL TRACK 24V Suspension


Profile 2m	A384-02-00-	N
Profile 2m Initial feed kit	A400-02-10-	N
Profile 2m Middle feed kit*	A400-02-20-	N

* Unidirectional Middle Feed.



MINIMAL TRACK 24V Suspension Straight Joiner


A400-00-02-	N
-------------	---



MINIMAL TRACK 24V Suspension Corner 90°

A400-00-03-	N
-------------	---

Cable Length = 85mm.



MINIMAL TRACK 24V Suspension

Rubber Cable n x 1m	A400-00-01-	N
---------------------	-------------	---


n = Total Length of System.

24V | Max. 4A



MINIMAL TRACK 24V Suspension Kit

A400-02-04-	N
-------------	---




MINIMAL TRACK 24V Suspension End Caps

A400-00-05-	N
-------------	---

Two End Caps Included





			P	V	D [A x B x C]
MINIMAL TRACK 24V Suspension Power Supply Box	ON/OFF	A400-00-06- NT	40W	24V	280 x 30 x 36mm
		A400-00-07- NT	100W	24V	280 x 30 x 36mm
Included ON/OFF 24Vdc Power Supply					
MINIMAL TRACK 24V Remote Power Supply	ON/OFF	0434-01-37	60W	24V	180 x 52 x 30mm
		0433-10-22	100W	24V	295 x 43 x 30mm



DROP VOLTAGE TABLE

POWER (W)	CABLE SECTION (mm²)	CABLE LENGTH (m)			
		<5	<10	<20	<30
40	0,75	30	30	30	30
	1,5	30	30	30	30
60	0,75	30	30	20	10
	1,5	30	30	30	20
100	0,75	20	10	X	X
	1,5	20	20	10	X

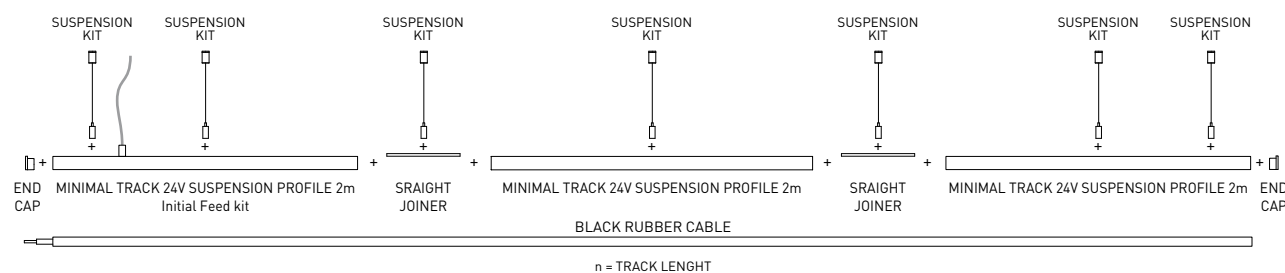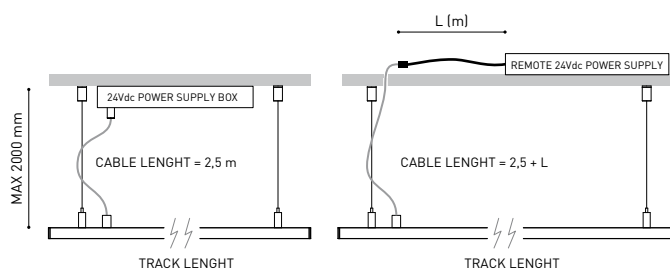

COLOUR | N ■ RAL 9005 | DIM OPTIONS PLEASE CONSULT

Calle N · Pol. Ind. EL OLIVERAL
46394 Ribarroja del Turia · Valencia (Spain)
Tel. +34 961 667 207 · Fax +34 961 667 054
info@arkoslight.com · www.arkoslight.com



WIRE TRIMLESS ACCESSORY


ARKOSLIGHT®

MINIMAL TRACK SUSPENSION



PRODUCT	
Model	Coaxial Timless
Reference	A023-00-03- W N
Colour	W ☐ RAL 9016 N ☐ RAL 9005
Category	Accessories
Fasteners not available	
 REMOTE  INCL  Ø20	

DIMENSIONAL DRAWING




Wire Trimless Accessory is a collection of accessories for fitting tensioners and cables to Arkoslight luminaires suspended directly from the ceiling with any visible ceiling rose or fixings. This achieves a minimalist application with a visually tidy finish.

With Wire Trimless Accessory the items adjacent to the ceiling of the standard product (ceiling roses, fixings, driver boxes, etc.) are concealed by a simple recessed application.

Wire Trimless Accessory reduces the visual impact of the installation leading to extremely minimalist aesthetics. The wires come out of the ceiling material as a part of the structure. This detail creates a much purer, more essential layout, particular when several luminaires are fitted in an arrangement.



DIMENSIONS



ACCESSORIES



CORD ACCESSORY



MINIMAL TRACK OPTIONS

AWARDS

reddot winner 2020
innovative productreddot winner 2020
lighting designBronze Delta
ADI Awards 2020HONORABLE MENTION
EUROPEAN
PRODUCT
DESIGN
AWARDWINNER
2020archiproducts
DESIGN AWARDS
WINNER 2020

PRODUCT

Name	STICK 22 24V 2M 46° 2700K MG
Reference	A4100130MG
Color	Metallized gold
RAL	Electrolytic bath
Category	TRACKLIGHTS

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	440 Lm
Power	4,5 W
Power values of the system	5,00 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	46°
Lighting efficiency	81%
Efficacy	98 Lm/W
Current intensity	400 mA
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	III
Voltage	24 Vdc
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Cord length	Max. 2 m
Track type	Minimal Track
Weight	205 g.
Packaged weight	285 g.
Packaging dimensions	322 x 122 x 45mm
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene / Polycarbonate




Stick is a light fitting, designed for accent lighting, which underlines the verticality of the space where it is applied. The light buoyancy of such a light aesthetic piece is one of its greatest attractions.

POLAR DIAGRAM

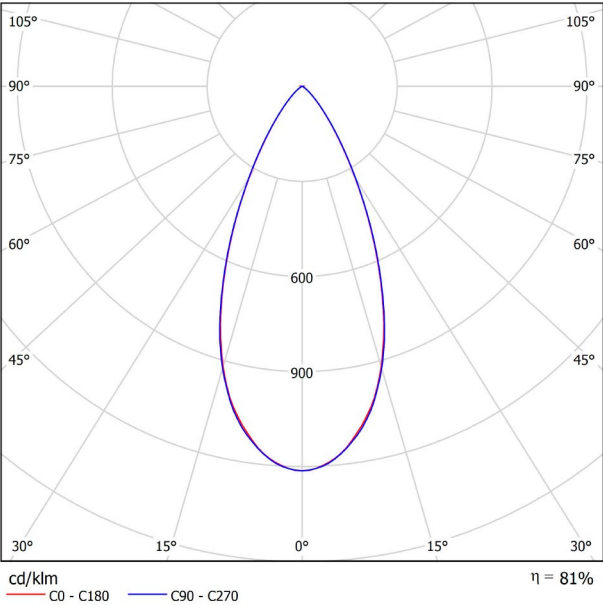


CONICAL DIAGRAM

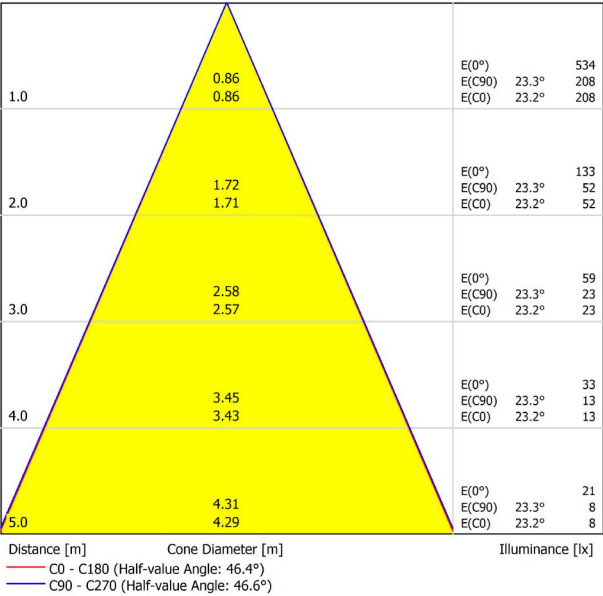




PRODUCT	
Model	Cord Accessory
Reference	02230000N
Colour	N ■ RAL9005
Category	Accessories


DIMENSIONAL DRAWING

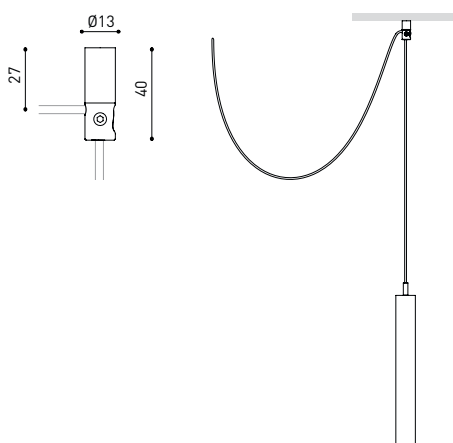



MINIMAL TRACK 24V Profile 2m

A384-00-00- | N |



MINIMAL TRACK 24V Rubber Cable n x 1m

A384-00-01- | N |


n = Total Length of System.

24V | Max. 4A

MINIMAL TRACK 24V Corner 90° 1 Plane

A384-00-02- | N |

Cable Length = 35mm.



MINIMAL TRACK 24V End Cap


A384-00-05- | N |



MINIMAL TRACK 24V Corner 90° 1 Plane Rounded


A384-00-03- | N |

Cable Length = 35mm.



MINIMAL TRACK 24V Connection Box


A384-00-06- | N |




MINIMAL TRACK 24V Corner 90° 2 Planes

A384-00-04- | N |

Cable Length = 100mm.





				P	V	D [A x B x C]
MINIMAL TRACK 24V Power Supply Box	ON/OFF	A384-00-07- NT		40W	24V	280 x 30 x 24mm
		A384-00-08- NT		100W	24V	280 x 30 x 24mm
Included ON/OFF 24Vdc Power Supply.						
MINIMAL TRACK 24V Remote Power Supply	ON/OFF	0434-01-37		60W	24V	180 x 52 x 30mm
		0433-10-22		100W	24V	295 x 43 x 30mm



DROP VOLTAGE TABLE



		CABLE LENGTH (m)			
		<5	<10	<20	<30
POWER (W)	CABLE SECTION (mm²)	TRACK LENGTH (m)			
		<5	<10	<20	<30
40	0,75	30	30	30	30
	1,5	30	30	30	30
60	0,75	30	30	20	10
	1,5	30	30	30	20
100	0,75	20	10	X	X
	1,5	20	20	10	X

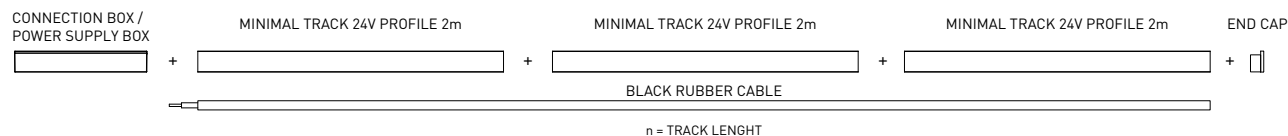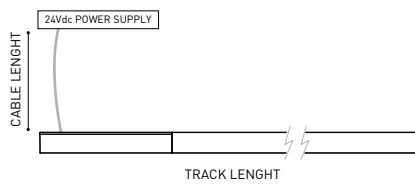

COLOUR | N ■ RAL 9005 | DIM OPTIONS PLEASE CONSULT

MINIMAL TRACK SUSPENSION

ARKOSLIGHT®



MINIMAL TRACK 24V Suspension


Profile 2m	A384-02-00-	N
Profile 2m Initial feed kit	A400-02-10-	N
Profile 2m Middle feed kit*	A400-02-20-	N

* Unidirectional Middle Feed.



MINIMAL TRACK 24V Suspension Straight Joiner


A400-00-02- | N |



MINIMAL TRACK 24V Suspension Corner 90°

A400-00-03- | N |

Cable Length = 85mm.



MINIMAL TRACK 24V Suspension

Rubber Cable n x 1m

A400-00-01- | N |


n = Total Length of System.

24V | Max. 4A



MINIMAL TRACK 24V Suspension Kit

A400-02-04- | N |




MINIMAL TRACK 24V Suspension End Caps

A400-00-05- | N |

Two End Caps Included





			P	V	D [A x B x C]
MINIMAL TRACK 24V Suspension Power Supply Box	ON/OFF	A400-00-06- NT	40W	24V	280 x 30 x 36mm
		A400-00-07- NT	100W	24V	280 x 30 x 36mm
Included ON/OFF 24Vdc Power Supply					
MINIMAL TRACK 24V Remote Power Supply	ON/OFF	0434-01-37	60W	24V	180 x 52 x 30mm
		0433-10-22	100W	24V	295 x 43 x 30mm



DROP VOLTAGE TABLE

POWER (W)	CABLE SECTION (mm²)	CABLE LENGTH (m)			
		<5	<10	<20	<30
40	0,75	30	30	30	30
	1,5	30	30	30	30
60	0,75	30	30	20	10
	1,5	30	30	30	20
100	0,75	20	10	X	X
	1,5	20	20	10	X

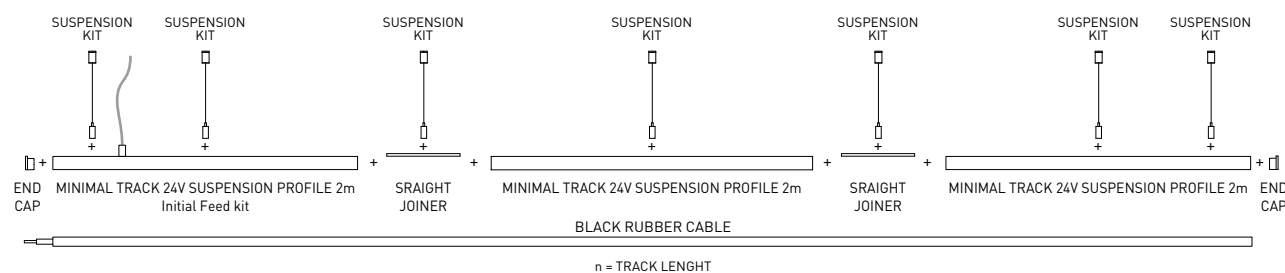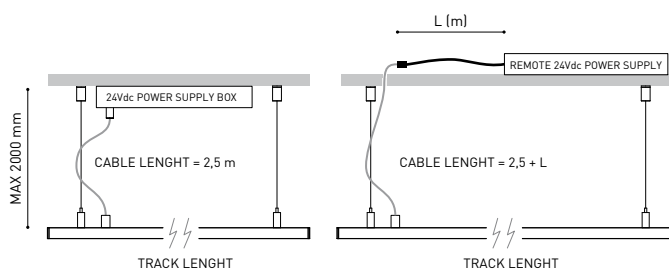

COLOUR | N ■ RAL 9005 | DIM OPTIONS PLEASE CONSULT

Calle N · Pol. Ind. EL OLIVERAL
46394 Ribarroja del Turia · Valencia (Spain)
Tel. +34 961 667 207 · Fax +34 961 667 054
info@arkoslight.com · www.arkoslight.com



WIRE TRIMLESS ACCESSORY


ARKOSLIGHT®

MINIMAL TRACK SUSPENSION



PRODUCT	
Model	Coaxial Timless
Reference	A023-00-03- W N
Colour	W ☐ RAL 9016 N ☐ RAL 9005
Category	Accessories
Fasteners not available	
 REMOTE  INCL  Ø20	

DIMENSIONAL DRAWING




Wire Trimless Accessory is a collection of accessories for fitting tensioners and cables to Arkoslight luminaires suspended directly from the ceiling with any visible ceiling rose or fixings. This achieves a minimalist application with a visually tidy finish.

With Wire Trimless Accessory the items adjacent to the ceiling of the standard product (ceiling roses, fixings, driver boxes, etc.) are concealed by a simple recessed application.

Wire Trimless Accessory reduces the visual impact of the installation leading to extremely minimalist aesthetics. The wires come out of the ceiling material as a part of the structure. This detail creates a much purer, more essential layout, particular when several luminaires are fitted in an arrangement.



DIMENSIONS



ACCESSORIES



CORD ACCESSORY



MINIMAL TRACK OPTIONS

AWARDS

reddot winner 2020
innovative productreddot winner 2020
lighting designBronze Delta
ADI Awards 2020HONORABLE MENTION
EUROPEAN
PRODUCT
DESIGN
AWARDWINNER
2020archiproducts
DESIGN AWARDS
WINNER 2020

PRODUCT

Name	STICK 22 24V 2M 46° 2700K NT
Reference	A4100130NT
Color	Textured black
RAL	9005
Category	TRACKLIGHTS

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	440 Lm
Power	4,5 W
Power values of the system	5,00 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	46°
Lighting efficiency	81%
Efficacy	98 Lm/W
Current intensity	400 mA
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	III
Voltage	24 Vdc
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Cord length	Max. 2 m
Track type	Minimal Track
Weight	205 g.
Packaged weight	285 g.
Packaging dimensions	322 x 122 x 45mm
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene / Polycarbonate




Stick is a light fitting, designed for accent lighting, which underlines the verticality of the space where it is applied. The light buoyancy of such a light aesthetic piece is one of its greatest attractions.

POLAR DIAGRAM

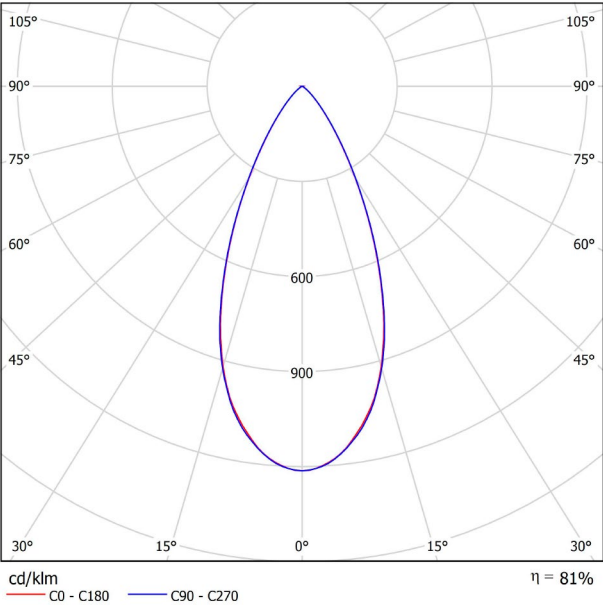


CONICAL DIAGRAM

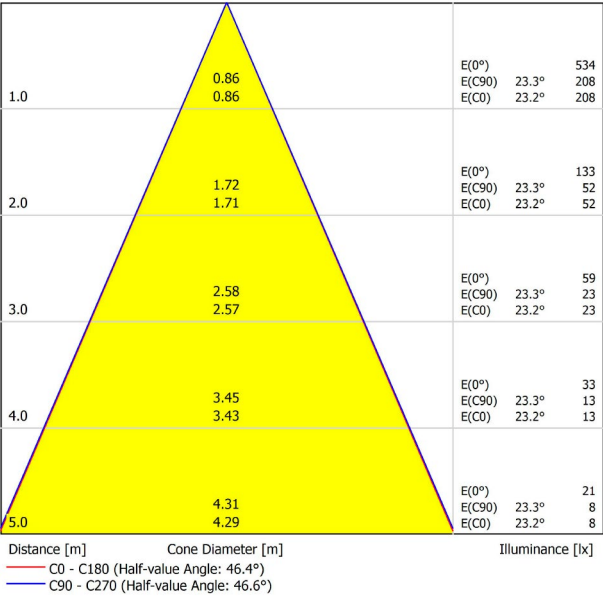




PRODUCT	
Model	Cord Accessory
Reference	02230000N
Colour	N ■ RAL9005
Category	Accessories


DIMENSIONAL DRAWING

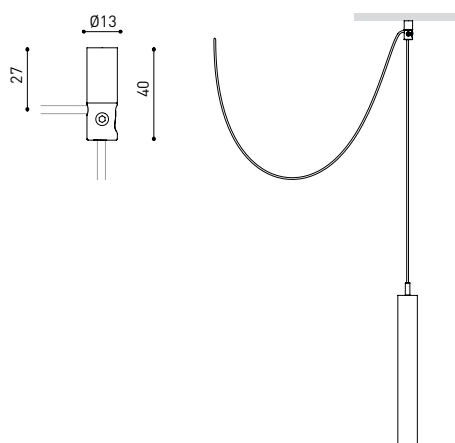



MINIMAL TRACK 24V Profile 2m

A384-00-00- | N |



MINIMAL TRACK 24V Rubber Cable n x 1m

A384-00-01- | N |


n = Total Length of System.

24V | Max. 4A

MINIMAL TRACK 24V Corner 90° 1 Plane

A384-00-02- | N |

Cable Length = 35mm.



MINIMAL TRACK 24V End Cap


A384-00-05- | N |



MINIMAL TRACK 24V Corner 90° 1 Plane Rounded


A384-00-03- | N |

Cable Length = 35mm.



MINIMAL TRACK 24V Connection Box


A384-00-06- | N |




MINIMAL TRACK 24V Corner 90° 2 Planes

A384-00-04- | N |

Cable Length = 100mm.





				P	V	D [A x B x C]
MINIMAL TRACK 24V Power Supply Box	ON/OFF	A384-00-07- NT		40W	24V	280 x 30 x 24mm
		A384-00-08- NT		100W	24V	280 x 30 x 24mm
Included ON/OFF 24Vdc Power Supply.						
MINIMAL TRACK 24V Remote Power Supply	ON/OFF	0434-01-37		60W	24V	180 x 52 x 30mm
		0433-10-22		100W	24V	295 x 43 x 30mm



DROP VOLTAGE TABLE



		CABLE LENGTH [m]			
		<5	<10	<20	<30
POWER [W]	CABLE SECTION [mm²]	TRACK LENGTH [m]			
		<5	<10	<20	<30
40	0,75	30	30	30	30
	1,5	30	30	30	30
60	0,75	30	30	20	10
	1,5	30	30	30	20
100	0,75	20	10	X	X
	1,5	20	20	10	X

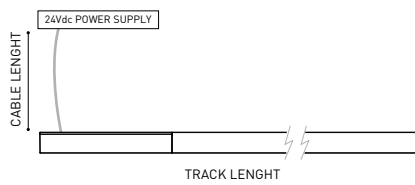

COLOUR | N ■ RAL 9005 | DIM OPTIONS PLEASE CONSULT

MINIMAL TRACK SUSPENSION

ARKOSLIGHT®



MINIMAL TRACK 24V Suspension


Profile 2m	A384-02-00-	N
Profile 2m Initial feed kit	A400-02-10-	N
Profile 2m Middle feed kit*	A400-02-20-	N

* Unidirectional Middle Feed.



MINIMAL TRACK 24V Suspension Straight Joiner


A400-00-02- | N |



MINIMAL TRACK 24V Suspension Corner 90°

A400-00-03- | N |

Cable Length = 85mm.



MINIMAL TRACK 24V Suspension

Rubber Cable n x 1m A400-00-01- | N |


n = Total Length of System.

24V | Max. 4A



MINIMAL TRACK 24V Suspension Kit

A400-02-04- | N |




MINIMAL TRACK 24V Suspension End Caps

A400-00-05- | N |

Two End Caps Included





				P	V	D (A x B x C)
MINIMAL TRACK 24V Suspension Power Supply Box	ON/OFF	A400-00-06- NT		40W	24V	280 x 30 x 36mm
		A400-00-07- NT		100W	24V	280 x 30 x 36mm
Included ON/OFF 24Vdc Power Supply						
MINIMAL TRACK 24V Remote Power Supply	ON/OFF	0434-01-37		60W	24V	180 x 52 x 30mm
		0433-10-22		100W	24V	295 x 43 x 30mm



DROP VOLTAGE TABLE

POWER (W)	CABLE SECTION (mm²)	CABLE LENGTH (m)			
		<5	<10	<20	<30
40	0,75	30	30	30	30
	1,5	30	30	30	30
60	0,75	30	30	20	10
	1,5	30	30	30	20
100	0,75	20	10	X	X
	1,5	20	20	10	X

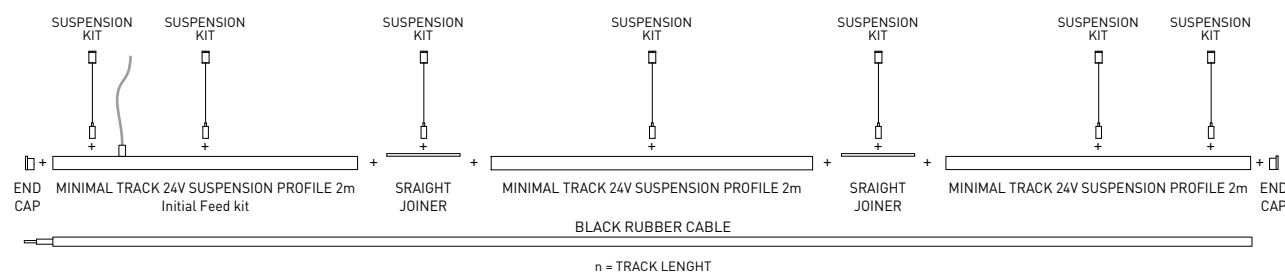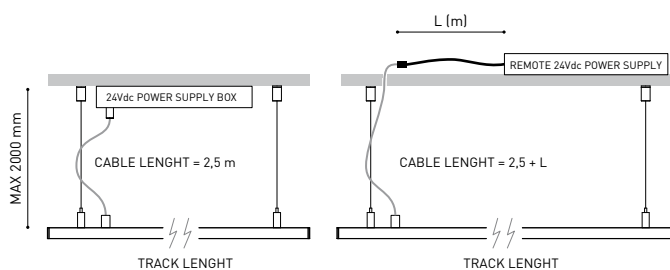

COLOUR | N ■ RAL 9005 | DIM OPTIONS PLEASE CONSULT

Calle N · Pol. Ind. EL OLIVERAL
46394 Ribarroja del Turia · Valencia (Spain)
Tel. +34 961 667 207 · Fax +34 961 667 054
info@arkoslight.com · www.arkoslight.com



WIRE TRIMLESS ACCESSORY


ARKOSLIGHT®

MINIMAL TRACK SUSPENSION



PRODUCT	
Model	Coaxial Timless
Reference	A023-00-03- W N
Colour	W ☐ RAL 9016 N ☐ RAL 9005
Category	Accessories
Fasteners not available	
 REMOTE  INCL  Ø20	

DIMENSIONAL DRAWING




Wire Trimless Accessory is a collection of accessories for fitting tensioners and cables to Arkoslight luminaires suspended directly from the ceiling with any visible ceiling rose or fixings. This achieves a minimalist application with a visually tidy finish.

With Wire Trimless Accessory the items adjacent to the ceiling of the standard product (ceiling roses, fixings, driver boxes, etc.) are concealed by a simple recessed application.

Wire Trimless Accessory reduces the visual impact of the installation leading to extremely minimalist aesthetics. The wires come out of the ceiling material as a part of the structure. This detail creates a much purer, more essential layout, particular when several luminaires are fitted in an arrangement.



DIMENSIONS



ACCESSORIES



CORD ACCESSORY



MINIMAL TRACK OPTIONS

AWARDS

reddot winner 2020
innovative productreddot winner 2020
lighting designBronze Delta
ADI Awards 2020HONORABLE MENTION
EUROPEAN
PRODUCT
DESIGN
AWARDWINNER
2020archiproducts
DESIGN AWARDS
WINNER 2020

PRODUCT

Name	STICK 22 24V 2M 46° 2700K WT
Reference	A4100130WT
Color	Textured white
RAL	9016
Category	TRACKLIGHTS

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	440 Lm
Power	4,5 W
Power values of the system	5,00 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	46°
Lighting efficiency	81%
Efficacy	98 Lm/W
Current intensity	400 mA
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	III
Voltage	24 Vdc
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Cord length	Max. 2 m
Track type	Minimal Track
Weight	205 g.
Packaged weight	285 g.
Packaging dimensions	322 x 122 x 45mm
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene / Polycarbonate




Stick is a light fitting, designed for accent lighting, which underlines the verticality of the space where it is applied. The light buoyancy of such a light aesthetic piece is one of its greatest attractions.

POLAR DIAGRAM

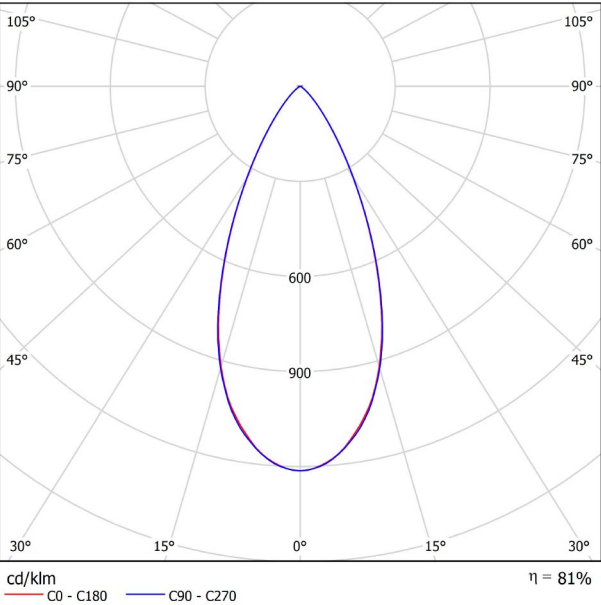


CONICAL DIAGRAM

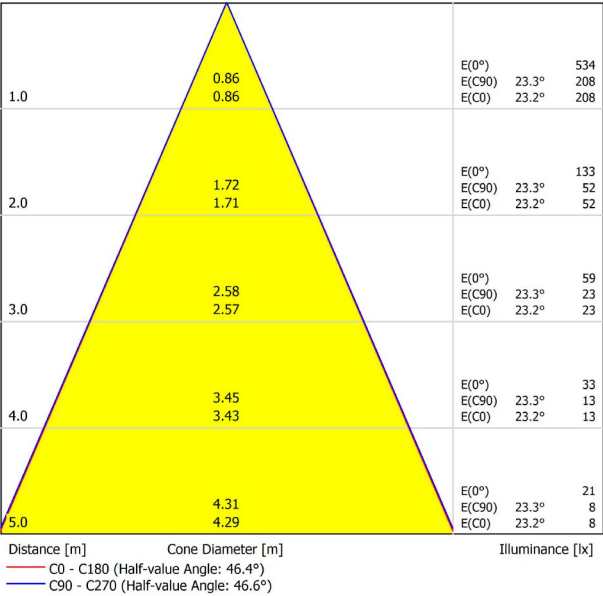




PRODUCT	
Model	Cord Accessory
Reference	02230000N
Colour	N ■ RAL9005
Category	Accessories


DIMENSIONAL DRAWING

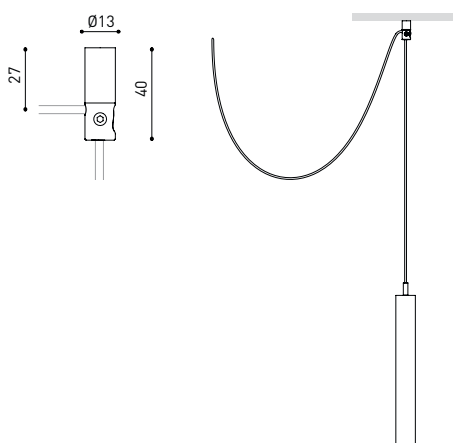



MINIMAL TRACK 24V Profile 2m

A384-02-00- | N |



MINIMAL TRACK 24V Rubber Cable n x 1m

A384-00-01- | N |


n = Total Length of System.

24V | Max. 4A

MINIMAL TRACK 24V Corner 90° 1 Plane

A384-00-02- | N |

Cable Length = 35mm.



MINIMAL TRACK 24V End Cap


A384-00-05- | N |



MINIMAL TRACK 24V Corner 90° 1 Plane Rounded


A384-00-03- | N |

Cable Length = 35mm.



MINIMAL TRACK 24V Connection Box


A384-00-06- | N |




MINIMAL TRACK 24V Corner 90° 2 Planes

A384-00-04- | N |

Cable Length = 100mm.





				P	V	D [A x B x C]
MINIMAL TRACK 24V Power Supply Box	ON/OFF	A384-00-07- NT		40W	24V	280 x 30 x 24mm
		A384-00-08- NT		100W	24V	280 x 30 x 24mm
Included ON/OFF 24Vdc Power Supply.						
MINIMAL TRACK 24V Remote Power Supply	ON/OFF	0434-01-37		60W	24V	180 x 52 x 30mm
		0433-10-22		100W	24V	295 x 43 x 30mm



DROP VOLTAGE TABLE



		CABLE LENGTH [m]			
		<5	<10	<20	<30
POWER [W]	CABLE SECTION [mm²]	TRACK LENGTH [m]			
		<5	<10	<20	<30
40	0,75	30	30	30	30
	1,5	30	30	30	30
60	0,75	30	30	20	10
	1,5	30	30	30	20
100	0,75	20	10	X	X
	1,5	20	20	10	X

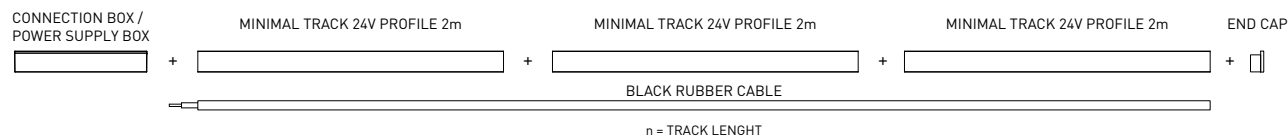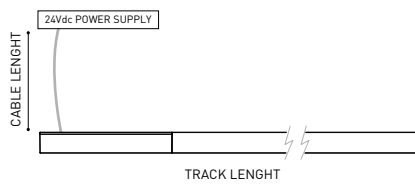

COLOUR | N ■ RAL 9005 | DIM OPTIONS PLEASE CONSULT

MINIMAL TRACK SUSPENSION

ARKOSLIGHT®



MINIMAL TRACK 24V Suspension


Profile 2m	A384-02-00-	N
Profile 2m Initial feed kit	A400-02-10-	N
Profile 2m Middle feed kit*	A400-02-20-	N

* Unidirectional Middle Feed.



MINIMAL TRACK 24V Suspension Straight Joiner


A400-00-02-	N
-------------	---



MINIMAL TRACK 24V Suspension Corner 90°

A400-00-03-	N
-------------	---

Cable Length = 85mm.



MINIMAL TRACK 24V Suspension

Rubber Cable n x 1m	A400-00-01-	N
---------------------	-------------	---


n = Total Length of System.

24V | Max. 4A



MINIMAL TRACK 24V Suspension Kit

A400-02-04-	N
-------------	---




MINIMAL TRACK 24V Suspension End Caps

A400-00-05-	N
-------------	---

Two End Caps Included





			P	V	D [A x B x C]
MINIMAL TRACK 24V Suspension Power Supply Box	ON/OFF	A400-00-06- NT	40W	24V	280 x 30 x 36mm
		A400-00-07- NT	100W	24V	280 x 30 x 36mm
Included ON/OFF 24Vdc Power Supply					
MINIMAL TRACK 24V Remote Power Supply	ON/OFF	0434-01-37	60W	24V	180 x 52 x 30mm
		0433-10-22	100W	24V	295 x 43 x 30mm



DROP VOLTAGE TABLE

POWER (W)	CABLE SECTION (mm²)	CABLE LENGTH (m)			
		<5	<10	<20	<30
40	0,75	30	30	30	30
	1,5	30	30	30	30
60	0,75	30	30	20	10
	1,5	30	30	30	20
100	0,75	20	10	X	X
	1,5	20	20	10	X

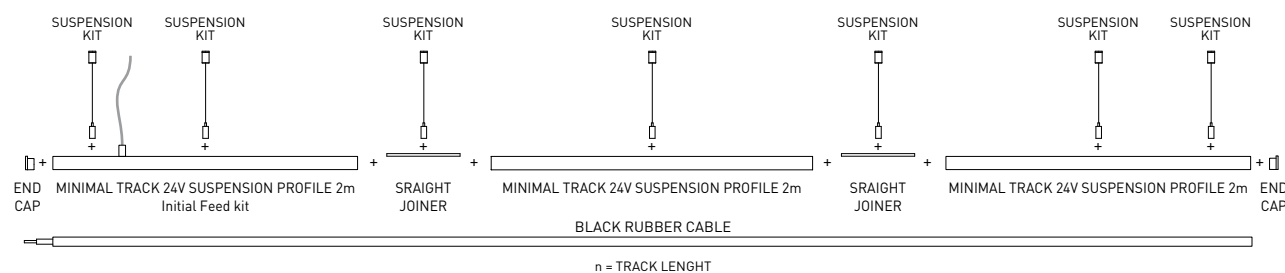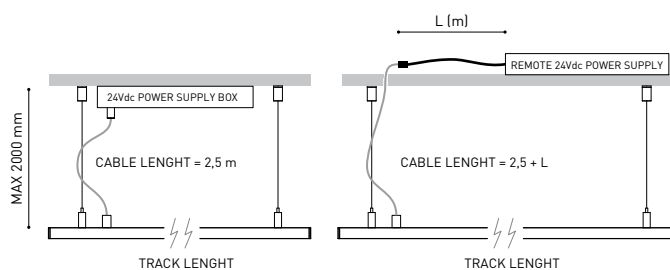

COLOUR | N ■ RAL 9005 | DIM OPTIONS PLEASE CONSULT

Calle N · Pol. Ind. EL OLIVERAL
46394 Ribarroja del Turia · Valencia (Spain)
Tel. +34 961 667 207 · Fax +34 961 667 054
info@arkoslight.com · www.arkoslight.com



WIRE TRIMLESS ACCESSORY


ARKOSLIGHT®

MINIMAL TRACK SUSPENSION



PRODUCT	
Model	Coaxial Timless
Reference	A023-00-03- W N
Colour	W ☐ RAL 9016 N ☐ RAL 9005
Category	Accessories
Fasteners not available	
 REMOTE  INCL  Ø20	

DIMENSIONAL DRAWING




Wire Trimless Accessory is a collection of accessories for fitting tensioners and cables to Arkoslight luminaires suspended directly from the ceiling with any visible ceiling rose or fixings. This achieves a minimalist application with a visually tidy finish.

With Wire Trimless Accessory the items adjacent to the ceiling of the standard product (ceiling roses, fixings, driver boxes, etc.) are concealed by a simple recessed application.

Wire Trimless Accessory reduces the visual impact of the installation leading to extremely minimalist aesthetics. The wires come out of the ceiling material as a part of the structure. This detail creates a much purer, more essential layout, particular when several luminaires are fitted in an arrangement.



DIMENSIONS



ACCESSORIES



CORD ACCESSORY



MINIMAL TRACK OPTIONS

AWARDS



reddot winner 2020
innovative product



reddot winner 2020
lighting design



Bronze Delta
ADI Awards 2020



HONORABLE MENTION
EUROPEAN
PRODUCT
DESIGN
AWARD



WINNER
2020



WINNER 2020

PRODUCT

Name	STICK 22 24V 2M 46° 3000K MG
Reference	A4100131MG
Color	Metallized gold
RAL	Electrolytic bath
Category	TRACKLIGHTS

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	475 Lm
Power	4,5 W
Power values of the system	5,00 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	46°
Lighting efficiency	81%
Efficacy	106 Lm/W
Current intensity	400 mA
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	III
Voltage	24 Vdc
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Cord length	Max. 2 m
Track type	Minimal Track
Weight	205 g.
Packaged weight	285 g.
Packaging dimensions	322 x 122 x 45mm
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene / Polycarbonate




Stick is a light fitting, designed for accent lighting, which underlines the verticality of the space where it is applied. The light buoyancy of such a light aesthetic piece is one of its greatest attractions.

POLAR DIAGRAM

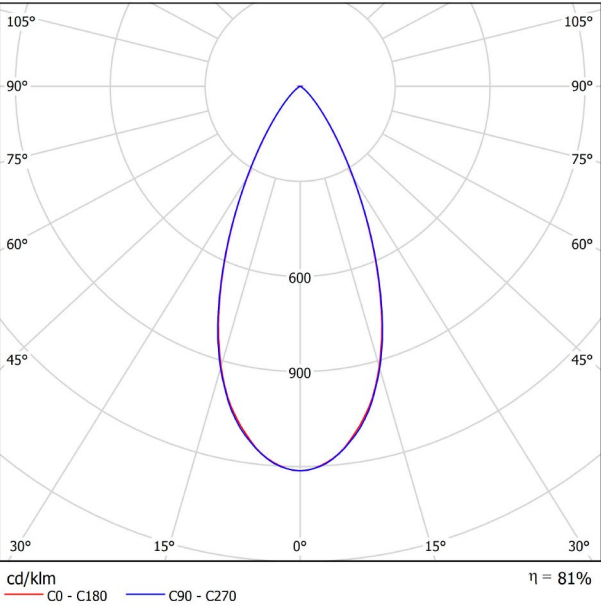


CONICAL DIAGRAM

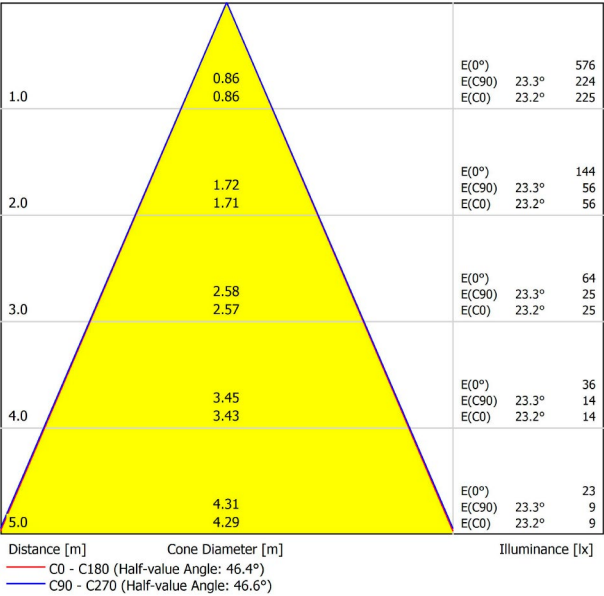




PRODUCT	
Model	Cord Accessory
Reference	02230000N
Colour	N ■ RAL9005
Category	Accessories


DIMENSIONAL DRAWING

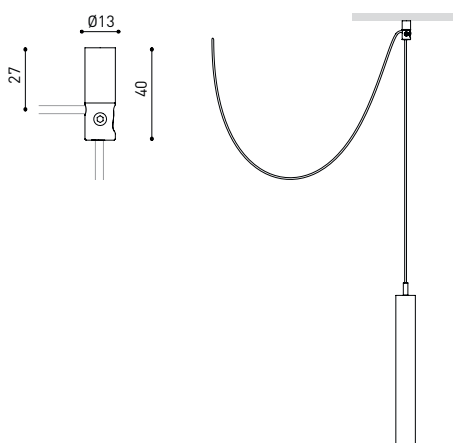



MINIMAL TRACK 24V Profile 2m

A384-00-00- | N |



MINIMAL TRACK 24V Rubber Cable n x 1m

A384-00-01- | N |


n = Total Length of System.

24V | Max. 4A

MINIMAL TRACK 24V Corner 90° 1 Plane

A384-00-02- | N |

Cable Length = 35mm.



MINIMAL TRACK 24V End Cap


A384-00-05- | N |



MINIMAL TRACK 24V Corner 90° 1 Plane Rounded


A384-00-03- | N |

Cable Length = 35mm.



MINIMAL TRACK 24V Connection Box


A384-00-06- | N |




MINIMAL TRACK 24V Corner 90° 2 Planes

A384-00-04- | N |

Cable Length = 100mm.





				P	V	D [A x B x C]
MINIMAL TRACK 24V Power Supply Box	ON/OFF	A384-00-07- NT		40W	24V	280 x 30 x 24mm
		A384-00-08- NT		100W	24V	280 x 30 x 24mm
Included ON/OFF 24Vdc Power Supply.						
MINIMAL TRACK 24V Remote Power Supply	ON/OFF	0434-01-37		60W	24V	180 x 52 x 30mm
		0433-10-22		100W	24V	295 x 43 x 30mm



DROP VOLTAGE TABLE



		CABLE LENGTH [m]			
		<5	<10	<20	<30
POWER [W]	CABLE SECTION [mm²]	TRACK LENGTH [m]			
		<5	<10	<20	<30
40	0,75	30	30	30	30
	1,5	30	30	30	30
60	0,75	30	30	20	10
	1,5	30	30	30	20
100	0,75	20	10	X	X
	1,5	20	20	10	X

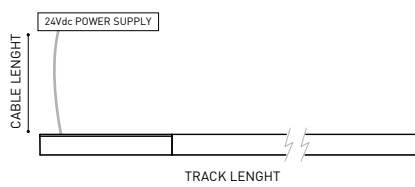

COLOUR | N ■ RAL 9005 | DIM OPTIONS PLEASE CONSULT

MINIMAL TRACK SUSPENSION

ARKOSLIGHT®



MINIMAL TRACK 24V Suspension


Profile 2m	A384-02-00-	N
Profile 2m Initial feed kit	A400-02-10-	N
Profile 2m Middle feed kit*	A400-02-20-	N

* Unidirectional Middle Feed.



MINIMAL TRACK 24V Suspension Straight Joiner


A400-00-02- | N |



MINIMAL TRACK 24V Suspension Corner 90°

A400-00-03- | N |

Cable Length = 85mm.



MINIMAL TRACK 24V Suspension

Rubber Cable n x 1m

A400-00-01- | N |


n = Total Length of System.

24V | Max. 4A



MINIMAL TRACK 24V Suspension Kit

A400-02-04- | N |




MINIMAL TRACK 24V Suspension End Caps

A400-00-05- | N |

Two End Caps Included





			P	V	D [A x B x C]
MINIMAL TRACK 24V Suspension Power Supply Box	ON/OFF	A400-00-06- NT	40W	24V	280 x 30 x 36mm
		A400-00-07- NT	100W	24V	280 x 30 x 36mm
Included ON/OFF 24Vdc Power Supply					
MINIMAL TRACK 24V Remote Power Supply	ON/OFF	0434-01-37	60W	24V	180 x 52 x 30mm
		0433-10-22	100W	24V	295 x 43 x 30mm



DROP VOLTAGE TABLE

POWER (W)	CABLE SECTION (mm²)	CABLE LENGTH (m)			
		<5	<10	<20	<30
40	0,75	30	30	30	30
	1,5	30	30	30	30
60	0,75	30	30	20	10
	1,5	30	30	30	20
100	0,75	20	10	X	X
	1,5	20	20	10	X

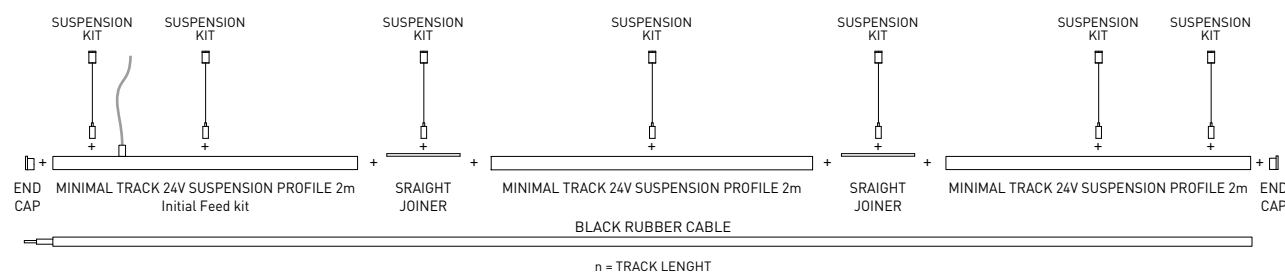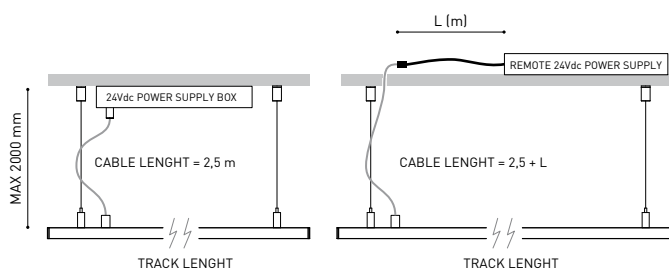

COLOUR | N ■ RAL 9005 | DIM OPTIONS PLEASE CONSULT

Calle N · Pol. Ind. EL OLIVERAL
46394 Ribarroja del Turia · Valencia (Spain)
Tel. +34 961 667 207 · Fax +34 961 667 054
info@arkoslight.com · www.arkoslight.com



WIRE TRIMLESS ACCESSORY


ARKOSLIGHT®

MINIMAL TRACK SUSPENSION



PRODUCT	
Model	Coaxial Timless
Reference	A023-00-03- W N
Colour	W ☐ RAL 9016 N ☐ RAL 9005
Category	Accessories
Fasteners not available	
 REMOTE  INCL  Ø20	

DIMENSIONAL DRAWING




Wire Trimless Accessory is a collection of accessories for fitting tensioners and cables to Arkoslight luminaires suspended directly from the ceiling with any visible ceiling rose or fixings. This achieves a minimalist application with a visually tidy finish.

With Wire Trimless Accessory the items adjacent to the ceiling of the standard product (ceiling roses, fixings, driver boxes, etc.) are concealed by a simple recessed application.

Wire Trimless Accessory reduces the visual impact of the installation leading to extremely minimalist aesthetics. The wires come out of the ceiling material as a part of the structure. This detail creates a much purer, more essential layout, particular when several luminaires are fitted in an arrangement.



DIMENSIONS



ACCESSORIES



CORD ACCESSORY



MINIMAL TRACK OPTIONS

AWARDS

reddot winner 2020
innovative productreddot winner 2020
lighting designBronze Delta
ADI Awards 2020HONORABLE MENTION
EUROPEAN
PRODUCT
DESIGN
AWARDWINNER
2020archiproducts
DESIGN AWARDS
WINNER 2020

PRODUCT

Name	STICK 22 24V 2M 46° 3000K NT
Reference	A4100131NT
Color	Textured black
RAL	9005
Category	TRACKLIGHTS

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	475 Lm
Power	4,5 W
Power values of the system	5,00 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	46°
Lighting efficiency	81%
Efficacy	106 Lm/W
Current intensity	400 mA
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	III
Voltage	24 Vdc
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Cord length	Max. 2 m
Track type	Minimal Track
Weight	205 g.
Packaged weight	285 g.
Packaging dimensions	322 x 122 x 45mm
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene / Polycarbonate




Stick is a light fitting, designed for accent lighting, which underlines the verticality of the space where it is applied. The light buoyancy of such a light aesthetic piece is one of its greatest attractions.

POLAR DIAGRAM

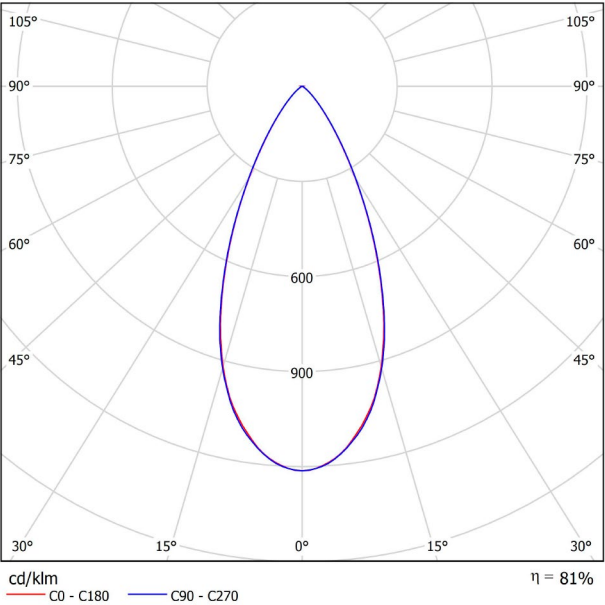


CONICAL DIAGRAM

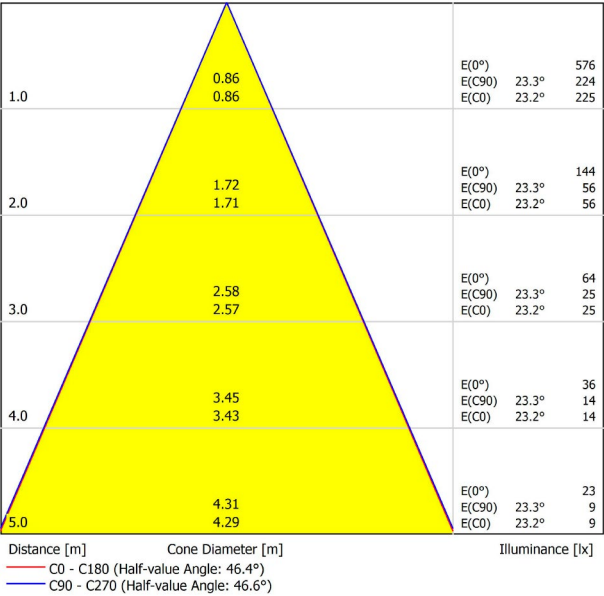




PRODUCT	
Model	Cord Accessory
Reference	02230000N
Colour	N ■ RAL9005
Category	Accessories


DIMENSIONAL DRAWING

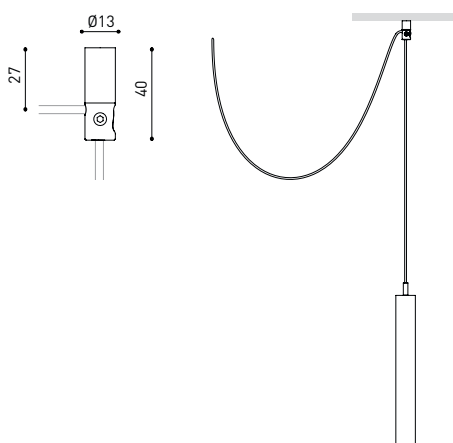



MINIMAL TRACK 24V Profile 2m

A384-00-00- | N |



MINIMAL TRACK 24V Rubber Cable n x 1m

A384-00-01- | N |


n = Total Length of System.

24V | Max. 4A

MINIMAL TRACK 24V Corner 90° 1 Plane

A384-00-02- | N |

Cable Length = 35mm.



MINIMAL TRACK 24V End Cap


A384-00-05- | N |



MINIMAL TRACK 24V Corner 90° 1 Plane Rounded


A384-00-03- | N |

Cable Length = 35mm.



MINIMAL TRACK 24V Connection Box


A384-00-06- | N |




MINIMAL TRACK 24V Corner 90° 2 Planes

A384-00-04- | N |

Cable Length = 100mm.





				P	V	D [A x B x C]
MINIMAL TRACK 24V Power Supply Box	ON/OFF	A384-00-07- NT		40W	24V	280 x 30 x 24mm
		A384-00-08- NT		100W	24V	280 x 30 x 24mm
Included ON/OFF 24Vdc Power Supply.						
MINIMAL TRACK 24V Remote Power Supply	ON/OFF	0434-01-37		60W	24V	180 x 52 x 30mm
		0433-10-22		100W	24V	295 x 43 x 30mm



DROP VOLTAGE TABLE



		CABLE LENGTH [m]			
		<5	<10	<20	<30
POWER [W]	CABLE SECTION [mm²]	TRACK LENGTH [m]			
		<5	<10	<20	<30
40	0,75	30	30	30	30
	1,5	30	30	30	30
60	0,75	30	30	20	10
	1,5	30	30	30	20
100	0,75	20	10	X	X
	1,5	20	20	10	X

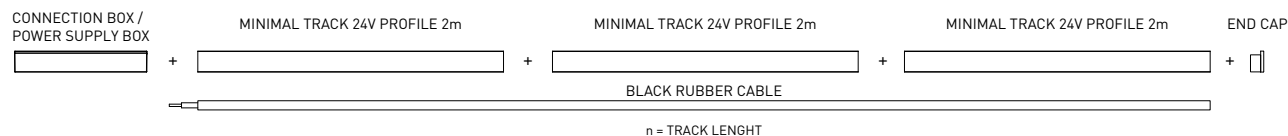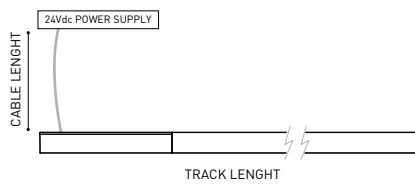

COLOUR | N ■ RAL 9005 | DIM OPTIONS PLEASE CONSULT

MINIMAL TRACK SUSPENSION

ARKOSLIGHT®



MINIMAL TRACK 24V Suspension


Profile 2m	A384-02-00-	N
Profile 2m Initial feed kit	A400-02-10-	N
Profile 2m Middle feed kit*	A400-02-20-	N

* Unidirectional Middle Feed.



MINIMAL TRACK 24V Suspension Straight Joiner


A400-00-02-	N
-------------	---



MINIMAL TRACK 24V Suspension Corner 90°

A400-00-03-	N
-------------	---

Cable Length = 85mm.



MINIMAL TRACK 24V Suspension

Rubber Cable n x 1m	A400-00-01-	N
---------------------	-------------	---

n = Total Length of System.

24V | Max. 4A



MINIMAL TRACK 24V Suspension Kit

A400-02-04-	N
-------------	---




MINIMAL TRACK 24V Suspension End Caps

A400-00-05-	N
-------------	---

Two End Caps Included





				P	V	D (A x B x C)
MINIMAL TRACK 24V Suspension Power Supply Box	ON/OFF	A400-00-06- NT		40W	24V	280 x 30 x 36mm
		A400-00-07- NT		100W	24V	280 x 30 x 36mm
Included ON/OFF 24Vdc Power Supply						
MINIMAL TRACK 24V Remote Power Supply	ON/OFF	0434-01-37		60W	24V	180 x 52 x 30mm
		0433-10-22		100W	24V	295 x 43 x 30mm



DROP VOLTAGE TABLE

POWER (W)	CABLE SECTION (mm²)	CABLE LENGTH (m)			
		<5	<10	<20	<30
40	0,75	30	30	30	30
	1,5	30	30	30	30
60	0,75	30	30	20	10
	1,5	30	30	30	20
100	0,75	20	10	X	X
	1,5	20	20	10	X

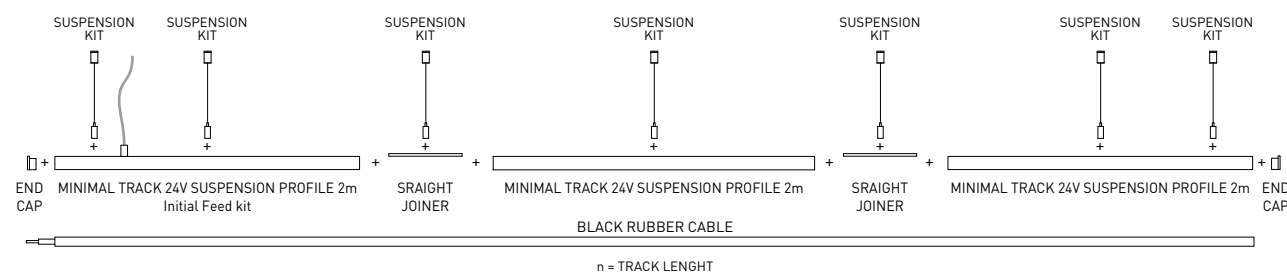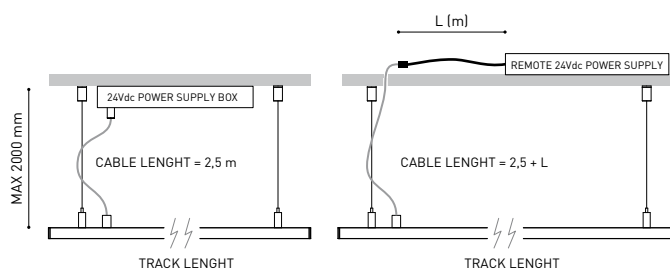

COLOUR | N ■ RAL 9005 | DIM OPTIONS PLEASE CONSULT

Calle N · Pol. Ind. EL OLIVERAL
46394 Ribarroja del Turia · Valencia (Spain)
Tel. +34 961 667 207 · Fax +34 961 667 054
info@arkoslight.com · www.arkoslight.com



WIRE TRIMLESS ACCESSORY


ARKOSLIGHT®

MINIMAL TRACK SUSPENSION



PRODUCT	
Model	Coaxial Timless
Reference	A023-00-03- W N
Colour	W ☐ RAL 9016 N ☐ RAL 9005
Category	Accessories
Fasteners not available	
 REMOTE  INCL  Ø20	

DIMENSIONAL DRAWING




Wire Trimless Accessory is a collection of accessories for fitting tensioners and cables to Arkoslight luminaires suspended directly from the ceiling with any visible ceiling rose or fixings. This achieves a minimalist application with a visually tidy finish.

With Wire Trimless Accessory the items adjacent to the ceiling of the standard product (ceiling roses, fixings, driver boxes, etc.) are concealed by a simple recessed application.

Wire Trimless Accessory reduces the visual impact of the installation leading to extremely minimalist aesthetics. The wires come out of the ceiling material as a part of the structure. This detail creates a much purer, more essential layout, particular when several luminaires are fitted in an arrangement.



DIMENSIONS



ACCESSORIES



CORD ACCESSORY



MINIMAL TRACK OPTIONS

AWARDS

reddot winner 2020
innovative productreddot winner 2020
lighting designBronze Delta
ADI Awards 2020HONORABLE MENTION
EUROPEAN
PRODUCT
DESIGN
AWARDWINNER
2020archiproducts
DESIGN AWARDS
WINNER 2020

PRODUCT

Name	STICK 22 24V 2M 46° 3000K WT
Reference	A4100131WT
Color	Textured white
RAL	9016
Category	TRACKLIGHTS

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	475 Lm
Power	4,5 W
Power values of the system	5,00 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	46°
Lighting efficiency	81%
Efficacy	106 Lm/W
Current intensity	400 mA
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	III
Voltage	24 Vdc
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Cord length	Max. 2 m
Track type	Minimal Track
Weight	205 g.
Packaged weight	285 g.
Packaging dimensions	322 x 122 x 45mm
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene / Polycarbonate




Stick is a light fitting, designed for accent lighting, which underlines the verticality of the space where it is applied. The light buoyancy of such a light aesthetic piece is one of its greatest attractions.

POLAR DIAGRAM

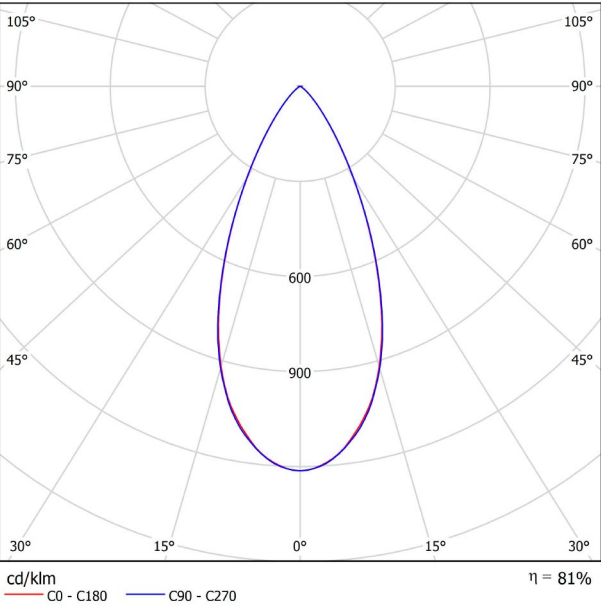


CONICAL DIAGRAM

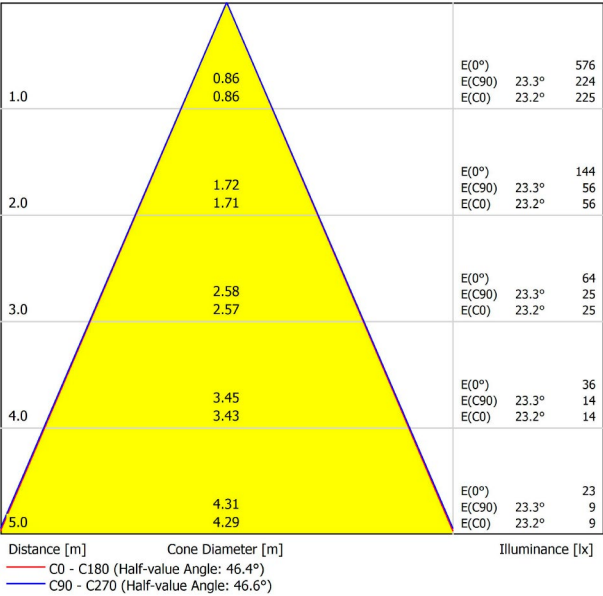




PRODUCT	
Model	Cord Accessory
Reference	02230000N
Colour	N ■ RAL9005
Category	Accessories


DIMENSIONAL DRAWING

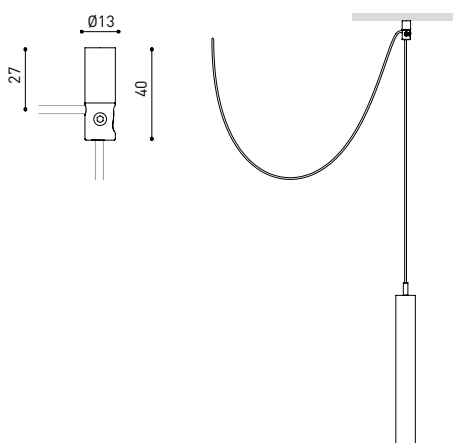



MINIMAL TRACK 24V Profile 2m

A384-00-00- | N |



MINIMAL TRACK 24V Rubber Cable n x 1m

A384-00-01- | N |


n = Total Length of System.

24V | Max. 4A

MINIMAL TRACK 24V Corner 90° 1 Plane

A384-00-02- | N |

Cable Length = 35mm.



MINIMAL TRACK 24V End Cap


A384-00-05- | N |



MINIMAL TRACK 24V Corner 90° 1 Plane Rounded


A384-00-03- | N |

Cable Length = 35mm.



MINIMAL TRACK 24V Connection Box


A384-00-06- | N |




MINIMAL TRACK 24V Corner 90° 2 Planes

A384-00-04- | N |

Cable Length = 100mm.





				P	V	D [A x B x C]
MINIMAL TRACK 24V Power Supply Box	ON/OFF	A384-00-07- NT		40W	24V	280 x 30 x 24mm
		A384-00-08- NT		100W	24V	280 x 30 x 24mm
Included ON/OFF 24Vdc Power Supply.						
MINIMAL TRACK 24V Remote Power Supply	ON/OFF	0434-01-37		60W	24V	180 x 52 x 30mm
		0433-10-22		100W	24V	295 x 43 x 30mm



DROP VOLTAGE TABLE



		CABLE LENGTH (m)			
		<5	<10	<20	<30
POWER (W)	CABLE SECTION (mm²)	TRACK LENGTH (m)			
		<5	<10	<20	<30
40	0,75	30	30	30	30
	1,5	30	30	30	30
60	0,75	30	30	20	10
	1,5	30	30	30	20
100	0,75	20	10	X	X
	1,5	20	20	10	X

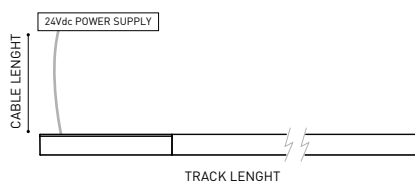

COLOUR | N ■ RAL 9005 | DIM OPTIONS PLEASE CONSULT

MINIMAL TRACK SUSPENSION

ARKOSLIGHT®



MINIMAL TRACK 24V Suspension


Profile 2m	A384-02-00-	N
Profile 2m Initial feed kit	A400-02-10-	N
Profile 2m Middle feed kit*	A400-02-20-	N

* Unidirectional Middle Feed.



MINIMAL TRACK 24V Suspension Straight Joiner


A400-00-02-	N
-------------	---



MINIMAL TRACK 24V Suspension Corner 90°

A400-00-03-	N
-------------	---

Cable Length = 85mm.



MINIMAL TRACK 24V Suspension

Rubber Cable n x 1m	A400-00-01-	N
---------------------	-------------	---


n = Total Length of System.

24V | Max. 4A



MINIMAL TRACK 24V Suspension Kit

A400-02-04-	N
-------------	---




MINIMAL TRACK 24V Suspension End Caps

A400-00-05-	N
-------------	---

Two End Caps Included





			P	V	D [A x B x C]
MINIMAL TRACK 24V Suspension Power Supply Box	ON/OFF	A400-00-06- NT	40W	24V	280 x 30 x 36mm
		A400-00-07- NT	100W	24V	280 x 30 x 36mm
Included ON/OFF 24Vdc Power Supply					
MINIMAL TRACK 24V Remote Power Supply	ON/OFF	0434-01-37	60W	24V	180 x 52 x 30mm
		0433-10-22	100W	24V	295 x 43 x 30mm



DROP VOLTAGE TABLE

POWER (W)	CABLE SECTION (mm²)	CABLE LENGTH (m)			
		<5	<10	<20	<30
40	0,75	30	30	30	30
	1,5	30	30	30	30
60	0,75	30	30	20	10
	1,5	30	30	30	20
100	0,75	20	10	X	X
	1,5	20	20	10	X

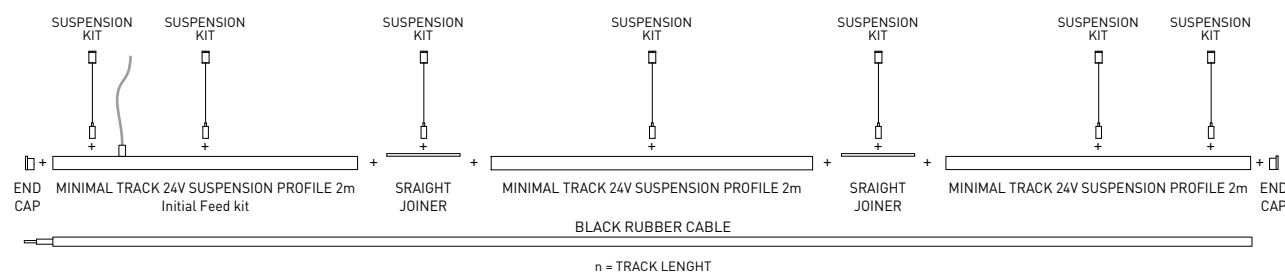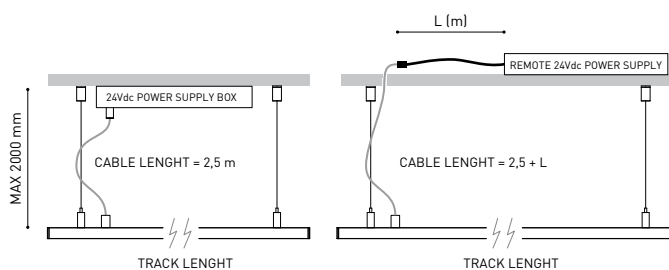

COLOUR | N ■ RAL 9005 | DIM OPTIONS PLEASE CONSULT

Calle N · Pol. Ind. EL OLIVERAL
46394 Ribarroja del Turia · Valencia (Spain)
Tel. +34 961 667 207 · Fax +34 961 667 054
info@arkoslight.com · www.arkoslight.com



WIRE TRIMLESS ACCESSORY


ARKOSLIGHT®

MINIMAL TRACK SUSPENSION



PRODUCT	
Model	Coaxial Timless
Reference	A023-00-03- W N
Colour	W ☐ RAL 9016 N ☐ RAL 9005
Category	Accessories
Fasteners not available	
 REMOTE  INCL  Ø20	

DIMENSIONAL DRAWING




Wire Trimless Accessory is a collection of accessories for fitting tensioners and cables to Arkoslight luminaires suspended directly from the ceiling with any visible ceiling rose or fixings. This achieves a minimalist application with a visually tidy finish.

With Wire Trimless Accessory the items adjacent to the ceiling of the standard product (ceiling roses, fixings, driver boxes, etc.) are concealed by a simple recessed application.

Wire Trimless Accessory reduces the visual impact of the installation leading to extremely minimalist aesthetics. The wires come out of the ceiling material as a part of the structure. This detail creates a much purer, more essential layout, particular when several luminaires are fitted in an arrangement.



DIMENSIONS



ACCESSORIES



CORD ACCESSORY



MINIMAL TRACK OPTIONS

AWARDS

reddot winner 2020
innovative productreddot winner 2020
lighting designBronze Delta
ADI Awards 2020HONORABLE MENTION
EUROPEAN
PRODUCT
DESIGN
AWARDWINNER
2020archiproducts
DESIGN AWARDS
WINNER 2020

PRODUCT

Name	STICK 22 24V 2M 22° 2700K MG
Reference	A4100110MG
Color	Metallized gold
RAL	Electrolytic bath
Category	TRACKLIGHTS

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	440 Lm
Power	4,5 W
Power values of the system	5,00 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	22°
Lighting efficiency	84%
Efficacy	98 Lm/W
Current intensity	400 mA
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	III
Voltage	24 Vdc
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Cord length	Max. 2 m
Track type	Minimal Track
Weight	205 g.
Packaged weight	285 g.
Packaging dimensions	322 x 122 x 45mm
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene / Polycarbonate




Stick is a light fitting, designed for accent lighting, which underlines the verticality of the space where it is applied. The light buoyancy of such a light aesthetic piece is one of its greatest attractions.

POLAR DIAGRAM

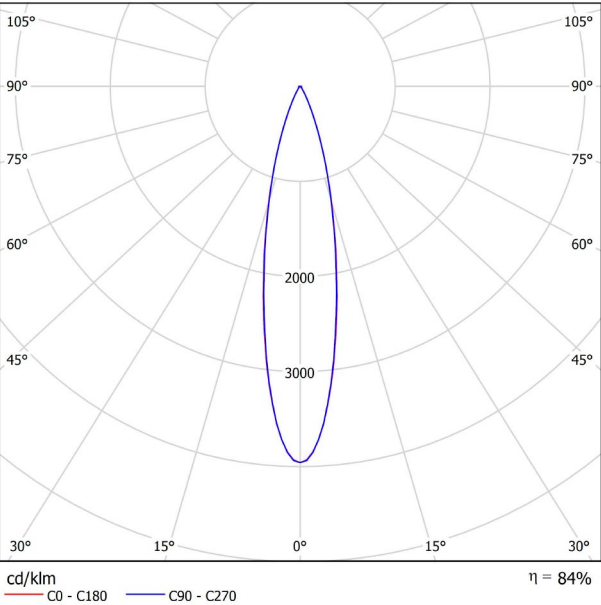


CONICAL DIAGRAM

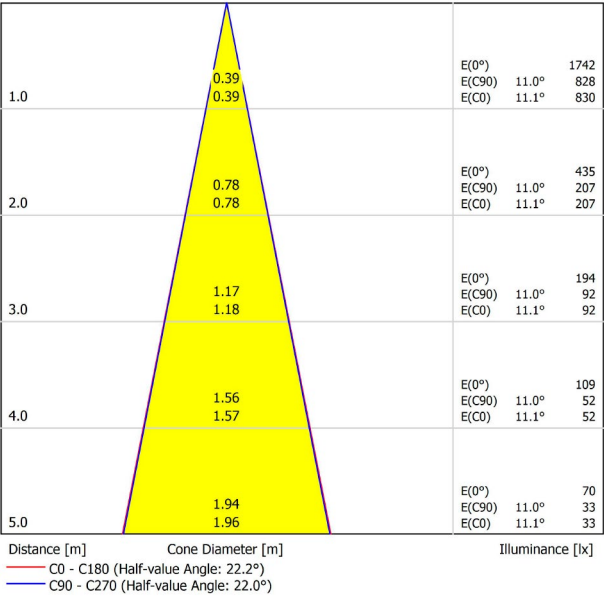




PRODUCT	
Model	Cord Accessory
Reference	02230000N
Colour	N ■ RAL9005
Category	Accessories


DIMENSIONAL DRAWING

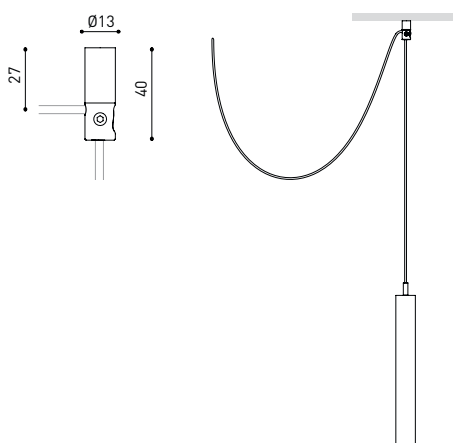



MINIMAL TRACK 24V Profile 2m

A384-00-00- | N |



MINIMAL TRACK 24V Rubber Cable n x 1m

A384-00-01- | N |


n = Total Length of System.

24V | Max. 4A

MINIMAL TRACK 24V Corner 90° 1 Plane

A384-00-02- | N |

Cable Length = 35mm.



MINIMAL TRACK 24V End Cap


A384-00-05- | N |



MINIMAL TRACK 24V Corner 90° 1 Plane Rounded


A384-00-03- | N |

Cable Length = 35mm.



MINIMAL TRACK 24V Connection Box


A384-00-06- | N |




MINIMAL TRACK 24V Corner 90° 2 Planes

A384-00-04- | N |

Cable Length = 100mm.





				P	V	D [A x B x C]
MINIMAL TRACK 24V Power Supply Box	ON/OFF	A384-00-07- NT		40W	24V	280 x 30 x 24mm
		A384-00-08- NT		100W	24V	280 x 30 x 24mm
Included ON/OFF 24Vdc Power Supply.						
MINIMAL TRACK 24V Remote Power Supply	ON/OFF	0434-01-37		60W	24V	180 x 52 x 30mm
		0433-10-22		100W	24V	295 x 43 x 30mm



DROP VOLTAGE TABLE



		CABLE LENGTH [m]			
		<5	<10	<20	<30
POWER [W]	CABLE SECTION [mm²]	TRACK LENGTH [m]			
		<5	<10	<20	<30
40	0,75	30	30	30	30
	1,5	30	30	30	30
60	0,75	30	30	20	10
	1,5	30	30	30	20
100	0,75	20	10	X	X
	1,5	20	20	10	X

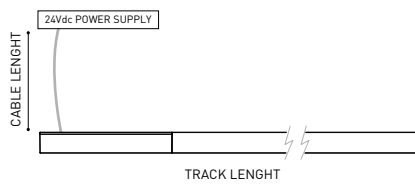

COLOUR | N ■ RAL 9005 | DIM OPTIONS PLEASE CONSULT

MINIMAL TRACK SUSPENSION

ARKOSLIGHT®



MINIMAL TRACK 24V Suspension


Profile 2m	A384-02-00-	N
Profile 2m Initial feed kit	A400-02-10-	N
Profile 2m Middle feed kit*	A400-02-20-	N

* Unidirectional Middle Feed.



MINIMAL TRACK 24V Suspension Straight Joiner


A400-00-02- | N |



MINIMAL TRACK 24V Suspension Corner 90°

A400-00-03- | N |

Cable Length = 85mm.



MINIMAL TRACK 24V Suspension

Rubber Cable n x 1m

A400-00-01- | N |


n = Total Length of System.

24V | Max. 4A



MINIMAL TRACK 24V Suspension Kit

A400-02-04- | N |




MINIMAL TRACK 24V Suspension End Caps

A400-00-05- | N |

Two End Caps Included





				P	V	D (A x B x C)
MINIMAL TRACK 24V Suspension Power Supply Box	ON/OFF	A400-00-06- NT		40W	24V	280 x 30 x 36mm
		A400-00-07- NT		100W	24V	280 x 30 x 36mm
Included ON/OFF 24Vdc Power Supply						
MINIMAL TRACK 24V Remote Power Supply	ON/OFF	0434-01-37		60W	24V	180 x 52 x 30mm
		0433-10-22		100W	24V	295 x 43 x 30mm



DROP VOLTAGE TABLE

POWER (W)	CABLE SECTION (mm²)	CABLE LENGTH (m)			
		<5	<10	<20	<30
40	0,75	30	30	30	30
	1,5	30	30	30	30
60	0,75	30	30	20	10
	1,5	30	30	30	20
100	0,75	20	10	X	X
	1,5	20	20	10	X

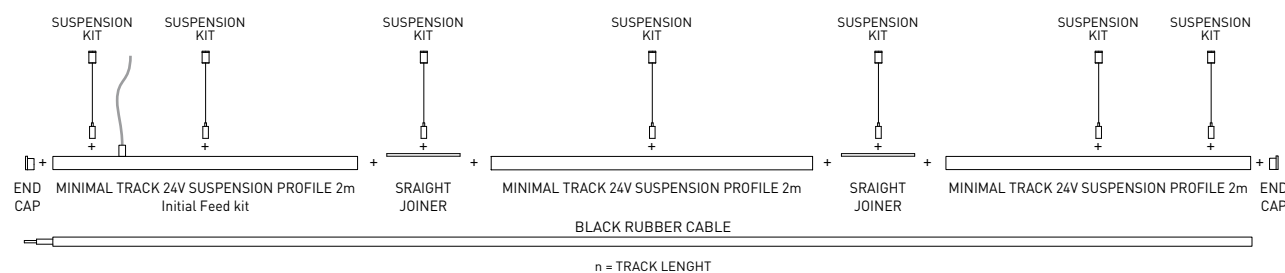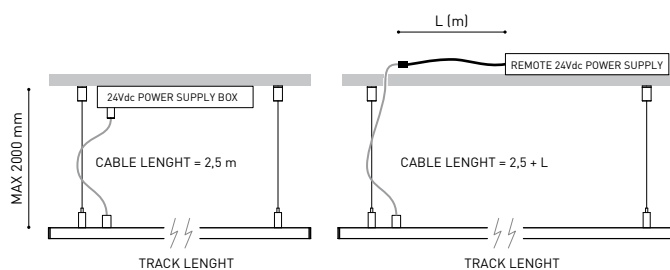

COLOUR | N ■ RAL 9005 | DIM OPTIONS PLEASE CONSULT

Calle N · Pol. Ind. EL OLIVERAL
46394 Ribarroja del Turia · Valencia (Spain)
Tel. +34 961 667 207 · Fax +34 961 667 054
info@arkoslight.com · www.arkoslight.com



WIRE TRIMLESS ACCESSORY


ARKOSLIGHT®

MINIMAL TRACK SUSPENSION



PRODUCT	
Model	Coaxial Timless
Reference	A023-00-03- W N
Colour	W ☐ RAL 9016 N ☐ RAL 9005
Category	Accessories
Fasteners not available	
 REMOTE  INCL  Ø20	

DIMENSIONAL DRAWING




Wire Trimless Accessory is a collection of accessories for fitting tensioners and cables to Arkoslight luminaires suspended directly from the ceiling with any visible ceiling rose or fixings. This achieves a minimalist application with a visually tidy finish.

With Wire Trimless Accessory the items adjacent to the ceiling of the standard product (ceiling roses, fixings, driver boxes, etc.) are concealed by a simple recessed application.

Wire Trimless Accessory reduces the visual impact of the installation leading to extremely minimalist aesthetics. The wires come out of the ceiling material as a part of the structure. This detail creates a much purer, more essential layout, particular when several luminaires are fitted in an arrangement.



DIMENSIONS



ACCESSORIES



CORD ACCESSORY



MINIMAL TRACK OPTIONS

AWARDS

reddot winner 2020
innovative productreddot winner 2020
lighting designBronze Delta
ADI Awards 2020HONORABLE MENTION
EUROPEAN
PRODUCT
DESIGN
AWARDWINNER
2020archiproducts
DESIGN AWARDS
WINNER 2020

PRODUCT

Name	STICK 22 24V 2M 22° 2700K NT
Reference	A4100110NT
Color	Textured black
RAL	9005
Category	TRACKLIGHTS

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	440 Lm
Power	4,5 W
Power values of the system	5,00 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	22°
Lighting efficiency	84%
Efficacy	98 Lm/W
Current intensity	400 mA
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	III
Voltage	24 Vdc
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Cord length	Max. 2 m
Track type	Minimal Track
Weight	205 g.
Packaged weight	285 g.
Packaging dimensions	322 x 122 x 45mm
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene / Polycarbonate




Stick is a light fitting, designed for accent lighting, which underlines the verticality of the space where it is applied. The light buoyancy of such a light aesthetic piece is one of its greatest attractions.

POLAR DIAGRAM

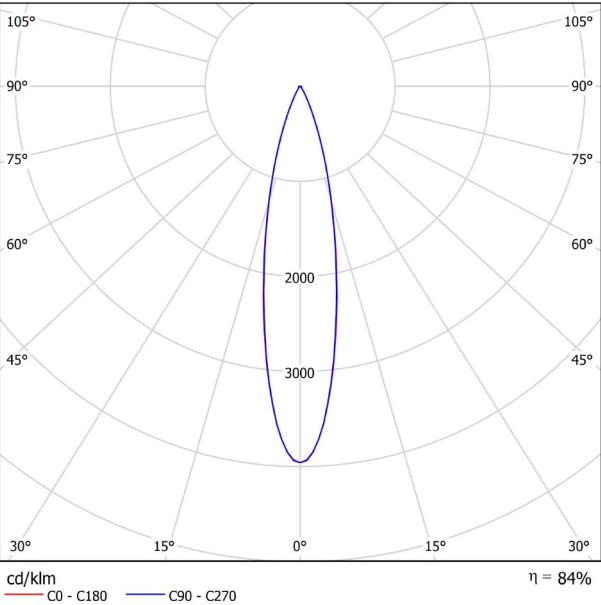


CONICAL DIAGRAM

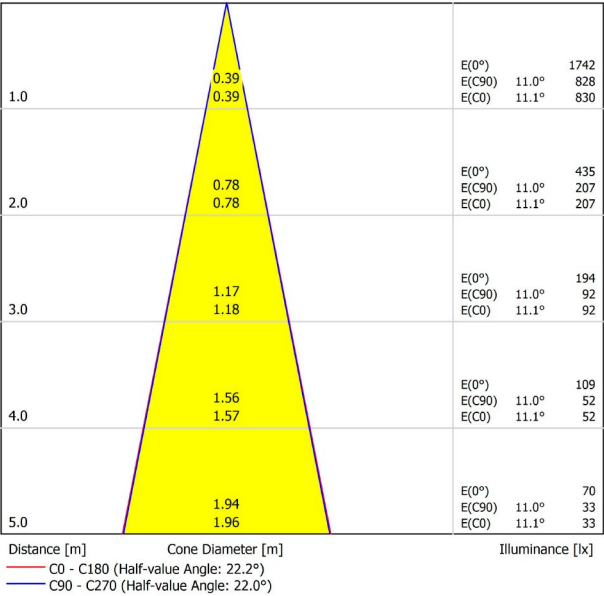




PRODUCT	
Model	Cord Accessory
Reference	02230000N
Colour	N ■ RAL9005
Category	Accessories


DIMENSIONAL DRAWING

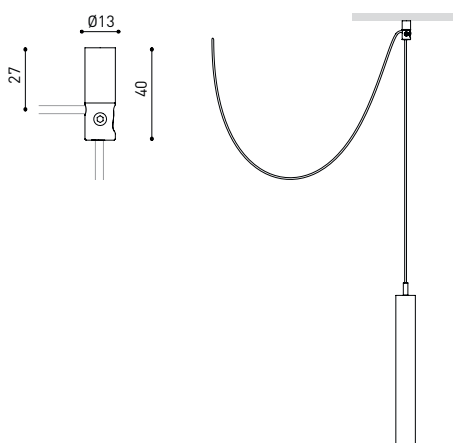



MINIMAL TRACK 24V Profile 2m

A384-00-00- | N |



MINIMAL TRACK 24V Rubber Cable n x 1m

A384-00-01- | N |


n = Total Length of System.

24V | Max. 4A

MINIMAL TRACK 24V Corner 90° 1 Plane

A384-00-02- | N |

Cable Length = 35mm.



MINIMAL TRACK 24V End Cap


A384-00-05- | N |



MINIMAL TRACK 24V Corner 90° 1 Plane Rounded


A384-00-03- | N |

Cable Length = 35mm.



MINIMAL TRACK 24V Connection Box


A384-00-06- | N |




MINIMAL TRACK 24V Corner 90° 2 Planes

A384-00-04- | N |

Cable Length = 100mm.





				P	V	D [A x B x C]
MINIMAL TRACK 24V Power Supply Box	ON/OFF	A384-00-07- NT		40W	24V	280 x 30 x 24mm
		A384-00-08- NT		100W	24V	280 x 30 x 24mm
Included ON/OFF 24Vdc Power Supply.						
MINIMAL TRACK 24V Remote Power Supply	ON/OFF	0434-01-37		60W	24V	180 x 52 x 30mm
		0433-10-22		100W	24V	295 x 43 x 30mm



DROP VOLTAGE TABLE



		CABLE LENGTH (m)			
		<5	<10	<20	<30
POWER (W)	CABLE SECTION (mm²)	TRACK LENGTH (m)			
		<5	<10	<20	<30
40	0,75	30	30	30	30
	1,5	30	30	30	30
60	0,75	30	30	20	10
	1,5	30	30	30	20
100	0,75	20	10	X	X
	1,5	20	20	10	X

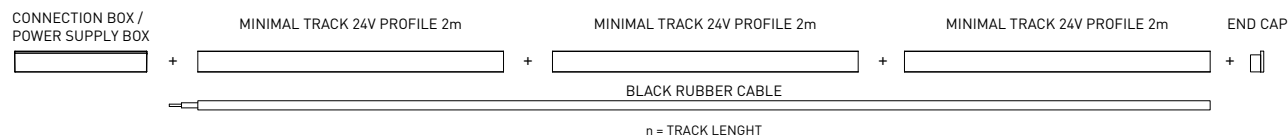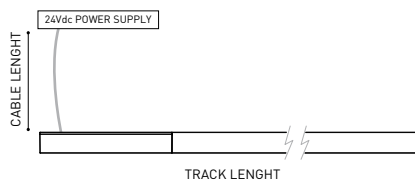

COLOUR | N ■ RAL 9005 | DIM OPTIONS PLEASE CONSULT

MINIMAL TRACK SUSPENSION

ARKOSLIGHT®



MINIMAL TRACK 24V Suspension


Profile 2m	A384-02-00-	N
Profile 2m Initial feed kit	A400-02-10-	N
Profile 2m Middle feed kit*	A400-02-20-	N

* Unidirectional Middle Feed.



MINIMAL TRACK 24V Suspension Straight Joiner


A400-00-02- | N |



MINIMAL TRACK 24V Suspension Corner 90°

A400-00-03- | N |

Cable Length = 85mm.



MINIMAL TRACK 24V Suspension

Rubber Cable n x 1m A400-00-01- | N |


n = Total Length of System.

24V | Max. 4A



MINIMAL TRACK 24V Suspension Kit

A400-02-04- | N |




MINIMAL TRACK 24V Suspension End Caps

A400-00-05- | N |

Two End Caps Included





			P	V	D [A x B x C]
MINIMAL TRACK 24V Suspension Power Supply Box	ON/OFF	A400-00-06- NT	40W	24V	280 x 30 x 36mm
		A400-00-07- NT	100W	24V	280 x 30 x 36mm
Included ON/OFF 24Vdc Power Supply					
MINIMAL TRACK 24V Remote Power Supply	ON/OFF	0434-01-37	60W	24V	180 x 52 x 30mm
		0433-10-22	100W	24V	295 x 43 x 30mm



DROP VOLTAGE TABLE

POWER (W)	CABLE SECTION (mm²)	CABLE LENGTH (m)			
		<5	<10	<20	<30
40	0,75	30	30	30	30
	1,5	30	30	30	30
60	0,75	30	30	20	10
	1,5	30	30	30	20
100	0,75	20	10	X	X
	1,5	20	20	10	X

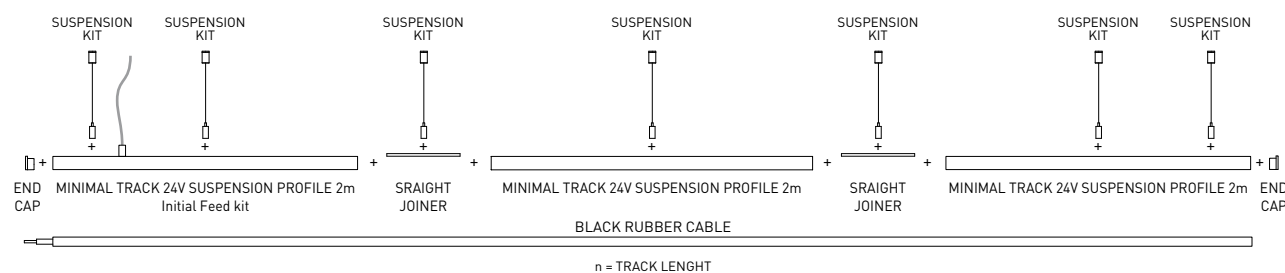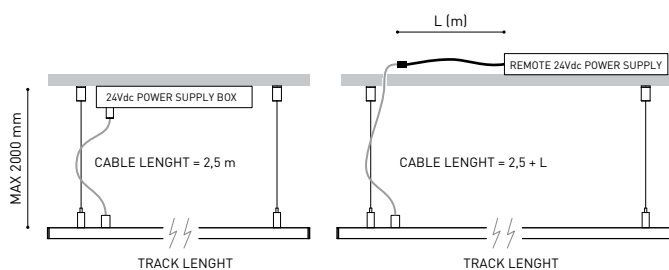

COLOUR | N ■ RAL 9005 | DIM OPTIONS PLEASE CONSULT

Calle N · Pol. Ind. EL OLIVERAL
46394 Ribarroja del Turia · Valencia (Spain)
Tel. +34 961 667 207 · Fax +34 961 667 054
info@arkoslight.com · www.arkoslight.com



WIRE TRIMLESS ACCESSORY


ARKOSLIGHT®

MINIMAL TRACK SUSPENSION



PRODUCT	
Model	Coaxial Timless
Reference	A023-00-03- W N
Colour	W ☐ RAL 9016 N ☐ RAL 9005
Category	Accessories
Fasteners not available	
 REMOTE  INCL  Ø20	

DIMENSIONAL DRAWING




Wire Trimless Accessory is a collection of accessories for fitting tensioners and cables to Arkoslight luminaires suspended directly from the ceiling with any visible ceiling rose or fixings. This achieves a minimalist application with a visually tidy finish.

With Wire Trimless Accessory the items adjacent to the ceiling of the standard product (ceiling roses, fixings, driver boxes, etc.) are concealed by a simple recessed application.

Wire Trimless Accessory reduces the visual impact of the installation leading to extremely minimalist aesthetics. The wires come out of the ceiling material as a part of the structure. This detail creates a much purer, more essential layout, particular when several luminaires are fitted in an arrangement.



DIMENSIONS



ACCESSORIES



CORD ACCESSORY



MINIMAL TRACK OPTIONS

AWARDS

reddot winner 2020
innovative productreddot winner 2020
lighting designBronze Delta
ADI Awards 2020HONORABLE MENTION
EUROPEAN
PRODUCT
DESIGN
AWARDWINNER
2020archiproducts
DESIGN AWARDS
WINNER 2020

PRODUCT

Name	STICK 22 24V 2M 22° 2700K WT
Reference	A4100110WT
Color	Textured white
RAL	9016
Category	TRACKLIGHTS

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	440 Lm
Power	4,5 W
Power values of the system	5,00 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	22°
Lighting efficiency	84%
Efficacy	98 Lm/W
Current intensity	400 mA
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	III
Voltage	24 Vdc
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Cord length	Max. 2 m
Track type	Minimal Track
Weight	205 g.
Packaged weight	285 g.
Packaging dimensions	322 x 122 x 45mm
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene / Polycarbonate




Stick is a light fitting, designed for accent lighting, which underlines the verticality of the space where it is applied. The light buoyancy of such a light aesthetic piece is one of its greatest attractions.

POLAR DIAGRAM

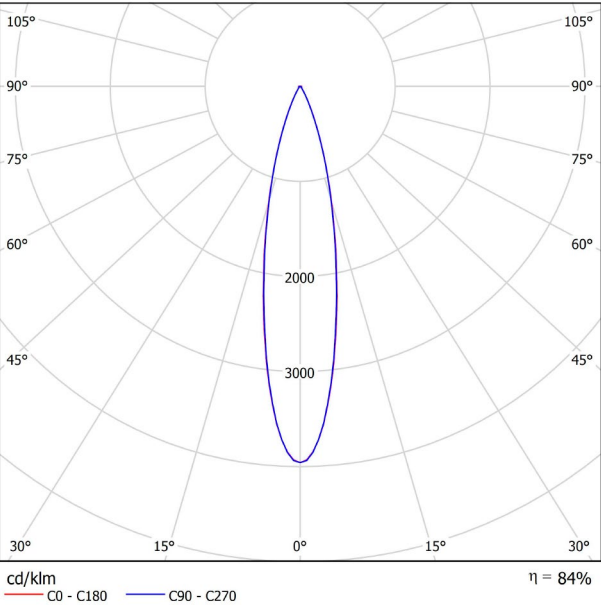


CONICAL DIAGRAM

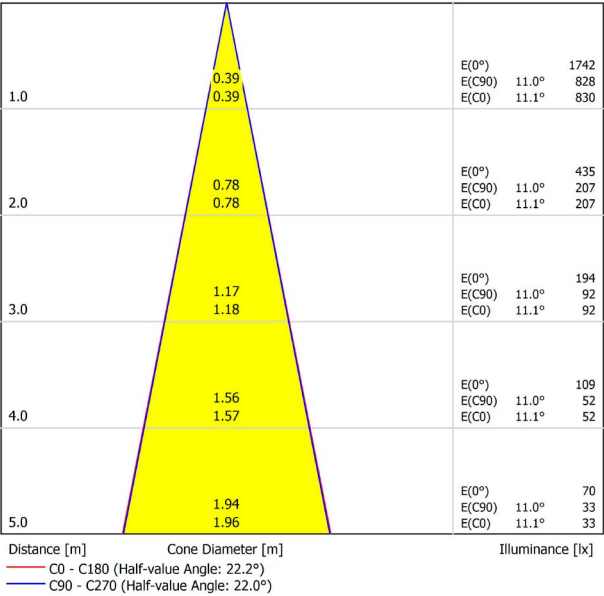




PRODUCT	
Model	Cord Accessory
Reference	02230000N
Colour	N ■ RAL9005
Category	Accessories


DIMENSIONAL DRAWING

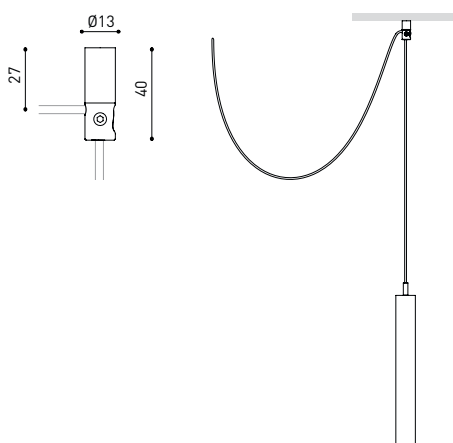



MINIMAL TRACK 24V Profile 2m

A384-00-00- | N |



MINIMAL TRACK 24V Rubber Cable n x 1m

A384-00-01- | N |


n = Total Length of System.

24V | Max. 4A

MINIMAL TRACK 24V Corner 90° 1 Plane

A384-00-02- | N |

Cable Length = 35mm.



MINIMAL TRACK 24V End Cap


A384-00-05- | N |



MINIMAL TRACK 24V Corner 90° 1 Plane Rounded


A384-00-03- | N |

Cable Length = 35mm.



MINIMAL TRACK 24V Connection Box


A384-00-06- | N |




MINIMAL TRACK 24V Corner 90° 2 Planes

A384-00-04- | N |

Cable Length = 100mm.





				P	V	D [A x B x C]
MINIMAL TRACK 24V Power Supply Box	ON/OFF	A384-00-07- NT		40W	24V	280 x 30 x 24mm
		A384-00-08- NT		100W	24V	280 x 30 x 24mm
Included ON/OFF 24Vdc Power Supply.						
MINIMAL TRACK 24V Remote Power Supply	ON/OFF	0434-01-37		60W	24V	180 x 52 x 30mm
		0433-10-22		100W	24V	295 x 43 x 30mm



DROP VOLTAGE TABLE



		CABLE LENGTH [m]			
		<5	<10	<20	<30
POWER [W]	CABLE SECTION [mm²]	TRACK LENGTH [m]			
		<5	<10	<20	<30
40	0,75	30	30	30	30
	1,5	30	30	30	30
60	0,75	30	30	20	10
	1,5	30	30	30	20
100	0,75	20	10	X	X
	1,5	20	20	10	X

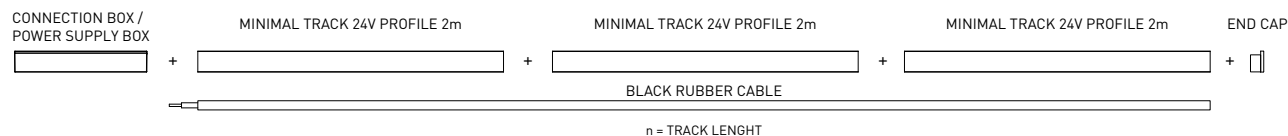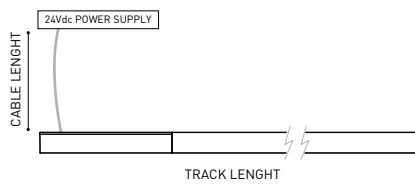

COLOUR | N ■ RAL 9005 | DIM OPTIONS PLEASE CONSULT

MINIMAL TRACK SUSPENSION

ARKOSLIGHT®



MINIMAL TRACK 24V Suspension


Profile 2m	A384-02-00-	N
Profile 2m Initial feed kit	A400-02-10-	N
Profile 2m Middle feed kit*	A400-02-20-	N

* Unidirectional Middle Feed.



MINIMAL TRACK 24V Suspension Straight Joiner


A400-00-02-	N
-------------	---



MINIMAL TRACK 24V Suspension Corner 90°

A400-00-03-	N
-------------	---

Cable Length = 85mm.



MINIMAL TRACK 24V Suspension

Rubber Cable n x 1m	A400-00-01-	N
---------------------	-------------	---

n = Total Length of System.

24V | Max. 4A



MINIMAL TRACK 24V Suspension Kit

A400-02-04-	N
-------------	---



MINIMAL TRACK 24V Suspension End Caps


A400-00-05-	N
-------------	---

Two End Caps Included





			P	V	D (A x B x C)
MINIMAL TRACK 24V Suspension Power Supply Box	ON/OFF	A400-00-06- NT	40W	24V	280 x 30 x 36mm
		A400-00-07- NT	100W	24V	280 x 30 x 36mm
MINIMAL TRACK 24V Remote Power Supply	ON/OFF	0434-01-37	60W	24V	180 x 52 x 30mm
		0433-10-22	100W	24V	295 x 43 x 30mm

Included ON/OFF 24Vdc Power Supply



DROP VOLTAGE TABLE

POWER (W)	CABLE SECTION (mm²)	CABLE LENGTH (m)			
		<5	<10	<20	<30
40	0,75	30	30	30	30
	1,5	30	30	30	30
60	0,75	30	30	20	10
	1,5	30	30	30	20
100	0,75	20	10	X	X
	1,5	20	20	10	X

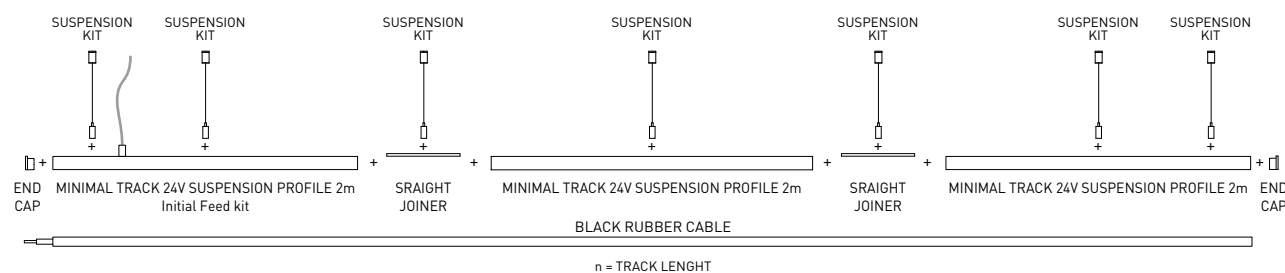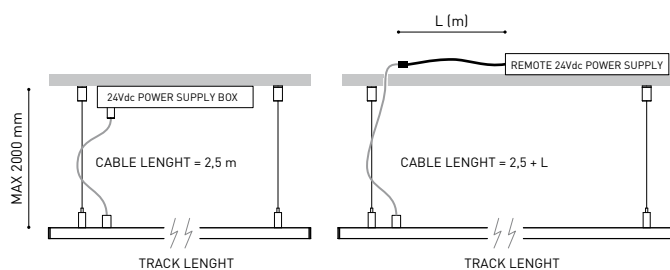

COLOUR | N ■ RAL 9005 | DIM OPTIONS PLEASE CONSULT

Calle N · Pol. Ind. EL OLIVERAL
46394 Ribarroja del Turia · Valencia (Spain)
Tel. +34 961 667 207 · Fax +34 961 667 054
info@arkoslight.com · www.arkoslight.com



WIRE TRIMLESS ACCESSORY


ARKOSLIGHT®

MINIMAL TRACK SUSPENSION



PRODUCT	
Model	Coaxial Timless
Reference	A023-00-03- W N
Colour	W ☐ RAL 9016 N ☐ RAL 9005
Category	Accessories
Fasteners not available	
 REMOTE  INCL  Ø20	

DIMENSIONAL DRAWING




Wire Trimless Accessory is a collection of accessories for fitting tensioners and cables to Arkoslight luminaires suspended directly from the ceiling with any visible ceiling rose or fixings. This achieves a minimalist application with a visually tidy finish.

With Wire Trimless Accessory the items adjacent to the ceiling of the standard product (ceiling roses, fixings, driver boxes, etc.) are concealed by a simple recessed application.

Wire Trimless Accessory reduces the visual impact of the installation leading to extremely minimalist aesthetics. The wires come out of the ceiling material as a part of the structure. This detail creates a much purer, more essential layout, particular when several luminaires are fitted in an arrangement.



DIMENSIONS



ACCESSORIES



CORD ACCESSORY



MINIMAL TRACK OPTIONS

AWARDS

reddot winner 2020
innovative productreddot winner 2020
lighting designBronze Delta
ADI Awards 2020HONORABLE MENTION
EUROPEAN
PRODUCT
DESIGN
AWARDWINNER
2020archiproducts
DESIGN AWARDS
WINNER 2020

PRODUCT

Name	STICK 22 24V 2M 22° 3000K MG
Reference	A4100111MG
Color	Metallized gold
RAL	Electrolytic bath
Category	TRACKLIGHTS

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	475 Lm
Power	4,5 W
Power values of the system	5,00 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	22°
Lighting efficiency	84%
Efficacy	106 Lm/W
Current intensity	400 mA
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	III
Voltage	24 Vdc
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Cord length	Max. 2 m
Track type	Minimal Track
Weight	205 g.
Packaged weight	285 g.
Packaging dimensions	322 x 122 x 45mm
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene / Polycarbonate




Stick is a light fitting, designed for accent lighting, which underlines the verticality of the space where it is applied. The light buoyancy of such a light aesthetic piece is one of its greatest attractions.

POLAR DIAGRAM

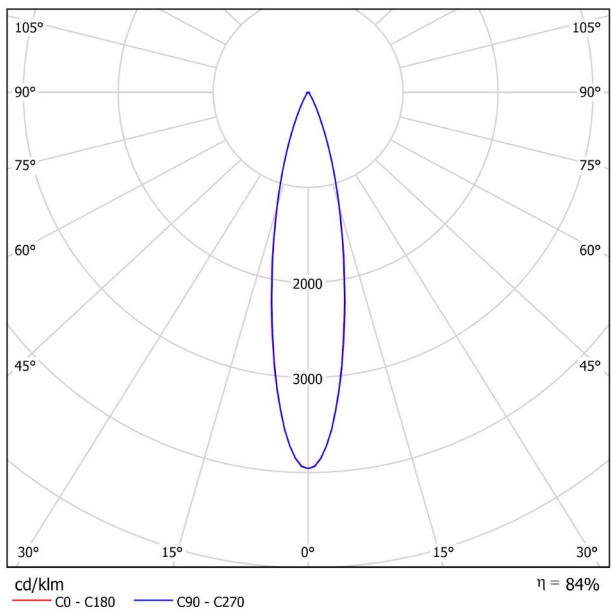


CONICAL DIAGRAM


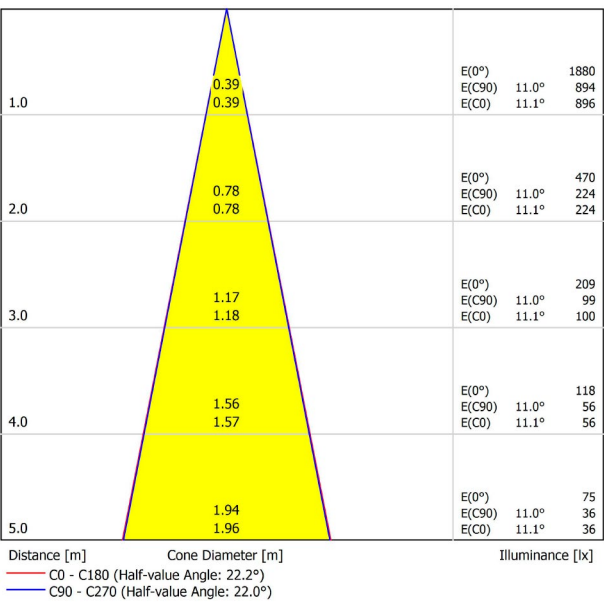




PRODUCT	
Model	Cord Accessory
Reference	02230000N
Colour	N ■ RAL9005
Category	Accessories

DIMENSIONAL DRAWING

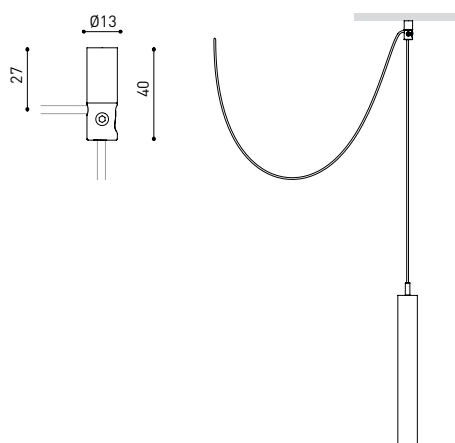



MINIMAL TRACK 24V Profile 2m

A384-00-00- | N |



MINIMAL TRACK 24V Rubber Cable n x 1m

A384-00-01- | N |


n = Total Length of System.

24V | Max. 4A

MINIMAL TRACK 24V Corner 90° 1 Plane

A384-00-02- | N |

Cable Length = 35mm.



MINIMAL TRACK 24V End Cap


A384-00-05- | N |



MINIMAL TRACK 24V Corner 90° 1 Plane Rounded


A384-00-03- | N |

Cable Length = 35mm.



MINIMAL TRACK 24V Connection Box


A384-00-06- | N |




MINIMAL TRACK 24V Corner 90° 2 Planes

A384-00-04- | N |

Cable Length = 100mm.





			P	V	D [A x B x C]
MINIMAL TRACK 24V Power Supply Box	ON/OFF	A384-00-07- NT	40W	24V	280 x 30 x 24mm
		A384-00-08- NT	100W	24V	280 x 30 x 24mm
Included ON/OFF 24Vdc Power Supply.					
MINIMAL TRACK 24V Remote Power Supply	ON/OFF	0434-01-37	60W	24V	180 x 52 x 30mm
		0433-10-22	100W	24V	295 x 43 x 30mm



DROP VOLTAGE TABLE



		CABLE LENGTH (m)			
		<5	<10	<20	<30
POWER (W)	CABLE SECTION (mm²)	TRACK LENGTH (m)			
		<5	<10	<20	<30
40	0,75	30	30	30	30
	1,5	30	30	30	30
60	0,75	30	30	20	10
	1,5	30	30	30	20
100	0,75	20	10	X	X
	1,5	20	20	10	X

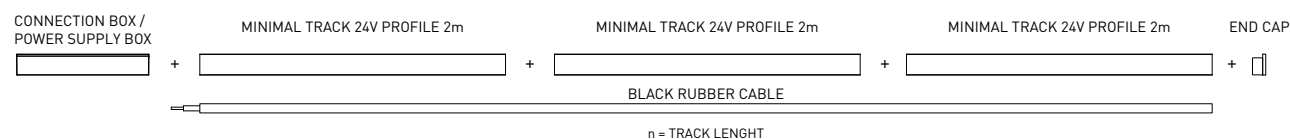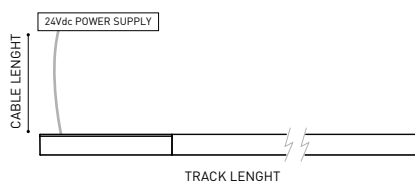

COLOUR | N ■ RAL 9005 | DIM OPTIONS PLEASE CONSULT

MINIMAL TRACK SUSPENSION

ARKOSLIGHT®



MINIMAL TRACK 24V Suspension


Profile 2m	A384-02-00-	N
Profile 2m Initial feed kit	A400-02-10-	N
Profile 2m Middle feed kit*	A400-02-20-	N

* Unidirectional Middle Feed.



MINIMAL TRACK 24V Suspension Straight Joiner


A400-00-02- | N |



MINIMAL TRACK 24V Suspension Corner 90°

A400-00-03- | N |

Cable Length = 85mm.



MINIMAL TRACK 24V Suspension

Rubber Cable n x 1m A400-00-01- | N |


n = Total Length of System.

24V | Max. 4A



MINIMAL TRACK 24V Suspension Kit

A400-02-04- | N |



MINIMAL TRACK 24V Suspension End Caps


A400-00-05- | N |

Two End Caps Included





			P	V	D (A x B x C)
MINIMAL TRACK 24V Suspension Power Supply Box	ON/OFF	A400-00-06- NT	40W	24V	280 x 30 x 36mm
		A400-00-07- NT	100W	24V	280 x 30 x 36mm
MINIMAL TRACK 24V Remote Power Supply	ON/OFF	0434-01-37	60W	24V	180 x 52 x 30mm
		0433-10-22	100W	24V	295 x 43 x 30mm

Included ON/OFF 24Vdc Power Supply



DROP VOLTAGE TABLE

POWER (W)	CABLE SECTION (mm²)	CABLE LENGTH (m)			
		<5	<10	<20	<30
40	0,75	30	30	30	30
	1,5	30	30	30	30
60	0,75	30	30	20	10
	1,5	30	30	30	20
100	0,75	20	10	X	X
	1,5	20	20	10	X

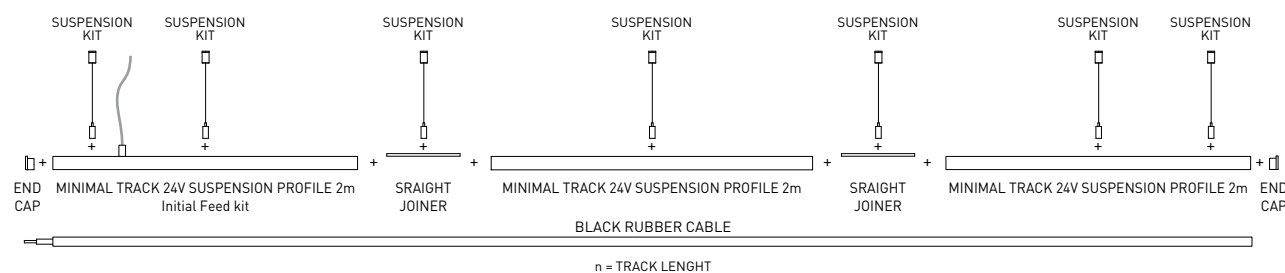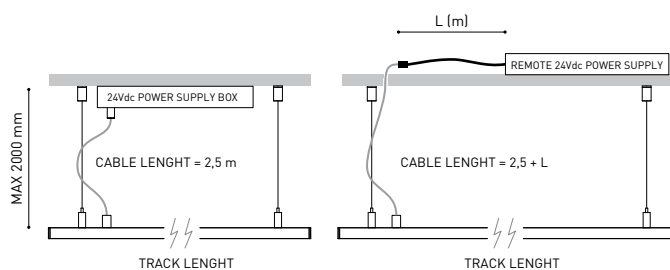

COLOUR | N ■ RAL 9005 | DIM OPTIONS PLEASE CONSULT

Calle N · Pol. Ind. EL OLIVERAL
46394 Ribarroja del Turia · Valencia (Spain)
Tel. +34 961 667 207 · Fax +34 961 667 054
info@arkoslight.com · www.arkoslight.com



WIRE TRIMLESS ACCESSORY


ARKOSLIGHT®

MINIMAL TRACK SUSPENSION



PRODUCT	
Model	Coaxial Timless
Reference	A023-00-03- W N
Colour	W ☐ RAL 9016 N ☐ RAL 9005
Category	Accessories
Fasteners not available	
 REMOTE  INCL  Ø20	

DIMENSIONAL DRAWING




Wire Trimless Accessory is a collection of accessories for fitting tensioners and cables to Arkoslight luminaires suspended directly from the ceiling with any visible ceiling rose or fixings. This achieves a minimalist application with a visually tidy finish.

With Wire Trimless Accessory the items adjacent to the ceiling of the standard product (ceiling roses, fixings, driver boxes, etc.) are concealed by a simple recessed application.

Wire Trimless Accessory reduces the visual impact of the installation leading to extremely minimalist aesthetics. The wires come out of the ceiling material as a part of the structure. This detail creates a much purer, more essential layout, particular when several luminaires are fitted in an arrangement.



DIMENSIONS



ACCESSORIES



CORD ACCESSORY



MINIMAL TRACK OPTIONS

AWARDS

reddot winner 2020
innovative productreddot winner 2020
lighting designBronze Delta
ADI Awards 2020HONORABLE MENTION
EUROPEAN
PRODUCT
DESIGN
AWARDWINNER
2020archiproducts
DESIGN AWARDS
WINNER 2020

PRODUCT

Name	STICK 22 24V 2M 22° 3000K NT
Reference	A4100111NT
Color	Textured black
RAL	9005
Category	TRACKLIGHTS

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	475 Lm
Power	4,5 W
Power values of the system	5,00 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	22°
Lighting efficiency	84%
Efficacy	106 Lm/W
Current intensity	400 mA
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	III
Voltage	24 Vdc
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Cord length	Max. 2 m
Track type	Minimal Track
Weight	205 g.
Packaged weight	285 g.
Packaging dimensions	322 x 122 x 45mm
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene / Polycarbonate




Stick is a light fitting, designed for accent lighting, which underlines the verticality of the space where it is applied. The light buoyancy of such a light aesthetic piece is one of its greatest attractions.

POLAR DIAGRAM

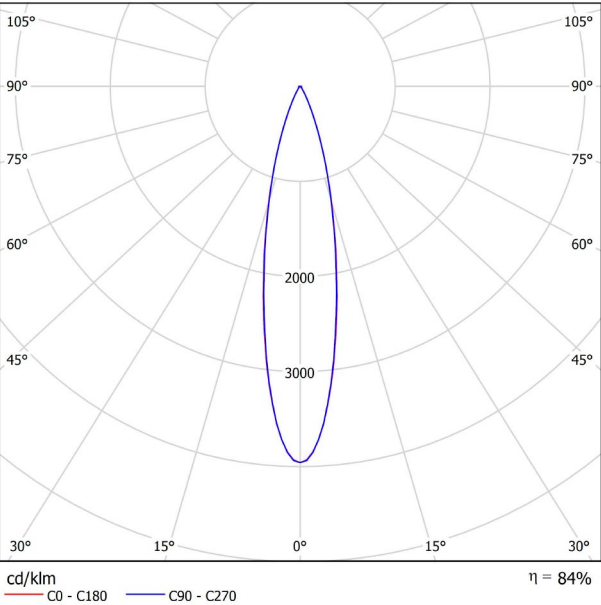


CONICAL DIAGRAM

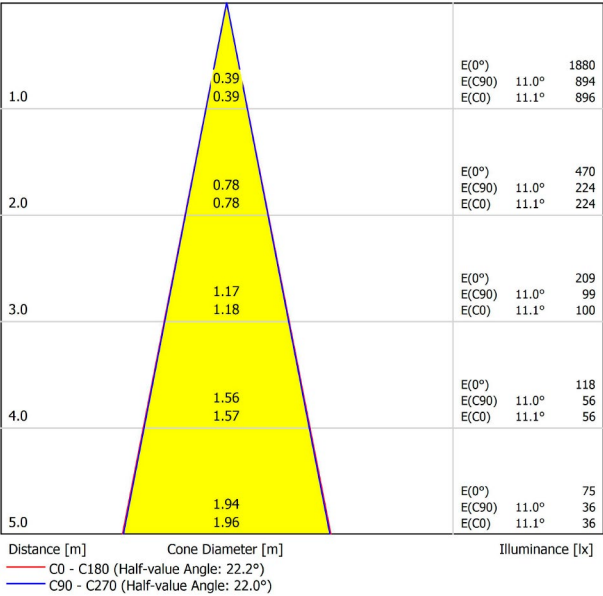




PRODUCT	
Model	Cord Accessory
Reference	02230000N
Colour	N ■ RAL9005
Category	Accessories


DIMENSIONAL DRAWING

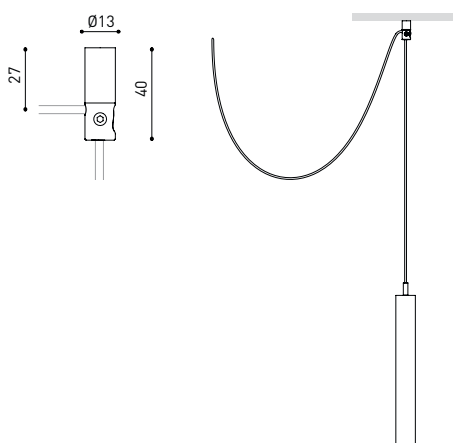



MINIMAL TRACK 24V Profile 2m

A384-00-00- | N |



MINIMAL TRACK 24V Rubber Cable n x 1m

A384-00-01- | N |


n = Total Length of System.

24V | Max. 4A

MINIMAL TRACK 24V Corner 90° 1 Plane

A384-00-02- | N |

Cable Length = 35mm.



MINIMAL TRACK 24V End Cap


A384-00-05- | N |



MINIMAL TRACK 24V Corner 90° 1 Plane Rounded


A384-00-03- | N |

Cable Length = 35mm.



MINIMAL TRACK 24V Connection Box


A384-00-06- | N |




MINIMAL TRACK 24V Corner 90° 2 Planes

A384-00-04- | N |

Cable Length = 100mm.





				P	V	D [A x B x C]
MINIMAL TRACK 24V Power Supply Box	ON/OFF	A384-00-07- NT		40W	24V	280 x 30 x 24mm
		A384-00-08- NT		100W	24V	280 x 30 x 24mm
Included ON/OFF 24Vdc Power Supply.						
MINIMAL TRACK 24V Remote Power Supply	ON/OFF	0434-01-37		60W	24V	180 x 52 x 30mm
		0433-10-22		100W	24V	295 x 43 x 30mm



DROP VOLTAGE TABLE



		CABLE LENGTH [m]			
		<5	<10	<20	<30
POWER [W]	CABLE SECTION [mm²]	TRACK LENGTH [m]			
		<5	<10	<20	<30
40	0,75	30	30	30	30
	1,5	30	30	30	30
60	0,75	30	30	20	10
	1,5	30	30	30	20
100	0,75	20	10	X	X
	1,5	20	20	10	X

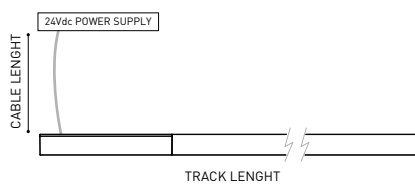

COLOUR | N ■ RAL 9005 | DIM OPTIONS PLEASE CONSULT

MINIMAL TRACK SUSPENSION

ARKOSLIGHT®



MINIMAL TRACK 24V Suspension


Profile 2m	A384-02-00-	N
Profile 2m Initial feed kit	A400-02-10-	N
Profile 2m Middle feed kit*	A400-02-20-	N

* Unidirectional Middle Feed.



MINIMAL TRACK 24V Suspension Straight Joiner


A400-00-02- | N |



MINIMAL TRACK 24V Suspension Corner 90°

A400-00-03- | N |

Cable Length = 85mm.



MINIMAL TRACK 24V Suspension

Rubber Cable n x 1m A400-00-01- | N |


n = Total Length of System.

24V | Max. 4A



MINIMAL TRACK 24V Suspension Kit

A400-02-04- | N |




MINIMAL TRACK 24V Suspension End Caps

A400-00-05- | N |

Two End Caps Included





				P	V	D (A x B x C)
MINIMAL TRACK 24V Suspension Power Supply Box	ON/OFF	A400-00-06- NT		40W	24V	280 x 30 x 36mm
		A400-00-07- NT		100W	24V	280 x 30 x 36mm
Included ON/OFF 24Vdc Power Supply						
MINIMAL TRACK 24V Remote Power Supply	ON/OFF	0434-01-37		60W	24V	180 x 52 x 30mm
		0433-10-22		100W	24V	295 x 43 x 30mm



DROP VOLTAGE TABLE

POWER (W)	CABLE SECTION (mm²)	CABLE LENGTH (m)			
		<5	<10	<20	<30
40	0,75	30	30	30	30
	1,5	30	30	30	30
60	0,75	30	30	20	10
	1,5	30	30	30	20
100	0,75	20	10	X	X
	1,5	20	20	10	X

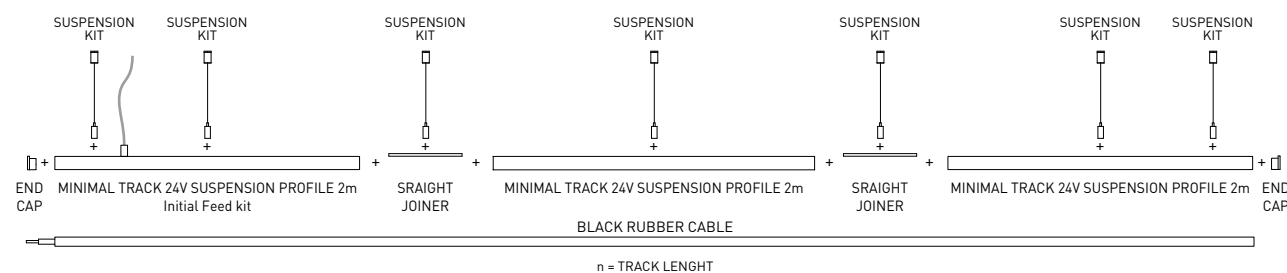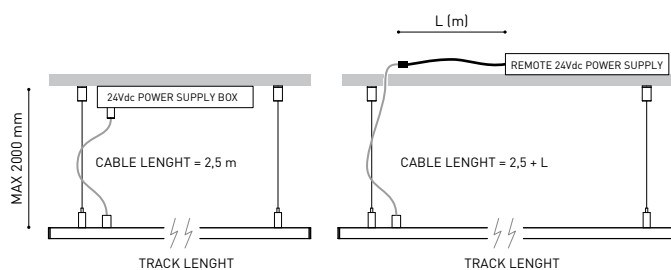

COLOUR | N ■ RAL 9005 | DIM OPTIONS PLEASE CONSULT

Calle N · Pol. Ind. EL OLIVERAL
46394 Ribarroja del Turia · Valencia (Spain)
Tel. +34 961 667 207 · Fax +34 961 667 054
info@arkoslight.com · www.arkoslight.com



WIRE TRIMLESS ACCESSORY


ARKOSLIGHT®

MINIMAL TRACK SUSPENSION



PRODUCT	
Model	Coaxial Timless
Reference	A023-00-03- W N
Colour	W ☐ RAL 9016 N ☐ RAL 9005
Category	Accessories
Fasteners not available	
 REMOTE  INCL  Ø20	

DIMENSIONAL DRAWING




Wire Trimless Accessory is a collection of accessories for fitting tensioners and cables to Arkoslight luminaires suspended directly from the ceiling with any visible ceiling rose or fixings. This achieves a minimalist application with a visually tidy finish.

With Wire Trimless Accessory the items adjacent to the ceiling of the standard product (ceiling roses, fixings, driver boxes, etc.) are concealed by a simple recessed application.

Wire Trimless Accessory reduces the visual impact of the installation leading to extremely minimalist aesthetics. The wires come out of the ceiling material as a part of the structure. This detail creates a much purer, more essential layout, particular when several luminaires are fitted in an arrangement.



DIMENSIONS



ACCESSORIES



CORD ACCESSORY



MINIMAL TRACK OPTIONS

AWARDS

reddot winner 2020
innovative productreddot winner 2020
lighting designBronze Delta
ADI Awards 2020HONORABLE MENTION
EUROPEAN
PRODUCT
DESIGN
AWARDWINNER
2020archiproducts
DESIGN AWARDS
WINNER 2020

PRODUCT

Name	STICK 22 24V 2M 22° 3000K WT
Reference	A4100111WT
Color	Textured white
RAL	9016
Category	TRACKLIGHTS

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	475 Lm
Power	4,5 W
Power values of the system	5,00 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	22°
Lighting efficiency	84%
Efficacy	106 Lm/W
Current intensity	400 mA
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	III
Voltage	24 Vdc
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Cord length	Max. 2 m
Track type	Minimal Track
Weight	205 g.
Packaged weight	285 g.
Packaging dimensions	322 x 122 x 45mm
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene / Polycarbonate




Stick is a light fitting, designed for accent lighting, which underlines the verticality of the space where it is applied. The light buoyancy of such a light aesthetic piece is one of its greatest attractions.

POLAR DIAGRAM

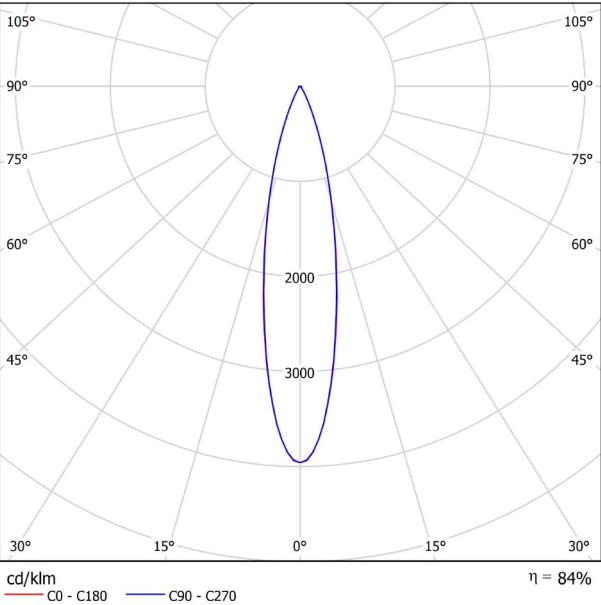


CONICAL DIAGRAM

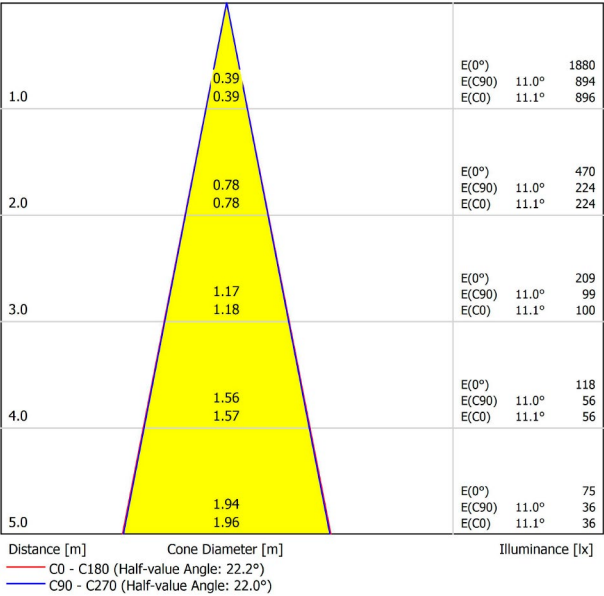




PRODUCT	
Model	Cord Accessory
Reference	02230000N
Colour	N ■ RAL9005
Category	Accessories


DIMENSIONAL DRAWING

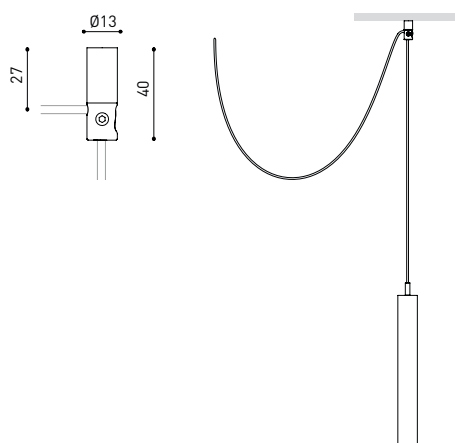



MINIMAL TRACK 24V Profile 2m

A384-02-00- | N |



MINIMAL TRACK 24V Rubber Cable n x 1m

A384-00-01- | N |


n = Total Length of System.

24V | Max. 4A

MINIMAL TRACK 24V Corner 90° 1 Plane

A384-00-02- | N |

Cable Length = 35mm.



MINIMAL TRACK 24V End Cap


A384-00-05- | N |



MINIMAL TRACK 24V Corner 90° 1 Plane Rounded


A384-00-03- | N |

Cable Length = 35mm.



MINIMAL TRACK 24V Connection Box


A384-00-06- | N |




MINIMAL TRACK 24V Corner 90° 2 Planes

A384-00-04- | N |

Cable Length = 100mm.





				P	V	D [A x B x C]
MINIMAL TRACK 24V Power Supply Box	ON/OFF	A384-00-07- NT		40W	24V	280 x 30 x 24mm
		A384-00-08- NT		100W	24V	280 x 30 x 24mm
Included ON/OFF 24Vdc Power Supply.						
MINIMAL TRACK 24V Remote Power Supply	ON/OFF	0434-01-37		60W	24V	180 x 52 x 30mm
		0433-10-22		100W	24V	295 x 43 x 30mm



DROP VOLTAGE TABLE



		CABLE LENGTH [m]			
		<5	<10	<20	<30
POWER [W]	CABLE SECTION [mm²]	TRACK LENGTH [m]			
		30	30	30	30
40	0,75	30	30	30	30
	1,5	30	30	30	30
60	0,75	30	30	20	10
	1,5	30	30	30	20
100	0,75	20	10	X	X
	1,5	20	20	10	X

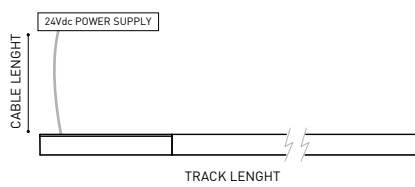

COLOUR | N ■ RAL 9005 | DIM OPTIONS PLEASE CONSULT

MINIMAL TRACK SUSPENSION

ARKOSLIGHT®



MINIMAL TRACK 24V Suspension


Profile 2m	A384-02-00-	N
Profile 2m Initial feed kit	A400-02-10-	N
Profile 2m Middle feed kit*	A400-02-20-	N

* Unidirectional Middle Feed.



MINIMAL TRACK 24V Suspension Straight Joiner


A400-00-02- | N |



MINIMAL TRACK 24V Suspension Corner 90°

A400-00-03- | N |

Cable Length = 85mm.



MINIMAL TRACK 24V Suspension

Rubber Cable n x 1m

A400-00-01- | N |


n = Total Length of System.

24V | Max. 4A



MINIMAL TRACK 24V Suspension Kit

A400-02-04- | N |




MINIMAL TRACK 24V Suspension End Caps

A400-00-05- | N |

Two End Caps Included





			P	V	D [A x B x C]
MINIMAL TRACK 24V Suspension Power Supply Box	ON/OFF	A400-00-06- NT	40W	24V	280 x 30 x 36mm
		A400-00-07- NT	100W	24V	280 x 30 x 36mm
Included ON/OFF 24Vdc Power Supply					
MINIMAL TRACK 24V Remote Power Supply	ON/OFF	0434-01-37	60W	24V	180 x 52 x 30mm
		0433-10-22	100W	24V	295 x 43 x 30mm



DROP VOLTAGE TABLE

POWER (W)	CABLE SECTION (mm²)	CABLE LENGTH (m)			
		<5	<10	<20	<30
40	0,75	30	30	30	30
	1,5	30	30	30	30
60	0,75	30	30	20	10
	1,5	30	30	30	20
100	0,75	20	10	X	X
	1,5	20	20	10	X

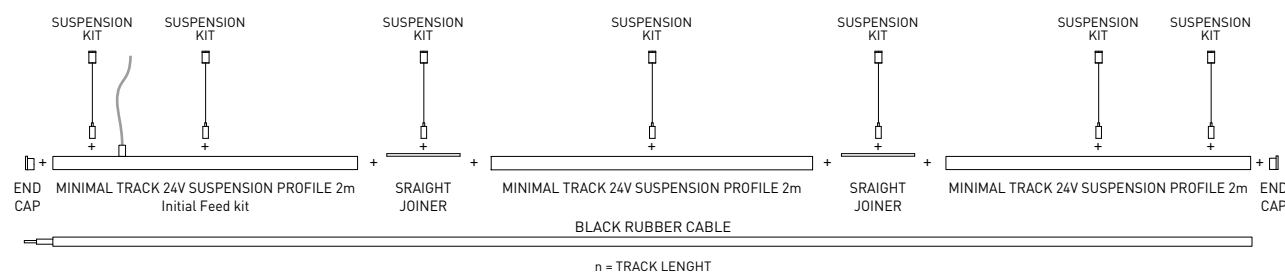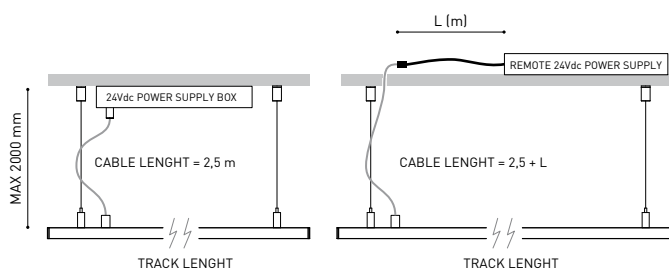

COLOUR | N ■ RAL 9005 | DIM OPTIONS PLEASE CONSULT

Calle N · Pol. Ind. EL OLIVERAL
46394 Ribarroja del Turia · Valencia (Spain)
Tel. +34 961 667 207 · Fax +34 961 667 054
info@arkoslight.com · www.arkoslight.com



WIRE TRIMLESS ACCESSORY


ARKOSLIGHT®

MINIMAL TRACK SUSPENSION



PRODUCT	
Model	Coaxial Timless
Reference	A023-00-03- W N
Colour	W ☐ RAL 9016 N ☐ RAL 9005
Category	Accessories
Fasteners not available	
 REMOTE  INCL  Ø20	

DIMENSIONAL DRAWING




Wire Trimless Accessory is a collection of accessories for fitting tensioners and cables to Arkoslight luminaires suspended directly from the ceiling with any visible ceiling rose or fixings. This achieves a minimalist application with a visually tidy finish.

With Wire Trimless Accessory the items adjacent to the ceiling of the standard product (ceiling roses, fixings, driver boxes, etc.) are concealed by a simple recessed application.

Wire Trimless Accessory reduces the visual impact of the installation leading to extremely minimalist aesthetics. The wires come out of the ceiling material as a part of the structure. This detail creates a much purer, more essential layout, particular when several luminaires are fitted in an arrangement.



DIMENSIONS



ACCESSORIES



CORD ACCESSORY



MINIMAL TRACK OPTIONS

AWARDS



reddot winner 2020
innovative product



reddot winner 2020
lighting design



Bronze Delta
ADI Awards 2020



HONORABLE MENTION
EUROPEAN
PRODUCT
DESIGN
AWARD



WINNER
2020



archiproducts
DESIGN AWARDS
WINNER 2020

PRODUCT

Name	STICK 22 24V 2M 37° 2700K MG
Reference	A4100120MG
Color	Metallized gold
RAL	Electrolytic bath
Category	TRACKLIGHTS

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	440 Lm
Power	4,5 W
Power values of the system	5,00 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	37°
Lighting efficiency	82%
Efficacy	98 Lm/W
Current intensity	400 mA
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	III
Voltage	24 Vdc
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Cord length	Max. 2 m
Track type	Minimal Track
Weight	205 g.
Packaged weight	285 g.
Packaging dimensions	322 x 122 x 45mm
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene / Polycarbonate




Stick is a light fitting, designed for accent lighting, which underlines the verticality of the space where it is applied. The light buoyancy of such a light aesthetic piece is one of its greatest attractions.

POLAR DIAGRAM

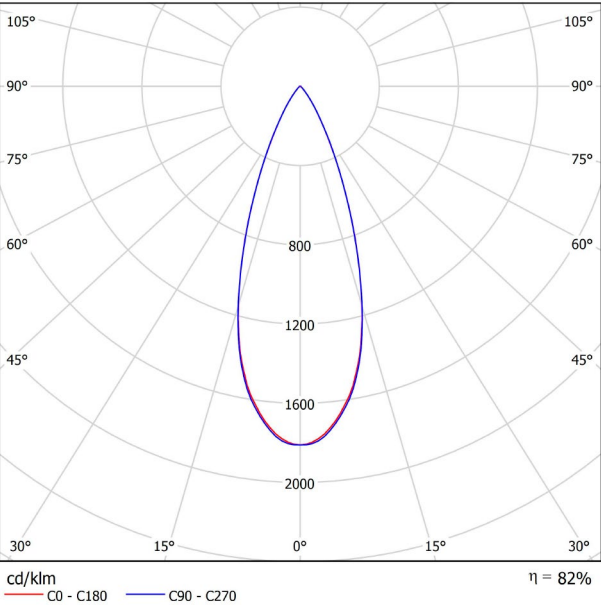


CONICAL DIAGRAM

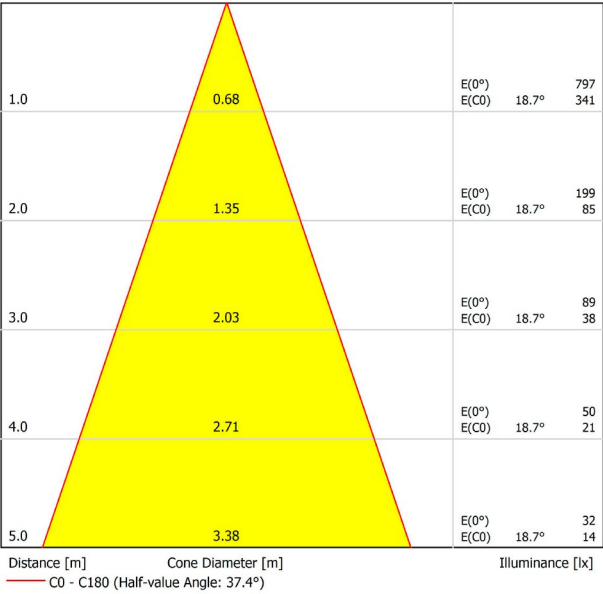




PRODUCT	
Model	Cord Accessory
Reference	02230000N
Colour	N ■ RAL9005
Category	Accessories


DIMENSIONAL DRAWING

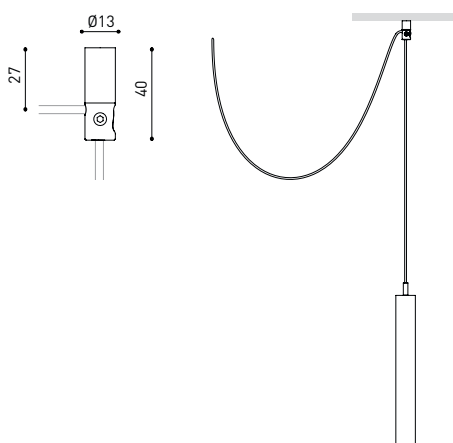



MINIMAL TRACK 24V Profile 2m

A384-00-00- | N |



MINIMAL TRACK 24V Rubber Cable n x 1m

A384-00-01- | N |


n = Total Length of System.

24V | Max. 4A

MINIMAL TRACK 24V Corner 90° 1 Plane

A384-00-02- | N |

Cable Length = 35mm.



MINIMAL TRACK 24V End Cap


A384-00-05- | N |



MINIMAL TRACK 24V Corner 90° 1 Plane Rounded


A384-00-03- | N |

Cable Length = 35mm.



MINIMAL TRACK 24V Connection Box


A384-00-06- | N |




MINIMAL TRACK 24V Corner 90° 2 Planes

A384-00-04- | N |

Cable Length = 100mm.





				P	V	D [A x B x C]
MINIMAL TRACK 24V Power Supply Box	ON/OFF	A384-00-07- NT		40W	24V	280 x 30 x 24mm
		A384-00-08- NT		100W	24V	280 x 30 x 24mm
Included ON/OFF 24Vdc Power Supply.						
MINIMAL TRACK 24V Remote Power Supply	ON/OFF	0434-01-37		60W	24V	180 x 52 x 30mm
		0433-10-22		100W	24V	295 x 43 x 30mm



DROP VOLTAGE TABLE



		CABLE LENGTH [m]			
		<5	<10	<20	<30
POWER [W]	CABLE SECTION [mm²]	TRACK LENGTH [m]			
		<5	<10	<20	<30
40	0,75	30	30	30	30
	1,5	30	30	30	30
60	0,75	30	30	20	10
	1,5	30	30	30	20
100	0,75	20	10	X	X
	1,5	20	20	10	X

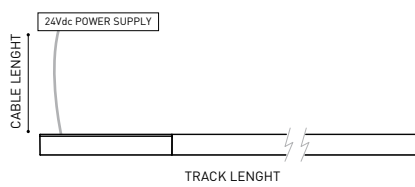

COLOUR | N ■ RAL 9005 | DIM OPTIONS PLEASE CONSULT

MINIMAL TRACK SUSPENSION

ARKOSLIGHT®



MINIMAL TRACK 24V Suspension


Profile 2m	A384-02-00-	N
Profile 2m Initial feed kit	A400-02-10-	N
Profile 2m Middle feed kit*	A400-02-20-	N

* Unidirectional Middle Feed.



MINIMAL TRACK 24V Suspension Straight Joiner


A400-00-02- | N |



MINIMAL TRACK 24V Suspension Corner 90°

A400-00-03- | N |

Cable Length = 85mm.



MINIMAL TRACK 24V Suspension

Rubber Cable n x 1m

A400-00-01- | N |


n = Total Length of System.

24V | Max. 4A



MINIMAL TRACK 24V Suspension Kit

A400-02-04- | N |




MINIMAL TRACK 24V Suspension End Caps

A400-00-05- | N |

Two End Caps Included





				P	V	D (A x B x C)
MINIMAL TRACK 24V Suspension Power Supply Box	ON/OFF	A400-00-06- NT		40W	24V	280 x 30 x 36mm
		A400-00-07- NT		100W	24V	280 x 30 x 36mm
Included ON/OFF 24Vdc Power Supply						
MINIMAL TRACK 24V Remote Power Supply	ON/OFF	0434-01-37		60W	24V	180 x 52 x 30mm
		0433-10-22		100W	24V	295 x 43 x 30mm



DROP VOLTAGE TABLE

POWER (W)	CABLE SECTION (mm²)	CABLE LENGTH (m)			
		<5	<10	<20	<30
40	0,75	30	30	30	30
	1,5	30	30	30	30
60	0,75	30	30	20	10
	1,5	30	30	30	20
100	0,75	20	10	X	X
	1,5	20	20	10	X

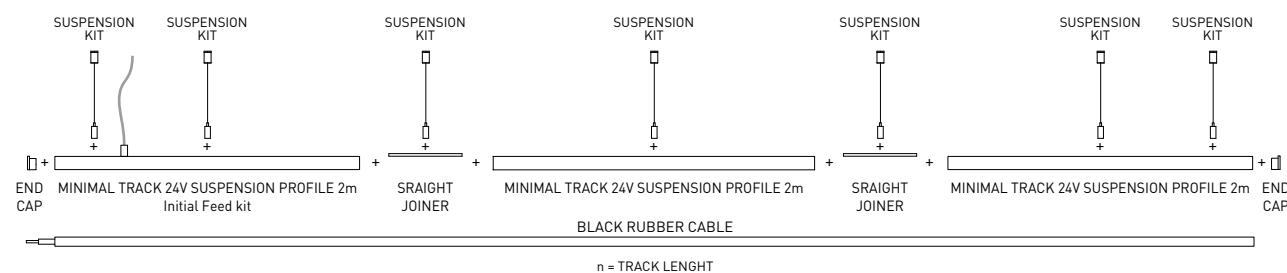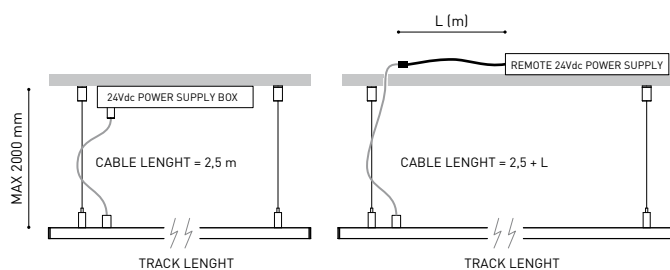

COLOUR | N ■ RAL 9005 | DIM OPTIONS PLEASE CONSULT

Calle N · Pol. Ind. EL OLIVERAL
46394 Ribarroja del Turia · Valencia (Spain)
Tel. +34 961 667 207 · Fax +34 961 667 054
info@arkoslight.com · www.arkoslight.com



WIRE TRIMLESS ACCESSORY


ARKOSLIGHT®

MINIMAL TRACK SUSPENSION



PRODUCT	
Model	Coaxial Timless
Reference	A023-00-03- W N
Colour	W ☐ RAL 9016 N ☐ RAL 9005
Category	Accessories
Fasteners not available	
 REMOTE  INCL  Ø20	

DIMENSIONAL DRAWING



Wire Trimless Accessory is a collection of accessories for fitting tensioners and cables to Arkoslight luminaires suspended directly from the ceiling with any visible ceiling rose or fixings. This achieves a minimalist application with a visually tidy finish.

With Wire Trimless Accessory the items adjacent to the ceiling of the standard product (ceiling roses, fixings, driver boxes, etc.) are concealed by a simple recessed application.

Wire Trimless Accessory reduces the visual impact of the installation leading to extremely minimalist aesthetics. The wires come out of the ceiling material as a part of the structure. This detail creates a much purer, more essential layout, particular when several luminaires are fitted in an arrangement.