




## DIMENSIONS



## ACCESSORIES



MINIMAL TRACK OPTIONS

## AWARDS



## PRODUCT

Name	FIT 27 24V 37° 3000K NT
Reference	A3990021NT
Color	Textured black
RAL	9005
Category	TRACKLIGHTS

## LIGHTING INFORMATION

Light source	LED
Gross luminous flux	475 Lm
Power	4,5 W
Power values of the system	5 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	37°
Lighting efficiency	82%
Efficacy	106 Lm/W
Current intensity	400 mA
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	III
Voltage	24 Vdc
Energy efficiency	A+
LED lifespan	L80B10 (Tj=85°C) >60.000h


## OTHER DATA

Ingress Protection	IP20
Swivel angle	90°
Rotation angle	355°
Track type	Minimal Track
Weight	75 g.
Packaged weight	115 g.
Packaging dimensions	113 × 111 × 32 mm
Units per package	1
Materials	Aluminium / Polycarbonate





Fit 27 24V is a projector for the Minimal Track system. Cylindrical geometry and essential forms, it stands out for its minimalistic looking and its functionality as it can be orientated in any direction. The black perimeter around its mouth highlights its anti-glare vocation.

POLAR DIAGRAM

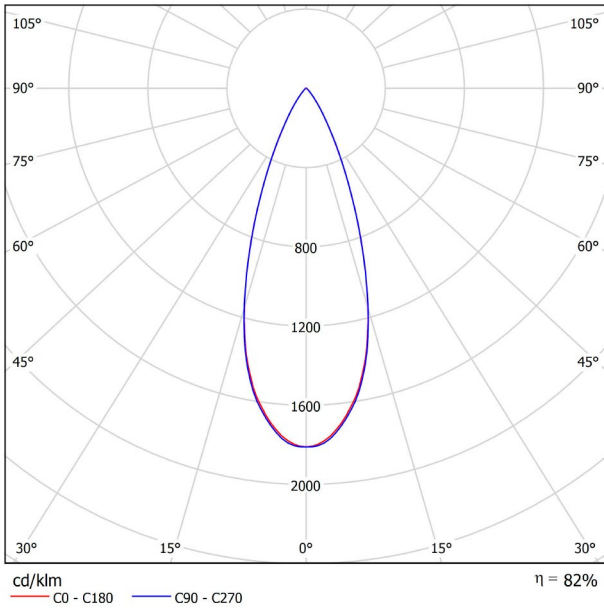


CONICAL DIAGRAM

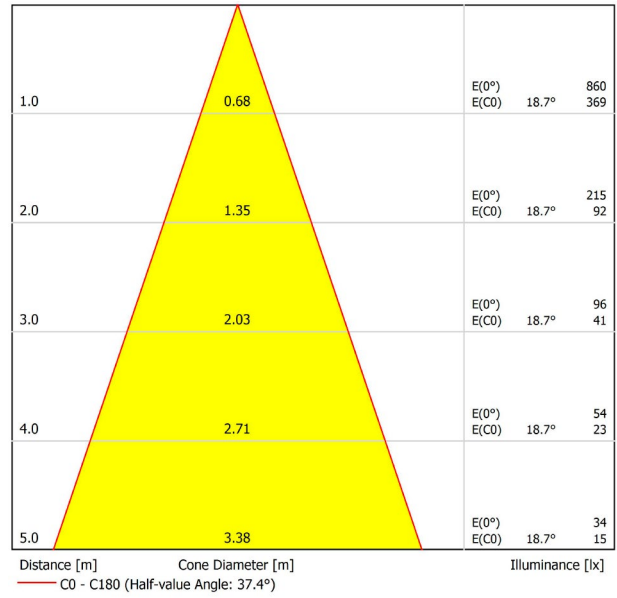



**MINIMAL TRACK 24V Profile 2m** A384-02-00- | N |




**MINIMAL TRACK 24V Rubber Cable n x 1m** A384-00-01- | N |

n = Total Length of System.

24V | Max. 4A

**MINIMAL TRACK 24V Corner 90° 1 Plane**  
A384-00-02- | N |

Cable Length = 35mm.




**MINIMAL TRACK 24V End Cap**  
A384-00-05- | N |




**MINIMAL TRACK 24V Corner 90° 1 Plane Rounded**  
A384-00-03- | N |

Cable Length = 35mm.




**MINIMAL TRACK 24V Connection Box**  
A384-00-06- | N |




**MINIMAL TRACK 24V Corner 90° 2 Planes**  
A384-00-04- | N |

Cable Length = 100mm.





			P	V	D (A x B x C)
<b>MINIMAL TRACK 24V Power Supply Box</b>	ON/OFF	A384-00-07-   NT	40W	24V	280 x 30 x 24mm
		A384-00-08-   NT	100W	24V	280 x 30 x 24mm
Included ON/OFF 24Vdc Power Supply.					
<b>MINIMAL TRACK 24V Remote Power Supply</b>	ON/OFF	0434-01-37	60W	24V	180 x 52 x 30mm
		0433-10-22	100W	24V	295 x 43 x 30mm





### DROP VOLTAGE TABLE

POWER (W)	CABLE SECTION (mm <sup>2</sup> )	CABLE LENGTH (m)			
		<5	<10	<20	<30
40	0,75	30	30	30	30
	1,5	30	30	30	30
60	0,75	30	30	20	10
	1,5	30	30	30	20
100	0,75	20	10	X	X
	1,5	20	20	10	X

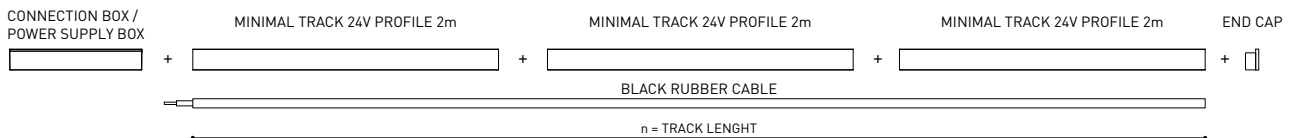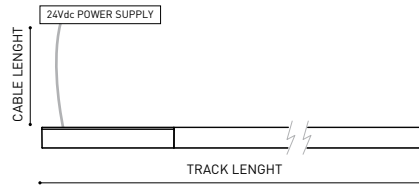

COLOUR | N ■ RAL 9005 | DIM OPTIONS PLEASE CONSULT



### MINIMAL TRACK 24V Suspension

Profile 2m	A384-02-00-	N
Profile 2m Initial feed kit	A400-02-10-	N
Profile 2m Middle feed kit*	A400-02-20-	N

\* Unidirectional Middle Feed.



### MINIMAL TRACK 24V Suspension


Rubber Cable n x 1m	A400-00-01-	N
---------------------	-------------	---

n = Total Length of System.

24V | Max. 4A


### MINIMAL TRACK 24V Suspension Straight Joiner

A400-00-02-	N
-------------	---



### MINIMAL TRACK 24V Suspension Kit


A400-02-04-	N
-------------	---



### MINIMAL TRACK 24V Suspension Corner 90°

A400-00-03-	N
-------------	---

Cable Length = 85mm.



### MINIMAL TRACK 24V Suspension End Caps

A400-00-05-	N
-------------	---

Two End Caps Included




### MINIMAL TRACK 24V Suspension Power Supply Box

	ON/OFF		P	V	D (A x B x C)
MINIMAL TRACK 24V Suspension	ON/OFF	A400-00-06-	40W	24V	280 x 30 x 36mm
Power Supply Box		A400-00-07-	100W	24V	280 x 30 x 36mm

Included ON/OFF 24Vdc Power Supply



### MINIMAL TRACK 24V Remote Power Supply

	ON/OFF		P	V	D (A x B x C)
MINIMAL TRACK 24V	ON/OFF	0434-01-37	60W	24V	180 x 52 x 30mm
Remote Power Supply		0433-10-22	100W	24V	295 x 43 x 30mm



### DROP VOLTAGE TABLE

POWER (W)	CABLE SECTION (mm <sup>2</sup> )	CABLE LENGTH (m)			
		<5	<10	<20	<30
40	0,75	30	30	30	30
	1,5	30	30	30	30
60	0,75	30	30	20	10
	1,5	30	30	30	20
100	0,75	20	10	X	X
	1,5	20	20	10	X

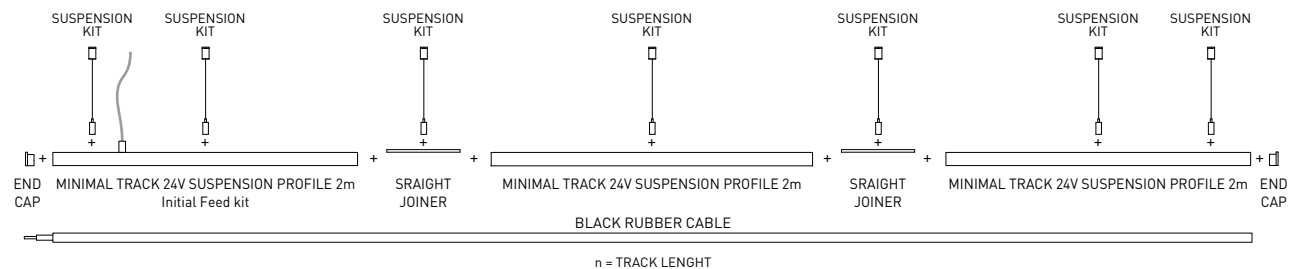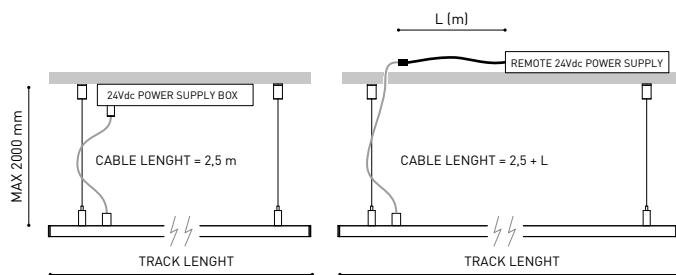

COLOUR | N ■ RAL 9005 | DIM OPTIONS PLEASE CONSULT



<b>Model</b>	Coaxial Timless
<b>Reference</b>	A023-00-03-   W   N
<b>Colour</b>	W <input type="checkbox"/> RAL 9016   N <input checked="" type="checkbox"/> RAL 9005
<b>Category</b>	Accessories

**PRODUCT**

Coaxial Timless

A023-00-03- | W | N |


W  RAL 9016 | N  RAL 9005

Accessories

Fasteners not available



**DIMENSIONAL DRAWING**




Wire Trimless Accessory is a collection of accessories for fitting tensioners and cables to Arkoslight luminaires suspended directly from the ceiling with any visible ceiling rose or fixings. This achieves a minimalist application with a visually tidy finish.

With Wire Trimless Accessory the items adjacent to the ceiling of the standard product (ceiling roses, fixings, driver boxes, etc.) are concealed by a simple recessed application.

Wire Trimless Accessory reduces the visual impact of the installation leading to extremely minimalist aesthetics. The wires come out of the ceiling material as a part of the structure. This detail creates a much purer, more essential layout, particular when several luminaires are fitted in an arrangement.



### DIMENSIONS



### ACCESSORIES



MINIMAL TRACK OPTIONS

### AWARDS



### PRODUCT

Name	FIT 27 24V 37° 3000K WT
Reference	A3990021WT
Color	Textured white
RAL	9016
Category	TRACKLIGHTS

### LIGHTING INFORMATION

Light source	LED
Gross luminous flux	475 Lm
Power	4,5 W
Power values of the system	5 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	37°
Lighting efficiency	82%
Efficacy	106 Lm/W
Current intensity	400 mA
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	III
Voltage	24 Vdc
Energy efficiency	A+
LED lifespan	L80B10 (Tj=85°C) >60.000h


### OTHER DATA

Ingress Protection	IP20
Swivel angle	90°
Rotation angle	355°
Track type	Minimal Track
Weight	75 g.
Packaged weight	115 g.
Packaging dimensions	113 × 111 × 32 mm
Units per package	1
Materials	Aluminium / Polycarbonate





Fit 27 24V is a projector for the Minimal Track system. Cylindrical geometry and essential forms, it stands out for its minimalistic looking and its functionality as it can be orientated in any direction. The black perimeter around its mouth highlights its anti-glare vocation.

POLAR DIAGRAM

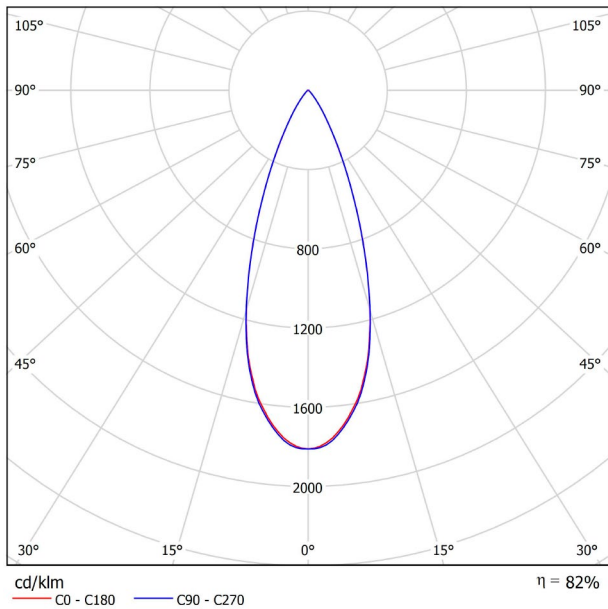


CONICAL DIAGRAM

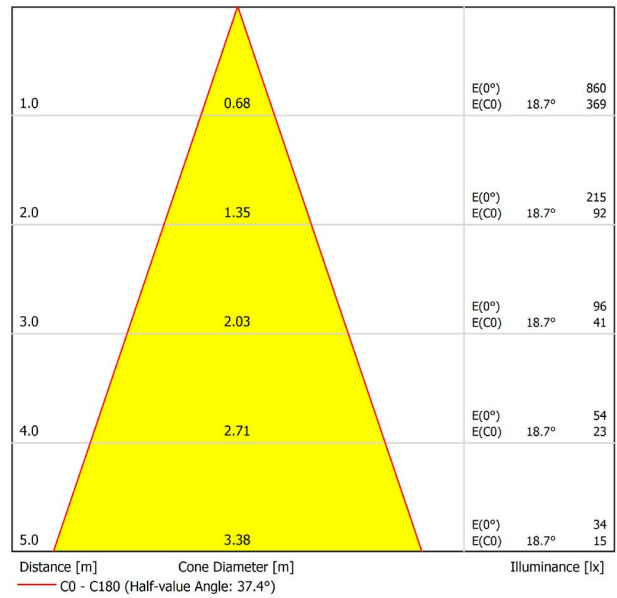



**MINIMAL TRACK 24V Profile 2m** A384-02-00- | N |




**MINIMAL TRACK 24V Rubber Cable n x 1m** A384-00-01- | N |

n = Total Length of System.

24V | Max. 4A

**MINIMAL TRACK 24V Corner 90° 1 Plane**  
A384-00-02- | N |

Cable Length = 35mm.




**MINIMAL TRACK 24V End Cap**  
A384-00-05- | N |




**MINIMAL TRACK 24V Corner 90° 1 Plane Rounded**  
A384-00-03- | N |

Cable Length = 35mm.




**MINIMAL TRACK 24V Connection Box**  
A384-00-06- | N |




**MINIMAL TRACK 24V Corner 90° 2 Planes**  
A384-00-04- | N |

Cable Length = 100mm.





			P	V	D (A x B x C)
<b>MINIMAL TRACK 24V Power Supply Box</b>	ON/OFF	A384-00-07-   NT	40W	24V	280 x 30 x 24mm
		A384-00-08-   NT	100W	24V	280 x 30 x 24mm
Included ON/OFF 24Vdc Power Supply.					
<b>MINIMAL TRACK 24V Remote Power Supply</b>	ON/OFF	0434-01-37	60W	24V	180 x 52 x 30mm
		0433-10-22	100W	24V	295 x 43 x 30mm


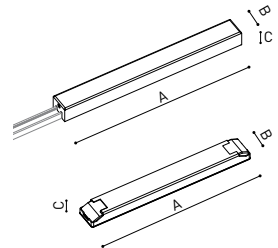


### DROP VOLTAGE TABLE

POWER (W)	CABLE SECTION (mm <sup>2</sup> )	CABLE LENGTH (m)			
		<5	<10	<20	<30
40	0,75	30	30	30	30
	1,5	30	30	30	30
60	0,75	30	30	20	10
	1,5	30	30	30	20
100	0,75	20	10	X	X
	1,5	20	20	10	X

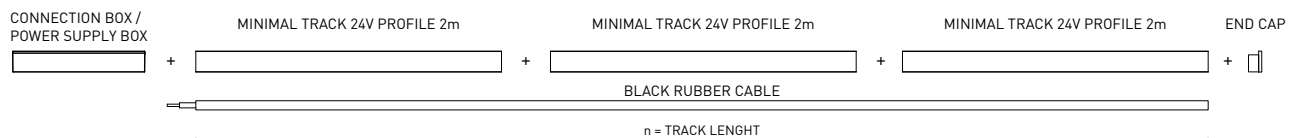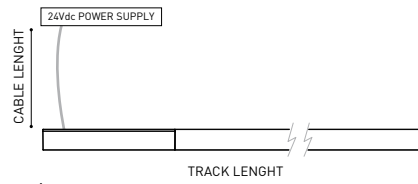

COLOUR | N ■ RAL 9005 | DIM OPTIONS PLEASE CONSULT



## MINIMAL TRACK 24V Suspension

Profile 2m	A384-02-00-	N
Profile 2m Initial feed kit	A400-02-10-	N
Profile 2m Middle feed kit*	A400-02-20-	N

\* Unidirectional Middle Feed.



## MINIMAL TRACK 24V Suspension


Rubber Cable n x 1m	A400-00-01-	N
---------------------	-------------	---

n = Total Length of System.

24V | Max. 4A


## MINIMAL TRACK 24V Suspension Straight Joiner

A400-00-02-	N
-------------	---



## MINIMAL TRACK 24V Suspension Kit


A400-02-04-	N
-------------	---



## MINIMAL TRACK 24V Suspension Corner 90°

A400-00-03-	N
-------------	---

Cable Length = 85mm.



## MINIMAL TRACK 24V Suspension End Caps

A400-00-05-	N
-------------	---

Two End Caps Included




## MINIMAL TRACK 24V Suspension Power Supply Box

	ON/OFF		P	V	D (A x B x C)
A400-00-06-	NT	40W	24V	280 x 30 x 36mm	
A400-00-07-	NT	100W	24V	280 x 30 x 36mm	

Included ON/OFF 24Vdc Power Supply



## MINIMAL TRACK 24V Remote Power Supply

	ON/OFF		P	V	D (A x B x C)
0434-01-37		60W	24V	180 x 52 x 30mm	
0433-10-22		100W	24V	295 x 43 x 30mm	



## DROP VOLTAGE TABLE

POWER (W)	CABLE SECTION (mm <sup>2</sup> )	CABLE LENGTH (m)			
		<5	<10	<20	<30
40	0,75	30	30	30	30
	1,5	30	30	30	30
60	0,75	30	30	20	10
	1,5	30	30	30	20
100	0,75	20	10	X	X
	1,5	20	20	10	X

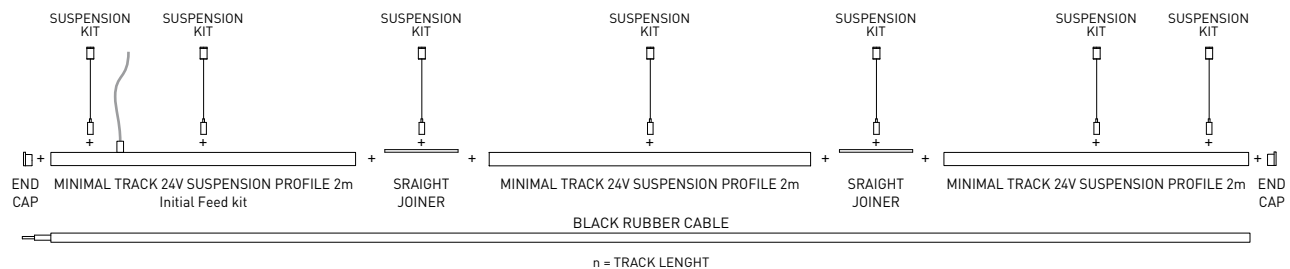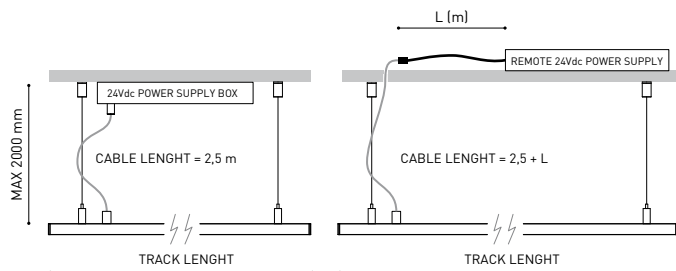

COLOUR | **N** ■ RAL 9005 | DIM OPTIONS PLEASE CONSULT



<b>Model</b>	Coaxial Timless
<b>Reference</b>	A023-00-03-   W   N
<b>Colour</b>	W <input type="checkbox"/> RAL 9016   N <input type="checkbox"/> RAL 9005
<b>Category</b>	Accessories

**PRODUCT**

Coaxial Timless

A023-00-03- | W | N |


W  RAL 9016 | N  RAL 9005

Accessories

Fasteners not available



**DIMENSIONAL DRAWING**




Wire Trimless Accessory is a collection of accessories for fitting tensioners and cables to Arkoslight luminaires suspended directly from the ceiling with any visible ceiling rose or fixings. This achieves a minimalist application with a visually tidy finish.

With Wire Trimless Accessory the items adjacent to the ceiling of the standard product (ceiling roses, fixings, driver boxes, etc.) are concealed by a simple recessed application.

Wire Trimless Accessory reduces the visual impact of the installation leading to extremely minimalist aesthetics. The wires come out of the ceiling material as a part of the structure. This detail creates a much purer, more essential layout, particular when several luminaires are fitted in an arrangement.



### DIMENSIONS



### ACCESSORIES



MINIMAL TRACK OPTIONS

### AWARDS



### PRODUCT

Name	FIT 27 24V 46° 2700K G
Reference	A3990030G
Color	Gold
RAL	Paint of metallic nanoparticles
Category	TRACKLIGHTS

### LIGHTING INFORMATION

Light source	LED
Gross luminous flux	440 Lm
Power	4,5 W
Power values of the system	5 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	46°
Lighting efficiency	81%
Efficacy	98 Lm/W
Current intensity	400 mA
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	III
Voltage	24 Vdc
Energy efficiency	A+
LED lifespan	L80B10 (Tj=85°C) >60.000h


### OTHER DATA

Ingress Protection	IP20
Swivel angle	90°
Rotation angle	355°
Track type	Minimal Track
Weight	75 g.
Packaged weight	115 g.
Packaging dimensions	113 × 111 × 32 mm
Units per package	1
Materials	Aluminium / Polycarbonate






Fit 27 24V is a projector for the Minimal Track system. Cylindrical geometry and essential forms, it stands out for its minimalistic looking and its functionality as it can be orientated in any direction. The black perimeter around its mouth highlights its anti-glare vocation.

POLAR DIAGRAM

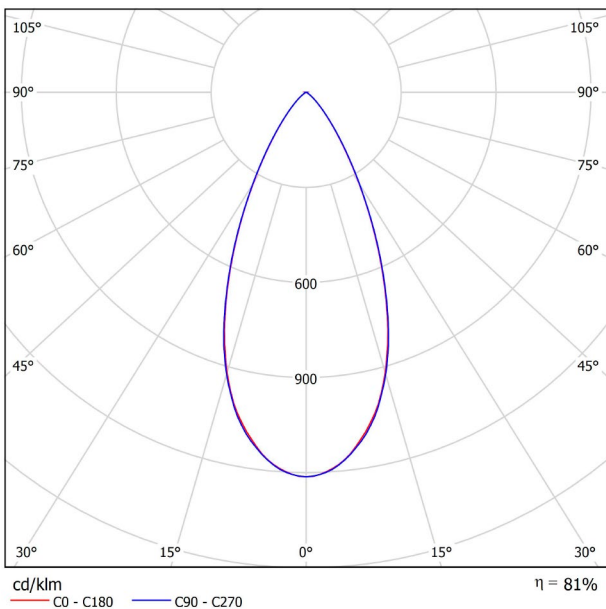

CONICAL DIAGRAM

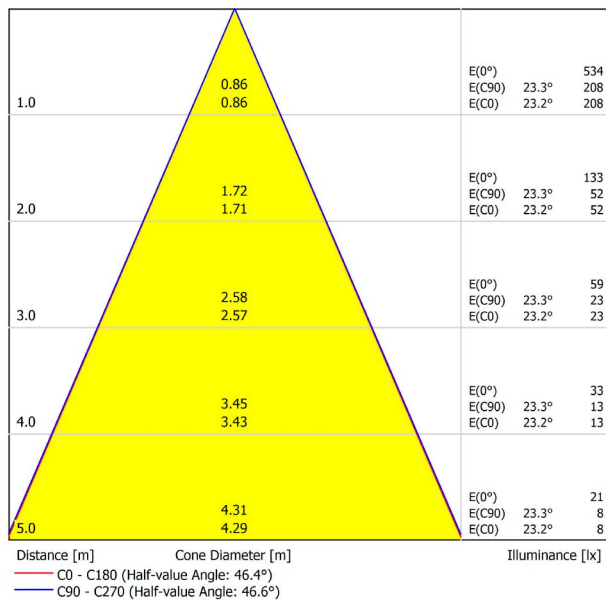



**MINIMAL TRACK 24V Profile 2m** A384-02-00- | N |



**MINIMAL TRACK 24V Rubber Cable n x 1m** A384-00-01- | N |


n = Total Length of System.

24V | Max. 4A

**MINIMAL TRACK 24V Corner 90° 1 Plane**

A384-00-02- | N |

Cable Length = 35mm.



**MINIMAL TRACK 24V End Cap**


A384-00-05- | N |



**MINIMAL TRACK 24V Corner 90° 1 Plane Rounded**


A384-00-03- | N |

Cable Length = 35mm.



**MINIMAL TRACK 24V Connection Box**


A384-00-06- | N |




**MINIMAL TRACK 24V Corner 90° 2 Planes**

A384-00-04- | N |

Cable Length = 100mm.





			P	V	D (A x B x C)
<b>MINIMAL TRACK 24V Power Supply Box</b>	ON/OFF	A384-00-07-   NT	40W	24V	280 x 30 x 24mm
		A384-00-08-   NT	100W	24V	280 x 30 x 24mm
Included ON/OFF 24Vdc Power Supply.					
<b>MINIMAL TRACK 24V Remote Power Supply</b>	ON/OFF	0434-01-37	60W	24V	180 x 52 x 30mm
		0433-10-22	100W	24V	295 x 43 x 30mm


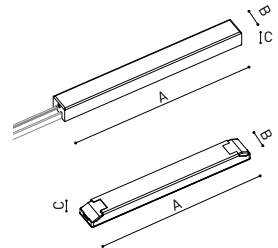


### DROP VOLTAGE TABLE

POWER (W)	CABLE SECTION (mm <sup>2</sup> )	CABLE LENGTH (m)			
		<5	<10	<20	<30
40	0,75	30	30	30	30
	1,5	30	30	30	30
60	0,75	30	30	20	10
	1,5	30	30	30	20
100	0,75	20	10	X	X
	1,5	20	20	10	X

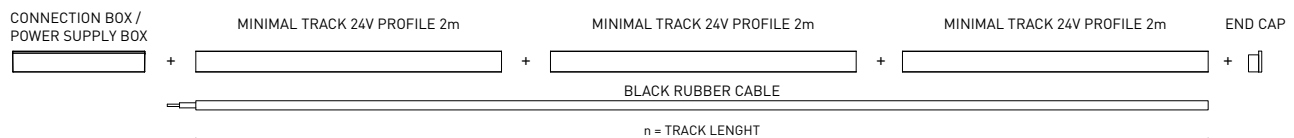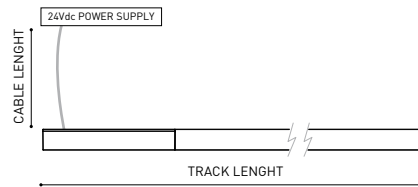

COLOUR | N ■ RAL 9005 | DIM OPTIONS PLEASE CONSULT



## MINIMAL TRACK 24V Suspension

Profile 2m	A384-02-00-	N
Profile 2m Initial feed kit	A400-02-10-	N
Profile 2m Middle feed kit*	A400-02-20-	N

\* Unidirectional Middle Feed.



## MINIMAL TRACK 24V Suspension


Rubber Cable n x 1m	A400-00-01-	N
---------------------	-------------	---

n = Total Length of System.

24V | Max. 4A


## MINIMAL TRACK 24V Suspension Straight Joiner

A400-00-02-	N
-------------	---



## MINIMAL TRACK 24V Suspension Kit


A400-02-04-	N
-------------	---



## MINIMAL TRACK 24V Suspension Corner 90°

A400-00-03-	N
-------------	---

Cable Length = 85mm.



## MINIMAL TRACK 24V Suspension End Caps

A400-00-05-	N
-------------	---

Two End Caps Included




## MINIMAL TRACK 24V Suspension Power Supply Box

	ON/OFF		P	V	D (A x B x C)
MINIMAL TRACK 24V Suspension	ON/OFF	A400-00-06-	40W	24V	280 x 30 x 36mm
Power Supply Box		A400-00-07-	100W	24V	280 x 30 x 36mm

Included ON/OFF 24Vdc Power Supply



## MINIMAL TRACK 24V Remote Power Supply

	ON/OFF		P	V	D (A x B x C)
MINIMAL TRACK 24V	ON/OFF	0434-01-37	60W	24V	180 x 52 x 30mm
Remote Power Supply		0433-10-22	100W	24V	295 x 43 x 30mm



## DROP VOLTAGE TABLE

POWER (W)	CABLE SECTION (mm <sup>2</sup> )	CABLE LENGTH (m)			
		<5	<10	<20	<30
40	0,75	30	30	30	30
	1,5	30	30	30	30
60	0,75	30	30	20	10
	1,5	30	30	30	20
100	0,75	20	10	X	X
	1,5	20	20	10	X

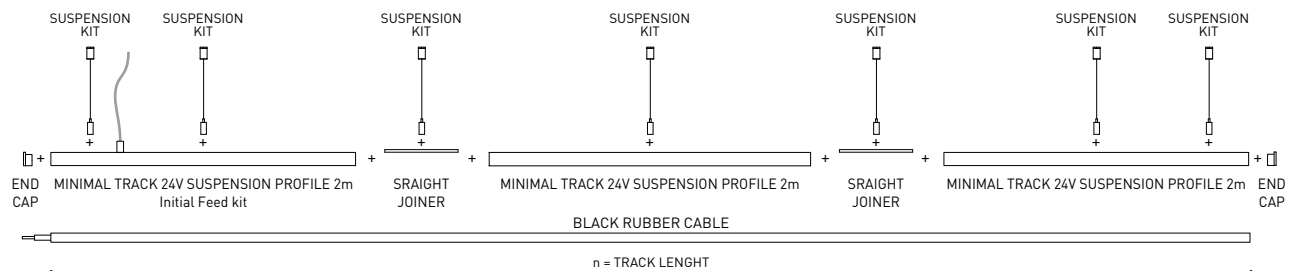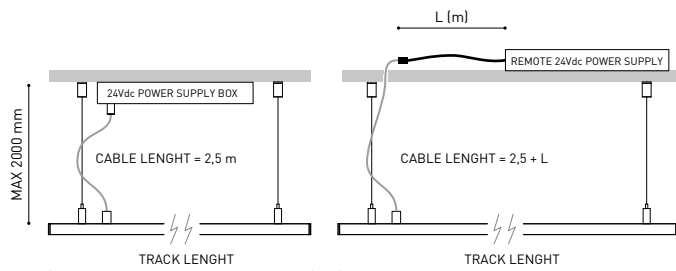

COLOUR | N ■ RAL 9005 | DIM OPTIONS PLEASE CONSULT



<b>Model</b>	Coaxial Timless
<b>Reference</b>	A023-00-03-   W   N
<b>Colour</b>	<b>W</b> <input type="checkbox"/> RAL 9016   <b>N</b> <input type="checkbox"/> RAL 9005
<b>Category</b>	Accessories

### PRODUCT

Coaxial Timless

A023-00-03- | W | N |


**W**  RAL 9016 | **N**  RAL 9005

Accessories

Fasteners not available



### DIMENSIONAL DRAWING




Wire Trimless Accessory is a collection of accessories for fitting tensioners and cables to Arkoslight luminaires suspended directly from the ceiling with any visible ceiling rose or fixings. This achieves a minimalist application with a visually tidy finish.

With Wire Trimless Accessory the items adjacent to the ceiling of the standard product (ceiling roses, fixings, driver boxes, etc.) are concealed by a simple recessed application.

Wire Trimless Accessory reduces the visual impact of the installation leading to extremely minimalist aesthetics. The wires come out of the ceiling material as a part of the structure. This detail creates a much purer, more essential layout, particular when several luminaires are fitted in an arrangement.



## DIMENSIONS



## ACCESSORIES



MINIMAL TRACK OPTIONS

## AWARDS



## PRODUCT

Name	FIT 27 24V 46° 2700K NT
Reference	A3990030NT
Color	Textured black
RAL	9005
Category	TRACKLIGHTS

## LIGHTING INFORMATION

Light source	LED
Gross luminous flux	440 Lm
Power	4,5 W
Power values of the system	5 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	46°
Lighting efficiency	81%
Efficacy	98 Lm/W
Current intensity	400 mA
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	III
Voltage	24 Vdc
Energy efficiency	A+
LED lifespan	L80B10 (Tj=85°C) >60.000h


## OTHER DATA

Ingress Protection	IP20
Swivel angle	90°
Rotation angle	355°
Track type	Minimal Track
Weight	75 g.
Packaged weight	115 g.
Packaging dimensions	113 × 111 × 32 mm
Units per package	1
Materials	Aluminium / Polycarbonate





Fit 27 24V is a projector for the Minimal Track system. Cylindrical geometry and essential forms, it stands out for its minimalistic looking and its functionality as it can be orientated in any direction. The black perimeter around its mouth highlights its anti-glare vocation.

POLAR DIAGRAM

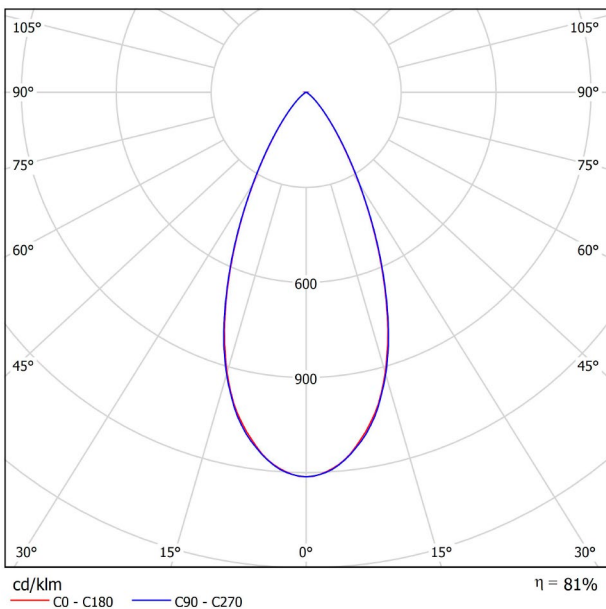


CONICAL DIAGRAM

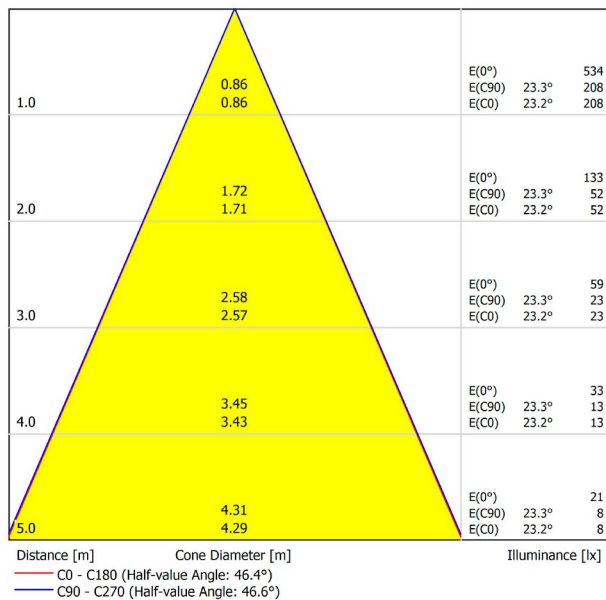



**MINIMAL TRACK 24V Profile 2m** A384-02-00- | N |




**MINIMAL TRACK 24V Rubber Cable n x 1m** A384-00-01- | N |

n = Total Length of System.

24V | Max. 4A

**MINIMAL TRACK 24V Corner 90° 1 Plane**  
A384-00-02- | N |

Cable Length = 35mm.




**MINIMAL TRACK 24V End Cap**  
A384-00-05- | N |




**MINIMAL TRACK 24V Corner 90° 1 Plane Rounded**  
A384-00-03- | N |

Cable Length = 35mm.




**MINIMAL TRACK 24V Connection Box**  
A384-00-06- | N |




**MINIMAL TRACK 24V Corner 90° 2 Planes**  
A384-00-04- | N |

Cable Length = 100mm.





			P	V	D (A x B x C)
<b>MINIMAL TRACK 24V Power Supply Box</b>	ON/OFF	A384-00-07-   NT	40W	24V	280 x 30 x 24mm
		A384-00-08-   NT	100W	24V	280 x 30 x 24mm
<b>MINIMAL TRACK 24V Remote Power Supply</b>	ON/OFF	0434-01-37	60W	24V	180 x 52 x 30mm
		0433-10-22	100W	24V	295 x 43 x 30mm

Included ON/OFF 24Vdc Power Supply.






### DROP VOLTAGE TABLE

POWER (W)	CABLE SECTION (mm <sup>2</sup> )	CABLE LENGTH (m)			
		<5	<10	<20	<30
40	0,75	30	30	30	30
	1,5	30	30	30	30
60	0,75	30	30	20	10
	1,5	30	30	30	20
100	0,75	20	10	X	X
	1,5	20	20	10	X

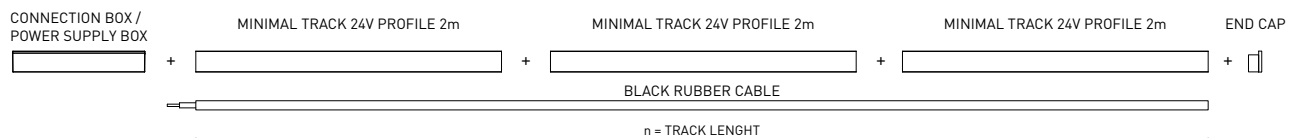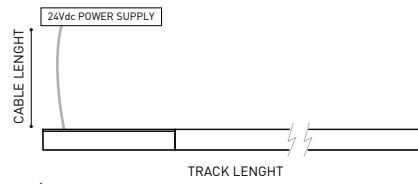

COLOUR | N ■ RAL 9005 | DIM OPTIONS PLEASE CONSULT



### MINIMAL TRACK 24V Suspension

Profile 2m	A384-02-00-	N
Profile 2m Initial feed kit	A400-02-10-	N
Profile 2m Middle feed kit*	A400-02-20-	N

\* Unidirectional Middle Feed.



### MINIMAL TRACK 24V Suspension


Rubber Cable n x 1m	A400-00-01-	N
---------------------	-------------	---

n = Total Length of System.

24V | Max. 4A


### MINIMAL TRACK 24V Suspension Straight Joiner

A400-00-02-	N
-------------	---



### MINIMAL TRACK 24V Suspension Kit


A400-02-04-	N
-------------	---



### MINIMAL TRACK 24V Suspension Corner 90°

A400-00-03-	N
-------------	---

Cable Length = 85mm.



### MINIMAL TRACK 24V Suspension End Caps

A400-00-05-	N
-------------	---

Two End Caps Included




### MINIMAL TRACK 24V Suspension Power Supply Box

	ON/OFF		P	V	D (A x B x C)
MINIMAL TRACK 24V Suspension	ON/OFF	A400-00-06-	40W	24V	280 x 30 x 36mm
Power Supply Box		A400-00-07-	100W	24V	280 x 30 x 36mm

Included ON/OFF 24Vdc Power Supply



### MINIMAL TRACK 24V Remote Power Supply

	ON/OFF		P	V	D (A x B x C)
MINIMAL TRACK 24V	ON/OFF	0434-01-37	60W	24V	180 x 52 x 30mm
Remote Power Supply		0433-10-22	100W	24V	295 x 43 x 30mm



### DROP VOLTAGE TABLE

POWER (W)	CABLE SECTION (mm <sup>2</sup> )	CABLE LENGTH (m)			
		<5	<10	<20	<30
40	0,75	30	30	30	30
	1,5	30	30	30	30
60	0,75	30	30	20	10
	1,5	30	30	30	20
100	0,75	20	10	X	X
	1,5	20	20	10	X

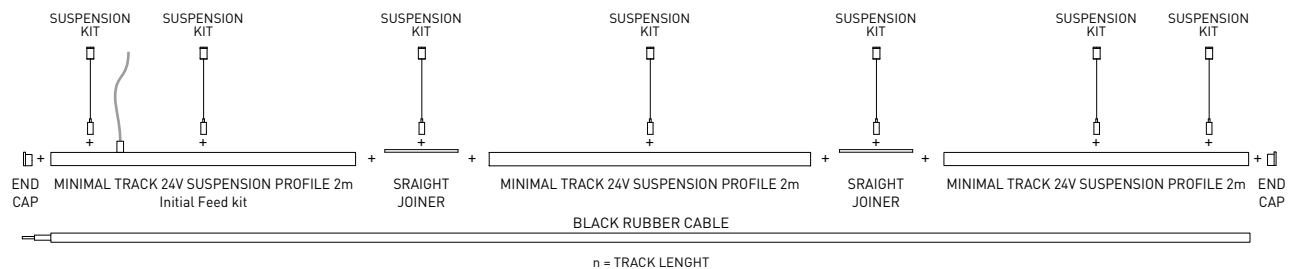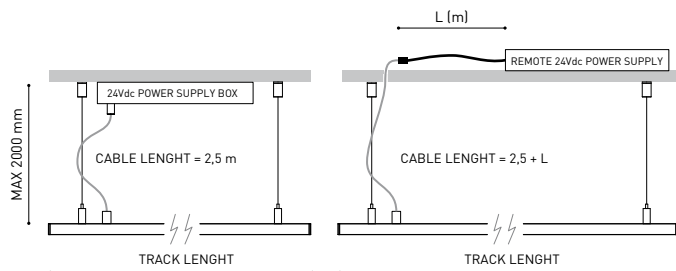

COLOUR | N ■ RAL 9005 | DIM OPTIONS PLEASE CONSULT



<b>Model</b>	Coaxial Timless
<b>Reference</b>	A023-00-03-   W   N
<b>Colour</b>	W <input type="checkbox"/> RAL 9016   N <input type="checkbox"/> RAL 9005
<b>Category</b>	Accessories

### PRODUCT

Coaxial Timless

A023-00-03- | W | N |


W  RAL 9016 | N  RAL 9005

Accessories

Fasteners not available



### DIMENSIONAL DRAWING




Wire Trimless Accessory is a collection of accessories for fitting tensioners and cables to Arkoslight luminaires suspended directly from the ceiling with any visible ceiling rose or fixings. This achieves a minimalist application with a visually tidy finish.

With Wire Trimless Accessory the items adjacent to the ceiling of the standard product (ceiling roses, fixings, driver boxes, etc.) are concealed by a simple recessed application.

Wire Trimless Accessory reduces the visual impact of the installation leading to extremely minimalist aesthetics. The wires come out of the ceiling material as a part of the structure. This detail creates a much purer, more essential layout, particular when several luminaires are fitted in an arrangement.



### DIMENSIONS



### ACCESSORIES



MINIMAL TRACK OPTIONS

### AWARDS



### PRODUCT

Name	FIT 27 24V 46° 2700K WT
Reference	A3990030WT
Color	Textured white
RAL	9016
Category	TRACKLIGHTS

### LIGHTING INFORMATION

Light source	LED
Gross luminous flux	440 Lm
Power	4,5 W
Power values of the system	5 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	46°
Lighting efficiency	81%
Efficacy	98 Lm/W
Current intensity	400 mA
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	III
Voltage	24 Vdc
Energy efficiency	A+
LED lifespan	L80B10 (Tj=85°C) >60.000h


### OTHER DATA

Ingress Protection	IP20
Swivel angle	90°
Rotation angle	355°
Track type	Minimal Track
Weight	75 g.
Packaged weight	115 g.
Packaging dimensions	113 × 111 × 32 mm
Units per package	1
Materials	Aluminium / Polycarbonate






Fit 27 24V is a projector for the Minimal Track system. Cylindrical geometry and essential forms, it stands out for its minimalistic looking and its functionality as it can be orientated in any direction. The black perimeter around its mouth highlights its anti-glare vocation.

POLAR DIAGRAM

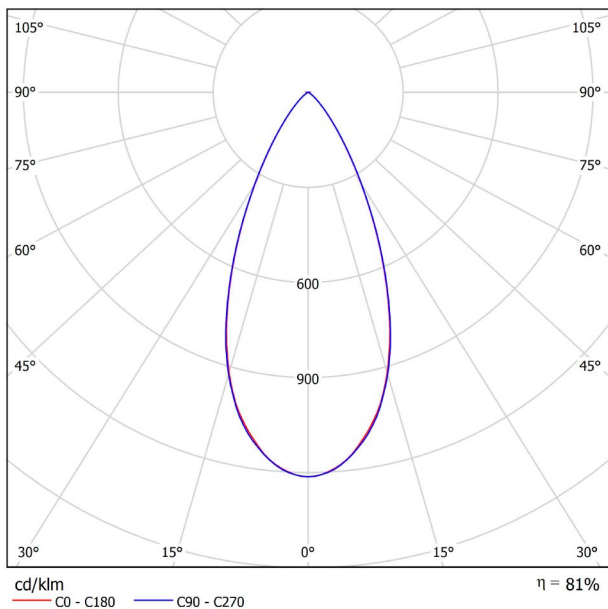

CONICAL DIAGRAM

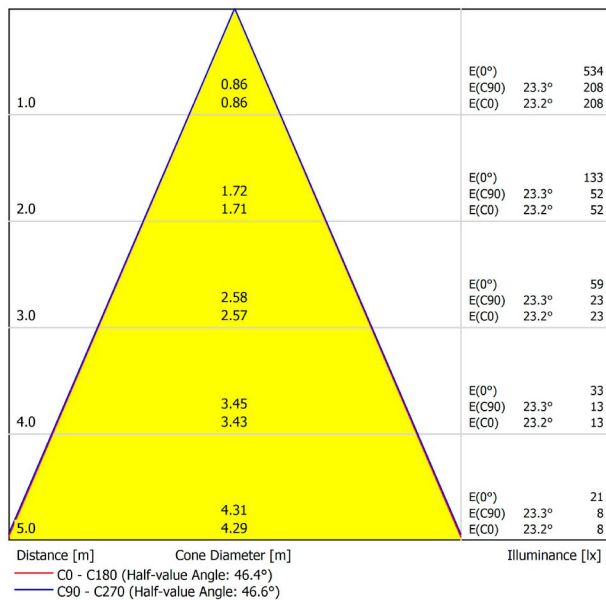



**MINIMAL TRACK 24V Profile 2m** A384-02-00- | N |



**MINIMAL TRACK 24V Rubber Cable n x 1m** A384-00-01- | N |


n = Total Length of System.

24V | Max. 4A

**MINIMAL TRACK 24V Corner 90° 1 Plane**

A384-00-02- | N |

Cable Length = 35mm.



**MINIMAL TRACK 24V End Cap**


A384-00-05- | N |



**MINIMAL TRACK 24V Corner 90° 1 Plane Rounded**


A384-00-03- | N |

Cable Length = 35mm.



**MINIMAL TRACK 24V Connection Box**


A384-00-06- | N |




**MINIMAL TRACK 24V Corner 90° 2 Planes**

A384-00-04- | N |

Cable Length = 100mm.





			P	V	D (A x B x C)
<b>MINIMAL TRACK 24V Power Supply Box</b>	ON/OFF	A384-00-07-   NT	40W	24V	280 x 30 x 24mm
		A384-00-08-   NT	100W	24V	280 x 30 x 24mm
Included ON/OFF 24Vdc Power Supply.					
<b>MINIMAL TRACK 24V Remote Power Supply</b>	ON/OFF	0434-01-37	60W	24V	180 x 52 x 30mm
		0433-10-22	100W	24V	295 x 43 x 30mm






### DROP VOLTAGE TABLE

POWER (W)	CABLE SECTION (mm <sup>2</sup> )	CABLE LENGTH (m)			
		<5	<10	<20	<30
40	0,75	30	30	30	30
	1,5	30	30	30	30
60	0,75	30	30	20	10
	1,5	30	30	30	20
100	0,75	20	10	X	X
	1,5	20	20	10	X

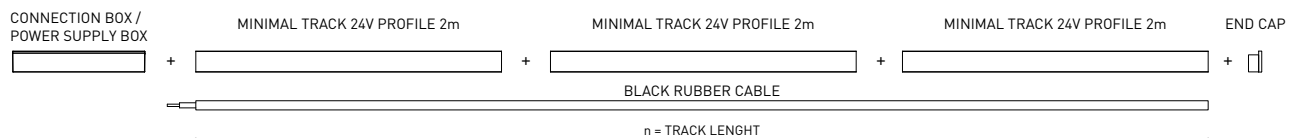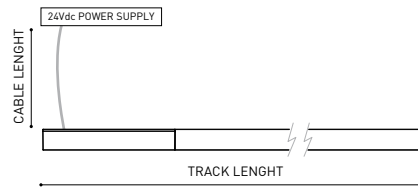

COLOUR | N ■ RAL 9005 | DIM OPTIONS PLEASE CONSULT



### MINIMAL TRACK 24V Suspension

Profile 2m	A384-02-00-	N
Profile 2m Initial feed kit	A400-02-10-	N
Profile 2m Middle feed kit*	A400-02-20-	N

\* Unidirectional Middle Feed.



### MINIMAL TRACK 24V Suspension


Rubber Cable n x 1m	A400-00-01-	N
---------------------	-------------	---

n = Total Length of System.

24V | Max. 4A |


### MINIMAL TRACK 24V Suspension Straight Joiner

A400-00-02-	N
-------------	---



### MINIMAL TRACK 24V Suspension Kit


A400-02-04-	N
-------------	---



### MINIMAL TRACK 24V Suspension Corner 90°

A400-00-03-	N
-------------	---

Cable Length = 85mm.



### MINIMAL TRACK 24V Suspension End Caps

A400-00-05-	N
-------------	---

Two End Caps Included




### MINIMAL TRACK 24V Suspension Power Supply Box

	ON/OFF		P	V	D (A x B x C)
MINIMAL TRACK 24V Suspension	ON/OFF	A400-00-06-	40W	24V	280 x 30 x 36mm
Power Supply Box		A400-00-07-	100W	24V	280 x 30 x 36mm

Included ON/OFF 24Vdc Power Supply



### MINIMAL TRACK 24V Remote Power Supply

	ON/OFF		P	V	D (A x B x C)
MINIMAL TRACK 24V	ON/OFF	0434-01-37	60W	24V	180 x 52 x 30mm
Remote Power Supply		0433-10-22	100W	24V	295 x 43 x 30mm



### DROP VOLTAGE TABLE

POWER (W)	CABLE SECTION (mm <sup>2</sup> )	CABLE LENGTH (m)			
		<5	<10	<20	<30
40	0,75	30	30	30	30
	1,5	30	30	30	30
60	0,75	30	30	20	10
	1,5	30	30	30	20
100	0,75	20	10	X	X
	1,5	20	20	10	X

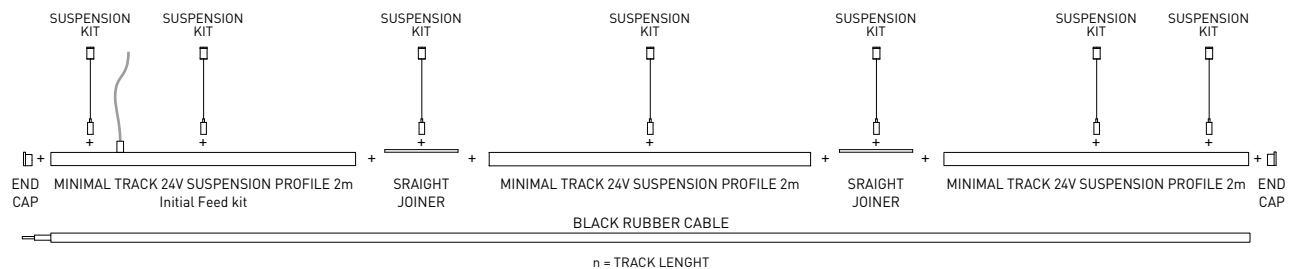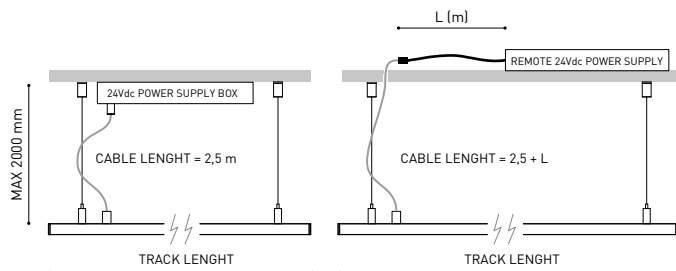

COLOUR | N ■ RAL 9005 | DIM OPTIONS PLEASE CONSULT



<b>Model</b>	Coaxial Timless
<b>Reference</b>	A023-00-03-   W   N
<b>Colour</b>	W <input type="checkbox"/> RAL 9016   N <input checked="" type="checkbox"/> RAL 9005
<b>Category</b>	Accessories

**PRODUCT**

Coaxial Timless

A023-00-03- | W | N |


W  RAL 9016 | N  RAL 9005

Accessories

Fasteners not available



**DIMENSIONAL DRAWING**




Wire Trimless Accessory is a collection of accessories for fitting tensioners and cables to Arkoslight luminaires suspended directly from the ceiling with any visible ceiling rose or fixings. This achieves a minimalist application with a visually tidy finish.

With Wire Trimless Accessory the items adjacent to the ceiling of the standard product (ceiling roses, fixings, driver boxes, etc.) are concealed by a simple recessed application.

Wire Trimless Accessory reduces the visual impact of the installation leading to extremely minimalist aesthetics. The wires come out of the ceiling material as a part of the structure. This detail creates a much purer, more essential layout, particular when several luminaires are fitted in an arrangement.



### DIMENSIONS



### ACCESSORIES



### MINIMAL TRACK OPTIONS

### AWARDS



### PRODUCT

Name	FIT 27 24V 46° 3000K G
Reference	A3990031G
Color	Gold
RAL	Paint of metallic nanoparticles
Category	TRACKLIGHTS

### LIGHTING INFORMATION

Light source	LED
Gross luminous flux	475 Lm
Power	4,5 W
Power values of the system	5 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	46°
Lighting efficiency	81%
Efficacy	106 Lm/W
Current intensity	400 mA
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	III
Voltage	24 Vdc
Energy efficiency	A+
LED lifespan	L80B10 (Tj=85°C) >60.000h


### OTHER DATA

Ingress Protection	IP20
Swivel angle	90°
Rotation angle	355°
Track type	Minimal Track
Weight	75 g.
Packaged weight	115 g.
Packaging dimensions	113 × 111 × 32 mm
Units per package	1
Materials	Aluminium / Polycarbonate





Fit 27 24V is a projector for the Minimal Track system. Cylindrical geometry and essential forms, it stands out for its minimalistic looking and its functionality as it can be orientated in any direction. The black perimeter around its mouth highlights its anti-glare vocation.

POLAR DIAGRAM

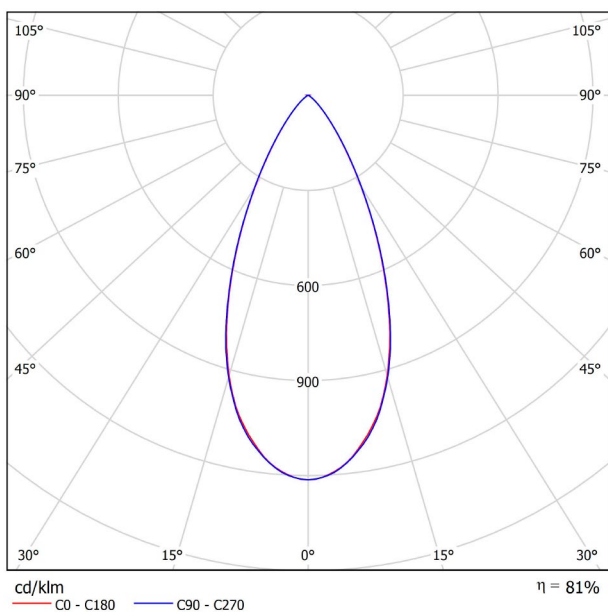


CONICAL DIAGRAM

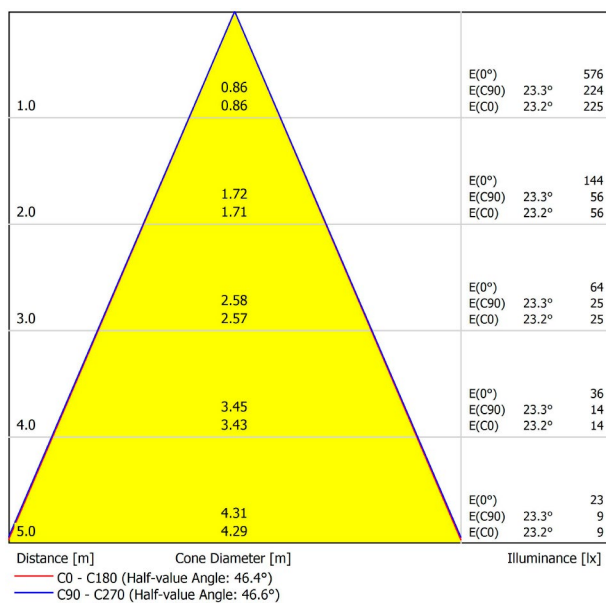



**MINIMAL TRACK 24V Profile 2m** A384-02-00- | N |




**MINIMAL TRACK 24V Rubber Cable n x 1m** A384-00-01- | N |

n = Total Length of System.

24V | Max. 4A

**MINIMAL TRACK 24V Corner 90° 1 Plane**  
A384-00-02- | N |

Cable Length = 35mm.




**MINIMAL TRACK 24V End Cap**  
A384-00-05- | N |




**MINIMAL TRACK 24V Corner 90° 1 Plane Rounded**  
A384-00-03- | N |

Cable Length = 35mm.




**MINIMAL TRACK 24V Connection Box**  
A384-00-06- | N |




**MINIMAL TRACK 24V Corner 90° 2 Planes**  
A384-00-04- | N |

Cable Length = 100mm.





			P	V	D (A x B x C)
<b>MINIMAL TRACK 24V Power Supply Box</b>	ON/OFF	A384-00-07-   NT	40W	24V	280 x 30 x 24mm
		A384-00-08-   NT	100W	24V	280 x 30 x 24mm
Included ON/OFF 24Vdc Power Supply.					
<b>MINIMAL TRACK 24V Remote Power Supply</b>	ON/OFF	0434-01-37	60W	24V	180 x 52 x 30mm
		0433-10-22	100W	24V	295 x 43 x 30mm





### DROP VOLTAGE TABLE

POWER (W)	CABLE SECTION (mm <sup>2</sup> )	CABLE LENGTH (m)			
		<5	<10	<20	<30
40	0,75	30	30	30	30
	1,5	30	30	30	30
60	0,75	30	30	20	10
	1,5	30	30	30	20
100	0,75	20	10	X	X
	1,5	20	20	10	X

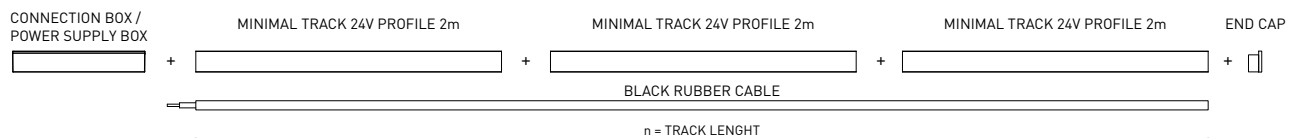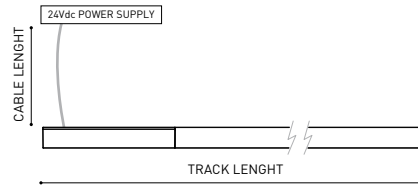

COLOUR | N ■ RAL 9005 | DIM OPTIONS PLEASE CONSULT



### MINIMAL TRACK 24V Suspension

Profile 2m	A384-02-00-	N
Profile 2m Initial feed kit	A400-02-10-	N
Profile 2m Middle feed kit*	A400-02-20-	N

\* Unidirectional Middle Feed.



### MINIMAL TRACK 24V Suspension


Rubber Cable n x 1m	A400-00-01-	N
---------------------	-------------	---

n = Total Length of System.

24V | Max. 4A


### MINIMAL TRACK 24V Suspension Straight Joiner

A400-00-02-	N
-------------	---



### MINIMAL TRACK 24V Suspension Kit


A400-02-04-	N
-------------	---



### MINIMAL TRACK 24V Suspension Corner 90°

A400-00-03-	N
-------------	---

Cable Length = 85mm.



### MINIMAL TRACK 24V Suspension End Caps

A400-00-05-	N
-------------	---

Two End Caps Included




### MINIMAL TRACK 24V Suspension Power Supply Box

	ON/OFF		P	V	D (A x B x C)
MINIMAL TRACK 24V Suspension	ON/OFF	A400-00-06-	40W	24V	280 x 30 x 36mm
Power Supply Box		A400-00-07-	100W	24V	280 x 30 x 36mm

Included ON/OFF 24Vdc Power Supply



### MINIMAL TRACK 24V Remote Power Supply

	ON/OFF		P	V	D (A x B x C)
MINIMAL TRACK 24V	ON/OFF	0434-01-37	60W	24V	180 x 52 x 30mm
Remote Power Supply		0433-10-22	100W	24V	295 x 43 x 30mm



### DROP VOLTAGE TABLE

POWER (W)	CABLE SECTION (mm <sup>2</sup> )	CABLE LENGTH (m)			
		<5	<10	<20	<30
40	0,75	30	30	30	30
	1,5	30	30	30	30
60	0,75	30	30	20	10
	1,5	30	30	30	20
100	0,75	20	10	X	X
	1,5	20	20	10	X

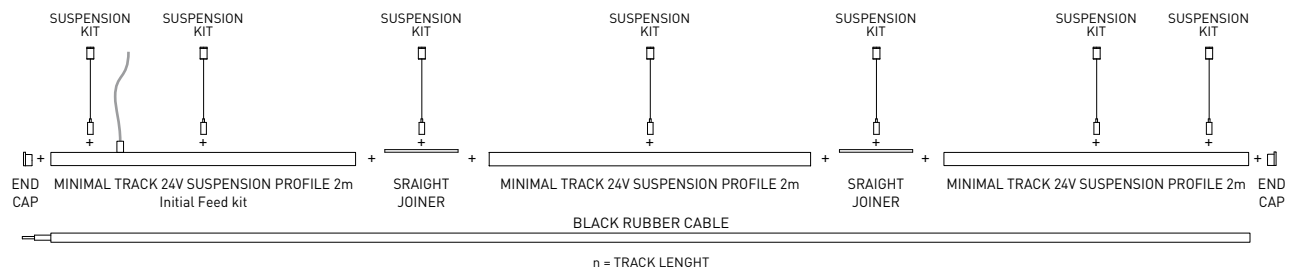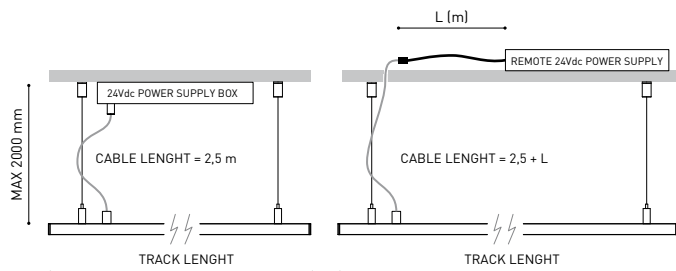

COLOUR | N ■ RAL 9005 | DIM OPTIONS PLEASE CONSULT



<b>Model</b>	Coaxial Timless
<b>Reference</b>	A023-00-03-   W   N
<b>Colour</b>	W <input type="checkbox"/> RAL 9016   N <input checked="" type="checkbox"/> RAL 9005
<b>Category</b>	Accessories

**PRODUCT**

Coaxial Timless

A023-00-03- | W | N |


W  RAL 9016 | N  RAL 9005

Accessories

Fasteners not available



**DIMENSIONAL DRAWING**




Wire Trimless Accessory is a collection of accessories for fitting tensioners and cables to Arkoslight luminaires suspended directly from the ceiling with any visible ceiling rose or fixings. This achieves a minimalist application with a visually tidy finish.

With Wire Trimless Accessory the items adjacent to the ceiling of the standard product (ceiling roses, fixings, driver boxes, etc.) are concealed by a simple recessed application.

Wire Trimless Accessory reduces the visual impact of the installation leading to extremely minimalist aesthetics. The wires come out of the ceiling material as a part of the structure. This detail creates a much purer, more essential layout, particular when several luminaires are fitted in an arrangement.



## DIMENSIONS



## ACCESSORIES



MINIMAL TRACK OPTIONS

## AWARDS



## PRODUCT

Name	FIT 27 24V 46° 3000K NT
Reference	A3990031NT
Color	Textured black
RAL	9005
Category	TRACKLIGHTS

## LIGHTING INFORMATION

Light source	LED
Gross luminous flux	475 Lm
Power	4,5 W
Power values of the system	5 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	46°
Lighting efficiency	81%
Efficacy	106 Lm/W
Current intensity	400 mA
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	III
Voltage	24 Vdc
Energy efficiency	A+
LED lifespan	L80B10 (Tj=85°C) >60.000h


## OTHER DATA

Ingress Protection	IP20
Swivel angle	90°
Rotation angle	355°
Track type	Minimal Track
Weight	75 g.
Packaged weight	115 g.
Packaging dimensions	113 × 111 × 32 mm
Units per package	1
Materials	Aluminium / Polycarbonate





Fit 27 24V is a projector for the Minimal Track system. Cylindrical geometry and essential forms, it stands out for its minimalistic looking and its functionality as it can be orientated in any direction. The black perimeter around its mouth highlights its anti-glare vocation.

POLAR DIAGRAM

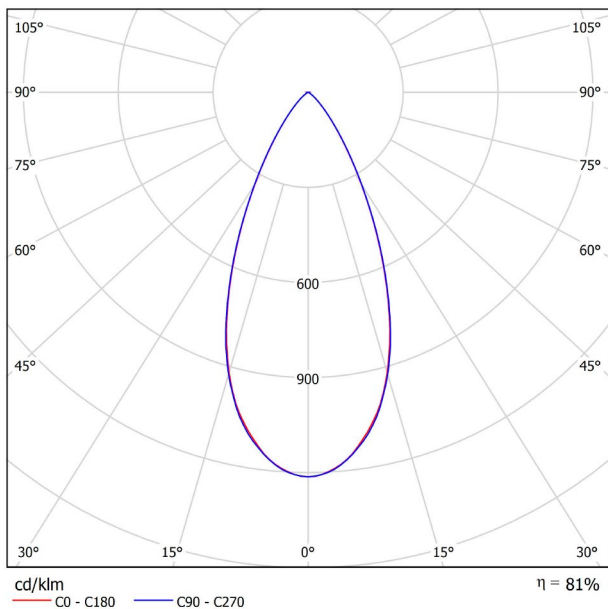


CONICAL DIAGRAM

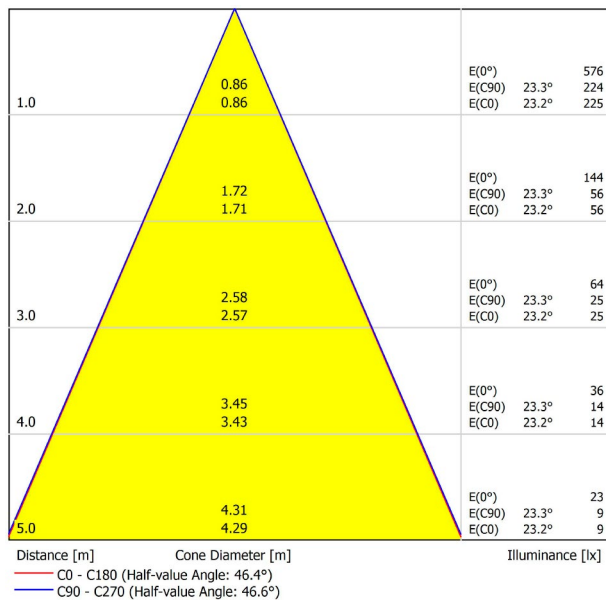



**MINIMAL TRACK 24V Profile 2m** A384-02-00- | N |




**MINIMAL TRACK 24V Rubber Cable n x 1m** A384-00-01- | N |

n = Total Length of System.

24V | Max. 4A

**MINIMAL TRACK 24V Corner 90° 1 Plane**  
A384-00-02- | N |

Cable Length = 35mm.




**MINIMAL TRACK 24V End Cap**  
A384-00-05- | N |




**MINIMAL TRACK 24V Corner 90° 1 Plane Rounded**  
A384-00-03- | N |

Cable Length = 35mm.




**MINIMAL TRACK 24V Connection Box**  
A384-00-06- | N |




**MINIMAL TRACK 24V Corner 90° 2 Planes**  
A384-00-04- | N |

Cable Length = 100mm.





			P	V	D (A x B x C)
<b>MINIMAL TRACK 24V Power Supply Box</b>	ON/OFF	A384-00-07-   NT	40W	24V	280 x 30 x 24mm
		A384-00-08-   NT	100W	24V	280 x 30 x 24mm
Included ON/OFF 24Vdc Power Supply.					
<b>MINIMAL TRACK 24V Remote Power Supply</b>	ON/OFF	0434-01-37	60W	24V	180 x 52 x 30mm
		0433-10-22	100W	24V	295 x 43 x 30mm





### DROP VOLTAGE TABLE

POWER (W)	CABLE SECTION (mm <sup>2</sup> )	CABLE LENGTH (m)			
		<5	<10	<20	<30
40	0,75	30	30	30	30
	1,5	30	30	30	30
60	0,75	30	30	20	10
	1,5	30	30	30	20
100	0,75	20	10	X	X
	1,5	20	20	10	X

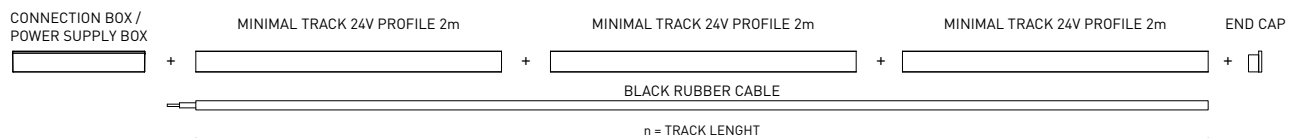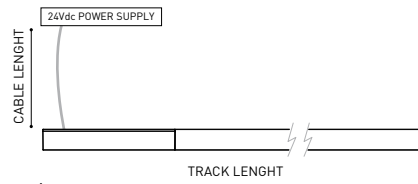

COLOUR | N ■ RAL 9005 | DIM OPTIONS PLEASE CONSULT



## MINIMAL TRACK 24V Suspension

Profile 2m	A384-02-00-	N
Profile 2m Initial feed kit	A400-02-10-	N
Profile 2m Middle feed kit*	A400-02-20-	N

\* Unidirectional Middle Feed.



## MINIMAL TRACK 24V Suspension


Rubber Cable n x 1m	A400-00-01-	N
---------------------	-------------	---

n = Total Length of System.

24V | Max. 4A


## MINIMAL TRACK 24V Suspension Straight Joiner

A400-00-02-	N
-------------	---



## MINIMAL TRACK 24V Suspension Kit


A400-02-04-	N
-------------	---



## MINIMAL TRACK 24V Suspension Corner 90°

A400-00-03-	N
-------------	---

Cable Length = 85mm.



## MINIMAL TRACK 24V Suspension End Caps

A400-00-05-	N
-------------	---

Two End Caps Included




## MINIMAL TRACK 24V Suspension Power Supply Box

	ON/OFF		P	V	D (A x B x C)
A400-00-06-	NT	40W	24V	280 x 30 x 36mm	
A400-00-07-	NT	100W	24V	280 x 30 x 36mm	

Included ON/OFF 24Vdc Power Supply



## MINIMAL TRACK 24V Remote Power Supply

	ON/OFF		P	V	D (A x B x C)
0434-01-37		60W	24V	180 x 52 x 30mm	
0433-10-22		100W	24V	295 x 43 x 30mm	



## DROP VOLTAGE TABLE

POWER (W)	CABLE SECTION (mm <sup>2</sup> )	CABLE LENGTH (m)			
		<5	<10	<20	<30
40	0,75	30	30	30	30
	1,5	30	30	30	30
60	0,75	30	30	20	10
	1,5	30	30	30	20
100	0,75	20	10	X	X
	1,5	20	20	10	X

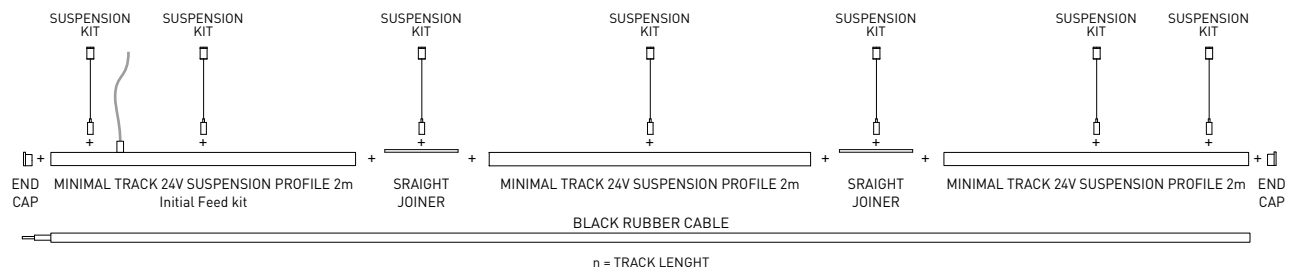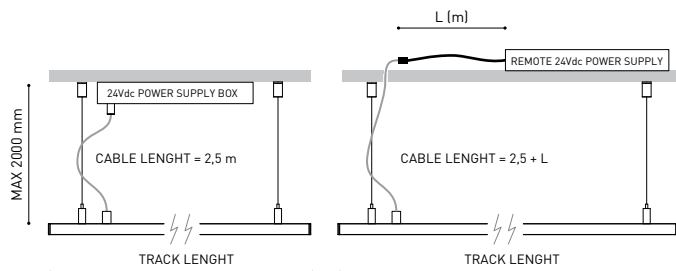

COLOUR | **N** ■ RAL 9005 | DIM OPTIONS PLEASE CONSULT



<b>Model</b>	Coaxial Timless
<b>Reference</b>	A023-00-03-   W   N
<b>Colour</b>	W <input type="checkbox"/> RAL 9016   N <input checked="" type="checkbox"/> RAL 9005
<b>Category</b>	Accessories

**PRODUCT**

Coaxial Timless

A023-00-03- | W | N |


W  RAL 9016 | N  RAL 9005

Accessories

Fasteners not available



**DIMENSIONAL DRAWING**




Wire Trimless Accessory is a collection of accessories for fitting tensioners and cables to Arkoslight luminaires suspended directly from the ceiling with any visible ceiling rose or fixings. This achieves a minimalist application with a visually tidy finish.

With Wire Trimless Accessory the items adjacent to the ceiling of the standard product (ceiling roses, fixings, driver boxes, etc.) are concealed by a simple recessed application.

Wire Trimless Accessory reduces the visual impact of the installation leading to extremely minimalist aesthetics. The wires come out of the ceiling material as a part of the structure. This detail creates a much purer, more essential layout, particular when several luminaires are fitted in an arrangement.



DIMENSIONS



ACCESSORIES



MINIMAL TRACK OPTIONS

AWARDS



PRODUCT

Name	FIT 27 24V 46° 3000K WT
Reference	A3990031WT
Color	Textured white
RAL	9016
Category	TRACKLIGHTS

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	475 Lm
Power	4,5 W
Power values of the system	5 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	46°
Lighting efficiency	81%
Efficacy	106 Lm/W
Current intensity	400 mA
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	III
Voltage	24 Vdc
Energy efficiency	A+
LED lifespan	L80B10 (Tj=85°C) >60.000h

OTHER DATA


Ingress Protection	IP20
Swivel angle	90°
Rotation angle	355°
Track type	Minimal Track
Weight	75 g.
Packaged weight	115 g.
Packaging dimensions	113 × 111 × 32 mm
Units per package	1
Materials	Aluminium / Polycarbonate




Fit 27 24V is a projector for the Minimal Track system. Cylindrical geometry and essential forms, it stands out for its minimalistic looking and its functionality as it can be orientated in any direction. The black perimeter around its mouth highlights its anti-glare vocation.





POLAR DIAGRAM

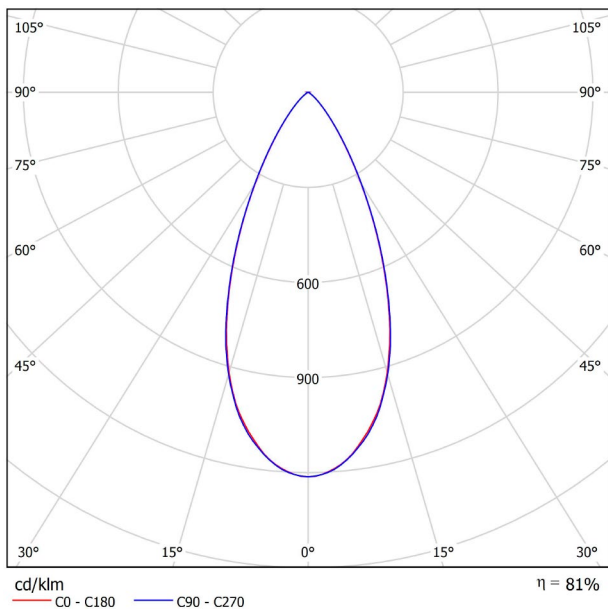

CONICAL DIAGRAM

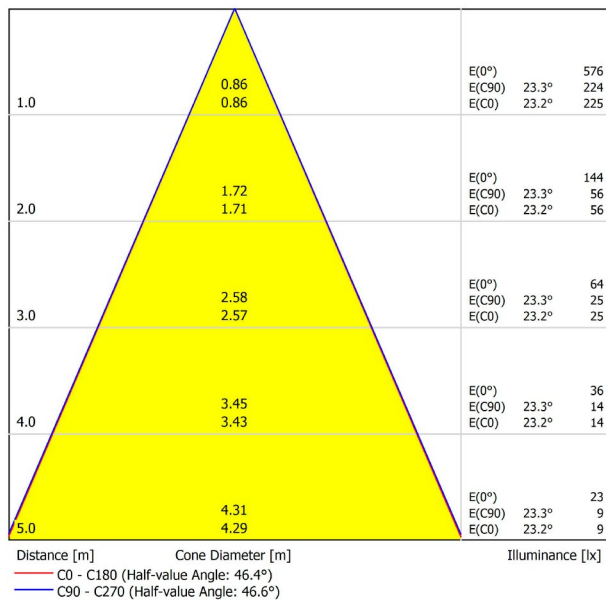



**MINIMAL TRACK 24V Profile 2m** A384-02-00- | N |



**MINIMAL TRACK 24V Rubber Cable n x 1m** A384-00-01- | N |


n = Total Length of System.

24V | Max. 4A

**MINIMAL TRACK 24V Corner 90° 1 Plane**

A384-00-02- | N |

Cable Length = 35mm.



**MINIMAL TRACK 24V End Cap**


A384-00-05- | N |



**MINIMAL TRACK 24V Corner 90° 1 Plane Rounded**


A384-00-03- | N |

Cable Length = 35mm.



**MINIMAL TRACK 24V Connection Box**


A384-00-06- | N |




**MINIMAL TRACK 24V Corner 90° 2 Planes**

A384-00-04- | N |

Cable Length = 100mm.





			P	V	D (A x B x C)
<b>MINIMAL TRACK 24V Power Supply Box</b>	ON/OFF	A384-00-07-   NT	40W	24V	280 x 30 x 24mm
		A384-00-08-   NT	100W	24V	280 x 30 x 24mm
Included ON/OFF 24Vdc Power Supply.					
<b>MINIMAL TRACK 24V Remote Power Supply</b>	ON/OFF	0434-01-37	60W	24V	180 x 52 x 30mm
		0433-10-22	100W	24V	295 x 43 x 30mm





### DROP VOLTAGE TABLE

POWER (W)	CABLE SECTION (mm <sup>2</sup> )	CABLE LENGTH (m)			
		<5	<10	<20	<30
40	0,75	30	30	30	30
	1,5	30	30	30	30
60	0,75	30	30	20	10
	1,5	30	30	30	20
100	0,75	20	10	X	X
	1,5	20	20	10	X

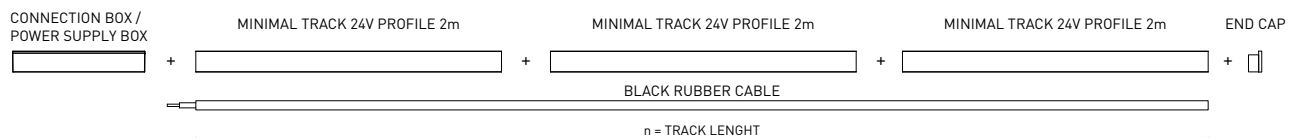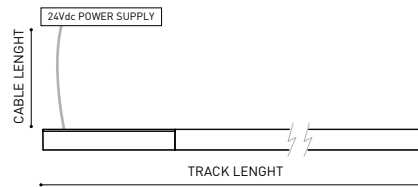

COLOUR | N ■ RAL 9005 | DIM OPTIONS PLEASE CONSULT



### MINIMAL TRACK 24V Suspension

Profile 2m	A384-02-00-	N
Profile 2m Initial feed kit	A400-02-10-	N
Profile 2m Middle feed kit*	A400-02-20-	N

\* Unidirectional Middle Feed.



### MINIMAL TRACK 24V Suspension


Rubber Cable n x 1m	A400-00-01-	N
---------------------	-------------	---

n = Total Length of System.

24V | Max. 4A


### MINIMAL TRACK 24V Suspension Straight Joiner

A400-00-02-	N
-------------	---



### MINIMAL TRACK 24V Suspension Kit


A400-02-04-	N
-------------	---



### MINIMAL TRACK 24V Suspension Corner 90°

A400-00-03-	N
-------------	---

Cable Length = 85mm.



### MINIMAL TRACK 24V Suspension End Caps

A400-00-05-	N
-------------	---

Two End Caps Included




### MINIMAL TRACK 24V Suspension Power Supply Box

	ON/OFF		P	V	D (A x B x C)
MINIMAL TRACK 24V Suspension	ON/OFF	A400-00-06-	40W	24V	280 x 30 x 36mm
Power Supply Box		A400-00-07-	100W	24V	280 x 30 x 36mm

Included ON/OFF 24Vdc Power Supply



### MINIMAL TRACK 24V Remote Power Supply

	ON/OFF		P	V	D (A x B x C)
MINIMAL TRACK 24V	ON/OFF	0434-01-37	60W	24V	180 x 52 x 30mm
Remote Power Supply		0433-10-22	100W	24V	295 x 43 x 30mm



### DROP VOLTAGE TABLE

POWER (W)	CABLE SECTION (mm <sup>2</sup> )	CABLE LENGTH (m)			
		<5	<10	<20	<30
40	0,75	30	30	30	30
	1,5	30	30	30	30
60	0,75	30	30	20	10
	1,5	30	30	30	20
100	0,75	20	10	X	X
	1,5	20	20	10	X

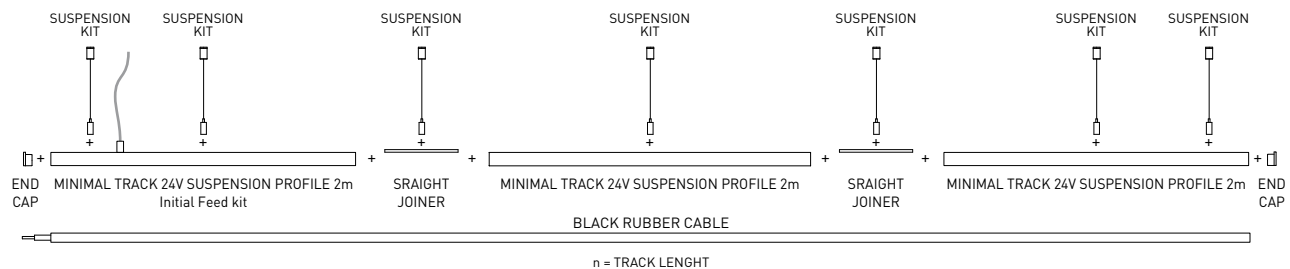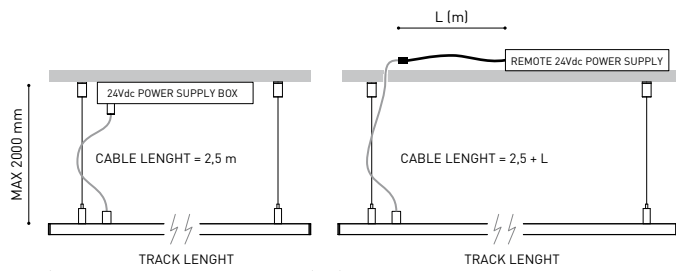

COLOUR | N ■ RAL 9005 | DIM OPTIONS PLEASE CONSULT



<b>Model</b>	Coaxial Timless
<b>Reference</b>	A023-00-03-   W   N
<b>Colour</b>	W <input type="checkbox"/> RAL 9016   N <input checked="" type="checkbox"/> RAL 9005
<b>Category</b>	Accessories

**PRODUCT**

Coaxial Timless

A023-00-03- | W | N |


W  RAL 9016 | N  RAL 9005

Accessories

Fasteners not available



**DIMENSIONAL DRAWING**




Wire Trimless Accessory is a collection of accessories for fitting tensioners and cables to Arkoslight luminaires suspended directly from the ceiling with any visible ceiling rose or fixings. This achieves a minimalist application with a visually tidy finish.

With Wire Trimless Accessory the items adjacent to the ceiling of the standard product (ceiling roses, fixings, driver boxes, etc.) are concealed by a simple recessed application.

Wire Trimless Accessory reduces the visual impact of the installation leading to extremely minimalist aesthetics. The wires come out of the ceiling material as a part of the structure. This detail creates a much purer, more essential layout, particular when several luminaires are fitted in an arrangement.



### DIMENSIONS



### ACCESSORIES



### MINIMAL TRACK OPTIONS

### AWARDS



### PRODUCT

Name	FIT 27 24V 22° 2700K G
Reference	A3990010G
Color	Gold
RAL	Paint of metallic nanoparticles
Category	TRACKLIGHTS

### LIGHTING INFORMATION

Light source	LED
Gross luminous flux	440 Lm
Power	4,5 W
Power values of the system	5 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	22°
Lighting efficiency	84%
Efficacy	98 Lm/W
Current intensity	400 mA
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	III
Voltage	24 Vdc
Energy efficiency	A+
LED lifespan	L80B10 (Tj=85°C) >60.000h


### OTHER DATA

Ingress Protection	IP20
Swivel angle	90°
Rotation angle	355°
Track type	Minimal Track
Weight	75 g.
Packaged weight	115 g.
Packaging dimensions	113 × 111 × 32 mm
Units per package	1
Materials	Aluminium / Polycarbonate






Fit 27 24V is a projector for the Minimal Track system. Cylindrical geometry and essential forms, it stands out for its minimalistic looking and its functionality as it can be orientated in any direction. The black perimeter around its mouth highlights its anti-glare vocation.

POLAR DIAGRAM

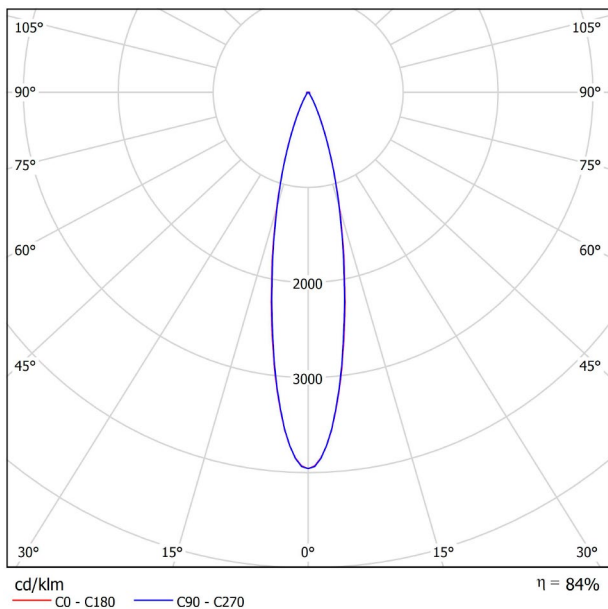

CONICAL DIAGRAM

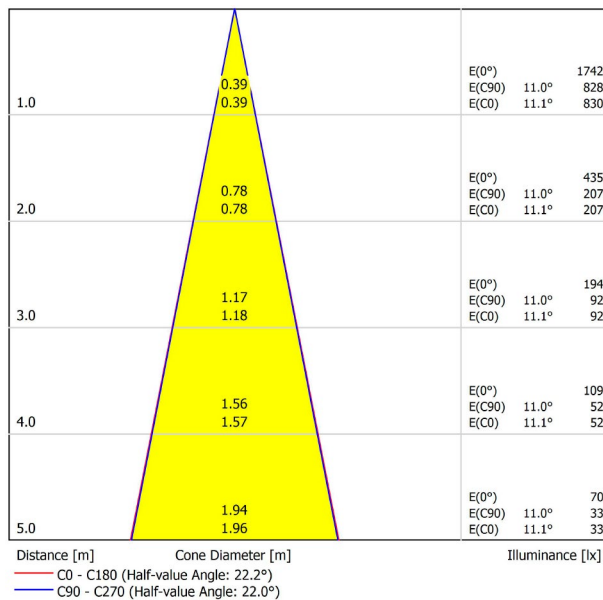



**MINIMAL TRACK 24V Profile 2m** A384-02-00- | N |



**MINIMAL TRACK 24V Rubber Cable n x 1m** A384-00-01- | N |


n = Total Length of System.

24V | Max. 4A

**MINIMAL TRACK 24V Corner 90° 1 Plane**

A384-00-02- | N |

Cable Length = 35mm.



**MINIMAL TRACK 24V End Cap**


A384-00-05- | N |



**MINIMAL TRACK 24V Corner 90° 1 Plane Rounded**


A384-00-03- | N |

Cable Length = 35mm.



**MINIMAL TRACK 24V Connection Box**


A384-00-06- | N |




**MINIMAL TRACK 24V Corner 90° 2 Planes**

A384-00-04- | N |

Cable Length = 100mm.





			P	V	D (A x B x C)
<b>MINIMAL TRACK 24V Power Supply Box</b>	ON/OFF	A384-00-07-   NT	40W	24V	280 x 30 x 24mm
		A384-00-08-   NT	100W	24V	280 x 30 x 24mm
Included ON/OFF 24Vdc Power Supply.					
<b>MINIMAL TRACK 24V Remote Power Supply</b>	ON/OFF	0434-01-37	60W	24V	180 x 52 x 30mm
		0433-10-22	100W	24V	295 x 43 x 30mm






### DROP VOLTAGE TABLE

POWER (W)	CABLE SECTION (mm <sup>2</sup> )	CABLE LENGTH (m)			
		<5	<10	<20	<30
40	0,75	30	30	30	30
	1,5	30	30	30	30
60	0,75	30	30	20	10
	1,5	30	30	30	20
100	0,75	20	10	X	X
	1,5	20	20	10	X

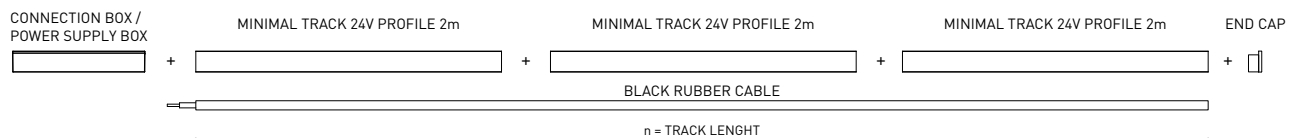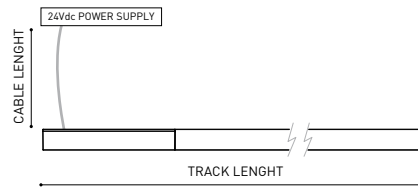

COLOUR | N ■ RAL 9005 | DIM OPTIONS PLEASE CONSULT



## MINIMAL TRACK 24V Suspension

Profile 2m	A384-02-00-	N
Profile 2m Initial feed kit	A400-02-10-	N
Profile 2m Middle feed kit*	A400-02-20-	N

\* Unidirectional Middle Feed.



## MINIMAL TRACK 24V Suspension


Rubber Cable n x 1m	A400-00-01-	N
---------------------	-------------	---

n = Total Length of System.

24V | Max. 4A |


## MINIMAL TRACK 24V Suspension Straight Joiner

A400-00-02-	N
-------------	---



## MINIMAL TRACK 24V Suspension Kit


A400-02-04-	N
-------------	---



## MINIMAL TRACK 24V Suspension Corner 90°

A400-00-03-	N
-------------	---

Cable Length = 85mm.



## MINIMAL TRACK 24V Suspension End Caps

A400-00-05-	N
-------------	---

Two End Caps Included




## MINIMAL TRACK 24V Suspension Power Supply Box

	ON/OFF		P	V	D (A x B x C)
MINIMAL TRACK 24V Suspension	ON/OFF	A400-00-06-	40W	24V	280 x 30 x 36mm
Power Supply Box		A400-00-07-	100W	24V	280 x 30 x 36mm

Included ON/OFF 24Vdc Power Supply



## MINIMAL TRACK 24V Remote Power Supply

	ON/OFF		P	V	D (A x B x C)
MINIMAL TRACK 24V	ON/OFF	0434-01-37	60W	24V	180 x 52 x 30mm
Remote Power Supply		0433-10-22	100W	24V	295 x 43 x 30mm



## DROP VOLTAGE TABLE

POWER (W)	CABLE SECTION (mm <sup>2</sup> )	CABLE LENGTH (m)			
		<5	<10	<20	<30
40	0,75	30	30	30	30
	1,5	30	30	30	30
60	0,75	30	30	20	10
	1,5	30	30	30	20
100	0,75	20	10	X	X
	1,5	20	20	10	X

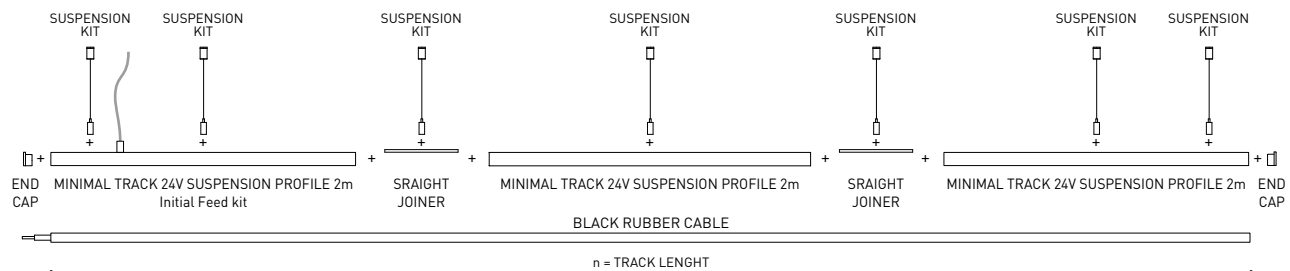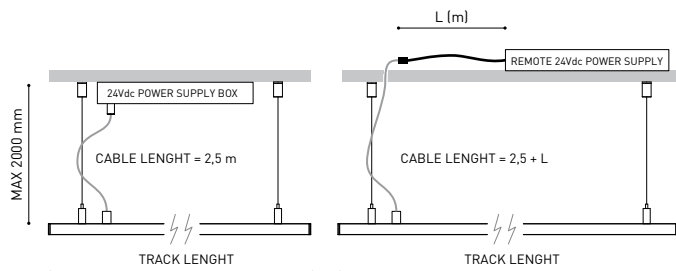

COLOUR | **N** ■ RAL 9005 | DIM OPTIONS PLEASE CONSULT



<b>Model</b>	Coaxial Timless
<b>Reference</b>	A023-00-03-   W   N
<b>Colour</b>	<b>W</b> <input type="checkbox"/> RAL 9016   <b>N</b> <input type="checkbox"/> RAL 9005
<b>Category</b>	Accessories

**PRODUCT**

Coaxial Timless

A023-00-03- | W | N |


**W**  RAL 9016 | **N**  RAL 9005

Accessories

Fasteners not available



**DIMENSIONAL DRAWING**




Wire Trimless Accessory is a collection of accessories for fitting tensioners and cables to Arkoslight luminaires suspended directly from the ceiling with any visible ceiling rose or fixings. This achieves a minimalist application with a visually tidy finish.

With Wire Trimless Accessory the items adjacent to the ceiling of the standard product (ceiling roses, fixings, driver boxes, etc.) are concealed by a simple recessed application.

Wire Trimless Accessory reduces the visual impact of the installation leading to extremely minimalist aesthetics. The wires come out of the ceiling material as a part of the structure. This detail creates a much purer, more essential layout, particular when several luminaires are fitted in an arrangement.



## DIMENSIONS



## ACCESSORIES



MINIMAL TRACK OPTIONS

## AWARDS



## PRODUCT

Name	FIT 27 24V 22° 2700K NT
Reference	A3990010NT
Color	Textured black
RAL	9005
Category	TRACKLIGHTS

## LIGHTING INFORMATION

Light source	LED
Gross luminous flux	440 Lm
Power	4,5 W
Power values of the system	5 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	22°
Lighting efficiency	84%
Efficacy	98 Lm/W
Current intensity	400 mA
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	III
Voltage	24 Vdc
Energy efficiency	A+
LED lifespan	L80B10 (Tj=85°C) >60.000h


## OTHER DATA

Ingress Protection	IP20
Swivel angle	90°
Rotation angle	355°
Track type	Minimal Track
Weight	75 g.
Packaged weight	115 g.
Packaging dimensions	113 × 111 × 32 mm
Units per package	1
Materials	Aluminium / Polycarbonate







Fit 27 24V is a projector for the Minimal Track system. Cylindrical geometry and essential forms, it stands out for its minimalistic looking and its functionality as it can be orientated in any direction. The black perimeter around its mouth highlights its anti-glare vocation.

POLAR DIAGRAM

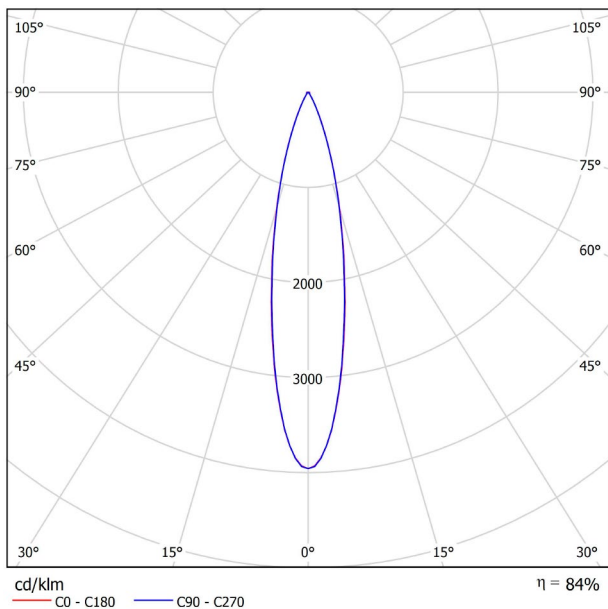

CONICAL DIAGRAM

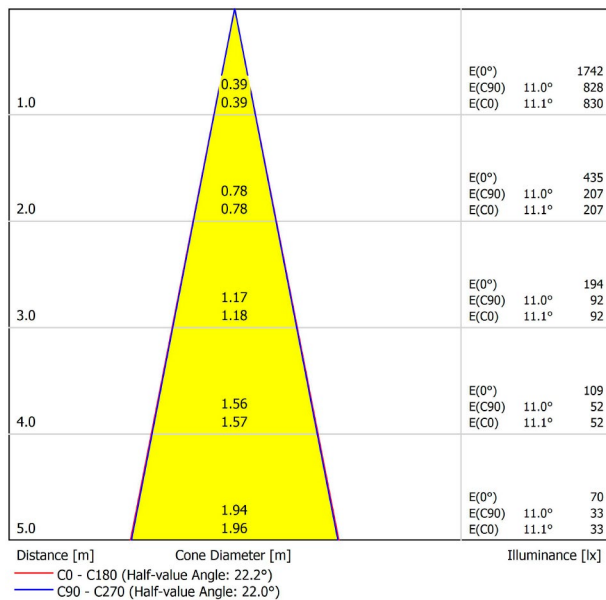



**MINIMAL TRACK 24V Profile 2m** A384-02-00- | N |



**MINIMAL TRACK 24V Rubber Cable n x 1m** A384-00-01- | N |


n = Total Length of System.

24V | Max. 4A

**MINIMAL TRACK 24V Corner 90° 1 Plane**

A384-00-02- | N |

Cable Length = 35mm.



**MINIMAL TRACK 24V End Cap**


A384-00-05- | N |



**MINIMAL TRACK 24V Corner 90° 1 Plane Rounded**


A384-00-03- | N |

Cable Length = 35mm.



**MINIMAL TRACK 24V Connection Box**


A384-00-06- | N |




**MINIMAL TRACK 24V Corner 90° 2 Planes**

A384-00-04- | N |

Cable Length = 100mm.





			P	V	D (A x B x C)
<b>MINIMAL TRACK 24V Power Supply Box</b>	ON/OFF	A384-00-07-   NT	40W	24V	280 x 30 x 24mm
		A384-00-08-   NT	100W	24V	280 x 30 x 24mm
Included ON/OFF 24Vdc Power Supply.					
<b>MINIMAL TRACK 24V Remote Power Supply</b>	ON/OFF	0434-01-37	60W	24V	180 x 52 x 30mm
		0433-10-22	100W	24V	295 x 43 x 30mm






### DROP VOLTAGE TABLE

POWER (W)	CABLE SECTION (mm <sup>2</sup> )	CABLE LENGTH (m)			
		<5	<10	<20	<30
40	0,75	30	30	30	30
	1,5	30	30	30	30
60	0,75	30	30	20	10
	1,5	30	30	30	20
100	0,75	20	10	X	X
	1,5	20	20	10	X

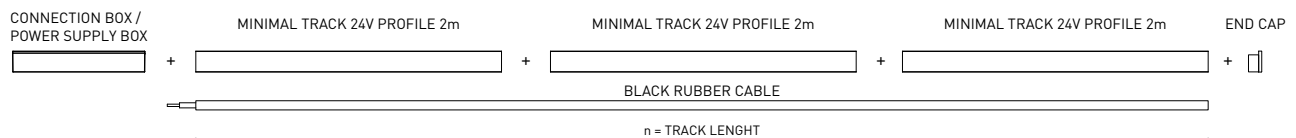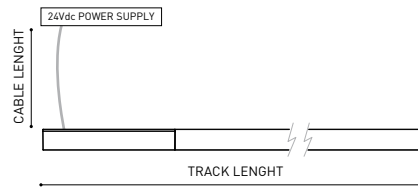

COLOUR | N ■ RAL 9005 | DIM OPTIONS PLEASE CONSULT



### MINIMAL TRACK 24V Suspension

Profile 2m	A384-02-00-	N
Profile 2m Initial feed kit	A400-02-10-	N
Profile 2m Middle feed kit*	A400-02-20-	N

\* Unidirectional Middle Feed.



### MINIMAL TRACK 24V Suspension


Rubber Cable n x 1m	A400-00-01-	N
---------------------	-------------	---

n = Total Length of System.

24V | Max. 4A


### MINIMAL TRACK 24V Suspension Straight Joiner

A400-00-02-	N
-------------	---



### MINIMAL TRACK 24V Suspension Kit


A400-02-04-	N
-------------	---



### MINIMAL TRACK 24V Suspension Corner 90°

A400-00-03-	N
-------------	---

Cable Length = 85mm.



### MINIMAL TRACK 24V Suspension End Caps

A400-00-05-	N
-------------	---

Two End Caps Included




### MINIMAL TRACK 24V Suspension Power Supply Box

	ON/OFF		P	V	D (A x B x C)
MINIMAL TRACK 24V Suspension	ON/OFF	A400-00-06-	40W	24V	280 x 30 x 36mm
Power Supply Box		A400-00-07-	100W	24V	280 x 30 x 36mm

Included ON/OFF 24Vdc Power Supply



### MINIMAL TRACK 24V Remote Power Supply

	ON/OFF		P	V	D (A x B x C)
MINIMAL TRACK 24V	ON/OFF	0434-01-37	60W	24V	180 x 52 x 30mm
Remote Power Supply		0433-10-22	100W	24V	295 x 43 x 30mm



### DROP VOLTAGE TABLE

POWER (W)	CABLE SECTION (mm <sup>2</sup> )	CABLE LENGTH (m)			
		<5	<10	<20	<30
40	0,75	30	30	30	30
	1,5	30	30	30	30
60	0,75	30	30	20	10
	1,5	30	30	30	20
100	0,75	20	10	X	X
	1,5	20	20	10	X

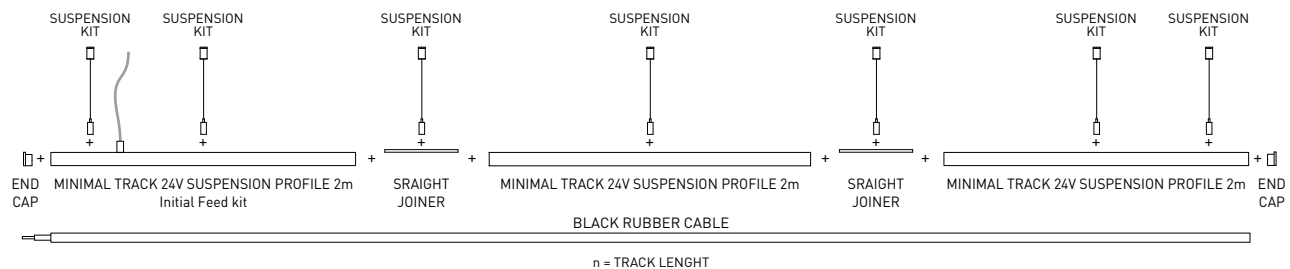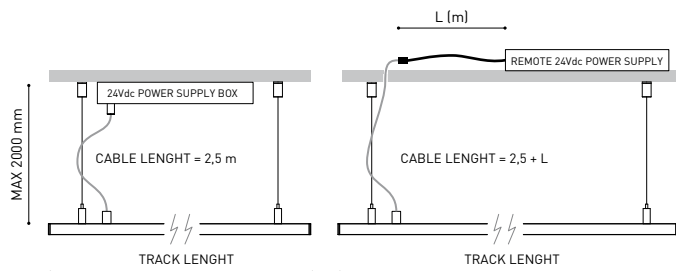

COLOUR | **N** ■ RAL 9005 | DIM OPTIONS PLEASE CONSULT



<b>Model</b>	Coaxial Timless
<b>Reference</b>	A023-00-03-   W   N
<b>Colour</b>	W <input type="checkbox"/> RAL 9016   N <input checked="" type="checkbox"/> RAL 9005
<b>Category</b>	Accessories

**PRODUCT**

Coaxial Timless

A023-00-03- | W | N |


W  RAL 9016 | N  RAL 9005

Accessories

Fasteners not available



**DIMENSIONAL DRAWING**




Wire Trimless Accessory is a collection of accessories for fitting tensioners and cables to Arkoslight luminaires suspended directly from the ceiling with any visible ceiling rose or fixings. This achieves a minimalist application with a visually tidy finish.

With Wire Trimless Accessory the items adjacent to the ceiling of the standard product (ceiling roses, fixings, driver boxes, etc.) are concealed by a simple recessed application.

Wire Trimless Accessory reduces the visual impact of the installation leading to extremely minimalist aesthetics. The wires come out of the ceiling material as a part of the structure. This detail creates a much purer, more essential layout, particular when several luminaires are fitted in an arrangement.



DIMENSIONS



ACCESSORIES



MINIMAL TRACK OPTIONS

AWARDS



PRODUCT

Name	FIT 27 24V 22° 2700K WT
Reference	A3990010WT
Color	Textured white
RAL	9016
Category	TRACKLIGHTS

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	440 Lm
Power	4,5 W
Power values of the system	5 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	22°
Lighting efficiency	84%
Efficacy	98 Lm/W
Current intensity	400 mA
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	III
Voltage	24 Vdc
Energy efficiency	A+
LED lifespan	L80B10 (Tj=85°C) >60.000h

OTHER DATA


Ingress Protection	IP20
Swivel angle	90°
Rotation angle	355°
Track type	Minimal Track
Weight	75 g.
Packaged weight	115 g.
Packaging dimensions	113 × 111 × 32 mm
Units per package	1
Materials	Aluminium / Polycarbonate




Fit 27 24V is a projector for the Minimal Track system. Cylindrical geometry and essential forms, it stands out for its minimalistic looking and its functionality as it can be orientated in any direction. The black perimeter around its mouth highlights its anti-glare vocation.




POLAR DIAGRAM

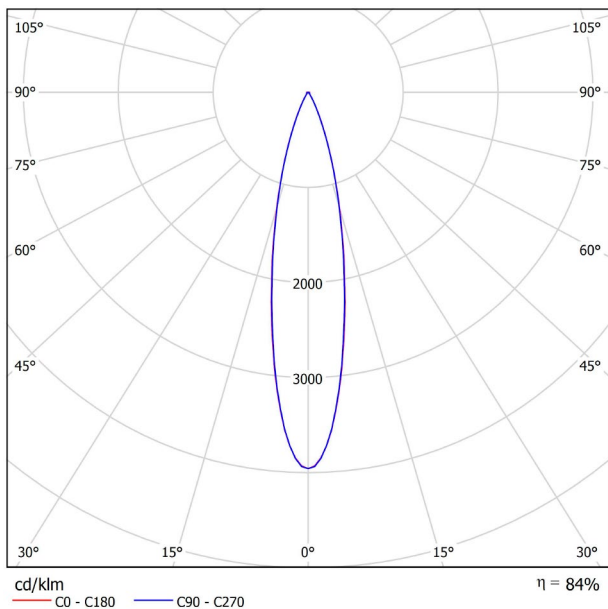


CONICAL DIAGRAM

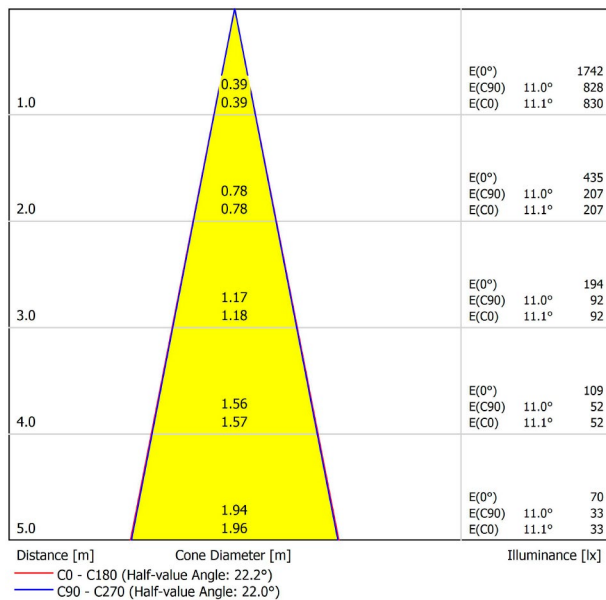



**MINIMAL TRACK 24V Profile 2m** A384-02-00- | N |




**MINIMAL TRACK 24V Rubber Cable n x 1m** A384-00-01- | N |

n = Total Length of System.

24V | Max. 4A

**MINIMAL TRACK 24V Corner 90° 1 Plane**  
A384-00-02- | N |

Cable Length = 35mm.




**MINIMAL TRACK 24V End Cap**  
A384-00-05- | N |




**MINIMAL TRACK 24V Corner 90° 1 Plane Rounded**  
A384-00-03- | N |

Cable Length = 35mm.




**MINIMAL TRACK 24V Connection Box**  
A384-00-06- | N |




**MINIMAL TRACK 24V Corner 90° 2 Planes**  
A384-00-04- | N |

Cable Length = 100mm.





			P	V	D (A x B x C)
<b>MINIMAL TRACK 24V Power Supply Box</b>	ON/OFF	A384-00-07-   NT	40W	24V	280 x 30 x 24mm
		A384-00-08-   NT	100W	24V	280 x 30 x 24mm
Included ON/OFF 24Vdc Power Supply.					
<b>MINIMAL TRACK 24V Remote Power Supply</b>	ON/OFF	0434-01-37	60W	24V	180 x 52 x 30mm
		0433-10-22	100W	24V	295 x 43 x 30mm





### DROP VOLTAGE TABLE

POWER (W)	CABLE SECTION (mm <sup>2</sup> )	CABLE LENGTH (m)			
		<5	<10	<20	<30
40	0,75	30	30	30	30
	1,5	30	30	30	30
60	0,75	30	30	20	10
	1,5	30	30	30	20
100	0,75	20	10	X	X
	1,5	20	20	10	X

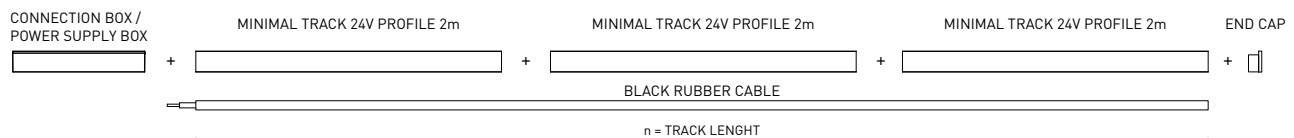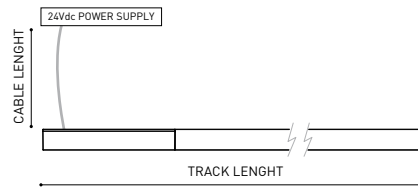

COLOUR | N ■ RAL 9005 | DIM OPTIONS PLEASE CONSULT



### MINIMAL TRACK 24V Suspension

Profile 2m	A384-02-00-	N
Profile 2m Initial feed kit	A400-02-10-	N
Profile 2m Middle feed kit*	A400-02-20-	N

\* Unidirectional Middle Feed.



### MINIMAL TRACK 24V Suspension


Rubber Cable n x 1m	A400-00-01-	N
---------------------	-------------	---

n = Total Length of System.

24V | Max. 4A


### MINIMAL TRACK 24V Suspension Straight Joiner

A400-00-02-	N
-------------	---



### MINIMAL TRACK 24V Suspension Kit


A400-02-04-	N
-------------	---



### MINIMAL TRACK 24V Suspension Corner 90°

A400-00-03-	N
-------------	---

Cable Length = 85mm.



### MINIMAL TRACK 24V Suspension End Caps

A400-00-05-	N
-------------	---

Two End Caps Included




### MINIMAL TRACK 24V Suspension Power Supply Box

	ON/OFF		P	V	D (A x B x C)
MINIMAL TRACK 24V Suspension	ON/OFF	A400-00-06-	40W	24V	280 x 30 x 36mm
Power Supply Box		A400-00-07-	100W	24V	280 x 30 x 36mm

Included ON/OFF 24Vdc Power Supply



### MINIMAL TRACK 24V Remote Power Supply

	ON/OFF		P	V	D (A x B x C)
MINIMAL TRACK 24V	ON/OFF	0434-01-37	60W	24V	180 x 52 x 30mm
Remote Power Supply		0433-10-22	100W	24V	295 x 43 x 30mm



### DROP VOLTAGE TABLE

POWER (W)	CABLE SECTION (mm <sup>2</sup> )	CABLE LENGTH (m)			
		<5	<10	<20	<30
40	0,75	30	30	30	30
	1,5	30	30	30	30
60	0,75	30	30	20	10
	1,5	30	30	30	20
100	0,75	20	10	X	X
	1,5	20	20	10	X

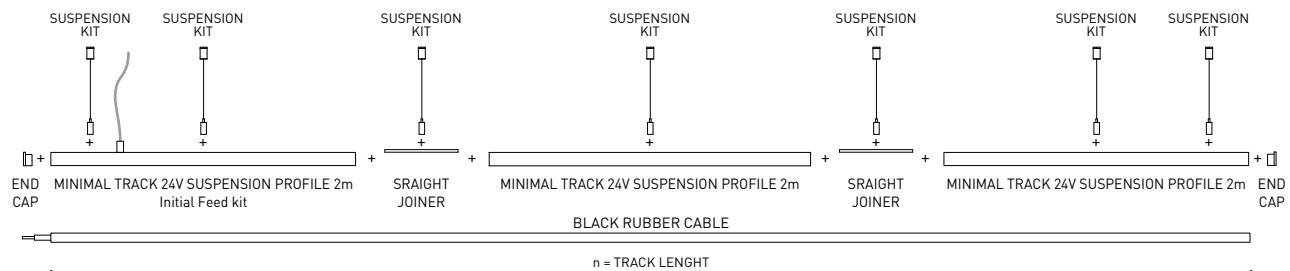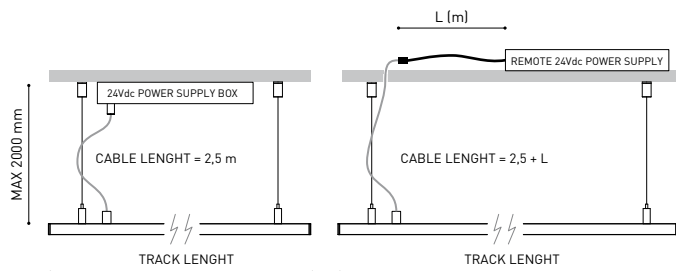

COLOUR | N ■ RAL 9005 | DIM OPTIONS PLEASE CONSULT



<b>Model</b>	Coaxial Timless
<b>Reference</b>	A023-00-03-   W   N
<b>Colour</b>	W <input type="checkbox"/> RAL 9016   N <input type="checkbox"/> RAL 9005
<b>Category</b>	Accessories

**PRODUCT**

Coaxial Timless

A023-00-03- | W | N |


W  RAL 9016 | N  RAL 9005

Accessories

Fasteners not available



**DIMENSIONAL DRAWING**




Wire Trimless Accessory is a collection of accessories for fitting tensioners and cables to Arkoslight luminaires suspended directly from the ceiling with any visible ceiling rose or fixings. This achieves a minimalist application with a visually tidy finish.

With Wire Trimless Accessory the items adjacent to the ceiling of the standard product (ceiling roses, fixings, driver boxes, etc.) are concealed by a simple recessed application.

Wire Trimless Accessory reduces the visual impact of the installation leading to extremely minimalist aesthetics. The wires come out of the ceiling material as a part of the structure. This detail creates a much purer, more essential layout, particular when several luminaires are fitted in an arrangement.



DIMENSIONS



ACCESSORIES



MINIMAL TRACK OPTIONS

AWARDS



PRODUCT

Name	FIT 27 24V 22° 3000K G
Reference	A3990011G
Color	Gold
RAL	Paint of metallic nanoparticles
Category	TRACKLIGHTS

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	475 Lm
Power	4,5 W
Power values of the system	5 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	22°
Lighting efficiency	84%
Efficacy	106 Lm/W
Current intensity	400 mA
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	III
Voltage	24 Vdc
Energy efficiency	A+
LED lifespan	L80B10 (Tj=85°C) >60.000h

OTHER DATA


Ingress Protection	IP20
Swivel angle	90°
Rotation angle	355°
Track type	Minimal Track
Weight	75 g.
Packaged weight	115 g.
Packaging dimensions	113 × 111 × 32 mm
Units per package	1
Materials	Aluminium / Polycarbonate




Fit 27 24V is a projector for the Minimal Track system. Cylindrical geometry and essential forms, it stands out for its minimalistic looking and its functionality as it can be orientated in any direction. The black perimeter around its mouth highlights its anti-glare vocation.




POLAR DIAGRAM

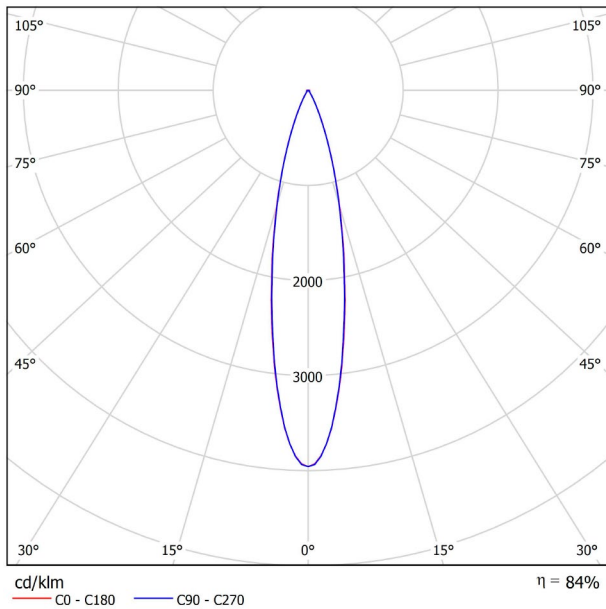


CONICAL DIAGRAM

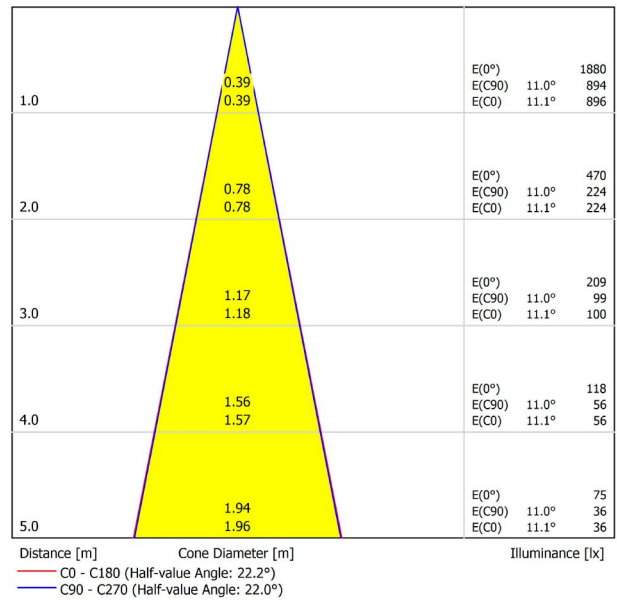



**MINIMAL TRACK 24V Profile 2m** A384-02-00- | N |




**MINIMAL TRACK 24V Rubber Cable n x 1m** A384-00-01- | N |

n = Total Length of System.

24V | Max. 4A

**MINIMAL TRACK 24V Corner 90° 1 Plane**  
A384-00-02- | N |

Cable Length = 35mm.




**MINIMAL TRACK 24V End Cap**  
A384-00-05- | N |




**MINIMAL TRACK 24V Corner 90° 1 Plane Rounded**  
A384-00-03- | N |

Cable Length = 35mm.




**MINIMAL TRACK 24V Connection Box**  
A384-00-06- | N |




**MINIMAL TRACK 24V Corner 90° 2 Planes**  
A384-00-04- | N |

Cable Length = 100mm.





			P	V	D (A x B x C)
<b>MINIMAL TRACK 24V Power Supply Box</b>	ON/OFF	A384-00-07-   NT	40W	24V	280 x 30 x 24mm
		A384-00-08-   NT	100W	24V	280 x 30 x 24mm
Included ON/OFF 24Vdc Power Supply.					
<b>MINIMAL TRACK 24V Remote Power Supply</b>	ON/OFF	0434-01-37	60W	24V	180 x 52 x 30mm
		0433-10-22	100W	24V	295 x 43 x 30mm





### DROP VOLTAGE TABLE

POWER (W)	CABLE SECTION (mm <sup>2</sup> )	CABLE LENGTH (m)			
		<5	<10	<20	<30
40	0,75	30	30	30	30
	1,5	30	30	30	30
60	0,75	30	30	20	10
	1,5	30	30	30	20
100	0,75	20	10	X	X
	1,5	20	20	10	X

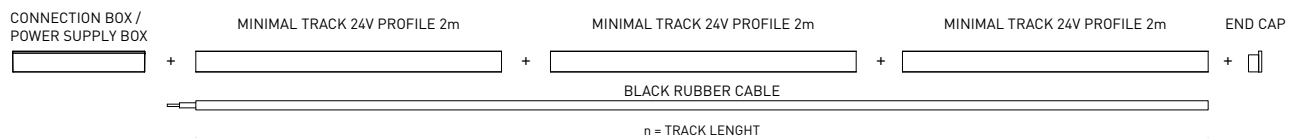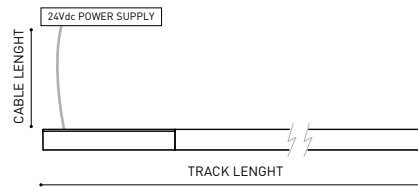

COLOUR | N ■ RAL 9005 | DIM OPTIONS PLEASE CONSULT



## MINIMAL TRACK 24V Suspension

Profile 2m	A384-02-00-	N
Profile 2m Initial feed kit	A400-02-10-	N
Profile 2m Middle feed kit*	A400-02-20-	N

\* Unidirectional Middle Feed.



## MINIMAL TRACK 24V Suspension


Rubber Cable n x 1m	A400-00-01-	N
---------------------	-------------	---

n = Total Length of System.

24V | Max. 4A


## MINIMAL TRACK 24V Suspension Straight Joiner

A400-00-02-	N
-------------	---



## MINIMAL TRACK 24V Suspension Kit


A400-02-04-	N
-------------	---



## MINIMAL TRACK 24V Suspension Corner 90°

A400-00-03-	N
-------------	---

Cable Length = 85mm.



## MINIMAL TRACK 24V Suspension End Caps

A400-00-05-	N
-------------	---

Two End Caps Included




## MINIMAL TRACK 24V Suspension Power Supply Box

	ON/OFF		P	V	D (A x B x C)
MINIMAL TRACK 24V Suspension	ON/OFF	A400-00-06-	40W	24V	280 x 30 x 36mm
Power Supply Box		A400-00-07-	100W	24V	280 x 30 x 36mm

Included ON/OFF 24Vdc Power Supply



## MINIMAL TRACK 24V Remote Power Supply

	ON/OFF		P	V	D (A x B x C)
MINIMAL TRACK 24V	ON/OFF	0434-01-37	60W	24V	180 x 52 x 30mm
Remote Power Supply		0433-10-22	100W	24V	295 x 43 x 30mm



## DROP VOLTAGE TABLE

POWER (W)	CABLE SECTION (mm <sup>2</sup> )	CABLE LENGTH (m)			
		<5	<10	<20	<30
40	0,75	30	30	30	30
	1,5	30	30	30	30
60	0,75	30	30	20	10
	1,5	30	30	30	20
100	0,75	20	10	X	X
	1,5	20	20	10	X

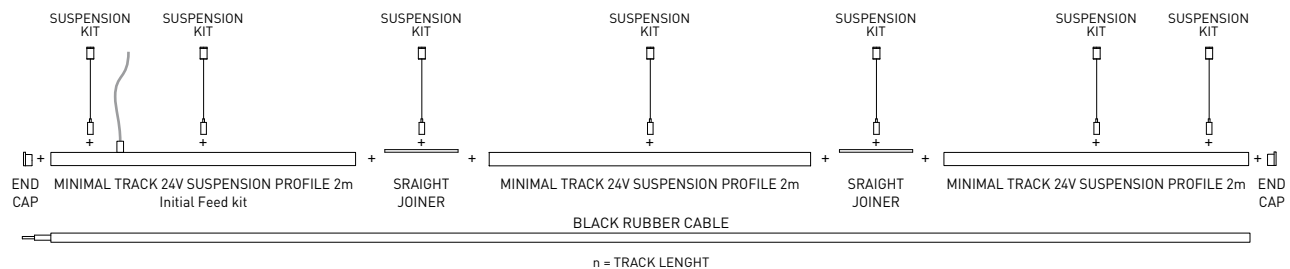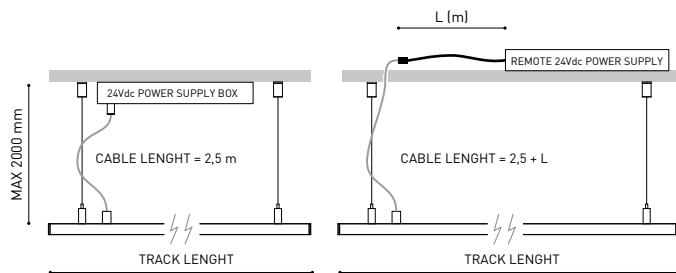

COLOUR | **N** ■ RAL 9005 | DIM OPTIONS PLEASE CONSULT



<b>Model</b>	Coaxial Timless
<b>Reference</b>	A023-00-03-   W   N
<b>Colour</b>	W <input type="checkbox"/> RAL 9016   N <input type="checkbox"/> RAL 9005
<b>Category</b>	Accessories

**PRODUCT**

Coaxial Timless

A023-00-03- | W | N |


W  RAL 9016 | N  RAL 9005

Accessories

Fasteners not available



**DIMENSIONAL DRAWING**




Wire Trimless Accessory is a collection of accessories for fitting tensioners and cables to Arkoslight luminaires suspended directly from the ceiling with any visible ceiling rose or fixings. This achieves a minimalist application with a visually tidy finish.

With Wire Trimless Accessory the items adjacent to the ceiling of the standard product (ceiling roses, fixings, driver boxes, etc.) are concealed by a simple recessed application.

Wire Trimless Accessory reduces the visual impact of the installation leading to extremely minimalist aesthetics. The wires come out of the ceiling material as a part of the structure. This detail creates a much purer, more essential layout, particular when several luminaires are fitted in an arrangement.



## DIMENSIONS



## ACCESSORIES



MINIMAL TRACK OPTIONS

## AWARDS



## PRODUCT

Name	FIT 27 24V 22° 3000K NT
Reference	A3990011NT
Color	Textured black
RAL	9005
Category	TRACKLIGHTS

## LIGHTING INFORMATION

Light source	LED
Gross luminous flux	475 Lm
Power	4,5 W
Power values of the system	5 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	22°
Lighting efficiency	84%
Efficacy	106 Lm/W
Current intensity	400 mA
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	III
Voltage	24 Vdc
Energy efficiency	A+
LED lifespan	L80B10 (Tj=85°C) >60.000h


## OTHER DATA

Ingress Protection	IP20
Swivel angle	90°
Rotation angle	355°
Track type	Minimal Track
Weight	75 g.
Packaged weight	115 g.
Packaging dimensions	113 × 111 × 32 mm
Units per package	1
Materials	Aluminium / Polycarbonate






Fit 27 24V is a projector for the Minimal Track system. Cylindrical geometry and essential forms, it stands out for its minimalistic looking and its functionality as it can be orientated in any direction. The black perimeter around its mouth highlights its anti-glare vocation.

POLAR DIAGRAM

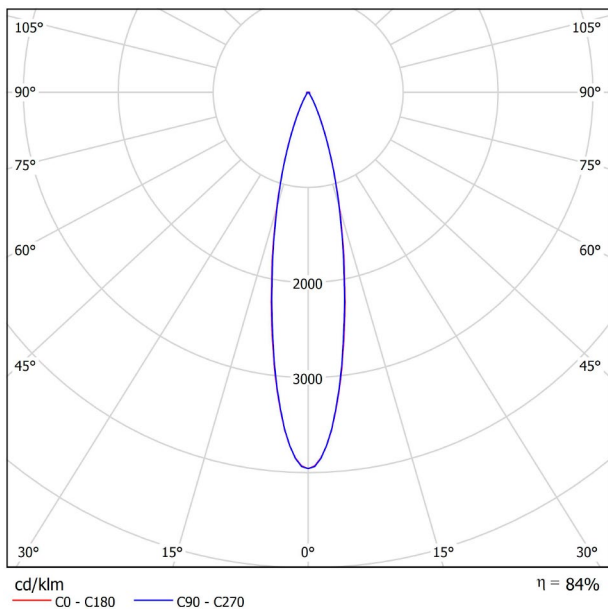

CONICAL DIAGRAM

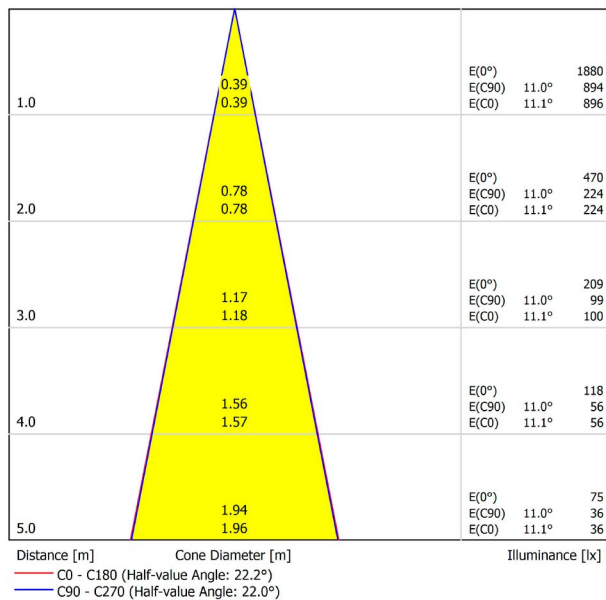



**MINIMAL TRACK 24V Profile 2m** A384-02-00- | N |



**MINIMAL TRACK 24V Rubber Cable n x 1m** A384-00-01- | N |


n = Total Length of System.

24V | Max. 4A

**MINIMAL TRACK 24V Corner 90° 1 Plane**

A384-00-02- | N |

Cable Length = 35mm.



**MINIMAL TRACK 24V End Cap**


A384-00-05- | N |



**MINIMAL TRACK 24V Corner 90° 1 Plane Rounded**


A384-00-03- | N |

Cable Length = 35mm.



**MINIMAL TRACK 24V Connection Box**


A384-00-06- | N |




**MINIMAL TRACK 24V Corner 90° 2 Planes**

A384-00-04- | N |

Cable Length = 100mm.





			P	V	D (A x B x C)
<b>MINIMAL TRACK 24V Power Supply Box</b>	ON/OFF	A384-00-07-   NT	40W	24V	280 x 30 x 24mm
		A384-00-08-   NT	100W	24V	280 x 30 x 24mm
Included ON/OFF 24Vdc Power Supply.					
<b>MINIMAL TRACK 24V Remote Power Supply</b>	ON/OFF	0434-01-37	60W	24V	180 x 52 x 30mm
		0433-10-22	100W	24V	295 x 43 x 30mm






### DROP VOLTAGE TABLE

POWER (W)	CABLE SECTION (mm <sup>2</sup> )	CABLE LENGTH (m)			
		<5	<10	<20	<30
40	0,75	30	30	30	30
	1,5	30	30	30	30
60	0,75	30	30	20	10
	1,5	30	30	30	20
100	0,75	20	10	X	X
	1,5	20	20	10	X

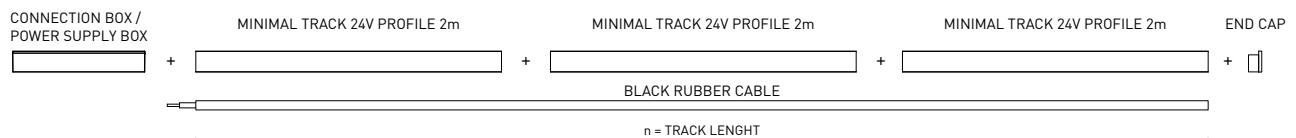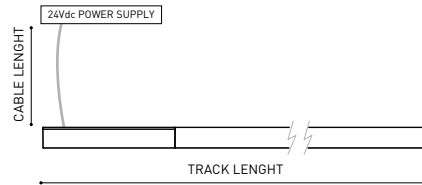

COLOUR | N ■ RAL 9005 | DIM OPTIONS PLEASE CONSULT



### MINIMAL TRACK 24V Suspension

Profile 2m	A384-02-00-	N
Profile 2m Initial feed kit	A400-02-10-	N
Profile 2m Middle feed kit*	A400-02-20-	N

\* Unidirectional Middle Feed.



### MINIMAL TRACK 24V Suspension


Rubber Cable n x 1m	A400-00-01-	N
---------------------	-------------	---

n = Total Length of System.

24V | Max. 4A |


### MINIMAL TRACK 24V Suspension Straight Joiner

A400-00-02-	N
-------------	---



### MINIMAL TRACK 24V Suspension Kit


A400-02-04-	N
-------------	---



### MINIMAL TRACK 24V Suspension Corner 90°

A400-00-03-	N
-------------	---

Cable Length = 85mm.



### MINIMAL TRACK 24V Suspension End Caps

A400-00-05-	N
-------------	---

Two End Caps Included




### MINIMAL TRACK 24V Suspension Power Supply Box

	ON/OFF		P	V	D (A x B x C)
MINIMAL TRACK 24V Suspension	ON/OFF	A400-00-06-	40W	24V	280 x 30 x 36mm
Power Supply Box		A400-00-07-	100W	24V	280 x 30 x 36mm

Included ON/OFF 24Vdc Power Supply



### MINIMAL TRACK 24V Remote Power Supply

	ON/OFF		P	V	D (A x B x C)
MINIMAL TRACK 24V	ON/OFF	0434-01-37	60W	24V	180 x 52 x 30mm
Remote Power Supply		0433-10-22	100W	24V	295 x 43 x 30mm



### DROP VOLTAGE TABLE

POWER (W)	CABLE SECTION (mm <sup>2</sup> )	CABLE LENGTH (m)			
		<5	<10	<20	<30
40	0,75	30	30	30	30
	1,5	30	30	30	30
60	0,75	30	30	20	10
	1,5	30	30	30	20
100	0,75	20	10	X	X
	1,5	20	20	10	X

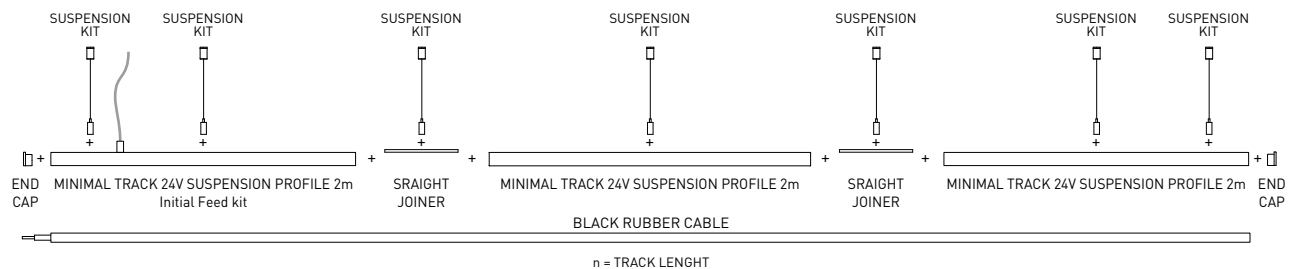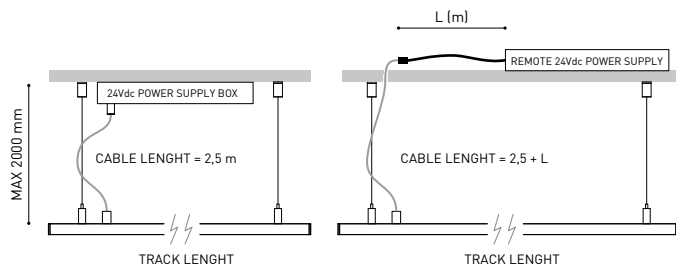

COLOUR | N ■ RAL 9005 | DIM OPTIONS PLEASE CONSULT



<b>Model</b>	Coaxial Timless
<b>Reference</b>	A023-00-03-   W   N
<b>Colour</b>	W <input type="checkbox"/> RAL 9016   N <input type="checkbox"/> RAL 9005
<b>Category</b>	Accessories

### PRODUCT

Coaxial Timless

A023-00-03- | W | N |


W  RAL 9016 | N  RAL 9005

Accessories

Fasteners not available



### DIMENSIONAL DRAWING




Wire Trimless Accessory is a collection of accessories for fitting tensioners and cables to Arkoslight luminaires suspended directly from the ceiling with any visible ceiling rose or fixings. This achieves a minimalist application with a visually tidy finish.

With Wire Trimless Accessory the items adjacent to the ceiling of the standard product (ceiling roses, fixings, driver boxes, etc.) are concealed by a simple recessed application.

Wire Trimless Accessory reduces the visual impact of the installation leading to extremely minimalist aesthetics. The wires come out of the ceiling material as a part of the structure. This detail creates a much purer, more essential layout, particular when several luminaires are fitted in an arrangement.



DIMENSIONS



ACCESSORIES



MINIMAL TRACK OPTIONS

AWARDS



PRODUCT

Name	FIT 27 24V 22° 3000K WT
Reference	A3990011WT
Color	Textured white
RAL	9016
Category	TRACKLIGHTS

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	475 Lm
Power	4,5 W
Power values of the system	5 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	22°
Lighting efficiency	84%
Efficacy	106 Lm/W
Current intensity	400 mA
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	III
Voltage	24 Vdc
Energy efficiency	A+
LED lifespan	L80B10 (Tj=85°C) >60.000h

OTHER DATA


Ingress Protection	IP20
Swivel angle	90°
Rotation angle	355°
Track type	Minimal Track
Weight	75 g.
Packaged weight	115 g.
Packaging dimensions	113 × 111 × 32 mm
Units per package	1
Materials	Aluminium / Polycarbonate




Fit 27 24V is a projector for the Minimal Track system. Cylindrical geometry and essential forms, it stands out for its minimalistic looking and its functionality as it can be orientated in any direction. The black perimeter around its mouth highlights its anti-glare vocation.





POLAR DIAGRAM

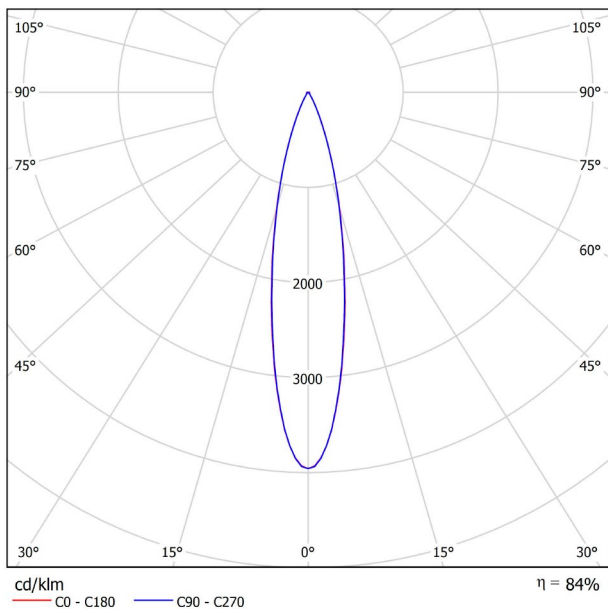


CONICAL DIAGRAM

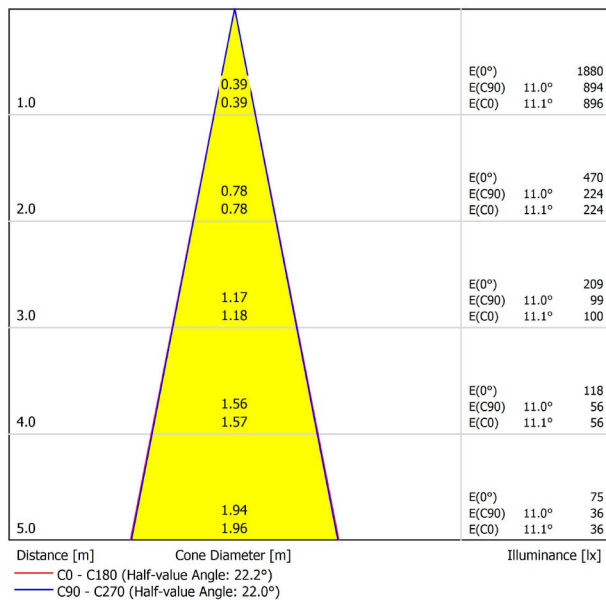



**MINIMAL TRACK 24V Profile 2m** A384-02-00- | N |




**MINIMAL TRACK 24V Rubber Cable n x 1m** A384-00-01- | N |

n = Total Length of System.

24V | Max. 4A

**MINIMAL TRACK 24V Corner 90° 1 Plane**  
A384-00-02- | N |

Cable Length = 35mm.




**MINIMAL TRACK 24V End Cap**  
A384-00-05- | N |




**MINIMAL TRACK 24V Corner 90° 1 Plane Rounded**  
A384-00-03- | N |

Cable Length = 35mm.




**MINIMAL TRACK 24V Connection Box**  
A384-00-06- | N |




**MINIMAL TRACK 24V Corner 90° 2 Planes**  
A384-00-04- | N |

Cable Length = 100mm.





			P	V	D (A x B x C)
<b>MINIMAL TRACK 24V Power Supply Box</b>	ON/OFF	A384-00-07-   NT	40W	24V	280 x 30 x 24mm
		A384-00-08-   NT	100W	24V	280 x 30 x 24mm
Included ON/OFF 24Vdc Power Supply.					
<b>MINIMAL TRACK 24V Remote Power Supply</b>	ON/OFF	0434-01-37	60W	24V	180 x 52 x 30mm
		0433-10-22	100W	24V	295 x 43 x 30mm





### DROP VOLTAGE TABLE

POWER (W)	CABLE SECTION (mm <sup>2</sup> )	CABLE LENGTH (m)			
		<5	<10	<20	<30
40	0,75	30	30	30	30
	1,5	30	30	30	30
60	0,75	30	30	20	10
	1,5	30	30	30	20
100	0,75	20	10	X	X
	1,5	20	20	10	X

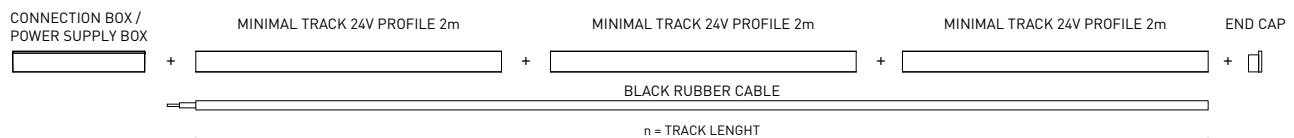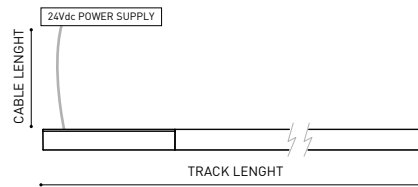

COLOUR | N ■ RAL 9005 | DIM OPTIONS PLEASE CONSULT



### MINIMAL TRACK 24V Suspension

Profile 2m	A384-02-00-	N
Profile 2m Initial feed kit	A400-02-10-	N
Profile 2m Middle feed kit*	A400-02-20-	N

\* Unidirectional Middle Feed.



### MINIMAL TRACK 24V Suspension


Rubber Cable n x 1m	A400-00-01-	N
---------------------	-------------	---

n = Total Length of System.

24V | Max. 4A


### MINIMAL TRACK 24V Suspension Straight Joiner

A400-00-02-	N
-------------	---



### MINIMAL TRACK 24V Suspension Kit


A400-02-04-	N
-------------	---



### MINIMAL TRACK 24V Suspension Corner 90°

A400-00-03-	N
-------------	---

Cable Length = 85mm.



### MINIMAL TRACK 24V Suspension End Caps

A400-00-05-	N
-------------	---

Two End Caps Included




### MINIMAL TRACK 24V Suspension Power Supply Box

	ON/OFF		P	V	D (A x B x C)
MINIMAL TRACK 24V Suspension	ON/OFF	A400-00-06-	40W	24V	280 x 30 x 36mm
Power Supply Box		A400-00-07-	100W	24V	280 x 30 x 36mm

Included ON/OFF 24Vdc Power Supply



### MINIMAL TRACK 24V Remote Power Supply

	ON/OFF		P	V	D (A x B x C)
MINIMAL TRACK 24V	ON/OFF	0434-01-37	60W	24V	180 x 52 x 30mm
Remote Power Supply		0433-10-22	100W	24V	295 x 43 x 30mm



### DROP VOLTAGE TABLE

POWER (W)	CABLE SECTION (mm <sup>2</sup> )	CABLE LENGTH (m)			
		<5	<10	<20	<30
40	0,75	30	30	30	30
	1,5	30	30	30	30
60	0,75	30	30	20	10
	1,5	30	30	30	20
100	0,75	20	10	X	X
	1,5	20	20	10	X

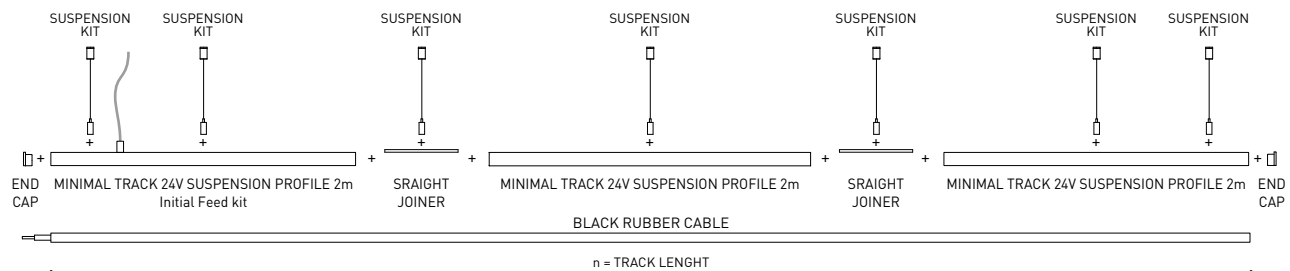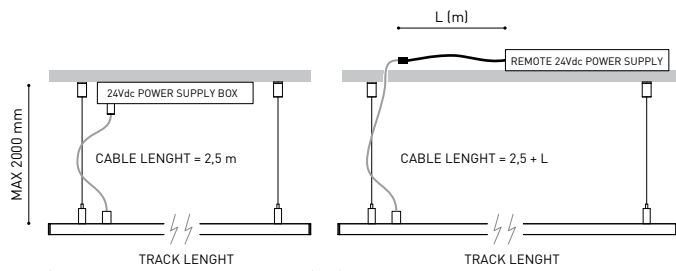

COLOUR | **N** ■ RAL 9005 | DIM OPTIONS PLEASE CONSULT



<b>Model</b>	Coaxial Timless
<b>Reference</b>	A023-00-03-   W   N
<b>Colour</b>	W <input type="checkbox"/> RAL 9016   N <input checked="" type="checkbox"/> RAL 9005
<b>Category</b>	Accessories

**PRODUCT**

Coaxial Timless

A023-00-03- | W | N |


W  RAL 9016 | N  RAL 9005

Accessories

Fasteners not available



**DIMENSIONAL DRAWING**




Wire Trimless Accessory is a collection of accessories for fitting tensioners and cables to Arkoslight luminaires suspended directly from the ceiling with any visible ceiling rose or fixings. This achieves a minimalist application with a visually tidy finish.

With Wire Trimless Accessory the items adjacent to the ceiling of the standard product (ceiling roses, fixings, driver boxes, etc.) are concealed by a simple recessed application.

Wire Trimless Accessory reduces the visual impact of the installation leading to extremely minimalist aesthetics. The wires come out of the ceiling material as a part of the structure. This detail creates a much purer, more essential layout, particular when several luminaires are fitted in an arrangement.



### DIMENSIONS



### ACCESSORIES



### MINIMAL TRACK OPTIONS

### AWARDS



### PRODUCT

Name	FIT 27 24V 37° 2700K G
Reference	A3990020G
Color	Gold
RAL	Paint of metallic nanoparticles
Category	TRACKLIGHTS

### LIGHTING INFORMATION

Light source	LED
Gross luminous flux	440 Lm
Power	4,5 W
Power values of the system	5 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	37°
Lighting efficiency	82%
Efficacy	98 Lm/W
Current intensity	400 mA
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	III
Voltage	24 Vdc
Energy efficiency	A+
LED lifespan	L80B10 (Tj=85°C) >60.000h


### OTHER DATA

Ingress Protection	IP20
Swivel angle	90°
Rotation angle	355°
Track type	Minimal Track
Weight	75 g.
Packaged weight	115 g.
Packaging dimensions	113 × 111 × 32 mm
Units per package	1
Materials	Aluminium / Polycarbonate






Fit 27 24V is a projector for the Minimal Track system. Cylindrical geometry and essential forms, it stands out for its minimalistic looking and its functionality as it can be orientated in any direction. The black perimeter around its mouth highlights its anti-glare vocation.

POLAR DIAGRAM

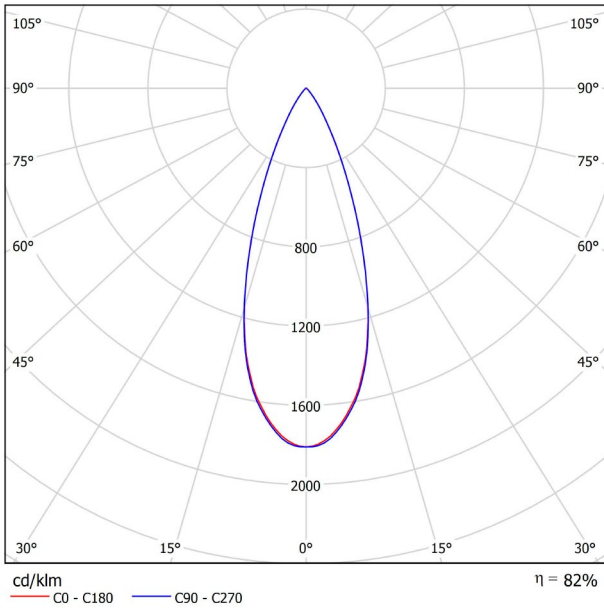

CONICAL DIAGRAM

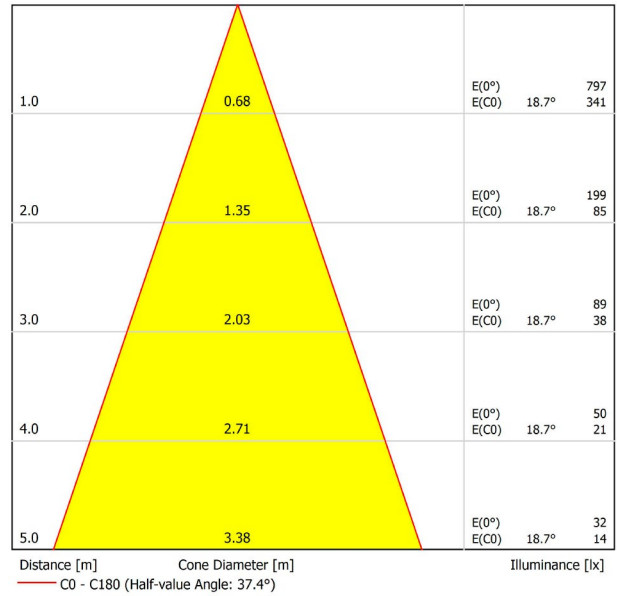



**MINIMAL TRACK 24V Profile 2m** A384-02-00- | N |



**MINIMAL TRACK 24V Rubber Cable n x 1m** A384-00-01- | N |


n = Total Length of System.

24V | Max. 4A

**MINIMAL TRACK 24V Corner 90° 1 Plane**

A384-00-02- | N |

Cable Length = 35mm.



**MINIMAL TRACK 24V End Cap**


A384-00-05- | N |



**MINIMAL TRACK 24V Corner 90° 1 Plane Rounded**


A384-00-03- | N |

Cable Length = 35mm.



**MINIMAL TRACK 24V Connection Box**


A384-00-06- | N |




**MINIMAL TRACK 24V Corner 90° 2 Planes**

A384-00-04- | N |

Cable Length = 100mm.





			P	V	D (A x B x C)
<b>MINIMAL TRACK 24V Power Supply Box</b>	ON/OFF	A384-00-07-   NT	40W	24V	280 x 30 x 24mm
		A384-00-08-   NT	100W	24V	280 x 30 x 24mm
Included ON/OFF 24Vdc Power Supply.					
<b>MINIMAL TRACK 24V Remote Power Supply</b>	ON/OFF	0434-01-37	60W	24V	180 x 52 x 30mm
		0433-10-22	100W	24V	295 x 43 x 30mm





### DROP VOLTAGE TABLE

POWER (W)	CABLE SECTION (mm <sup>2</sup> )	CABLE LENGTH (m)			
		<5	<10	<20	<30
40	0,75	30	30	30	30
	1,5	30	30	30	30
60	0,75	30	30	20	10
	1,5	30	30	30	20
100	0,75	20	10	X	X
	1,5	20	20	10	X

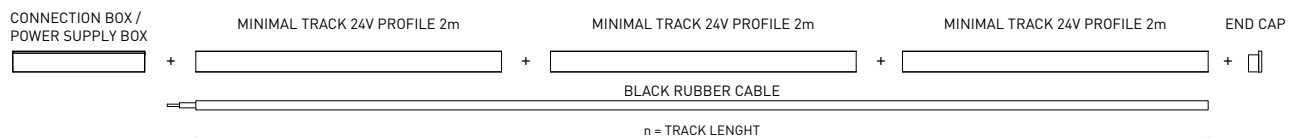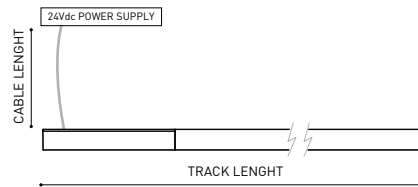

COLOUR | N ■ RAL 9005 | DIM OPTIONS PLEASE CONSULT



### MINIMAL TRACK 24V Suspension

Profile 2m	A384-02-00-	N
Profile 2m Initial feed kit	A400-02-10-	N
Profile 2m Middle feed kit*	A400-02-20-	N

\* Unidirectional Middle Feed.



### MINIMAL TRACK 24V Suspension


Rubber Cable n x 1m	A400-00-01-	N
---------------------	-------------	---

n = Total Length of System.

24V | Max. 4A


### MINIMAL TRACK 24V Suspension Straight Joiner

A400-00-02-	N
-------------	---



### MINIMAL TRACK 24V Suspension Kit


A400-02-04-	N
-------------	---



### MINIMAL TRACK 24V Suspension Corner 90°

A400-00-03-	N
-------------	---

Cable Length = 85mm.



### MINIMAL TRACK 24V Suspension End Caps

A400-00-05-	N
-------------	---

Two End Caps Included




### MINIMAL TRACK 24V Suspension Power Supply Box

	ON/OFF		P	V	D (A x B x C)
MINIMAL TRACK 24V Suspension	ON/OFF	A400-00-06-   NT	40W	24V	280 x 30 x 36mm
Power Supply Box		A400-00-07-   NT	100W	24V	280 x 30 x 36mm

Included ON/OFF 24Vdc Power Supply



### MINIMAL TRACK 24V Remote Power Supply

	ON/OFF		P	V	D (A x B x C)
MINIMAL TRACK 24V	ON/OFF	0434-01-37	60W	24V	180 x 52 x 30mm
Remote Power Supply		0433-10-22	100W	24V	295 x 43 x 30mm



### DROP VOLTAGE TABLE

POWER (W)	CABLE SECTION (mm <sup>2</sup> )	CABLE LENGTH (m)			
		<5	<10	<20	<30
40	0,75	30	30	30	30
	1,5	30	30	30	30
60	0,75	30	30	20	10
	1,5	30	30	30	20
100	0,75	20	10	X	X
	1,5	20	20	10	X

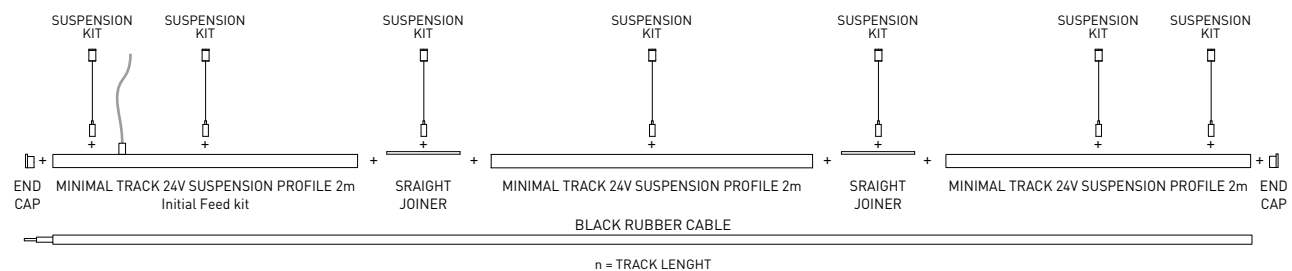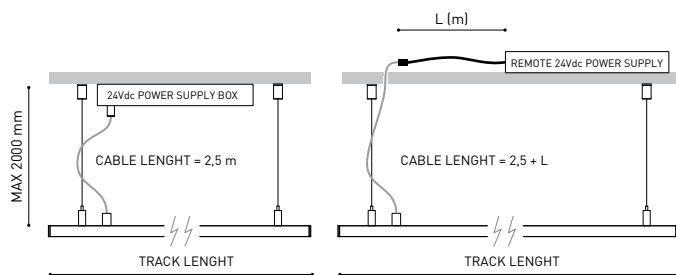

COLOUR | N ■ RAL 9005 | DIM OPTIONS PLEASE CONSULT



<b>Model</b>	Coaxial Timless
<b>Reference</b>	A023-00-03-   W   N
<b>Colour</b>	W <input type="checkbox"/> RAL 9016   N <input type="checkbox"/> RAL 9005
<b>Category</b>	Accessories

### PRODUCT

Coaxial Timless

A023-00-03- | W | N |


W  RAL 9016 | N  RAL 9005

Accessories

Fasteners not available



### DIMENSIONAL DRAWING




Wire Trimless Accessory is a collection of accessories for fitting tensioners and cables to Arkoslight luminaires suspended directly from the ceiling with any visible ceiling rose or fixings. This achieves a minimalist application with a visually tidy finish.

With Wire Trimless Accessory the items adjacent to the ceiling of the standard product (ceiling roses, fixings, driver boxes, etc.) are concealed by a simple recessed application.

Wire Trimless Accessory reduces the visual impact of the installation leading to extremely minimalist aesthetics. The wires come out of the ceiling material as a part of the structure. This detail creates a much purer, more essential layout, particular when several luminaires are fitted in an arrangement.



## DIMENSIONS



## ACCESSORIES



MINIMAL TRACK OPTIONS

## AWARDS



## PRODUCT

Name	FIT 27 24V 37° 2700K NT
Reference	A3990020NT
Color	Textured black
RAL	9005
Category	TRACKLIGHTS

## LIGHTING INFORMATION

Light source	LED
Gross luminous flux	440 Lm
Power	4,5 W
Power values of the system	5 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	37°
Lighting efficiency	82%
Efficacy	98 Lm/W
Current intensity	400 mA
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	III
Voltage	24 Vdc
Energy efficiency	A+
LED lifespan	L80B10 (Tj=85°C) >60.000h


## OTHER DATA

Ingress Protection	IP20
Swivel angle	90°
Rotation angle	355°
Track type	Minimal Track
Weight	75 g.
Packaged weight	115 g.
Packaging dimensions	113 × 111 × 32 mm
Units per package	1
Materials	Aluminium / Polycarbonate





Fit 27 24V is a projector for the Minimal Track system. Cylindrical geometry and essential forms, it stands out for its minimalistic looking and its functionality as it can be orientated in any direction. The black perimeter around its mouth highlights its anti-glare vocation.

POLAR DIAGRAM

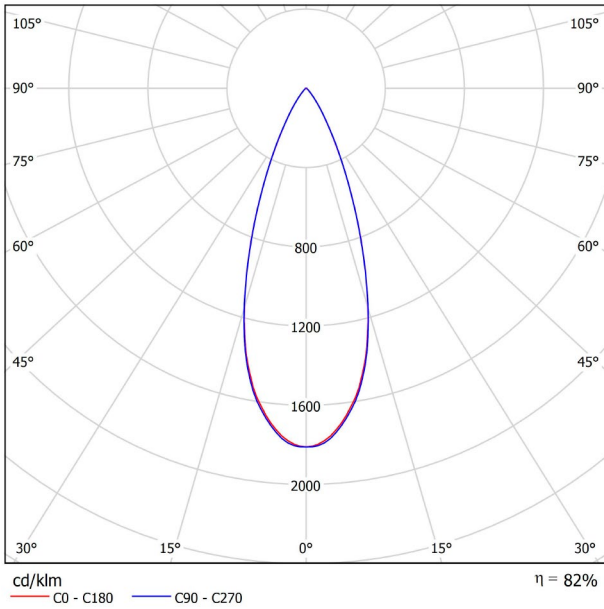


CONICAL DIAGRAM

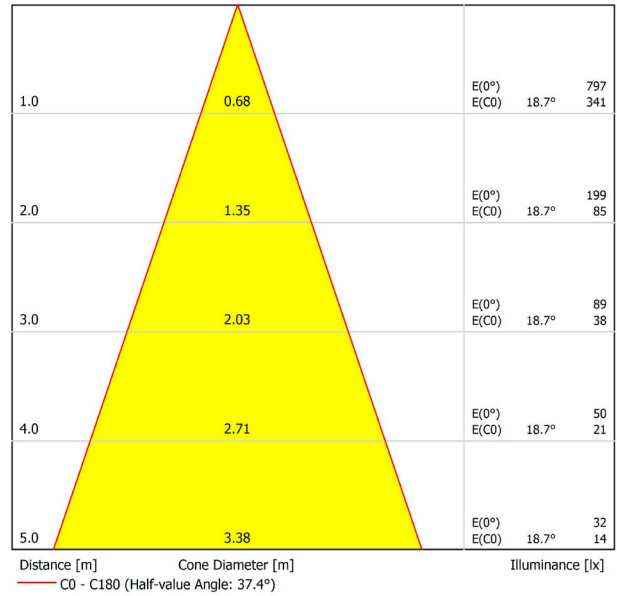



**MINIMAL TRACK 24V Profile 2m** A384-02-00- | N |




**MINIMAL TRACK 24V Rubber Cable n x 1m** A384-00-01- | N |

n = Total Length of System.

24V | Max. 4A

**MINIMAL TRACK 24V Corner 90° 1 Plane**  
A384-00-02- | N |

Cable Length = 35mm.




**MINIMAL TRACK 24V End Cap**  
A384-00-05- | N |




**MINIMAL TRACK 24V Corner 90° 1 Plane Rounded**  
A384-00-03- | N |

Cable Length = 35mm.




**MINIMAL TRACK 24V Connection Box**  
A384-00-06- | N |




**MINIMAL TRACK 24V Corner 90° 2 Planes**  
A384-00-04- | N |

Cable Length = 100mm.





			P	V	D (A x B x C)
<b>MINIMAL TRACK 24V Power Supply Box</b>	ON/OFF	A384-00-07-   NT	40W	24V	280 x 30 x 24mm
		A384-00-08-   NT	100W	24V	280 x 30 x 24mm
Included ON/OFF 24Vdc Power Supply.					
<b>MINIMAL TRACK 24V Remote Power Supply</b>	ON/OFF	0434-01-37	60W	24V	180 x 52 x 30mm
		0433-10-22	100W	24V	295 x 43 x 30mm





### DROP VOLTAGE TABLE

POWER (W)	CABLE SECTION (mm <sup>2</sup> )	CABLE LENGTH (m)			
		<5	<10	<20	<30
40	0,75	30	30	30	30
	1,5	30	30	30	30
60	0,75	30	30	20	10
	1,5	30	30	30	20
100	0,75	20	10	X	X
	1,5	20	20	10	X

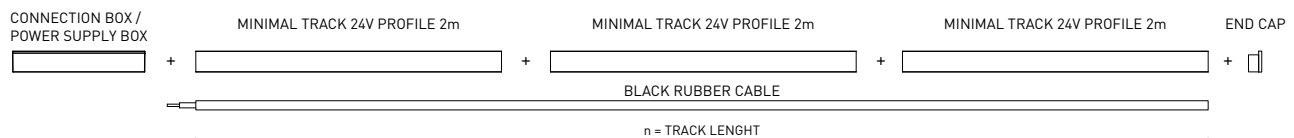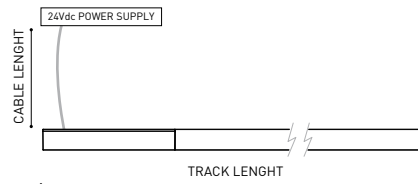

COLOUR | N ■ RAL 9005 | DIM OPTIONS PLEASE CONSULT



## MINIMAL TRACK 24V Suspension

Profile 2m	A384-02-00-	N
Profile 2m Initial feed kit	A400-02-10-	N
Profile 2m Middle feed kit*	A400-02-20-	N

\* Unidirectional Middle Feed.



## MINIMAL TRACK 24V Suspension


Rubber Cable n x 1m	A400-00-01-	N
---------------------	-------------	---

n = Total Length of System.

24V | Max. 4A


## MINIMAL TRACK 24V Suspension Straight Joiner

A400-00-02-	N
-------------	---



## MINIMAL TRACK 24V Suspension Kit


A400-02-04-	N
-------------	---



## MINIMAL TRACK 24V Suspension Corner 90°

A400-00-03-	N
-------------	---

Cable Length = 85mm.



## MINIMAL TRACK 24V Suspension End Caps

A400-00-05-	N
-------------	---

Two End Caps Included




## MINIMAL TRACK 24V Suspension Power Supply Box

	ON/OFF		P	V	D (A x B x C)
MINIMAL TRACK 24V Suspension	ON/OFF	A400-00-06-	40W	24V	280 x 30 x 36mm
Power Supply Box		A400-00-07-	100W	24V	280 x 30 x 36mm

Included ON/OFF 24Vdc Power Supply



## MINIMAL TRACK 24V Remote Power Supply

	ON/OFF		P	V	D (A x B x C)
MINIMAL TRACK 24V	ON/OFF	0434-01-37	60W	24V	180 x 52 x 30mm
Remote Power Supply		0433-10-22	100W	24V	295 x 43 x 30mm



## DROP VOLTAGE TABLE

POWER (W)	CABLE SECTION (mm <sup>2</sup> )	CABLE LENGTH (m)			
		<5	<10	<20	<30
40	0,75	30	30	30	30
	1,5	30	30	30	30
60	0,75	30	30	20	10
	1,5	30	30	30	20
100	0,75	20	10	X	X
	1,5	20	20	10	X

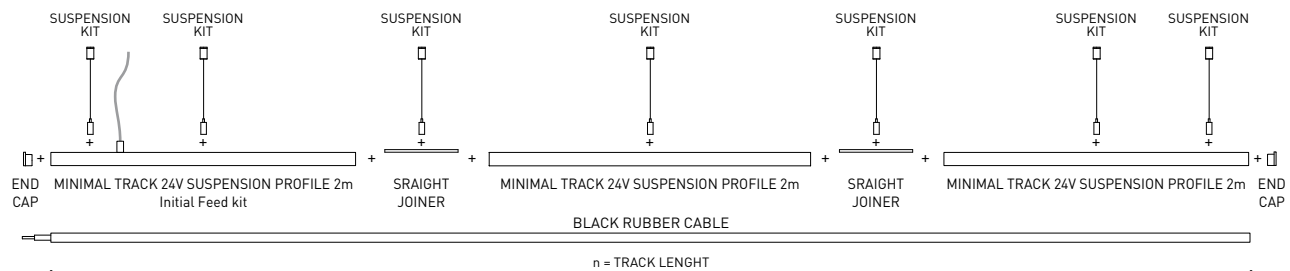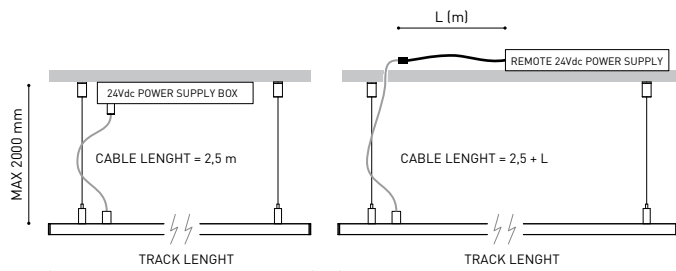

COLOUR | **N** ■ RAL 9005 | DIM OPTIONS PLEASE CONSULT



<b>Model</b>	Coaxial Timless
<b>Reference</b>	A023-00-03-   W   N
<b>Colour</b>	<b>W</b> <input type="checkbox"/> RAL 9016   <b>N</b> <input checked="" type="checkbox"/> RAL 9005
<b>Category</b>	Accessories

### PRODUCT

Coaxial Timless

A023-00-03- | W | N |


**W**  RAL 9016 | **N**  RAL 9005

Accessories

Fasteners not available



### DIMENSIONAL DRAWING




Wire Trimless Accessory is a collection of accessories for fitting tensioners and cables to Arkoslight luminaires suspended directly from the ceiling with any visible ceiling rose or fixings. This achieves a minimalist application with a visually tidy finish.

With Wire Trimless Accessory the items adjacent to the ceiling of the standard product (ceiling roses, fixings, driver boxes, etc.) are concealed by a simple recessed application.

Wire Trimless Accessory reduces the visual impact of the installation leading to extremely minimalist aesthetics. The wires come out of the ceiling material as a part of the structure. This detail creates a much purer, more essential layout, particular when several luminaires are fitted in an arrangement.



DIMENSIONS



ACCESSORIES



MINIMAL TRACK OPTIONS

AWARDS



PRODUCT

Name	FIT 27 24V 37° 2700K WT
Reference	A3990020WT
Color	Textured white
RAL	9016
Category	TRACKLIGHTS

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	440 Lm
Power	4,5 W
Power values of the system	5 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	37°
Lighting efficiency	82%
Efficacy	98 Lm/W
Current intensity	400 mA
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	III
Voltage	24 Vdc
Energy efficiency	A+
LED lifespan	L80B10 (Tj=85°C) >60.000h

OTHER DATA


Ingress Protection	IP20
Swivel angle	90°
Rotation angle	355°
Track type	Minimal Track
Weight	75 g.
Packaged weight	115 g.
Packaging dimensions	113 × 111 × 32 mm
Units per package	1
Materials	Aluminium / Polycarbonate




Fit 27 24V is a projector for the Minimal Track system. Cylindrical geometry and essential forms, it stands out for its minimalistic looking and its functionality as it can be orientated in any direction. The black perimeter around its mouth highlights its anti-glare vocation.





POLAR DIAGRAM

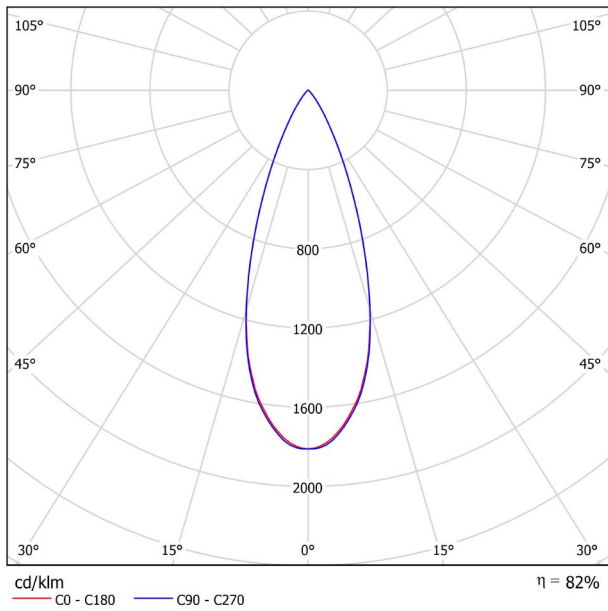

CONICAL DIAGRAM

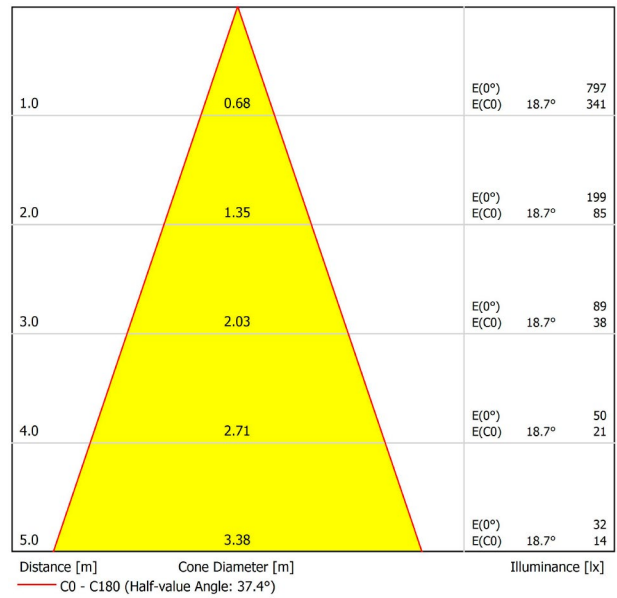



**MINIMAL TRACK 24V Profile 2m** A384-02-00- | N |



**MINIMAL TRACK 24V Rubber Cable n x 1m** A384-00-01- | N |


n = Total Length of System.

24V | Max. 4A

**MINIMAL TRACK 24V Corner 90° 1 Plane**

A384-00-02- | N |

Cable Length = 35mm.



**MINIMAL TRACK 24V End Cap**


A384-00-05- | N |



**MINIMAL TRACK 24V Corner 90° 1 Plane Rounded**


A384-00-03- | N |

Cable Length = 35mm.



**MINIMAL TRACK 24V Connection Box**


A384-00-06- | N |




**MINIMAL TRACK 24V Corner 90° 2 Planes**

A384-00-04- | N |

Cable Length = 100mm.





			P	V	D (A x B x C)
<b>MINIMAL TRACK 24V Power Supply Box</b>	ON/OFF	A384-00-07-   NT	40W	24V	280 x 30 x 24mm
		A384-00-08-   NT	100W	24V	280 x 30 x 24mm
Included ON/OFF 24Vdc Power Supply.					
<b>MINIMAL TRACK 24V Remote Power Supply</b>	ON/OFF	0434-01-37	60W	24V	180 x 52 x 30mm
		0433-10-22	100W	24V	295 x 43 x 30mm





### DROP VOLTAGE TABLE

POWER (W)	CABLE SECTION (mm <sup>2</sup> )	CABLE LENGTH (m)			
		<5	<10	<20	<30
40	0,75	30	30	30	30
	1,5	30	30	30	30
60	0,75	30	30	20	10
	1,5	30	30	30	20
100	0,75	20	10	X	X
	1,5	20	20	10	X

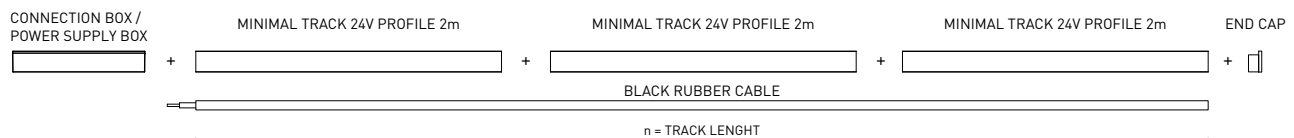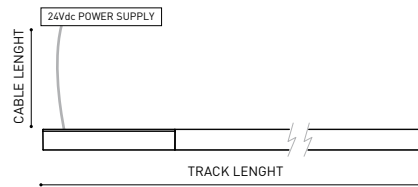

COLOUR | N ■ RAL 9005 | DIM OPTIONS PLEASE CONSULT



## MINIMAL TRACK 24V Suspension

Profile 2m	A384-02-00-	N
Profile 2m Initial feed kit	A400-02-10-	N
Profile 2m Middle feed kit*	A400-02-20-	N

\* Unidirectional Middle Feed.



## MINIMAL TRACK 24V Suspension


Rubber Cable n x 1m	A400-00-01-	N
---------------------	-------------	---

n = Total Length of System.

24V | Max. 4A |


## MINIMAL TRACK 24V Suspension Straight Joiner

A400-00-02-	N
-------------	---



## MINIMAL TRACK 24V Suspension Kit


A400-02-04-	N
-------------	---



## MINIMAL TRACK 24V Suspension Corner 90°

A400-00-03-	N
-------------	---

Cable Length = 85mm.



## MINIMAL TRACK 24V Suspension End Caps

A400-00-05-	N
-------------	---


Two End Caps Included



			P	V	D (A x B x C)
MINIMAL TRACK 24V Suspension	ON/OFF	A400-00-06-	40W	24V	280 x 30 x 36mm
Power Supply Box		A400-00-07-	100W	24V	280 x 30 x 36mm



Included ON/OFF 24Vdc Power Supply

MINIMAL TRACK 24V	ON/OFF	0434-01-37	60W	24V	180 x 52 x 30mm
Remote Power Supply		0433-10-22	100W	24V	295 x 43 x 30mm



## DROP VOLTAGE TABLE

POWER (W)	CABLE SECTION (mm <sup>2</sup> )	CABLE LENGTH (m)			
		<5	<10	<20	<30
40	0,75	30	30	30	30
	1,5	30	30	30	30
60	0,75	30	30	20	10
	1,5	30	30	30	20
100	0,75	20	10	X	X
	1,5	20	20	10	X

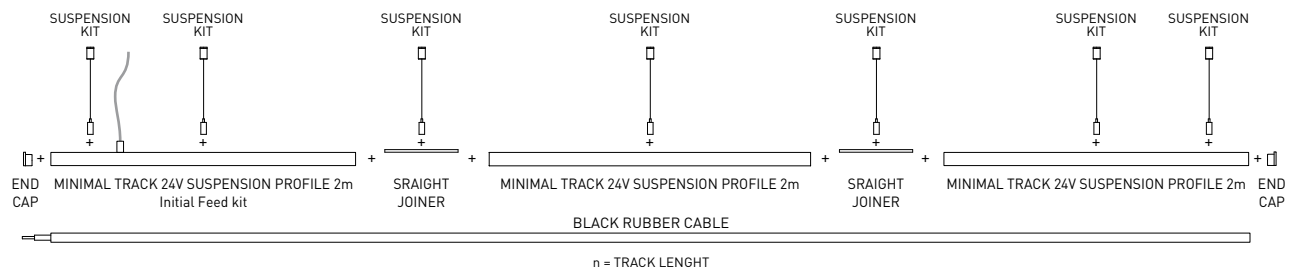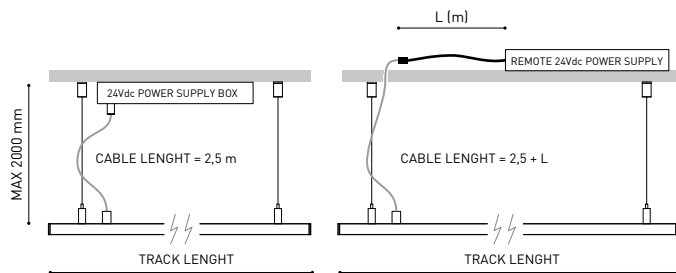

COLOUR | N ■ RAL 9005 | DIM OPTIONS PLEASE CONSULT



<b>Model</b>	Coaxial Timless
<b>Reference</b>	A023-00-03-   W   N
<b>Colour</b>	W <input type="checkbox"/> RAL 9016   N <input checked="" type="checkbox"/> RAL 9005
<b>Category</b>	Accessories

**PRODUCT**

Coaxial Timless

A023-00-03- | W | N |


W  RAL 9016 | N  RAL 9005

Accessories

Fasteners not available



**DIMENSIONAL DRAWING**




Wire Trimless Accessory is a collection of accessories for fitting tensioners and cables to Arkoslight luminaires suspended directly from the ceiling with any visible ceiling rose or fixings. This achieves a minimalist application with a visually tidy finish.

With Wire Trimless Accessory the items adjacent to the ceiling of the standard product (ceiling roses, fixings, driver boxes, etc.) are concealed by a simple recessed application.

Wire Trimless Accessory reduces the visual impact of the installation leading to extremely minimalist aesthetics. The wires come out of the ceiling material as a part of the structure. This detail creates a much purer, more essential layout, particular when several luminaires are fitted in an arrangement.



### DIMENSIONS



### ACCESSORIES



### MINIMAL TRACK OPTIONS

### AWARDS



### PRODUCT

Name	FIT 27 24V 37° 3000K G
Reference	A3990021G
Color	Gold
RAL	Paint of metallic nanoparticles
Category	TRACKLIGHTS

### LIGHTING INFORMATION

Light source	LED
Gross luminous flux	475 Lm
Power	4,5 W
Power values of the system	5 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	37°
Lighting efficiency	82%
Efficacy	106 Lm/W
Current intensity	400 mA
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	III
Voltage	24 Vdc
Energy efficiency	A+
LED lifespan	L80B10 (Tj=85°C) >60.000h


### OTHER DATA

Ingress Protection	IP20
Swivel angle	90°
Rotation angle	355°
Track type	Minimal Track
Weight	75 g.
Packaged weight	115 g.
Packaging dimensions	113 × 111 × 32 mm
Units per package	1
Materials	Aluminium / Polycarbonate






Fit 27 24V is a projector for the Minimal Track system. Cylindrical geometry and essential forms, it stands out for its minimalistic looking and its functionality as it can be orientated in any direction. The black perimeter around its mouth highlights its anti-glare vocation.

POLAR DIAGRAM

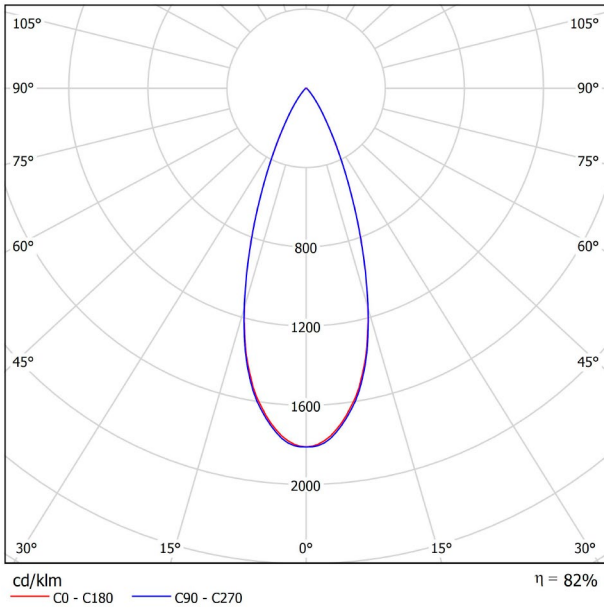

CONICAL DIAGRAM

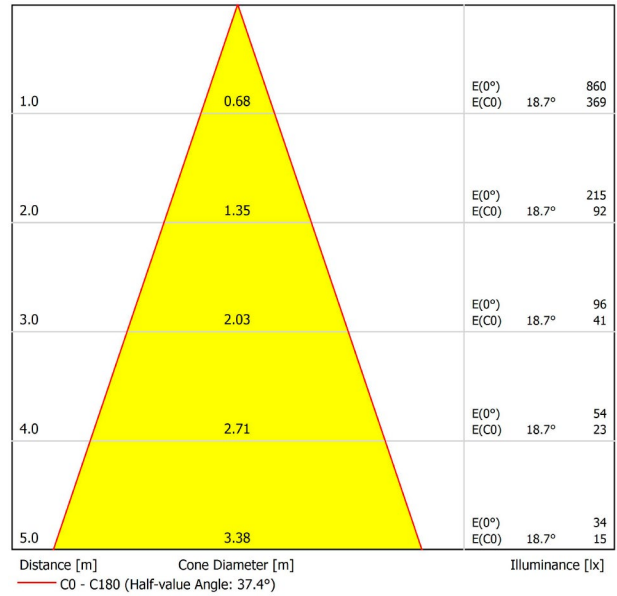



**MINIMAL TRACK 24V Profile 2m** A384-02-00- | N |



**MINIMAL TRACK 24V Rubber Cable n x 1m** A384-00-01- | N |


n = Total Length of System.

24V | Max. 4A

**MINIMAL TRACK 24V Corner 90° 1 Plane**

A384-00-02- | N |

Cable Length = 35mm.



**MINIMAL TRACK 24V End Cap**


A384-00-05- | N |



**MINIMAL TRACK 24V Corner 90° 1 Plane Rounded**


A384-00-03- | N |

Cable Length = 35mm.



**MINIMAL TRACK 24V Connection Box**


A384-00-06- | N |




**MINIMAL TRACK 24V Corner 90° 2 Planes**

A384-00-04- | N |

Cable Length = 100mm.





			P	V	D (A x B x C)
<b>MINIMAL TRACK 24V Power Supply Box</b>	ON/OFF	A384-00-07-   NT	40W	24V	280 x 30 x 24mm
		A384-00-08-   NT	100W	24V	280 x 30 x 24mm
Included ON/OFF 24Vdc Power Supply.					
<b>MINIMAL TRACK 24V Remote Power Supply</b>	ON/OFF	0434-01-37	60W	24V	180 x 52 x 30mm
		0433-10-22	100W	24V	295 x 43 x 30mm






### DROP VOLTAGE TABLE

POWER (W)	CABLE SECTION (mm <sup>2</sup> )	CABLE LENGTH (m)			
		<5	<10	<20	<30
40	0,75	30	30	30	30
	1,5	30	30	30	30
60	0,75	30	30	20	10
	1,5	30	30	30	20
100	0,75	20	10	X	X
	1,5	20	20	10	X

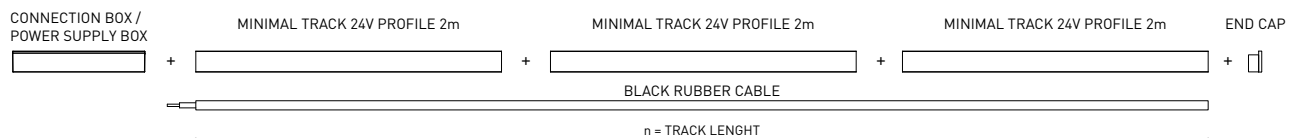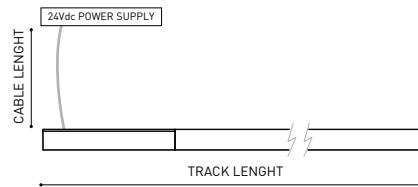

COLOUR | N ■ RAL 9005 | DIM OPTIONS PLEASE CONSULT



### MINIMAL TRACK 24V Suspension

Profile 2m	A384-02-00-	N
Profile 2m Initial feed kit	A400-02-10-	N
Profile 2m Middle feed kit*	A400-02-20-	N

\* Unidirectional Middle Feed.



### MINIMAL TRACK 24V Suspension


Rubber Cable n x 1m	A400-00-01-	N
---------------------	-------------	---

n = Total Length of System.

24V | Max. 4A |


### MINIMAL TRACK 24V Suspension Straight Joiner

A400-00-02-	N
-------------	---



### MINIMAL TRACK 24V Suspension Kit


A400-02-04-	N
-------------	---



### MINIMAL TRACK 24V Suspension Corner 90°

A400-00-03-	N
-------------	---

Cable Length = 85mm.



### MINIMAL TRACK 24V Suspension End Caps

A400-00-05-	N
-------------	---

Two End Caps Included




### MINIMAL TRACK 24V Suspension Power Supply Box

	ON/OFF		P	V	D (A x B x C)
MINIMAL TRACK 24V Suspension	ON/OFF	A400-00-06-	40W	24V	280 x 30 x 36mm
Power Supply Box		A400-00-07-	100W	24V	280 x 30 x 36mm

Included ON/OFF 24Vdc Power Supply



### MINIMAL TRACK 24V Remote Power Supply

	ON/OFF		P	V	D (A x B x C)
MINIMAL TRACK 24V	ON/OFF	0434-01-37	60W	24V	180 x 52 x 30mm
Remote Power Supply		0433-10-22	100W	24V	295 x 43 x 30mm



### DROP VOLTAGE TABLE

POWER (W)	CABLE SECTION (mm <sup>2</sup> )	CABLE LENGTH (m)			
		<5	<10	<20	<30
40	0,75	30	30	30	30
	1,5	30	30	30	30
60	0,75	30	30	20	10
	1,5	30	30	30	20
100	0,75	20	10	X	X
	1,5	20	20	10	X

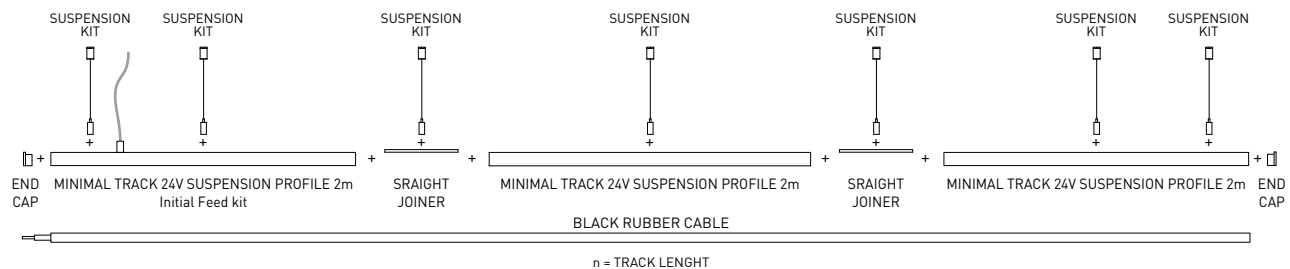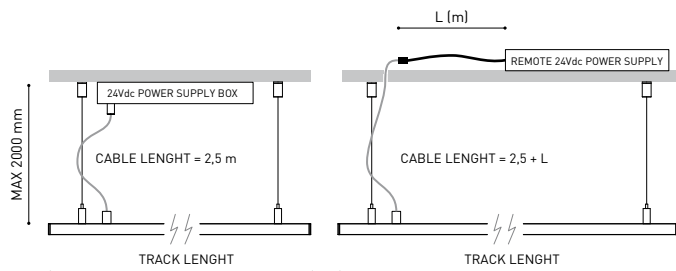

COLOUR | **N** ■ RAL 9005 | DIM OPTIONS PLEASE CONSULT



<b>Model</b>	Coaxial Timless
<b>Reference</b>	A023-00-03-   W   N
<b>Colour</b>	W <input type="checkbox"/> RAL 9016   N <input type="checkbox"/> RAL 9005
<b>Category</b>	Accessories

**PRODUCT**

Coaxial Timless

A023-00-03- | W | N |


W  RAL 9016 | N  RAL 9005

Accessories

Fasteners not available



**DIMENSIONAL DRAWING**



Wire Trimless Accessory is a collection of accessories for fitting tensioners and cables to Arkoslight luminaires suspended directly from the ceiling with any visible ceiling rose or fixings. This achieves a minimalist application with a visually tidy finish.

With Wire Trimless Accessory the items adjacent to the ceiling of the standard product (ceiling roses, fixings, driver boxes, etc.) are concealed by a simple recessed application.

Wire Trimless Accessory reduces the visual impact of the installation leading to extremely minimalist aesthetics. The wires come out of the ceiling material as a part of the structure. This detail creates a much purer, more essential layout, particular when several luminaires are fitted in an arrangement.