




DIMENSIONS



ACCESSORIES



ANTI-GLARE HONEYCOMB LOUVER

Name	FIT 50 RECESSED 15° 2700K NT
Reference	A3462110NT
Color	Textured black
RAL	9005
Category	CEILING RECESSED

PRODUCT

FIT 50 RECESSED 15° 2700K NT

A3462110NT

Textured black

9005

CEILING RECESSED

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	1040 Lm
Power	12 W
Power values of the system	13,33 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	Mac Adam Step 2
Light beam angle	15°
Lighting efficiency	85%
Efficacy	87 Lm/W
Current intensity	1050 mA
Control through bluetooth	Please Consult
Driver	Included
Emergency power supply	Please Consult
Electrical insulation class	<input type="checkbox"/>
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A
LED lifespan	L80B10 (Tj=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Recess measurements	Ø62 mm.
Swivel angle	90°
Rotation angle	350°
Weight	510 g.
Packaged weight	625 g.
Packaging dimensions	225 x 191 x 84 mm.
Units per package	1
Materials	Aluminium / Polycarbonate




Fit Recessed, is a spotlight for single recessed lighting solutions available in two sizes (Ø50 and Ø35). Cylindrical geometry and essential forms, it stands out for its minimalistic looking and its functionality as it can be orientated in any direction. The black perimeter around its mouth and its honeycomb accessory, highlights its anti-glare vocation.

POLAR DIAGRAM

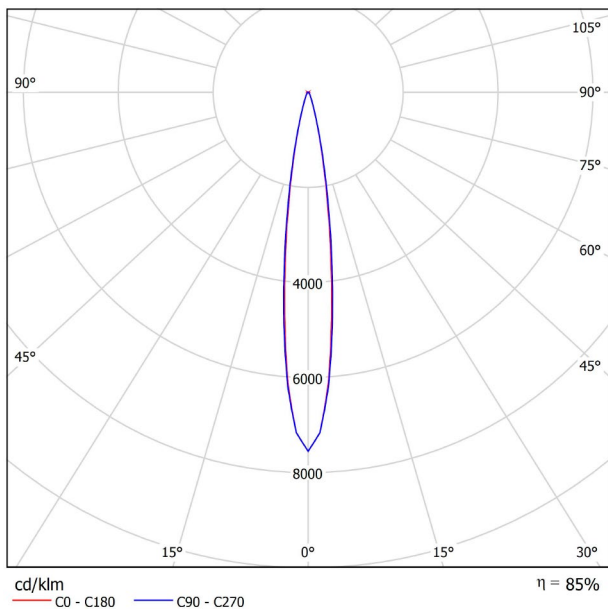

CONICAL DIAGRAM

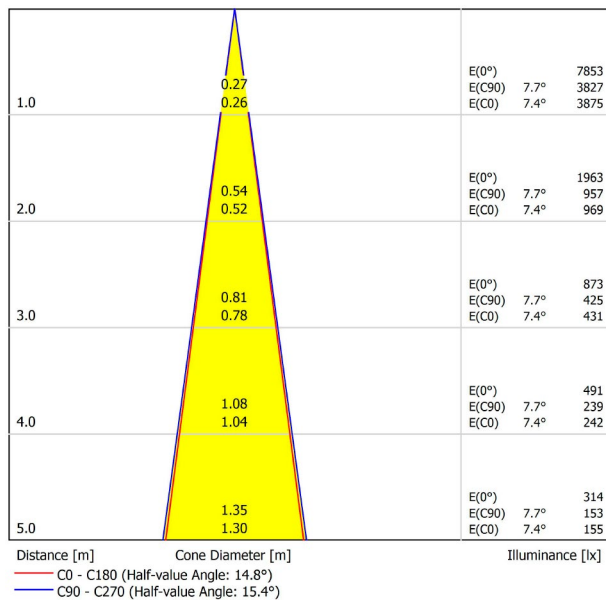



	PRODUCT
Model	Anti-glare Honeycomb Louver
Reference	A346-00-00
Category	Accessories


NOT SOLD SEPARATELY.



Accessory made up of louver in the shape of a honeycomb panel to reduce glare and the effects of direct rays of vision.



DIMENSIONS

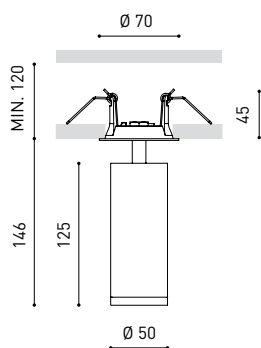

ACCESSORIES




ANTI-GLARE HONEYCOMB LOUVER

PRODUCT	
Name	FIT 50 RECESSED 15° 2700K WT
Reference	A3462110WT
Color	Textured white
RAL	9016
Category	CEILING RECESSED
LIGHTING INFORMATION	
Light source	LED
Gross luminous flux	1040 Lm
Power	12 W
Power values of the system	13,33 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	Mac Adam Step 2
Light beam angle	15°
Lighting efficiency	85%
Efficacy	87 Lm/W
Current intensity	1050 mA
Control through bluetooth	Please Consult
Driver	Included
Emergency power supply	Please Consult
Electrical insulation class	<input type="checkbox"/>
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A
LED lifespan	L80B10 (Tj=85°C) >60.000h
OTHER DATA	
Ingress Protection	IP20
Recess measurements	Ø62 mm.
Swivel angle	90°
Rotation angle	350°
Weight	510 g.
Packaged weight	625 g.
Packaging dimensions	225 x 191 x 84 mm.
Units per package	1
Materials	Aluminium / Polycarbonate





Fit Recessed, is a spotlight for single recessed lighting solutions available in two sizes (Ø50 and Ø35). Cylindrical geometry and essential forms, it stands out for its minimalistic looking and its functionality as it can be orientated in any direction. The black perimeter around its mouth and its honeycomb accessory, highlights its anti-glare vocation.

POLAR DIAGRAM

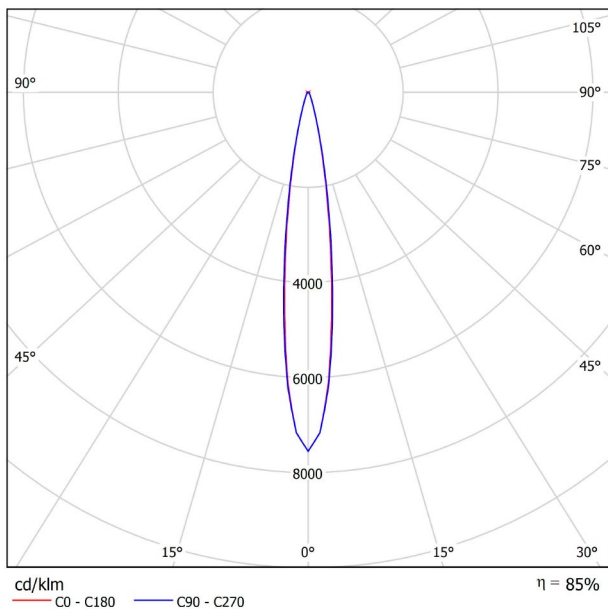

CONICAL DIAGRAM

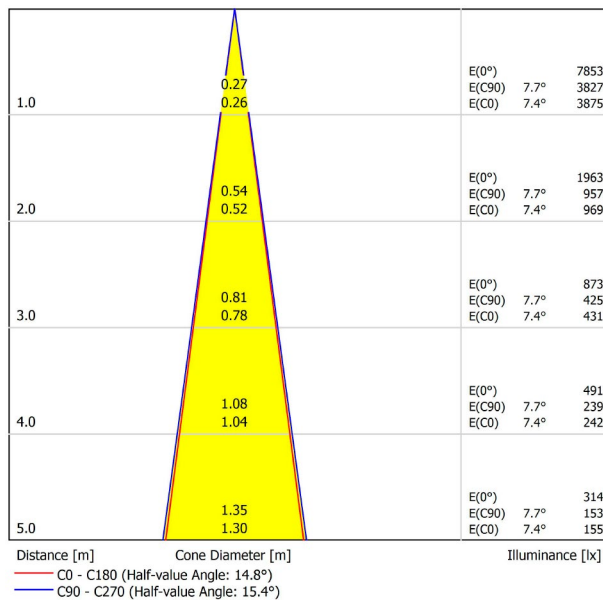



	PRODUCT
Model	Anti-glare Honeycomb Louver
Reference	A346-00-00
Category	Accessories


NOT SOLD SEPARATELY.



Accessory made up of louver in the shape of a honeycomb panel to reduce glare and the effects of direct rays of vision.



DIMENSIONS



ACCESSORIES




ANTI-GLARE HONEYCOMB LOUVER

PRODUCT	
Name	FIT 50 RECESSED 15° 3000K NT
Reference	A3462111NT
Color	Textured black
RAL	9005
Category	CEILING RECESSED
LIGHTING INFORMATION	
Light source	LED
Gross luminous flux	1120 Lm
Power	12 W
Power values of the system	13,33 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	Mac Adam Step 2
Light beam angle	15°
Lighting efficiency	85%
Efficacy	93 Lm/W
Current intensity	1050 mA
Control through bluetooth	Please Consult
Driver	Included
Emergency power supply	Please Consult
Electrical insulation class	<input type="checkbox"/>
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A
LED lifespan	L80B10 (Tj=85°C) >60.000h
OTHER DATA	
Ingress Protection	IP20
Recess measurements	Ø62 mm.
Swivel angle	90°
Rotation angle	350°
Weight	510 g.
Packaged weight	625 g.
Packaging dimensions	225 x 191 x 84 mm.
Units per package	1
Materials	Aluminium / Polycarbonate





Fit Recessed, is a spotlight for single recessed lighting solutions available in two sizes (Ø50 and Ø35). Cylindrical geometry and essential forms, it stands out for its minimalistic looking and its functionality as it can be orientated in any direction. The black perimeter around its mouth and its honeycomb accessory, highlights its anti-glare vocation.

POLAR DIAGRAM

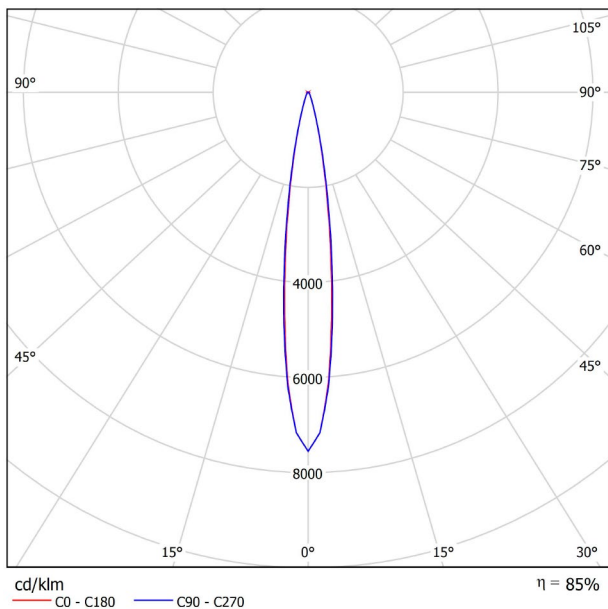

CONICAL DIAGRAM

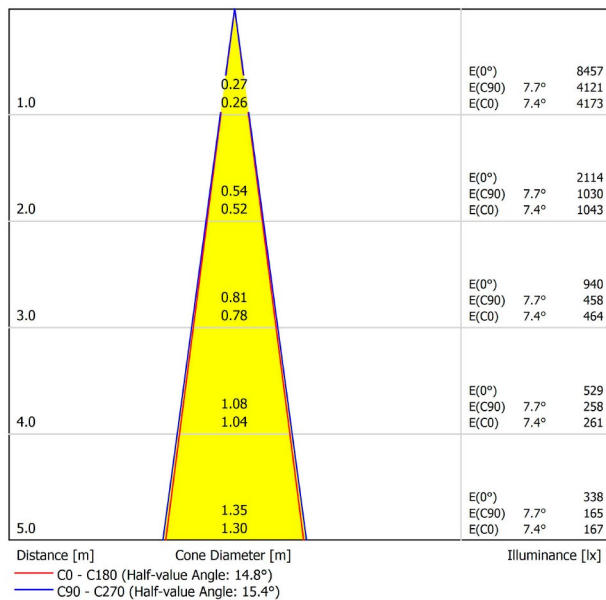



	PRODUCT
Model	Anti-glare Honeycomb Louver
Reference	A346-00-00
Category	Accessories


NOT SOLD SEPARATELY.



Accessory made up of louver in the shape of a honeycomb panel to reduce glare and the effects of direct rays of vision.



DIMENSIONS



ACCESSORIES



ANTI-GLARE HONEYCOMB LOUVER

Name	FIT 50 RECESSED 15° 3000K WT
Reference	A3462111WT
Color	Textured white
RAL	9016
Category	CEILING RECESSED

PRODUCT

Light source	LED
Gross luminous flux	1120 Lm
Power	12 W
Power values of the system	13,33 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	Mac Adam Step 2
Light beam angle	15°
Lighting efficiency	85%
Efficacy	93 Lm/W
Current intensity	1050 mA
Control through bluetooth	Please Consult
Driver	Included
Emergency power supply	Please Consult
Electrical insulation class	<input type="checkbox"/>
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A
LED lifespan	L80B10 (Tj=85°C) >60.000h

LIGHTING INFORMATION


Ingress Protection	IP20
Recess measurements	Ø62 mm.
Swivel angle	90°
Rotation angle	350°
Weight	510 g.
Packaged weight	625 g.
Packaging dimensions	225 x 191 x 84 mm.
Units per package	1
Materials	Aluminium / Polycarbonate

OTHER DATA





Fit Recessed, is a spotlight for single recessed lighting solutions available in two sizes (Ø50 and Ø35). Cylindrical geometry and essential forms, it stands out for its minimalistic looking and its functionality as it can be orientated in any direction. The black perimeter around its mouth and its honeycomb accessory, highlights its anti-glare vocation.

POLAR DIAGRAM

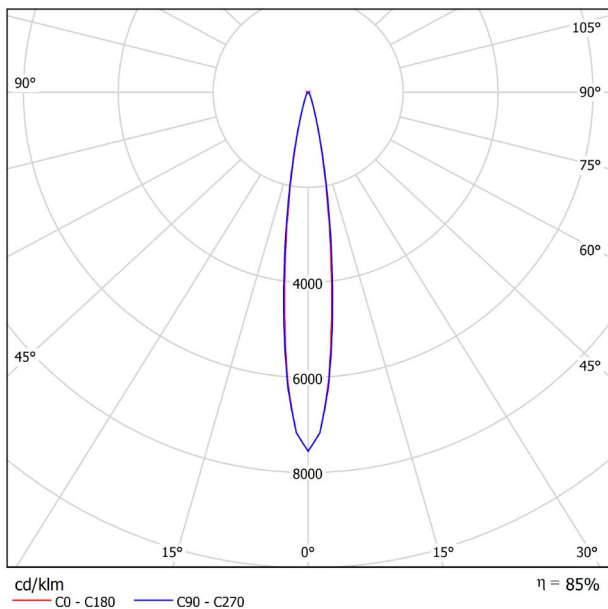

CONICAL DIAGRAM

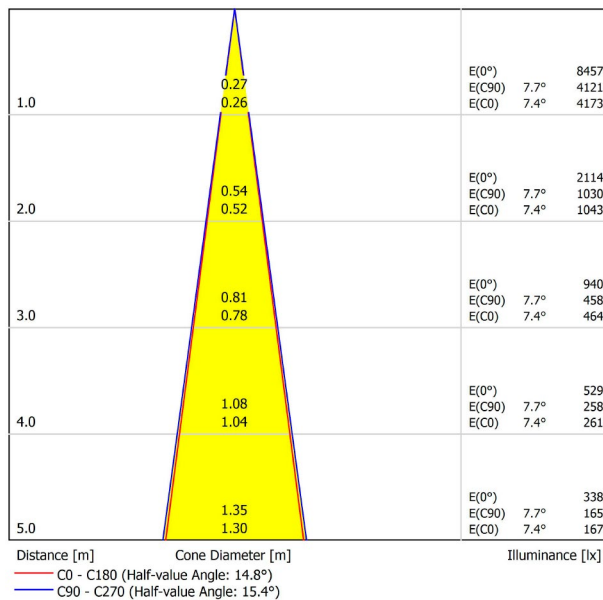



	PRODUCT
Model	Anti-glare Honeycomb Louver
Reference	A346-00-00
Category	Accessories


NOT SOLD SEPARATELY.



Accessory made up of louver in the shape of a honeycomb panel to reduce glare and the effects of direct rays of vision.



DIMENSIONS



ACCESSORIES



ANTI-GLARE HONEYCOMB LOUVER

Name	FIT 50 RECESSED 28° 2700K NT
Reference	A3462120NT
Color	Textured black
RAL	9005
Category	CEILING RECESSED

PRODUCT

Name	FIT 50 RECESSED 28° 2700K NT
Reference	A3462120NT
Color	Textured black
RAL	9005
Category	CEILING RECESSED

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	1040 Lm
Power	12 W
Power values of the system	13,33 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	Mac Adam Step 2
Light beam angle	28°
Lighting efficiency	82%
Efficacy	87 Lm/W
Current intensity	1050 mA
Control through bluetooth	Please Consult
Driver	Included
Emergency power supply	Please Consult
Electrical insulation class	<input type="checkbox"/>
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A
LED lifespan	L80B10 (Tj=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Recess measurements	Ø62 mm.
Swivel angle	90°
Rotation angle	350°
Weight	510 g.
Packaged weight	625 g.
Packaging dimensions	225 x 191 x 84 mm.
Units per package	1
Materials	Aluminium / Polycarbonate





Fit Recessed, is a spotlight for single recessed lighting solutions available in two sizes (Ø50 and Ø35). Cylindrical geometry and essential forms, it stands out for its minimalistic looking and its functionality as it can be orientated in any direction. The black perimeter around its mouth and its honeycomb accessory, highlights its anti-glare vocation.

POLAR DIAGRAM

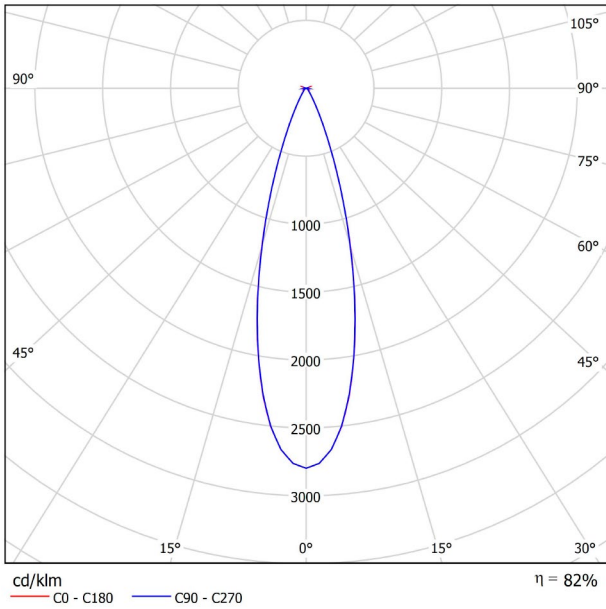

CONICAL DIAGRAM

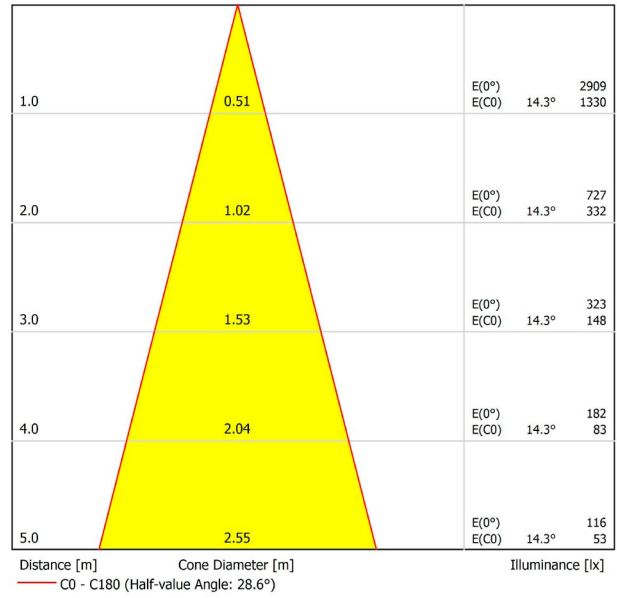



	PRODUCT
Model	Anti-glare Honeycomb Louver
Reference	A346-00-00
Category	Accessories


NOT SOLD SEPARATELY.



Accessory made up of louvre in the shape of a honeycomb panel to reduce glare and the effects of direct rays of vision.



DIMENSIONS



ACCESSORIES




ANTI-GLARE HONEYCOMB LOUVER

PRODUCT	
Name	FIT 50 RECESSED 28° 2700K WT
Reference	A3462120WT
Color	Textured white
RAL	9016
Category	CEILING RECESSED
LIGHTING INFORMATION	
Light source	LED
Gross luminous flux	1040 Lm
Power	12 W
Power values of the system	13,33 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	Mac Adam Step 2
Light beam angle	28°
Lighting efficiency	82%
Efficacy	87 Lm/W
Current intensity	1050 mA
Control through bluetooth	Please Consult
Driver	Included
Emergency power supply	Please Consult
Electrical insulation class	<input type="checkbox"/>
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A
LED lifespan	L80B10 (Tj=85°C) >60.000h
OTHER DATA	
Ingress Protection	IP20
Recess measurements	Ø62 mm.
Swivel angle	90°
Rotation angle	350°
Weight	510 g.
Packaged weight	625 g.
Packaging dimensions	225 x 191 x 84 mm.
Units per package	1
Materials	Aluminium / Polycarbonate





Fit Recessed, is a spotlight for single recessed lighting solutions available in two sizes (Ø50 and Ø35). Cylindrical geometry and essential forms, it stands out for its minimalistic looking and its functionality as it can be orientated in any direction. The black perimeter around its mouth and its honeycomb accessory, highlights its anti-glare vocation.

POLAR DIAGRAM

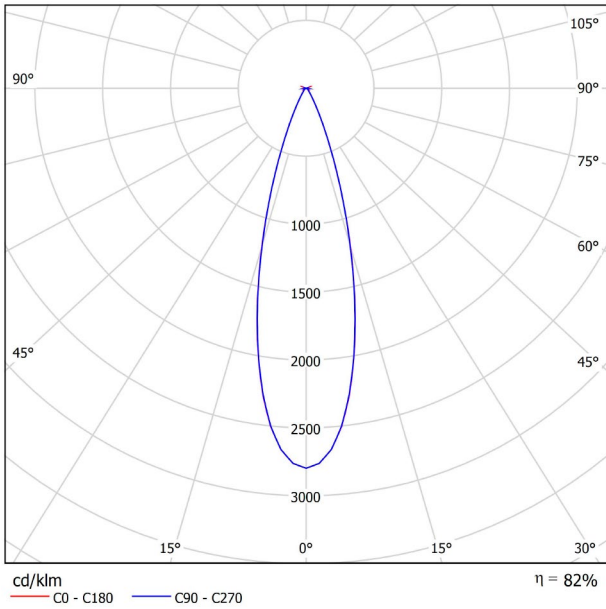

CONICAL DIAGRAM

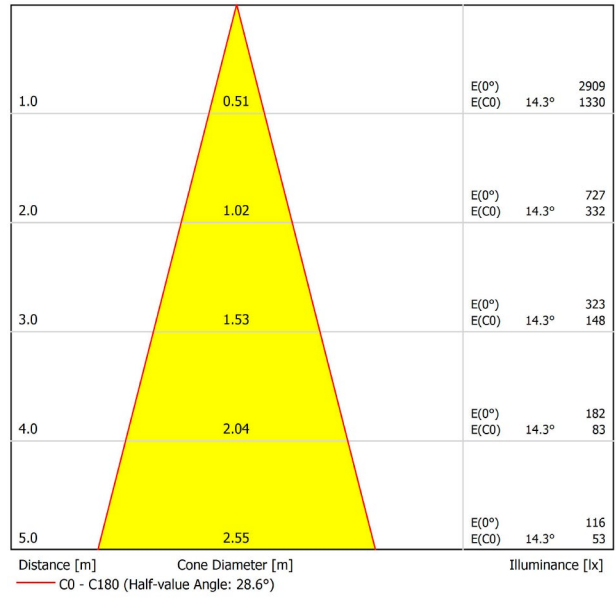



	PRODUCT
Model	Anti-glare Honeycomb Louver
Reference	A346-00-00
Category	Accessories


NOT SOLD SEPARATELY.



Accessory made up of louvre in the shape of a honeycomb panel to reduce glare and the effects of direct rays of vision.



DIMENSIONS



ACCESSORIES



ANTI-GLARE HONEYCOMB LOUVER

Name	FIT 50 RECESSED 28° 3000K NT
Reference	A3462121NT
Color	Textured black
RAL	9005
Category	CEILING RECESSED

PRODUCT

Name	FIT 50 RECESSED 28° 3000K NT
Reference	A3462121NT
Color	Textured black
RAL	9005
Category	CEILING RECESSED

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	1120 Lm
Power	12 W
Power values of the system	13,33 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	Mac Adam Step 2
Light beam angle	28°
Lighting efficiency	82%
Efficacy	93 Lm/W
Current intensity	1050 mA
Control through bluetooth	Please Consult
Driver	Included
Emergency power supply	Please Consult
Electrical insulation class	<input type="checkbox"/>
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A
LED lifespan	L80B10 (Tj=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Recess measurements	Ø62 mm.
Swivel angle	90°
Rotation angle	350°
Weight	510 g.
Packaged weight	625 g.
Packaging dimensions	225 x 191 x 84 mm.
Units per package	1
Materials	Aluminium / Polycarbonate





Fit Recessed, is a spotlight for single recessed lighting solutions available in two sizes (Ø50 and Ø35). Cylindrical geometry and essential forms, it stands out for its minimalistic looking and its functionality as it can be orientated in any direction. The black perimeter around its mouth and its honeycomb accessory, highlights its anti-glare vocation.

POLAR DIAGRAM

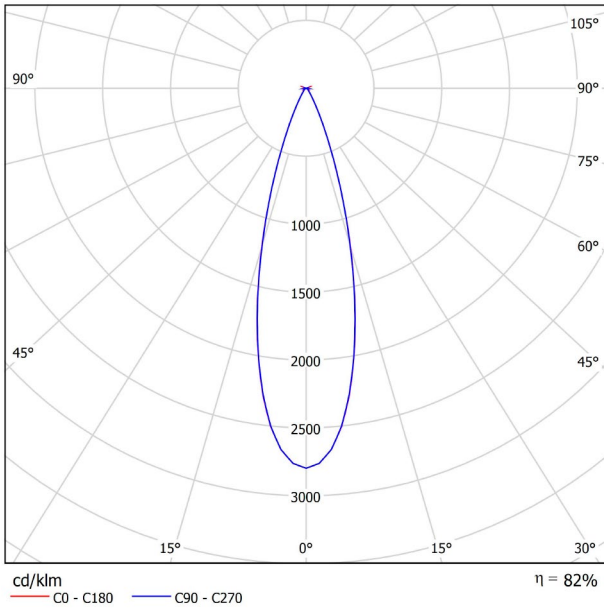


CONICAL DIAGRAM

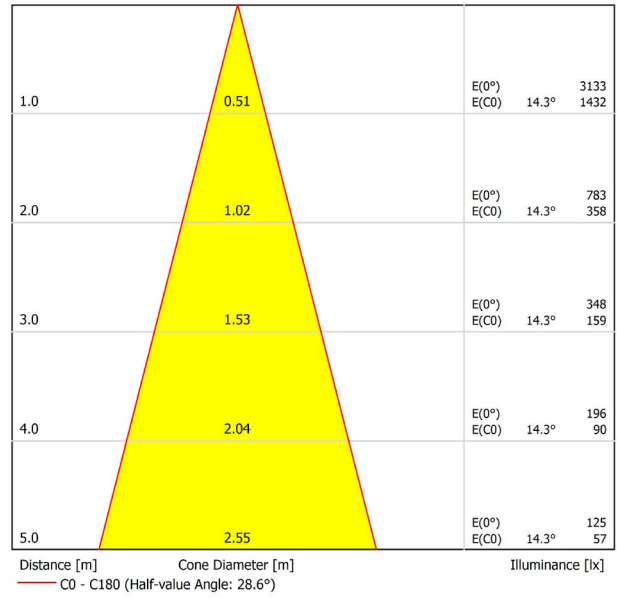




	PRODUCT
Model	Anti-glare Honeycomb Louver
Reference	A346-00-00
Category	Accessories

NOT SOLD SEPARATELY. 

Accessory made up of louvre in the shape of a honeycomb panel to reduce glare and the effects of direct rays of vision.



DIMENSIONS



ACCESSORIES




ANTI-GLARE HONEYCOMB LOUVER

PRODUCT	
Name	FIT 50 RECESSED 28° 3000K WT
Reference	A3462121WT
Color	Textured white
RAL	9016
Category	CEILING RECESSED
LIGHTING INFORMATION	
Light source	LED
Gross luminous flux	1120 Lm
Power	12 W
Power values of the system	13,33 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	Mac Adam Step 2
Light beam angle	28°
Lighting efficiency	82%
Efficacy	93 Lm/W
Current intensity	1050 mA
Control through bluetooth	Please Consult
Driver	Included
Emergency power supply	Please Consult
Electrical insulation class	<input type="checkbox"/>
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A
LED lifespan	L80B10 (Tj=85°C) >60.000h
OTHER DATA	
Ingress Protection	IP20
Recess measurements	Ø62 mm.
Swivel angle	90°
Rotation angle	350°
Weight	510 g.
Packaged weight	625 g.
Packaging dimensions	225 x 191 x 84 mm.
Units per package	1
Materials	Aluminium / Polycarbonate





Fit Recessed, is a spotlight for single recessed lighting solutions available in two sizes (Ø50 and Ø35). Cylindrical geometry and essential forms, it stands out for its minimalistic looking and its functionality as it can be orientated in any direction. The black perimeter around its mouth and its honeycomb accessory, highlights its anti-glare vocation.

POLAR DIAGRAM

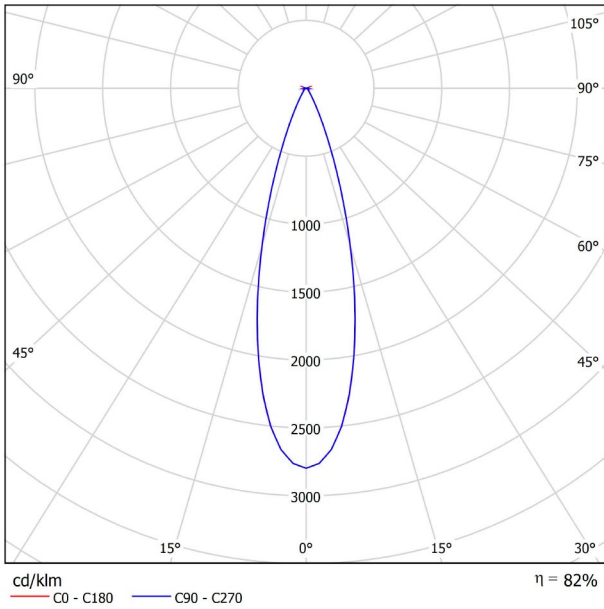

CONICAL DIAGRAM

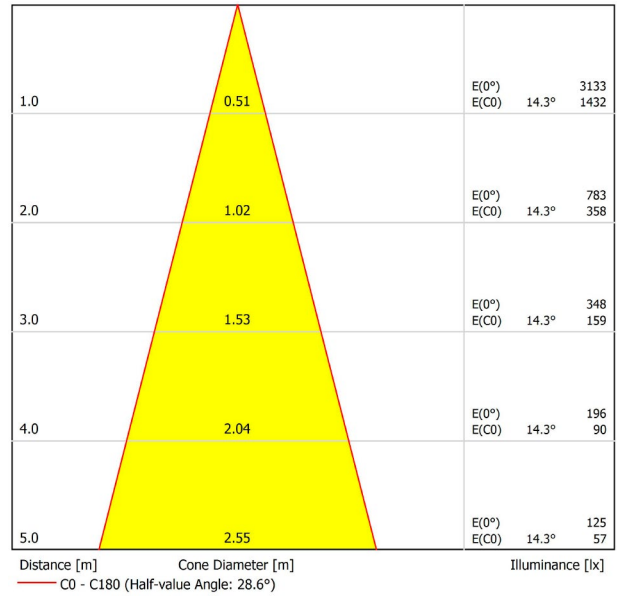



	PRODUCT
Model	Anti-glare Honeycomb Louver
Reference	A346-00-00
Category	Accessories


NOT SOLD SEPARATELY.



Accessory made up of louvre in the shape of a honeycomb panel to reduce glare and the effects of direct rays of vision.



DIMENSIONS



ACCESSORIES



ANTI-GLARE HONEYCOMB LOUVER

Name	FIT 50 RECESSED 47° 2700K NT
Reference	A3462130NT
Color	Textured black
RAL	9005
Category	CEILING RECESSED

PRODUCT

FIT 50 RECESSED 47° 2700K NT
A3462130NT
Textured black
9005
CEILING RECESSED

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	1040 Lm
Power	12 W
Power values of the system	13,33 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	Mac Adam Step 2
Light beam angle	47°
Lighting efficiency	80%
Efficacy	87 Lm/W
Current intensity	1050 mA
Control through bluetooth	Please Consult
Driver	Included
Emergency power supply	Please Consult
Electrical insulation class	<input type="checkbox"/>
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A
LED lifespan	L80B10 (Tj=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Recess measurements	Ø62 mm.
Swivel angle	90°
Rotation angle	350°
Weight	510 g.
Packaged weight	625 g.
Packaging dimensions	225 x 191 x 84 mm.
Units per package	1
Materials	Aluminium / Polycarbonate





Fit Recessed, is a spotlight for single recessed lighting solutions available in two sizes (Ø50 and Ø35). Cylindrical geometry and essential forms, it stands out for its minimalistic looking and its functionality as it can be orientated in any direction. The black perimeter around its mouth and its honeycomb accessory, highlights its anti-glare vocation.

POLAR DIAGRAM

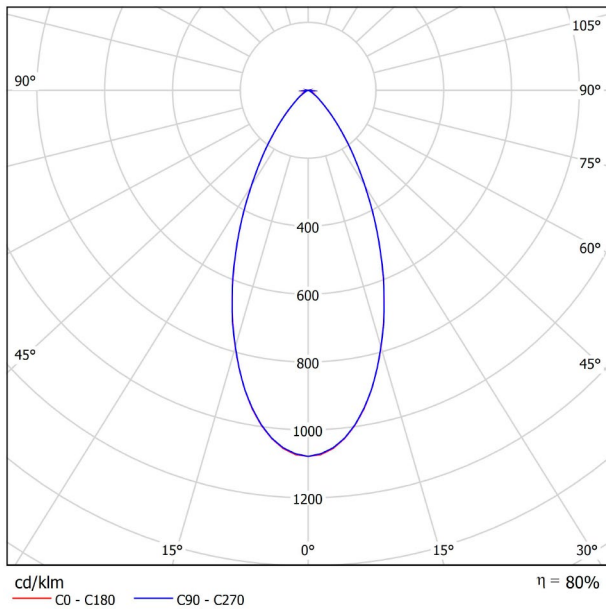

CONICAL DIAGRAM

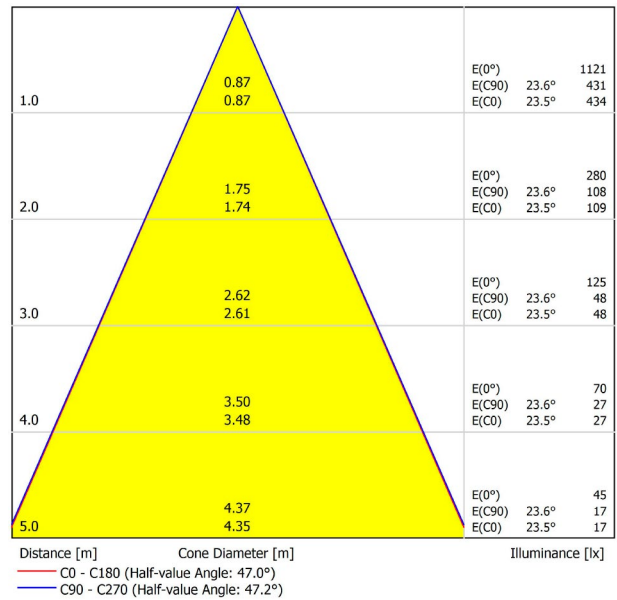



	PRODUCT
Model	Anti-glare Honeycomb Louver
Reference	A346-00-00
Category	Accessories


NOT SOLD SEPARATELY.



Accessory made up of louver in the shape of a honeycomb panel to reduce glare and the effects of direct rays of vision.



DIMENSIONS



ACCESSORIES



ANTI-GLARE HONEYCOMB LOUVER

Name	FIT 50 RECESSED 47° 2700K WT
Reference	A3462130WT
Color	Textured white
RAL	9016
Category	CEILING RECESSED

PRODUCT

Light source	LED
Gross luminous flux	1040 Lm
Power	12 W
Power values of the system	13,33 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	Mac Adam Step 2
Light beam angle	47°
Lighting efficiency	80%
Efficacy	87 Lm/W
Current intensity	1050 mA
Control through bluetooth	Please Consult
Driver	Included
Emergency power supply	Please Consult
Electrical insulation class	<input type="checkbox"/>
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A
LED lifespan	L80B10 (Tj=85°C) >60.000h

LIGHTING INFORMATION


Ingress Protection	IP20
Recess measurements	Ø62 mm.
Swivel angle	90°
Rotation angle	350°
Weight	510 g.
Packaged weight	625 g.
Packaging dimensions	225 x 191 x 84 mm.
Units per package	1
Materials	Aluminium / Polycarbonate

OTHER DATA





Fit Recessed, is a spotlight for single recessed lighting solutions available in two sizes (Ø50 and Ø35). Cylindrical geometry and essential forms, it stands out for its minimalistic looking and its functionality as it can be orientated in any direction. The black perimeter around its mouth and its honeycomb accessory, highlights its anti-glare vocation.

POLAR DIAGRAM

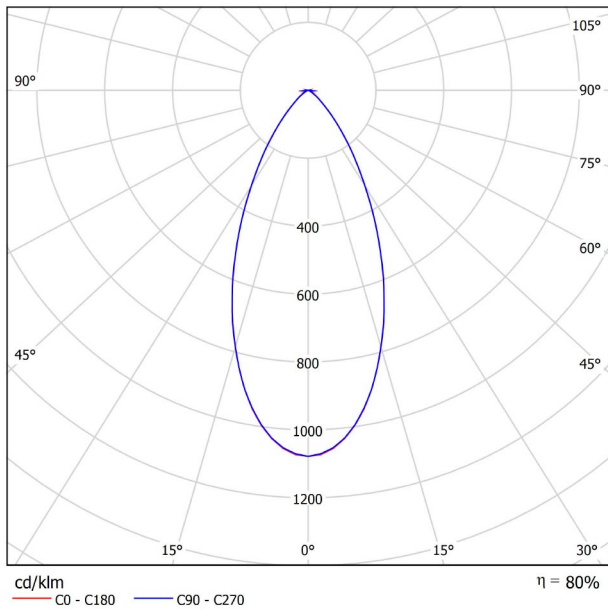

CONICAL DIAGRAM

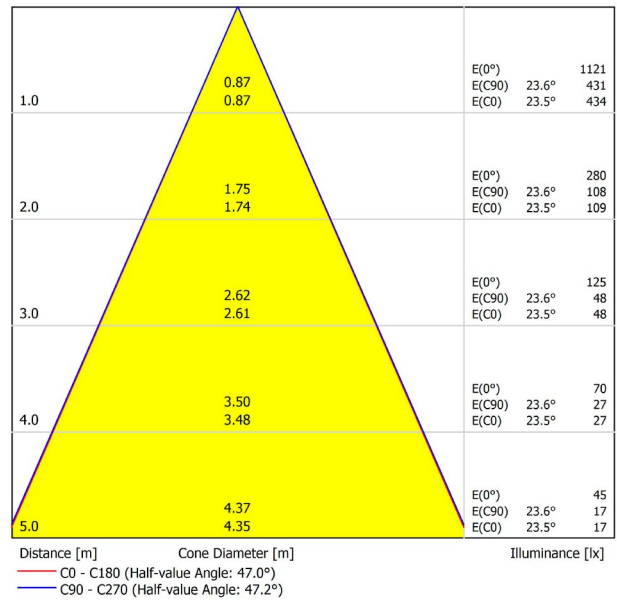



	PRODUCT
Model	Anti-glare Honeycomb Louver
Reference	A346-00-00
Category	Accessories


NOT SOLD SEPARATELY.



Accessory made up of louvre in the shape of a honeycomb panel to reduce glare and the effects of direct rays of vision.



DIMENSIONS



ACCESSORIES



ANTI-GLARE HONEYCOMB LOUVER

Name	FIT 50 RECESSED 47° 3000K NT
Reference	A3462131NT
Color	Textured black
RAL	9005
Category	CEILING RECESSED

PRODUCT

FIT 50 RECESSED 47° 3000K NT
A3462131NT
Textured black
9005
CEILING RECESSED

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	1120 Lm
Power	12 W
Power values of the system	13,33 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	Mac Adam Step 2
Light beam angle	47°
Lighting efficiency	80%
Efficacy	93 Lm/W
Current intensity	1050 mA
Control through bluetooth	Please Consult
Driver	Included
Emergency power supply	Please Consult
Electrical insulation class	<input type="checkbox"/>
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A
LED lifespan	L80B10 (Tj=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Recess measurements	Ø62 mm.
Swivel angle	90°
Rotation angle	350°
Weight	510 g.
Packaged weight	625 g.
Packaging dimensions	225 x 191 x 84 mm.
Units per package	1
Materials	Aluminium / Polycarbonate





Fit Recessed, is a spotlight for single recessed lighting solutions available in two sizes (Ø50 and Ø35). Cylindrical geometry and essential forms, it stands out for its minimalistic looking and its functionality as it can be orientated in any direction. The black perimeter around its mouth and its honeycomb accessory, highlights its anti-glare vocation.

POLAR DIAGRAM

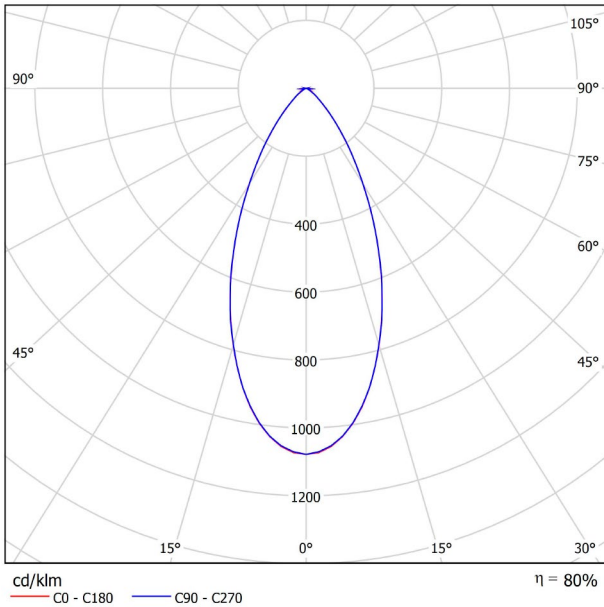

CONICAL DIAGRAM

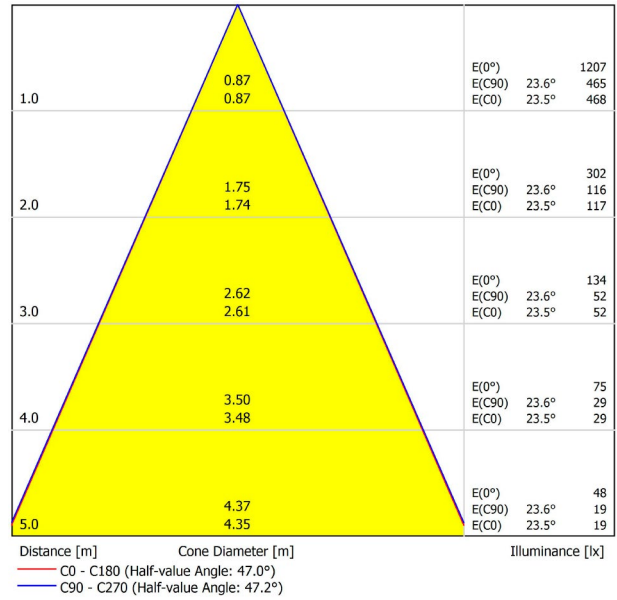



	PRODUCT
Model	Anti-glare Honeycomb Louver
Reference	A346-00-00
Category	Accessories


NOT SOLD SEPARATELY.



Accessory made up of louver in the shape of a honeycomb panel to reduce glare and the effects of direct rays of vision.



DIMENSIONS



ACCESSORIES




ANTI-GLARE HONEYCOMB LOUVER

PRODUCT	
Name	FIT 50 RECESSED 47° 3000K WT
Reference	A3462131WT
Color	Textured white
RAL	9016
Category	CEILING RECESSED
LIGHTING INFORMATION	
Light source	LED
Gross luminous flux	1120 Lm
Power	12 W
Power values of the system	13,33 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	Mac Adam Step 2
Light beam angle	47°
Lighting efficiency	80%
Efficacy	93 Lm/W
Current intensity	1050 mA
Control through bluetooth	Please Consult
Driver	Included
Emergency power supply	Please Consult
Electrical insulation class	<input type="checkbox"/>
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A
LED lifespan	L80B10 (Tj=85°C) >60.000h
OTHER DATA	
Ingress Protection	IP20
Recess measurements	Ø62 mm.
Swivel angle	90°
Rotation angle	350°
Weight	510 g.
Packaged weight	625 g.
Packaging dimensions	225 x 191 x 84 mm.
Units per package	1
Materials	Aluminium / Polycarbonate





Fit Recessed, is a spotlight for single recessed lighting solutions available in two sizes (Ø50 and Ø35). Cylindrical geometry and essential forms, it stands out for its minimalistic looking and its functionality as it can be orientated in any direction. The black perimeter around its mouth and its honeycomb accessory, highlights its anti-glare vocation.

POLAR DIAGRAM

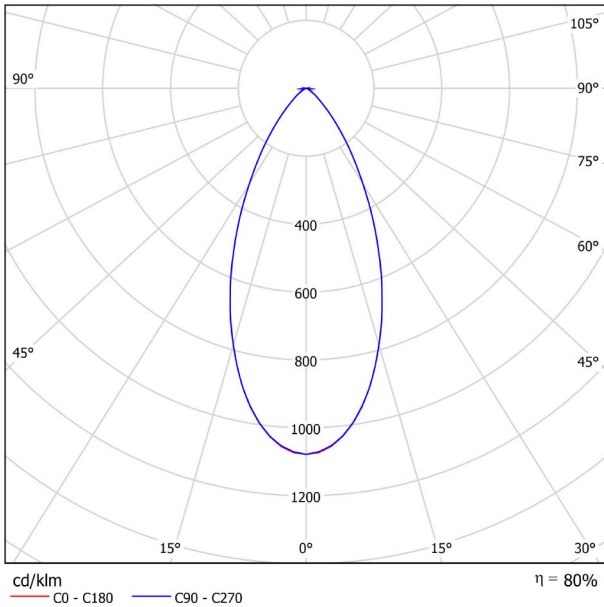

CONICAL DIAGRAM

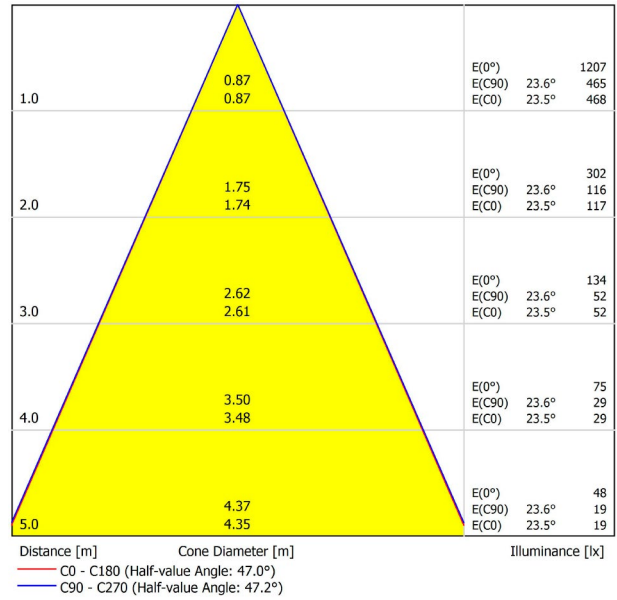



	PRODUCT
Model	Anti-glare Honeycomb Louver
Reference	A346-00-00
Category	Accessories


NOT SOLD SEPARATELY.



Accessory made up of louvre in the shape of a honeycomb panel to reduce glare and the effects of direct rays of vision.



DIMENSIONS



ACCESSORIES




ANTI-GLARE HONEYCOMB LOUVER

PRODUCT	
Name	FIT 50 RECESSED DIM DALI 15° 2700K NT
Reference	A3462210NT
Color	Textured black
RAL	9005
Category	CEILING RECESSED
LIGHTING INFORMATION	
Light source	LED
Gross luminous flux	1040 Lm
Power	12 W
Power values of the system	13,33 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	Mac Adam Step 2
Light beam angle	15°
Lighting efficiency	85%
Efficacy	87 Lm/W
Current intensity	1050 mA
Dimming	DALI
Control through bluetooth	Please Consult
Driver	Included
Emergency power supply	Please Consult
Electrical insulation class	<input type="checkbox"/>
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A
LED lifespan	L80B10 (Tj=85°C) >60.000h
OTHER DATA	
Ingress Protection	IP20
Recess measurements	Ø62 mm.
Swivel angle	90°
Rotation angle	350°
Weight	515 g.
Packaged weight	630 g.
Packaging dimensions	225 x 191 x 84 mm.
Units per package	1
Materials	Aluminium / Polycarbonate





Fit Recessed, is a spotlight for single recessed lighting solutions available in two sizes (Ø50 and Ø35). Cylindrical geometry and essential forms, it stands out for its minimalistic looking and its functionality as it can be orientated in any direction. The black perimeter around its mouth and its honeycomb accessory, highlights its anti-glare vocation.

POLAR DIAGRAM

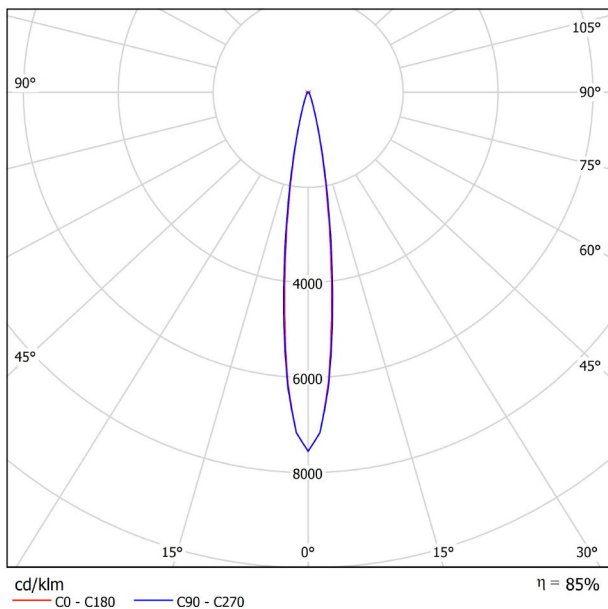

CONICAL DIAGRAM

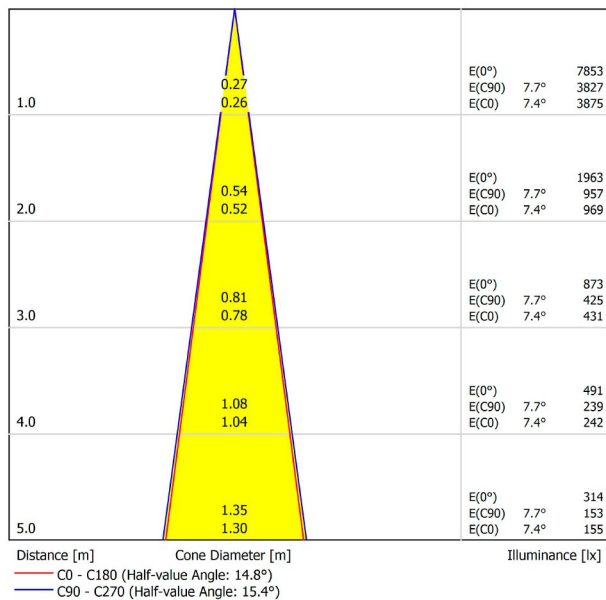




	PRODUCT
Model	Anti-glare Honeycomb Louver
Reference	A346-00-00
Category	Accessories
	NOT SOLD SEPARATELY.



Accessory made up of louvre in the shape of a honeycomb panel to reduce glare and the effects of direct rays of vision.



DIMENSIONS



ACCESSORIES




ANTI-GLARE HONEYCOMB LOUVER

PRODUCT	
Name	FIT 50 RECESSED DIM DALI 15° 2700K WT
Reference	A3462210WT
Color	Textured white
RAL	9016
Category	CEILING RECESSED
LIGHTING INFORMATION	
Light source	LED
Gross luminous flux	1040 Lm
Power	12 W
Power values of the system	13,33 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	Mac Adam Step 2
Light beam angle	15°
Lighting efficiency	85%
Efficacy	87 Lm/W
Current intensity	1050 mA
Dimming	DALI
Control through bluetooth	Please Consult
Driver	Included
Emergency power supply	Please Consult
Electrical insulation class	<input type="checkbox"/>
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A
LED lifespan	L80B10 (Tj=85°C) >60.000h
OTHER DATA	
Ingress Protection	IP20
Recess measurements	Ø62 mm.
Swivel angle	90°
Rotation angle	350°
Weight	515 g.
Packaged weight	630 g.
Packaging dimensions	225 x 191 x 84 mm.
Units per package	1
Materials	Aluminium / Polycarbonate





Fit Recessed, is a spotlight for single recessed lighting solutions available in two sizes (Ø50 and Ø35). Cylindrical geometry and essential forms, it stands out for its minimalistic looking and its functionality as it can be oriented in any direction. The black perimeter around its mouth and its honeycomb accessory, highlights its anti-glare vocation.

POLAR DIAGRAM

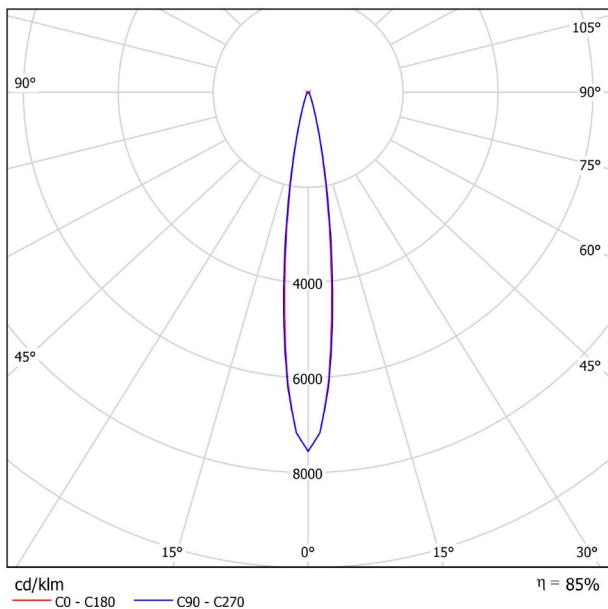

CONICAL DIAGRAM

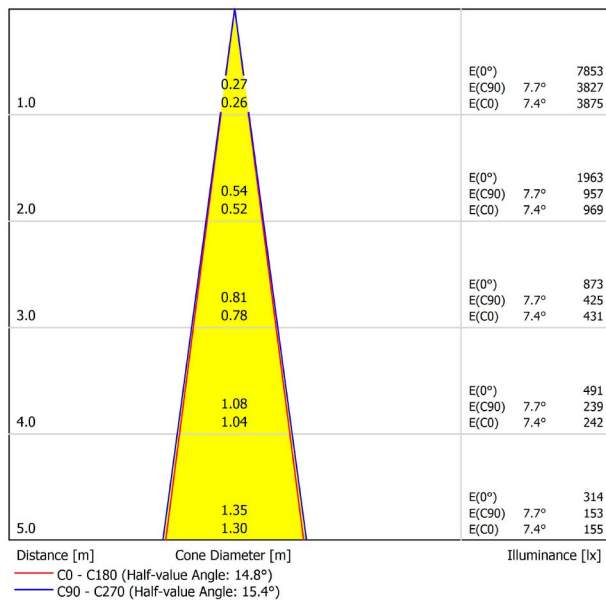



	PRODUCT
Model	Anti-glare Honeycomb Louver
Reference	A346-00-00
Category	Accessories


NOT SOLD SEPARATELY.



Accessory made up of louver in the shape of a honeycomb panel to reduce glare and the effects of direct rays of vision.



DIMENSIONS



ACCESSORIES



ANTI-GLARE HONEYCOMB LOUVER

PRODUCT

Name	FIT 50 RECESSED DIM DALI 15° 3000K NT
Reference	A3462211NT
Color	Textured black
RAL	9005
Category	CEILING RECESSED

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	1120 Lm
Power	12 W
Power values of the system	13,33 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	Mac Adam Step 2
Light beam angle	15°
Lighting efficiency	85%
Efficacy	93 Lm/W
Current intensity	1050 mA
Dimming	DALI
Control through bluetooth	Please Consult
Driver	Included
Emergency power supply	Please Consult
Electrical insulation class	<input type="checkbox"/>
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A
LED lifespan	L80B10 (Tj=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Recess measurements	Ø62 mm.
Swivel angle	90°
Rotation angle	350°
Weight	515 g.
Packaged weight	630 g.
Packaging dimensions	225 x 191 x 84 mm.
Units per package	1
Materials	Aluminium / Polycarbonate





Fit Recessed, is a spotlight for single recessed lighting solutions available in two sizes (ø50 and ø35). Cylindrical geometry and essential forms, it stands out for its minimalistic looking and its functionality as it can be orientated in any direction. The black perimeter around its mouth and its honeycomb accessory, highlights its anti-glare vocation.

POLAR DIAGRAM

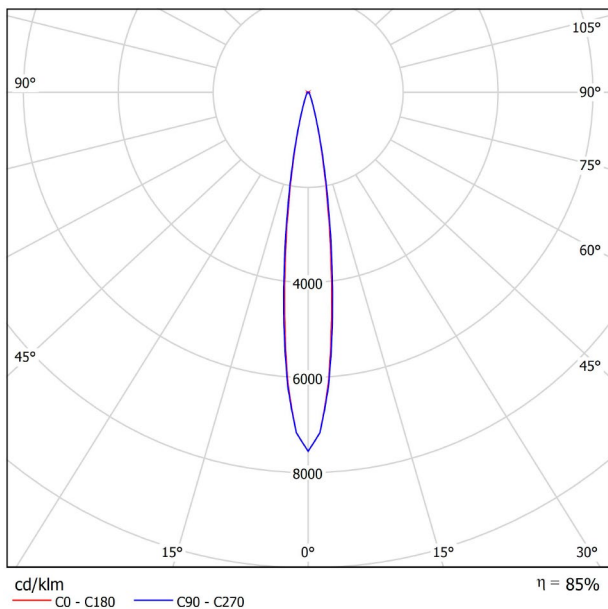

CONICAL DIAGRAM

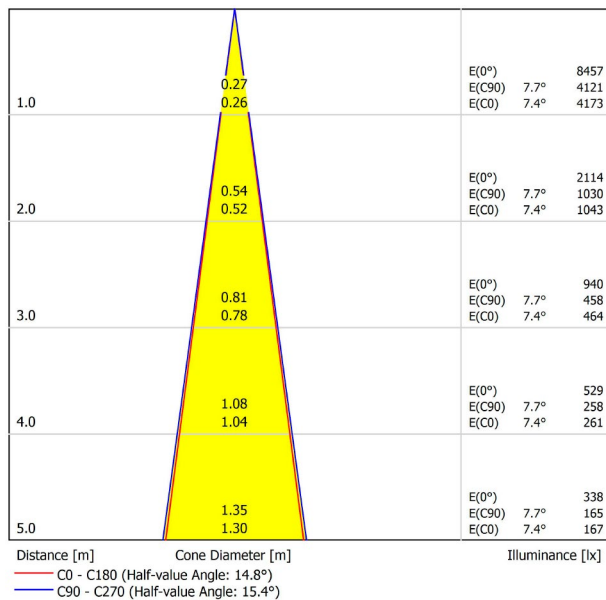



	PRODUCT
Model	Anti-glare Honeycomb Louver
Reference	A346-00-00
Category	Accessories


NOT SOLD SEPARATELY.



Accessory made up of louver in the shape of a honeycomb panel to reduce glare and the effects of direct rays of vision.



DIMENSIONS

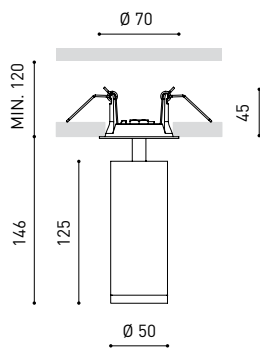

ACCESSORIES



ANTI-GLARE HONEYCOMB LOUVER

Name	FIT 50 RECESSED DIM DALI 15° 3000K WT
Reference	A3462211WT
Color	Textured white
RAL	9016
Category	CEILING RECESSED

PRODUCT

Name	FIT 50 RECESSED DIM DALI 15° 3000K WT
Reference	A3462211WT
Color	Textured white
RAL	9016
Category	CEILING RECESSED

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	1120 Lm
Power	12 W
Power values of the system	13,33 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	Mac Adam Step 2
Light beam angle	15°
Lighting efficiency	85%
Efficacy	93 Lm/W
Current intensity	1050 mA
Dimming	DALI
Control through bluetooth	Please Consult
Driver	Included
Emergency power supply	Please Consult
Electrical insulation class	<input type="checkbox"/>
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A
LED lifespan	L80B10 (Tj=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Recess measurements	Ø62 mm.
Swivel angle	90°
Rotation angle	350°
Weight	515 g.
Packaged weight	630 g.
Packaging dimensions	225 x 191 x 84 mm.
Units per package	1
Materials	Aluminium / Polycarbonate





Fit Recessed, is a spotlight for single recessed lighting solutions available in two sizes (ø50 and ø35). Cylindrical geometry and essential forms, it stands out for its minimalistic looking and its functionality as it can be orientated in any direction. The black perimeter around its mouth and its honeycomb accessory, highlights its anti-glare vocation.

POLAR DIAGRAM

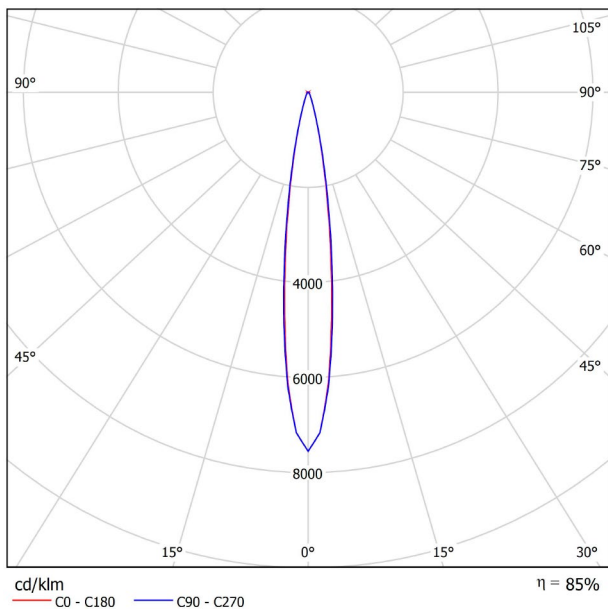

CONICAL DIAGRAM

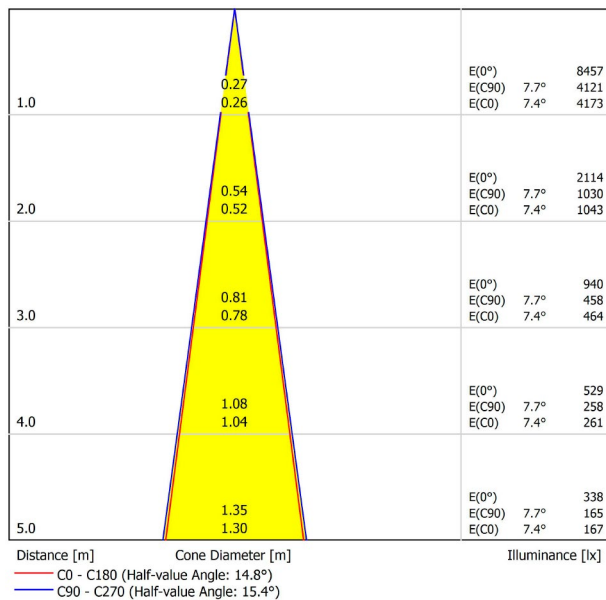

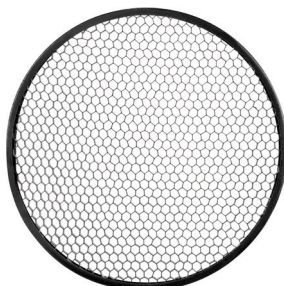

	PRODUCT
Model	Anti-glare Honeycomb Louver
Reference	A346-00-00
Category	Accessories


NOT SOLD SEPARATELY.



Accessory made up of louver in the shape of a honeycomb panel to reduce glare and the effects of direct rays of vision.



DIMENSIONS



ACCESSORIES



ANTI-GLARE HONEYCOMB LOUVER

PRODUCT

Name	FIT 50 RECESSED DIM DALI 28° 2700K NT
Reference	A3462220NT
Color	Textured black
RAL	9005
Category	CEILING RECESSED

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	1040 Lm
Power	12 W
Power values of the system	13,33 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	Mac Adam Step 2
Light beam angle	28°
Lighting efficiency	82%
Efficacy	87 Lm/W
Current intensity	1050 mA
Dimming	DALI
Control through bluetooth	Please Consult
Driver	Included
Emergency power supply	Please Consult
Electrical insulation class	<input type="checkbox"/>
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A
LED lifespan	L80B10 (Tj=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Recess measurements	Ø62 mm.
Swivel angle	90°
Rotation angle	350°
Weight	515 g.
Packaged weight	630 g.
Packaging dimensions	225 x 191 x 84 mm.
Units per package	1
Materials	Aluminium / Polycarbonate





Fit Recessed, is a spotlight for single recessed lighting solutions available in two sizes (Ø50 and Ø35). Cylindrical geometry and essential forms, it stands out for its minimalistic looking and its functionality as it can be orientated in any direction. The black perimeter around its mouth and its honeycomb accessory, highlights its anti-glare vocation.

POLAR DIAGRAM

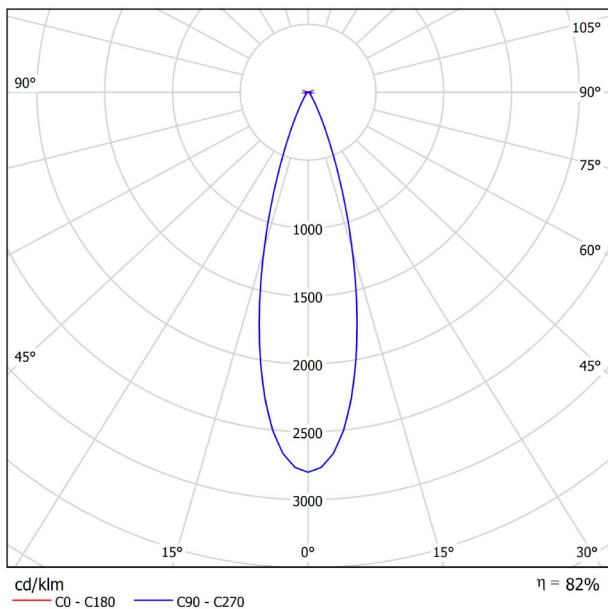

CONICAL DIAGRAM

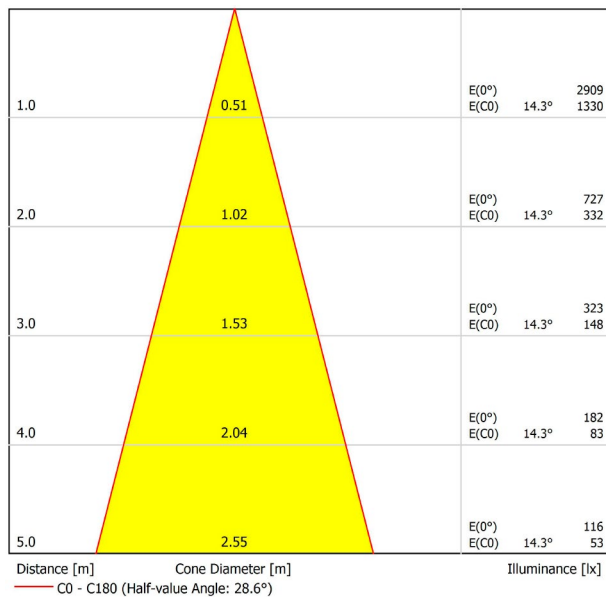



	PRODUCT
Model	Anti-glare Honeycomb Louver
Reference	A346-00-00
Category	Accessories


NOT SOLD SEPARATELY.



Accessory made up of louvre in the shape of a honeycomb panel to reduce glare and the effects of direct rays of vision.



DIMENSIONS



ACCESSORIES



ANTI-GLARE HONEYCOMB LOUVER

PRODUCT

Name	FIT 50 RECESSED DIM DALI 28° 2700K WT
Reference	A3462220WT
Color	Textured white
RAL	9016
Category	CEILING RECESSED

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	1040 Lm
Power	12 W
Power values of the system	13,33 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	Mac Adam Step 2
Light beam angle	28°
Lighting efficiency	82%
Efficacy	87 Lm/W
Current intensity	1050 mA
Dimming	DALI
Control through bluetooth	Please Consult
Driver	Included
Emergency power supply	Please Consult
Electrical insulation class	<input type="checkbox"/>
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A
LED lifespan	L80B10 (Tj=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Recess measurements	Ø62 mm.
Swivel angle	90°
Rotation angle	350°
Weight	515 g.
Packaged weight	630 g.
Packaging dimensions	225 x 191 x 84 mm.
Units per package	1
Materials	Aluminium / Polycarbonate





Fit Recessed, is a spotlight for single recessed lighting solutions available in two sizes (Ø50 and Ø35). Cylindrical geometry and essential forms, it stands out for its minimalistic looking and its functionality as it can be orientated in any direction. The black perimeter around its mouth and its honeycomb accessory, highlights its anti-glare vocation.

POLAR DIAGRAM

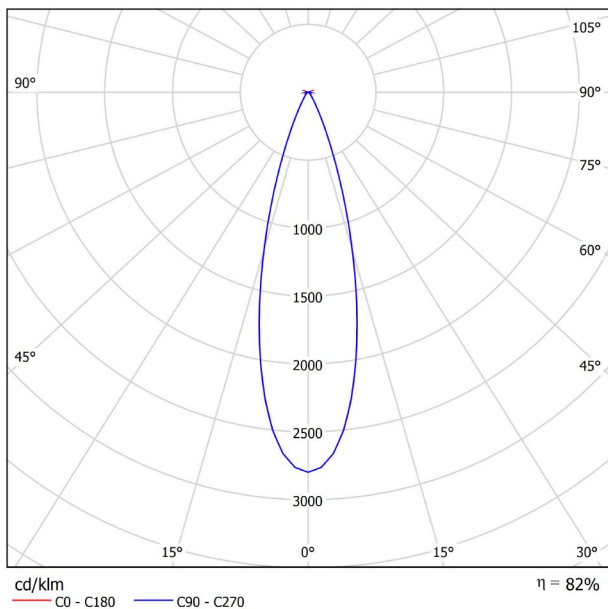

CONICAL DIAGRAM

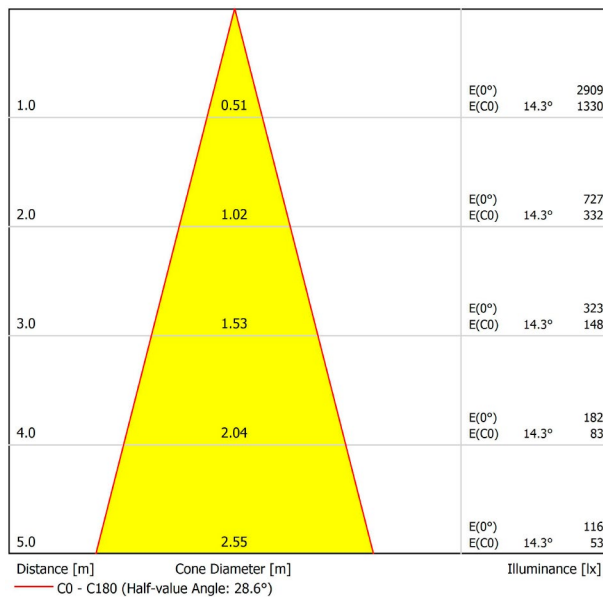



	PRODUCT
Model	Anti-glare Honeycomb Louver
Reference	A346-00-00
Category	Accessories


NOT SOLD SEPARATELY.



Accessory made up of louver in the shape of a honeycomb panel to reduce glare and the effects of direct rays of vision.



DIMENSIONS



ACCESSORIES



ANTI-GLARE HONEYCOMB LOUVER

Name	FIT 50 RECESSED DIM DALI 28° 3000K NT
Reference	A3462221NT
Color	Textured black
RAL	9005
Category	CEILING RECESSED

PRODUCT

FIT 50 RECESSED DIM DALI 28° 3000K NT
A3462221NT
Textured black
9005
CEILING RECESSED

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	1120 Lm
Power	12 W
Power values of the system	13,33 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	Mac Adam Step 2
Light beam angle	28°
Lighting efficiency	82%
Efficacy	93 Lm/W
Current intensity	1050 mA
Dimming	DALI
Control through bluetooth	Please Consult
Driver	Included
Emergency power supply	Please Consult
Electrical insulation class	<input type="checkbox"/>
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A
LED lifespan	L80B10 (Tj=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Recess measurements	Ø62 mm.
Swivel angle	90°
Rotation angle	350°
Weight	515 g.
Packaged weight	630 g.
Packaging dimensions	225 x 191 x 84 mm.
Units per package	1
Materials	Aluminium / Polycarbonate





Fit Recessed, is a spotlight for single recessed lighting solutions available in two sizes (ø50 and ø35). Cylindrical geometry and essential forms, it stands out for its minimalistic looking and its functionality as it can be orientated in any direction. The black perimeter around its mouth and its honeycomb accessory, highlights its anti-glare vocation.

POLAR DIAGRAM

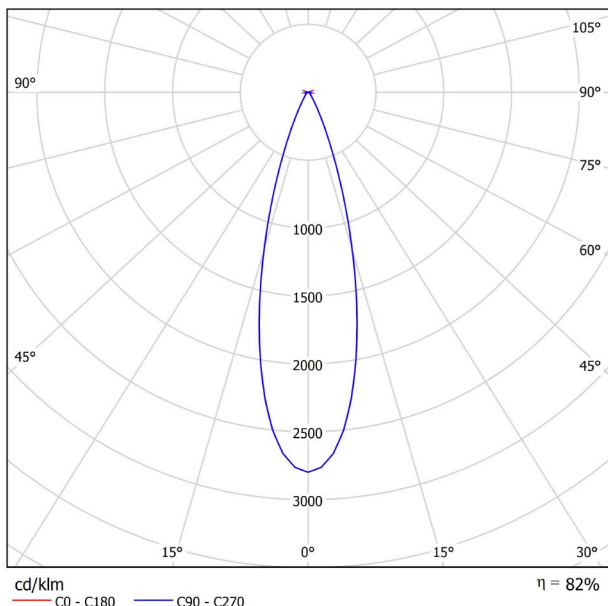

CONICAL DIAGRAM

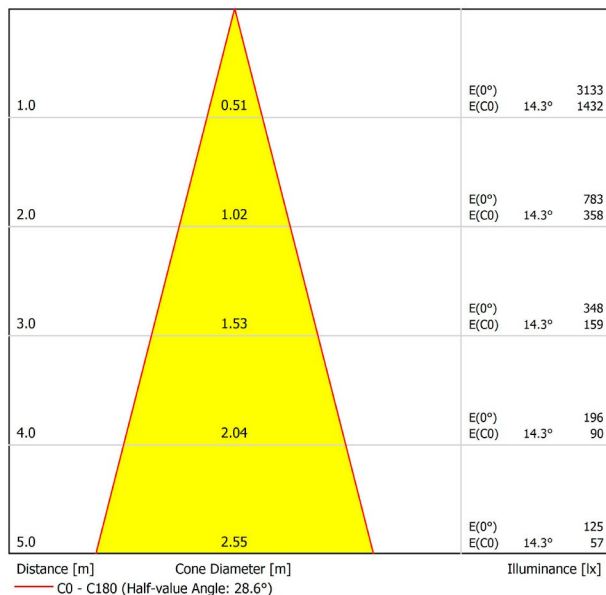



	PRODUCT
Model	Anti-glare Honeycomb Louver
Reference	A346-00-00
Category	Accessories


NOT SOLD SEPARATELY.



Accessory made up of louver in the shape of a honeycomb panel to reduce glare and the effects of direct rays of vision.



DIMENSIONS



ACCESSORIES



ANTI-GLARE HONEYCOMB LOUVER

PRODUCT

Name	FIT 50 RECESSED DIM DALI 28° 3000K WT
Reference	A3462221WT
Color	Textured white
RAL	9016
Category	CEILING RECESSED

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	1120 Lm
Power	12 W
Power values of the system	13,33 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	Mac Adam Step 2
Light beam angle	28°
Lighting efficiency	82%
Efficacy	93 Lm/W
Current intensity	1050 mA
Dimming	DALI
Control through bluetooth	Please Consult
Driver	Included
Emergency power supply	Please Consult
Electrical insulation class	<input type="checkbox"/>
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A
LED lifespan	L80B10 (Tj=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Recess measurements	Ø62 mm.
Swivel angle	90°
Rotation angle	350°
Weight	515 g.
Packaged weight	630 g.
Packaging dimensions	225 x 191 x 84 mm.
Units per package	1
Materials	Aluminium / Polycarbonate




Fit Recessed, is a spotlight for single recessed lighting solutions available in two sizes (ø50 and ø35). Cylindrical geometry and essential forms, it stands out for its minimalistic looking and its functionality as it can be orientated in any direction. The black perimeter around its mouth and its honeycomb accessory, highlights its anti-glare vocation.

POLAR DIAGRAM

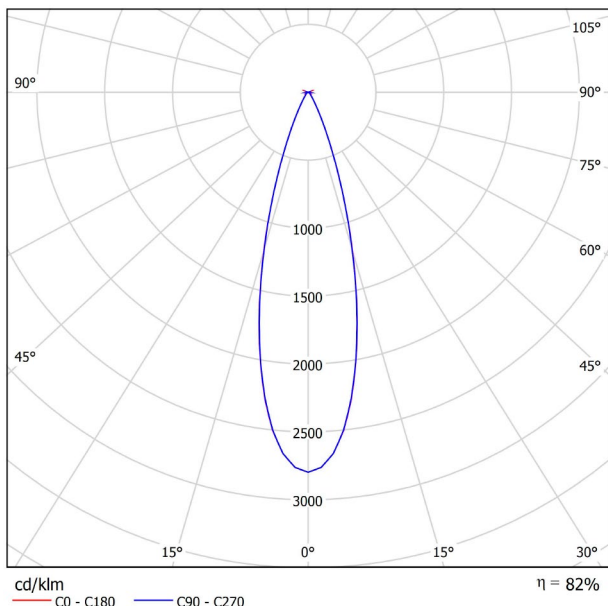

CONICAL DIAGRAM





	PRODUCT
Model	Anti-glare Honeycomb Louver
Reference	A346-00-00
Category	Accessories


NOT SOLD SEPARATELY.



Accessory made up of louvre in the shape of a honeycomb panel to reduce glare and the effects of direct rays of vision.



DIMENSIONS



ACCESSORIES



ANTI-GLARE HONEYCOMB LOUVER

PRODUCT

Name	FIT 50 RECESSED DIM DALI 47° 2700K NT
Reference	A3462230NT
Color	Textured black
RAL	9005
Category	CEILING RECESSED

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	1040 Lm
Power	12 W
Power values of the system	13,33 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	Mac Adam Step 2
Light beam angle	47°
Lighting efficiency	80%
Efficacy	87 Lm/W
Current intensity	1050 mA
Dimming	DALI
Control through bluetooth	Please Consult
Driver	Included
Emergency power supply	Please Consult
Electrical insulation class	<input type="checkbox"/>
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A
LED lifespan	L80B10 (Tj=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Recess measurements	Ø62 mm.
Swivel angle	90°
Rotation angle	350°
Weight	515 g.
Packaged weight	630 g.
Packaging dimensions	225 x 191 x 84 mm.
Units per package	1
Materials	Aluminium / Polycarbonate





Fit Recessed, is a spotlight for single recessed lighting solutions available in two sizes (ø50 and ø35). Cylindrical geometry and essential forms, it stands out for its minimalistic looking and its functionality as it can be orientated in any direction. The black perimeter around its mouth and its honeycomb accessory, highlights its anti-glare vocation.

POLAR DIAGRAM

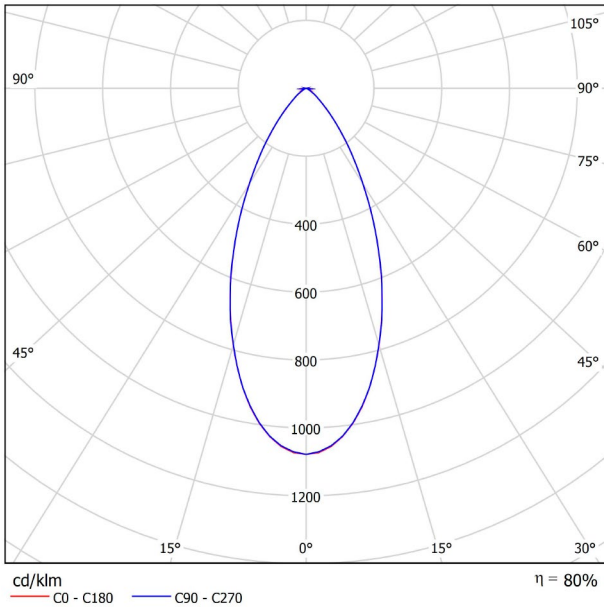

CONICAL DIAGRAM

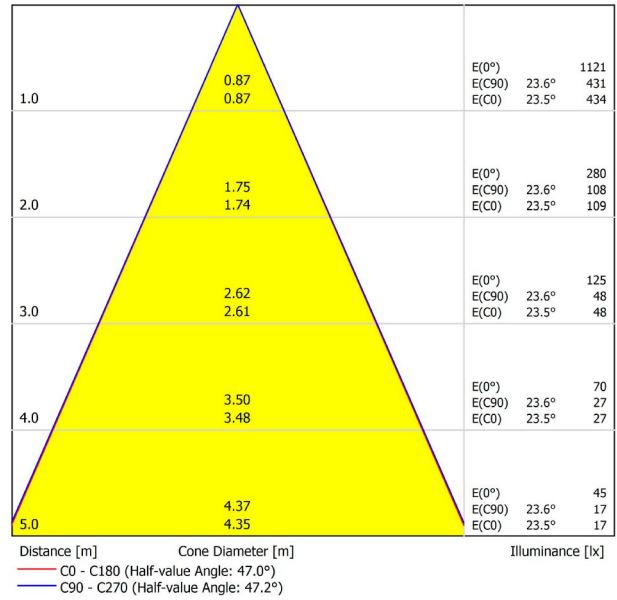

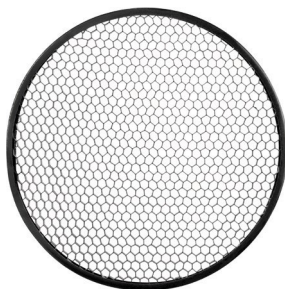

	PRODUCT
Model	Anti-glare Honeycomb Louver
Reference	A346-00-00
Category	Accessories


NOT SOLD SEPARATELY.



Accessory made up of louvre in the shape of a honeycomb panel to reduce glare and the effects of direct rays of vision.



DIMENSIONS

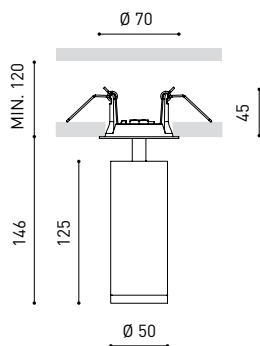

ACCESSORIES



ANTI-GLARE HONEYCOMB LOUVER

PRODUCT

Name	FIT 50 RECESSED DIM DALI 47° 2700K WT
Reference	A3462230WT
Color	Textured white
RAL	9016
Category	CEILING RECESSED

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	1040 Lm
Power	12 W
Power values of the system	13,33 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	Mac Adam Step 2
Light beam angle	47°
Lighting efficiency	80%
Efficacy	87 Lm/W
Current intensity	1050 mA
Dimming	DALI
Control through bluetooth	Please Consult
Driver	Included
Emergency power supply	Please Consult
Electrical insulation class	<input type="checkbox"/>
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A
LED lifespan	L80B10 (Tj=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Recess measurements	Ø62 mm.
Swivel angle	90°
Rotation angle	350°
Weight	515 g.
Packaged weight	630 g.
Packaging dimensions	225 x 191 x 84 mm.
Units per package	1
Materials	Aluminium / Polycarbonate





Fit Recessed, is a spotlight for single recessed lighting solutions available in two sizes (Ø50 and Ø35). Cylindrical geometry and essential forms, it stands out for its minimalistic looking and its functionality as it can be orientated in any direction. The black perimeter around its mouth and its honeycomb accessory, highlights its anti-glare vocation.

POLAR DIAGRAM

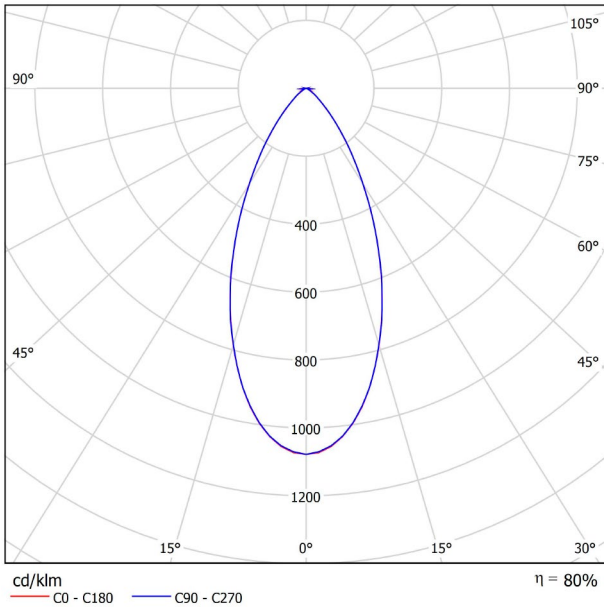

CONICAL DIAGRAM

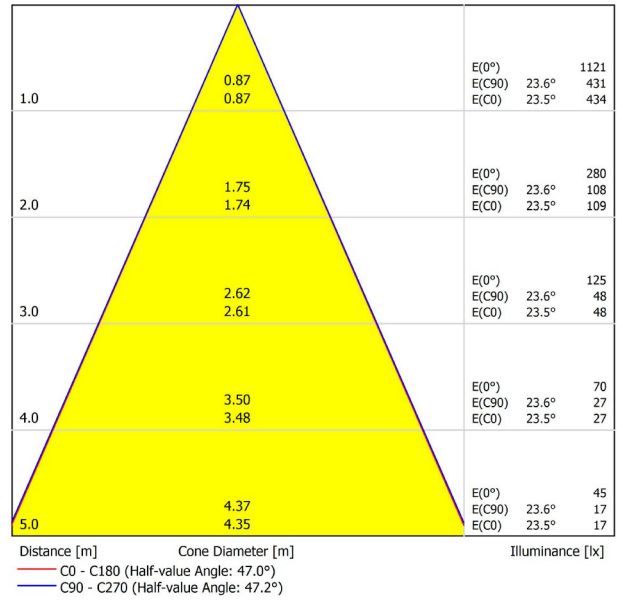



	PRODUCT
Model	Anti-glare Honeycomb Louver
Reference	A346-00-00
Category	Accessories


NOT SOLD SEPARATELY.



Accessory made up of louvre in the shape of a honeycomb panel to reduce glare and the effects of direct rays of vision.



DIMENSIONS



ACCESSORIES



ANTI-GLARE HONEYCOMB LOUVER

Name	FIT 50 RECESSED DIM DALI 47° 3000K NT
Reference	A3462231NT
Color	Textured black
RAL	9005
Category	CEILING RECESSED

PRODUCT

Name	FIT 50 RECESSED DIM DALI 47° 3000K NT
Reference	A3462231NT
Color	Textured black
RAL	9005
Category	CEILING RECESSED

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	1120 Lm
Power	12 W
Power values of the system	13,33 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	Mac Adam Step 2
Light beam angle	47°
Lighting efficiency	80%
Efficacy	93 Lm/W
Current intensity	1050 mA
Dimming	DALI
Control through bluetooth	Please Consult
Driver	Included
Emergency power supply	Please Consult
Electrical insulation class	□
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A
LED lifespan	L80B10 (Tj=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Recess measurements	Ø62 mm.
Swivel angle	90°
Rotation angle	350°
Weight	515 g.
Packaged weight	630 g.
Packaging dimensions	225 x 191 x 84 mm.
Units per package	1
Materials	Aluminium / Polycarbonate





Fit Recessed, is a spotlight for single recessed lighting solutions available in two sizes (Ø50 and Ø35). Cylindrical geometry and essential forms, it stands out for its minimalistic looking and its functionality as it can be orientated in any direction. The black perimeter around its mouth and its honeycomb accessory, highlights its anti-glare vocation.

POLAR DIAGRAM

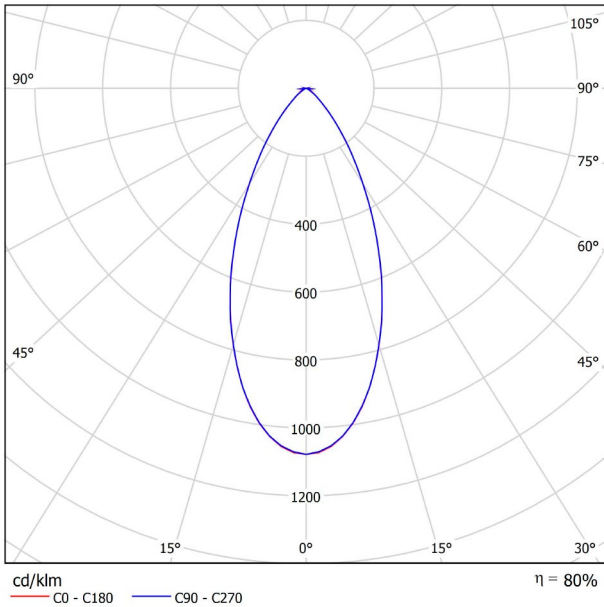

CONICAL DIAGRAM

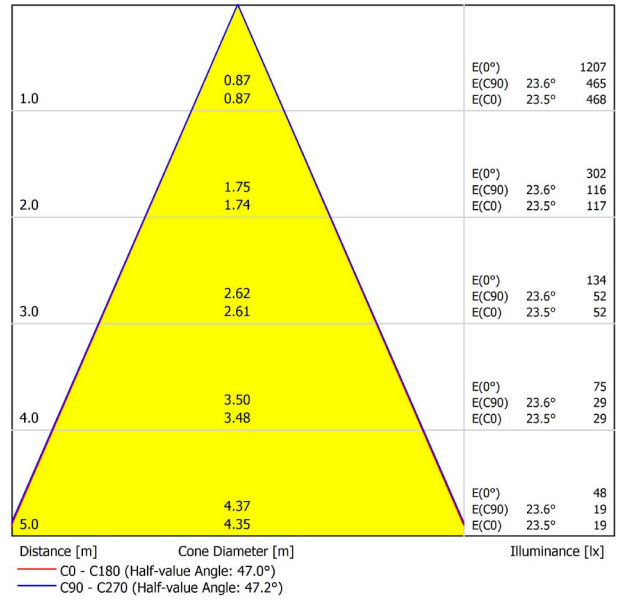



	PRODUCT
Model	Anti-glare Honeycomb Louver
Reference	A346-00-00
Category	Accessories


NOT SOLD SEPARATELY.



Accessory made up of louver in the shape of a honeycomb panel to reduce glare and the effects of direct rays of vision.



DIMENSIONS



ACCESSORIES



ANTI-GLARE HONEYCOMB LOUVER

Name	FIT 50 RECESSED DIM DALI 47° 3000K WT
Reference	A3462231WT
Color	Textured white
RAL	9016
Category	CEILING RECESSED

PRODUCT

FIT 50 RECESSED DIM DALI 47° 3000K WT

A3462231WT

Textured white

9016

CEILING RECESSED

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	1120 Lm
Power	12 W
Power values of the system	13,33 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	Mac Adam Step 2
Light beam angle	47°
Lighting efficiency	80%
Efficacy	93 Lm/W
Current intensity	1050 mA
Dimming	DALI
Control through bluetooth	Please Consult
Driver	Included
Emergency power supply	Please Consult
Electrical insulation class	□
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A
LED lifespan	L80B10 (Tj=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Recess measurements	Ø62 mm.
Swivel angle	90°
Rotation angle	350°
Weight	515 g.
Packaged weight	630 g.
Packaging dimensions	225 x 191 x 84 mm.
Units per package	1
Materials	Aluminium / Polycarbonate





Fit Recessed, is a spotlight for single recessed lighting solutions available in two sizes (ø50 and ø35). Cylindrical geometry and essential forms, it stands out for its minimalistic looking and its functionality as it can be orientated in any direction. The black perimeter around its mouth and its honeycomb accessory, highlights its anti-glare vocation.

POLAR DIAGRAM

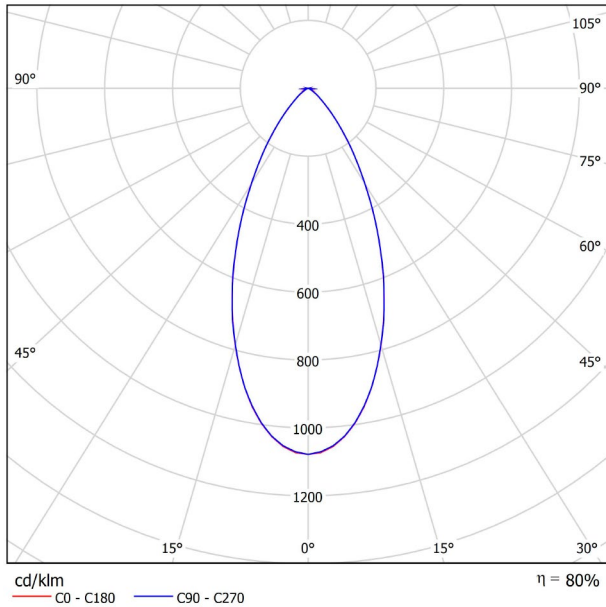

CONICAL DIAGRAM

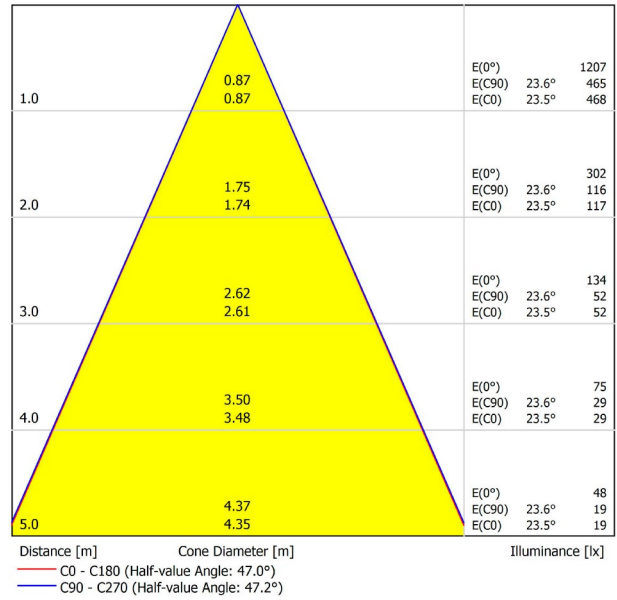



	PRODUCT
Model	Anti-glare Honeycomb Louver
Reference	A346-00-00
Category	Accessories


NOT SOLD SEPARATELY.



Accessory made up of louver in the shape of a honeycomb panel to reduce glare and the effects of direct rays of vision.



DIMENSIONS



ACCESSORIES



ANTI-GLARE HONEYCOMB LOUVER

Name	FIT 50 RECESSED 47° 3000K G
Reference	A3462131G
Color	Gold
RAL	Paint of metallic nanoparticles
Category	CEILING RECESSED

PRODUCT

Light source	LED
Gross luminous flux	1120 Lm
Power	12 W
Power values of the system	13,33 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	47°
Lighting efficiency	80%
Efficacy	93 Lm/W
Current intensity	1050 mA
Control through bluetooth	Please Consult
Driver	Included
Emergency power supply	Please Consult
Electrical insulation class	<input type="checkbox"/>
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A
LED lifespan	L80B10 (Tj=85°C) >60.000h

LIGHTING INFORMATION


Ingress Protection	IP20
Recess measurements	Ø62 mm.
Swivel angle	90°
Rotation angle	350°
Weight	510 g.
Packaged weight	625 g.
Packaging dimensions	225 x 191 x 84 mm
Units per package	1
Materials	Aluminium / Polycarbonate

OTHER DATA





Fit Recessed, is a spotlight for single recessed lighting solutions available in two sizes (Ø50 and Ø35). Cylindrical geometry and essential forms, it stands out for its minimalistic looking and its functionality as it can be orientated in any direction. The black perimeter around its mouth and its honeycomb accessory, highlights its anti-glare vocation.

POLAR DIAGRAM

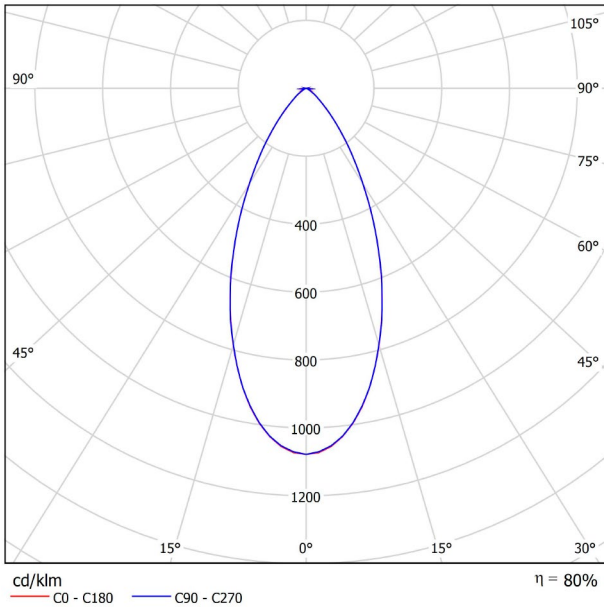

CONICAL DIAGRAM

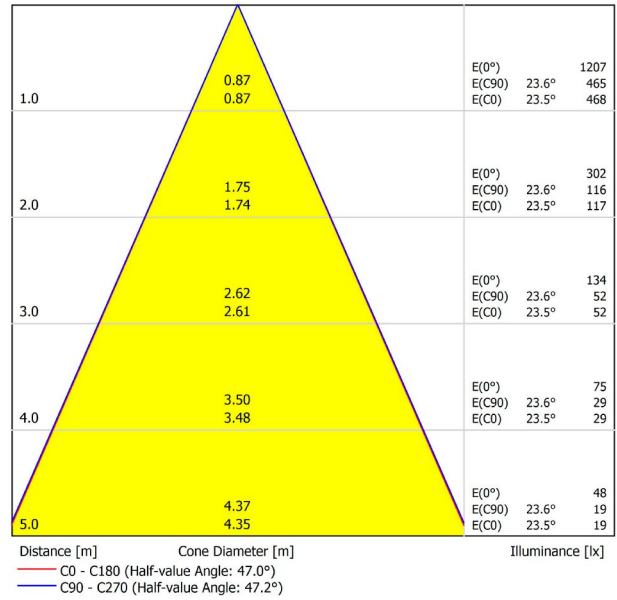



	PRODUCT
Model	Anti-glare Honeycomb Louver
Reference	A346-00-00
Category	Accessories


NOT SOLD SEPARATELY.



Accessory made up of louver in the shape of a honeycomb panel to reduce glare and the effects of direct rays of vision.



DIMENSIONS



ACCESSORIES



ANTI-GLARE HONEYCOMB LOUVER

PRODUCT

Name	FIT 50 RECESSED DIM DALI 15° 2700K G
Reference	A3462210G
Color	Gold
RAL	Paint of metallic nanoparticles
Category	CEILING RECESSED

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	1040 Lm
Power	12 W
Power values of the system	13,33 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	15°
Lighting efficiency	85%
Efficacy	87 Lm/W
Current intensity	1050 mA
Dimming	DALI
Control through bluetooth	Please Consult
Driver	Included
Emergency power supply	Please Consult
Electrical insulation class	<input type="checkbox"/>
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A
LED lifespan	L80B10 (Tj=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Recess measurements	Ø62 mm.
Swivel angle	90°
Rotation angle	350°
Weight	515 g.
Packaged weight	630 g.
Packaging dimensions	225 x 191 x 84 mm
Units per package	1
Materials	Aluminium / Polycarbonate





Fit Recessed, is a spotlight for single recessed lighting solutions available in two sizes (Ø50 and Ø35). Cylindrical geometry and essential forms, it stands out for its minimalistic looking and its functionality as it can be orientated in any direction. The black perimeter around its mouth and its honeycomb accessory, highlights its anti-glare vocation.

POLAR DIAGRAM

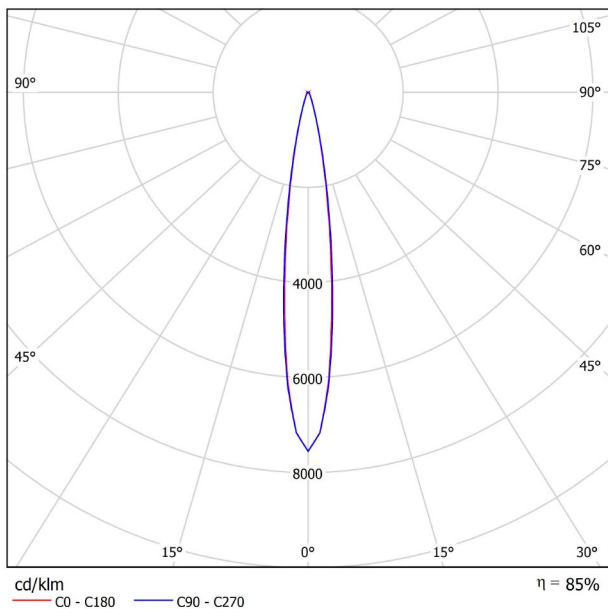

CONICAL DIAGRAM

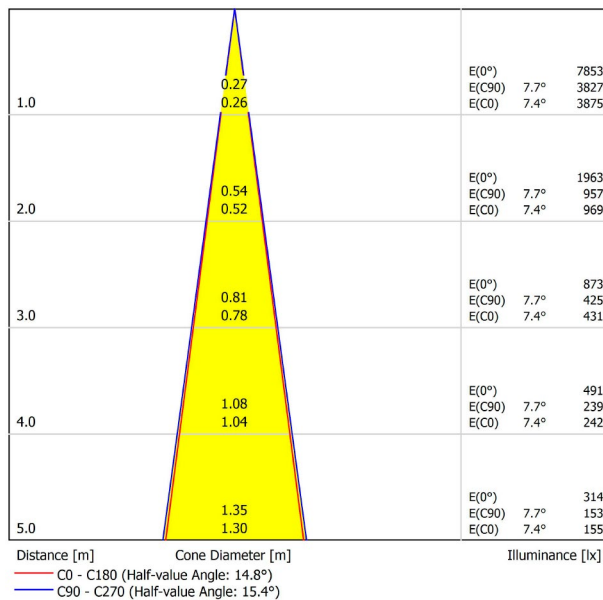



	PRODUCT
Model	Anti-glare Honeycomb Louver
Reference	A346-00-00
Category	Accessories


NOT SOLD SEPARATELY.



Accessory made up of louver in the shape of a honeycomb panel to reduce glare and the effects of direct rays of vision.



DIMENSIONS



ACCESSORIES



ANTI-GLARE HONEYCOMB LOUVER

Name	FIT 50 RECESSED DIM DALI 15° 3000K G
Reference	A3462211G
Color	Gold
RAL	Paint of metallic nanoparticles
Category	CEILING RECESSED

PRODUCT

FIT 50 RECESSED DIM DALI 15° 3000K G
A3462211G
Gold
Paint of metallic nanoparticles
CEILING RECESSED

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	1120 Lm
Power	12 W
Power values of the system	13,33 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	15°
Lighting efficiency	85%
Efficacy	93 Lm/W
Current intensity	1050 mA
Dimming	DALI
Control through bluetooth	Please Consult
Driver	Included
Emergency power supply	Please Consult
Electrical insulation class	□
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A
LED lifespan	L80B10 (Tj=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Recess measurements	Ø62 mm.
Swivel angle	90°
Rotation angle	350°
Weight	515 g.
Packaged weight	630 g.
Packaging dimensions	225 × 191 × 84 mm
Units per package	1
Materials	Aluminium / Polycarbonate





Fit Recessed, is a spotlight for single recessed lighting solutions available in two sizes (Ø50 and Ø35). Cylindrical geometry and essential forms, it stands out for its minimalistic looking and its functionality as it can be orientated in any direction. The black perimeter around its mouth and its honeycomb accessory, highlights its anti-glare vocation.

POLAR DIAGRAM

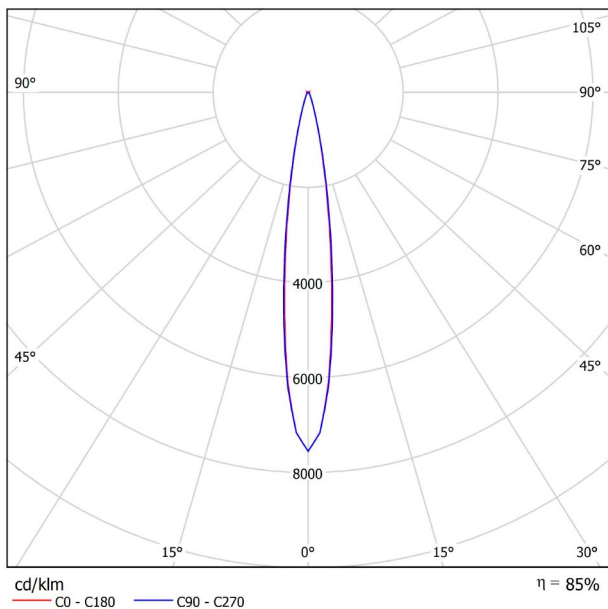

CONICAL DIAGRAM

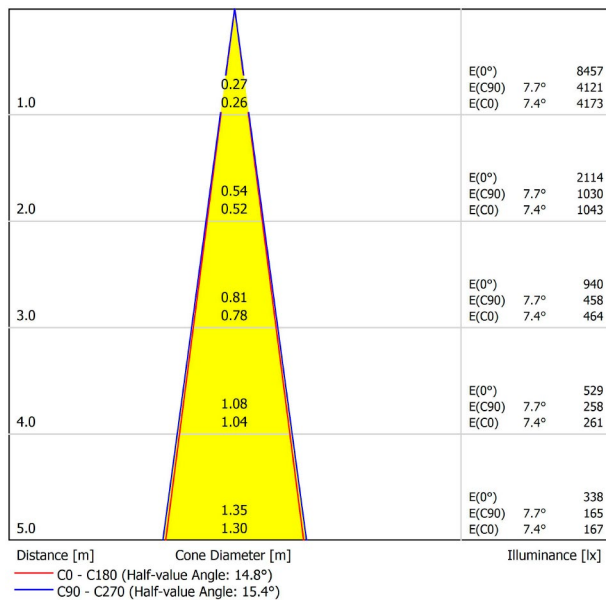



	PRODUCT
Model	Anti-glare Honeycomb Louver
Reference	A346-00-00
Category	Accessories


NOT SOLD SEPARATELY.



Accessory made up of louver in the shape of a honeycomb panel to reduce glare and the effects of direct rays of vision.



DIMENSIONS



ACCESSORIES



ANTI-GLARE HONEYCOMB LOUVER

PRODUCT	
Name	FIT 50 RECESSED DIM DALI 28° 2700K G
Reference	A3462220G
Color	Gold
RAL	Paint of metallic nanoparticles
Category	CEILING RECESSED


LIGHTING INFORMATION	
Light source	LED
Gross luminous flux	1040 Lm
Power	12 W
Power values of the system	13,33 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	28°
Lighting efficiency	82%
Efficacy	87 Lm/W
Current intensity	1050 mA
Dimming	DALI
Control through bluetooth	Please Consult
Driver	Included
Emergency power supply	Please Consult
Electrical insulation class	<input type="checkbox"/>
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A
LED lifespan	L80B10 (Tj=85°C) >60.000h

OTHER DATA	
Ingress Protection	IP20
Recess measurements	Ø62 mm.
Swivel angle	90°
Rotation angle	350°
Weight	515 g.
Packaged weight	630 g.
Packaging dimensions	225 x 191 x 84 mm
Units per package	1
Materials	Aluminium / Polycarbonate





Fit Recessed, is a spotlight for single recessed lighting solutions available in two sizes (Ø50 and Ø35). Cylindrical geometry and essential forms, it stands out for its minimalistic looking and its functionality as it can be orientated in any direction. The black perimeter around its mouth and its honeycomb accessory, highlights its anti-glare vocation.

POLAR DIAGRAM

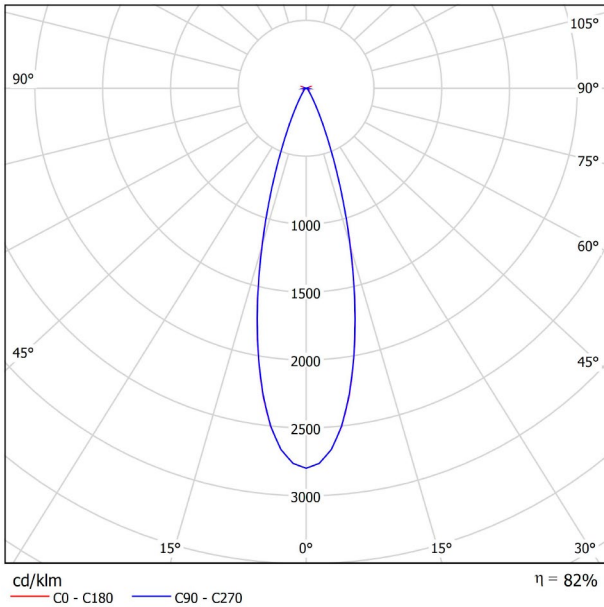

CONICAL DIAGRAM

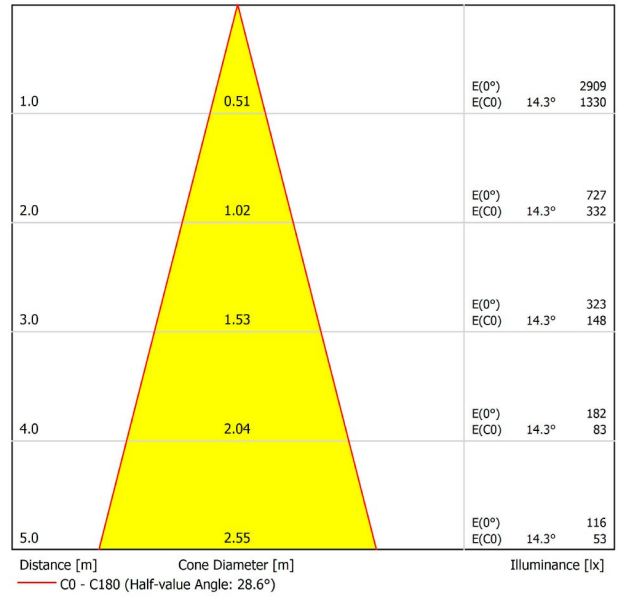



	PRODUCT
Model	Anti-glare Honeycomb Louver
Reference	A346-00-00
Category	Accessories


NOT SOLD SEPARATELY.



Accessory made up of louver in the shape of a honeycomb panel to reduce glare and the effects of direct rays of vision.



DIMENSIONS



ACCESSORIES



ANTI-GLARE HONEYCOMB LOUVER

PRODUCT

Name	FIT 50 RECESSED DIM DALI 28° 3000K G
Reference	A3462221G
Color	Gold
RAL	Paint of metallic nanoparticles
Category	CEILING RECESSED

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	1120 Lm
Power	12 W
Power values of the system	13,33 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	28°
Lighting efficiency	82%
Efficacy	93 Lm/W
Current intensity	1050 mA
Dimming	DALI
Control through bluetooth	Please Consult
Driver	Included
Emergency power supply	Please Consult
Electrical insulation class	<input type="checkbox"/>
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A
LED lifespan	L80B10 (Tj=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Recess measurements	Ø62 mm.
Swivel angle	90°
Rotation angle	350°
Weight	515 g.
Packaged weight	630 g.
Packaging dimensions	225 x 191 x 84 mm
Units per package	1
Materials	Aluminium / Polycarbonate





Fit Recessed, is a spotlight for single recessed lighting solutions available in two sizes (Ø50 and Ø35). Cylindrical geometry and essential forms, it stands out for its minimalistic looking and its functionality as it can be orientated in any direction. The black perimeter around its mouth and its honeycomb accessory, highlights its anti-glare vocation.

POLAR DIAGRAM

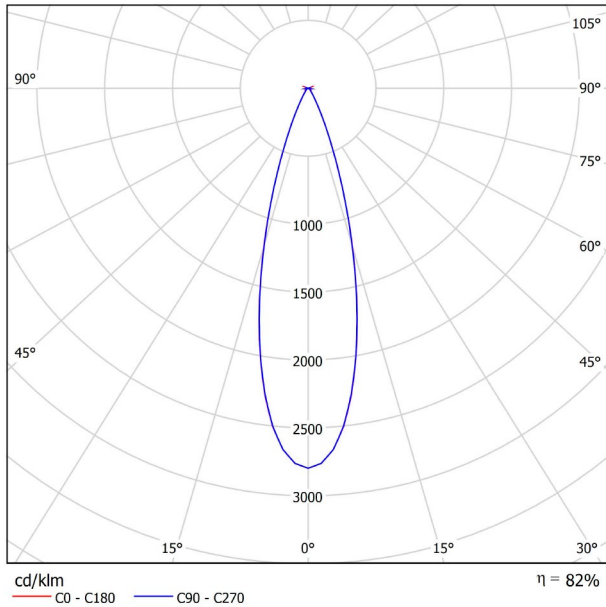

CONICAL DIAGRAM

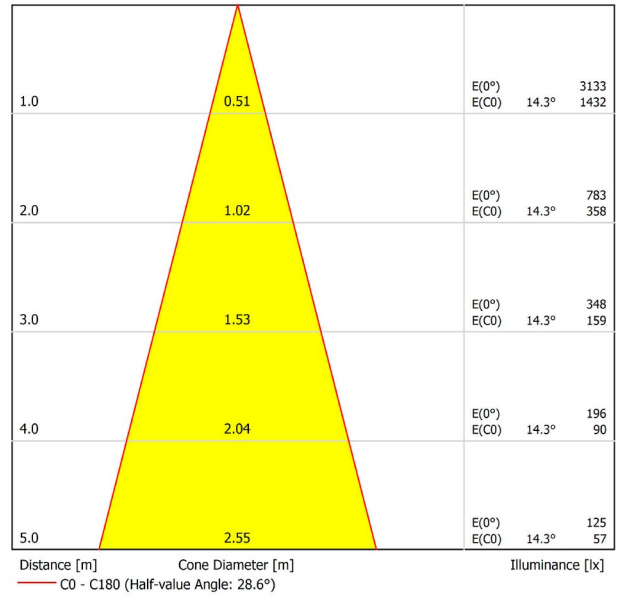



	PRODUCT
Model	Anti-glare Honeycomb Louver
Reference	A346-00-00
Category	Accessories


NOT SOLD SEPARATELY.



Accessory made up of louver in the shape of a honeycomb panel to reduce glare and the effects of direct rays of vision.



DIMENSIONS



ACCESSORIES



ANTI-GLARE HONEYCOMB LOUVER

PRODUCT

Name	FIT 50 RECESSED DIM DALI 47° 2700K G
Reference	A3462230G
Color	Gold
RAL	Paint of metallic nanoparticles
Category	CEILING RECESSED

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	1040 Lm
Power	12 W
Power values of the system	13,33 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	47°
Lighting efficiency	80%
Efficacy	87 Lm/W
Current intensity	1050 mA
Dimming	DALI
Control through bluetooth	Please Consult
Driver	Included
Emergency power supply	Please Consult
Electrical insulation class	<input type="checkbox"/>
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A
LED lifespan	L80B10 (Tj=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Recess measurements	Ø62 mm.
Swivel angle	90°
Rotation angle	350°
Weight	515 g.
Packaged weight	630 g.
Packaging dimensions	225 x 191 x 84 mm
Units per package	1
Materials	Aluminium / Polycarbonate





Fit Recessed, is a spotlight for single recessed lighting solutions available in two sizes (ø50 and ø35). Cylindrical geometry and essential forms, it stands out for its minimalistic looking and its functionality as it can be orientated in any direction. The black perimeter around its mouth and its honeycomb accessory, highlights its anti-glare vocation.

POLAR DIAGRAM

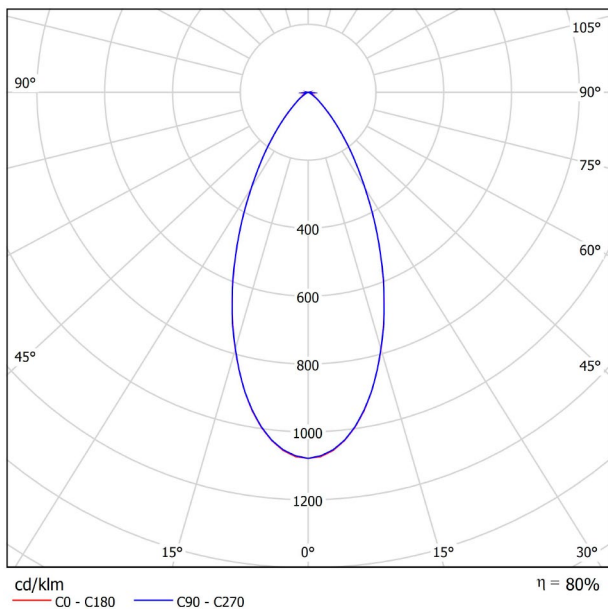

CONICAL DIAGRAM

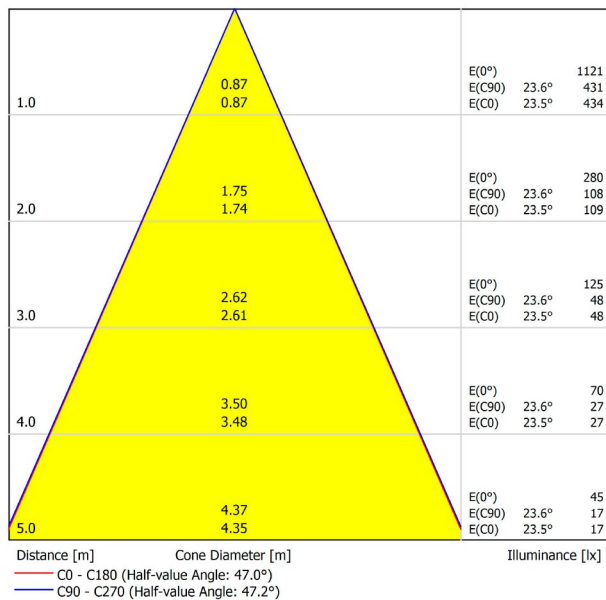



	PRODUCT
Model	Anti-glare Honeycomb Louver
Reference	A346-00-00
Category	Accessories


NOT SOLD SEPARATELY.



Accessory made up of louvre in the shape of a honeycomb panel to reduce glare and the effects of direct rays of vision.



DIMENSIONS



ACCESSORIES



ANTI-GLARE HONEYCOMB LOUVER

PRODUCT

Name	FIT 50 RECESSED DIM DALI 47° 3000K G
Reference	A3462231G
Color	Gold
RAL	Paint of metallic nanoparticles
Category	CEILING RECESSED

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	1120 Lm
Power	12 W
Power values of the system	13,33 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	47°
Lighting efficiency	80%
Efficacy	93 Lm/W
Current intensity	1050 mA
Dimming	DALI
Control through bluetooth	Please Consult
Driver	Included
Emergency power supply	Please Consult
Electrical insulation class	<input type="checkbox"/>
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A
LED lifespan	L80B10 (Tj=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Recess measurements	Ø62 mm.
Swivel angle	90°
Rotation angle	350°
Weight	515 g.
Packaged weight	630 g.
Packaging dimensions	225 x 191 x 84 mm
Units per package	1
Materials	Aluminium / Polycarbonate





Fit Recessed, is a spotlight for single recessed lighting solutions available in two sizes (Ø50 and Ø35). Cylindrical geometry and essential forms, it stands out for its minimalistic looking and its functionality as it can be orientated in any direction. The black perimeter around its mouth and its honeycomb accessory, highlights its anti-glare vocation.

POLAR DIAGRAM

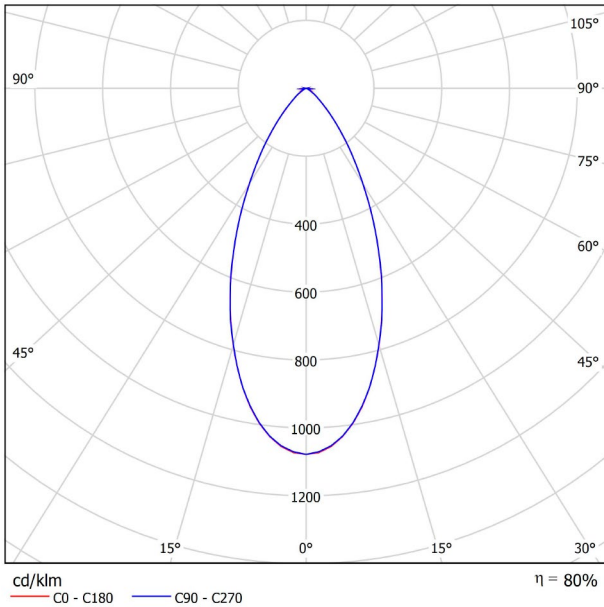

CONICAL DIAGRAM

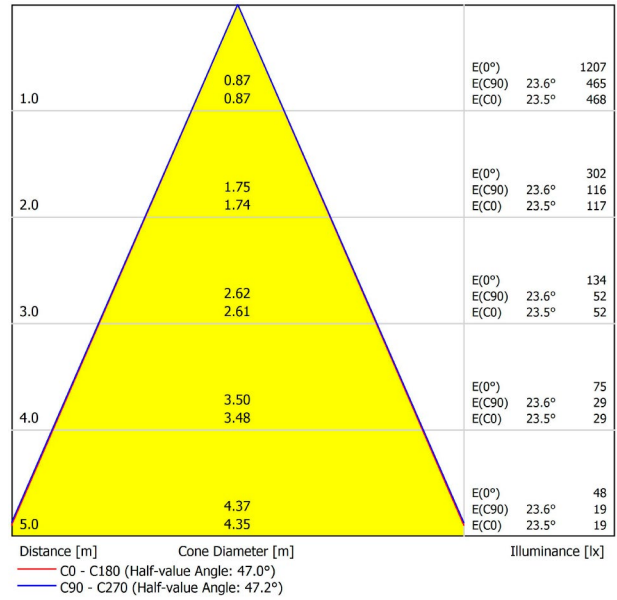

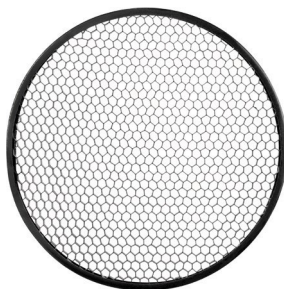

	PRODUCT
Model	Anti-glare Honeycomb Louver
Reference	A346-00-00
Category	Accessories


NOT SOLD SEPARATELY.



Accessory made up of louver in the shape of a honeycomb panel to reduce glare and the effects of direct rays of vision.



DIMENSIONS



ACCESSORIES




ANTI-GLARE HONEYCOMB LOUVER

PRODUCT	
Name	FIT 50 RECESSED 15° 2700K G
Reference	A3462110G
Color	Gold
RAL	Paint of metallic nanoparticles
Category	CEILING RECESSED
LIGHTING INFORMATION	
Light source	LED
Gross luminous flux	1040 Lm
Power	12 W
Power values of the system	13,33 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	15°
Lighting efficiency	85%
Efficacy	87 Lm/W
Current intensity	1050 mA
Control through bluetooth	Please Consult
Driver	Included
Emergency power supply	Please Consult
Electrical insulation class	<input type="checkbox"/>
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A
LED lifespan	L80B10 (Tj=85°C) >60.000h
OTHER DATA	
Ingress Protection	IP20
Recess measurements	Ø62 mm.
Swivel angle	90°
Rotation angle	350°
Weight	510 g.
Packaged weight	625 g.
Packaging dimensions	225 x 191 x 84 mm
Units per package	1
Materials	Aluminium / Polycarbonate





Fit Recessed, is a spotlight for single recessed lighting solutions available in two sizes (Ø50 and Ø35). Cylindrical geometry and essential forms, it stands out for its minimalistic looking and its functionality as it can be orientated in any direction. The black perimeter around its mouth and its honeycomb accessory, highlights its anti-glare vocation.

POLAR DIAGRAM

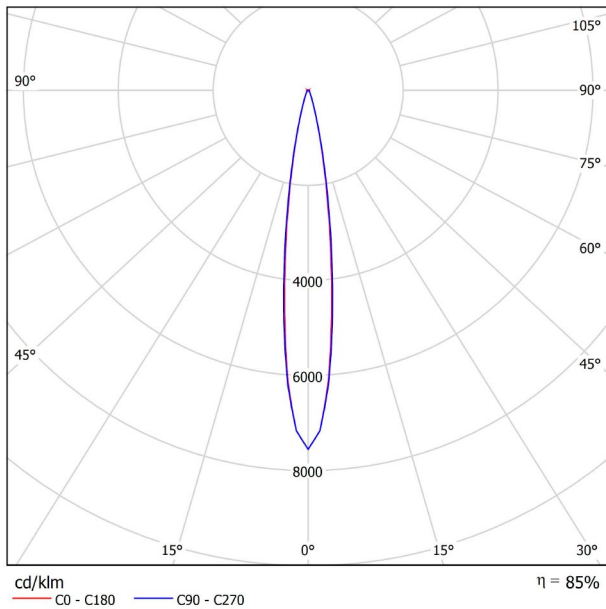

CONICAL DIAGRAM

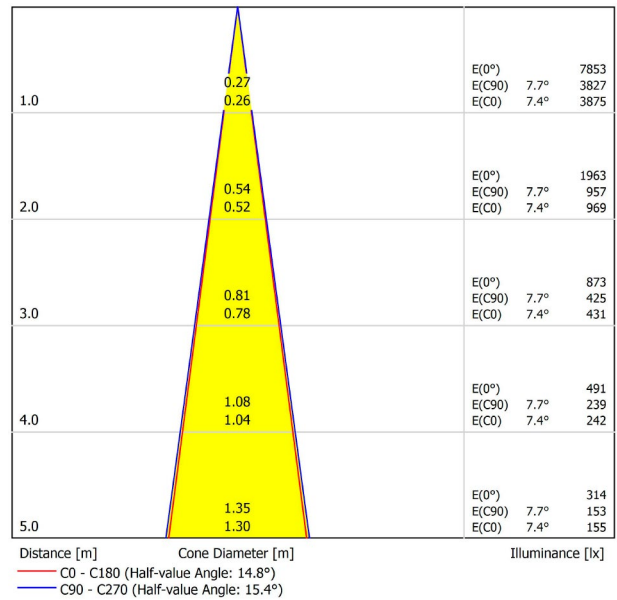



	PRODUCT
Model	Anti-glare Honeycomb Louver
Reference	A346-00-00
Category	Accessories


NOT SOLD SEPARATELY.



Accessory made up of louver in the shape of a honeycomb panel to reduce glare and the effects of direct rays of vision.



DIMENSIONS



ACCESSORIES




ANTI-GLARE HONEYCOMB LOUVER

PRODUCT	
Name	FIT 50 RECESSED 15° 3000K G
Reference	A3462111G
Color	Gold
RAL	Paint of metallic nanoparticles
Category	CEILING RECESSED
LIGHTING INFORMATION	
Light source	LED
Gross luminous flux	1120 Lm
Power	12 W
Power values of the system	13,33 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	15°
Lighting efficiency	85%
Efficacy	93 Lm/W
Current intensity	1050 mA
Control through bluetooth	Please Consult
Driver	Included
Emergency power supply	Please Consult
Electrical insulation class	<input type="checkbox"/>
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A
LED lifespan	L80B10 (Tj=85°C) >60.000h
OTHER DATA	
Ingress Protection	IP20
Recess measurements	Ø62 mm.
Swivel angle	90°
Rotation angle	350°
Weight	510 g.
Packaged weight	625 g.
Packaging dimensions	225 x 191 x 84 mm
Units per package	1
Materials	Aluminium / Polycarbonate





Fit Recessed, is a spotlight for single recessed lighting solutions available in two sizes (Ø50 and Ø35). Cylindrical geometry and essential forms, it stands out for its minimalistic looking and its functionality as it can be orientated in any direction. The black perimeter around its mouth and its honeycomb accessory, highlights its anti-glare vocation.

POLAR DIAGRAM

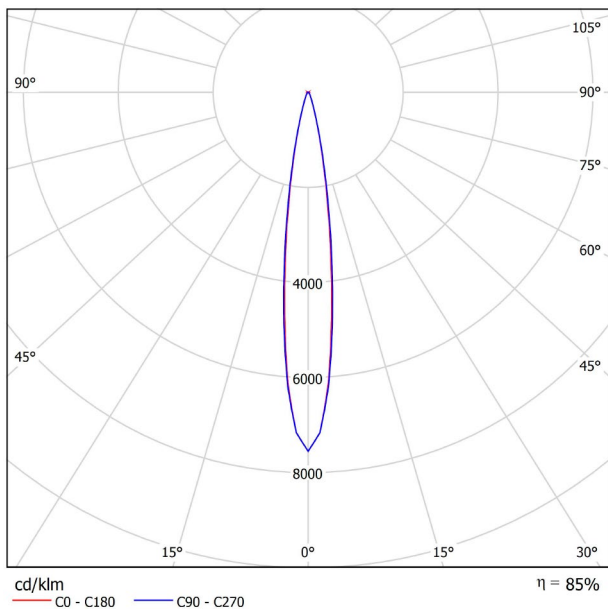

CONICAL DIAGRAM

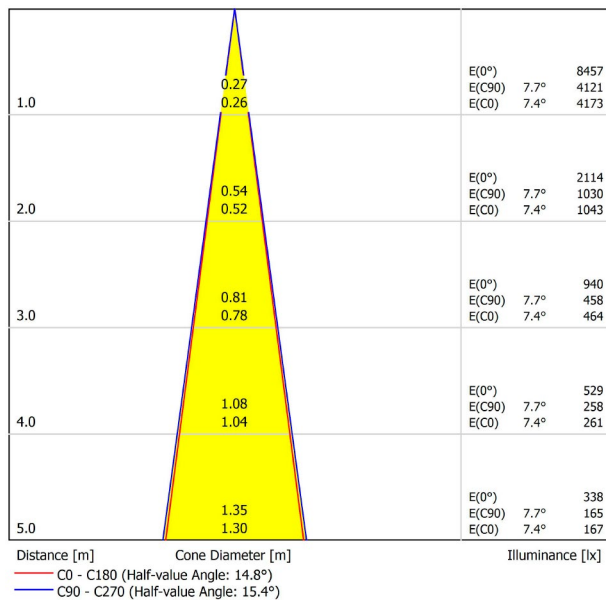



	PRODUCT
Model	Anti-glare Honeycomb Louver
Reference	A346-00-00
Category	Accessories


NOT SOLD SEPARATELY.



Accessory made up of louver in the shape of a honeycomb panel to reduce glare and the effects of direct rays of vision.



DIMENSIONS



ACCESSORIES




ANTI-GLARE HONEYCOMB LOUVER

PRODUCT	
Name	FIT 50 RECESSED 28° 2700K G
Reference	A3462120G
Color	Gold
RAL	Paint of metallic nanoparticles
Category	CEILING RECESSED
LIGHTING INFORMATION	
Light source	LED
Gross luminous flux	1040 Lm
Power	12 W
Power values of the system	13,33 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	28°
Lighting efficiency	82%
Efficacy	87 Lm/W
Current intensity	1050 mA
Control through bluetooth	Please Consult
Driver	Included
Emergency power supply	Please Consult
Electrical insulation class	<input type="checkbox"/>
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A
LED lifespan	L80B10 (Tj=85°C) >60.000h
OTHER DATA	
Ingress Protection	IP20
Recess measurements	Ø62 mm.
Swivel angle	90°
Rotation angle	350°
Weight	510 g.
Packaged weight	625 g.
Packaging dimensions	225 x 191 x 84 mm
Units per package	1
Materials	Aluminium / Polycarbonate





Fit Recessed, is a spotlight for single recessed lighting solutions available in two sizes (Ø50 and Ø35). Cylindrical geometry and essential forms, it stands out for its minimalistic looking and its functionality as it can be orientated in any direction. The black perimeter around its mouth and its honeycomb accessory, highlights its anti-glare vocation.

POLAR DIAGRAM

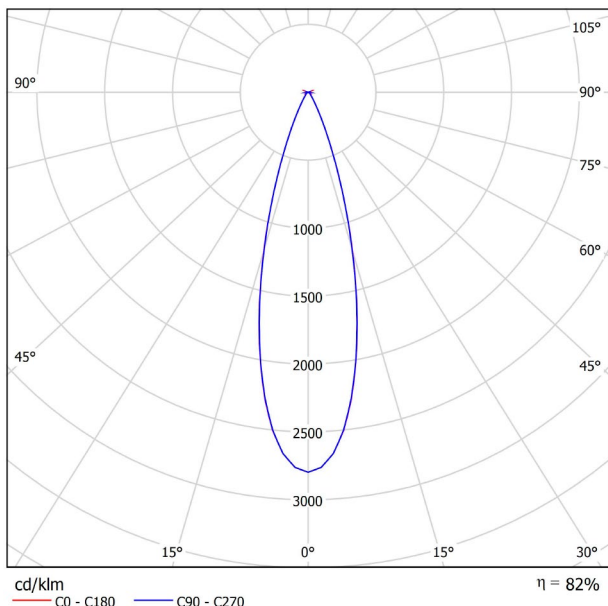

CONICAL DIAGRAM

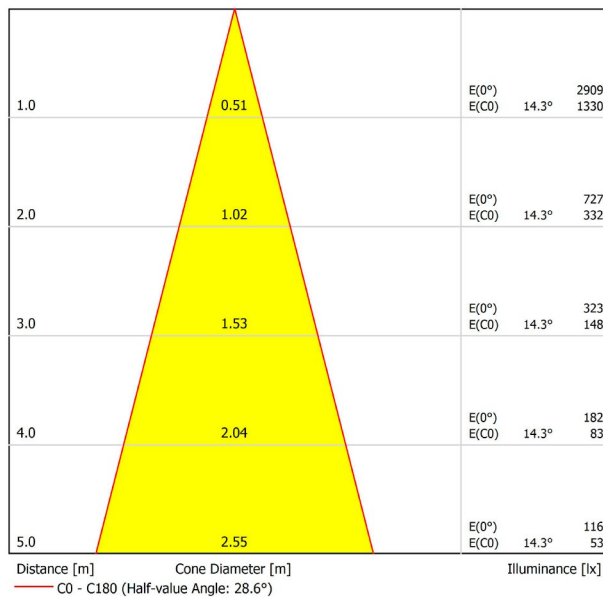



	PRODUCT
Model	Anti-glare Honeycomb Louver
Reference	A346-00-00
Category	Accessories


NOT SOLD SEPARATELY.



Accessory made up of louver in the shape of a honeycomb panel to reduce glare and the effects of direct rays of vision.



DIMENSIONS



ACCESSORIES



ANTI-GLARE HONEYCOMB LOUVER

PRODUCT	
Name	FIT 50 RECESSED 28° 3000K G
Reference	A3462121G
Color	Gold
RAL	Paint of metallic nanoparticles
Category	CEILING RECESSED


LIGHTING INFORMATION	
Light source	LED
Gross luminous flux	1120 Lm
Power	12 W
Power values of the system	13,33 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	28°
Lighting efficiency	82%
Efficacy	93 Lm/W
Current intensity	1050 mA
Control through bluetooth	Please Consult
Driver	Included
Emergency power supply	Please Consult
Electrical insulation class	<input type="checkbox"/>
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A
LED lifespan	L80B10 (Tj=85°C) >60.000h

OTHER DATA	
Ingress Protection	IP20
Recess measurements	Ø62 mm.
Swivel angle	90°
Rotation angle	350°
Weight	510 g.
Packaged weight	625 g.
Packaging dimensions	225 x 191 x 84 mm
Units per package	1
Materials	Aluminium / Polycarbonate





Fit Recessed, is a spotlight for single recessed lighting solutions available in two sizes (Ø50 and Ø35). Cylindrical geometry and essential forms, it stands out for its minimalistic looking and its functionality as it can be orientated in any direction. The black perimeter around its mouth and its honeycomb accessory, highlights its anti-glare vocation.

POLAR DIAGRAM

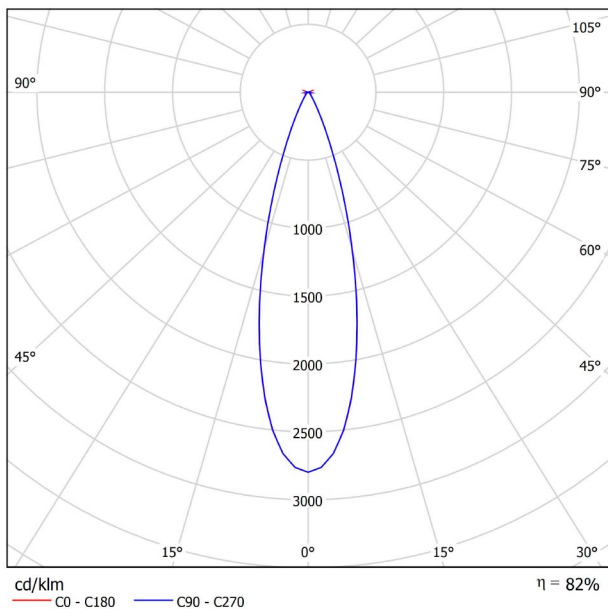

CONICAL DIAGRAM

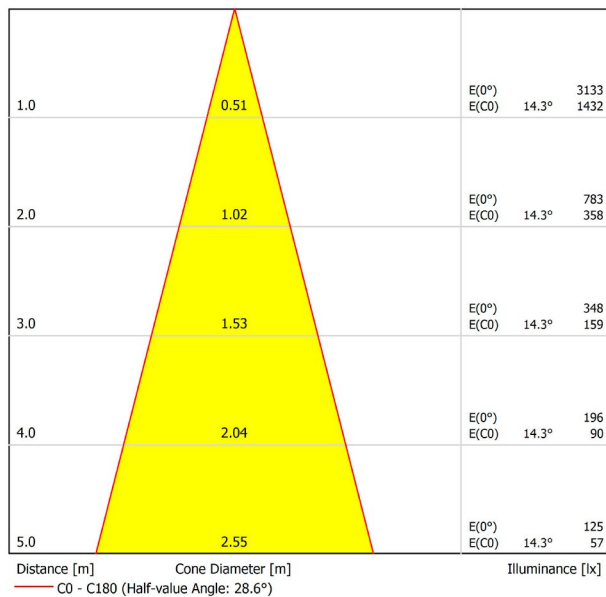



	PRODUCT
Model	Anti-glare Honeycomb Louver
Reference	A346-00-00
Category	Accessories


NOT SOLD SEPARATELY.



Accessory made up of louver in the shape of a honeycomb panel to reduce glare and the effects of direct rays of vision.



DIMENSIONS



ACCESSORIES



ANTI-GLARE HONEYCOMB LOUVER

Name	FIT 50 RECESSED 47° 2700K G
Reference	A3462130G
Color	Gold
RAL	Paint of metallic nanoparticles
Category	CEILING RECESSED

PRODUCT

Light source	LED
Gross luminous flux	1040 Lm
Power	12 W
Power values of the system	13,33 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	47°
Lighting efficiency	80%
Efficacy	87 Lm/W
Current intensity	1050 mA
Control through bluetooth	Please Consult
Driver	Included
Emergency power supply	Please Consult
Electrical insulation class	<input type="checkbox"/>
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A
LED lifespan	L80B10 (Tj=85°C) >60.000h

LIGHTING INFORMATION


Ingress Protection	IP20
Recess measurements	Ø62 mm.
Swivel angle	90°
Rotation angle	350°
Weight	510 g.
Packaged weight	625 g.
Packaging dimensions	225 x 191 x 84 mm
Units per package	1
Materials	Aluminium / Polycarbonate

OTHER DATA





Fit Recessed, is a spotlight for single recessed lighting solutions available in two sizes (Ø50 and Ø35). Cylindrical geometry and essential forms, it stands out for its minimalistic looking and its functionality as it can be orientated in any direction. The black perimeter around its mouth and its honeycomb accessory, highlights its anti-glare vocation.

POLAR DIAGRAM

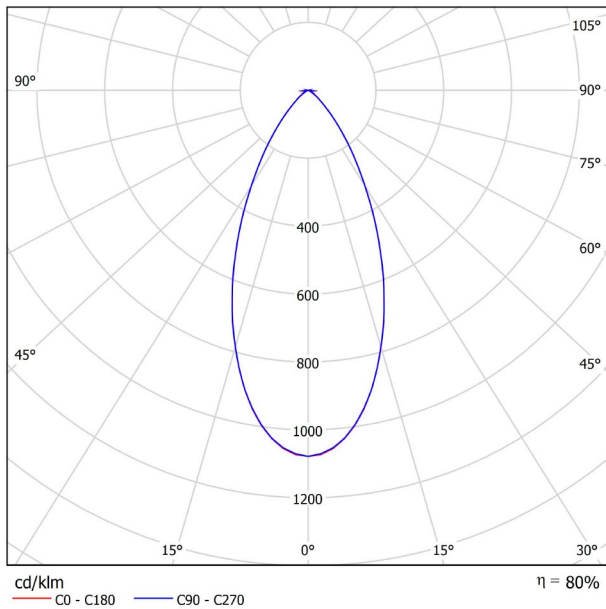

CONICAL DIAGRAM

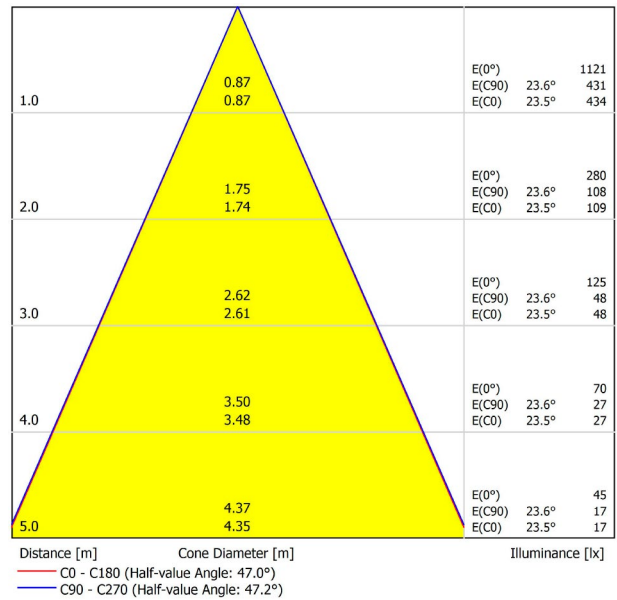



	PRODUCT
Model	Anti-glare Honeycomb Louver
Reference	A346-00-00
Category	Accessories

NOT SOLD SEPARATELY.



Accessory made up of louvre in the shape of a honeycomb panel to reduce glare and the effects of direct rays of vision.