




DIMENSIONS



ACCESSORIES

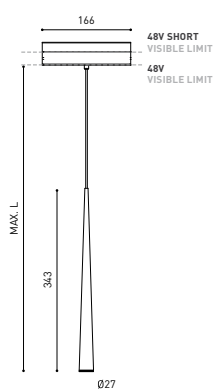

PRODUCT

Name	HOLLY 48V 2M 17° 2700K MC
Reference	A3490100MC
Color	Metallized copper
RAL	Paint of metallic nanoparticles
Category	TRACKLIGHTS

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	190 Lm
Power	2,1 W
Power values of the system	2,21 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 3
Light beam angle	17°
Lighting efficiency	92%
Efficacy	90 Lm/W
Current intensity	700 mA
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	III
Voltage	48 Vdc
Energy efficiency	A++
LED lifespan	L80B10 (Tj=85°C) >41.000h


OTHER DATA

Ingress Protection	IP20
Cord length	2 m
Fast adjustment tensioner	No
Track type	Track 48V
Weight	290 g.
Packaged weight	413 g.
Packaging dimensions	385 x 103 x 78 mm
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene




Holly 48V is a pendant luminaire for accent lighting applications. Its geometry, stylish and elegant with a body made out of solid mechanised aluminium, define a high quality perceived product with an exquisite look. In addition, Holly uses a special designed micro-reflector to optimize the output of the LED source, achieving a relatively high amount of light. Within its applications we can consider, bar-counters, beside tables, stairwells...

POLAR DIAGRAM

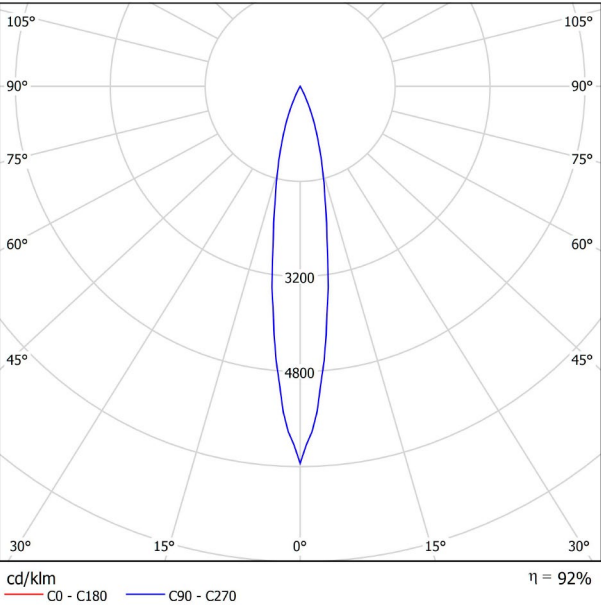



CONICAL DIAGRAM

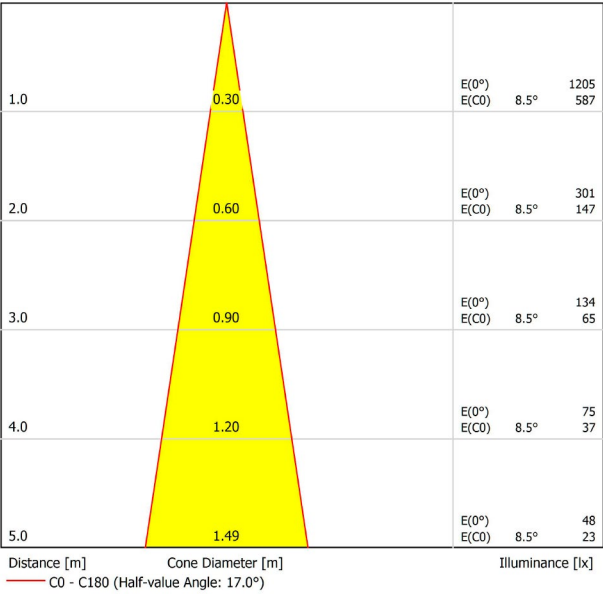




PRODUCT	
Model	Cord Accessory
Reference	02230000 WT NT
Colour	WT ☐ RAL 9016 NT ☒ RAL9005
Category	Accessories

DIMENSIONAL DRAWING

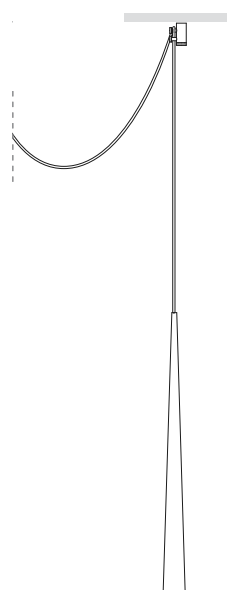

48V SYSTEM

TRACK 48V



TRACK 48V TRIMLESS


TRACK 48V TRIMLESS 1m	A338-01-00-	N
TRACK 48V TRIMLESS 2m	A338-02-00-	N
TRACK 48V TRIMLESS 3m	A338-03-00-	N
TRACK 48V TRIMLESS Corner 90° One Plane	A338-06-00-	N
TRACK 48V TRIMLESS Corner 90° Two Planes	A338-07-00-	N

RECOMMENDED FOR INSTALLATIONS WHERE THE PROFILE CAN BE INSTALLED BEFORE THE FALSE PLASTERBOARD CEILING (THICKNESS 12,5mm.)



TRACK 48V TRIMLESS


Corner 90° One Plane




*Electrical connection not included

TRACK 48V TRIMLESS

Corner 90° Two Planes



*Electrical connection not included




TRACK 48V SURFACE

TRACK 48V SURFACE 1m	A338-11-00-	N
TRACK 48V SURFACE 2m	A338-12-00-	N
TRACK 48V SURFACE 3m	A338-13-00-	N
TRACK 48V SURFACE Corner 90° One Plane	A338-14-00-	N




TRACK 48V SURFACE

Corner 90° One Plane



*Electrical connection not included




TRACK 48V SURFACE SHORT

TRACK 48V SURFACE SHORT 1m	A338-21-00-	N
TRACK 48V SURFACE SHORT 2m	A338-22-00-	N
TRACK 48V SURFACE SHORT 3m	A338-23-00-	N
TRACK 48V SURFACE SHORT Corner 90° One Plane	A338-24-00-	N



TRACK 48V SURFACE SHORT


Corner 90° One Plane



*Electrical connection not included

48V SYSTEM

TRACK 48V

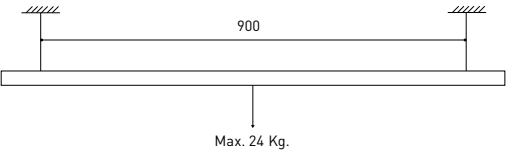


		P	V	D
CONSTANT VOLTAGE	0434-01-21	75W	48V	180 x 52 x 30mm
LED POWER SUPPLY	0434-01-22	150W	48V	240 x 60 x 49mm

DROP VOLTAGE TABLE

		CABLE LENGTH (m)			
		5	10	20	30
POWER (W)	CABLE SECTION (mm²)	TRACK LENGTH (m)			
75	0,75	50	50	30	X
	1,5	50	50	50	50
150	0,75	40	15	X	X
	1,5	50	40	20	X

COMPATIBILITY ACCORDING TO TYPE OF TRACK

TRACK 48V & TRACK 48V SURFACE SHORT

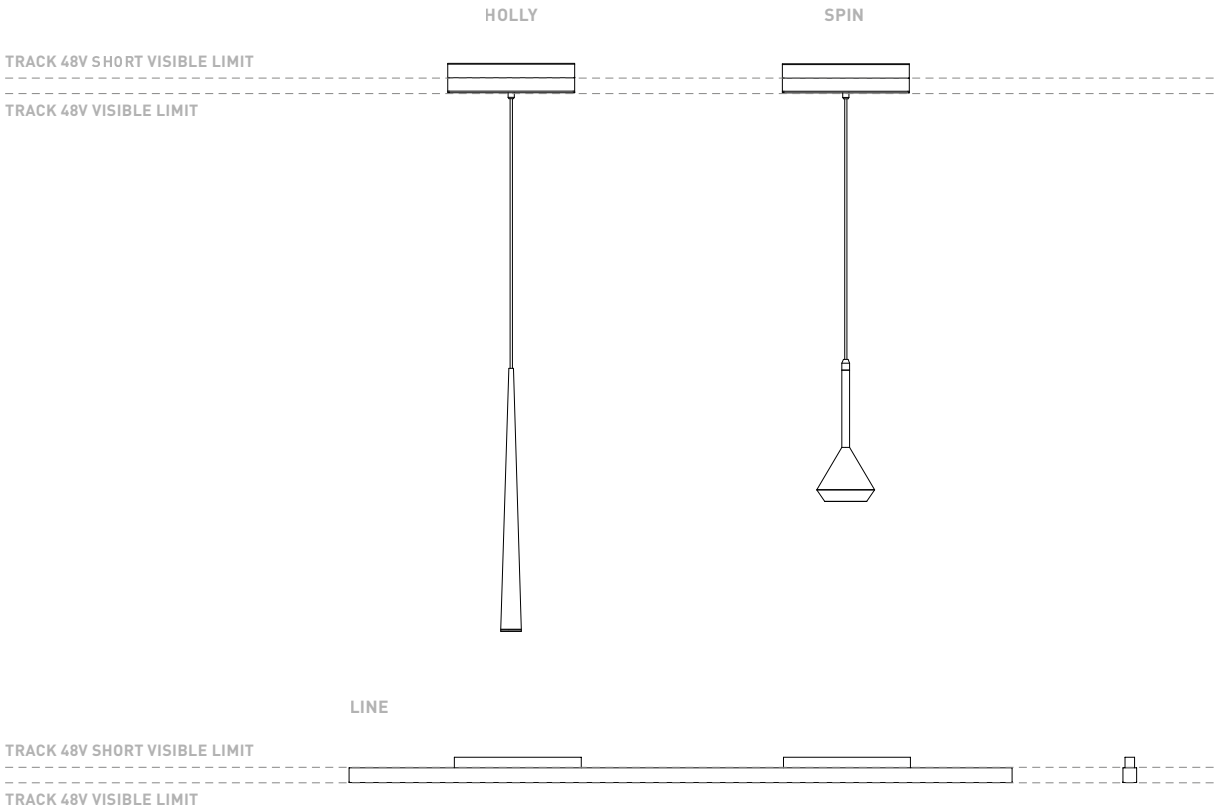


Order with *The 2019 Collection* codes. Products with one single version for both tracks

48V SYSTEM


TRACK 48V

ALL 48V TRACK




TRACK 48V Live-End Connector

A338-00-01- | N |




TRACK 48V Central Connector

A338-00-02- | N |



TRACK 48V Corner 90° Connector

A338-00-12- | N |



TRACK 48V Wireless Control

0434-01-31- | N | Casambi/AAG Stucchi App

0434-01-32- | N | AAG Stucchi App

TRIMLESS 48V



TRACK 48V TRIMLESS Short T-Bracket


A338-00-03



TRACK 48V Clamp for M6 ROD

A338-00-09

*See accessories quantities



TRACK 48V TRIMLESS Long T-Bracket


A338-00-04



TRACK 48V Track Clamp


A338-00-10

*See accessories quantities



TRACK 48V TRIMLESS Straight Joiners (2 units)


A338-00-05



TRACK 48V TRIMLESS Suspension Kit

A338-00-08

*See accessories quantities



TRACK 48V TRIMLESS Plaster Installation Guard 1m

A338-00-21


*** SUGGESTED MOUNTING ACCESSORIES QUANTITIES**

1000mm - 2 Pcs.

2000mm - 3 Pcs.

3000mm - 4 Pcs.

SURFACE, SUSPENSION , SURFACE SHORT & SUSPENSION SHORT 48V



TRACK 48V SURFACE Straight Joiner

A338-00-11- | N |

COLOUR | N ■ |

48V SYSTEM

TRACK 48V

TRIMLESS, SURFACE & SUSPENSION 48V



TRACK 48V TRIMLESS & SURFACE End

A338-00-06- | N |



TRACK 48V TRIMLESS & SURFACE End Feed

A338-00-07- | N |

SURFACE SHORT & SUSPENSION SHORT 48V



TRACK 48V SURFACE SHORT End


A338-00-18- | N |



TRACK 48V SURFACE SHORT End Feed

A338-00-19- | N |

SURFACE & SURFACE SHORT 48V




TRACK 48V Power Supply Case

A338-00-20- | N |  NO DIM

*To be installed aside 48V Surface Tracks
Power supply not included

SUSPENSION & SUSPENSION SHORT 48V



TRACK 48V Wired Power Supply Case

A338-00-22- | N |  NO DIM

A338-00-23- | N |  DIM

*Power supply not included



TRACK 48V SURFACE Suspension Kit (2 units)

A338-00-15- | N |



TRACK 48V SURFACE Suspension Feed Kit

A338-00-16- | N |  NO DIM


A338-00-17- | N |  DIM

*For remote power supply

COLOUR | N ■ |



DIMENSIONS

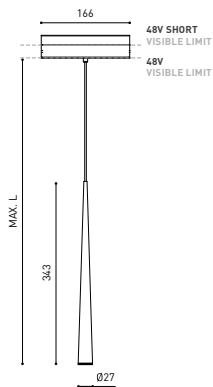

ACCESSORIES



CORD ACCESOSORY



TRACK 48V OPTIONS

PRODUCT

Name	HOLLY 48V 2M 17° 2700K MG
Reference	A3490100MG
Color	Metallized gold
RAL	Paint of metallic nanoparticles
Category	TRACKLIGHTS

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	190 Lm
Power	2,1 W
Power values of the system	2,21 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 3
Light beam angle	17°
Lighting efficiency	92%
Efficacy	90 Lm/W
Current intensity	700 mA
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	III
Voltage	48 Vdc
Energy efficiency	A++
LED lifespan	L80B10 (Tj=85°C) >41.000h


OTHER DATA

Ingress Protection	IP20
Cord length	2 m
Fast adjustment tensioner	No
Track type	Track 48V
Weight	290 g.
Packaged weight	413 g.
Packaging dimensions	385 × 103 × 78 mm
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene




Holly 48V is a pendant luminary for accent lighting applications. Its geometry, stylish and elegant with a body made out of solid mechanised aluminium, define a high quality perceived product with an exquisite look. In addition, Holly uses a special designed micro-reflector to optimize the output of the LED source, achieving a relatively high amount of light. Within its applications we can consider, bar-counters, beside tables, stairwells...

POLAR DIAGRAM

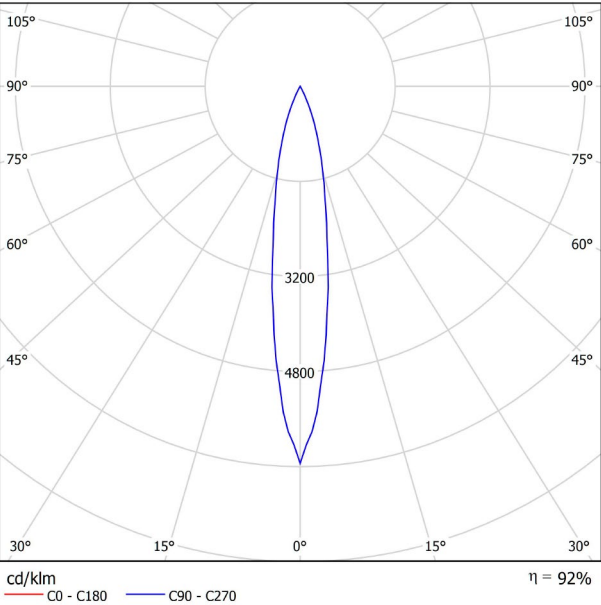



CONICAL DIAGRAM

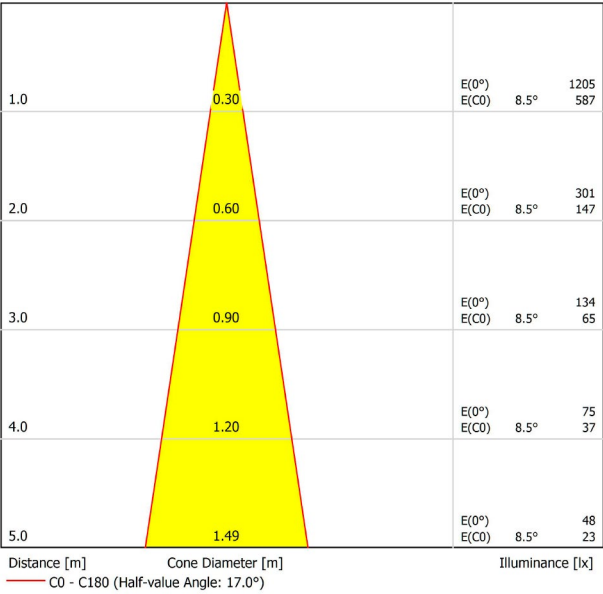




PRODUCT	
Model	Cord Accessory
Reference	02230000 WT NT
Colour	WT ☐ RAL 9016 NT ☒ RAL9005
Category	Accessories

DIMENSIONAL DRAWING

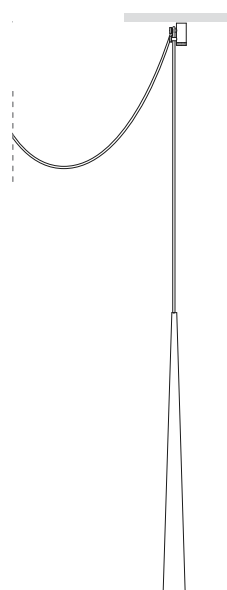

48V SYSTEM

TRACK 48V



TRACK 48V TRIMLESS


TRACK 48V TRIMLESS 1m	A338-01-00-	N
TRACK 48V TRIMLESS 2m	A338-02-00-	N
TRACK 48V TRIMLESS 3m	A338-03-00-	N
TRACK 48V TRIMLESS Corner 90° One Plane	A338-06-00-	N
TRACK 48V TRIMLESS Corner 90° Two Planes	A338-07-00-	N

RECOMMENDED FOR INSTALLATIONS WHERE THE PROFILE CAN BE INSTALLED BEFORE THE FALSE PLASTERBOARD CEILING (THICKNESS 12,5mm.)



TRACK 48V TRIMLESS


Corner 90° One Plane




*Electrical connection not included

TRACK 48V TRIMLESS

Corner 90° Two Planes



*Electrical connection not included




TRACK 48V SURFACE

TRACK 48V SURFACE 1m	A338-11-00-	N
TRACK 48V SURFACE 2m	A338-12-00-	N
TRACK 48V SURFACE 3m	A338-13-00-	N
TRACK 48V SURFACE Corner 90° One Plane	A338-14-00-	N




TRACK 48V SURFACE

Corner 90° One Plane



*Electrical connection not included




TRACK 48V SURFACE SHORT

TRACK 48V SURFACE SHORT 1m	A338-21-00-	N
TRACK 48V SURFACE SHORT 2m	A338-22-00-	N
TRACK 48V SURFACE SHORT 3m	A338-23-00-	N
TRACK 48V SURFACE SHORT Corner 90° One Plane	A338-24-00-	N



TRACK 48V SURFACE SHORT


Corner 90° One Plane



*Electrical connection not included

48V SYSTEM

TRACK 48V

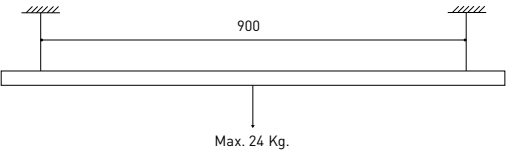


		P	V	D
CONSTANT VOLTAGE	0434-01-21	75W	48V	180 x 52 x 30mm
LED POWER SUPPLY	0434-01-22	150W	48V	240 x 60 x 49mm

DROP VOLTAGE TABLE

		CABLE LENGTH (m)			
		5	10	20	30
POWER (W)	CABLE SECTION (mm²)	TRACK LENGTH (m)			
75	0,75	50	50	30	X
	1,5	50	50	50	50
150	0,75	40	15	X	X
	1,5	50	40	20	X

COMPATIBILITY ACCORDING TO TYPE OF TRACK

TRACK 48V & TRACK 48V SURFACE SHORT

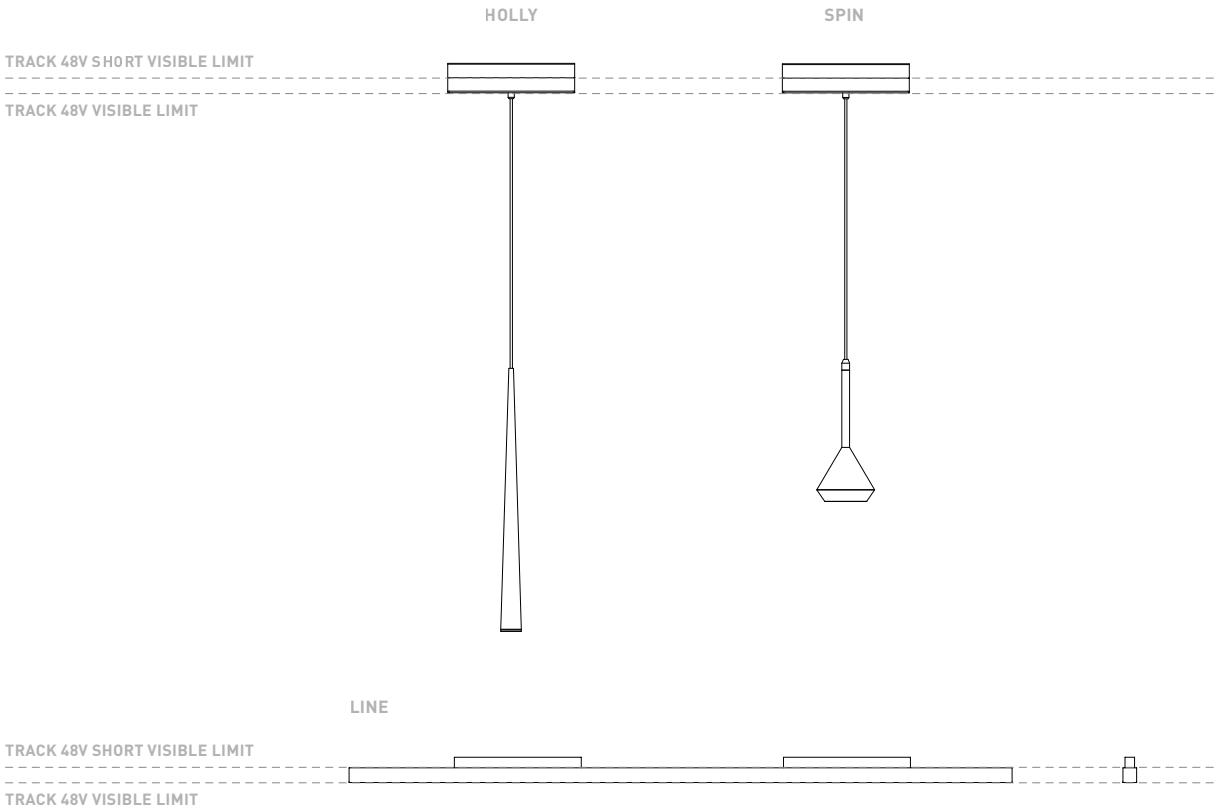


Order with *The 2019 Collection* codes. Products with one single version for both tracks

48V SYSTEM


TRACK 48V

ALL 48V TRACK




TRACK 48V Live-End Connector

A338-00-01- | N |




TRACK 48V Central Connector

A338-00-02- | N |



TRACK 48V Corner 90° Connector

A338-00-12- | N |



TRACK 48V Wireless Control

0434-01-31- | N | Casambi/AAG Stucchi App

0434-01-32- | N | AAG Stucchi App

TRIMLESS 48V



TRACK 48V TRIMLESS Short T-Bracket


A338-00-03



TRACK 48V Clamp for M6 ROD

A338-00-09

*See accessories quantities



TRACK 48V TRIMLESS Long T-Bracket


A338-00-04



TRACK 48V Track Clamp


A338-00-10

*See accessories quantities



TRACK 48V TRIMLESS Straight Joiners (2 units)


A338-00-05



TRACK 48V TRIMLESS Suspension Kit

A338-00-08

*See accessories quantities



TRACK 48V TRIMLESS Plaster Installation Guard 1m

A338-00-21


*** SUGGESTED MOUNTING ACCESSORIES QUANTITIES**

1000mm - 2 Pcs.

2000mm - 3 Pcs.

3000mm - 4 Pcs.

SURFACE, SUSPENSION , SURFACE SHORT & SUSPENSION SHORT 48V



TRACK 48V SURFACE Straight Joiner

A338-00-11- | N |

COLOUR | N ■ |

48V SYSTEM

TRACK 48V

TRIMLESS, SURFACE & SUSPENSION 48V



TRACK 48V TRIMLESS & SURFACE End

A338-00-06- | N |



TRACK 48V TRIMLESS & SURFACE End Feed

A338-00-07- | N |

SURFACE SHORT & SUSPENSION SHORT 48V



TRACK 48V SURFACE SHORT End


A338-00-18- | N |



TRACK 48V SURFACE SHORT End Feed

A338-00-19- | N |

SURFACE & SURFACE SHORT 48V




TRACK 48V Power Supply Case

A338-00-20- | N | 

*To be installed aside 48V Surface Tracks
Power supply not included

SUSPENSION & SUSPENSION SHORT 48V



TRACK 48V Wired Power Supply Case

A338-00-22- | N | 

A338-00-23- | N | 

*Power supply not included



TRACK 48V SURFACE Suspension Kit (2 units)

A338-00-15- | N |



TRACK 48V SURFACE Suspension Feed Kit

A338-00-16- | N | 


A338-00-17- | N | 

*For remote power supply

COLOUR | N ■ |



DIMENSIONS

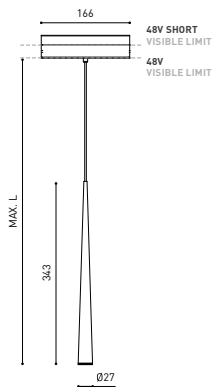

ACCESSORIES



CORD ACCESSORY



TRACK 48V OPTIONS

PRODUCT

Name	HOLLY 48V 2M 17° 2700K NT
Reference	A3490100NT
Color	Textured black
RAL	9005
Category	TRACKLIGHTS

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	190 Lm
Power	2,1 W
Power values of the system	2,21 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 3
Light beam angle	17°
Lighting efficiency	92%
Efficacy	90 Lm/W
Current intensity	700 mA
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	III
Voltage	48 Vdc
Energy efficiency	A++
LED lifespan	L80B10 (Tj=85°C) >41.000h


OTHER DATA

Ingress Protection	IP20
Cord length	2 m
Fast adjustment tensioner	No
Track type	Track 48V
Weight	290 g.
Packaged weight	413 g.
Packaging dimensions	385 × 103 × 78 mm
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene




Holly 48V is a pendant luminaire for accent lighting applications. Its geometry, stylish and elegant with a body made out of solid mechanised aluminium, define a high quality perceived product with an exquisite look. In addition, Holly uses a special designed micro-reflector to optimize the output of the LED source, achieving a relatively high amount of light. Within its applications we can consider, bar-counters, beside tables, stairwells...

POLAR DIAGRAM

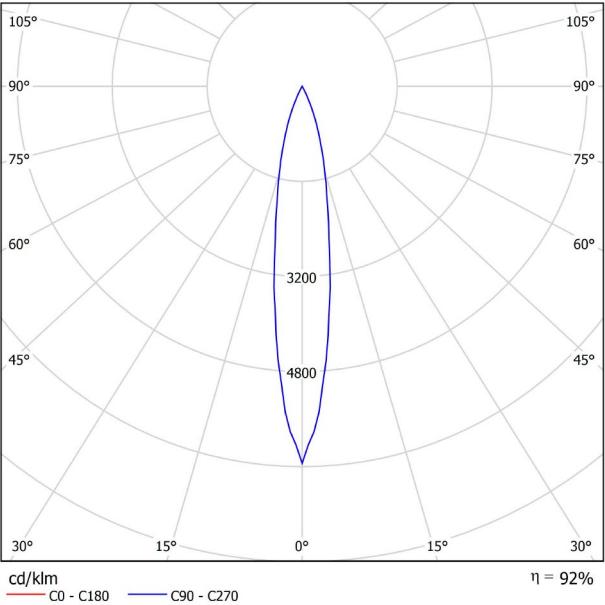



CONICAL DIAGRAM

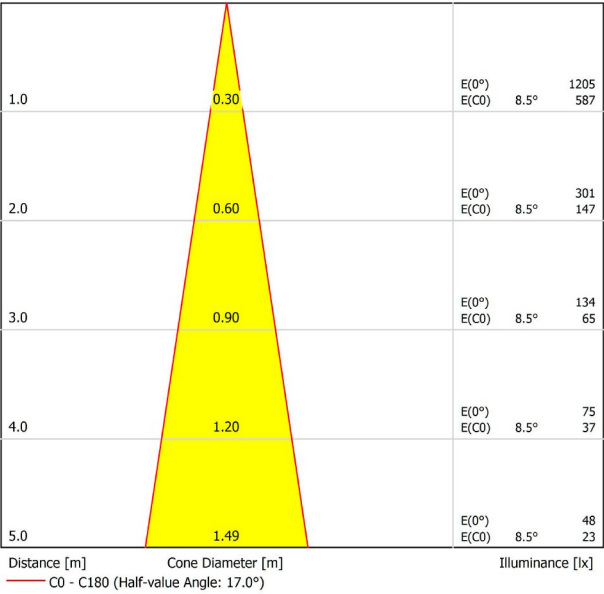




PRODUCT	
Model	Cord Accessory
Reference	02230000 WT NT
Colour	WT ☐ RAL 9016 NT ☒ RAL9005
Category	Accessories

DIMENSIONAL DRAWING

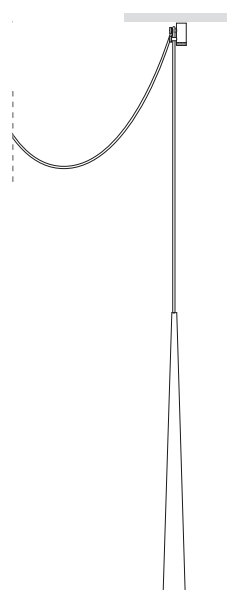

48V SYSTEM

TRACK 48V



TRACK 48V TRIMLESS


TRACK 48V TRIMLESS 1m	A338-01-00-	N
TRACK 48V TRIMLESS 2m	A338-02-00-	N
TRACK 48V TRIMLESS 3m	A338-03-00-	N
TRACK 48V TRIMLESS Corner 90° One Plane	A338-06-00-	N
TRACK 48V TRIMLESS Corner 90° Two Planes	A338-07-00-	N

RECOMMENDED FOR INSTALLATIONS WHERE THE PROFILE CAN BE INSTALLED BEFORE THE FALSE PLASTERBOARD CEILING (THICKNESS 12,5mm.)



TRACK 48V TRIMLESS


Corner 90° One Plane




*Electrical connection not included

TRACK 48V TRIMLESS

Corner 90° Two Planes



*Electrical connection not included




TRACK 48V SURFACE

TRACK 48V SURFACE 1m	A338-11-00-	N
TRACK 48V SURFACE 2m	A338-12-00-	N
TRACK 48V SURFACE 3m	A338-13-00-	N
TRACK 48V SURFACE Corner 90° One Plane	A338-14-00-	N




TRACK 48V SURFACE

Corner 90° One Plane



*Electrical connection not included




TRACK 48V SURFACE SHORT

TRACK 48V SURFACE SHORT 1m	A338-21-00-	N
TRACK 48V SURFACE SHORT 2m	A338-22-00-	N
TRACK 48V SURFACE SHORT 3m	A338-23-00-	N
TRACK 48V SURFACE SHORT Corner 90° One Plane	A338-24-00-	N



TRACK 48V SURFACE SHORT


Corner 90° One Plane



*Electrical connection not included

48V SYSTEM

TRACK 48V

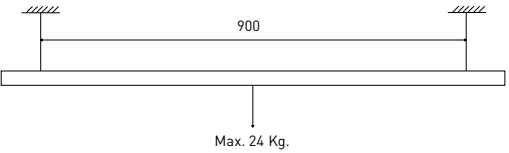


		P	V	D
CONSTANT VOLTAGE	0434-01-21	75W	48V	180 x 52 x 30mm
LED POWER SUPPLY	0434-01-22	150W	48V	240 x 60 x 49mm

DROP VOLTAGE TABLE

		CABLE LENGTH (m)			
		5	10	20	30
POWER (W)	CABLE SECTION (mm²)	TRACK LENGTH (m)			
75	0,75	50	50	30	X
	1,5	50	50	50	50
150	0,75	40	15	X	X
	1,5	50	40	20	X

COMPATIBILITY ACCORDING TO TYPE OF TRACK

TRACK 48V & TRACK 48V SURFACE SHORT

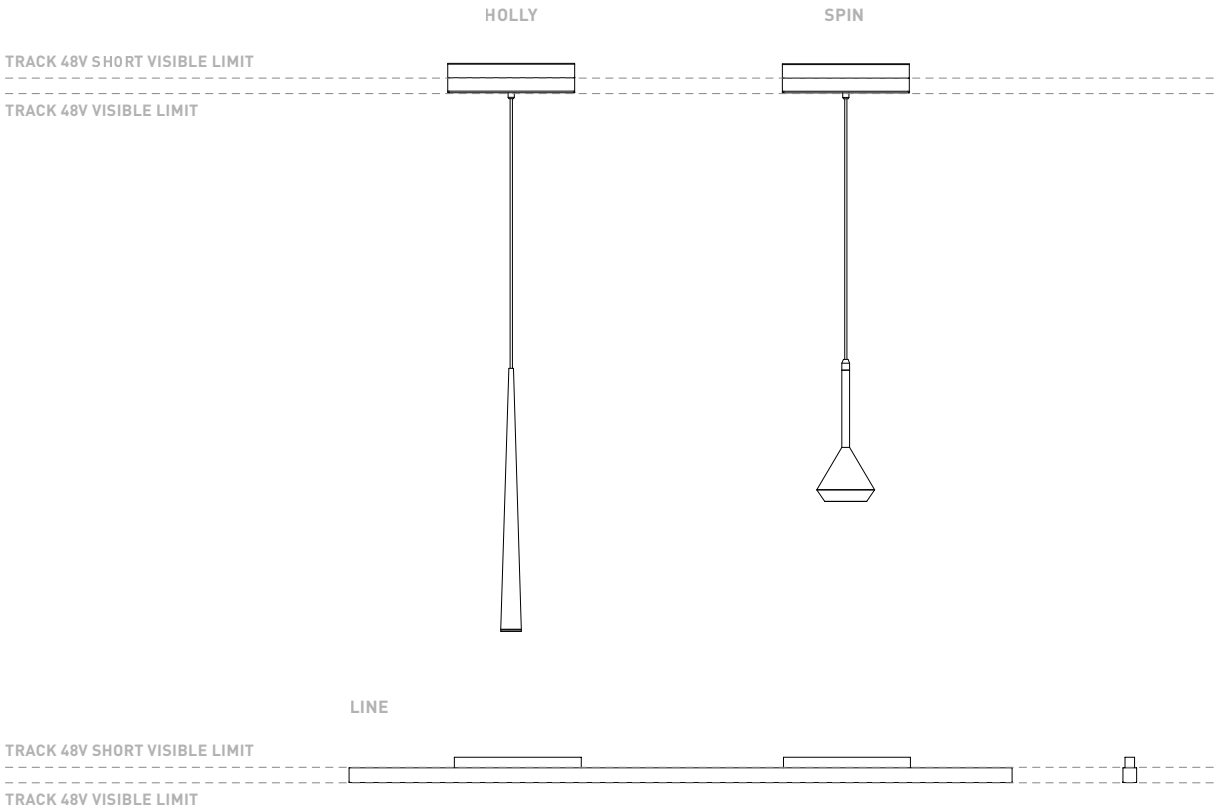


Order with *The 2019 Collection* codes. Products with one single version for both tracks

48V SYSTEM


TRACK 48V

ALL 48V TRACK




TRACK 48V Live-End Connector

A338-00-01- | N |




TRACK 48V Central Connector

A338-00-02- | N |



TRACK 48V Corner 90° Connector

A338-00-12- | N |



TRACK 48V Wireless Control

0434-01-31- | N | Casambi/AAG Stucchi App

0434-01-32- | N | AAG Stucchi App

TRIMLESS 48V



TRACK 48V TRIMLESS Short T-Bracket


A338-00-03



TRACK 48V Clamp for M6 ROD

A338-00-09

*See accessories quantities



TRACK 48V TRIMLESS Long T-Bracket


A338-00-04



TRACK 48V Track Clamp

A338-00-10

*See accessories quantities



TRACK 48V TRIMLESS Straight Joiners (2 units)


A338-00-05



TRACK 48V TRIMLESS Suspension Kit

A338-00-08

*See accessories quantities



TRACK 48V TRIMLESS Plaster Installation Guard 1m

A338-00-21


*** SUGGESTED MOUNTING ACCESSORIES QUANTITIES**

1000mm - 2 Pcs.

2000mm - 3 Pcs.

3000mm - 4 Pcs.

SURFACE, SUSPENSION , SURFACE SHORT & SUSPENSION SHORT 48V



TRACK 48V SURFACE Straight Joiner

A338-00-11- | N |

COLOUR | N ■ |

48V SYSTEM

TRACK 48V

TRIMLESS, SURFACE & SUSPENSION 48V



TRACK 48V TRIMLESS & SURFACE End

A338-00-06- | N |



TRACK 48V TRIMLESS & SURFACE End Feed

A338-00-07- | N |

SURFACE SHORT & SUSPENSION SHORT 48V



TRACK 48V SURFACE SHORT End


A338-00-18- | N |



TRACK 48V SURFACE SHORT End Feed

A338-00-19- | N |

SURFACE & SURFACE SHORT 48V




TRACK 48V Power Supply Case

A338-00-20- | N |  NO DIM

*To be installed aside 48V Surface Tracks
Power supply not included

SUSPENSION & SUSPENSION SHORT 48V




TRACK 48V Wired Power Supply Case

A338-00-22- | N |  NO DIM

A338-00-23- | N |  DIM

*Power supply not included



TRACK 48V SURFACE Suspension Kit (2 units)

A338-00-15- | N |



TRACK 48V SURFACE Suspension Feed Kit

A338-00-16- | N |  NO DIM


A338-00-17- | N |  DIM

*For remote power supply


COLOUR | N ■ |



DIMENSIONS

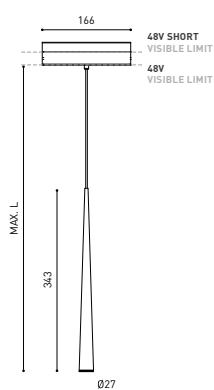

ACCESSORIES



CORD ACCESSORY

TRACK 48V OPTIONS

PRODUCT

Name	HOLLY 48V 2M 17° 2700K WT
Reference	A3490100WT
Color	Textured white
RAL	9016
Category	TRACKLIGHTS

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	190 Lm
Power	2,1 W
Power values of the system	2,21 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 3
Light beam angle	17°
Lighting efficiency	92%
Efficacy	90 Lm/W
Current intensity	700 mA
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	III
Voltage	48 Vdc
Energy efficiency	A++
LED lifespan	L80B10 (Tj=85°C) >41.000h


OTHER DATA

Ingress Protection	IP20
Cord length	2 m
Fast adjustment tensioner	No
Track type	Track 48V
Weight	290 g.
Packaged weight	413 g.
Packaging dimensions	385 x 103 x 78 mm
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene




Holly 48V is a pendant luminaire for accent lighting applications. Its geometry, stylish and elegant with a body made out of solid mechanised aluminium, define a high quality perceived product with an exquisite look. In addition, Holly uses a special designed micro-reflector to optimize the output of the LED source, achieving a relatively high amount of light. Within its applications we can consider, bar-counters, beside tables, stairwells...

POLAR DIAGRAM

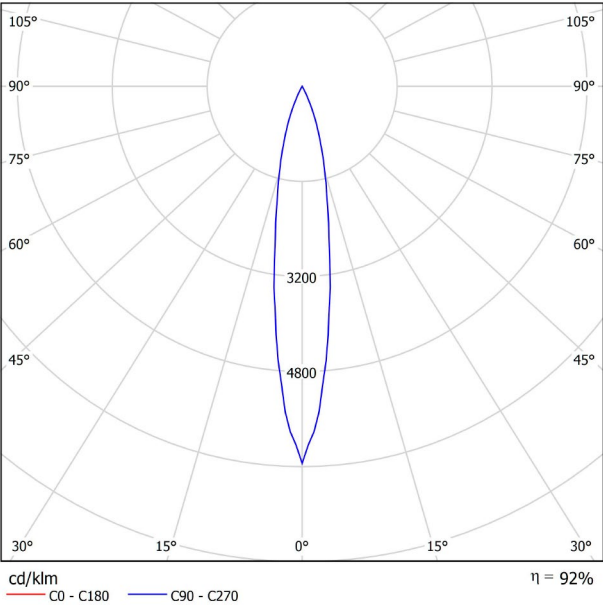



CONICAL DIAGRAM

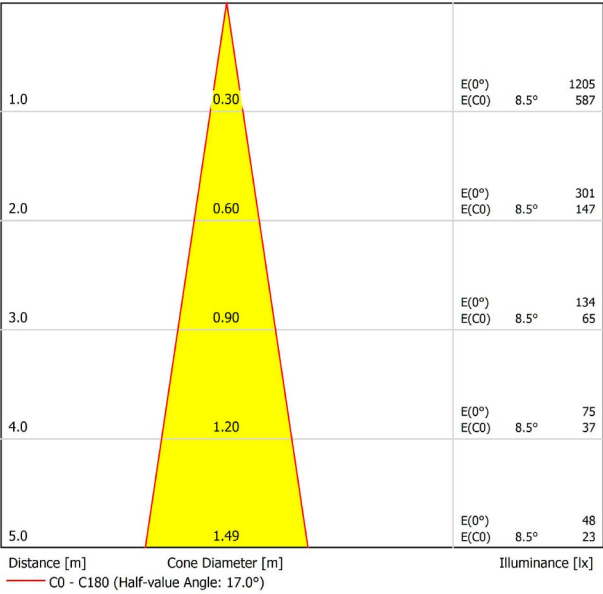




PRODUCT	
Model	Cord Accessory
Reference	02230000 WT NT
Colour	WT ☐ RAL 9016 NT ☒ RAL9005
Category	Accessories

DIMENSIONAL DRAWING

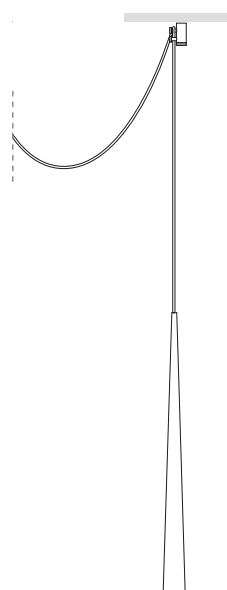

48V SYSTEM

TRACK 48V



TRACK 48V TRIMLESS


TRACK 48V TRIMLESS 1m	A338-01-00-	N
TRACK 48V TRIMLESS 2m	A338-02-00-	N
TRACK 48V TRIMLESS 3m	A338-03-00-	N
TRACK 48V TRIMLESS Corner 90° One Plane	A338-06-00-	N
TRACK 48V TRIMLESS Corner 90° Two Planes	A338-07-00-	N

RECOMMENDED FOR INSTALLATIONS WHERE THE PROFILE CAN BE INSTALLED BEFORE THE FALSE PLASTERBOARD CEILING (THICKNESS 12,5mm.)



TRACK 48V TRIMLESS


Corner 90° One Plane




*Electrical connection not included

TRACK 48V TRIMLESS

Corner 90° Two Planes



*Electrical connection not included




TRACK 48V SURFACE

TRACK 48V SURFACE 1m	A338-11-00-	N
TRACK 48V SURFACE 2m	A338-12-00-	N
TRACK 48V SURFACE 3m	A338-13-00-	N
TRACK 48V SURFACE Corner 90° One Plane	A338-14-00-	N




TRACK 48V SURFACE

Corner 90° One Plane



*Electrical connection not included




TRACK 48V SURFACE SHORT

TRACK 48V SURFACE SHORT 1m	A338-21-00-	N
TRACK 48V SURFACE SHORT 2m	A338-22-00-	N
TRACK 48V SURFACE SHORT 3m	A338-23-00-	N
TRACK 48V SURFACE SHORT Corner 90° One Plane	A338-24-00-	N



TRACK 48V SURFACE SHORT


Corner 90° One Plane



*Electrical connection not included

48V SYSTEM

TRACK 48V

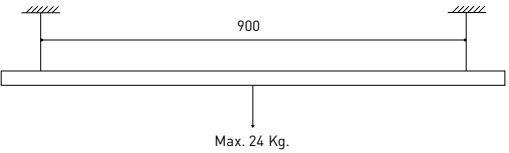


		P	V	D
CONSTANT VOLTAGE	0434-01-21	75W	48V	180 x 52 x 30mm
LED POWER SUPPLY	0434-01-22	150W	48V	240 x 60 x 49mm

DROP VOLTAGE TABLE

		CABLE LENGTH (m)			
		5	10	20	30
POWER (W)	CABLE SECTION (mm²)	TRACK LENGTH (m)			
75	0,75	50	50	30	X
	1,5	50	50	50	50
150	0,75	40	15	X	X
	1,5	50	40	20	X

COMPATIBILITY ACCORDING TO TYPE OF TRACK

TRACK 48V & TRACK 48V SURFACE SHORT

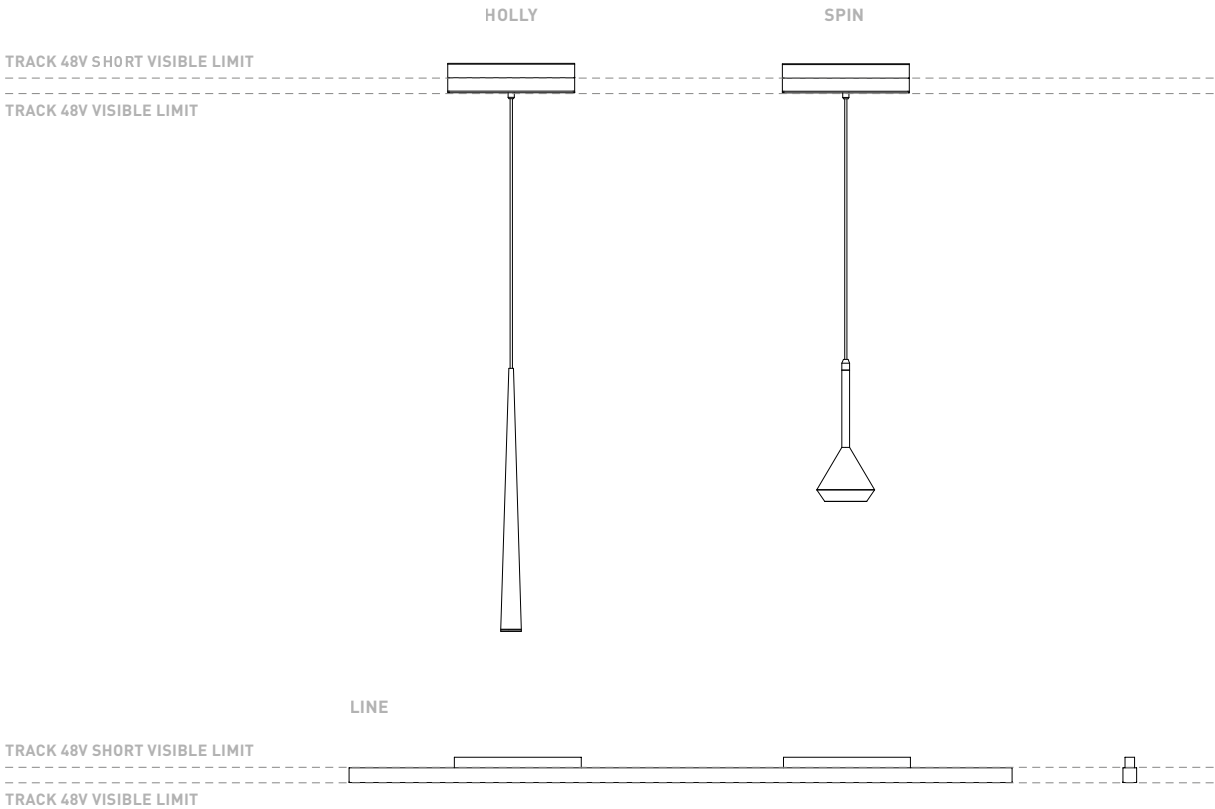


Order with *The 2019 Collection* codes. Products with one single version for both tracks

48V SYSTEM


TRACK 48V

ALL 48V TRACK




TRACK 48V Live-End Connector

A338-00-01- | N |




TRACK 48V Central Connector

A338-00-02- | N |



TRACK 48V Corner 90° Connector

A338-00-12- | N |



TRACK 48V Wireless Control

0434-01-31- | N | Casambi/AAG Stucchi App

0434-01-32- | N | AAG Stucchi App

TRIMLESS 48V



TRACK 48V TRIMLESS Short T-Bracket


A338-00-03



TRACK 48V Clamp for M6 ROD

A338-00-09

*See accessories quantities



TRACK 48V TRIMLESS Long T-Bracket


A338-00-04



TRACK 48V Track Clamp

A338-00-10

*See accessories quantities



TRACK 48V TRIMLESS Straight Joiners (2 units)


A338-00-05



TRACK 48V TRIMLESS Suspension Kit

A338-00-08

*See accessories quantities



TRACK 48V TRIMLESS Plaster Installation Guard 1m

A338-00-21


*** SUGGESTED MOUNTING ACCESSORIES QUANTITIES**

1000mm - 2 Pcs.

2000mm - 3 Pcs.

3000mm - 4 Pcs.

SURFACE, SUSPENSION , SURFACE SHORT & SUSPENSION SHORT 48V



TRACK 48V SURFACE Straight Joiner

A338-00-11- | N |

COLOUR | N ■ |

48V SYSTEM

TRACK 48V

TRIMLESS, SURFACE & SUSPENSION 48V



TRACK 48V TRIMLESS & SURFACE End

A338-00-06- | N |



TRACK 48V TRIMLESS & SURFACE End Feed

A338-00-07- | N |

SURFACE SHORT & SUSPENSION SHORT 48V



TRACK 48V SURFACE SHORT End


A338-00-18- | N |



TRACK 48V SURFACE SHORT End Feed

A338-00-19- | N |

SURFACE & SURFACE SHORT 48V




TRACK 48V Power Supply Case

A338-00-20- | N | 

*To be installed aside 48V Surface Tracks
Power supply not included

SUSPENSION & SUSPENSION SHORT 48V




TRACK 48V Wired Power Supply Case

A338-00-22- | N | 

A338-00-23- | N | 

*Power supply not included



TRACK 48V SURFACE Suspension Kit (2 units)

A338-00-15- | N |



TRACK 48V SURFACE Suspension Feed Kit

A338-00-16- | N | 


A338-00-17- | N | 

*For remote power supply


COLOUR | N ■ |



DIMENSIONS

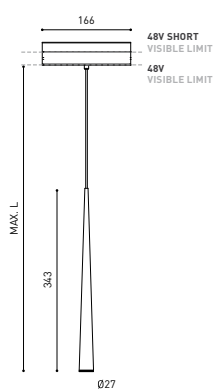

ACCESSORIES



CORD ACCESSORY

TRACK 48V OPTIONS

PRODUCT

Name	HOLLY 48V 2M 17° 3000K MC
Reference	A3490101MC
Color	Metallized copper
RAL	Paint of metallic nanoparticles
Category	TRACKLIGHTS

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	210 Lm
Power	2,1 W
Power values of the system	2,21 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 3
Light beam angle	17°
Lighting efficiency	92%
Efficacy	100 Lm/W
Current intensity	700 mA
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	III
Voltage	48 Vdc
Energy efficiency	A++
LED lifespan	L80B10 (Tj=85°C) >41.000h


OTHER DATA

Ingress Protection	IP20
Cord length	2 m
Fast adjustment tensioner	No
Track type	Track 48V
Weight	290 g.
Packaged weight	413 g.
Packaging dimensions	385 × 103 × 78 mm
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene




Holly 48V is a pendant luminaire for accent lighting applications. Its geometry, stylish and elegant with a body made out of solid mechanised aluminium, define a high quality perceived product with an exquisite look. In addition, Holly uses a special designed micro-reflector to optimize the output of the LED source, achieving a relatively high amount of light. Within its applications we can consider, bar-counters, beside tables, stairwells...

POLAR DIAGRAM

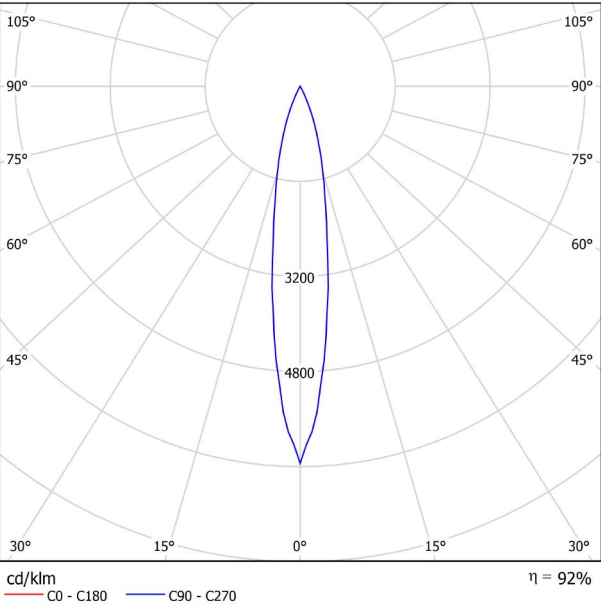



CONICAL DIAGRAM

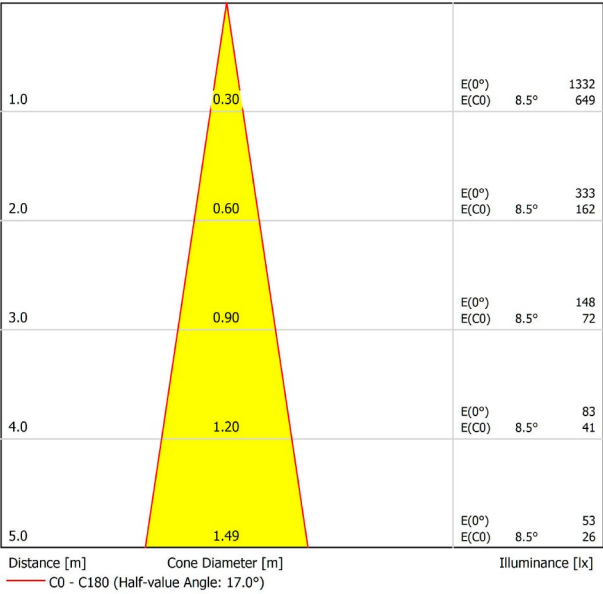




PRODUCT	
Model	Cord Accessory
Reference	02230000 WT NT
Colour	WT ☐ RAL 9016 NT ☒ RAL9005
Category	Accessories

DIMENSIONAL DRAWING

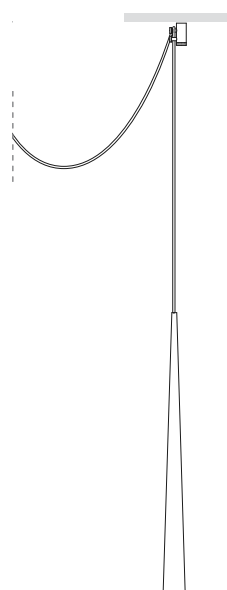

48V SYSTEM

TRACK 48V



TRACK 48V TRIMLESS


TRACK 48V TRIMLESS 1m	A338-01-00-	N
TRACK 48V TRIMLESS 2m	A338-02-00-	N
TRACK 48V TRIMLESS 3m	A338-03-00-	N
TRACK 48V TRIMLESS Corner 90° One Plane	A338-06-00-	N
TRACK 48V TRIMLESS Corner 90° Two Planes	A338-07-00-	N

RECOMMENDED FOR INSTALLATIONS WHERE THE PROFILE CAN BE INSTALLED BEFORE THE FALSE PLASTERBOARD CEILING (THICKNESS 12,5mm.)



TRACK 48V TRIMLESS


Corner 90° One Plane




*Electrical connection not included

TRACK 48V TRIMLESS

Corner 90° Two Planes



*Electrical connection not included




TRACK 48V SURFACE

TRACK 48V SURFACE 1m	A338-11-00-	N
TRACK 48V SURFACE 2m	A338-12-00-	N
TRACK 48V SURFACE 3m	A338-13-00-	N
TRACK 48V SURFACE Corner 90° One Plane	A338-14-00-	N




TRACK 48V SURFACE

Corner 90° One Plane



*Electrical connection not included




TRACK 48V SURFACE SHORT

TRACK 48V SURFACE SHORT 1m	A338-21-00-	N
TRACK 48V SURFACE SHORT 2m	A338-22-00-	N
TRACK 48V SURFACE SHORT 3m	A338-23-00-	N
TRACK 48V SURFACE SHORT Corner 90° One Plane	A338-24-00-	N



TRACK 48V SURFACE SHORT


Corner 90° One Plane



*Electrical connection not included

48V SYSTEM

TRACK 48V

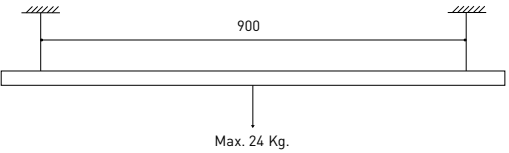


		P	V	D
CONSTANT VOLTAGE	0434-01-21	75W	48V	180 x 52 x 30mm
LED POWER SUPPLY	0434-01-22	150W	48V	240 x 60 x 49mm

DROP VOLTAGE TABLE

		CABLE LENGTH (m)			
		5	10	20	30
POWER (W)	CABLE SECTION (mm²)	TRACK LENGTH (m)			
75	0,75	50	50	30	X
	1,5	50	50	50	50
150	0,75	40	15	X	X
	1,5	50	40	20	X

COMPATIBILITY ACCORDING TO TYPE OF TRACK

TRACK 48V & TRACK 48V SURFACE SHORT

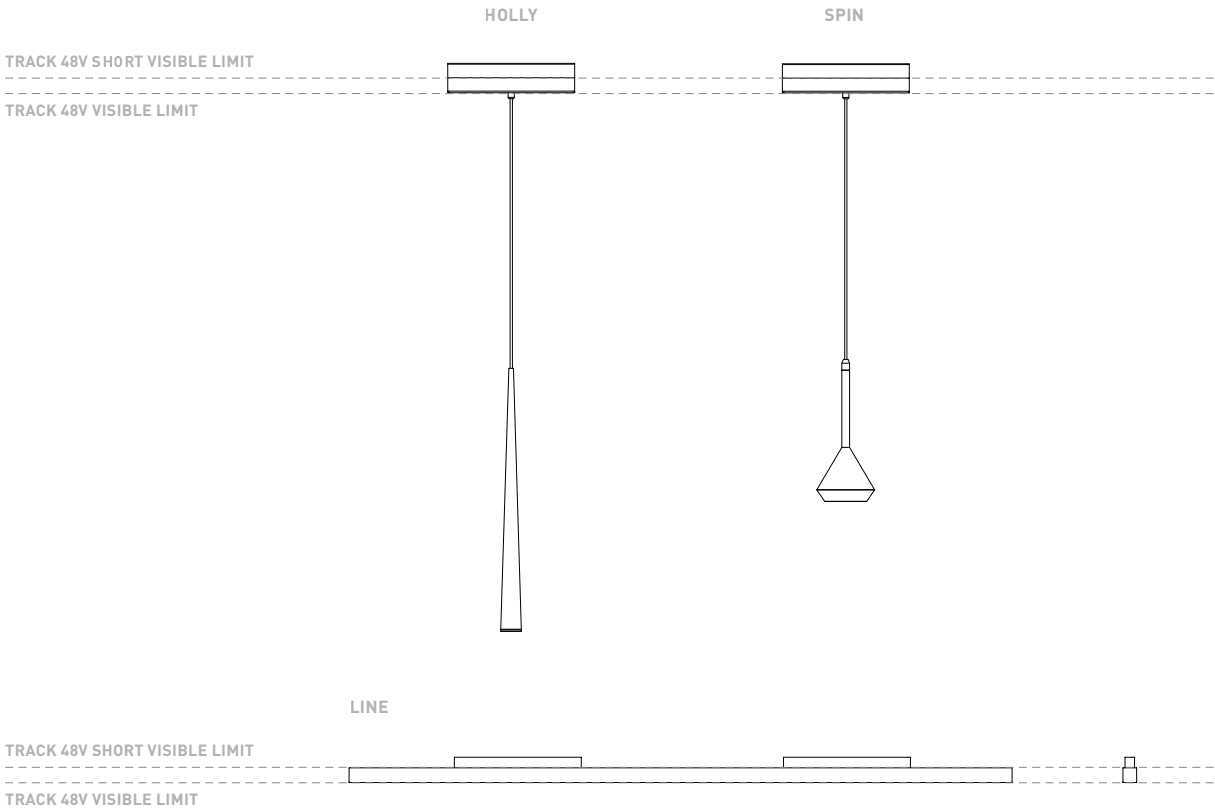


Order with *The 2019 Collection* codes. Products with one single version for both tracks

48V SYSTEM


TRACK 48V

ALL 48V TRACK




TRACK 48V Live-End Connector

A338-00-01- | N |




TRACK 48V Central Connector

A338-00-02- | N |



TRACK 48V Corner 90° Connector

A338-00-12- | N |



TRACK 48V Wireless Control

0434-01-31- | N | Casambi/AAG Stucchi App

0434-01-32- | N | AAG Stucchi App

TRIMLESS 48V



TRACK 48V TRIMLESS Short T-Bracket


A338-00-03



TRACK 48V Clamp for M6 ROD

A338-00-09

*See accessories quantities



TRACK 48V TRIMLESS Long T-Bracket


A338-00-04



TRACK 48V Track Clamp

A338-00-10

*See accessories quantities



TRACK 48V TRIMLESS Straight Joiners (2 units)


A338-00-05



TRACK 48V TRIMLESS Suspension Kit

A338-00-08

*See accessories quantities



TRACK 48V TRIMLESS Plaster Installation Guard 1m

A338-00-21


*** SUGGESTED MOUNTING ACCESSORIES QUANTITIES**

1000mm - 2 Pcs.

2000mm - 3 Pcs.

3000mm - 4 Pcs.

SURFACE, SUSPENSION , SURFACE SHORT & SUSPENSION SHORT 48V



TRACK 48V SURFACE Straight Joiner

A338-00-11- | N |

COLOUR | N ■ |

48V SYSTEM

TRACK 48V

TRIMLESS, SURFACE & SUSPENSION 48V



TRACK 48V TRIMLESS & SURFACE End

A338-00-06- | N |



TRACK 48V TRIMLESS & SURFACE End Feed

A338-00-07- | N |

SURFACE SHORT & SUSPENSION SHORT 48V



TRACK 48V SURFACE SHORT End


A338-00-18- | N |



TRACK 48V SURFACE SHORT End Feed

A338-00-19- | N |

SURFACE & SURFACE SHORT 48V




TRACK 48V Power Supply Case

A338-00-20- | N | 

*To be installed aside 48V Surface Tracks
Power supply not included

SUSPENSION & SUSPENSION SHORT 48V




TRACK 48V Wired Power Supply Case

A338-00-22- | N | 

A338-00-23- | N | 

*Power supply not included



TRACK 48V SURFACE Suspension Kit (2 units)

A338-00-15- | N |



TRACK 48V SURFACE Suspension Feed Kit

A338-00-16- | N | 


A338-00-17- | N | 

*For remote power supply


COLOUR | N ■ |



DIMENSIONS

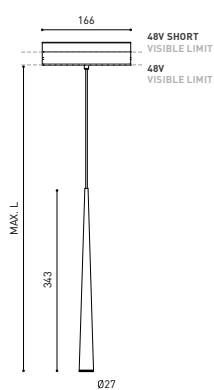

ACCESSORIES



CORD ACCESOSORY



TRACK 48V OPTIONS

PRODUCT

Name	HOLLY 48V 2M 17° 3000K MG
Reference	A3490101MG
Color	Metallized gold
RAL	Paint of metallic nanoparticles
Category	TRACKLIGHTS

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	210 Lm
Power	2,1 W
Power values of the system	2,21 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 3
Light beam angle	17°
Lighting efficiency	92%
Efficacy	100 Lm/W
Current intensity	700 mA
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	III
Voltage	48 Vdc
Energy efficiency	A++
LED lifespan	L80B10 (Tj=85°C) >41.000h


OTHER DATA

Ingress Protection	IP20
Cord length	2 m
Fast adjustment tensioner	No
Track type	Track 48V
Weight	290 g.
Packaged weight	413 g.
Packaging dimensions	385 × 103 × 78 mm
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene




Holly 48V is a pendant luminary for accent lighting applications. Its geometry, stylish and elegant with a body made out of solid mechanised aluminium, define a high quality perceived product with an exquisite look. In addition, Holly uses a special designed micro-reflector to optimize the output of the LED source, achieving a relatively high amount of light. Within its applications we can consider, bar-counters, beside tables, stairwells...

POLAR DIAGRAM

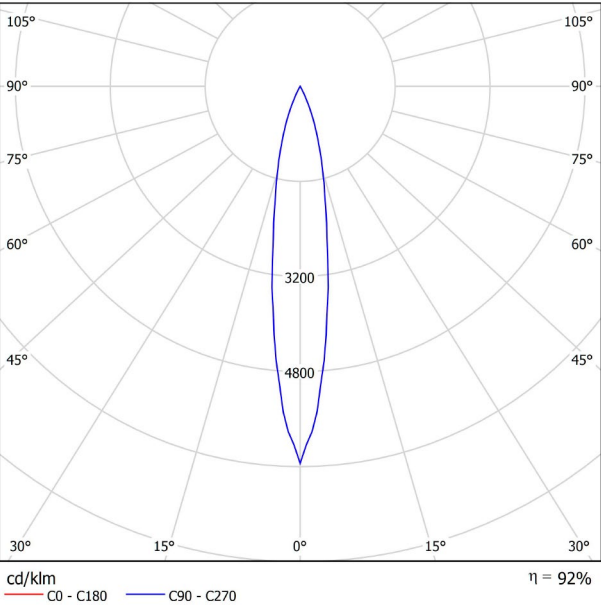



CONICAL DIAGRAM

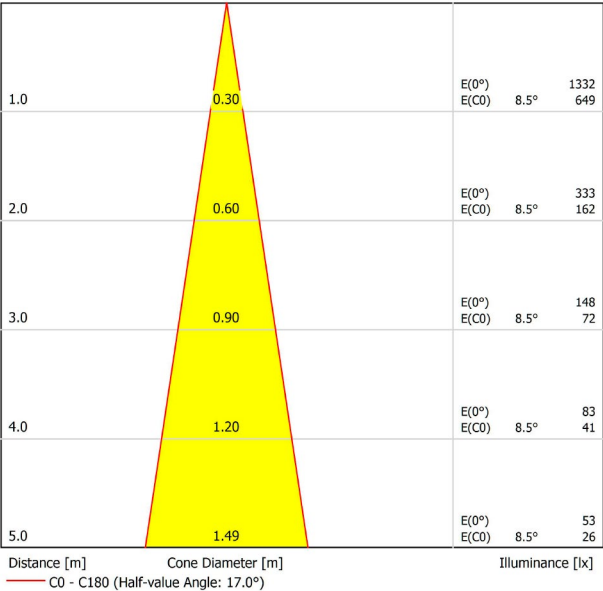




PRODUCT	
Model	Cord Accessory
Reference	02230000 WT NT
Colour	WT ☐ RAL 9016 NT ☒ RAL9005
Category	Accessories

DIMENSIONAL DRAWING

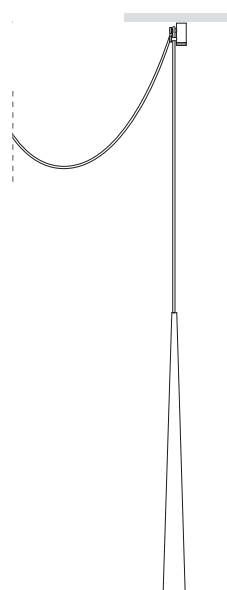

48V SYSTEM

TRACK 48V



TRACK 48V TRIMLESS


TRACK 48V TRIMLESS 1m	A338-01-00-	N
TRACK 48V TRIMLESS 2m	A338-02-00-	N
TRACK 48V TRIMLESS 3m	A338-03-00-	N
TRACK 48V TRIMLESS Corner 90° One Plane	A338-06-00-	N
TRACK 48V TRIMLESS Corner 90° Two Planes	A338-07-00-	N

RECOMMENDED FOR INSTALLATIONS WHERE THE PROFILE CAN BE INSTALLED BEFORE THE FALSE PLASTERBOARD CEILING (THICKNESS 12,5mm.)



TRACK 48V TRIMLESS


Corner 90° One Plane




*Electrical connection not included

TRACK 48V TRIMLESS

Corner 90° Two Planes



*Electrical connection not included




TRACK 48V SURFACE

TRACK 48V SURFACE 1m	A338-11-00-	N
TRACK 48V SURFACE 2m	A338-12-00-	N
TRACK 48V SURFACE 3m	A338-13-00-	N
TRACK 48V SURFACE Corner 90° One Plane	A338-14-00-	N




TRACK 48V SURFACE

Corner 90° One Plane



*Electrical connection not included




TRACK 48V SURFACE SHORT

TRACK 48V SURFACE SHORT 1m	A338-21-00-	N
TRACK 48V SURFACE SHORT 2m	A338-22-00-	N
TRACK 48V SURFACE SHORT 3m	A338-23-00-	N
TRACK 48V SURFACE SHORT Corner 90° One Plane	A338-24-00-	N



TRACK 48V SURFACE SHORT


Corner 90° One Plane



*Electrical connection not included

48V SYSTEM

TRACK 48V

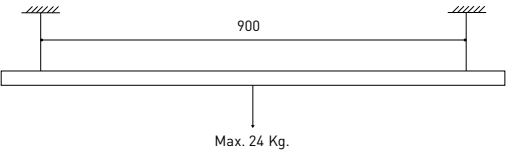


		P	V	D
CONSTANT VOLTAGE	0434-01-21	75W	48V	180 x 52 x 30mm
LED POWER SUPPLY	0434-01-22	150W	48V	240 x 60 x 49mm

DROP VOLTAGE TABLE

		CABLE LENGTH (m)			
		5	10	20	30
POWER (W)	CABLE SECTION (mm²)	TRACK LENGTH (m)			
75	0,75	50	50	30	X
	1,5	50	50	50	50
150	0,75	40	15	X	X
	1,5	50	40	20	X

COMPATIBILITY ACCORDING TO TYPE OF TRACK

TRACK 48V & TRACK 48V SURFACE SHORT

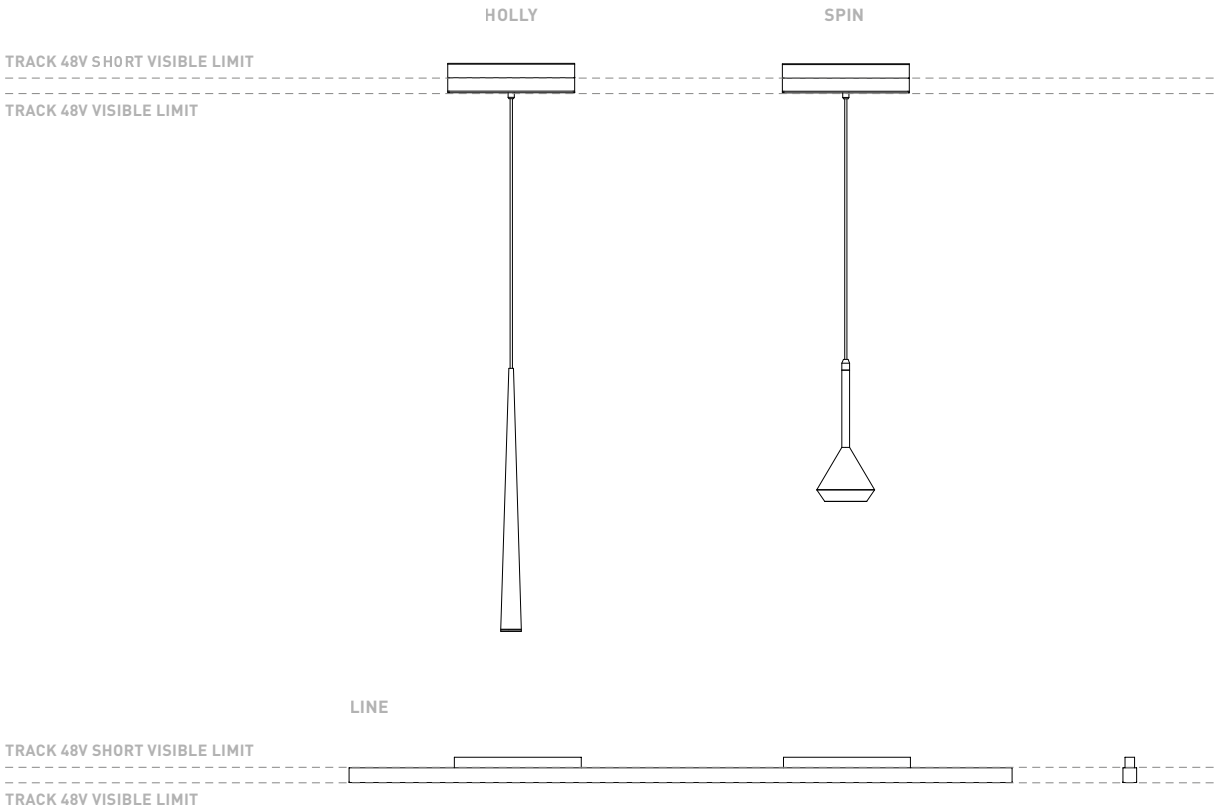


Order with *The 2019 Collection* codes. Products with one single version for both tracks

48V SYSTEM


TRACK 48V

ALL 48V TRACK




TRACK 48V Live-End Connector

A338-00-01- | N |




TRACK 48V Central Connector

A338-00-02- | N |



TRACK 48V Corner 90° Connector

A338-00-12- | N |



TRACK 48V Wireless Control

0434-01-31- | N | Casambi/AAG Stucchi App

0434-01-32- | N | AAG Stucchi App

TRIMLESS 48V



TRACK 48V TRIMLESS Short T-Bracket


A338-00-03



TRACK 48V Clamp for M6 ROD

A338-00-09

*See accessories quantities



TRACK 48V TRIMLESS Long T-Bracket


A338-00-04



TRACK 48V Track Clamp


A338-00-10

*See accessories quantities



TRACK 48V TRIMLESS Straight Joiners (2 units)


A338-00-05



TRACK 48V TRIMLESS Suspension Kit

A338-00-08

*See accessories quantities



TRACK 48V TRIMLESS Plaster Installation Guard 1m

A338-00-21


*** SUGGESTED MOUNTING ACCESSORIES QUANTITIES**

1000mm - 2 Pcs.

2000mm - 3 Pcs.

3000mm - 4 Pcs.

SURFACE, SUSPENSION , SURFACE SHORT & SUSPENSION SHORT 48V



TRACK 48V SURFACE Straight Joiner

A338-00-11- | N |

COLOUR | N ■ |

48V SYSTEM

TRACK 48V

TRIMLESS, SURFACE & SUSPENSION 48V



TRACK 48V TRIMLESS & SURFACE End

A338-00-06- | N |



TRACK 48V TRIMLESS & SURFACE End Feed

A338-00-07- | N |

SURFACE SHORT & SUSPENSION SHORT 48V



TRACK 48V SURFACE SHORT End


A338-00-18- | N |



TRACK 48V SURFACE SHORT End Feed

A338-00-19- | N |

SURFACE & SURFACE SHORT 48V




TRACK 48V Power Supply Case

A338-00-20- | N | 

*To be installed aside 48V Surface Tracks
Power supply not included

SUSPENSION & SUSPENSION SHORT 48V




TRACK 48V Wired Power Supply Case

A338-00-22- | N | 

A338-00-23- | N | 

*Power supply not included



TRACK 48V SURFACE Suspension Kit (2 units)

A338-00-15- | N |



TRACK 48V SURFACE Suspension Feed Kit

A338-00-16- | N | 


A338-00-17- | N | 

*For remote power supply


COLOUR | N ■ |



DIMENSIONS

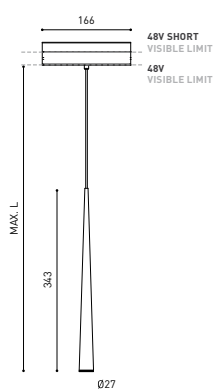

ACCESSORIES



CORD ACCESSORY

TRACK 48V OPTIONS

PRODUCT

Name	HOLLY 48V 2M 17° 3000K NT
Reference	A3490101NT
Color	Textured black
RAL	9005
Category	TRACKLIGHTS

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	210 Lm
Power	2,1 W
Power values of the system	2,21 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 3
Light beam angle	17°
Lighting efficiency	92%
Efficacy	100 Lm/W
Current intensity	700 mA
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	III
Voltage	48 Vdc
Energy efficiency	A++
LED lifespan	L80B10 (Tj=85°C) >41.000h


OTHER DATA

Ingress Protection	IP20
Cord length	2 m
Fast adjustment tensioner	No
Track type	Track 48V
Weight	290 g.
Packaged weight	413 g.
Packaging dimensions	385 × 103 × 78 mm
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene




Holly 48V is a pendant luminary for accent lighting applications. Its geometry, stylish and elegant with a body made out of solid mechanised aluminium, define a high quality perceived product with an exquisite look. In addition, Holly uses a special designed micro-reflector to optimize the output of the LED source, achieving a relatively high amount of light. Within its applications we can consider, bar-counters, beside tables, stairwells...

POLAR DIAGRAM

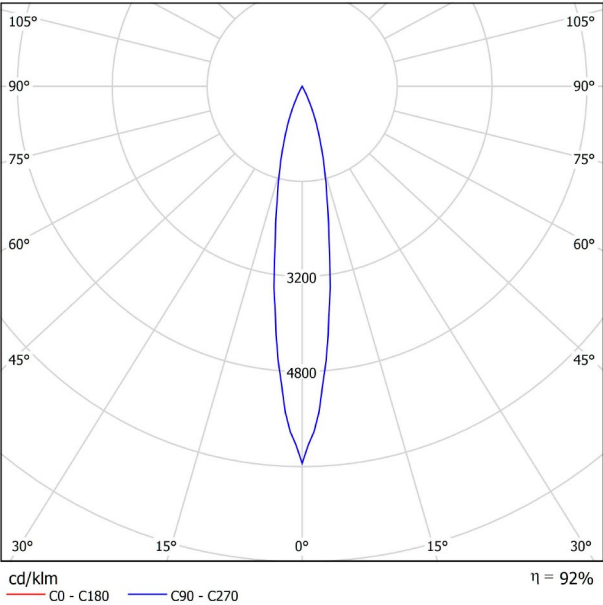



CONICAL DIAGRAM

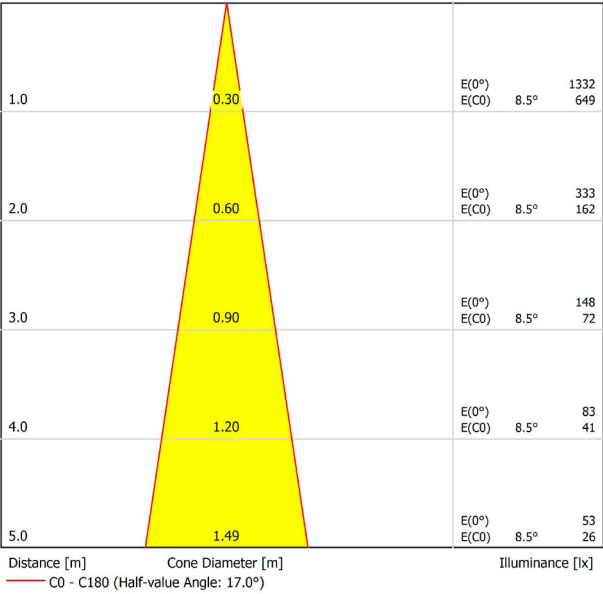




PRODUCT	
Model	Cord Accessory
Reference	02230000 WT NT
Colour	WT ☐ RAL 9016 NT ☒ RAL9005
Category	Accessories

DIMENSIONAL DRAWING

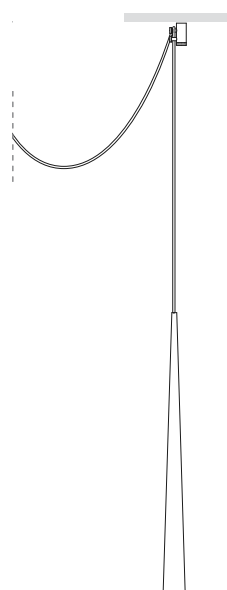

48V SYSTEM

TRACK 48V



TRACK 48V TRIMLESS


TRACK 48V TRIMLESS 1m	A338-01-00-	N
TRACK 48V TRIMLESS 2m	A338-02-00-	N
TRACK 48V TRIMLESS 3m	A338-03-00-	N
TRACK 48V TRIMLESS Corner 90° One Plane	A338-06-00-	N
TRACK 48V TRIMLESS Corner 90° Two Planes	A338-07-00-	N

RECOMMENDED FOR INSTALLATIONS WHERE THE PROFILE CAN BE INSTALLED BEFORE THE FALSE PLASTERBOARD CEILING (THICKNESS 12,5mm.)



TRACK 48V TRIMLESS


Corner 90° One Plane




*Electrical connection not included

TRACK 48V TRIMLESS

Corner 90° Two Planes



*Electrical connection not included




TRACK 48V SURFACE

TRACK 48V SURFACE 1m	A338-11-00-	N
TRACK 48V SURFACE 2m	A338-12-00-	N
TRACK 48V SURFACE 3m	A338-13-00-	N
TRACK 48V SURFACE Corner 90° One Plane	A338-14-00-	N




TRACK 48V SURFACE

Corner 90° One Plane



*Electrical connection not included




TRACK 48V SURFACE SHORT

TRACK 48V SURFACE SHORT 1m	A338-21-00-	N
TRACK 48V SURFACE SHORT 2m	A338-22-00-	N
TRACK 48V SURFACE SHORT 3m	A338-23-00-	N
TRACK 48V SURFACE SHORT Corner 90° One Plane	A338-24-00-	N



TRACK 48V SURFACE SHORT


Corner 90° One Plane



*Electrical connection not included

48V SYSTEM

TRACK 48V

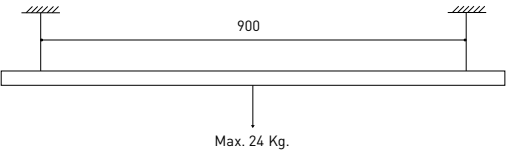


		P	V	D
CONSTANT VOLTAGE	0434-01-21	75W	48V	180 x 52 x 30mm
LED POWER SUPPLY	0434-01-22	150W	48V	240 x 60 x 49mm

DROP VOLTAGE TABLE

		CABLE LENGTH (m)			
		5	10	20	30
POWER (W)	CABLE SECTION (mm²)	TRACK LENGTH (m)			
75	0,75	50	50	30	X
	1,5	50	50	50	50
150	0,75	40	15	X	X
	1,5	50	40	20	X

COMPATIBILITY ACCORDING TO TYPE OF TRACK

TRACK 48V & TRACK 48V SURFACE SHORT

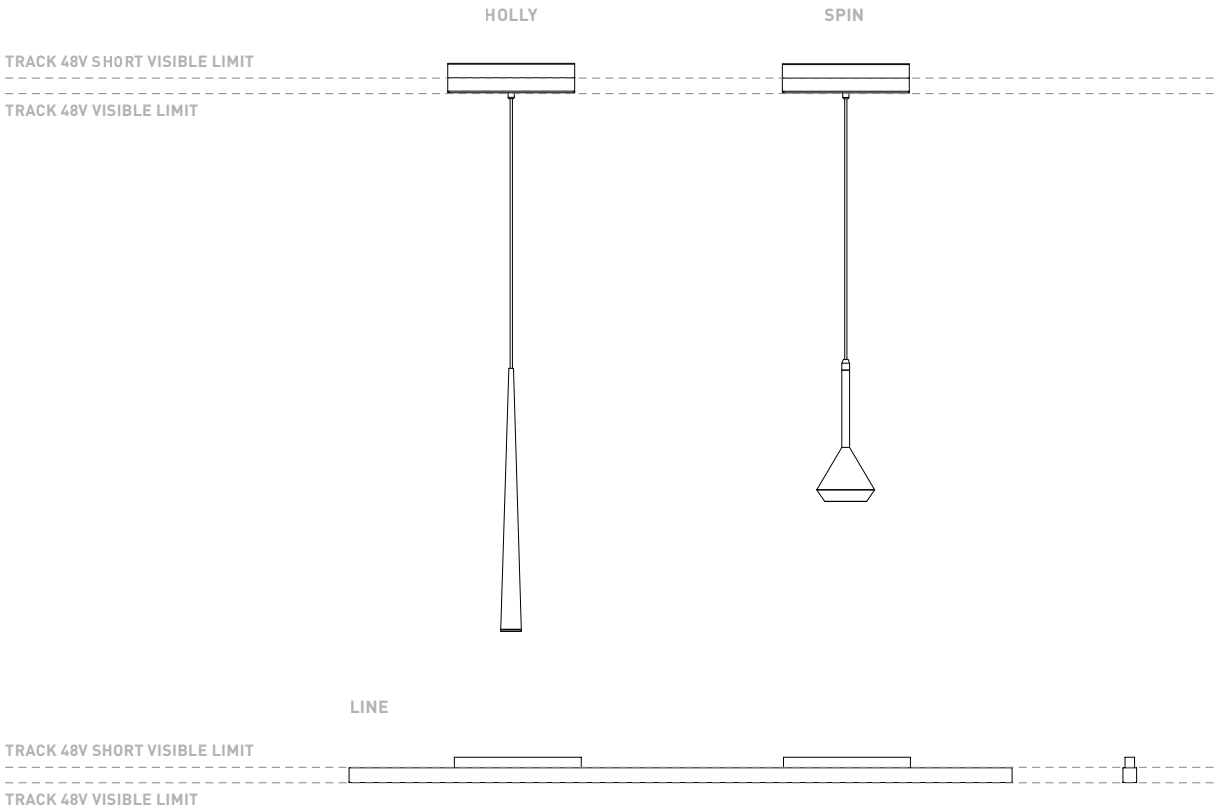


Order with *The 2019 Collection* codes. Products with one single version for both tracks

48V SYSTEM


TRACK 48V

ALL 48V TRACK




TRACK 48V Live-End Connector

A338-00-01- | N |




TRACK 48V Central Connector

A338-00-02- | N |



TRACK 48V Corner 90° Connector

A338-00-12- | N |



TRACK 48V Wireless Control

0434-01-31- | N | Casambi/AAG Stucchi App

0434-01-32- | N | AAG Stucchi App

TRIMLESS 48V



TRACK 48V TRIMLESS Short T-Bracket


A338-00-03



TRACK 48V Clamp for M6 ROD

A338-00-09

*See accessories quantities



TRACK 48V TRIMLESS Long T-Bracket


A338-00-04



TRACK 48V Track Clamp


A338-00-10

*See accessories quantities



TRACK 48V TRIMLESS Straight Joiners (2 units)


A338-00-05



TRACK 48V TRIMLESS Suspension Kit

A338-00-08

*See accessories quantities



TRACK 48V TRIMLESS Plaster Installation Guard 1m

A338-00-21


*** SUGGESTED MOUNTING ACCESSORIES QUANTITIES**

1000mm - 2 Pcs.

2000mm - 3 Pcs.

3000mm - 4 Pcs.

SURFACE, SUSPENSION , SURFACE SHORT & SUSPENSION SHORT 48V



TRACK 48V SURFACE Straight Joiner

A338-00-11- | N |

COLOUR | N ■ |

48V SYSTEM

TRACK 48V

TRIMLESS, SURFACE & SUSPENSION 48V



TRACK 48V TRIMLESS & SURFACE End

A338-00-06- | N |



TRACK 48V TRIMLESS & SURFACE End Feed

A338-00-07- | N |

SURFACE SHORT & SUSPENSION SHORT 48V



TRACK 48V SURFACE SHORT End


A338-00-18- | N |



TRACK 48V SURFACE SHORT End Feed

A338-00-19- | N |

SURFACE & SURFACE SHORT 48V




TRACK 48V Power Supply Case

A338-00-20- | N | 

*To be installed aside 48V Surface Tracks
Power supply not included

SUSPENSION & SUSPENSION SHORT 48V



TRACK 48V Wired Power Supply Case

A338-00-22- | N | 

A338-00-23- | N | 

*Power supply not included



TRACK 48V SURFACE Suspension Kit (2 units)

A338-00-15- | N |



TRACK 48V SURFACE Suspension Feed Kit

A338-00-16- | N | 


A338-00-17- | N | 

*For remote power supply


COLOUR | N ■ |



DIMENSIONS

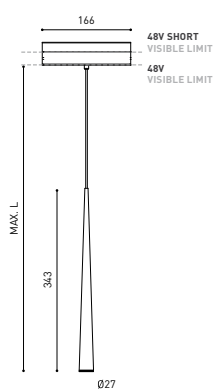

ACCESSORIES



PRODUCT

Name	HOLLY 48V 2M 17° 3000K WT
Reference	A3490101WT
Color	Textured white
RAL	9016
Category	TRACKLIGHTS

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	210 Lm
Power	2,1 W
Power values of the system	2,21 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 3
Light beam angle	17°
Lighting efficiency	92%
Efficacy	100 Lm/W
Current intensity	700 mA
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	III
Voltage	48 Vdc
Energy efficiency	A++
LED lifespan	L80B10 (Tj=85°C) >41.000h


OTHER DATA

Ingress Protection	IP20
Cord length	2 m
Fast adjustment tensioner	No
Track type	Track 48V
Weight	290 g.
Packaged weight	413 g.
Packaging dimensions	385 x 103 x 78 mm
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene




Holly 48V is a pendant luminary for accent lighting applications. Its geometry, stylish and elegant with a body made out of solid mechanised aluminium, define a high quality perceived product with an exquisite look. In addition, Holly uses a special designed micro-reflector to optimize the output of the LED source, achieving a relatively high amount of light. Within its applications we can consider, bar-counters, beside tables, stairwells...

POLAR DIAGRAM

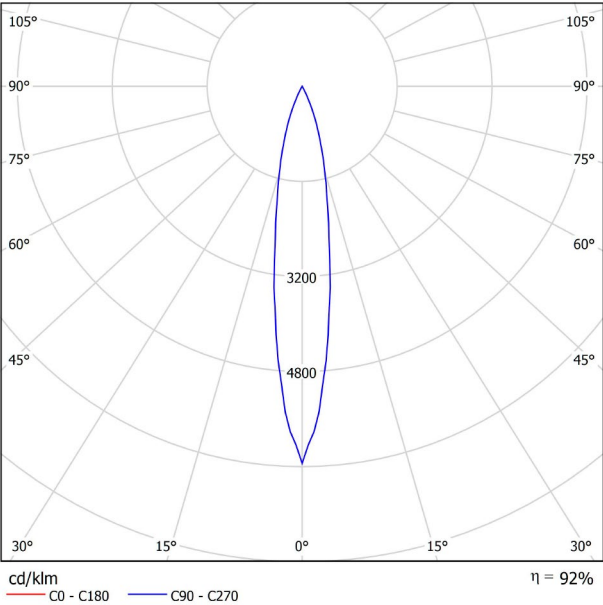



CONICAL DIAGRAM

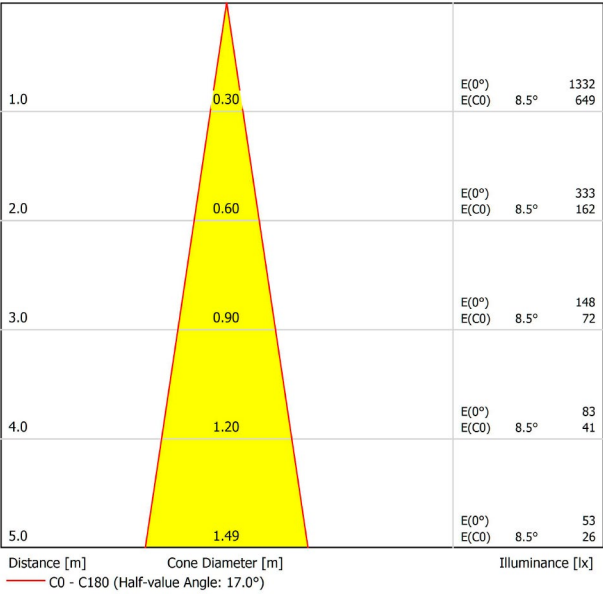




PRODUCT	
Model	Cord Accessory
Reference	02230000 WT NT
Colour	WT ☐ RAL 9016 NT ☒ RAL9005
Category	Accessories

DIMENSIONAL DRAWING

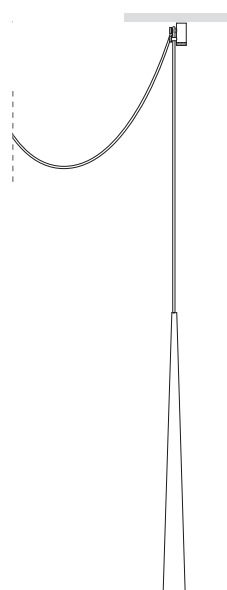

48V SYSTEM

TRACK 48V



TRACK 48V TRIMLESS


TRACK 48V TRIMLESS 1m	A338-01-00-	N
TRACK 48V TRIMLESS 2m	A338-02-00-	N
TRACK 48V TRIMLESS 3m	A338-03-00-	N
TRACK 48V TRIMLESS Corner 90° One Plane	A338-06-00-	N
TRACK 48V TRIMLESS Corner 90° Two Planes	A338-07-00-	N

RECOMMENDED FOR INSTALLATIONS WHERE THE PROFILE CAN BE INSTALLED BEFORE THE FALSE PLASTERBOARD CEILING (THICKNESS 12,5mm.)



TRACK 48V TRIMLESS


Corner 90° One Plane




*Electrical connection not included

TRACK 48V TRIMLESS

Corner 90° Two Planes



*Electrical connection not included




TRACK 48V SURFACE

TRACK 48V SURFACE 1m	A338-11-00-	N
TRACK 48V SURFACE 2m	A338-12-00-	N
TRACK 48V SURFACE 3m	A338-13-00-	N
TRACK 48V SURFACE Corner 90° One Plane	A338-14-00-	N




TRACK 48V SURFACE

Corner 90° One Plane



*Electrical connection not included




TRACK 48V SURFACE SHORT

TRACK 48V SURFACE SHORT 1m	A338-21-00-	N
TRACK 48V SURFACE SHORT 2m	A338-22-00-	N
TRACK 48V SURFACE SHORT 3m	A338-23-00-	N
TRACK 48V SURFACE SHORT Corner 90° One Plane	A338-24-00-	N



TRACK 48V SURFACE SHORT


Corner 90° One Plane



*Electrical connection not included

48V SYSTEM

TRACK 48V

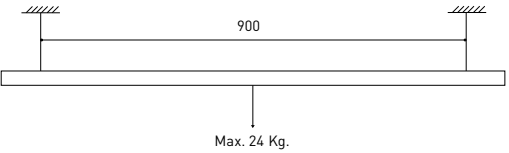


		P	V	D
CONSTANT VOLTAGE	0434-01-21	75W	48V	180 x 52 x 30mm
LED POWER SUPPLY	0434-01-22	150W	48V	240 x 60 x 49mm

DROP VOLTAGE TABLE

		CABLE LENGTH (m)			
		5	10	20	30
POWER (W)	CABLE SECTION (mm²)	TRACK LENGTH (m)			
75	0,75	50	50	30	X
	1,5	50	50	50	50
150	0,75	40	15	X	X
	1,5	50	40	20	X

COMPATIBILITY ACCORDING TO TYPE OF TRACK

TRACK 48V & TRACK 48V SURFACE SHORT

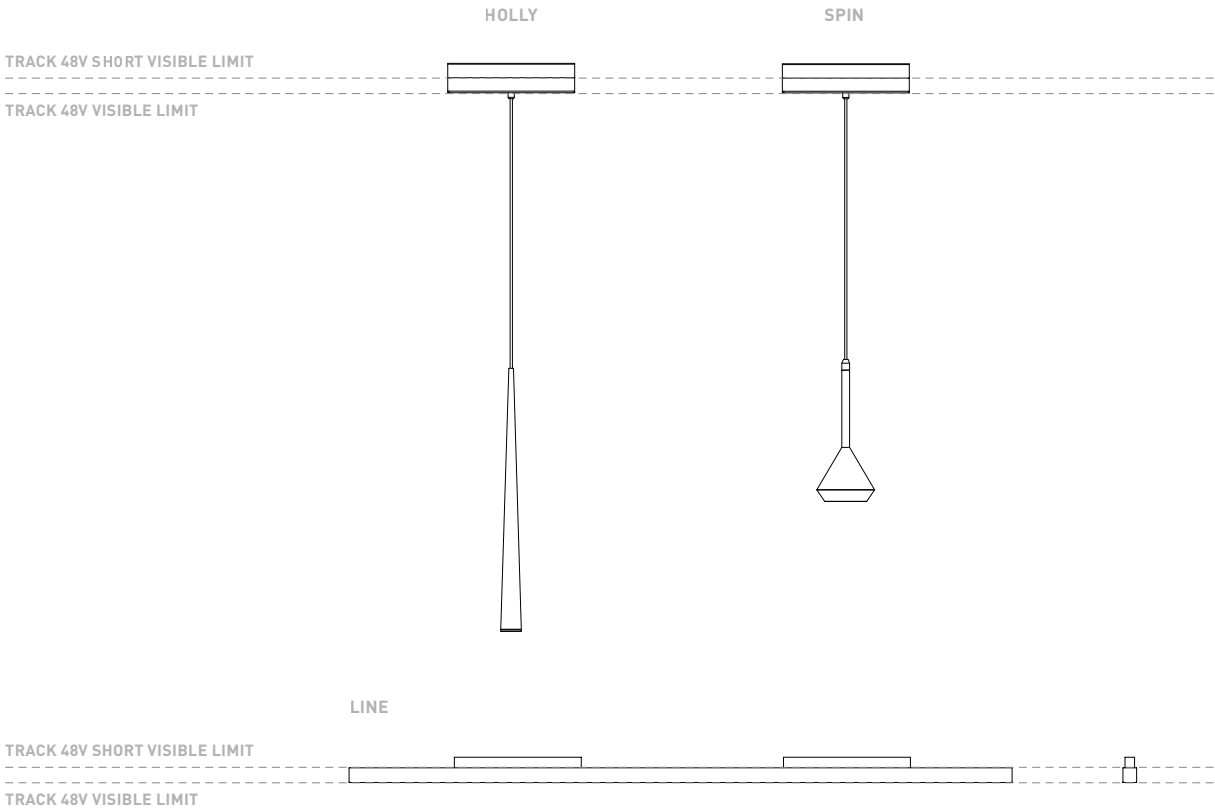


Order with *The 2019 Collection* codes. Products with one single version for both tracks

48V SYSTEM


TRACK 48V

ALL 48V TRACK




TRACK 48V Live-End Connector

A338-00-01- | N |




TRACK 48V Central Connector

A338-00-02- | N |



TRACK 48V Corner 90° Connector

A338-00-12- | N |



TRACK 48V Wireless Control

0434-01-31- | N | Casambi/AAG Stucchi App

0434-01-32- | N | AAG Stucchi App

TRIMLESS 48V



TRACK 48V TRIMLESS Short T-Bracket


A338-00-03



TRACK 48V Clamp for M6 ROD

A338-00-09

*See accessories quantities



TRACK 48V TRIMLESS Long T-Bracket


A338-00-04



TRACK 48V Track Clamp

A338-00-10

*See accessories quantities



TRACK 48V TRIMLESS Straight Joiners (2 units)


A338-00-05



TRACK 48V TRIMLESS Suspension Kit

A338-00-08

*See accessories quantities



TRACK 48V TRIMLESS Plaster Installation Guard 1m

A338-00-21


*** SUGGESTED MOUNTING ACCESSORIES QUANTITIES**

1000mm - 2 Pcs.

2000mm - 3 Pcs.

3000mm - 4 Pcs.

SURFACE, SUSPENSION , SURFACE SHORT & SUSPENSION SHORT 48V



TRACK 48V SURFACE Straight Joiner

A338-00-11- | N |

COLOUR | N ■ |

48V SYSTEM

TRACK 48V

TRIMLESS, SURFACE & SUSPENSION 48V



TRACK 48V TRIMLESS & SURFACE End

A338-00-06- | N |



TRACK 48V TRIMLESS & SURFACE End Feed

A338-00-07- | N |

SURFACE SHORT & SUSPENSION SHORT 48V



TRACK 48V SURFACE SHORT End


A338-00-18- | N |



TRACK 48V SURFACE SHORT End Feed

A338-00-19- | N |

SURFACE & SURFACE SHORT 48V




TRACK 48V Power Supply Case

A338-00-20- | N |  NO DIM

*To be installed aside 48V Surface Tracks
Power supply not included

SUSPENSION & SUSPENSION SHORT 48V



TRACK 48V Wired Power Supply Case

A338-00-22- | N |  NO DIM

A338-00-23- | N |  DIM

*Power supply not included



TRACK 48V SURFACE Suspension Kit (2 units)

A338-00-15- | N |



TRACK 48V SURFACE Suspension Feed Kit

A338-00-16- | N |  NO DIM


A338-00-17- | N |  DIM

*For remote power supply


COLOUR | N ■ |



DIMENSIONS

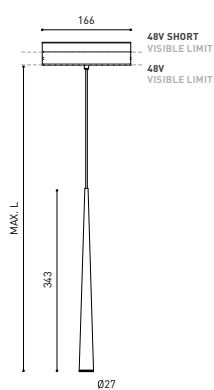

ACCESSORIES



CORD ACCESSORY

TRACK 48V OPTIONS

PRODUCT

Name	HOLLY 48V 2M 35° 2700K MC
Reference	A3490110MC
Color	Metallized copper
RAL	Paint of metallic nanoparticles
Category	TRACKLIGHTS

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	190 Lm
Power	2,1 W
Power values of the system	2,21 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 3
Light beam angle	35°
Lighting efficiency	93%
Efficacy	90 Lm/W
Current intensity	700 mA
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	III
Voltage	48 Vdc
Energy efficiency	A++
LED lifespan	L80B10 (Tj=85°C) >41.000h


OTHER DATA

Ingress Protection	IP20
Cord length	2 m
Fast adjustment tensioner	No
Track type	Track 48V
Weight	290 g.
Packaged weight	413 g.
Packaging dimensions	385 × 103 × 78 mm
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene




Holly 48V is a pendant luminaire for accent lighting applications. Its geometry, stylish and elegant with a body made out of solid mechanised aluminium, define a high quality perceived product with an exquisite look. In addition, Holly uses a special designed micro-reflector to optimize the output of the LED source, achieving a relatively high amount of light. Within its applications we can consider, bar-counters, beside tables, stairwells...

POLAR DIAGRAM

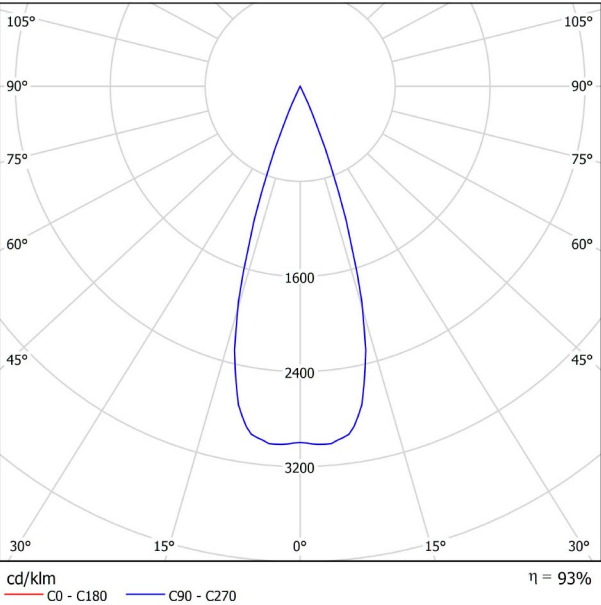



CONICAL DIAGRAM

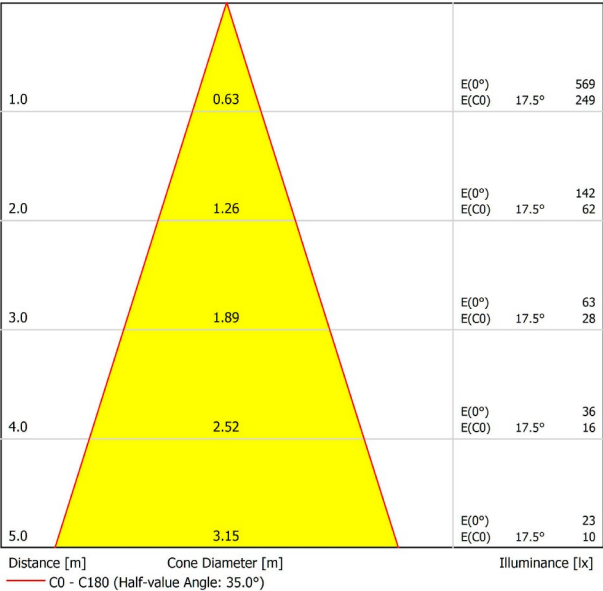




PRODUCT	
Model	Cord Accessory
Reference	02230000 WT NT
Colour	WT ☐ RAL 9016 NT ☒ RAL9005
Category	Accessories

DIMENSIONAL DRAWING

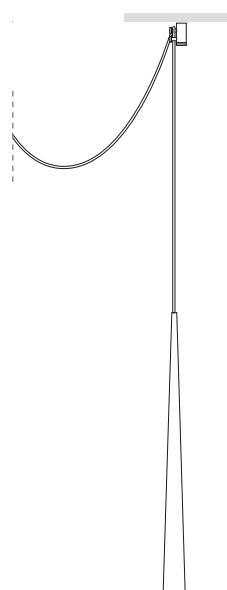

48V SYSTEM

TRACK 48V



TRACK 48V TRIMLESS


TRACK 48V TRIMLESS 1m	A338-01-00-	N
TRACK 48V TRIMLESS 2m	A338-02-00-	N
TRACK 48V TRIMLESS 3m	A338-03-00-	N
TRACK 48V TRIMLESS Corner 90° One Plane	A338-06-00-	N
TRACK 48V TRIMLESS Corner 90° Two Planes	A338-07-00-	N

RECOMMENDED FOR INSTALLATIONS WHERE THE PROFILE CAN BE INSTALLED BEFORE THE FALSE PLASTERBOARD CEILING (THICKNESS 12,5mm.)



TRACK 48V TRIMLESS


Corner 90° One Plane




*Electrical connection not included

TRACK 48V TRIMLESS

Corner 90° Two Planes



*Electrical connection not included




TRACK 48V SURFACE

TRACK 48V SURFACE 1m	A338-11-00-	N
TRACK 48V SURFACE 2m	A338-12-00-	N
TRACK 48V SURFACE 3m	A338-13-00-	N
TRACK 48V SURFACE Corner 90° One Plane	A338-14-00-	N




TRACK 48V SURFACE

Corner 90° One Plane



*Electrical connection not included




TRACK 48V SURFACE SHORT

TRACK 48V SURFACE SHORT 1m	A338-21-00-	N
TRACK 48V SURFACE SHORT 2m	A338-22-00-	N
TRACK 48V SURFACE SHORT 3m	A338-23-00-	N
TRACK 48V SURFACE SHORT Corner 90° One Plane	A338-24-00-	N



TRACK 48V SURFACE SHORT


Corner 90° One Plane



*Electrical connection not included

48V SYSTEM

TRACK 48V

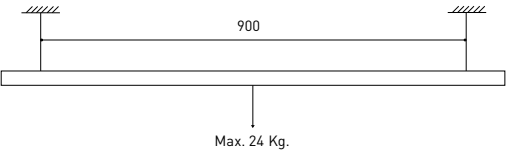


		P	V	D
CONSTANT VOLTAGE	0434-01-21	75W	48V	180 x 52 x 30mm
LED POWER SUPPLY	0434-01-22	150W	48V	240 x 60 x 49mm

DROP VOLTAGE TABLE

		CABLE LENGTH (m)			
		5	10	20	30
POWER (W)	CABLE SECTION (mm²)	TRACK LENGTH (m)			
75	0,75	50	50	30	X
	1,5	50	50	50	50
150	0,75	40	15	X	X
	1,5	50	40	20	X

COMPATIBILITY ACCORDING TO TYPE OF TRACK

TRACK 48V & TRACK 48V SURFACE SHORT

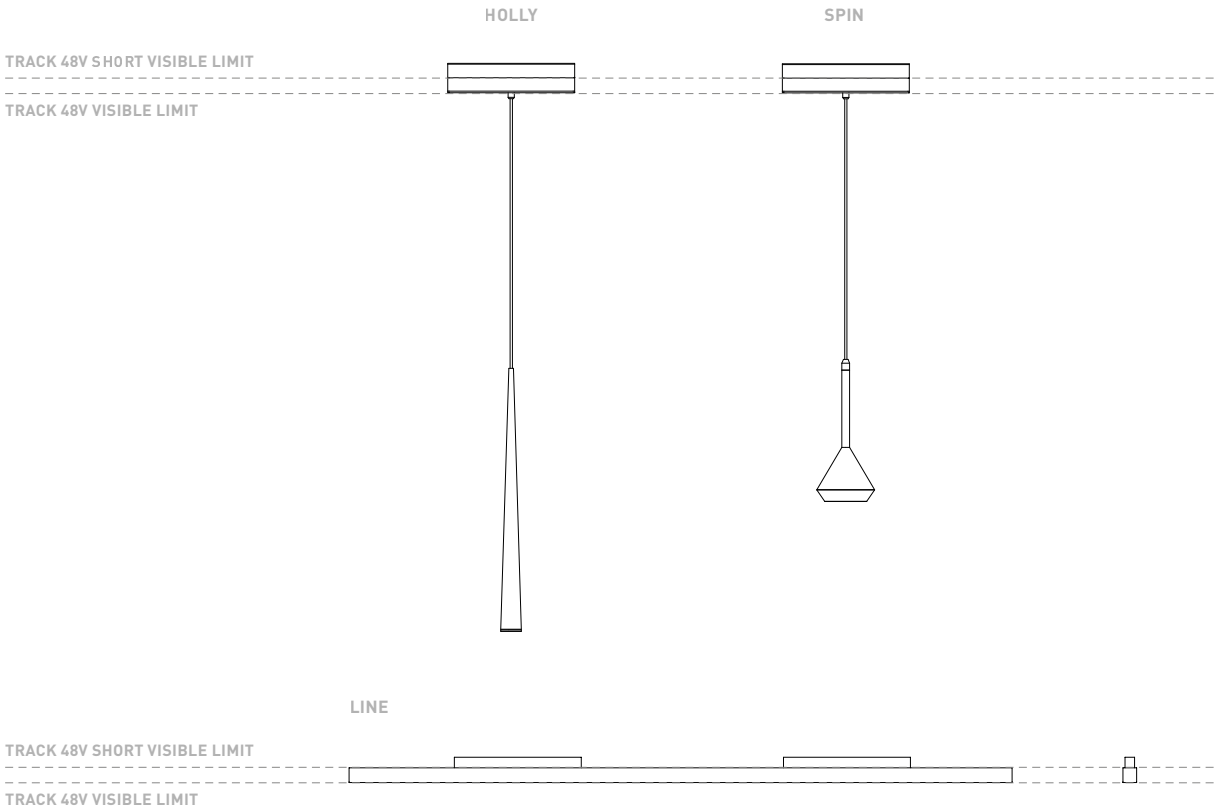


Order with *The 2019 Collection* codes. Products with one single version for both tracks

48V SYSTEM


TRACK 48V

ALL 48V TRACK




TRACK 48V Live-End Connector

A338-00-01- | N |




TRACK 48V Central Connector

A338-00-02- | N |



TRACK 48V Corner 90° Connector

A338-00-12- | N |



TRACK 48V Wireless Control

0434-01-31- | N | Casambi/AAG Stucchi App

0434-01-32- | N | AAG Stucchi App

TRIMLESS 48V



TRACK 48V TRIMLESS Short T-Bracket


A338-00-03



TRACK 48V Clamp for M6 ROD

A338-00-09

*See accessories quantities



TRACK 48V TRIMLESS Long T-Bracket


A338-00-04



TRACK 48V Track Clamp

A338-00-10

*See accessories quantities



TRACK 48V TRIMLESS Straight Joiners (2 units)


A338-00-05



TRACK 48V TRIMLESS Suspension Kit

A338-00-08

*See accessories quantities



TRACK 48V TRIMLESS Plaster Installation Guard 1m

A338-00-21


*** SUGGESTED MOUNTING ACCESSORIES QUANTITIES**

1000mm - 2 Pcs.

2000mm - 3 Pcs.

3000mm - 4 Pcs.

SURFACE, SUSPENSION , SURFACE SHORT & SUSPENSION SHORT 48V



TRACK 48V SURFACE Straight Joiner

A338-00-11- | N |

COLOUR | N ■ |

48V SYSTEM

TRACK 48V

TRIMLESS, SURFACE & SUSPENSION 48V



TRACK 48V TRIMLESS & SURFACE End

A338-00-06- | N |



TRACK 48V TRIMLESS & SURFACE End Feed

A338-00-07- | N |

SURFACE SHORT & SUSPENSION SHORT 48V



TRACK 48V SURFACE SHORT End


A338-00-18- | N |



TRACK 48V SURFACE SHORT End Feed

A338-00-19- | N |

SURFACE & SURFACE SHORT 48V




TRACK 48V Power Supply Case

A338-00-20- | N | 

*To be installed aside 48V Surface Tracks
Power supply not included

SUSPENSION & SUSPENSION SHORT 48V



TRACK 48V Wired Power Supply Case

A338-00-22- | N | 

A338-00-23- | N | 

*Power supply not included



TRACK 48V SURFACE Suspension Kit (2 units)

A338-00-15- | N |



TRACK 48V SURFACE Suspension Feed Kit

A338-00-16- | N | 


A338-00-17- | N | 

*For remote power supply


COLOUR | N ■ |



DIMENSIONS

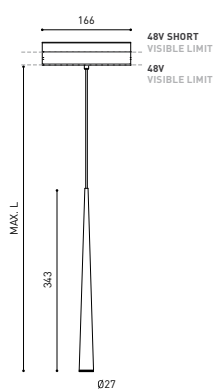

ACCESSORIES



PRODUCT

Name	HOLLY 48V 2M 35° 2700K MG
Reference	A3490110MG
Color	Metallized gold
RAL	Paint of metallic nanoparticles
Category	TRACKLIGHTS

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	190 Lm
Power	2,1 W
Power values of the system	2,21 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 3
Light beam angle	35°
Lighting efficiency	93%
Efficacy	90 Lm/W
Current intensity	700 mA
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	III
Voltage	48 Vdc
Energy efficiency	A++
LED lifespan	L80B10 (Tj=85°C) >41.000h


OTHER DATA

Ingress Protection	IP20
Cord length	2 m
Fast adjustment tensioner	No
Track type	Track 48V
Weight	290 g.
Packaged weight	413 g.
Packaging dimensions	385 × 103 × 78 mm
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene




Holly 48V is a pendant luminary for accent lighting applications. Its geometry, stylish and elegant with a body made out of solid mechanised aluminium, define a high quality perceived product with an exquisite look. In addition, Holly uses a special designed micro-reflector to optimize the output of the LED source, achieving a relatively high amount of light. Within its applications we can consider, bar-counters, beside tables, stairwells...

POLAR DIAGRAM

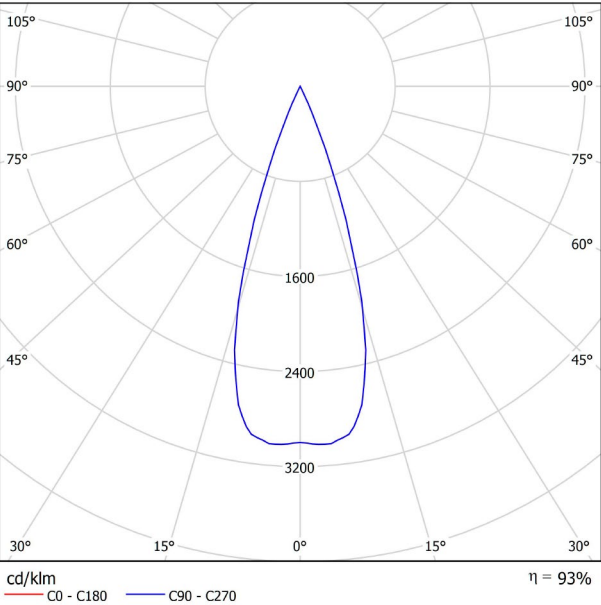



CONICAL DIAGRAM

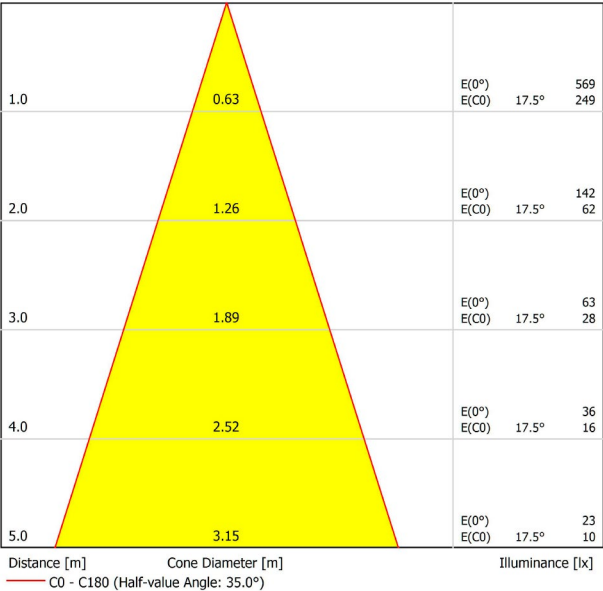




PRODUCT	
Model	Cord Accessory
Reference	02230000 WT NT
Colour	WT ☐ RAL 9016 NT ☒ RAL9005
Category	Accessories

DIMENSIONAL DRAWING

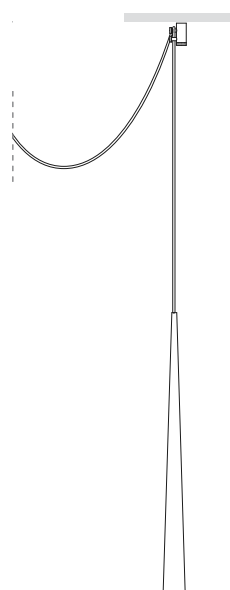

48V SYSTEM

TRACK 48V



TRACK 48V TRIMLESS


TRACK 48V TRIMLESS 1m	A338-01-00-	N
TRACK 48V TRIMLESS 2m	A338-02-00-	N
TRACK 48V TRIMLESS 3m	A338-03-00-	N
TRACK 48V TRIMLESS Corner 90° One Plane	A338-06-00-	N
TRACK 48V TRIMLESS Corner 90° Two Planes	A338-07-00-	N

RECOMMENDED FOR INSTALLATIONS WHERE THE PROFILE CAN BE INSTALLED BEFORE THE FALSE PLASTERBOARD CEILING (THICKNESS 12,5mm.)



TRACK 48V TRIMLESS


Corner 90° One Plane




*Electrical connection not included

TRACK 48V TRIMLESS

Corner 90° Two Planes



*Electrical connection not included




TRACK 48V SURFACE

TRACK 48V SURFACE 1m	A338-11-00-	N
TRACK 48V SURFACE 2m	A338-12-00-	N
TRACK 48V SURFACE 3m	A338-13-00-	N
TRACK 48V SURFACE Corner 90° One Plane	A338-14-00-	N




TRACK 48V SURFACE

Corner 90° One Plane



*Electrical connection not included




TRACK 48V SURFACE SHORT

TRACK 48V SURFACE SHORT 1m	A338-21-00-	N
TRACK 48V SURFACE SHORT 2m	A338-22-00-	N
TRACK 48V SURFACE SHORT 3m	A338-23-00-	N
TRACK 48V SURFACE SHORT Corner 90° One Plane	A338-24-00-	N



TRACK 48V SURFACE SHORT


Corner 90° One Plane



*Electrical connection not included

48V SYSTEM

TRACK 48V

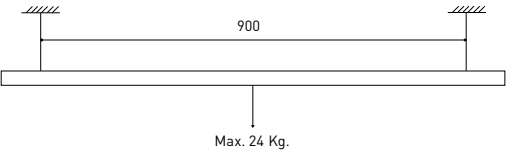


		P	V	D
CONSTANT VOLTAGE	0434-01-21	75W	48V	180 x 52 x 30mm
LED POWER SUPPLY	0434-01-22	150W	48V	240 x 60 x 49mm

DROP VOLTAGE TABLE

		CABLE LENGTH (m)			
		5	10	20	30
POWER (W)	CABLE SECTION (mm²)	TRACK LENGTH (m)			
75	0,75	50	50	30	X
	1,5	50	50	50	50
150	0,75	40	15	X	X
	1,5	50	40	20	X

COMPATIBILITY ACCORDING TO TYPE OF TRACK

TRACK 48V & TRACK 48V SURFACE SHORT

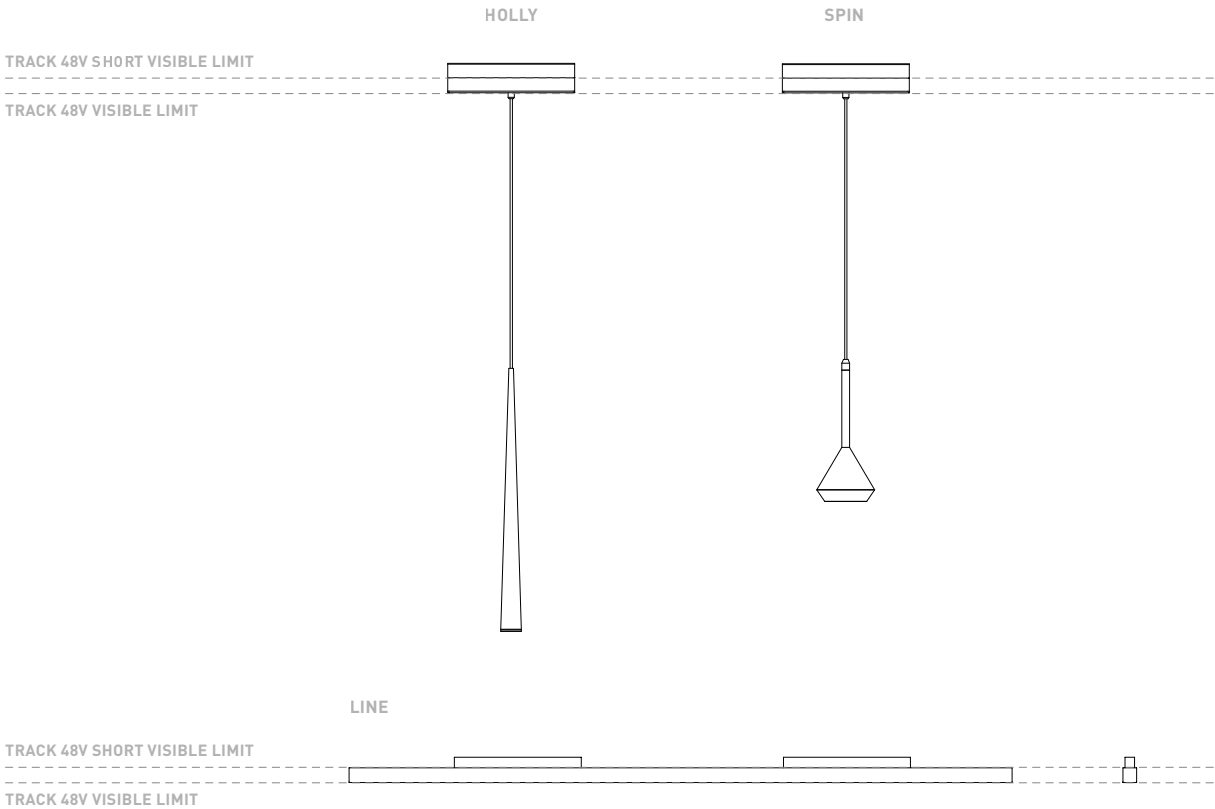


Order with *The 2019 Collection* codes. Products with one single version for both tracks

48V SYSTEM


TRACK 48V

ALL 48V TRACK




TRACK 48V Live-End Connector

A338-00-01- | N |




TRACK 48V Central Connector

A338-00-02- | N |



TRACK 48V Corner 90° Connector

A338-00-12- | N |



TRACK 48V Wireless Control

0434-01-31- | N | Casambi/AAG Stucchi App

0434-01-32- | N | AAG Stucchi App

TRIMLESS 48V



TRACK 48V TRIMLESS Short T-Bracket


A338-00-03



TRACK 48V Clamp for M6 ROD

A338-00-09

*See accessories quantities



TRACK 48V TRIMLESS Long T-Bracket


A338-00-04



TRACK 48V Track Clamp


A338-00-10

*See accessories quantities



TRACK 48V TRIMLESS Straight Joiners (2 units)


A338-00-05



TRACK 48V TRIMLESS Suspension Kit

A338-00-08

*See accessories quantities



TRACK 48V TRIMLESS Plaster Installation Guard 1m

A338-00-21


*** SUGGESTED MOUNTING ACCESSORIES QUANTITIES**

1000mm - 2 Pcs.

2000mm - 3 Pcs.

3000mm - 4 Pcs.

SURFACE, SUSPENSION , SURFACE SHORT & SUSPENSION SHORT 48V



TRACK 48V SURFACE Straight Joiner

A338-00-11- | N |

COLOUR | N ■ |

48V SYSTEM

TRACK 48V

TRIMLESS, SURFACE & SUSPENSION 48V



TRACK 48V TRIMLESS & SURFACE End

A338-00-06- | N |



TRACK 48V TRIMLESS & SURFACE End Feed

A338-00-07- | N |

SURFACE SHORT & SUSPENSION SHORT 48V



TRACK 48V SURFACE SHORT End


A338-00-18- | N |



TRACK 48V SURFACE SHORT End Feed

A338-00-19- | N |

SURFACE & SURFACE SHORT 48V




TRACK 48V Power Supply Case

A338-00-20- | N | 

*To be installed aside 48V Surface Tracks
Power supply not included

SUSPENSION & SUSPENSION SHORT 48V



TRACK 48V Wired Power Supply Case

A338-00-22- | N | 

A338-00-23- | N | 

*Power supply not included



TRACK 48V SURFACE Suspension Kit (2 units)

A338-00-15- | N |



TRACK 48V SURFACE Suspension Feed Kit

A338-00-16- | N | 


A338-00-17- | N | 

*For remote power supply

COLOUR | N ■ |



DIMENSIONS

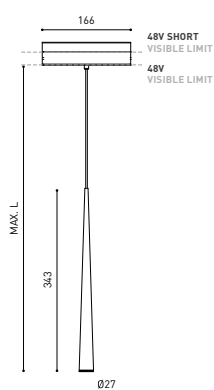

ACCESSORIES



CORD ACCESSORY

TRACK 48V OPTIONS

PRODUCT

Name	HOLLY 48V 2M 35° 2700K NT
Reference	A3490110NT
Color	Textured black
RAL	9005
Category	TRACKLIGHTS

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	190 Lm
Power	2,1 W
Power values of the system	2,21 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 3
Light beam angle	35°
Lighting efficiency	93%
Efficacy	90 Lm/W
Current intensity	700 mA
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	III
Voltage	48 Vdc
Energy efficiency	A++
LED lifespan	L80B10 (Tj=85°C) >41.000h


OTHER DATA

Ingress Protection	IP20
Cord length	2 m
Fast adjustment tensioner	No
Track type	Track 48V
Weight	290 g.
Packaged weight	413 g.
Packaging dimensions	385 × 103 × 78 mm
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene




Holly 48V is a pendant luminaire for accent lighting applications. Its geometry, stylish and elegant with a body made out of solid mechanised aluminium, define a high quality perceived product with an exquisite look. In addition, Holly uses a special designed micro-reflector to optimize the output of the LED source, achieving a relatively high amount of light. Within its applications we can consider, bar-counters, beside tables, stairwells...

POLAR DIAGRAM

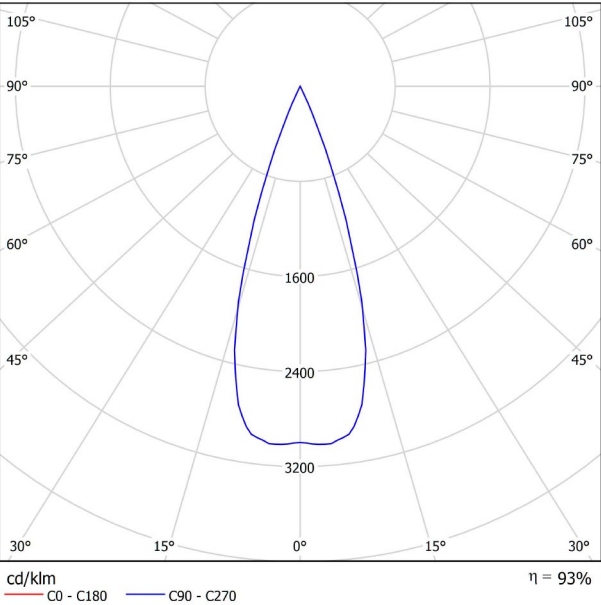



CONICAL DIAGRAM

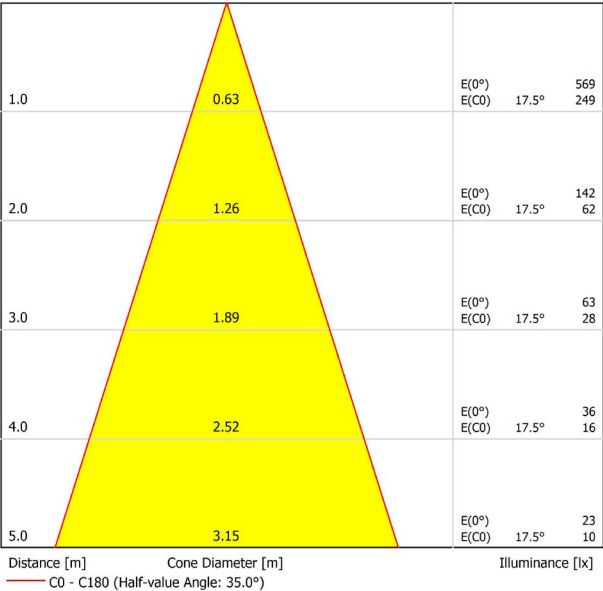




PRODUCT	
Model	Cord Accessory
Reference	02230000 WT NT
Colour	WT ☐ RAL 9016 NT ☒ RAL9005
Category	Accessories

DIMENSIONAL DRAWING



48V SYSTEM

TRACK 48V



TRACK 48V TRIMLESS


TRACK 48V TRIMLESS 1m	A338-01-00-	N
TRACK 48V TRIMLESS 2m	A338-02-00-	N
TRACK 48V TRIMLESS 3m	A338-03-00-	N
TRACK 48V TRIMLESS Corner 90° One Plane	A338-06-00-	N
TRACK 48V TRIMLESS Corner 90° Two Planes	A338-07-00-	N

RECOMMENDED FOR INSTALLATIONS WHERE THE PROFILE CAN BE INSTALLED BEFORE THE FALSE PLASTERBOARD CEILING (THICKNESS 12,5mm.)



TRACK 48V TRIMLESS


Corner 90° One Plane




*Electrical connection not included

TRACK 48V TRIMLESS

Corner 90° Two Planes



*Electrical connection not included




TRACK 48V SURFACE

TRACK 48V SURFACE 1m	A338-11-00-	N
TRACK 48V SURFACE 2m	A338-12-00-	N
TRACK 48V SURFACE 3m	A338-13-00-	N
TRACK 48V SURFACE Corner 90° One Plane	A338-14-00-	N




TRACK 48V SURFACE

Corner 90° One Plane



*Electrical connection not included




TRACK 48V SURFACE SHORT

TRACK 48V SURFACE SHORT 1m	A338-21-00-	N
TRACK 48V SURFACE SHORT 2m	A338-22-00-	N
TRACK 48V SURFACE SHORT 3m	A338-23-00-	N
TRACK 48V SURFACE SHORT Corner 90° One Plane	A338-24-00-	N



TRACK 48V SURFACE SHORT


Corner 90° One Plane



*Electrical connection not included

48V SYSTEM

TRACK 48V

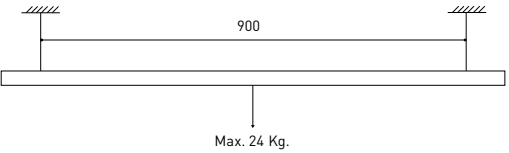


		P	V	D
CONSTANT VOLTAGE	0434-01-21	75W	48V	180 x 52 x 30mm
LED POWER SUPPLY	0434-01-22	150W	48V	240 x 60 x 49mm

DROP VOLTAGE TABLE

		CABLE LENGTH (m)			
		5	10	20	30
POWER (W)	CABLE SECTION (mm²)	TRACK LENGTH (m)			
75	0,75	50	50	30	X
	1,5	50	50	50	50
150	0,75	40	15	X	X
	1,5	50	40	20	X

COMPATIBILITY ACCORDING TO TYPE OF TRACK

TRACK 48V & TRACK 48V SURFACE SHORT

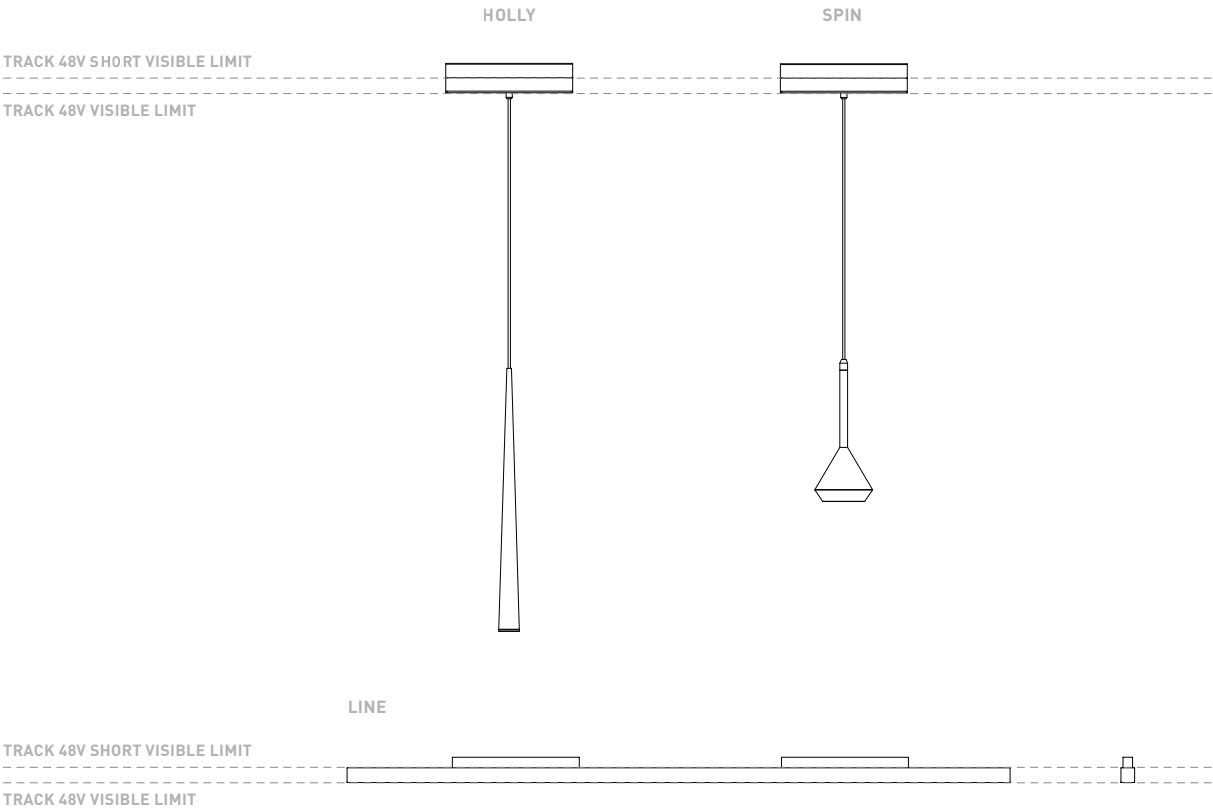


Order with *The 2019 Collection* codes. Products with one single version for both tracks

48V SYSTEM


TRACK 48V

ALL 48V TRACK




TRACK 48V Live-End Connector

A338-00-01- | N |




TRACK 48V Central Connector

A338-00-02- | N |



TRACK 48V Corner 90° Connector

A338-00-12- | N |



TRACK 48V Wireless Control

0434-01-31- | N | Casambi/AAG Stucchi App

0434-01-32- | N | AAG Stucchi App

TRIMLESS 48V



TRACK 48V TRIMLESS Short T-Bracket


A338-00-03



TRACK 48V Clamp for M6 ROD

A338-00-09

*See accessories quantities



TRACK 48V TRIMLESS Long T-Bracket


A338-00-04



TRACK 48V Track Clamp


A338-00-10

*See accessories quantities



TRACK 48V TRIMLESS Straight Joiners (2 units)


A338-00-05



TRACK 48V TRIMLESS Suspension Kit

A338-00-08

*See accessories quantities



TRACK 48V TRIMLESS Plaster Installation Guard 1m

A338-00-21


*** SUGGESTED MOUNTING ACCESSORIES QUANTITIES**

1000mm - 2 Pcs.

2000mm - 3 Pcs.

3000mm - 4 Pcs.

SURFACE, SUSPENSION , SURFACE SHORT & SUSPENSION SHORT 48V



TRACK 48V SURFACE Straight Joiner

A338-00-11- | N |

COLOUR | N ■ |

48V SYSTEM

TRACK 48V

TRIMLESS, SURFACE & SUSPENSION 48V



TRACK 48V TRIMLESS & SURFACE End

A338-00-06- | N |



TRACK 48V TRIMLESS & SURFACE End Feed

A338-00-07- | N |

SURFACE SHORT & SUSPENSION SHORT 48V



TRACK 48V SURFACE SHORT End


A338-00-18- | N |



TRACK 48V SURFACE SHORT End Feed

A338-00-19- | N |

SURFACE & SURFACE SHORT 48V




TRACK 48V Power Supply Case

A338-00-20- | N | 

*To be installed aside 48V Surface Tracks
Power supply not included

SUSPENSION & SUSPENSION SHORT 48V



TRACK 48V Wired Power Supply Case

A338-00-22- | N | 

A338-00-23- | N | 

*Power supply not included



TRACK 48V SURFACE Suspension Kit (2 units)

A338-00-15- | N |



TRACK 48V SURFACE Suspension Feed Kit

A338-00-16- | N | 


A338-00-17- | N | 

*For remote power supply


COLOUR | N ■ |



DIMENSIONS

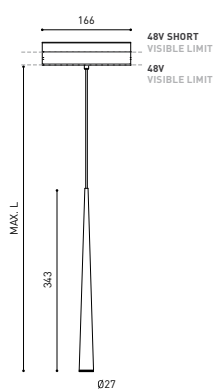

ACCESSORIES



CORD ACCESSORY

TRACK 48V OPTIONS

PRODUCT

Name	HOLLY 48V 2M 35° 2700K WT
Reference	A3490110WT
Color	Textured white
RAL	9016
Category	TRACKLIGHTS

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	190 Lm
Power	2,1 W
Power values of the system	2,21 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 3
Light beam angle	35°
Lighting efficiency	93%
Efficacy	90 Lm/W
Current intensity	700 mA
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	III
Voltage	48 Vdc
Energy efficiency	A++
LED lifespan	L80B10 (Tj=85°C) >41.000h


OTHER DATA

Ingress Protection	IP20
Cord length	2 m
Fast adjustment tensioner	No
Track type	Track 48V
Weight	290 g.
Packaged weight	413 g.
Packaging dimensions	385 x 103 x 78 mm
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene




Holly 48V is a pendant luminaire for accent lighting applications. Its geometry, stylish and elegant with a body made out of solid mechanised aluminium, define a high quality perceived product with an exquisite look. In addition, Holly uses a special designed micro-reflector to optimize the output of the LED source, achieving a relatively high amount of light. Within its applications we can consider, bar-counters, beside tables, stairwells...

POLAR DIAGRAM

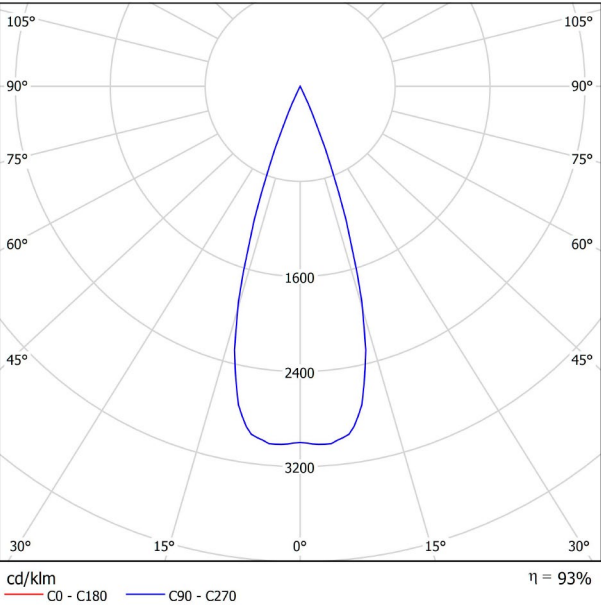



CONICAL DIAGRAM

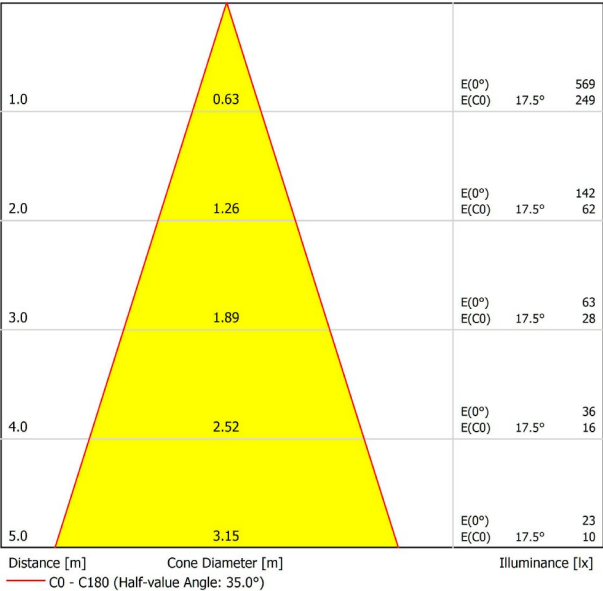




PRODUCT	
Model	Cord Accessory
Reference	02230000 WT NT
Colour	WT ☐ RAL 9016 NT ☒ RAL9005
Category	Accessories

DIMENSIONAL DRAWING

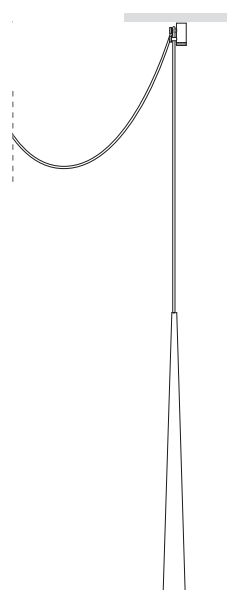

48V SYSTEM

TRACK 48V



TRACK 48V TRIMLESS


TRACK 48V TRIMLESS 1m	A338-01-00-	N
TRACK 48V TRIMLESS 2m	A338-02-00-	N
TRACK 48V TRIMLESS 3m	A338-03-00-	N
TRACK 48V TRIMLESS Corner 90° One Plane	A338-06-00-	N
TRACK 48V TRIMLESS Corner 90° Two Planes	A338-07-00-	N

RECOMMENDED FOR INSTALLATIONS WHERE THE PROFILE CAN BE INSTALLED BEFORE THE FALSE PLASTERBOARD CEILING (THICKNESS 12,5mm.)



TRACK 48V TRIMLESS


Corner 90° One Plane




*Electrical connection not included

TRACK 48V TRIMLESS

Corner 90° Two Planes



*Electrical connection not included




TRACK 48V SURFACE

TRACK 48V SURFACE 1m	A338-11-00-	N
TRACK 48V SURFACE 2m	A338-12-00-	N
TRACK 48V SURFACE 3m	A338-13-00-	N
TRACK 48V SURFACE Corner 90° One Plane	A338-14-00-	N




TRACK 48V SURFACE

Corner 90° One Plane



*Electrical connection not included




TRACK 48V SURFACE SHORT

TRACK 48V SURFACE SHORT 1m	A338-21-00-	N
TRACK 48V SURFACE SHORT 2m	A338-22-00-	N
TRACK 48V SURFACE SHORT 3m	A338-23-00-	N
TRACK 48V SURFACE SHORT Corner 90° One Plane	A338-24-00-	N



TRACK 48V SURFACE SHORT


Corner 90° One Plane



*Electrical connection not included

48V SYSTEM

TRACK 48V

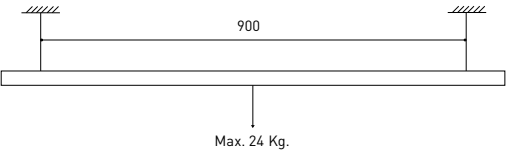


		P	V	D
CONSTANT VOLTAGE	0434-01-21	75W	48V	180 x 52 x 30mm
LED POWER SUPPLY	0434-01-22	150W	48V	240 x 60 x 49mm

DROP VOLTAGE TABLE

DROP VOLTAGE TABLE		CABLE LENGHT (m)			
		5	10	20	30
POWER (W)	CABLE SECTION (mm²)	TRACK LENGHT (m)			
75	0,75	50	50	30	X
	1,5	50	50	50	50
150	0,75	40	15	X	X
	1,5	50	40	20	X

COMPATIBILITY ACCORDING TO TYPE OF TRACK

TRACK 48V & TRACK 48V SURFACE SHORT

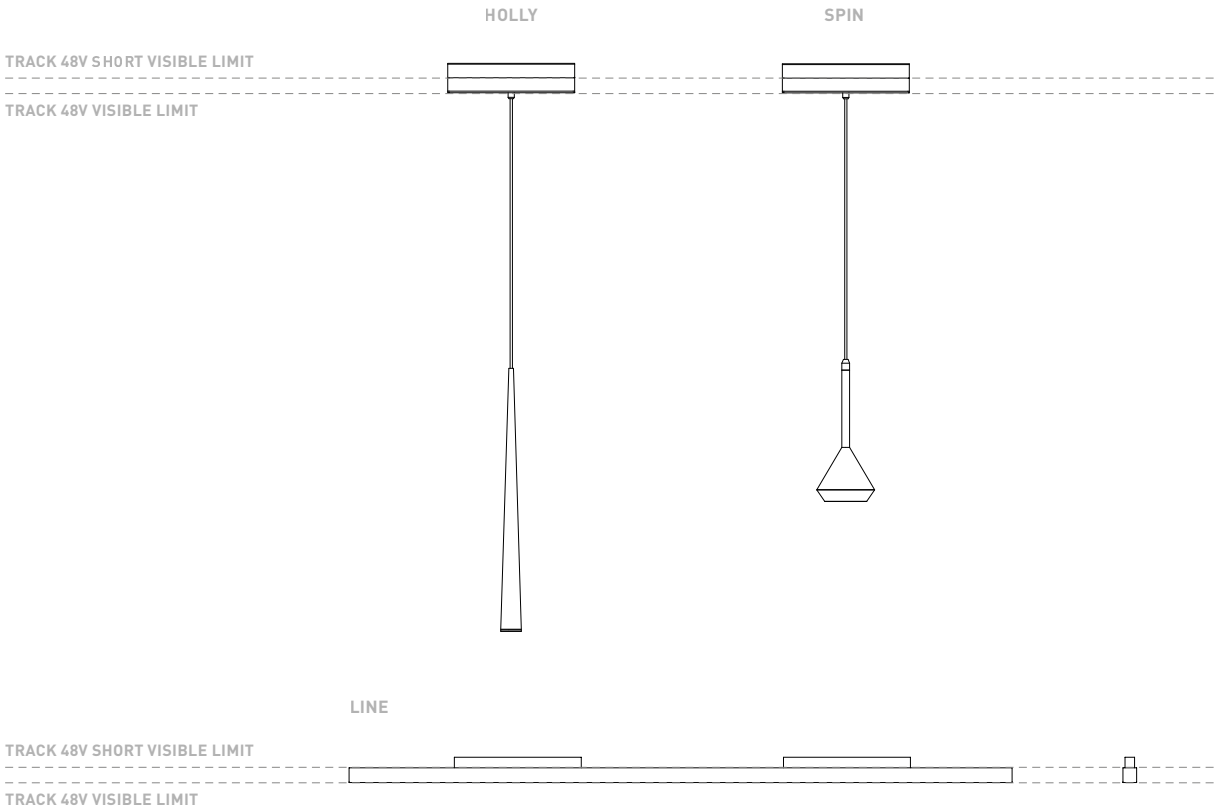


Order with *The 2019 Collection* codes. Products with one single version for both tracks

48V SYSTEM


TRACK 48V

ALL 48V TRACK




TRACK 48V Live-End Connector

A338-00-01- | N |




TRACK 48V Central Connector

A338-00-02- | N |



TRACK 48V Corner 90° Connector

A338-00-12- | N |



TRACK 48V Wireless Control

0434-01-31- | N | Casambi/AAG Stucchi App

0434-01-32- | N | AAG Stucchi App

TRIMLESS 48V



TRACK 48V TRIMLESS Short T-Bracket


A338-00-03



TRACK 48V Clamp for M6 ROD

A338-00-09

*See accessories quantities



TRACK 48V TRIMLESS Long T-Bracket


A338-00-04



TRACK 48V Track Clamp


A338-00-10

*See accessories quantities



TRACK 48V TRIMLESS Straight Joiners (2 units)


A338-00-05



TRACK 48V TRIMLESS Suspension Kit

A338-00-08

*See accessories quantities



TRACK 48V TRIMLESS Plaster Installation Guard 1m

A338-00-21


*** SUGGESTED MOUNTING ACCESSORIES QUANTITIES**

1000mm - 2 Pcs.

2000mm - 3 Pcs.

3000mm - 4 Pcs.

SURFACE, SUSPENSION , SURFACE SHORT & SUSPENSION SHORT 48V



TRACK 48V SURFACE Straight Joiner

A338-00-11- | N |

COLOUR | N ■ |

48V SYSTEM

TRACK 48V

TRIMLESS, SURFACE & SUSPENSION 48V



TRACK 48V TRIMLESS & SURFACE End

A338-00-06- | N |



TRACK 48V TRIMLESS & SURFACE End Feed

A338-00-07- | N |

SURFACE SHORT & SUSPENSION SHORT 48V



TRACK 48V SURFACE SHORT End


A338-00-18- | N |



TRACK 48V SURFACE SHORT End Feed

A338-00-19- | N |

SURFACE & SURFACE SHORT 48V




TRACK 48V Power Supply Case

A338-00-20- | N | 

*To be installed aside 48V Surface Tracks
Power supply not included

SUSPENSION & SUSPENSION SHORT 48V



TRACK 48V Wired Power Supply Case

A338-00-22- | N | 

A338-00-23- | N | 

*Power supply not included



TRACK 48V SURFACE Suspension Kit (2 units)

A338-00-15- | N |



TRACK 48V SURFACE Suspension Feed Kit

A338-00-16- | N | 


A338-00-17- | N | 

*For remote power supply


COLOUR | N ■ |



DIMENSIONS

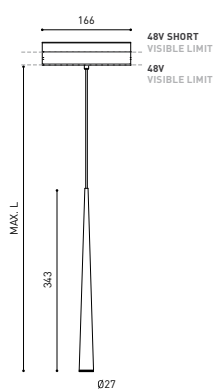

ACCESSORIES



PRODUCT

Name	HOLLY 48V 2M 35° 3000K MC
Reference	A3490111MC
Color	Metallized copper
RAL	Paint of metallic nanoparticles
Category	TRACKLIGHTS

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	210 Lm
Power	2,1 W
Power values of the system	2,21 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 3
Light beam angle	35°
Lighting efficiency	93%
Efficacy	100 Lm/W
Current intensity	700 mA
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	III
Voltage	48 Vdc
Energy efficiency	A++
LED lifespan	L80B10 (Tj=85°C) >41.000h


OTHER DATA

Ingress Protection	IP20
Cord length	2 m
Fast adjustment tensioner	No
Track type	Track 48V
Weight	290 g.
Packaged weight	413 g.
Packaging dimensions	385 × 103 × 78 mm
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene




Holly 48V is a pendant luminaire for accent lighting applications. Its geometry, stylish and elegant with a body made out of solid mechanised aluminium, define a high quality perceived product with an exquisite look. In addition, Holly uses a special designed micro-reflector to optimize the output of the LED source, achieving a relatively high amount of light. Within its applications we can consider, bar-counters, beside tables, stairwells...

POLAR DIAGRAM

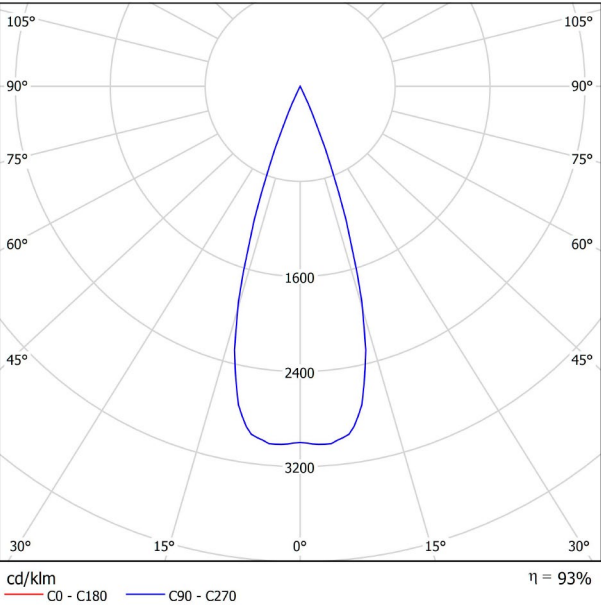



CONICAL DIAGRAM

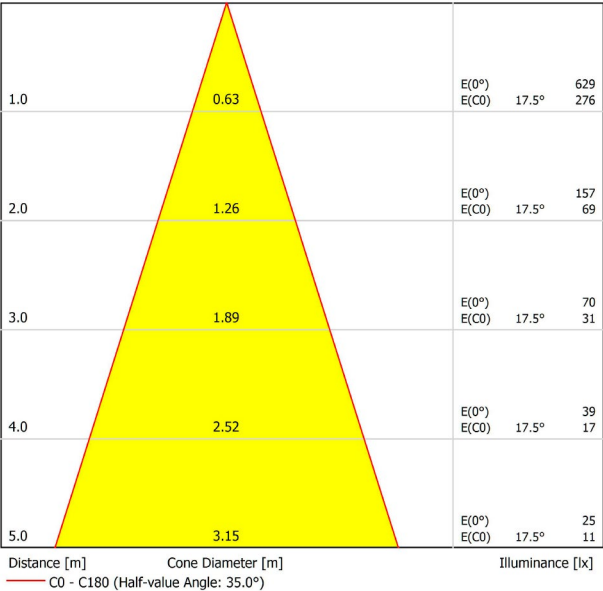




PRODUCT	
Model	Cord Accessory
Reference	02230000 WT NT
Colour	WT ☐ RAL 9016 NT ☒ RAL9005
Category	Accessories

DIMENSIONAL DRAWING

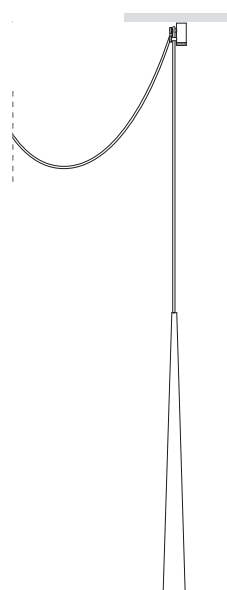

48V SYSTEM

TRACK 48V



TRACK 48V TRIMLESS


TRACK 48V TRIMLESS 1m	A338-01-00-	N
TRACK 48V TRIMLESS 2m	A338-02-00-	N
TRACK 48V TRIMLESS 3m	A338-03-00-	N
TRACK 48V TRIMLESS Corner 90° One Plane	A338-06-00-	N
TRACK 48V TRIMLESS Corner 90° Two Planes	A338-07-00-	N

RECOMMENDED FOR INSTALLATIONS WHERE THE PROFILE CAN BE INSTALLED BEFORE THE FALSE PLASTERBOARD CEILING (THICKNESS 12,5mm.)



TRACK 48V TRIMLESS


Corner 90° One Plane




*Electrical connection not included

TRACK 48V TRIMLESS

Corner 90° Two Planes



*Electrical connection not included




TRACK 48V SURFACE

TRACK 48V SURFACE 1m	A338-11-00-	N
TRACK 48V SURFACE 2m	A338-12-00-	N
TRACK 48V SURFACE 3m	A338-13-00-	N
TRACK 48V SURFACE Corner 90° One Plane	A338-14-00-	N




TRACK 48V SURFACE

Corner 90° One Plane



*Electrical connection not included




TRACK 48V SURFACE SHORT

TRACK 48V SURFACE SHORT 1m	A338-21-00-	N
TRACK 48V SURFACE SHORT 2m	A338-22-00-	N
TRACK 48V SURFACE SHORT 3m	A338-23-00-	N
TRACK 48V SURFACE SHORT Corner 90° One Plane	A338-24-00-	N



TRACK 48V SURFACE SHORT


Corner 90° One Plane



*Electrical connection not included

48V SYSTEM

TRACK 48V

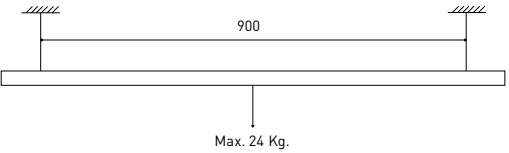


		P	V	D
CONSTANT VOLTAGE	0434-01-21	75W	48V	180 x 52 x 30mm
LED POWER SUPPLY	0434-01-22	150W	48V	240 x 60 x 49mm

DROP VOLTAGE TABLE

		CABLE LENGTH (m)			
		5	10	20	30
POWER (W)	CABLE SECTION (mm²)	TRACK LENGTH (m)			
75	0,75	50	50	30	X
	1,5	50	50	50	50
150	0,75	40	15	X	X
	1,5	50	40	20	X

COMPATIBILITY ACCORDING TO TYPE OF TRACK

TRACK 48V & TRACK 48V SURFACE SHORT

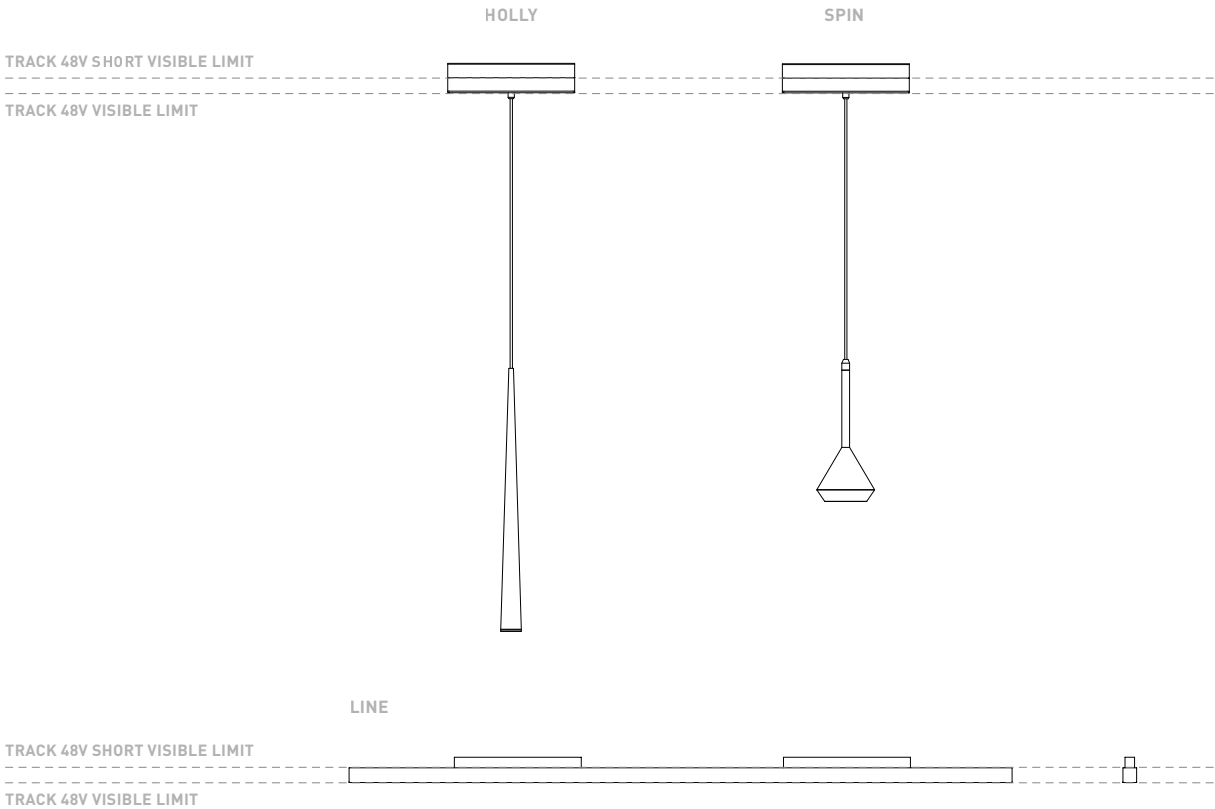


Order with *The 2019 Collection* codes. Products with one single version for both tracks

48V SYSTEM


TRACK 48V

ALL 48V TRACK




TRACK 48V Live-End Connector

A338-00-01- | N |




TRACK 48V Central Connector

A338-00-02- | N |



TRACK 48V Corner 90° Connector

A338-00-12- | N |



TRACK 48V Wireless Control

0434-01-31- | N | Casambi/AAG Stucchi App

0434-01-32- | N | AAG Stucchi App

TRIMLESS 48V



TRACK 48V TRIMLESS Short T-Bracket


A338-00-03



TRACK 48V Clamp for M6 ROD

A338-00-09

*See accessories quantities



TRACK 48V TRIMLESS Long T-Bracket


A338-00-04



TRACK 48V Track Clamp


A338-00-10

*See accessories quantities



TRACK 48V TRIMLESS Straight Joiners (2 units)


A338-00-05



TRACK 48V TRIMLESS Suspension Kit

A338-00-08

*See accessories quantities



TRACK 48V TRIMLESS Plaster Installation Guard 1m

A338-00-21


*** SUGGESTED MOUNTING ACCESSORIES QUANTITIES**

1000mm - 2 Pcs.

2000mm - 3 Pcs.

3000mm - 4 Pcs.

SURFACE, SUSPENSION , SURFACE SHORT & SUSPENSION SHORT 48V



TRACK 48V SURFACE Straight Joiner

A338-00-11- | N |

COLOUR | N ■ |

48V SYSTEM

TRACK 48V

TRIMLESS, SURFACE & SUSPENSION 48V



TRACK 48V TRIMLESS & SURFACE End

A338-00-06- | N |



TRACK 48V TRIMLESS & SURFACE End Feed

A338-00-07- | N |

SURFACE SHORT & SUSPENSION SHORT 48V



TRACK 48V SURFACE SHORT End


A338-00-18- | N |



TRACK 48V SURFACE SHORT End Feed

A338-00-19- | N |

SURFACE & SURFACE SHORT 48V




TRACK 48V Power Supply Case

A338-00-20- | N | 

*To be installed aside 48V Surface Tracks
Power supply not included

SUSPENSION & SUSPENSION SHORT 48V



TRACK 48V Wired Power Supply Case

A338-00-22- | N | 

A338-00-23- | N | 

*Power supply not included



TRACK 48V SURFACE Suspension Kit (2 units)

A338-00-15- | N |



TRACK 48V SURFACE Suspension Feed Kit

A338-00-16- | N | 


A338-00-17- | N | 

*For remote power supply


COLOUR | N ■ |



DIMENSIONS

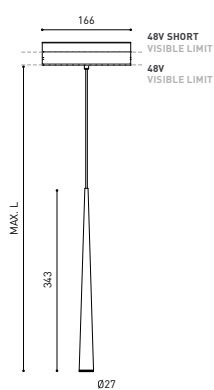

ACCESSORIES



PRODUCT

Name	HOLLY 48V 2M 35° 3000K MG
Reference	A3490111MG
Color	Metallized gold
RAL	Paint of metallic nanoparticles
Category	TRACKLIGHTS

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	210 Lm
Power	2,1 W
Power values of the system	2,21 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 3
Light beam angle	35°
Lighting efficiency	93%
Efficacy	100 Lm/W
Current intensity	700 mA
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	III
Voltage	48 Vdc
Energy efficiency	A++
LED lifespan	L80B10 (Tj=85°C) >41.000h


OTHER DATA

Ingress Protection	IP20
Cord length	2 m
Fast adjustment tensioner	No
Track type	Track 48V
Weight	290 g.
Packaged weight	413 g.
Packaging dimensions	385 × 103 × 78 mm
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene




Holly 48V is a pendant luminary for accent lighting applications. Its geometry, stylish and elegant with a body made out of solid mechanised aluminium, define a high quality perceived product with an exquisite look. In addition, Holly uses a special designed micro-reflector to optimize the output of the LED source, achieving a relatively high amount of light. Within its applications we can consider, bar-counters, beside tables, stairwells...

POLAR DIAGRAM

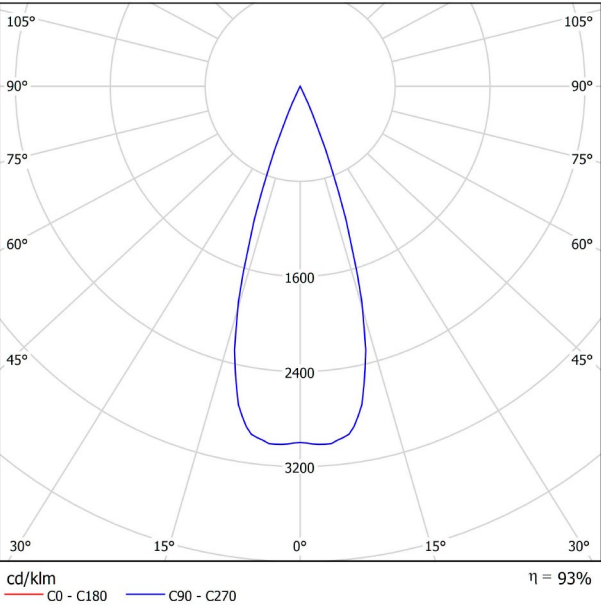



CONICAL DIAGRAM

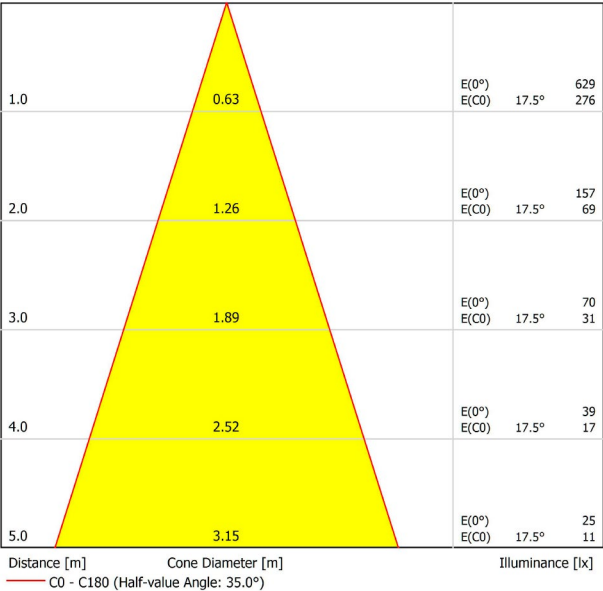




PRODUCT	
Model	Cord Accessory
Reference	02230000 WT NT
Colour	WT ☐ RAL 9016 NT ☒ RAL9005
Category	Accessories

DIMENSIONAL DRAWING

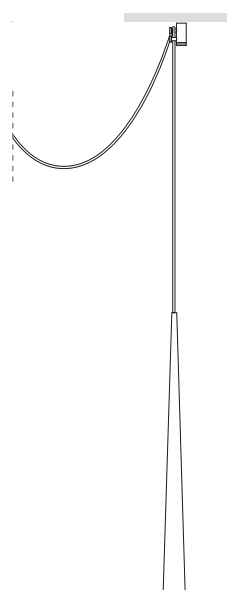

48V SYSTEM

TRACK 48V



TRACK 48V TRIMLESS


TRACK 48V TRIMLESS 1m	A338-01-00-	N
TRACK 48V TRIMLESS 2m	A338-02-00-	N
TRACK 48V TRIMLESS 3m	A338-03-00-	N
TRACK 48V TRIMLESS Corner 90° One Plane	A338-06-00-	N
TRACK 48V TRIMLESS Corner 90° Two Planes	A338-07-00-	N

RECOMMENDED FOR INSTALLATIONS WHERE THE PROFILE CAN BE INSTALLED BEFORE THE FALSE PLASTERBOARD CEILING (THICKNESS 12,5mm.)



TRACK 48V TRIMLESS


Corner 90° One Plane




*Electrical connection not included

TRACK 48V TRIMLESS

Corner 90° Two Planes



*Electrical connection not included




TRACK 48V SURFACE

TRACK 48V SURFACE 1m	A338-11-00-	N
TRACK 48V SURFACE 2m	A338-12-00-	N
TRACK 48V SURFACE 3m	A338-13-00-	N
TRACK 48V SURFACE Corner 90° One Plane	A338-14-00-	N




TRACK 48V SURFACE

Corner 90° One Plane



*Electrical connection not included




TRACK 48V SURFACE SHORT

TRACK 48V SURFACE SHORT 1m	A338-21-00-	N
TRACK 48V SURFACE SHORT 2m	A338-22-00-	N
TRACK 48V SURFACE SHORT 3m	A338-23-00-	N
TRACK 48V SURFACE SHORT Corner 90° One Plane	A338-24-00-	N



TRACK 48V SURFACE SHORT


Corner 90° One Plane



*Electrical connection not included

48V SYSTEM

TRACK 48V

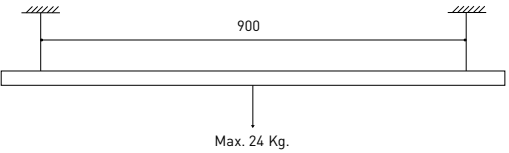


		P	V	D
CONSTANT VOLTAGE	0434-01-21	75W	48V	180 x 52 x 30mm
LED POWER SUPPLY	0434-01-22	150W	48V	240 x 60 x 49mm

DROP VOLTAGE TABLE

		CABLE LENGTH (m)			
		5	10	20	30
POWER (W)	CABLE SECTION (mm²)	TRACK LENGTH (m)			
75	0,75	50	50	30	X
	1,5	50	50	50	50
150	0,75	40	15	X	X
	1,5	50	40	20	X

COMPATIBILITY ACCORDING TO TYPE OF TRACK

TRACK 48V & TRACK 48V SURFACE SHORT

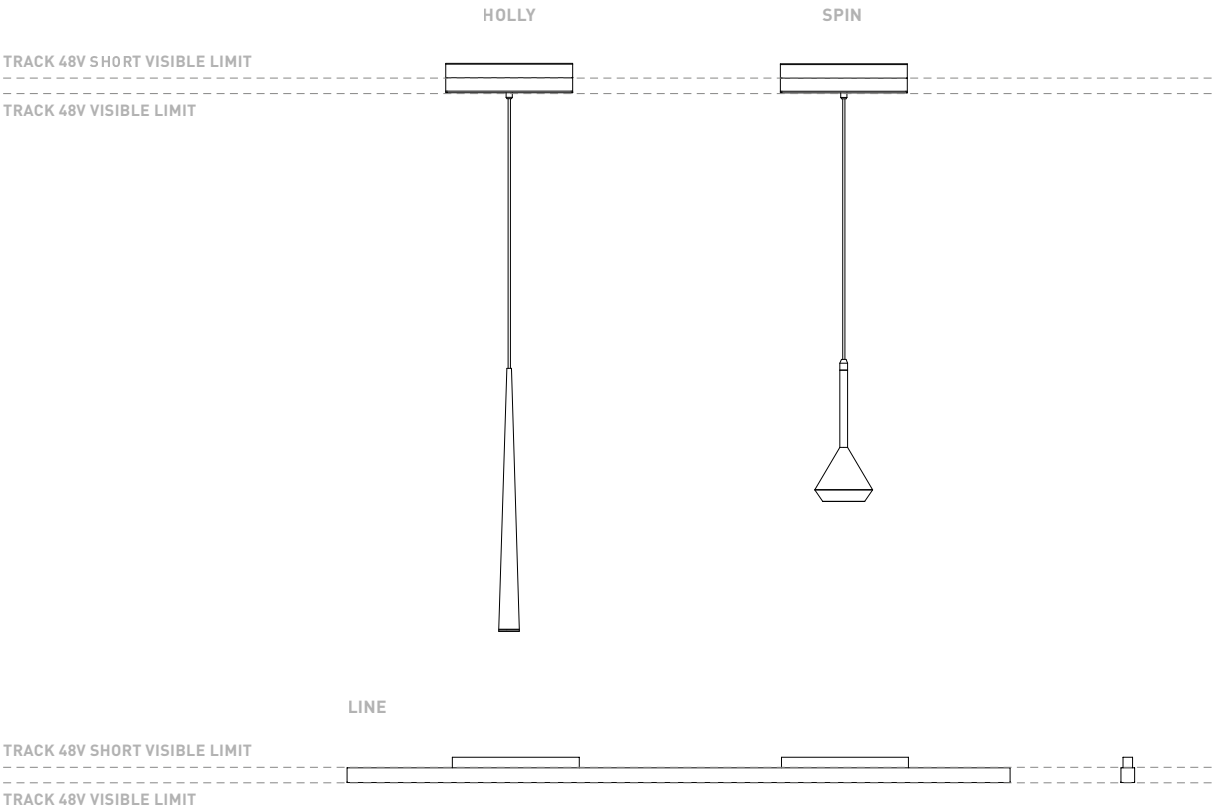


Order with *The 2019 Collection* codes. Products with one single version for both tracks

48V SYSTEM


TRACK 48V

ALL 48V TRACK




TRACK 48V Live-End Connector

A338-00-01- | N |




TRACK 48V Central Connector

A338-00-02- | N |



TRACK 48V Corner 90° Connector

A338-00-12- | N |



TRACK 48V Wireless Control

0434-01-31- | N | Casambi/AAG Stucchi App

0434-01-32- | N | AAG Stucchi App

TRIMLESS 48V



TRACK 48V TRIMLESS Short T-Bracket


A338-00-03



TRACK 48V Clamp for M6 ROD

A338-00-09

*See accessories quantities



TRACK 48V TRIMLESS Long T-Bracket


A338-00-04



TRACK 48V Track Clamp

A338-00-10

*See accessories quantities



TRACK 48V TRIMLESS Straight Joiners (2 units)


A338-00-05



TRACK 48V TRIMLESS Suspension Kit

A338-00-08

*See accessories quantities



TRACK 48V TRIMLESS Plaster Installation Guard 1m

A338-00-21


*** SUGGESTED MOUNTING ACCESSORIES QUANTITIES**

1000mm - 2 Pcs.

2000mm - 3 Pcs.

3000mm - 4 Pcs.

SURFACE, SUSPENSION , SURFACE SHORT & SUSPENSION SHORT 48V



TRACK 48V SURFACE Straight Joiner

A338-00-11- | N |

COLOUR | N ■ |

48V SYSTEM

TRACK 48V

TRIMLESS, SURFACE & SUSPENSION 48V



TRACK 48V TRIMLESS & SURFACE End

A338-00-06- | N |



TRACK 48V TRIMLESS & SURFACE End Feed

A338-00-07- | N |

SURFACE SHORT & SUSPENSION SHORT 48V



TRACK 48V SURFACE SHORT End


A338-00-18- | N |



TRACK 48V SURFACE SHORT End Feed

A338-00-19- | N |

SURFACE & SURFACE SHORT 48V




TRACK 48V Power Supply Case

A338-00-20- | N | 

*To be installed aside 48V Surface Tracks
Power supply not included

SUSPENSION & SUSPENSION SHORT 48V




TRACK 48V Wired Power Supply Case

A338-00-22- | N | 

A338-00-23- | N | 

*Power supply not included



TRACK 48V SURFACE Suspension Kit (2 units)

A338-00-15- | N |



TRACK 48V SURFACE Suspension Feed Kit

A338-00-16- | N | 


A338-00-17- | N | 

*For remote power supply


COLOUR | N ■ |



DIMENSIONS

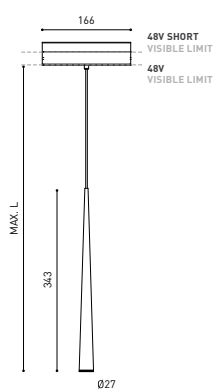

ACCESSORIES



PRODUCT

Name	HOLLY 48V 2M 35° 3000K NT
Reference	A3490111NT
Color	Textured black
RAL	9005
Category	TRACKLIGHTS

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	210 Lm
Power	2,1 W
Power values of the system	2,21 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 3
Light beam angle	35°
Lighting efficiency	93%
Efficacy	100 Lm/W
Current intensity	700 mA
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	III
Voltage	48 Vdc
Energy efficiency	A++
LED lifespan	L80B10 (Tj=85°C) >41.000h


OTHER DATA

Ingress Protection	IP20
Cord length	2 m
Fast adjustment tensioner	No
Track type	Track 48V
Weight	290 g.
Packaged weight	413 g.
Packaging dimensions	385 × 103 × 78 mm
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene




Holly 48V is a pendant luminary for accent lighting applications. Its geometry, stylish and elegant with a body made out of solid mechanised aluminium, define a high quality perceived product with an exquisite look. In addition, Holly uses a special designed micro-reflector to optimize the output of the LED source, achieving a relatively high amount of light. Within its applications we can consider, bar-counters, beside tables, stairwells...

POLAR DIAGRAM

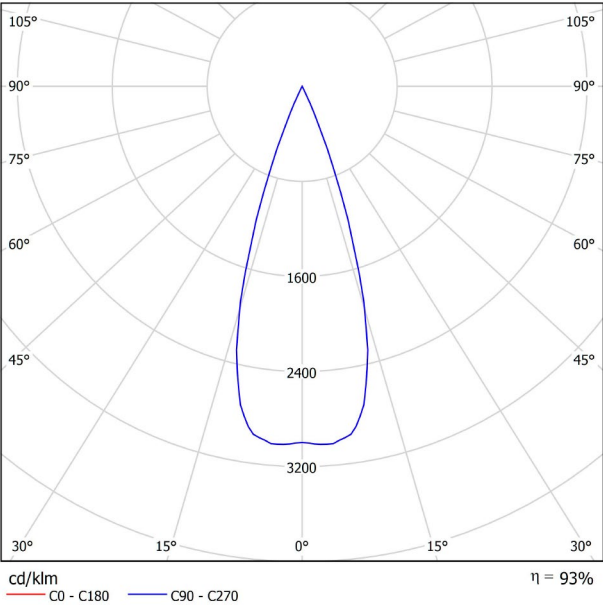



CONICAL DIAGRAM

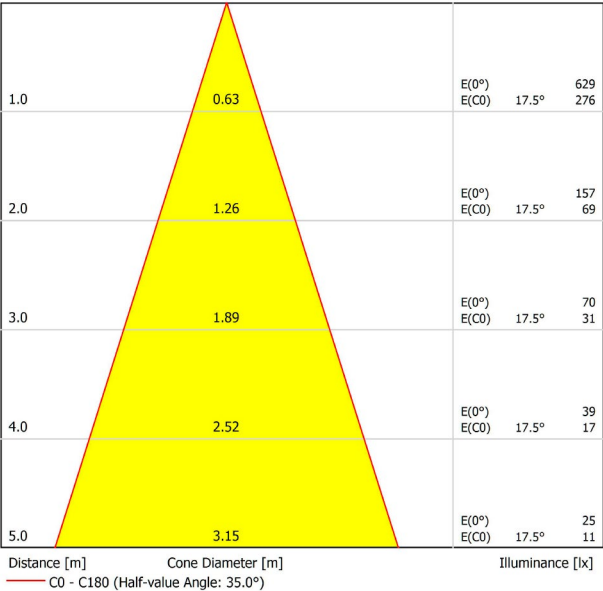




PRODUCT	
Model	Cord Accessory
Reference	02230000 WT NT
Colour	WT ☐ RAL 9016 NT ☒ RAL9005
Category	Accessories

DIMENSIONAL DRAWING

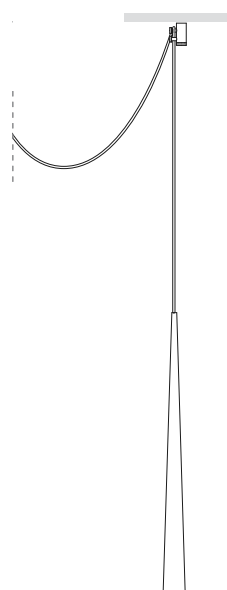

48V SYSTEM

TRACK 48V



TRACK 48V TRIMLESS


TRACK 48V TRIMLESS 1m	A338-01-00-	N
TRACK 48V TRIMLESS 2m	A338-02-00-	N
TRACK 48V TRIMLESS 3m	A338-03-00-	N
TRACK 48V TRIMLESS Corner 90° One Plane	A338-06-00-	N
TRACK 48V TRIMLESS Corner 90° Two Planes	A338-07-00-	N

RECOMMENDED FOR INSTALLATIONS WHERE THE PROFILE CAN BE INSTALLED BEFORE THE FALSE PLASTERBOARD CEILING (THICKNESS 12,5mm.)



TRACK 48V TRIMLESS


Corner 90° One Plane




*Electrical connection not included

TRACK 48V TRIMLESS

Corner 90° Two Planes



*Electrical connection not included




TRACK 48V SURFACE

TRACK 48V SURFACE 1m	A338-11-00-	N
TRACK 48V SURFACE 2m	A338-12-00-	N
TRACK 48V SURFACE 3m	A338-13-00-	N
TRACK 48V SURFACE Corner 90° One Plane	A338-14-00-	N




TRACK 48V SURFACE

Corner 90° One Plane



*Electrical connection not included




TRACK 48V SURFACE SHORT

TRACK 48V SURFACE SHORT 1m	A338-21-00-	N
TRACK 48V SURFACE SHORT 2m	A338-22-00-	N
TRACK 48V SURFACE SHORT 3m	A338-23-00-	N
TRACK 48V SURFACE SHORT Corner 90° One Plane	A338-24-00-	N



TRACK 48V SURFACE SHORT


Corner 90° One Plane



*Electrical connection not included

48V SYSTEM

TRACK 48V

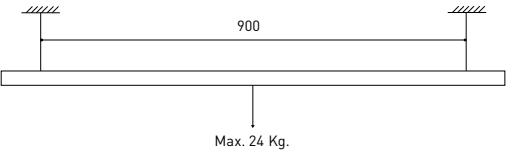


		P	V	D
CONSTANT VOLTAGE	0434-01-21	75W	48V	180 x 52 x 30mm
LED POWER SUPPLY	0434-01-22	150W	48V	240 x 60 x 49mm

DROP VOLTAGE TABLE

		CABLE LENGTH (m)			
		5	10	20	30
POWER (W)	CABLE SECTION (mm²)	TRACK LENGTH (m)			
75	0,75	50	50	30	X
	1,5	50	50	50	50
150	0,75	40	15	X	X
	1,5	50	40	20	X

COMPATIBILITY ACCORDING TO TYPE OF TRACK

TRACK 48V & TRACK 48V SURFACE SHORT

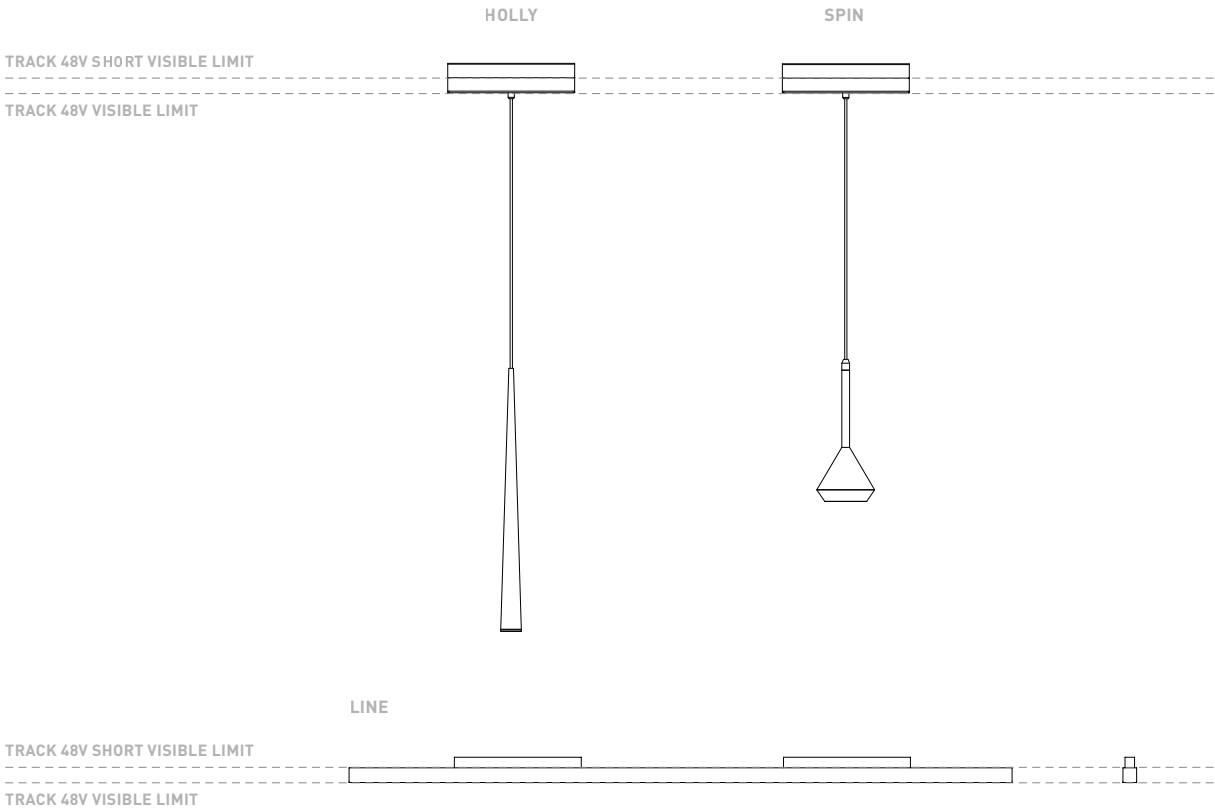


Order with *The 2019 Collection* codes. Products with one single version for both tracks

48V SYSTEM


TRACK 48V

ALL 48V TRACK




TRACK 48V Live-End Connector

A338-00-01- | N |




TRACK 48V Central Connector

A338-00-02- | N |



TRACK 48V Corner 90° Connector

A338-00-12- | N |



TRACK 48V Wireless Control

0434-01-31- | N | Casambi/AAG Stucchi App

0434-01-32- | N | AAG Stucchi App

TRIMLESS 48V



TRACK 48V TRIMLESS Short T-Bracket


A338-00-03



TRACK 48V Clamp for M6 ROD

A338-00-09

*See accessories quantities



TRACK 48V TRIMLESS Long T-Bracket


A338-00-04



TRACK 48V Track Clamp

A338-00-10

*See accessories quantities



TRACK 48V TRIMLESS Straight Joiners (2 units)


A338-00-05



TRACK 48V TRIMLESS Suspension Kit

A338-00-08

*See accessories quantities



TRACK 48V TRIMLESS Plaster Installation Guard 1m

A338-00-21


*** SUGGESTED MOUNTING ACCESSORIES QUANTITIES**

1000mm - 2 Pcs.

2000mm - 3 Pcs.

3000mm - 4 Pcs.

SURFACE, SUSPENSION , SURFACE SHORT & SUSPENSION SHORT 48V



TRACK 48V SURFACE Straight Joiner

A338-00-11- | N |

COLOUR | N ■ |

48V SYSTEM

TRACK 48V

TRIMLESS, SURFACE & SUSPENSION 48V



TRACK 48V TRIMLESS & SURFACE End

A338-00-06- | N |



TRACK 48V TRIMLESS & SURFACE End Feed

A338-00-07- | N |

SURFACE SHORT & SUSPENSION SHORT 48V



TRACK 48V SURFACE SHORT End


A338-00-18- | N |



TRACK 48V SURFACE SHORT End Feed

A338-00-19- | N |

SURFACE & SURFACE SHORT 48V




TRACK 48V Power Supply Case

A338-00-20- | N | 

*To be installed aside 48V Surface Tracks
Power supply not included

SUSPENSION & SUSPENSION SHORT 48V




TRACK 48V Wired Power Supply Case

A338-00-22- | N | 

A338-00-23- | N | 

*Power supply not included



TRACK 48V SURFACE Suspension Kit (2 units)

A338-00-15- | N |



TRACK 48V SURFACE Suspension Feed Kit

A338-00-16- | N | 


A338-00-17- | N | 

*For remote power supply


COLOUR | N ■ |



DIMENSIONS

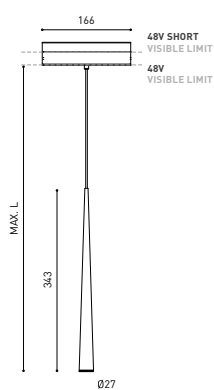

ACCESSORIES



CORD ACCESSORY

TRACK 48V OPTIONS

PRODUCT

Name	HOLLY 48V 2M 35° 3000K WT
Reference	A3490111WT
Color	Textured white
RAL	9016
Category	TRACKLIGHTS

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	210 Lm
Power	2,1 W
Power values of the system	2,21 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 3
Light beam angle	35°
Lighting efficiency	93%
Efficacy	100 Lm/W
Current intensity	700 mA
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	III
Voltage	48 Vdc
Energy efficiency	A++
LED lifespan	L80B10 (Tj=85°C) >41.000h


OTHER DATA

Ingress Protection	IP20
Cord length	2 m
Fast adjustment tensioner	No
Track type	Track 48V
Weight	290 g.
Packaged weight	413 g.
Packaging dimensions	385 × 103 × 78 mm
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene




Holly 48V is a pendant luminaire for accent lighting applications. Its geometry, stylish and elegant with a body made out of solid mechanised aluminium, define a high quality perceived product with an exquisite look. In addition, Holly uses a special designed micro-reflector to optimize the output of the LED source, achieving a relatively high amount of light. Within its applications we can consider, bar-counters, beside tables, stairwells...

POLAR DIAGRAM

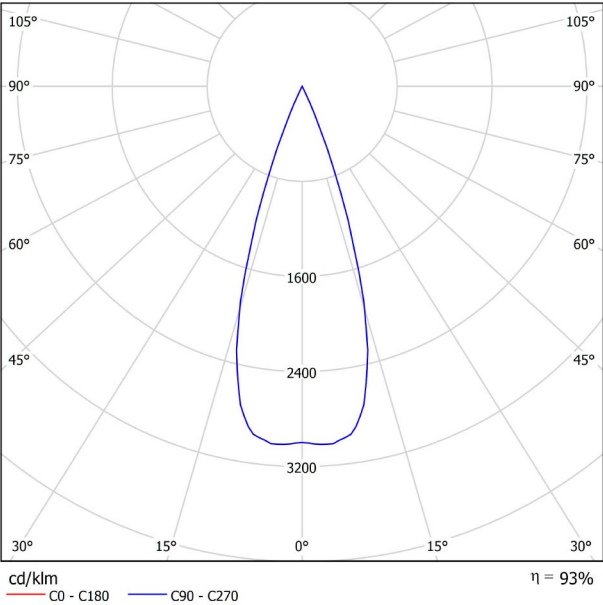



CONICAL DIAGRAM

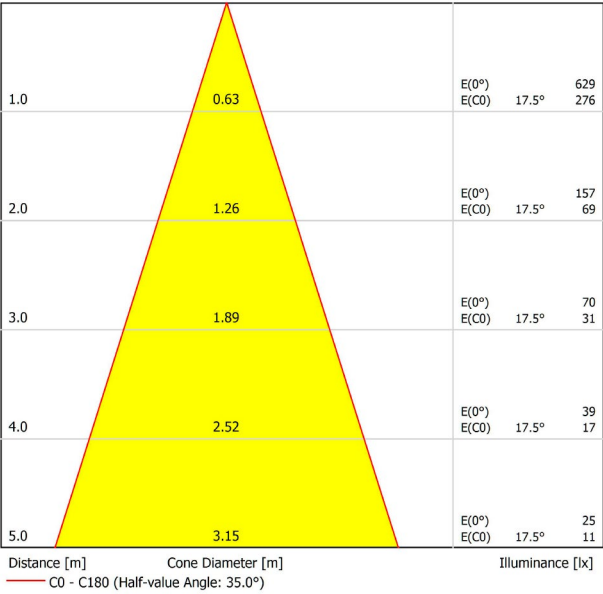




PRODUCT	
Model	Cord Accessory
Reference	02230000 WT NT
Colour	WT ☐ RAL 9016 NT ☒ RAL9005
Category	Accessories

DIMENSIONAL DRAWING

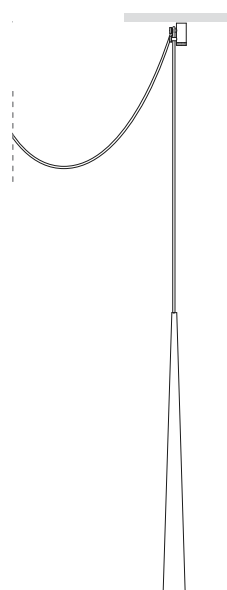

48V SYSTEM

TRACK 48V



TRACK 48V TRIMLESS


TRACK 48V TRIMLESS 1m	A338-01-00-	N
TRACK 48V TRIMLESS 2m	A338-02-00-	N
TRACK 48V TRIMLESS 3m	A338-03-00-	N
TRACK 48V TRIMLESS Corner 90° One Plane	A338-06-00-	N
TRACK 48V TRIMLESS Corner 90° Two Planes	A338-07-00-	N

RECOMMENDED FOR INSTALLATIONS WHERE THE PROFILE CAN BE INSTALLED BEFORE THE FALSE PLASTERBOARD CEILING (THICKNESS 12,5mm.)



TRACK 48V TRIMLESS


Corner 90° One Plane




*Electrical connection not included

TRACK 48V TRIMLESS

Corner 90° Two Planes



*Electrical connection not included




TRACK 48V SURFACE

TRACK 48V SURFACE 1m	A338-11-00-	N
TRACK 48V SURFACE 2m	A338-12-00-	N
TRACK 48V SURFACE 3m	A338-13-00-	N
TRACK 48V SURFACE Corner 90° One Plane	A338-14-00-	N




TRACK 48V SURFACE

Corner 90° One Plane



*Electrical connection not included




TRACK 48V SURFACE SHORT

TRACK 48V SURFACE SHORT 1m	A338-21-00-	N
TRACK 48V SURFACE SHORT 2m	A338-22-00-	N
TRACK 48V SURFACE SHORT 3m	A338-23-00-	N
TRACK 48V SURFACE SHORT Corner 90° One Plane	A338-24-00-	N



TRACK 48V SURFACE SHORT


Corner 90° One Plane



*Electrical connection not included

48V SYSTEM

TRACK 48V

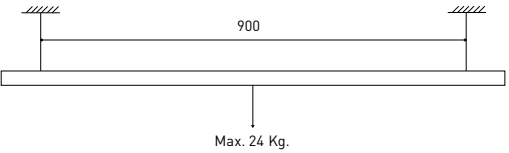


		P	V	D
CONSTANT VOLTAGE	0434-01-21	75W	48V	180 x 52 x 30mm
LED POWER SUPPLY	0434-01-22	150W	48V	240 x 60 x 49mm

DROP VOLTAGE TABLE

		CABLE LENGTH (m)			
		5	10	20	30
POWER (W)	CABLE SECTION (mm²)	TRACK LENGTH (m)			
75	0,75	50	50	30	X
	1,5	50	50	50	50
150	0,75	40	15	X	X
	1,5	50	40	20	X

COMPATIBILITY ACCORDING TO TYPE OF TRACK

TRACK 48V & TRACK 48V SURFACE SHORT

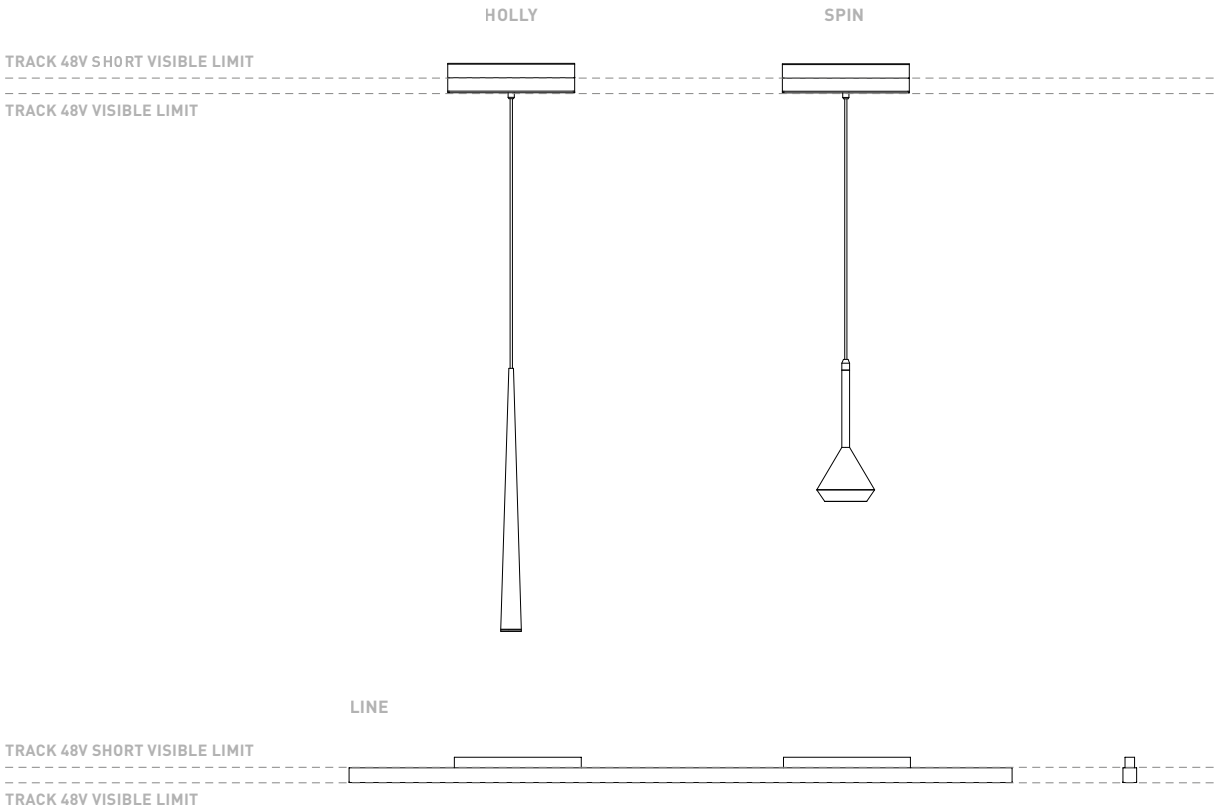


Order with *The 2019 Collection* codes. Products with one single version for both tracks

48V SYSTEM


TRACK 48V

ALL 48V TRACK




TRACK 48V Live-End Connector

A338-00-01- | N |




TRACK 48V Central Connector

A338-00-02- | N |



TRACK 48V Corner 90° Connector

A338-00-12- | N |



TRACK 48V Wireless Control

0434-01-31- | N | Casambi/AAG Stucchi App

0434-01-32- | N | AAG Stucchi App

TRIMLESS 48V



TRACK 48V TRIMLESS Short T-Bracket


A338-00-03



TRACK 48V Clamp for M6 ROD

A338-00-09

*See accessories quantities



TRACK 48V TRIMLESS Long T-Bracket


A338-00-04



TRACK 48V Track Clamp


A338-00-10

*See accessories quantities



TRACK 48V TRIMLESS Straight Joiners (2 units)


A338-00-05



TRACK 48V TRIMLESS Suspension Kit

A338-00-08

*See accessories quantities



TRACK 48V TRIMLESS Plaster Installation Guard 1m

A338-00-21


*** SUGGESTED MOUNTING ACCESSORIES QUANTITIES**

1000mm - 2 Pcs.

2000mm - 3 Pcs.

3000mm - 4 Pcs.

SURFACE, SUSPENSION , SURFACE SHORT & SUSPENSION SHORT 48V



TRACK 48V SURFACE Straight Joiner

A338-00-11- | N |

COLOUR | N ■ |

48V SYSTEM

TRACK 48V

TRIMLESS, SURFACE & SUSPENSION 48V



TRACK 48V TRIMLESS & SURFACE End

A338-00-06- | N |



TRACK 48V TRIMLESS & SURFACE End Feed

A338-00-07- | N |

SURFACE SHORT & SUSPENSION SHORT 48V



TRACK 48V SURFACE SHORT End


A338-00-18- | N |



TRACK 48V SURFACE SHORT End Feed

A338-00-19- | N |

SURFACE & SURFACE SHORT 48V




TRACK 48V Power Supply Case

A338-00-20- | N | 

*To be installed aside 48V Surface Tracks
Power supply not included

SUSPENSION & SUSPENSION SHORT 48V




TRACK 48V Wired Power Supply Case

A338-00-22- | N | 

A338-00-23- | N | 

*Power supply not included



TRACK 48V SURFACE Suspension Kit (2 units)

A338-00-15- | N |



TRACK 48V SURFACE Suspension Feed Kit

A338-00-16- | N | 


A338-00-17- | N | 

*For remote power supply

COLOUR | N ■ |



DIMENSIONS

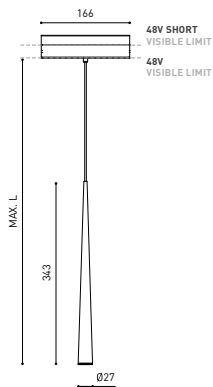

ACCESSORIES



CORD ACCESSORY



TRACK 48V OPTIONS

PRODUCT

Name	HOLLY 48V 2M 17° DIM DALI 2700K MC
Reference	A3490200MC
Color	Metallized copper
RAL	Paint of metallic nanoparticles
Category	TRACKLIGHTS

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	190 Lm
Power	2,1 W
Power values of the system	2,21 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 3
Light beam angle	17°
Lighting efficiency	92%
Efficacy	90 Lm/W
Current intensity	700 mA
Dimming	DALI
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	III
Voltage	48 Vdc
Energy efficiency	A++
LED lifespan	L80B10 (Tj=85°C) >41.000h


OTHER DATA

Ingress Protection	IP20
Cord length	2 m
Fast adjustment tensioner	No
Track type	Track 48V
Weight	290 g.
Packaged weight	413 g.
Packaging dimensions	385 x 103 x 78 mm
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene




Holly 48V is a pendant luminary for accent lighting applications. Its geometry, stylish and elegant with a body made out of solid mechanised aluminium, define a high quality perceived product with an exquisite look. In addition, Holly uses a special designed micro-reflector to optimize the output of the LED source, achieving a relatively high amount of light. Within its applications we can consider, bar-counters, beside tables, stairwells...

POLAR DIAGRAM

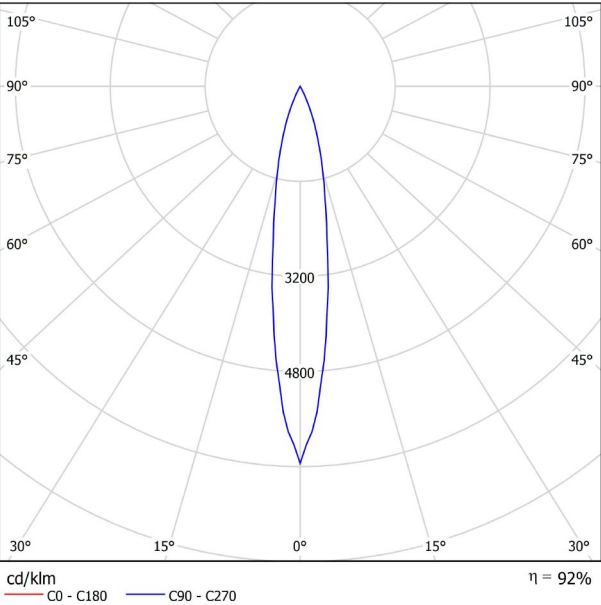



CONICAL DIAGRAM

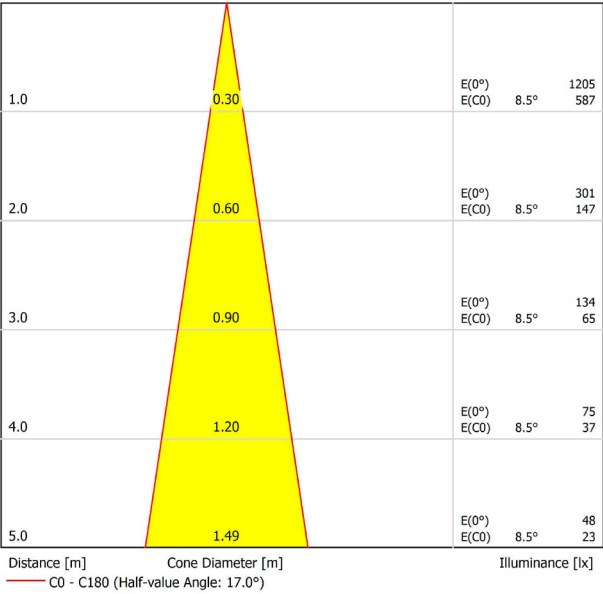




PRODUCT	
Model	Cord Accessory
Reference	02230000 WT NT
Colour	WT ☐ RAL 9016 NT ☒ RAL9005
Category	Accessories

DIMENSIONAL DRAWING

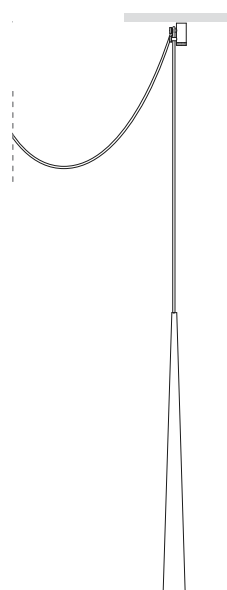

48V SYSTEM

TRACK 48V



TRACK 48V TRIMLESS


TRACK 48V TRIMLESS 1m	A338-01-00-	N
TRACK 48V TRIMLESS 2m	A338-02-00-	N
TRACK 48V TRIMLESS 3m	A338-03-00-	N
TRACK 48V TRIMLESS Corner 90° One Plane	A338-06-00-	N
TRACK 48V TRIMLESS Corner 90° Two Planes	A338-07-00-	N

RECOMMENDED FOR INSTALLATIONS WHERE THE PROFILE CAN BE INSTALLED BEFORE THE FALSE PLASTERBOARD CEILING (THICKNESS 12,5mm.)



TRACK 48V TRIMLESS


Corner 90° One Plane




*Electrical connection not included

TRACK 48V TRIMLESS

Corner 90° Two Planes



*Electrical connection not included




TRACK 48V SURFACE

TRACK 48V SURFACE 1m	A338-11-00-	N
TRACK 48V SURFACE 2m	A338-12-00-	N
TRACK 48V SURFACE 3m	A338-13-00-	N
TRACK 48V SURFACE Corner 90° One Plane	A338-14-00-	N




TRACK 48V SURFACE

Corner 90° One Plane



*Electrical connection not included




TRACK 48V SURFACE SHORT

TRACK 48V SURFACE SHORT 1m	A338-21-00-	N
TRACK 48V SURFACE SHORT 2m	A338-22-00-	N
TRACK 48V SURFACE SHORT 3m	A338-23-00-	N
TRACK 48V SURFACE SHORT Corner 90° One Plane	A338-24-00-	N



TRACK 48V SURFACE SHORT


Corner 90° One Plane



*Electrical connection not included

48V SYSTEM

TRACK 48V

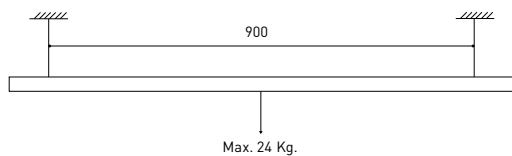


		P	V	D
CONSTANT VOLTAGE	0434-01-21	75W	48V	180 x 52 x 30mm
LED POWER SUPPLY	0434-01-22	150W	48V	240 x 60 x 49mm

DROP VOLTAGE TABLE

DROP VOLTAGE TABLE		CABLE LENGHT (m)			
		5	10	20	30
POWER (W)	CABLE SECTION (mm²)	TRACK LENGHT (m)			
75	0,75	50	50	30	X
	1,5	50	50	50	50
150	0,75	40	15	X	X
	1,5	50	40	20	X

COMPATIBILITY ACCORDING TO TYPE OF TRACK

TRACK 48V & TRACK 48V SURFACE SHORT

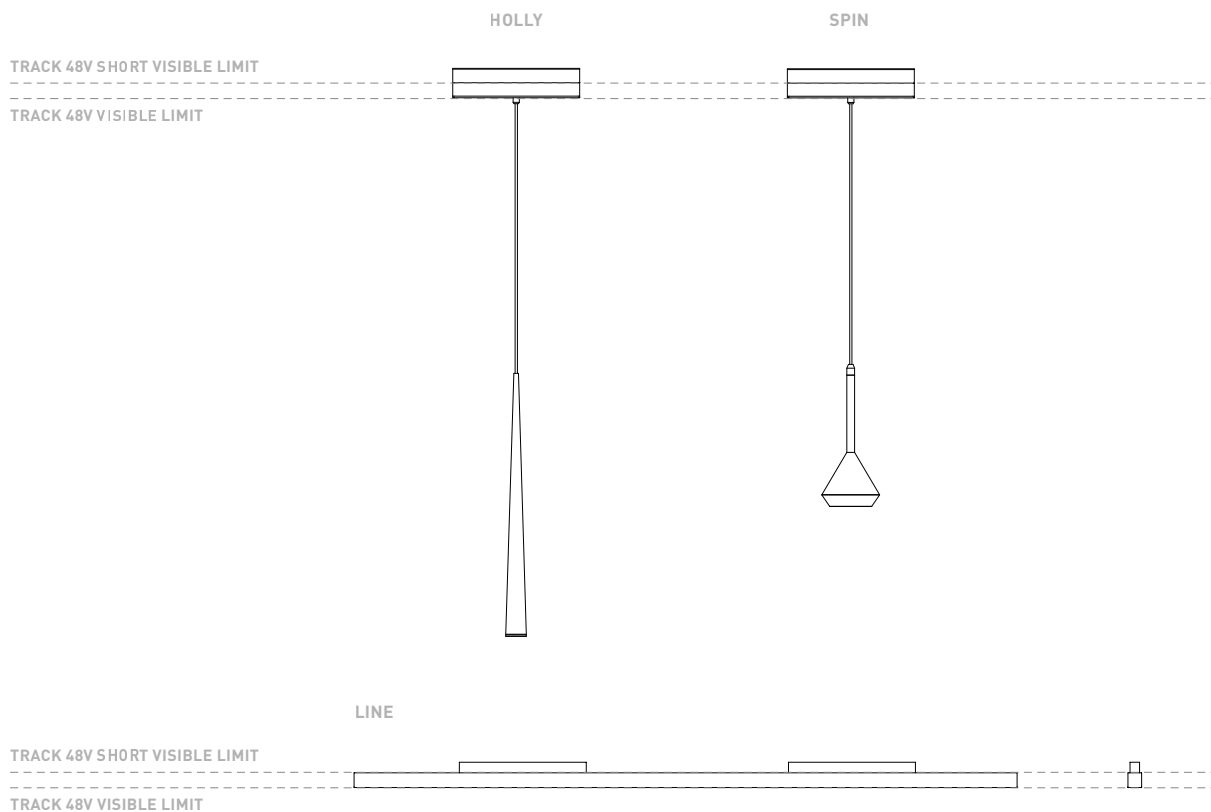


Order with *The 2019 Collection* codes. Products with one single version for both tracks

48V SYSTEM


TRACK 48V

ALL 48V TRACK




TRACK 48V Live-End Connector

A338-00-01- | N |




TRACK 48V Central Connector

A338-00-02- | N |



TRACK 48V Corner 90° Connector

A338-00-12- | N |



TRACK 48V Wireless Control

0434-01-31- | N | Casambi/AAG Stucchi App

0434-01-32- | N | AAG Stucchi App

TRIMLESS 48V



TRACK 48V TRIMLESS Short T-Bracket


A338-00-03



TRACK 48V Clamp for M6 ROD

A338-00-09

*See accessories quantities



TRACK 48V TRIMLESS Long T-Bracket


A338-00-04



TRACK 48V Track Clamp

A338-00-10

*See accessories quantities



TRACK 48V TRIMLESS Straight Joiners (2 units)


A338-00-05



TRACK 48V TRIMLESS Suspension Kit

A338-00-08

*See accessories quantities



TRACK 48V TRIMLESS Plaster Installation Guard 1m

A338-00-21


*** SUGGESTED MOUNTING ACCESSORIES QUANTITIES**

1000mm - 2 Pcs.

2000mm - 3 Pcs.

3000mm - 4 Pcs.

SURFACE, SUSPENSION , SURFACE SHORT & SUSPENSION SHORT 48V



TRACK 48V SURFACE Straight Joiner

A338-00-11- | N |

COLOUR | N ■ |

48V SYSTEM

TRACK 48V

TRIMLESS, SURFACE & SUSPENSION 48V



TRACK 48V TRIMLESS & SURFACE End

A338-00-06- | N |



TRACK 48V TRIMLESS & SURFACE End Feed

A338-00-07- | N |

SURFACE SHORT & SUSPENSION SHORT 48V



TRACK 48V SURFACE SHORT End


A338-00-18- | N |



TRACK 48V SURFACE SHORT End Feed

A338-00-19- | N |

SURFACE & SURFACE SHORT 48V




TRACK 48V Power Supply Case

A338-00-20- | N | 

*To be installed aside 48V Surface Tracks
Power supply not included

SUSPENSION & SUSPENSION SHORT 48V




TRACK 48V Wired Power Supply Case

A338-00-22- | N | 

A338-00-23- | N | 

*Power supply not included



TRACK 48V SURFACE Suspension Kit (2 units)

A338-00-15- | N |



TRACK 48V SURFACE Suspension Feed Kit

A338-00-16- | N | 


A338-00-17- | N | 

*For remote power supply


COLOUR | N ■ |



DIMENSIONS

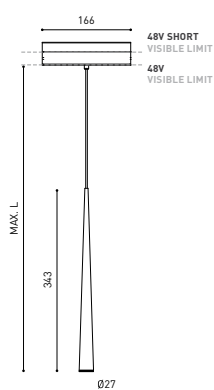

ACCESSORIES



PRODUCT

Name	HOLLY 48V 2M 17° DIM DALI 2700K MG
Reference	A3490200MG
Color	Metallized gold
RAL	Paint of metallic nanoparticles
Category	TRACKLIGHTS

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	190 Lm
Power	2,1 W
Power values of the system	2,21 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 3
Light beam angle	17°
Lighting efficiency	92%
Efficacy	90 Lm/W
Current intensity	700 mA
Dimming	DALI
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	III
Voltage	48 Vdc
Energy efficiency	A++
LED lifespan	L80B10 (Tj=85°C) >41.000h


OTHER DATA

Ingress Protection	IP20
Cord length	2 m
Fast adjustment tensioner	No
Track type	Track 48V
Weight	290 g.
Packaged weight	413 g.
Packaging dimensions	385 x 103 x 78 mm
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene




Holly 48V is a pendant luminary for accent lighting applications. Its geometry, stylish and elegant with a body made out of solid mechanised aluminium, define a high quality perceived product with an exquisite look. In addition, Holly uses a special designed micro-reflector to optimize the output of the LED source, achieving a relatively high amount of light. Within its applications we can consider, bar-counters, beside tables, stairwells...

POLAR DIAGRAM

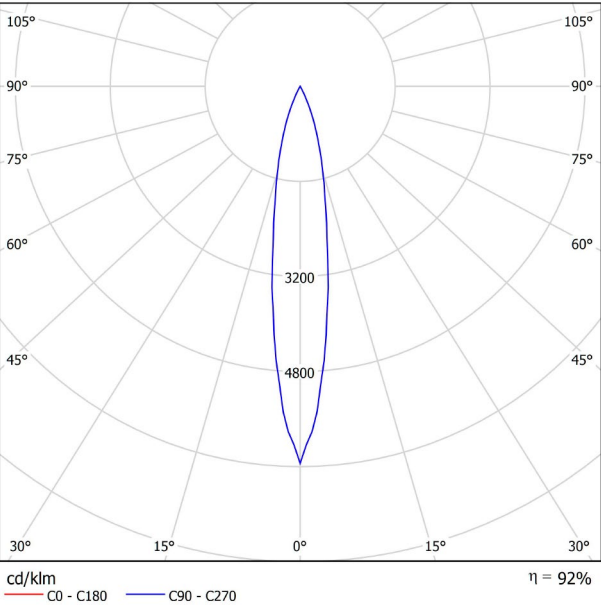



CONICAL DIAGRAM

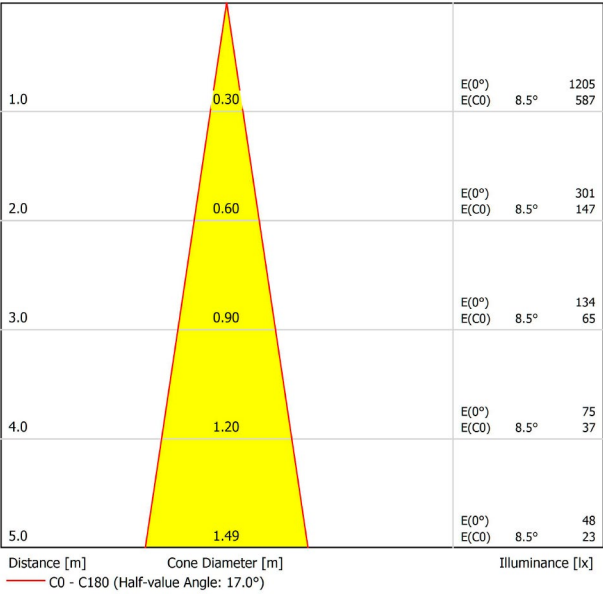




PRODUCT	
Model	Cord Accessory
Reference	02230000 WT NT
Colour	WT ☐ RAL 9016 NT ☒ RAL9005
Category	Accessories

DIMENSIONAL DRAWING

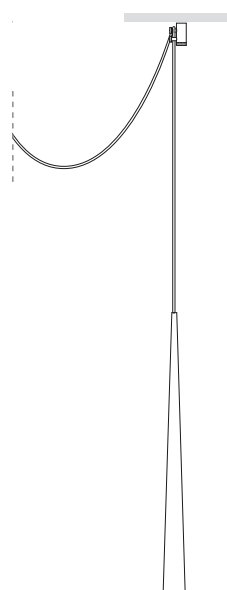

48V SYSTEM

TRACK 48V



TRACK 48V TRIMLESS


TRACK 48V TRIMLESS 1m	A338-01-00-	N
TRACK 48V TRIMLESS 2m	A338-02-00-	N
TRACK 48V TRIMLESS 3m	A338-03-00-	N
TRACK 48V TRIMLESS Corner 90° One Plane	A338-06-00-	N
TRACK 48V TRIMLESS Corner 90° Two Planes	A338-07-00-	N

RECOMMENDED FOR INSTALLATIONS WHERE THE PROFILE CAN BE INSTALLED BEFORE THE FALSE PLASTERBOARD CEILING (THICKNESS 12,5mm.)



TRACK 48V TRIMLESS


Corner 90° One Plane




*Electrical connection not included

TRACK 48V TRIMLESS

Corner 90° Two Planes



*Electrical connection not included




TRACK 48V SURFACE

TRACK 48V SURFACE 1m	A338-11-00-	N
TRACK 48V SURFACE 2m	A338-12-00-	N
TRACK 48V SURFACE 3m	A338-13-00-	N
TRACK 48V SURFACE Corner 90° One Plane	A338-14-00-	N




TRACK 48V SURFACE

Corner 90° One Plane



*Electrical connection not included




TRACK 48V SURFACE SHORT

TRACK 48V SURFACE SHORT 1m	A338-21-00-	N
TRACK 48V SURFACE SHORT 2m	A338-22-00-	N
TRACK 48V SURFACE SHORT 3m	A338-23-00-	N
TRACK 48V SURFACE SHORT Corner 90° One Plane	A338-24-00-	N



TRACK 48V SURFACE SHORT


Corner 90° One Plane



*Electrical connection not included

48V SYSTEM

TRACK 48V

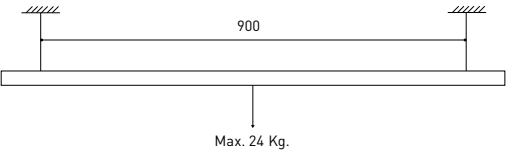


		P	V	D
CONSTANT VOLTAGE	0434-01-21	75W	48V	180 x 52 x 30mm
LED POWER SUPPLY	0434-01-22	150W	48V	240 x 60 x 49mm

DROP VOLTAGE TABLE

		CABLE LENGTH (m)			
		5	10	20	30
POWER (W)	CABLE SECTION (mm²)	TRACK LENGTH (m)			
75	0,75	50	50	30	X
	1,5	50	50	50	50
150	0,75	40	15	X	X
	1,5	50	40	20	X

COMPATIBILITY ACCORDING TO TYPE OF TRACK

TRACK 48V & TRACK 48V SURFACE SHORT

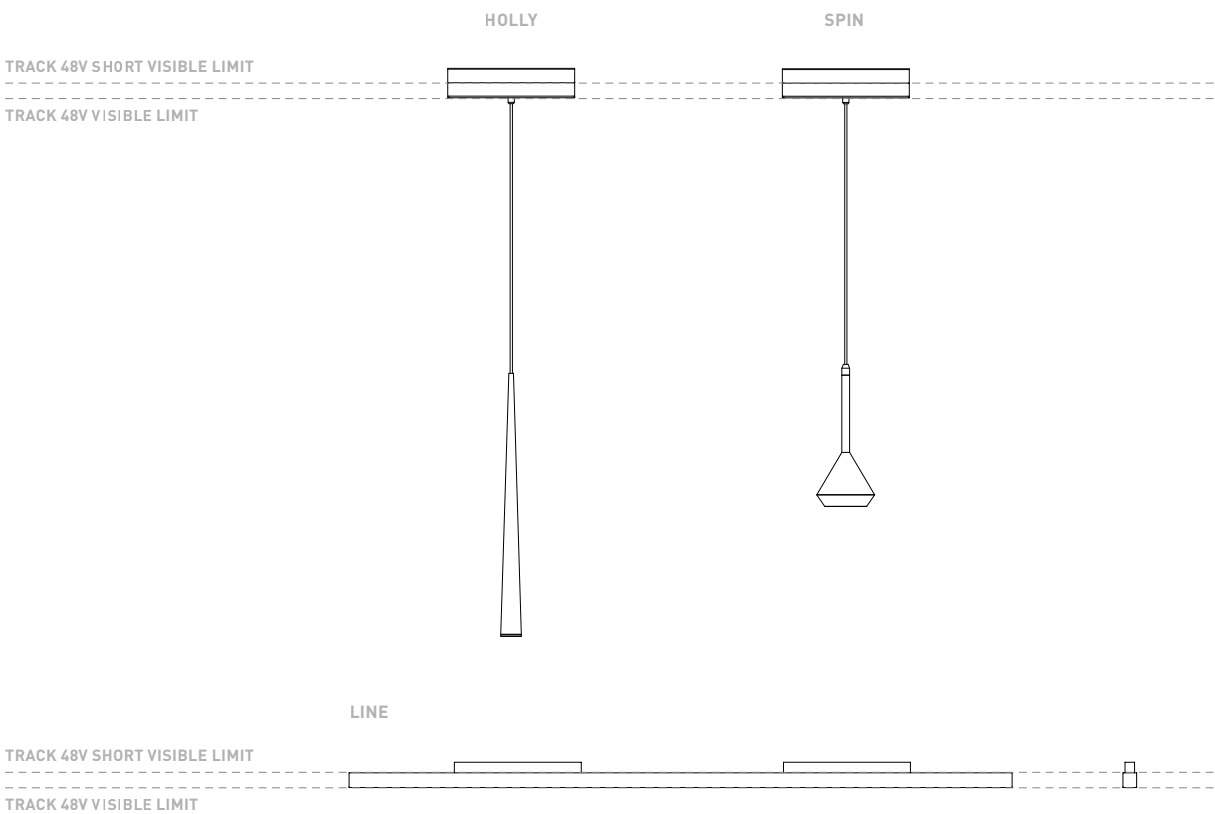


Order with *The 2019 Collection* codes. Products with one single version for both tracks

48V SYSTEM


TRACK 48V

ALL 48V TRACK




TRACK 48V Live-End Connector

A338-00-01- | N |




TRACK 48V Central Connector

A338-00-02- | N |



TRACK 48V Corner 90° Connector

A338-00-12- | N |



TRACK 48V Wireless Control

0434-01-31- | N | Casambi/AAG Stucchi App

0434-01-32- | N | AAG Stucchi App

TRIMLESS 48V



TRACK 48V TRIMLESS Short T-Bracket


A338-00-03



TRACK 48V Clamp for M6 ROD

A338-00-09

*See accessories quantities



TRACK 48V TRIMLESS Long T-Bracket


A338-00-04



TRACK 48V Track Clamp


A338-00-10

*See accessories quantities



TRACK 48V TRIMLESS Straight Joiners (2 units)


A338-00-05



TRACK 48V TRIMLESS Suspension Kit

A338-00-08

*See accessories quantities



TRACK 48V TRIMLESS Plaster Installation Guard 1m

A338-00-21


*** SUGGESTED MOUNTING ACCESSORIES QUANTITIES**

1000mm - 2 Pcs.

2000mm - 3 Pcs.

3000mm - 4 Pcs.

SURFACE, SUSPENSION , SURFACE SHORT & SUSPENSION SHORT 48V



TRACK 48V SURFACE Straight Joiner

A338-00-11- | N |

COLOUR | N ■ |

48V SYSTEM

TRACK 48V

TRIMLESS, SURFACE & SUSPENSION 48V



TRACK 48V TRIMLESS & SURFACE End

A338-00-06- | N |



TRACK 48V TRIMLESS & SURFACE End Feed

A338-00-07- | N |

SURFACE SHORT & SUSPENSION SHORT 48V



TRACK 48V SURFACE SHORT End


A338-00-18- | N |



TRACK 48V SURFACE SHORT End Feed

A338-00-19- | N |

SURFACE & SURFACE SHORT 48V




TRACK 48V Power Supply Case

A338-00-20- | N | 

*To be installed aside 48V Surface Tracks
Power supply not included

SUSPENSION & SUSPENSION SHORT 48V




TRACK 48V Wired Power Supply Case

A338-00-22- | N | 

A338-00-23- | N | 

*Power supply not included



TRACK 48V SURFACE Suspension Kit (2 units)

A338-00-15- | N |



TRACK 48V SURFACE Suspension Feed Kit

A338-00-16- | N | 


A338-00-17- | N | 

*For remote power supply

COLOUR | N ■ |



DIMENSIONS

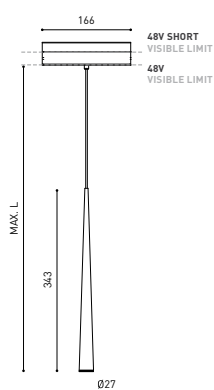

ACCESSORIES



CORD ACCESSORY



TRACK 48V OPTIONS

PRODUCT

Name	HOLLY 48V 2M 17° DIM DALI 2700K NT
Reference	A3490200NT
Color	Textured black
RAL	9005
Category	TRACKLIGHTS

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	190 Lm
Power	2,1 W
Power values of the system	2,21 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 3
Light beam angle	17°
Lighting efficiency	92%
Efficacy	90 Lm/W
Current intensity	700 mA
Dimming	DALI
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	III
Voltage	48 Vdc
Energy efficiency	A++
LED lifespan	L80B10 (Tj=85°C) >41.000h


OTHER DATA

Ingress Protection	IP20
Cord length	2 m
Fast adjustment tensioner	No
Track type	Track 48V
Weight	290 g.
Packaged weight	413 g.
Packaging dimensions	385 x 103 x 78 mm
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene




Holly 48V is a pendant luminaire for accent lighting applications. Its geometry, stylish and elegant with a body made out of solid mechanised aluminium, define a high quality perceived product with an exquisite look. In addition, Holly uses a special designed micro-reflector to optimize the output of the LED source, achieving a relatively high amount of light. Within its applications we can consider, bar-counters, beside tables, stairwells...

POLAR DIAGRAM

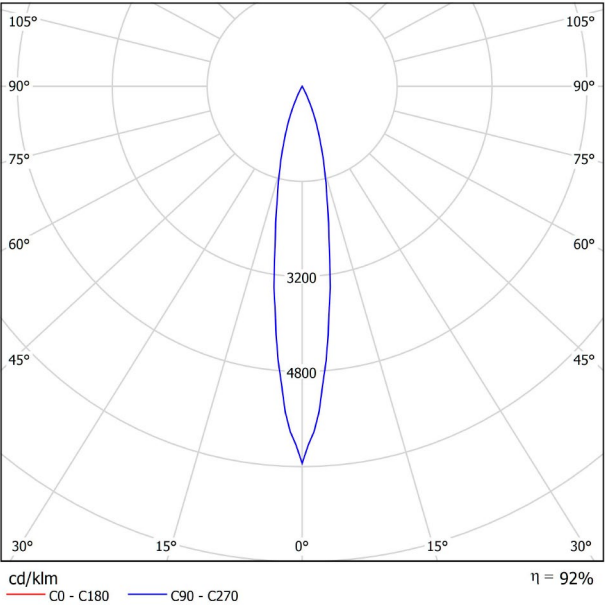



CONICAL DIAGRAM

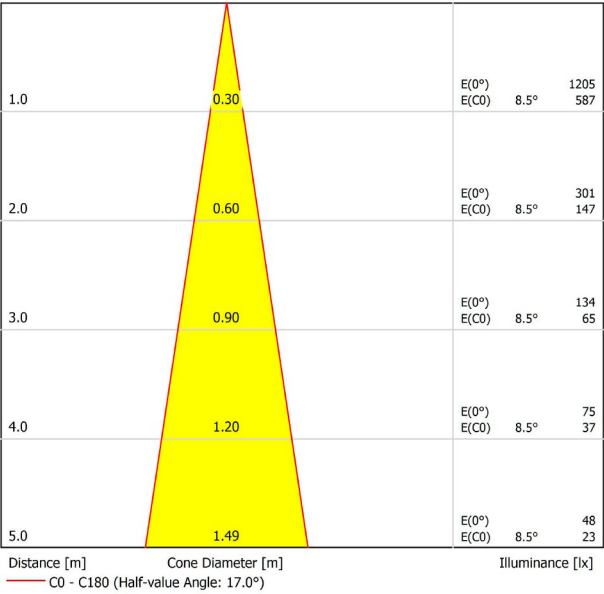




PRODUCT	
Model	Cord Accessory
Reference	02230000 WT NT
Colour	WT ☐ RAL 9016 NT ☒ RAL9005
Category	Accessories

DIMENSIONAL DRAWING

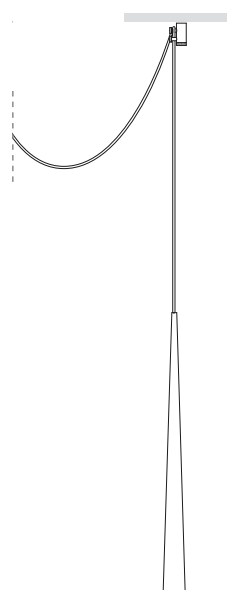

48V SYSTEM

TRACK 48V



TRACK 48V TRIMLESS


TRACK 48V TRIMLESS 1m	A338-01-00-	N
TRACK 48V TRIMLESS 2m	A338-02-00-	N
TRACK 48V TRIMLESS 3m	A338-03-00-	N
TRACK 48V TRIMLESS Corner 90° One Plane	A338-06-00-	N
TRACK 48V TRIMLESS Corner 90° Two Planes	A338-07-00-	N

RECOMMENDED FOR INSTALLATIONS WHERE THE PROFILE CAN BE INSTALLED BEFORE THE FALSE PLASTERBOARD CEILING (THICKNESS 12,5mm.)



TRACK 48V TRIMLESS


Corner 90° One Plane




*Electrical connection not included

TRACK 48V TRIMLESS

Corner 90° Two Planes



*Electrical connection not included




TRACK 48V SURFACE

TRACK 48V SURFACE 1m	A338-11-00-	N
TRACK 48V SURFACE 2m	A338-12-00-	N
TRACK 48V SURFACE 3m	A338-13-00-	N
TRACK 48V SURFACE Corner 90° One Plane	A338-14-00-	N




TRACK 48V SURFACE

Corner 90° One Plane



*Electrical connection not included




TRACK 48V SURFACE SHORT

TRACK 48V SURFACE SHORT 1m	A338-21-00-	N
TRACK 48V SURFACE SHORT 2m	A338-22-00-	N
TRACK 48V SURFACE SHORT 3m	A338-23-00-	N
TRACK 48V SURFACE SHORT Corner 90° One Plane	A338-24-00-	N



TRACK 48V SURFACE SHORT


Corner 90° One Plane



*Electrical connection not included

48V SYSTEM

TRACK 48V

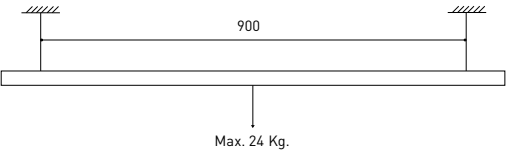


		P	V	D
CONSTANT VOLTAGE	0434-01-21	75W	48V	180 x 52 x 30mm
LED POWER SUPPLY	0434-01-22	150W	48V	240 x 60 x 49mm

DROP VOLTAGE TABLE

		CABLE LENGTH (m)			
		5	10	20	30
POWER (W)	CABLE SECTION (mm²)	TRACK LENGTH (m)			
75	0,75	50	50	30	X
	1,5	50	50	50	50
150	0,75	40	15	X	X
	1,5	50	40	20	X

COMPATIBILITY ACCORDING TO TYPE OF TRACK

TRACK 48V & TRACK 48V SURFACE SHORT

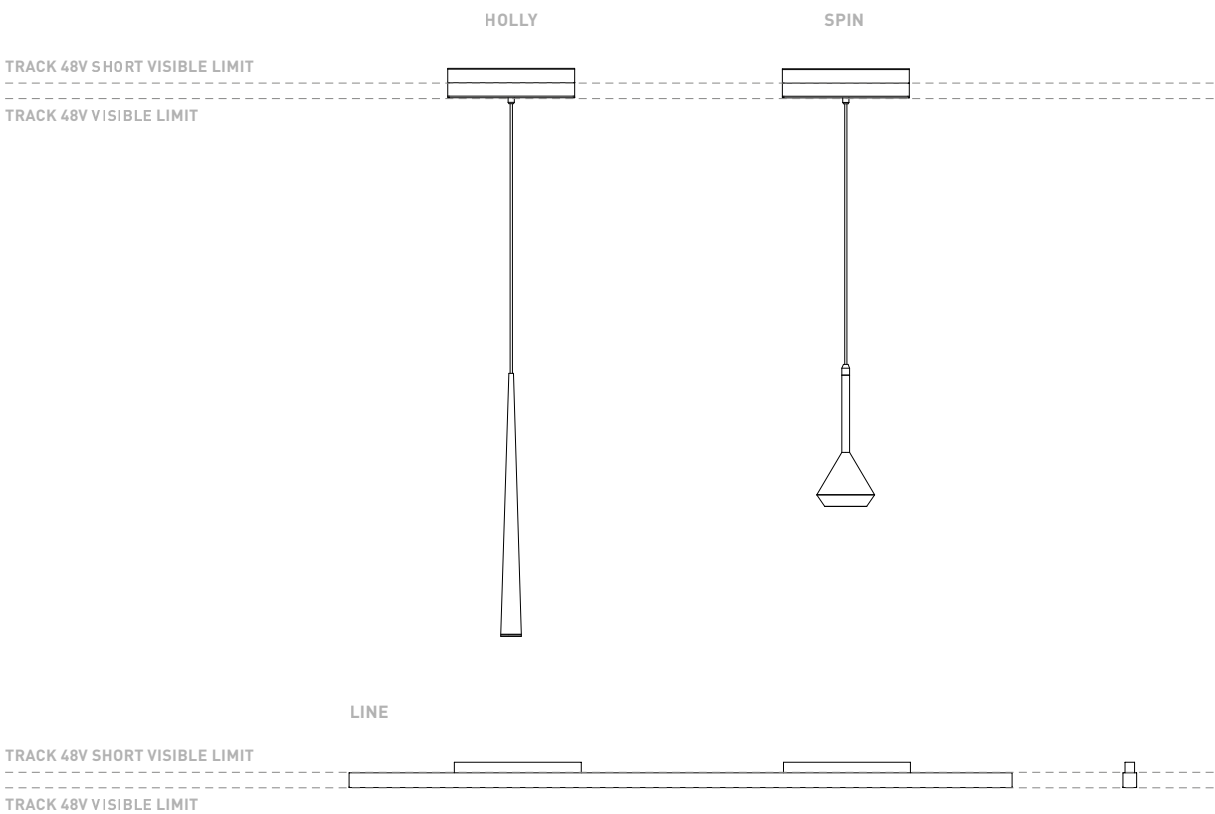


Order with *The 2019 Collection* codes. Products with one single version for both tracks

48V SYSTEM


TRACK 48V

ALL 48V TRACK




TRACK 48V Live-End Connector

A338-00-01- | N |




TRACK 48V Central Connector

A338-00-02- | N |



TRACK 48V Corner 90° Connector

A338-00-12- | N |



TRACK 48V Wireless Control

0434-01-31- | N | Casambi/AAG Stucchi App

0434-01-32- | N | AAG Stucchi App

TRIMLESS 48V



TRACK 48V TRIMLESS Short T-Bracket


A338-00-03



TRACK 48V Clamp for M6 ROD

A338-00-09

*See accessories quantities



TRACK 48V TRIMLESS Long T-Bracket


A338-00-04



TRACK 48V Track Clamp

A338-00-10

*See accessories quantities



TRACK 48V TRIMLESS Straight Joiners (2 units)


A338-00-05



TRACK 48V TRIMLESS Suspension Kit

A338-00-08

*See accessories quantities



TRACK 48V TRIMLESS Plaster Installation Guard 1m

A338-00-21


*** SUGGESTED MOUNTING ACCESSORIES QUANTITIES**

1000mm - 2 Pcs.

2000mm - 3 Pcs.

3000mm - 4 Pcs.

SURFACE, SUSPENSION , SURFACE SHORT & SUSPENSION SHORT 48V



TRACK 48V SURFACE Straight Joiner

A338-00-11- | N |

COLOUR | N ■ |

48V SYSTEM

TRACK 48V

TRIMLESS, SURFACE & SUSPENSION 48V



TRACK 48V TRIMLESS & SURFACE End

A338-00-06- | N |



TRACK 48V TRIMLESS & SURFACE End Feed

A338-00-07- | N |

SURFACE SHORT & SUSPENSION SHORT 48V



TRACK 48V SURFACE SHORT End


A338-00-18- | N |



TRACK 48V SURFACE SHORT End Feed

A338-00-19- | N |

SURFACE & SURFACE SHORT 48V




TRACK 48V Power Supply Case

A338-00-20- | N | 

*To be installed aside 48V Surface Tracks
Power supply not included

SUSPENSION & SUSPENSION SHORT 48V



TRACK 48V Wired Power Supply Case

A338-00-22- | N | 

A338-00-23- | N | 

*Power supply not included



TRACK 48V SURFACE Suspension Kit (2 units)

A338-00-15- | N |



TRACK 48V SURFACE Suspension Feed Kit

A338-00-16- | N | 


A338-00-17- | N | 

*For remote power supply

COLOUR | N ■ |



DIMENSIONS

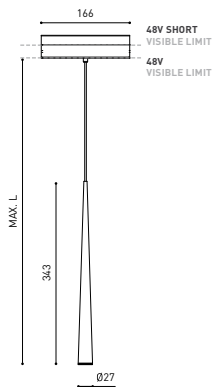

ACCESSORIES



CORD ACCESOSORY



TRACK 48V OPTIONS

PRODUCT

Name	HOLLY 48V 2M 17° DIM DALI 2700K WT
Reference	A3490200WT
Color	Textured white
RAL	9016
Category	TRACKLIGHTS

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	190 Lm
Power	2,1 W
Power values of the system	2,21 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 3
Light beam angle	17°
Lighting efficiency	92%
Efficacy	90 Lm/W
Current intensity	700 mA
Dimming	DALI
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	III
Voltage	48 Vdc
Energy efficiency	A++
LED lifespan	L80B10 (Tj=85°C) >41.000h


OTHER DATA

Ingress Protection	IP20
Cord length	2 m
Fast adjustment tensioner	No
Track type	Track 48V
Weight	290 g.
Packaged weight	413 g.
Packaging dimensions	385 x 103 x 78 mm
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene




Holly 48V is a pendant luminary for accent lighting applications. Its geometry, stylish and elegant with a body made out of solid mechanised aluminium, define a high quality perceived product with an exquisite look. In addition, Holly uses a special designed micro-reflector to optimize the output of the LED source, achieving a relatively high amount of light. Within its applications we can consider, bar-counters, beside tables, stairwells...

POLAR DIAGRAM

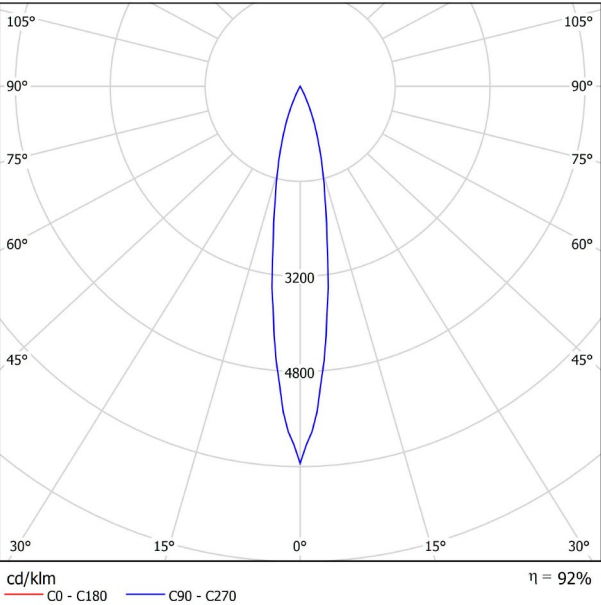



CONICAL DIAGRAM

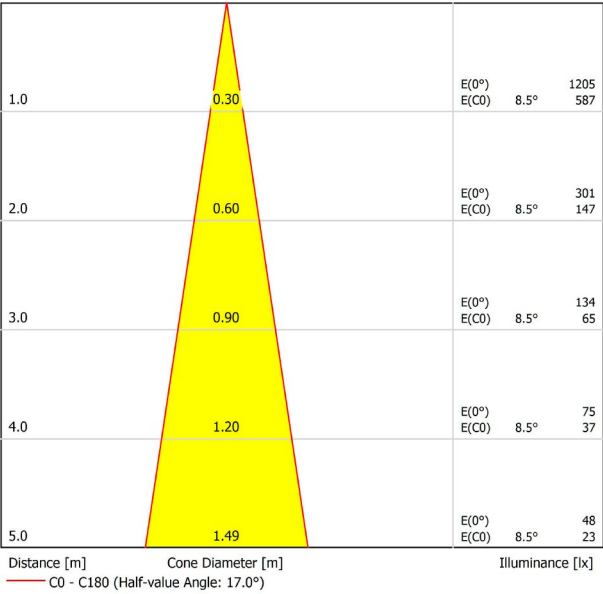




PRODUCT	
Model	Cord Accessory
Reference	02230000 WT NT
Colour	WT ☐ RAL 9016 NT ☒ RAL9005
Category	Accessories

DIMENSIONAL DRAWING

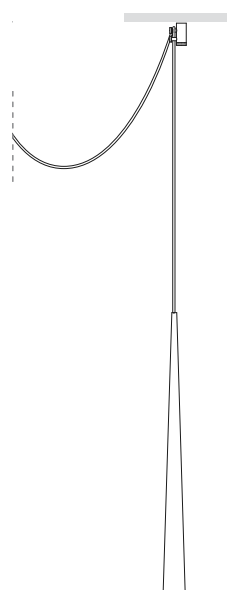

48V SYSTEM

TRACK 48V



TRACK 48V TRIMLESS


TRACK 48V TRIMLESS 1m	A338-01-00-	N
TRACK 48V TRIMLESS 2m	A338-02-00-	N
TRACK 48V TRIMLESS 3m	A338-03-00-	N
TRACK 48V TRIMLESS Corner 90° One Plane	A338-06-00-	N
TRACK 48V TRIMLESS Corner 90° Two Planes	A338-07-00-	N

RECOMMENDED FOR INSTALLATIONS WHERE THE PROFILE CAN BE INSTALLED BEFORE THE FALSE PLASTERBOARD CEILING (THICKNESS 12,5mm.)



TRACK 48V TRIMLESS


Corner 90° One Plane




*Electrical connection not included

TRACK 48V TRIMLESS

Corner 90° Two Planes



*Electrical connection not included




TRACK 48V SURFACE

TRACK 48V SURFACE 1m	A338-11-00-	N
TRACK 48V SURFACE 2m	A338-12-00-	N
TRACK 48V SURFACE 3m	A338-13-00-	N
TRACK 48V SURFACE Corner 90° One Plane	A338-14-00-	N




TRACK 48V SURFACE

Corner 90° One Plane



*Electrical connection not included




TRACK 48V SURFACE SHORT

TRACK 48V SURFACE SHORT 1m	A338-21-00-	N
TRACK 48V SURFACE SHORT 2m	A338-22-00-	N
TRACK 48V SURFACE SHORT 3m	A338-23-00-	N
TRACK 48V SURFACE SHORT Corner 90° One Plane	A338-24-00-	N



TRACK 48V SURFACE SHORT


Corner 90° One Plane



*Electrical connection not included

48V SYSTEM

TRACK 48V

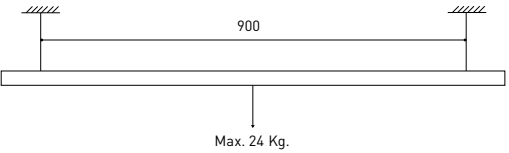


		P	V	D
CONSTANT VOLTAGE	0434-01-21	75W	48V	180 x 52 x 30mm
LED POWER SUPPLY	0434-01-22	150W	48V	240 x 60 x 49mm

DROP VOLTAGE TABLE

		CABLE LENGTH (m)			
		5	10	20	30
POWER (W)	CABLE SECTION (mm²)	TRACK LENGTH (m)			
75	0,75	50	50	30	X
	1,5	50	50	50	50
150	0,75	40	15	X	X
	1,5	50	40	20	X

COMPATIBILITY ACCORDING TO TYPE OF TRACK

TRACK 48V & TRACK 48V SURFACE SHORT

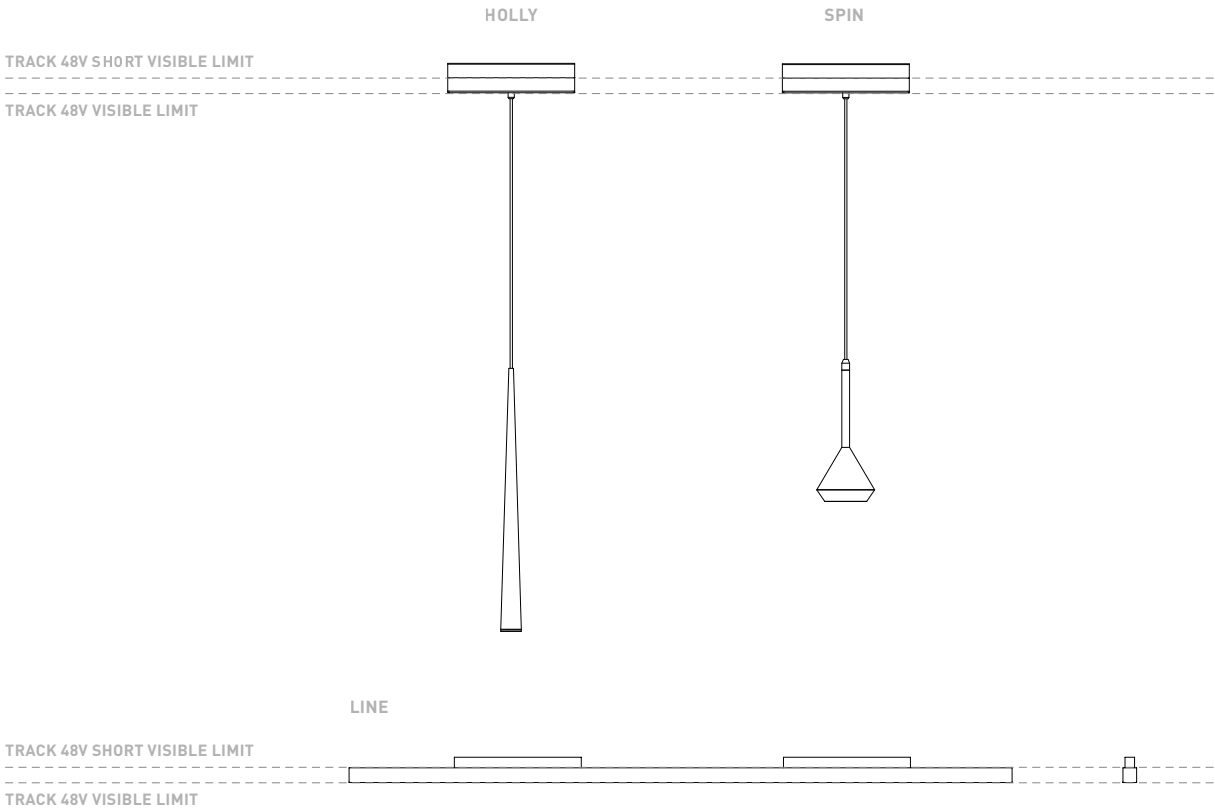


Order with *The 2019 Collection* codes. Products with one single version for both tracks

48V SYSTEM


TRACK 48V

ALL 48V TRACK




TRACK 48V Live-End Connector

A338-00-01- | N |




TRACK 48V Central Connector

A338-00-02- | N |



TRACK 48V Corner 90° Connector

A338-00-12- | N |



TRACK 48V Wireless Control

0434-01-31- | N | Casambi/AAG Stucchi App

0434-01-32- | N | AAG Stucchi App

TRIMLESS 48V



TRACK 48V TRIMLESS Short T-Bracket


A338-00-03



TRACK 48V Clamp for M6 ROD

A338-00-09

*See accessories quantities



TRACK 48V TRIMLESS Long T-Bracket


A338-00-04



TRACK 48V Track Clamp


A338-00-10

*See accessories quantities



TRACK 48V TRIMLESS Straight Joiners (2 units)


A338-00-05



TRACK 48V TRIMLESS Suspension Kit

A338-00-08

*See accessories quantities



TRACK 48V TRIMLESS Plaster Installation Guard 1m

A338-00-21


*** SUGGESTED MOUNTING ACCESSORIES QUANTITIES**

1000mm - 2 Pcs.

2000mm - 3 Pcs.

3000mm - 4 Pcs.

SURFACE, SUSPENSION , SURFACE SHORT & SUSPENSION SHORT 48V



TRACK 48V SURFACE Straight Joiner

A338-00-11- | N |

COLOUR | N ■ |

48V SYSTEM

TRACK 48V

TRIMLESS, SURFACE & SUSPENSION 48V



TRACK 48V TRIMLESS & SURFACE End

A338-00-06- | N |



TRACK 48V TRIMLESS & SURFACE End Feed

A338-00-07- | N |

SURFACE SHORT & SUSPENSION SHORT 48V



TRACK 48V SURFACE SHORT End


A338-00-18- | N |



TRACK 48V SURFACE SHORT End Feed

A338-00-19- | N |

SURFACE & SURFACE SHORT 48V




TRACK 48V Power Supply Case

A338-00-20- | N | 

*To be installed aside 48V Surface Tracks
Power supply not included

SUSPENSION & SUSPENSION SHORT 48V




TRACK 48V Wired Power Supply Case

A338-00-22- | N | 

A338-00-23- | N | 

*Power supply not included



TRACK 48V SURFACE Suspension Kit (2 units)

A338-00-15- | N |



TRACK 48V SURFACE Suspension Feed Kit

A338-00-16- | N | 


A338-00-17- | N | 

*For remote power supply

COLOUR | N ■ |



DIMENSIONS

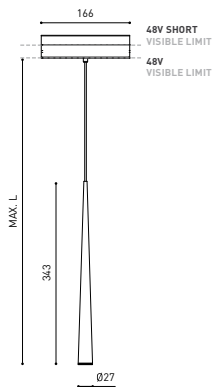

ACCESSORIES



CORD ACCESSORY



TRACK 48V OPTIONS

PRODUCT

Name	HOLLY 48V 2M 17° DIM DALI 3000K MC
Reference	A3490201MC
Color	Metallized copper
RAL	Paint of metallic nanoparticles
Category	TRACKLIGHTS

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	210 Lm
Power	2,1 W
Power values of the system	2,21 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 3
Light beam angle	17°
Lighting efficiency	92%
Efficacy	100 Lm/W
Current intensity	700 mA
Dimming	DALI
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	III
Voltage	48 Vdc
Energy efficiency	A++
LED lifespan	L80B10 (Tj=85°C) >41.000h


OTHER DATA

Ingress Protection	IP20
Cord length	2 m
Fast adjustment tensioner	No
Track type	Track 48V
Weight	290 g.
Packaged weight	413 g.
Packaging dimensions	385 x 103 x 78 mm
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene




Holly 48V is a pendant luminary for accent lighting applications. Its geometry, stylish and elegant with a body made out of solid mechanised aluminium, define a high quality perceived product with an exquisite look. In addition, Holly uses a special designed micro-reflector to optimize the output of the LED source, achieving a relatively high amount of light. Within its applications we can consider, bar-counters, beside tables, stairwells...

POLAR DIAGRAM

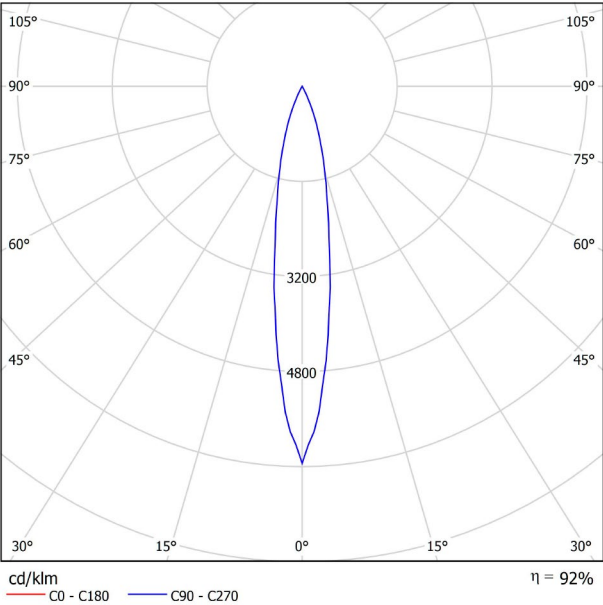



CONICAL DIAGRAM

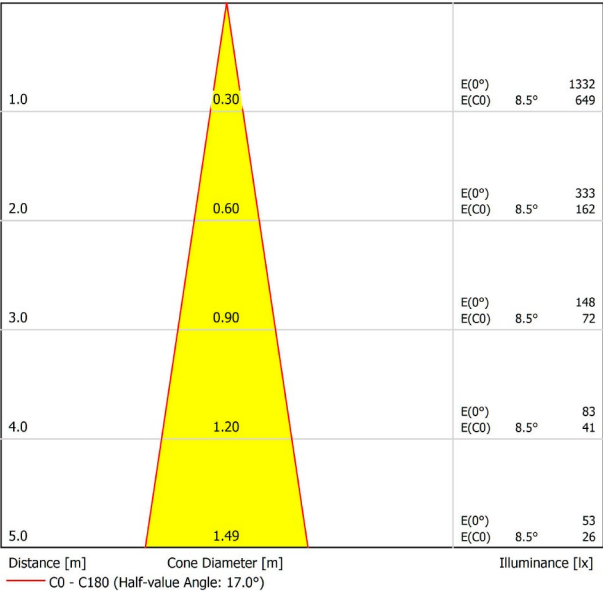




PRODUCT	
Model	Cord Accessory
Reference	02230000 WT NT
Colour	WT ☐ RAL 9016 NT ☒ RAL9005
Category	Accessories

DIMENSIONAL DRAWING

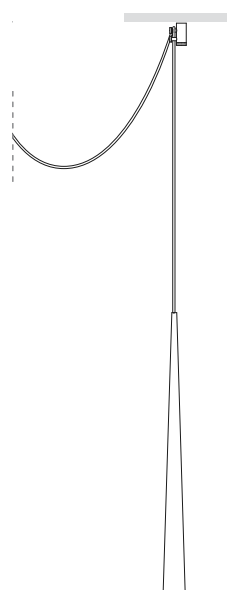

48V SYSTEM

TRACK 48V



TRACK 48V TRIMLESS


TRACK 48V TRIMLESS 1m	A338-01-00-	N
TRACK 48V TRIMLESS 2m	A338-02-00-	N
TRACK 48V TRIMLESS 3m	A338-03-00-	N
TRACK 48V TRIMLESS Corner 90° One Plane	A338-06-00-	N
TRACK 48V TRIMLESS Corner 90° Two Planes	A338-07-00-	N

RECOMMENDED FOR INSTALLATIONS WHERE THE PROFILE CAN BE INSTALLED BEFORE THE FALSE PLASTERBOARD CEILING (THICKNESS 12,5mm.)



TRACK 48V TRIMLESS


Corner 90° One Plane




*Electrical connection not included

TRACK 48V TRIMLESS

Corner 90° Two Planes



*Electrical connection not included




TRACK 48V SURFACE

TRACK 48V SURFACE 1m	A338-11-00-	N
TRACK 48V SURFACE 2m	A338-12-00-	N
TRACK 48V SURFACE 3m	A338-13-00-	N
TRACK 48V SURFACE Corner 90° One Plane	A338-14-00-	N




TRACK 48V SURFACE

Corner 90° One Plane



*Electrical connection not included




TRACK 48V SURFACE SHORT

TRACK 48V SURFACE SHORT 1m	A338-21-00-	N
TRACK 48V SURFACE SHORT 2m	A338-22-00-	N
TRACK 48V SURFACE SHORT 3m	A338-23-00-	N
TRACK 48V SURFACE SHORT Corner 90° One Plane	A338-24-00-	N



TRACK 48V SURFACE SHORT


Corner 90° One Plane



*Electrical connection not included

48V SYSTEM

TRACK 48V

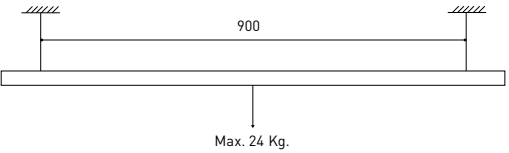


		P	V	D
CONSTANT VOLTAGE	0434-01-21	75W	48V	180 x 52 x 30mm
LED POWER SUPPLY	0434-01-22	150W	48V	240 x 60 x 49mm

DROP VOLTAGE TABLE

		CABLE LENGTH (m)			
		5	10	20	30
POWER (W)	CABLE SECTION (mm²)	TRACK LENGTH (m)			
75	0,75	50	50	30	X
	1,5	50	50	50	50
150	0,75	40	15	X	X
	1,5	50	40	20	X

COMPATIBILITY ACCORDING TO TYPE OF TRACK

TRACK 48V & TRACK 48V SURFACE SHORT

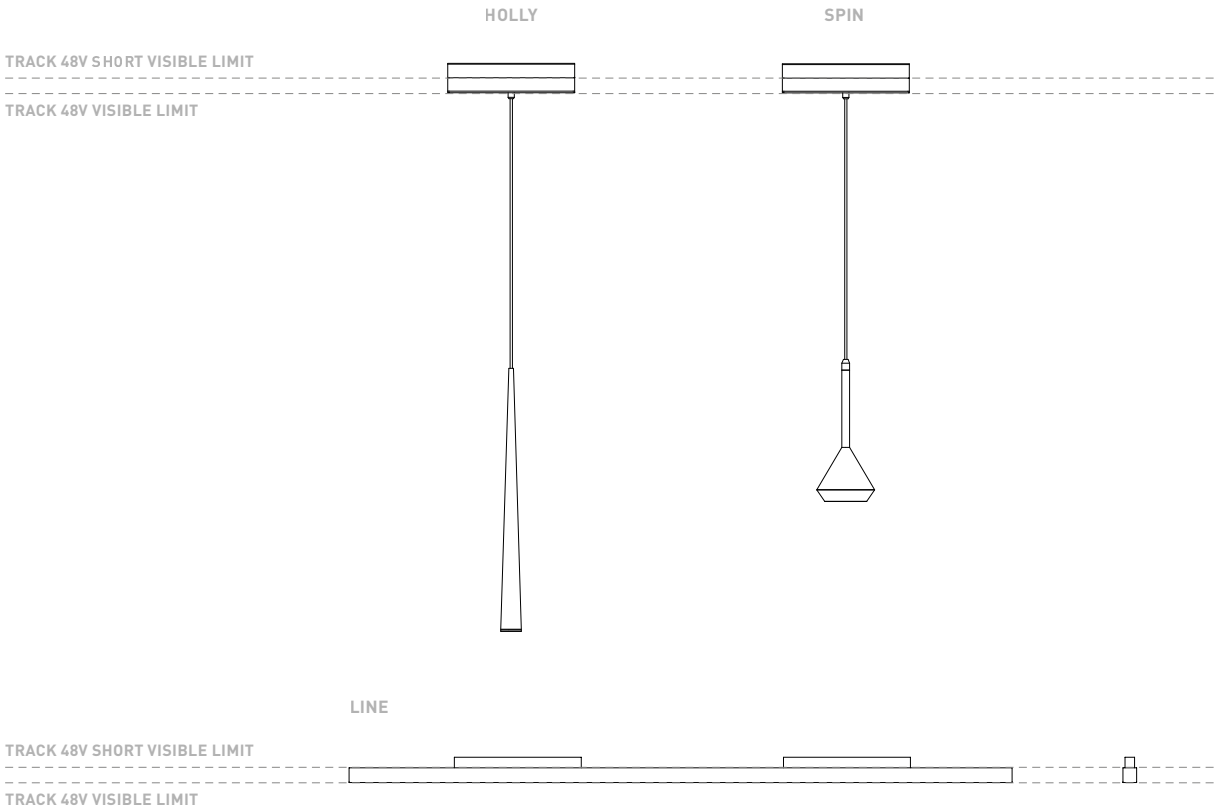


Order with *The 2019 Collection* codes. Products with one single version for both tracks

48V SYSTEM


TRACK 48V

ALL 48V TRACK




TRACK 48V Live-End Connector

A338-00-01- | N |




TRACK 48V Central Connector

A338-00-02- | N |



TRACK 48V Corner 90° Connector

A338-00-12- | N |



TRACK 48V Wireless Control

0434-01-31- | N | Casambi/AAG Stucchi App

0434-01-32- | N | AAG Stucchi App

TRIMLESS 48V



TRACK 48V TRIMLESS Short T-Bracket


A338-00-03



TRACK 48V Clamp for M6 ROD

A338-00-09

*See accessories quantities



TRACK 48V TRIMLESS Long T-Bracket


A338-00-04



TRACK 48V Track Clamp


A338-00-10

*See accessories quantities



TRACK 48V TRIMLESS Straight Joiners (2 units)


A338-00-05



TRACK 48V TRIMLESS Suspension Kit

A338-00-08

*See accessories quantities



TRACK 48V TRIMLESS Plaster Installation Guard 1m

A338-00-21


*** SUGGESTED MOUNTING ACCESSORIES QUANTITIES**

1000mm - 2 Pcs.

2000mm - 3 Pcs.

3000mm - 4 Pcs.

SURFACE, SUSPENSION , SURFACE SHORT & SUSPENSION SHORT 48V



TRACK 48V SURFACE Straight Joiner

A338-00-11- | N |

COLOUR | N ■ |

48V SYSTEM

TRACK 48V

TRIMLESS, SURFACE & SUSPENSION 48V



TRACK 48V TRIMLESS & SURFACE End

A338-00-06- | N |



TRACK 48V TRIMLESS & SURFACE End Feed

A338-00-07- | N |

SURFACE SHORT & SUSPENSION SHORT 48V



TRACK 48V SURFACE SHORT End


A338-00-18- | N |



TRACK 48V SURFACE SHORT End Feed

A338-00-19- | N |

SURFACE & SURFACE SHORT 48V




TRACK 48V Power Supply Case

A338-00-20- | N | 

*To be installed aside 48V Surface Tracks
Power supply not included

SUSPENSION & SUSPENSION SHORT 48V




TRACK 48V Wired Power Supply Case

A338-00-22- | N | 

A338-00-23- | N | 

*Power supply not included



TRACK 48V SURFACE Suspension Kit (2 units)

A338-00-15- | N |



TRACK 48V SURFACE Suspension Feed Kit

A338-00-16- | N | 


A338-00-17- | N | 

*For remote power supply

COLOUR | N ■ |



DIMENSIONS

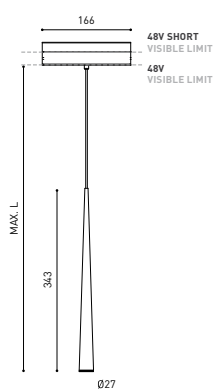

ACCESSORIES



CORD ACCESSORY



TRACK 48V OPTIONS

PRODUCT

Name	HOLLY 48V 2M 17° DIM DALI 3000K MG
Reference	A3490201MG
Color	Metallized gold
RAL	Paint of metallic nanoparticles
Category	TRACKLIGHTS

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	210 Lm
Power	2,1 W
Power values of the system	2,21 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 3
Light beam angle	17°
Lighting efficiency	92%
Efficacy	100 Lm/W
Current intensity	700 mA
Dimming	DALI
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	III
Voltage	48 Vdc
Energy efficiency	A++
LED lifespan	L80B10 (Tj=85°C) >41.000h


OTHER DATA

Ingress Protection	IP20
Cord length	2 m
Fast adjustment tensioner	No
Track type	Track 48V
Weight	290 g.
Packaged weight	413 g.
Packaging dimensions	385 x 103 x 78 mm
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene




Holly 48V is a pendant luminaire for accent lighting applications. Its geometry, stylish and elegant with a body made out of solid mechanised aluminium, define a high quality perceived product with an exquisite look. In addition, Holly uses a special designed micro-reflector to optimize the output of the LED source, achieving a relatively high amount of light. Within its applications we can consider, bar-counters, beside tables, stairwells...

POLAR DIAGRAM

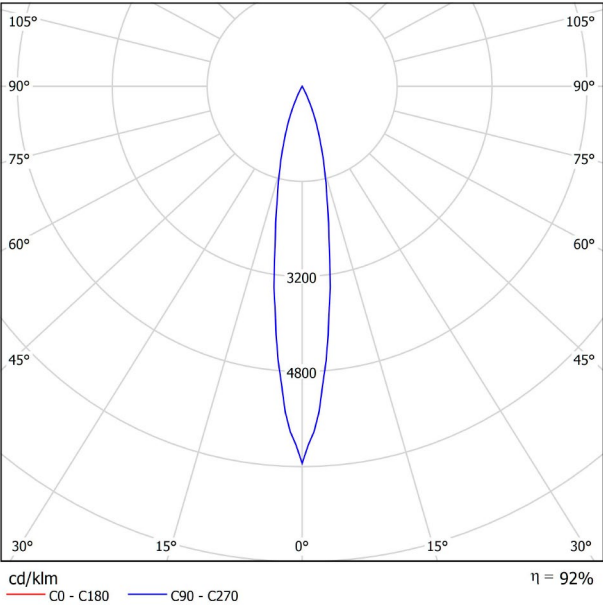



CONICAL DIAGRAM

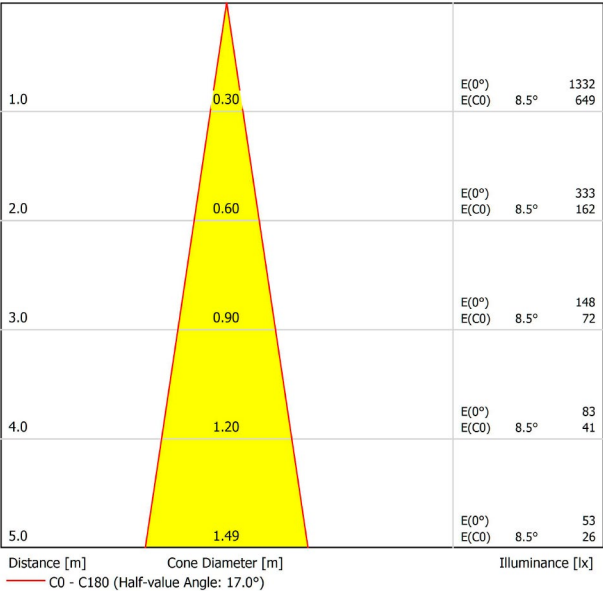




PRODUCT	
Model	Cord Accessory
Reference	02230000 WT NT
Colour	WT ☐ RAL 9016 NT ☒ RAL9005
Category	Accessories

DIMENSIONAL DRAWING

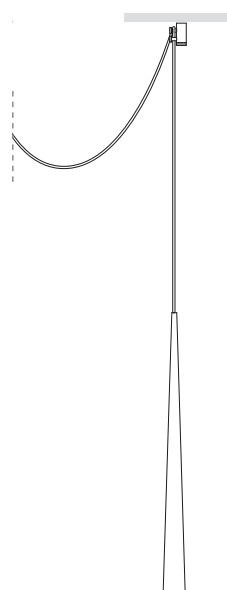

48V SYSTEM

TRACK 48V



TRACK 48V TRIMLESS


TRACK 48V TRIMLESS 1m	A338-01-00-	N
TRACK 48V TRIMLESS 2m	A338-02-00-	N
TRACK 48V TRIMLESS 3m	A338-03-00-	N
TRACK 48V TRIMLESS Corner 90° One Plane	A338-06-00-	N
TRACK 48V TRIMLESS Corner 90° Two Planes	A338-07-00-	N

RECOMMENDED FOR INSTALLATIONS WHERE THE PROFILE CAN BE INSTALLED BEFORE THE FALSE PLASTERBOARD CEILING (THICKNESS 12,5mm.)



TRACK 48V TRIMLESS


Corner 90° One Plane




*Electrical connection not included

TRACK 48V TRIMLESS

Corner 90° Two Planes



*Electrical connection not included




TRACK 48V SURFACE

TRACK 48V SURFACE 1m	A338-11-00-	N
TRACK 48V SURFACE 2m	A338-12-00-	N
TRACK 48V SURFACE 3m	A338-13-00-	N
TRACK 48V SURFACE Corner 90° One Plane	A338-14-00-	N




TRACK 48V SURFACE

Corner 90° One Plane



*Electrical connection not included




TRACK 48V SURFACE SHORT

TRACK 48V SURFACE SHORT 1m	A338-21-00-	N
TRACK 48V SURFACE SHORT 2m	A338-22-00-	N
TRACK 48V SURFACE SHORT 3m	A338-23-00-	N
TRACK 48V SURFACE SHORT Corner 90° One Plane	A338-24-00-	N



TRACK 48V SURFACE SHORT


Corner 90° One Plane



*Electrical connection not included

48V SYSTEM

TRACK 48V

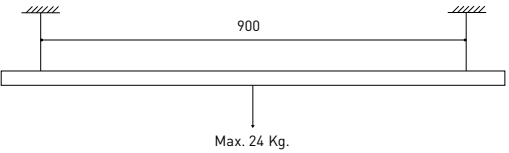


		P	V	D
CONSTANT VOLTAGE	0434-01-21	75W	48V	180 x 52 x 30mm
LED POWER SUPPLY	0434-01-22	150W	48V	240 x 60 x 49mm

DROP VOLTAGE TABLE

		CABLE LENGTH (m)			
		5	10	20	30
POWER (W)	CABLE SECTION (mm²)	TRACK LENGTH (m)			
75	0,75	50	50	30	X
	1,5	50	50	50	50
150	0,75	40	15	X	X
	1,5	50	40	20	X

COMPATIBILITY ACCORDING TO TYPE OF TRACK

TRACK 48V & TRACK 48V SURFACE SHORT

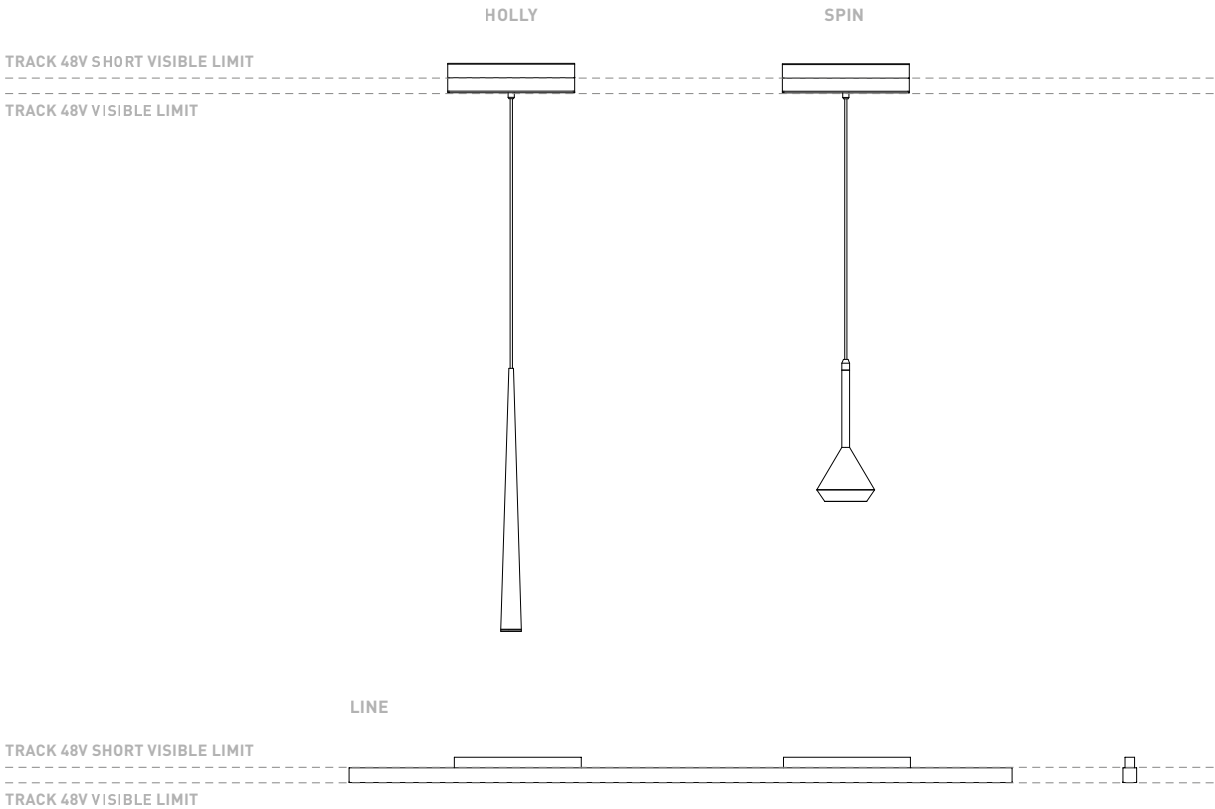


Order with *The 2019 Collection* codes. Products with one single version for both tracks

48V SYSTEM


TRACK 48V

ALL 48V TRACK




TRACK 48V Live-End Connector

A338-00-01- | N |




TRACK 48V Central Connector

A338-00-02- | N |



TRACK 48V Corner 90° Connector

A338-00-12- | N |



TRACK 48V Wireless Control

0434-01-31- | N | Casambi/AAG Stucchi App

0434-01-32- | N | AAG Stucchi App

TRIMLESS 48V



TRACK 48V TRIMLESS Short T-Bracket


A338-00-03



TRACK 48V Clamp for M6 ROD

A338-00-09

*See accessories quantities



TRACK 48V TRIMLESS Long T-Bracket


A338-00-04



TRACK 48V Track Clamp

A338-00-10

*See accessories quantities



TRACK 48V TRIMLESS Straight Joiners (2 units)


A338-00-05



TRACK 48V TRIMLESS Suspension Kit

A338-00-08

*See accessories quantities



TRACK 48V TRIMLESS Plaster Installation Guard 1m

A338-00-21


*** SUGGESTED MOUNTING ACCESSORIES QUANTITIES**

1000mm - 2 Pcs.

2000mm - 3 Pcs.

3000mm - 4 Pcs.

SURFACE, SUSPENSION , SURFACE SHORT & SUSPENSION SHORT 48V



TRACK 48V SURFACE Straight Joiner

A338-00-11- | N |

COLOUR | N ■ |

48V SYSTEM

TRACK 48V

TRIMLESS, SURFACE & SUSPENSION 48V



TRACK 48V TRIMLESS & SURFACE End

A338-00-06- | N |



TRACK 48V TRIMLESS & SURFACE End Feed

A338-00-07- | N |

SURFACE SHORT & SUSPENSION SHORT 48V



TRACK 48V SURFACE SHORT End


A338-00-18- | N |



TRACK 48V SURFACE SHORT End Feed

A338-00-19- | N |

SURFACE & SURFACE SHORT 48V




TRACK 48V Power Supply Case

A338-00-20- | N | 

*To be installed aside 48V Surface Tracks
Power supply not included

SUSPENSION & SUSPENSION SHORT 48V



TRACK 48V Wired Power Supply Case

A338-00-22- | N | 

A338-00-23- | N | 

*Power supply not included



TRACK 48V SURFACE Suspension Kit (2 units)

A338-00-15- | N |



TRACK 48V SURFACE Suspension Feed Kit

A338-00-16- | N | 


A338-00-17- | N | 

*For remote power supply

COLOUR | N ■ |



DIMENSIONS

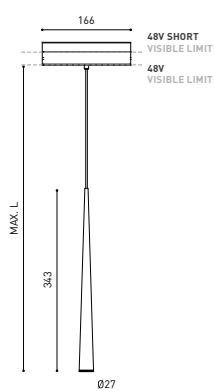

ACCESSORIES



CORD ACCESSORY



TRACK 48V OPTIONS

PRODUCT

Name	HOLLY 48V 2M 17° DIM DALI 3000K NT
Reference	A3490201NT
Color	Textured black
RAL	9005
Category	TRACKLIGHTS

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	210 Lm
Power	2,1 W
Power values of the system	2,21 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 3
Light beam angle	17°
Lighting efficiency	92%
Efficacy	100 Lm/W
Current intensity	700 mA
Dimming	DALI
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	III
Voltage	48 Vdc
Energy efficiency	A++
LED lifespan	L80B10 (Tj=85°C) >41.000h


OTHER DATA

Ingress Protection	IP20
Cord length	2 m
Fast adjustment tensioner	No
Track type	Track 48V
Weight	290 g.
Packaged weight	413 g.
Packaging dimensions	385 x 103 x 78 mm
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene




Holly 48V is a pendant luminaire for accent lighting applications. Its geometry, stylish and elegant with a body made out of solid mechanised aluminium, define a high quality perceived product with an exquisite look. In addition, Holly uses a special designed micro-reflector to optimize the output of the LED source, achieving a relatively high amount of light. Within its applications we can consider, bar-counters, beside tables, stairwells...

POLAR DIAGRAM

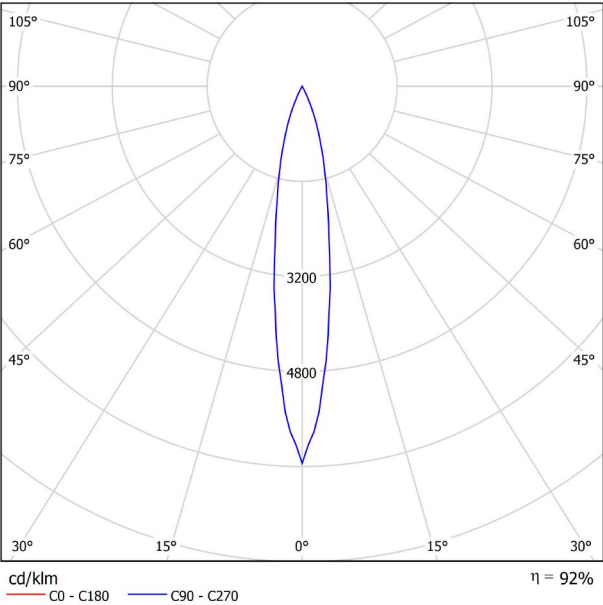



CONICAL DIAGRAM

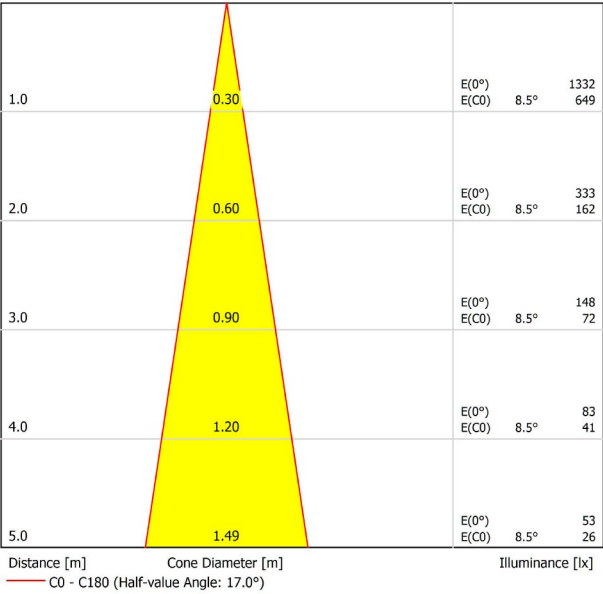




PRODUCT	
Model	Cord Accessory
Reference	02230000 WT NT
Colour	WT ☐ RAL 9016 NT ☒ RAL9005
Category	Accessories

DIMENSIONAL DRAWING

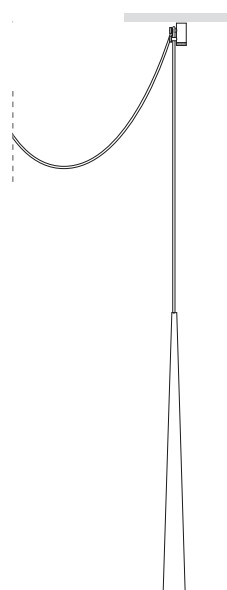

48V SYSTEM

TRACK 48V



TRACK 48V TRIMLESS


TRACK 48V TRIMLESS 1m	A338-01-00-	N
TRACK 48V TRIMLESS 2m	A338-02-00-	N
TRACK 48V TRIMLESS 3m	A338-03-00-	N
TRACK 48V TRIMLESS Corner 90° One Plane	A338-06-00-	N
TRACK 48V TRIMLESS Corner 90° Two Planes	A338-07-00-	N

RECOMMENDED FOR INSTALLATIONS WHERE THE PROFILE CAN BE INSTALLED BEFORE THE FALSE PLASTERBOARD CEILING (THICKNESS 12,5mm.)



TRACK 48V TRIMLESS


Corner 90° One Plane




*Electrical connection not included

TRACK 48V TRIMLESS

Corner 90° Two Planes



*Electrical connection not included




TRACK 48V SURFACE

TRACK 48V SURFACE 1m	A338-11-00-	N
TRACK 48V SURFACE 2m	A338-12-00-	N
TRACK 48V SURFACE 3m	A338-13-00-	N
TRACK 48V SURFACE Corner 90° One Plane	A338-14-00-	N




TRACK 48V SURFACE

Corner 90° One Plane



*Electrical connection not included




TRACK 48V SURFACE SHORT

TRACK 48V SURFACE SHORT 1m	A338-21-00-	N
TRACK 48V SURFACE SHORT 2m	A338-22-00-	N
TRACK 48V SURFACE SHORT 3m	A338-23-00-	N
TRACK 48V SURFACE SHORT Corner 90° One Plane	A338-24-00-	N



TRACK 48V SURFACE SHORT


Corner 90° One Plane



*Electrical connection not included

48V SYSTEM

TRACK 48V

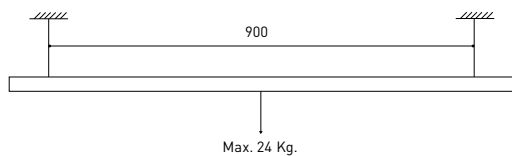


		P	V	D
CONSTANT VOLTAGE	0434-01-21	75W	48V	180 x 52 x 30mm
LED POWER SUPPLY	0434-01-22	150W	48V	240 x 60 x 49mm

DROP VOLTAGE TABLE

		CABLE LENGTH (m)			
		5	10	20	30
POWER (W)	CABLE SECTION (mm²)	TRACK LENGTH (m)			
75	0,75	50	50	30	X
	1,5	50	50	50	50
150	0,75	40	15	X	X
	1,5	50	40	20	X

COMPATIBILITY ACCORDING TO TYPE OF TRACK

TRACK 48V & TRACK 48V SURFACE SHORT

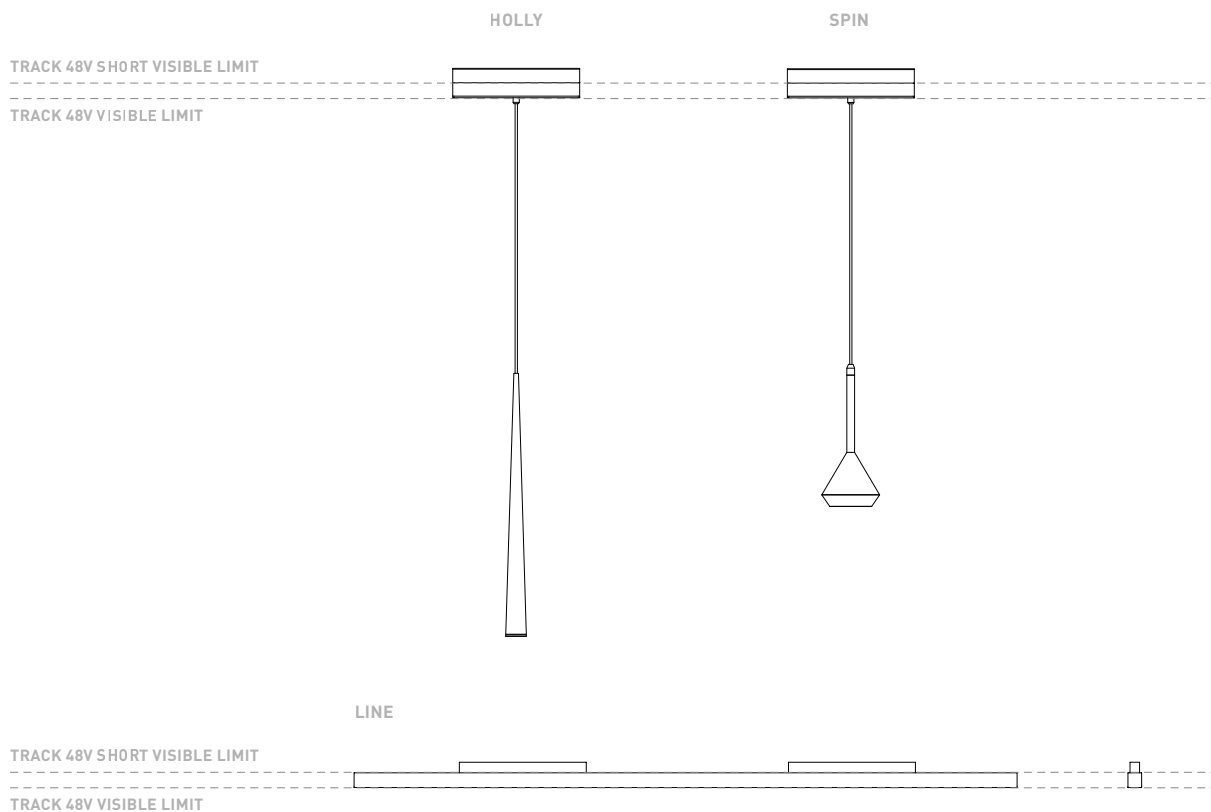


Order with *The 2019 Collection* codes. Products with one single version for both tracks

48V SYSTEM


TRACK 48V

ALL 48V TRACK




TRACK 48V Live-End Connector

A338-00-01- | N |




TRACK 48V Central Connector

A338-00-02- | N |



TRACK 48V Corner 90° Connector

A338-00-12- | N |



TRACK 48V Wireless Control

0434-01-31- | N | Casambi/AAG Stucchi App

0434-01-32- | N | AAG Stucchi App

TRIMLESS 48V



TRACK 48V TRIMLESS Short T-Bracket


A338-00-03



TRACK 48V Clamp for M6 ROD

A338-00-09

*See accessories quantities



TRACK 48V TRIMLESS Long T-Bracket


A338-00-04



TRACK 48V Track Clamp

A338-00-10

*See accessories quantities



TRACK 48V TRIMLESS Straight Joiners (2 units)


A338-00-05



TRACK 48V TRIMLESS Suspension Kit

A338-00-08

*See accessories quantities



TRACK 48V TRIMLESS Plaster Installation Guard 1m

A338-00-21


*** SUGGESTED MOUNTING ACCESSORIES QUANTITIES**

1000mm - 2 Pcs.

2000mm - 3 Pcs.

3000mm - 4 Pcs.

SURFACE, SUSPENSION , SURFACE SHORT & SUSPENSION SHORT 48V



TRACK 48V SURFACE Straight Joiner

A338-00-11- | N |

COLOUR | N ■ |

48V SYSTEM

TRACK 48V

TRIMLESS, SURFACE & SUSPENSION 48V



TRACK 48V TRIMLESS & SURFACE End

A338-00-06- | N |



TRACK 48V TRIMLESS & SURFACE End Feed

A338-00-07- | N |

SURFACE SHORT & SUSPENSION SHORT 48V



TRACK 48V SURFACE SHORT End


A338-00-18- | N |



TRACK 48V SURFACE SHORT End Feed

A338-00-19- | N |

SURFACE & SURFACE SHORT 48V




TRACK 48V Power Supply Case

A338-00-20- | N | 

*To be installed aside 48V Surface Tracks
Power supply not included

SUSPENSION & SUSPENSION SHORT 48V




TRACK 48V Wired Power Supply Case

A338-00-22- | N | 

A338-00-23- | N | 

*Power supply not included



TRACK 48V SURFACE Suspension Kit (2 units)

A338-00-15- | N |



TRACK 48V SURFACE Suspension Feed Kit

A338-00-16- | N | 


A338-00-17- | N | 

*For remote power supply


COLOUR | N ■ |



DIMENSIONS

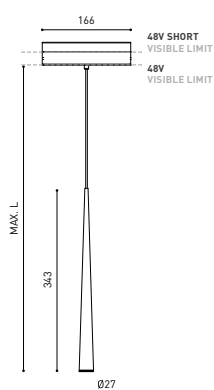

ACCESSORIES



CORD ACCESSORY

TRACK 48V OPTIONS

PRODUCT

Name	HOLLY 48V 2M 17° DIM DALI 3000K WT
Reference	A3490201WT
Color	Textured white
RAL	9016
Category	TRACKLIGHTS

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	210 Lm
Power	2,1 W
Power values of the system	2,21 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 3
Light beam angle	17°
Lighting efficiency	92%
Efficacy	100 Lm/W
Current intensity	700 mA
Dimming	DALI
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	III
Voltage	48 Vdc
Energy efficiency	A++
LED lifespan	L80B10 (Tj=85°C) >41.000h


OTHER DATA

Ingress Protection	IP20
Cord length	2 m
Fast adjustment tensioner	No
Track type	Track 48V
Weight	290 g.
Packaged weight	413 g.
Packaging dimensions	385 x 103 x 78 mm
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene




Holly 48V is a pendant luminaire for accent lighting applications. Its geometry, stylish and elegant with a body made out of solid mechanised aluminium, define a high quality perceived product with an exquisite look. In addition, Holly uses a special designed micro-reflector to optimize the output of the LED source, achieving a relatively high amount of light. Within its applications we can consider, bar-counters, beside tables, stairwells...

POLAR DIAGRAM

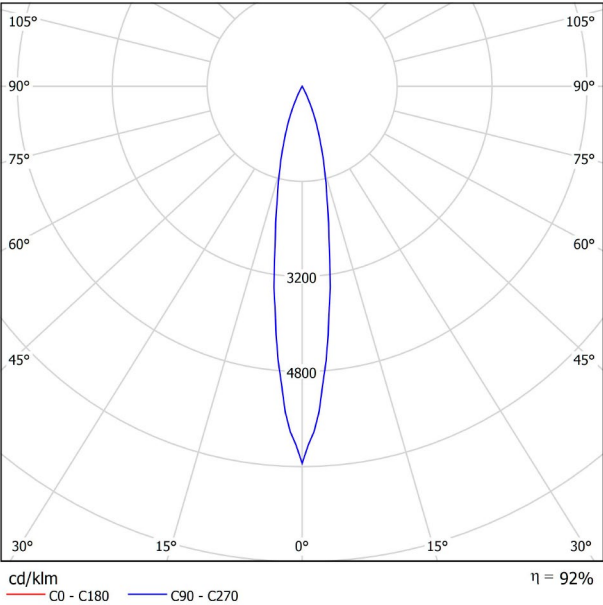



CONICAL DIAGRAM

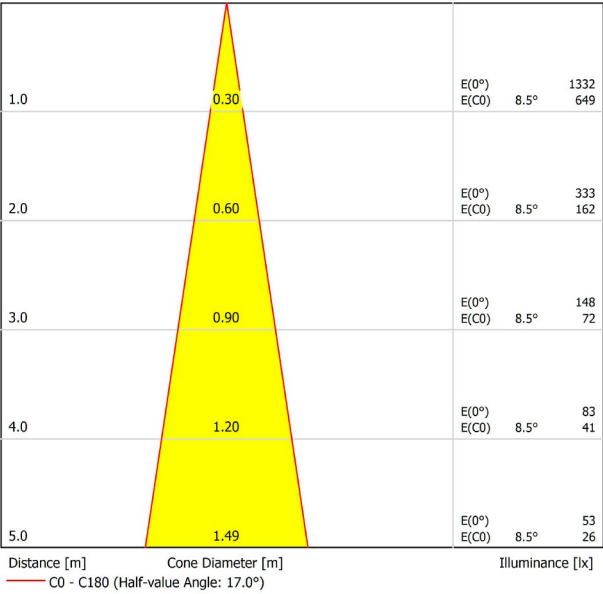




PRODUCT	
Model	Cord Accessory
Reference	02230000 WT NT
Colour	WT ☐ RAL 9016 NT ☒ RAL9005
Category	Accessories

DIMENSIONAL DRAWING

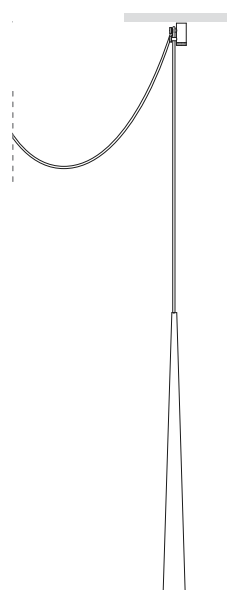

48V SYSTEM

TRACK 48V



TRACK 48V TRIMLESS


TRACK 48V TRIMLESS 1m	A338-01-00-	N
TRACK 48V TRIMLESS 2m	A338-02-00-	N
TRACK 48V TRIMLESS 3m	A338-03-00-	N
TRACK 48V TRIMLESS Corner 90° One Plane	A338-06-00-	N
TRACK 48V TRIMLESS Corner 90° Two Planes	A338-07-00-	N

RECOMMENDED FOR INSTALLATIONS WHERE THE PROFILE CAN BE INSTALLED BEFORE THE FALSE PLASTERBOARD CEILING (THICKNESS 12,5mm.)



TRACK 48V TRIMLESS


Corner 90° One Plane




*Electrical connection not included

TRACK 48V TRIMLESS

Corner 90° Two Planes



*Electrical connection not included




TRACK 48V SURFACE

TRACK 48V SURFACE 1m	A338-11-00-	N
TRACK 48V SURFACE 2m	A338-12-00-	N
TRACK 48V SURFACE 3m	A338-13-00-	N
TRACK 48V SURFACE Corner 90° One Plane	A338-14-00-	N




TRACK 48V SURFACE

Corner 90° One Plane



*Electrical connection not included




TRACK 48V SURFACE SHORT

TRACK 48V SURFACE SHORT 1m	A338-21-00-	N
TRACK 48V SURFACE SHORT 2m	A338-22-00-	N
TRACK 48V SURFACE SHORT 3m	A338-23-00-	N
TRACK 48V SURFACE SHORT Corner 90° One Plane	A338-24-00-	N



TRACK 48V SURFACE SHORT


Corner 90° One Plane



*Electrical connection not included

48V SYSTEM

TRACK 48V

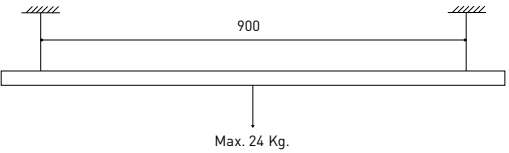


		P	V	D
CONSTANT VOLTAGE	0434-01-21	75W	48V	180 x 52 x 30mm
LED POWER SUPPLY	0434-01-22	150W	48V	240 x 60 x 49mm

DROP VOLTAGE TABLE

		CABLE LENGTH (m)			
		5	10	20	30
POWER (W)	CABLE SECTION (mm²)	TRACK LENGTH (m)			
75	0,75	50	50	30	X
	1,5	50	50	50	50
150	0,75	40	15	X	X
	1,5	50	40	20	X

COMPATIBILITY ACCORDING TO TYPE OF TRACK

TRACK 48V & TRACK 48V SURFACE SHORT

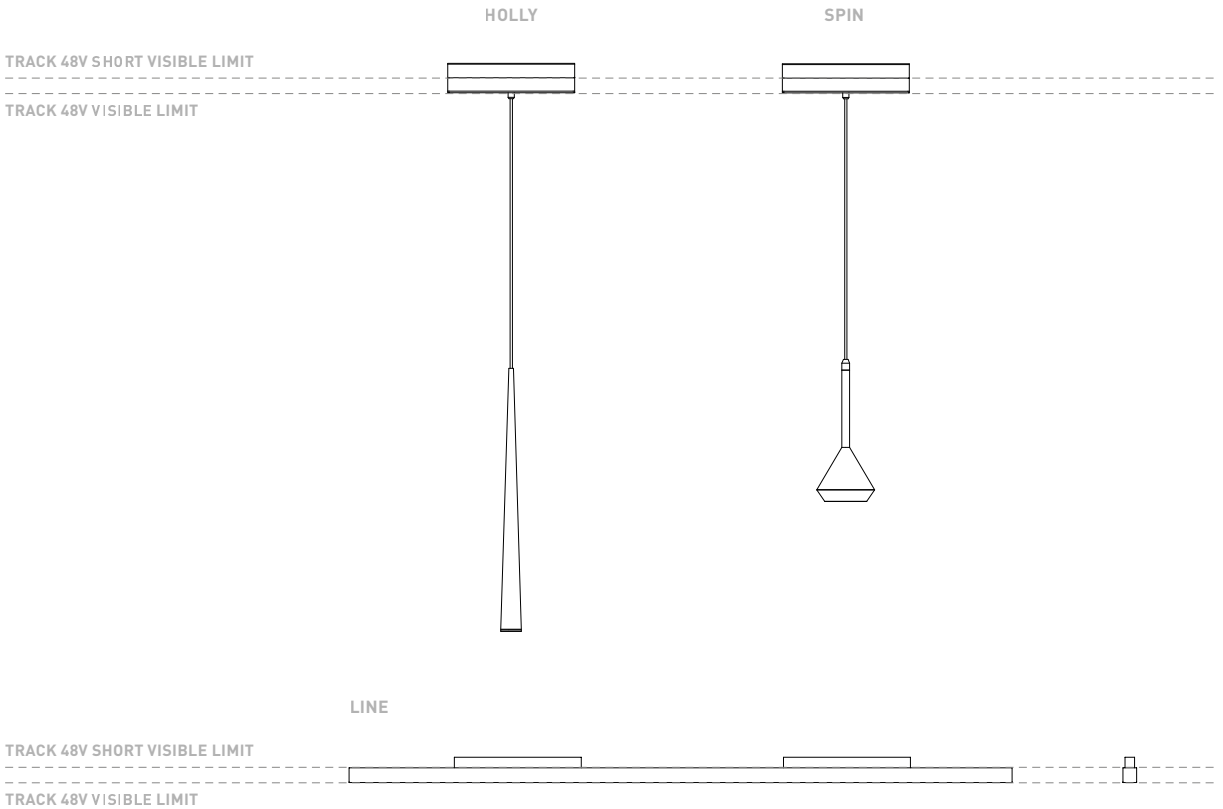


Order with *The 2019 Collection* codes. Products with one single version for both tracks

48V SYSTEM


TRACK 48V

ALL 48V TRACK




TRACK 48V Live-End Connector

A338-00-01- | N |




TRACK 48V Central Connector

A338-00-02- | N |



TRACK 48V Corner 90° Connector

A338-00-12- | N |



TRACK 48V Wireless Control

0434-01-31- | N | Casambi/AAG Stucchi App

0434-01-32- | N | AAG Stucchi App

TRIMLESS 48V



TRACK 48V TRIMLESS Short T-Bracket


A338-00-03



TRACK 48V Clamp for M6 ROD

A338-00-09

*See accessories quantities



TRACK 48V TRIMLESS Long T-Bracket


A338-00-04



TRACK 48V Track Clamp


A338-00-10

*See accessories quantities



TRACK 48V TRIMLESS Straight Joiners (2 units)


A338-00-05



TRACK 48V TRIMLESS Suspension Kit

A338-00-08

*See accessories quantities



TRACK 48V TRIMLESS Plaster Installation Guard 1m

A338-00-21


*** SUGGESTED MOUNTING ACCESSORIES QUANTITIES**

1000mm - 2 Pcs.

2000mm - 3 Pcs.

3000mm - 4 Pcs.

SURFACE, SUSPENSION , SURFACE SHORT & SUSPENSION SHORT 48V



TRACK 48V SURFACE Straight Joiner

A338-00-11- | N |

COLOUR | N ■ |

48V SYSTEM

TRACK 48V

TRIMLESS, SURFACE & SUSPENSION 48V



TRACK 48V TRIMLESS & SURFACE End

A338-00-06- | N |



TRACK 48V TRIMLESS & SURFACE End Feed

A338-00-07- | N |

SURFACE SHORT & SUSPENSION SHORT 48V



TRACK 48V SURFACE SHORT End


A338-00-18- | N |



TRACK 48V SURFACE SHORT End Feed

A338-00-19- | N |

SURFACE & SURFACE SHORT 48V




TRACK 48V Power Supply Case

A338-00-20- | N | 

*To be installed aside 48V Surface Tracks
Power supply not included

SUSPENSION & SUSPENSION SHORT 48V



TRACK 48V Wired Power Supply Case

A338-00-22- | N | 

A338-00-23- | N | 

*Power supply not included



TRACK 48V SURFACE Suspension Kit (2 units)

A338-00-15- | N |



TRACK 48V SURFACE Suspension Feed Kit

A338-00-16- | N | 


A338-00-17- | N | 

*For remote power supply


COLOUR | N ■ |



DIMENSIONS

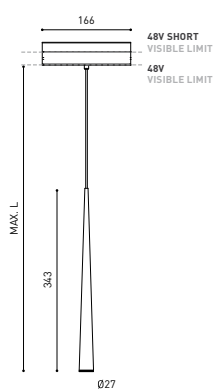

ACCESSORIES



PRODUCT

Name	HOLLY 48V 2M 35° DIM DALI 2700K MC
Reference	A3490210MC
Color	Metallized copper
RAL	Paint of metallic nanoparticles
Category	TRACKLIGHTS

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	190 Lm
Power	2,1 W
Power values of the system	2,21 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 3
Light beam angle	35°
Lighting efficiency	93%
Efficacy	90 Lm/W
Current intensity	700 mA
Dimming	DALI
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	III
Voltage	48 Vdc
Energy efficiency	A++
LED lifespan	L80B10 (Tj=85°C) >41.000h


OTHER DATA

Ingress Protection	IP20
Cord length	2 m
Fast adjustment tensioner	No
Track type	Track 48V
Weight	290 g.
Packaged weight	413 g.
Packaging dimensions	385 x 103 x 78 mm
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene




Holly 48V is a pendant luminary for accent lighting applications. Its geometry, stylish and elegant with a body made out of solid mechanised aluminium, define a high quality perceived product with an exquisite look. In addition, Holly uses a special designed micro-reflector to optimize the output of the LED source, achieving a relatively high amount of light. Within its applications we can consider, bar-counters, beside tables, stairwells...

POLAR DIAGRAM

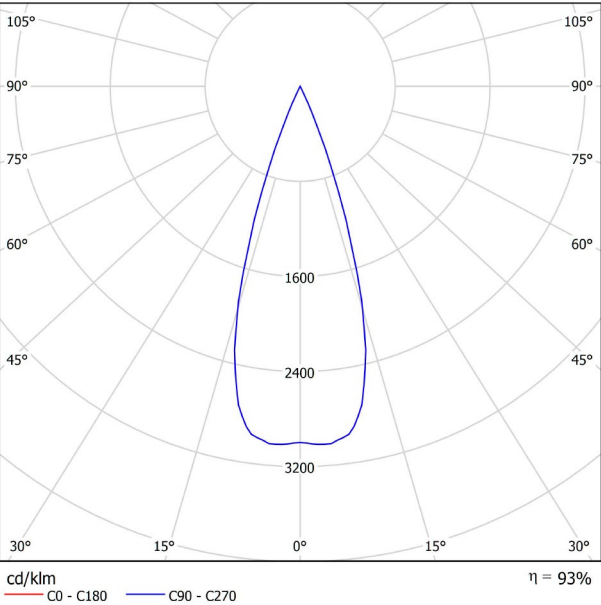



CONICAL DIAGRAM

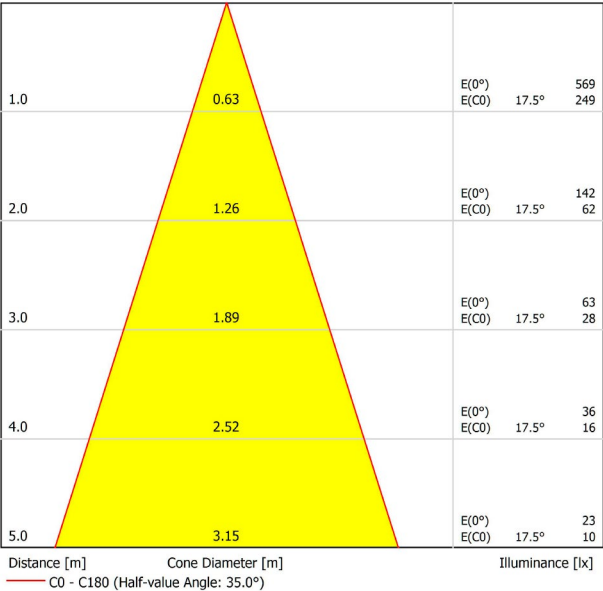




PRODUCT	
Model	Cord Accessory
Reference	02230000 WT NT
Colour	WT ☐ RAL 9016 NT ☒ RAL9005
Category	Accessories

DIMENSIONAL DRAWING

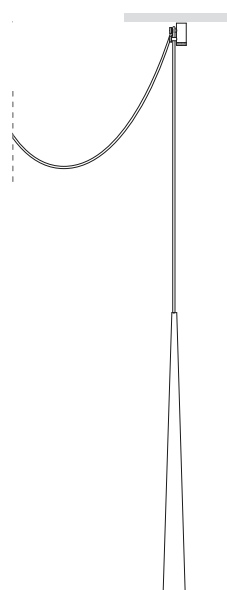

48V SYSTEM

TRACK 48V



TRACK 48V TRIMLESS


TRACK 48V TRIMLESS 1m	A338-01-00-	N
TRACK 48V TRIMLESS 2m	A338-02-00-	N
TRACK 48V TRIMLESS 3m	A338-03-00-	N
TRACK 48V TRIMLESS Corner 90° One Plane	A338-06-00-	N
TRACK 48V TRIMLESS Corner 90° Two Planes	A338-07-00-	N

RECOMMENDED FOR INSTALLATIONS WHERE THE PROFILE CAN BE INSTALLED BEFORE THE FALSE PLASTERBOARD CEILING (THICKNESS 12,5mm.)



TRACK 48V TRIMLESS


Corner 90° One Plane




*Electrical connection not included

TRACK 48V TRIMLESS

Corner 90° Two Planes



*Electrical connection not included




TRACK 48V SURFACE

TRACK 48V SURFACE 1m	A338-11-00-	N
TRACK 48V SURFACE 2m	A338-12-00-	N
TRACK 48V SURFACE 3m	A338-13-00-	N
TRACK 48V SURFACE Corner 90° One Plane	A338-14-00-	N




TRACK 48V SURFACE

Corner 90° One Plane



*Electrical connection not included




TRACK 48V SURFACE SHORT

TRACK 48V SURFACE SHORT 1m	A338-21-00-	N
TRACK 48V SURFACE SHORT 2m	A338-22-00-	N
TRACK 48V SURFACE SHORT 3m	A338-23-00-	N
TRACK 48V SURFACE SHORT Corner 90° One Plane	A338-24-00-	N



TRACK 48V SURFACE SHORT


Corner 90° One Plane



*Electrical connection not included

48V SYSTEM

TRACK 48V

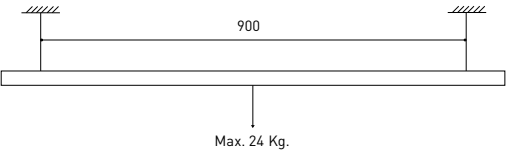


		P	V	D
CONSTANT VOLTAGE	0434-01-21	75W	48V	180 x 52 x 30mm
LED POWER SUPPLY	0434-01-22	150W	48V	240 x 60 x 49mm

DROP VOLTAGE TABLE

		CABLE LENGTH (m)			
		5	10	20	30
POWER (W)	CABLE SECTION (mm²)	TRACK LENGTH (m)			
75	0,75	50	50	30	X
	1,5	50	50	50	50
150	0,75	40	15	X	X
	1,5	50	40	20	X

COMPATIBILITY ACCORDING TO TYPE OF TRACK

TRACK 48V & TRACK 48V SURFACE SHORT

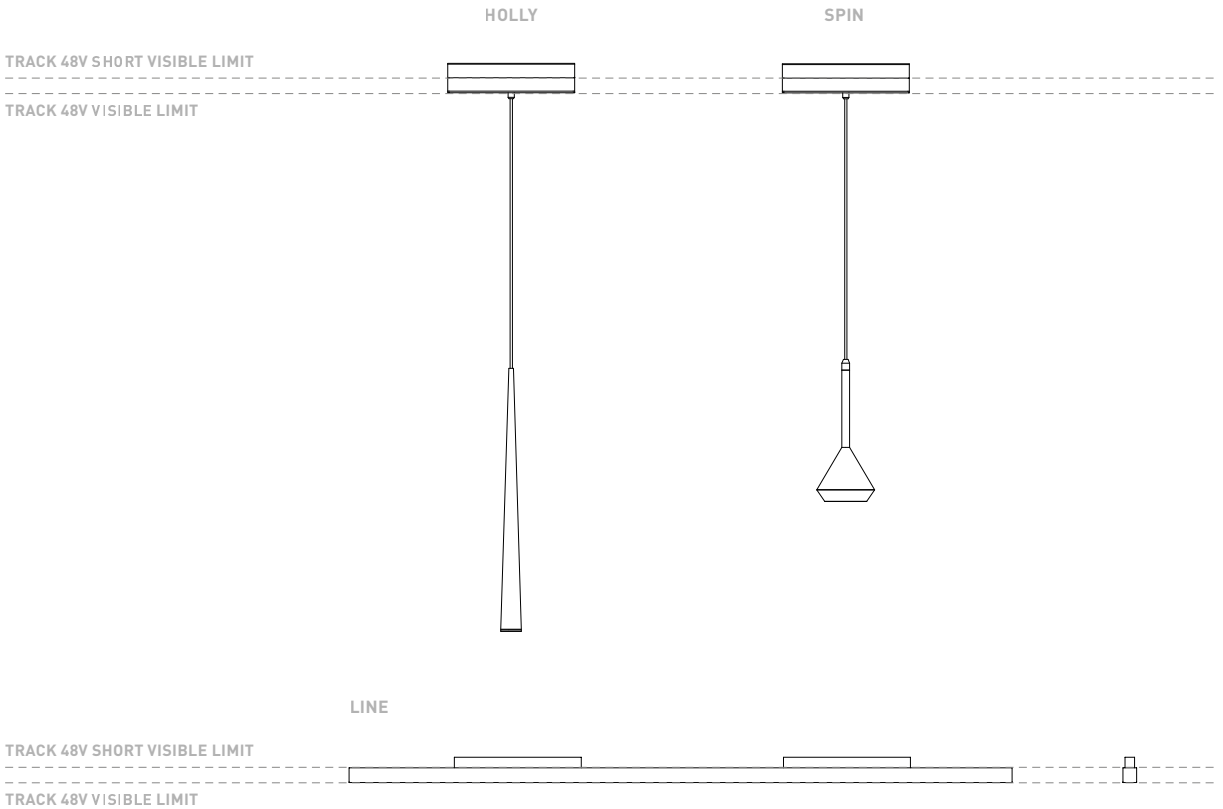


Order with *The 2019 Collection* codes. Products with one single version for both tracks

48V SYSTEM


TRACK 48V

ALL 48V TRACK




TRACK 48V Live-End Connector

A338-00-01- | N |




TRACK 48V Central Connector

A338-00-02- | N |



TRACK 48V Corner 90° Connector

A338-00-12- | N |



TRACK 48V Wireless Control

0434-01-31- | N | Casambi/AAG Stucchi App

0434-01-32- | N | AAG Stucchi App

TRIMLESS 48V



TRACK 48V TRIMLESS Short T-Bracket


A338-00-03



TRACK 48V Clamp for M6 ROD

A338-00-09

*See accessories quantities



TRACK 48V TRIMLESS Long T-Bracket


A338-00-04



TRACK 48V Track Clamp


A338-00-10

*See accessories quantities



TRACK 48V TRIMLESS Straight Joiners (2 units)


A338-00-05



TRACK 48V TRIMLESS Suspension Kit

A338-00-08

*See accessories quantities



TRACK 48V TRIMLESS Plaster Installation Guard 1m

A338-00-21


*** SUGGESTED MOUNTING ACCESSORIES QUANTITIES**

1000mm - 2 Pcs.

2000mm - 3 Pcs.

3000mm - 4 Pcs.

SURFACE, SUSPENSION , SURFACE SHORT & SUSPENSION SHORT 48V



TRACK 48V SURFACE Straight Joiner

A338-00-11- | N |

COLOUR | N ■ |

48V SYSTEM

TRACK 48V

TRIMLESS, SURFACE & SUSPENSION 48V



TRACK 48V TRIMLESS & SURFACE End

A338-00-06- | N |



TRACK 48V TRIMLESS & SURFACE End Feed

A338-00-07- | N |

SURFACE SHORT & SUSPENSION SHORT 48V



TRACK 48V SURFACE SHORT End


A338-00-18- | N |



TRACK 48V SURFACE SHORT End Feed

A338-00-19- | N |

SURFACE & SURFACE SHORT 48V




TRACK 48V Power Supply Case

A338-00-20- | N | 

*To be installed aside 48V Surface Tracks
Power supply not included

SUSPENSION & SUSPENSION SHORT 48V



TRACK 48V Wired Power Supply Case

A338-00-22- | N | 

A338-00-23- | N | 

*Power supply not included



TRACK 48V SURFACE Suspension Kit (2 units)

A338-00-15- | N |



TRACK 48V SURFACE Suspension Feed Kit

A338-00-16- | N | 

A338-00-17- | N | 

*For remote power supply

COLOUR | N ■ |