




DIMENSIONS



AWARDS

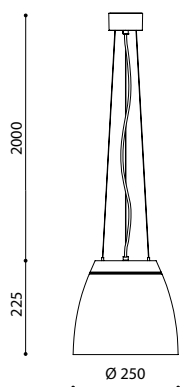

Name	SALT MINI 2700K NG
Reference	A2800010NG
Color	Black-Gold
RAL	9005 & 1036
Category	SUSPENSION

PRODUCT

Light source	LED
Gross luminous flux	1300 Lm
Power	10 W
Power values of the system	13,33 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	Mac Adam Step 2
Light beam angle	80°
Lighting efficiency	67%
Efficacy	130 Lm/W
Current intensity	700 mA
Dimming	Phase Cut
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=80°C) >60.000h

LIGHTING INFORMATION


Ingress Protection	IP20
Cord length	2 m
Fast adjustment tensioner	Yes
Weight	1920 g.
Packaged weight	2437 g.
Packaging dimensions	289 × 289 × 290 mm.
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate

OTHER DATA




High Bay light fitting performance combined with the design of a unique decorative piece. Salt integrates driver and heat dissipation into the design of the fitting itself and achieves on the one hand an excellent thermal management and on the other hand the freedom to hang the fixture at any desired height. And to prevent glare, Salt disposes of a diffuser covering the light source.

POLAR DIAGRAM

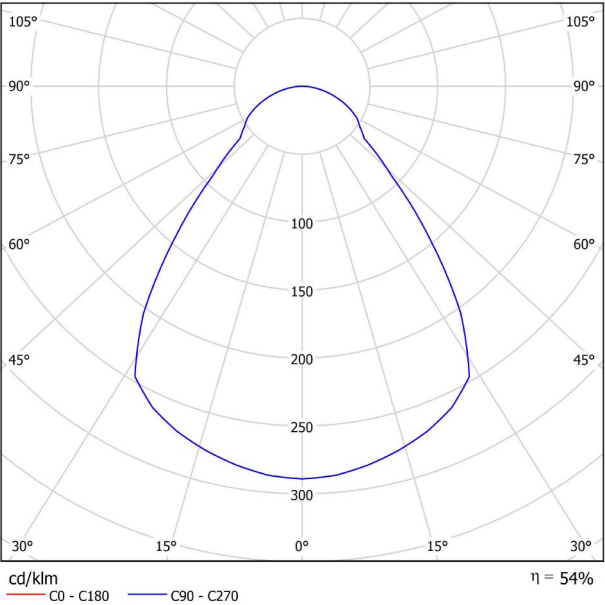


CONICAL DIAGRAM

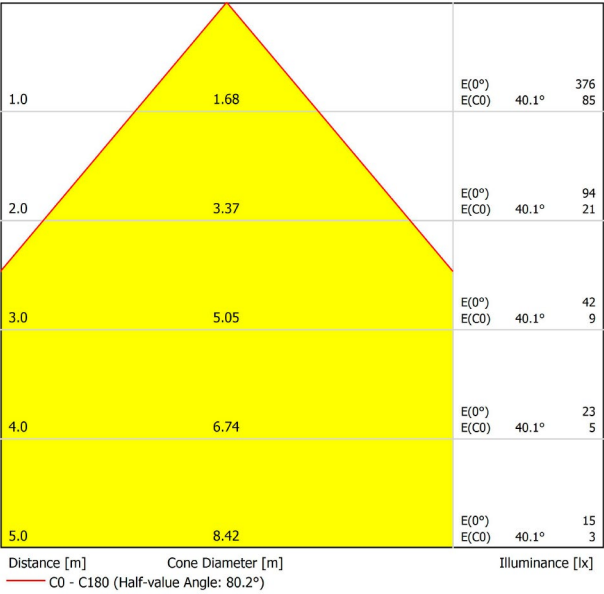



DIMENSIONS

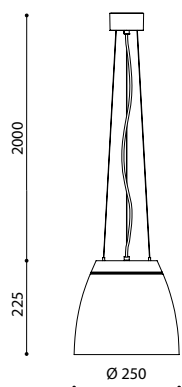

AWARDS



PRODUCT

Name	SALT MINI 2700K NR
Reference	A2800010NR
Color	Black-Red
RAL	9005 & 2004
Category	SUSPENSION

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	1300 Lm
Power	10 W
Power values of the system	13,33 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	Mac Adam Step 2
Light beam angle	80°
Lighting efficiency	67%
Efficacy	130 Lm/W
Current intensity	700 mA
Dimming	Phase Cut
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=80°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Cord length	2 m
Fast adjustment tensioner	Yes
Weight	1920 g.
Packaged weight	2437 g.
Packaging dimensions	289 × 289 × 290 mm.
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




High Bay light fitting performance combined with the design of a unique decorative piece. Salt integrates driver and heat dissipation into the design of the fitting itself and achieves on the one hand an excellent thermal management and on the other hand the freedom to hang the fixture at any desired height. And to prevent glare, Salt disposes of a diffuser covering the light source.

POLAR DIAGRAM

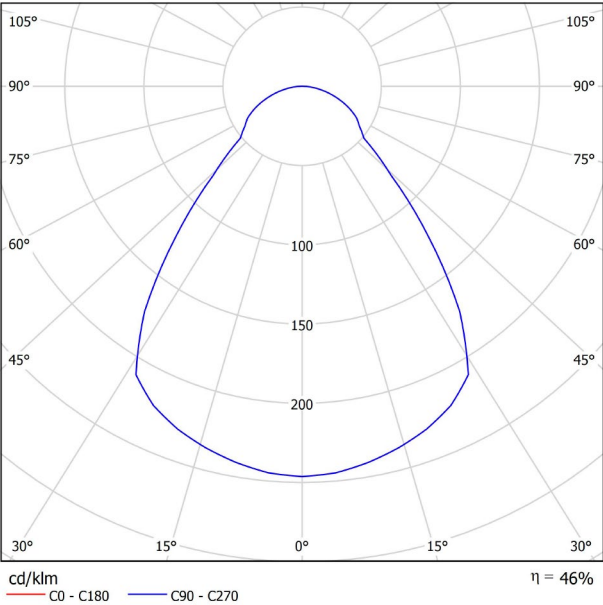


CONICAL DIAGRAM

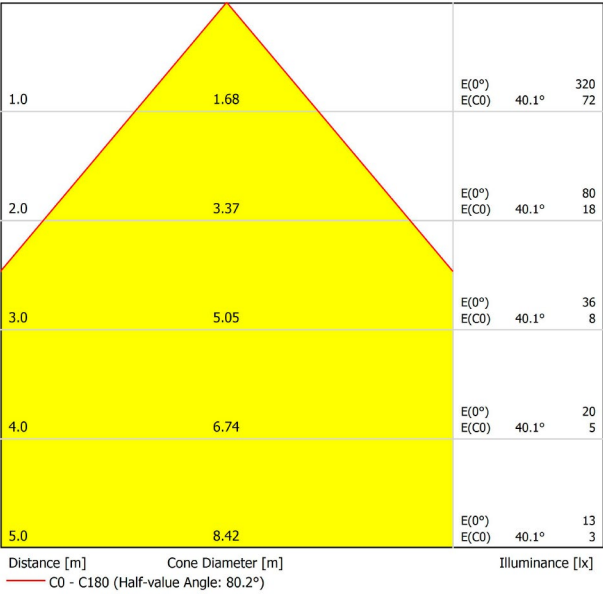



DIMENSIONS

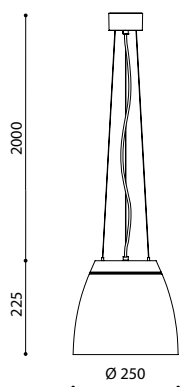

AWARDS



Name	SALT MINI 2700K NW
Reference	A2800010NW
Color	Black-White
RAL	9005 & 9016
Category	SUSPENSION

PRODUCT

SALT MINI 2700K NW

A2800010NW

Black-White

9005 & 9016

SUSPENSION

Light source	LED
Gross luminous flux	1300 Lm
Power	10 W
Power values of the system	13,33 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	Mac Adam Step 2
Light beam angle	80°
Lighting efficiency	67%
Efficacy	130 Lm/W
Current intensity	700 mA
Dimming	Phase Cut
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=80°C) >60.000h

LIGHTING INFORMATION

LED

1300 Lm

10 W

13,33 W

2700 K

CRI>90

Mac Adam Step 2

80°

67%

130 Lm/W

700 mA

Phase Cut

Please Consult

Included

☐

220 V/240 V

50/60 Hz

A+

L80B10 (Tc=80°C) >60.000h

Ingress Protection	IP20
Cord length	2 m
Fast adjustment tensioner	Yes
Weight	1920 g.
Packaged weight	2437 g.
Packaging dimensions	289 × 289 × 290 mm.
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate

OTHER DATA

IP20

2 m

Yes

1920 g.

2437 g.

289 × 289 × 290 mm.


1

Aluminium / Polymethyl Methacrylate




High Bay light fitting performance combined with the design of a unique decorative piece. Salt integrates driver and heat dissipation into the design of the fitting itself and achieves on the one hand an excellent thermal management and on the other hand the freedom to hang the fixture at any desired height. And to prevent glare, Salt disposes of a diffuser covering the light source.

POLAR DIAGRAM

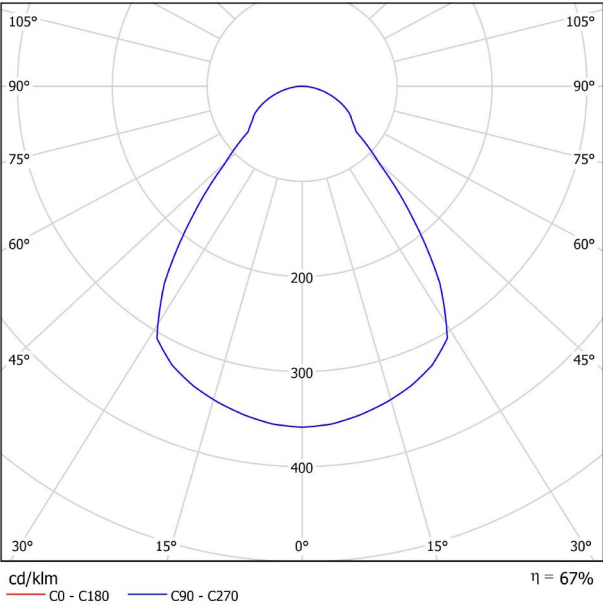


CONICAL DIAGRAM

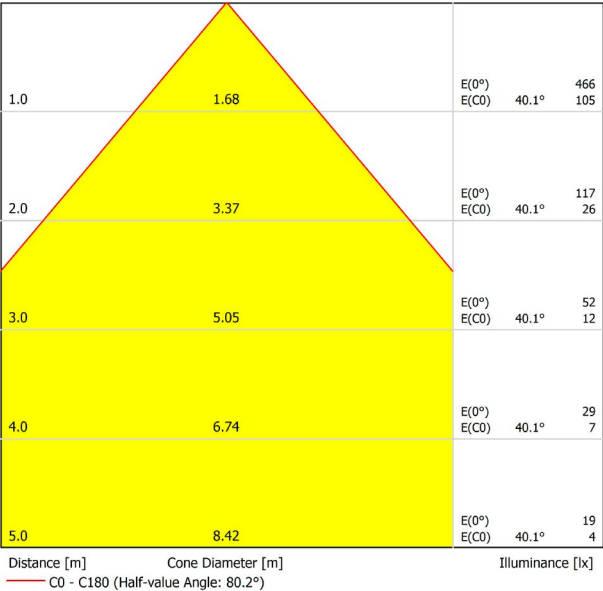



DIMENSIONS

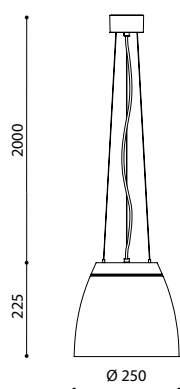

AWARDS



Name	SALT MINI 2700K WG
Reference	A2800010WG
Color	White-Gold
RAL	9016 & 1036
Category	SUSPENSION

PRODUCT

Light source	LED
Gross luminous flux	1300 Lm
Power	10 W
Power values of the system	13,33 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	Mac Adam Step 2
Light beam angle	80°
Lighting efficiency	67%
Efficacy	130 Lm/W
Current intensity	700 mA
Dimming	Phase Cut
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=80°C) >60.000h

LIGHTING INFORMATION


Ingress Protection	IP20
Cord length	2 m
Fast adjustment tensioner	Yes
Weight	1920 g.
Packaged weight	2437 g.
Packaging dimensions	289 × 289 × 290 mm.
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate

OTHER DATA




High Bay light fitting performance combined with the design of a unique decorative piece. Salt integrates driver and heat dissipation into the design of the fitting itself and achieves on the one hand an excellent thermal management and on the other hand the freedom to hang the fixture at any desired height. And to prevent glare, Salt disposes of a diffuser covering the light source.

POLAR DIAGRAM

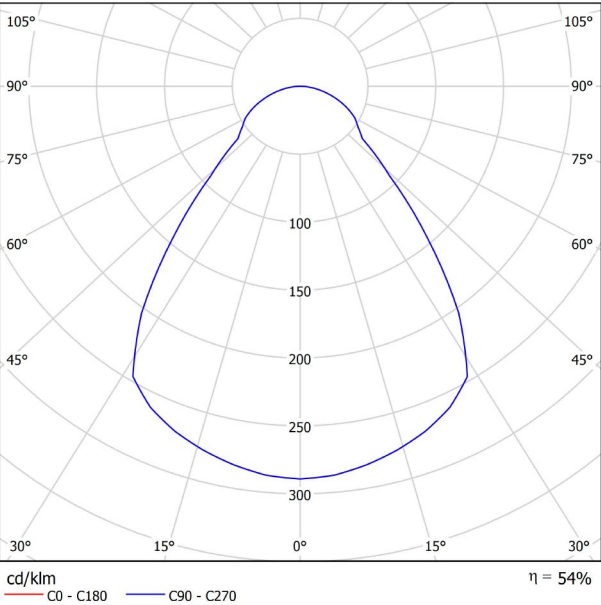


CONICAL DIAGRAM

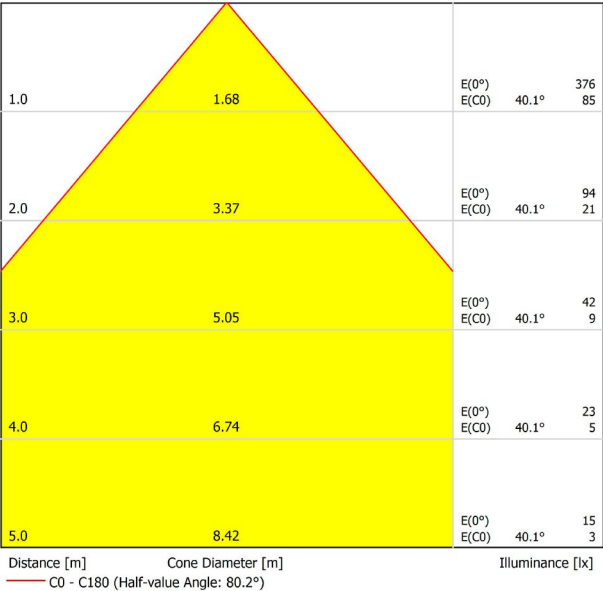



DIMENSIONS

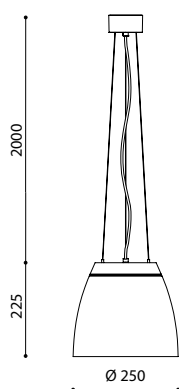

AWARDS



Name	SALT MINI 2700K WR
Reference	A2800010WR
Color	White-Red
RAL	9016 & 2004
Category	SUSPENSION

PRODUCT

Light source	LED
Gross luminous flux	1300 Lm
Power	10 W
Power values of the system	13,33 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	Mac Adam Step 2
Light beam angle	80°
Lighting efficiency	67%
Efficacy	130 Lm/W
Current intensity	700 mA
Dimming	Phase Cut
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=80°C) >60.000h

LIGHTING INFORMATION


Ingress Protection	IP20
Cord length	2 m
Fast adjustment tensioner	Yes
Weight	1920 g.
Packaged weight	2437 g.
Packaging dimensions	289 × 289 × 290 mm.
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate

OTHER DATA




High Bay light fitting performance combined with the design of a unique decorative piece. Salt integrates driver and heat dissipation into the design of the fitting itself and achieves on the one hand an excellent thermal management and on the other hand the freedom to hang the fixture at any desired height. And to prevent glare, Salt disposes of a diffuser covering the light source.

POLAR DIAGRAM

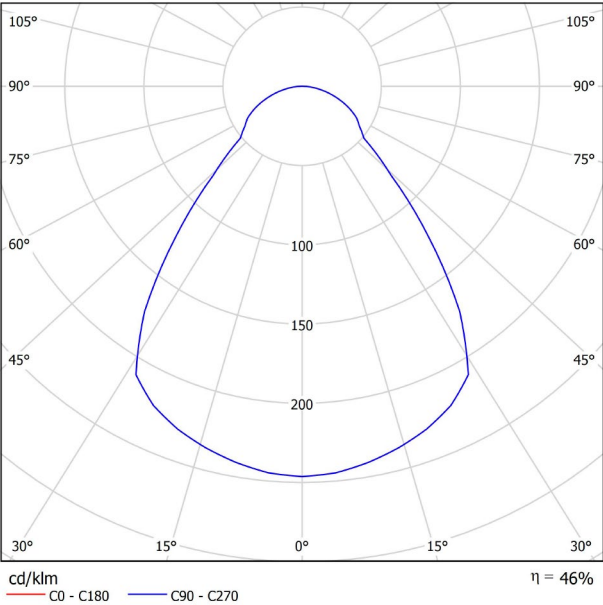


CONICAL DIAGRAM

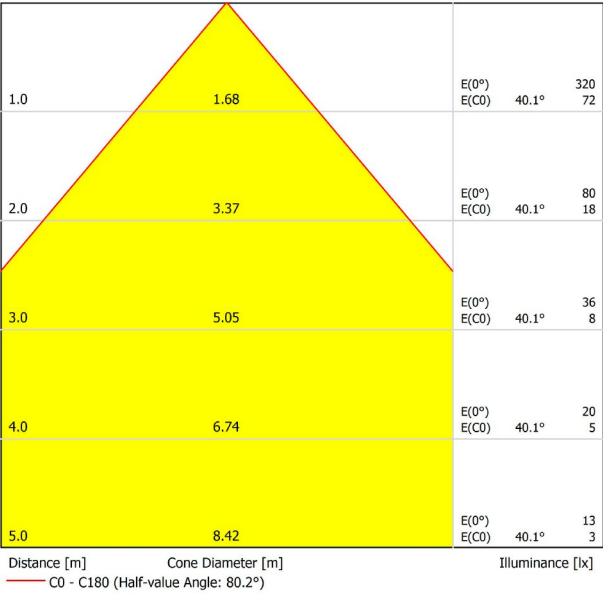



DIMENSIONS

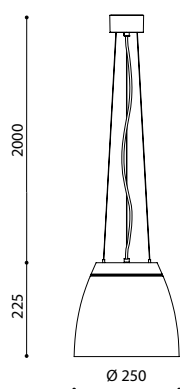

AWARDS



Name	SALT MINI 2700K WW
Reference	A2800010WW
Color	White-White
RAL	9016 & 9016
Category	SUSPENSION

PRODUCT

Light source	LED
Gross luminous flux	1300 Lm
Power	10 W
Power values of the system	13,33 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	Mac Adam Step 2
Light beam angle	80°
Lighting efficiency	67%
Efficacy	130 Lm/W
Current intensity	700 mA
Dimming	Phase Cut
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=80°C) >60.000h

LIGHTING INFORMATION


Ingress Protection	IP20
Cord length	2 m
Fast adjustment tensioner	Yes
Weight	1920 g.
Packaged weight	2437 g.
Packaging dimensions	289 × 289 × 290 mm.
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate

OTHER DATA




High Bay light fitting performance combined with the design of a unique decorative piece. Salt integrates driver and heat dissipation into the design of the fitting itself and achieves on the one hand an excellent thermal management and on the other hand the freedom to hang the fixture at any desired height. And to prevent glare, Salt disposes of a diffuser covering the light source.

POLAR DIAGRAM

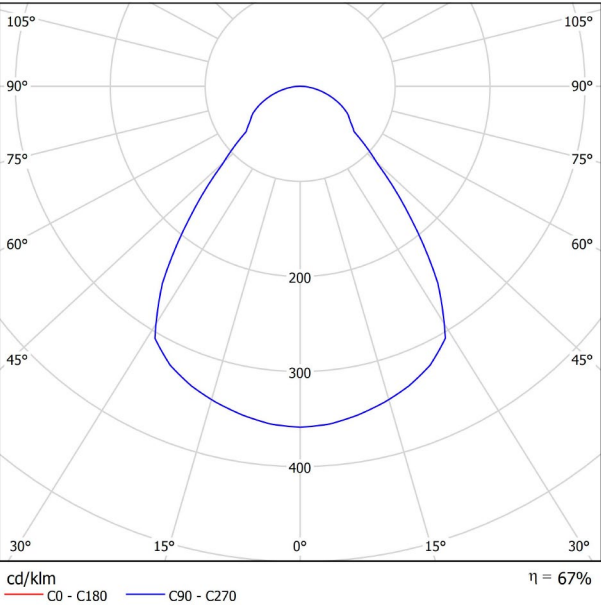


CONICAL DIAGRAM

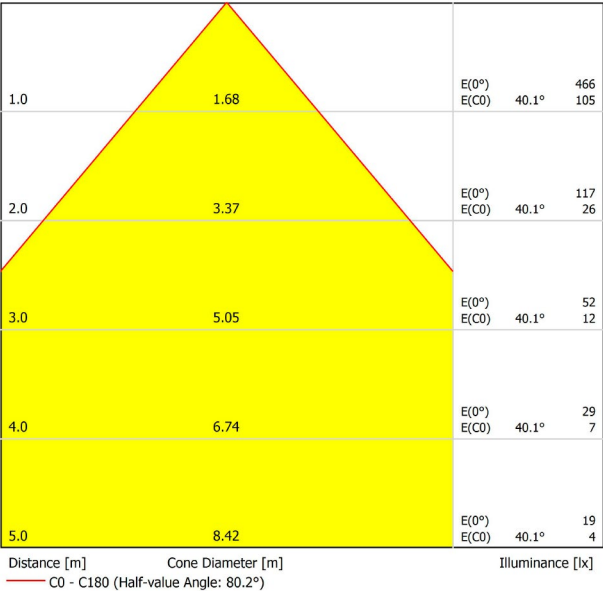



DIMENSIONS

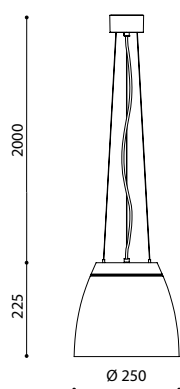

AWARDS



Name	SALT MINI 3000K NG
Reference	A2800011NG
Color	Black-Gold
RAL	9005 & 1036
Category	SUSPENSION

PRODUCT

Light source	LED
Gross luminous flux	1400 Lm
Power	10 W
Power values of the system	13,33 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	Mac Adam Step 2
Light beam angle	80°
Lighting efficiency	67%
Efficacy	140 Lm/W
Current intensity	700 mA
Dimming	Phase Cut
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A
LED lifespan	L80B10 (Tc=80°C) >60.000h

LIGHTING INFORMATION


Ingress Protection	IP20
Cord length	2 m
Fast adjustment tensioner	Yes
Weight	1920 g.
Packaged weight	2437 g.
Packaging dimensions	289 × 289 × 290 mm.
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate

OTHER DATA




High Bay light fitting performance combined with the design of a unique decorative piece. Salt integrates driver and heat dissipation into the design of the fitting itself and achieves on the one hand an excellent thermal management and on the other hand the freedom to hang the fixture at any desired height. And to prevent glare, Salt disposes of a diffuser covering the light source.

POLAR DIAGRAM

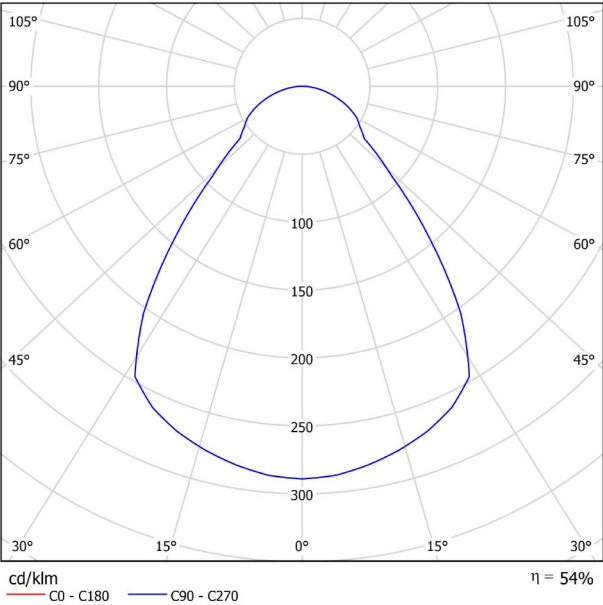


CONICAL DIAGRAM

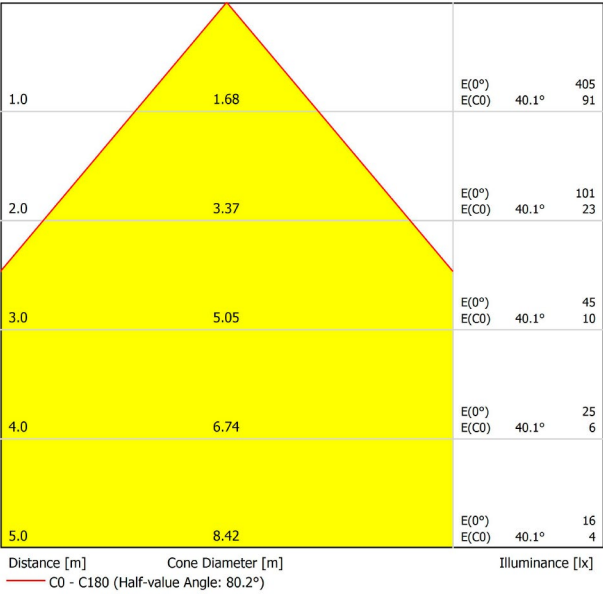



DIMENSIONS

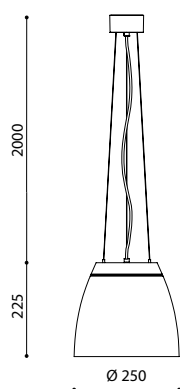

AWARDS



Name	SALT MINI 3000K NR
Reference	A2800011NR
Color	Black-Red
RAL	9005 & 2004
Category	SUSPENSION

PRODUCT

Light source	LED
Gross luminous flux	1400 Lm
Power	10 W
Power values of the system	13,33 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	Mac Adam Step 2
Light beam angle	80°
Lighting efficiency	67%
Efficacy	140 Lm/W
Current intensity	700 mA
Dimming	Phase Cut
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A
LED lifespan	L80B10 (Tc=80°C) >60.000h

LIGHTING INFORMATION


Ingress Protection	IP20
Cord length	2 m
Fast adjustment tensioner	Yes
Weight	1920 g.
Packaged weight	2437 g.
Packaging dimensions	289 × 289 × 290 mm.
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate

OTHER DATA




High Bay light fitting performance combined with the design of a unique decorative piece. Salt integrates driver and heat dissipation into the design of the fitting itself and achieves on the one hand an excellent thermal management and on the other hand the freedom to hang the fixture at any desired height. And to prevent glare, Salt disposes of a diffuser covering the light source.

POLAR DIAGRAM

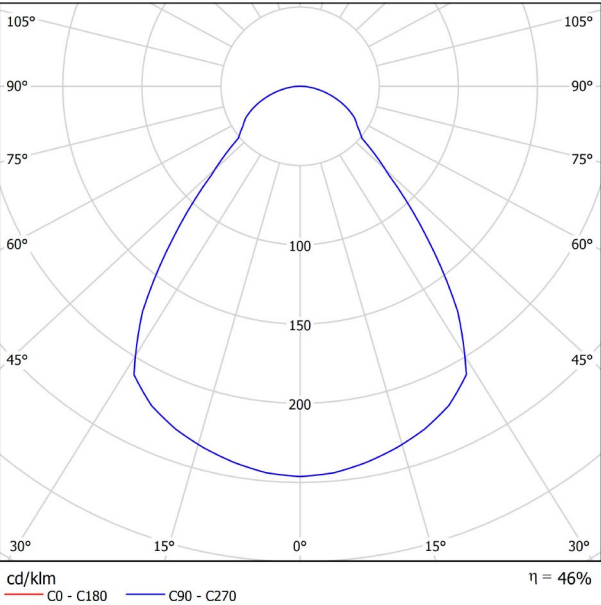


CONICAL DIAGRAM

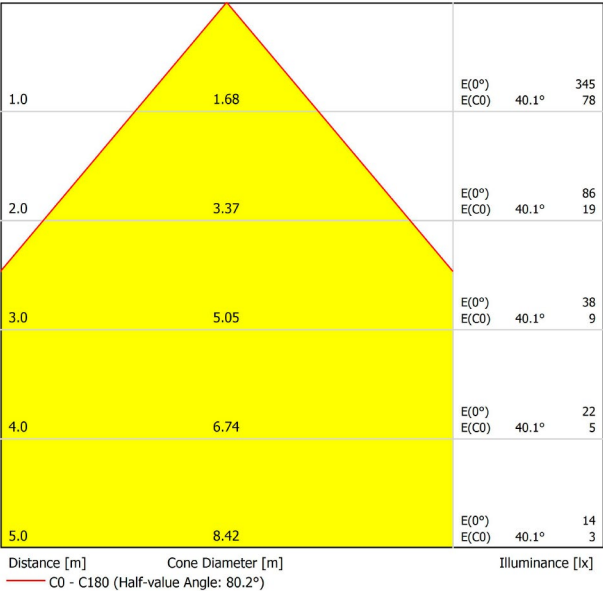



DIMENSIONS

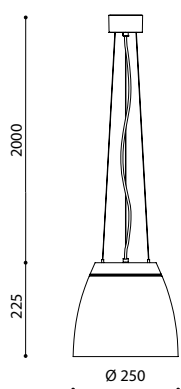

AWARDS



Name	SALT MINI 3000K NW
Reference	A2800011NW
Color	Black-White
RAL	9005 & 9016
Category	SUSPENSION

PRODUCT

SALT MINI 3000K NW

A2800011NW

Black-White

9005 & 9016

SUSPENSION

Light source	LED
Gross luminous flux	1400 Lm
Power	10 W
Power values of the system	13,33 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	Mac Adam Step 2
Light beam angle	80°
Lighting efficiency	67%
Efficacy	140 Lm/W
Current intensity	700 mA
Dimming	Phase Cut
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A
LED lifespan	L80B10 (Tc=80°C) >60.000h

LIGHTING INFORMATION

LED

1400 Lm

10 W

13,33 W

3000 K

CRI>90

Mac Adam Step 2

80°

67%

140 Lm/W

700 mA

Phase Cut

Please Consult

Included

☐

220 V/240 V

50/60 Hz

A

L80B10 (Tc=80°C) >60.000h

Ingress Protection	IP20
Cord length	2 m
Fast adjustment tensioner	Yes
Weight	1920 g.
Packaged weight	2437 g.
Packaging dimensions	289 × 289 × 290 mm.
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate

OTHER DATA

IP20

2 m

Yes

1920 g.

2437 g.

289 × 289 × 290 mm.


1

Aluminium / Polymethyl Methacrylate




High Bay light fitting performance combined with the design of a unique decorative piece. Salt integrates driver and heat dissipation into the design of the fitting itself and achieves on the one hand an excellent thermal management and on the other hand the freedom to hang the fixture at any desired height. And to prevent glare, Salt disposes of a diffuser covering the light source.

POLAR DIAGRAM

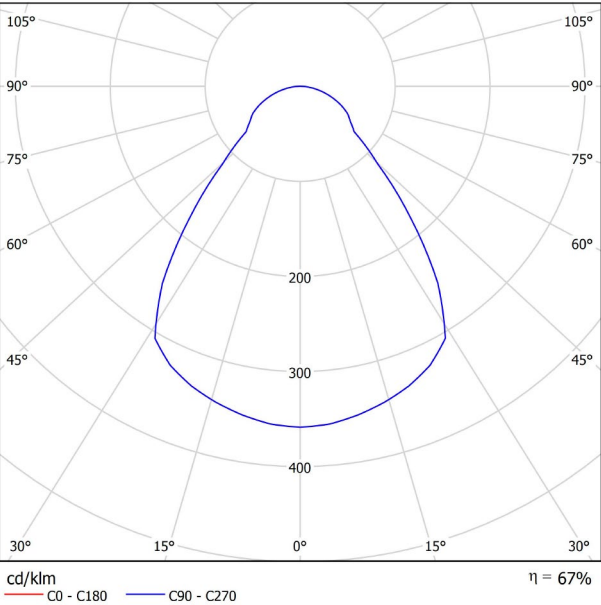


CONICAL DIAGRAM

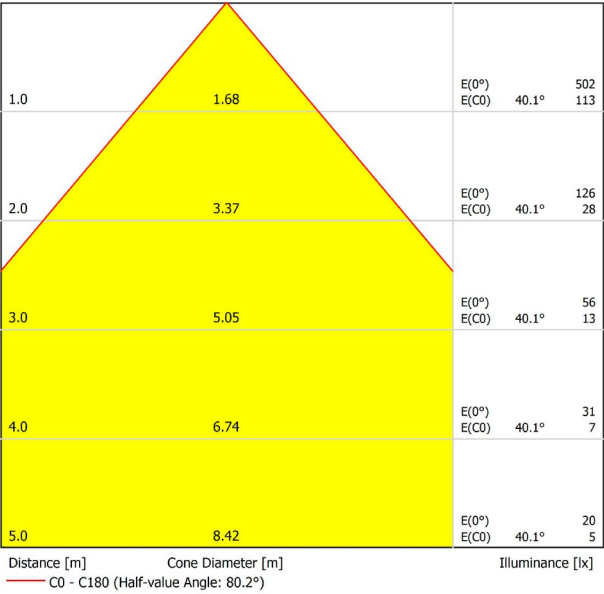



DIMENSIONS

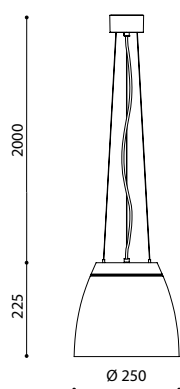

AWARDS



PRODUCT

Name	SALT MINI 3000K WG
Reference	A2800011WG
Color	White-Gold
RAL	9016 & 1036
Category	SUSPENSION

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	1400 Lm
Power	10 W
Power values of the system	13,33 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	Mac Adam Step 2
Light beam angle	80°
Lighting efficiency	67%
Efficacy	140 Lm/W
Current intensity	700 mA
Dimming	Phase Cut
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A
LED lifespan	L80B10 (Tc=80°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Cord length	2 m
Fast adjustment tensioner	Yes
Weight	1920 g.
Packaged weight	2437 g.
Packaging dimensions	289 × 289 × 290 mm.
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




High Bay light fitting performance combined with the design of a unique decorative piece. Salt integrates driver and heat dissipation into the design of the fitting itself and achieves on the one hand an excellent thermal management and on the other hand the freedom to hang the fixture at any desired height. And to prevent glare, Salt disposes of a diffuser covering the light source.

POLAR DIAGRAM

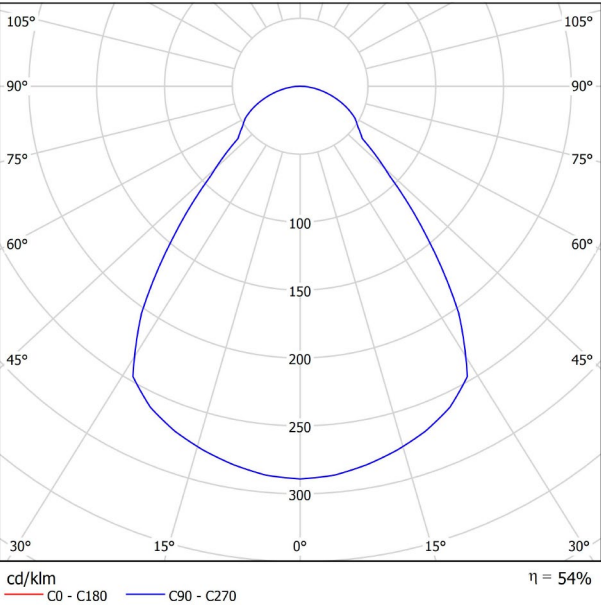


CONICAL DIAGRAM

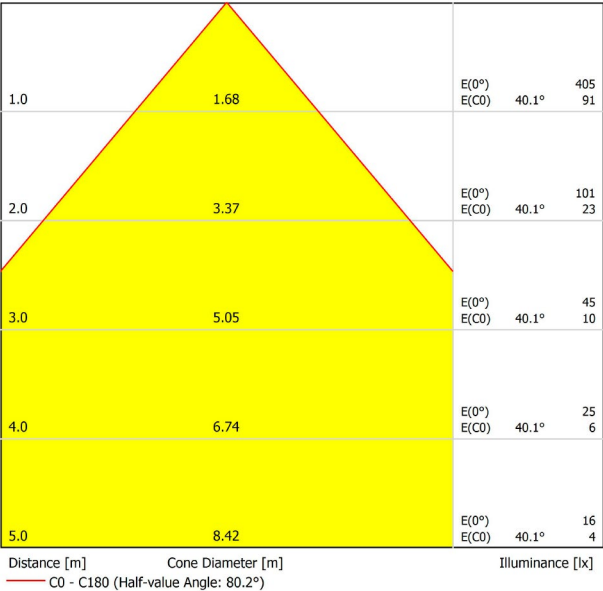



DIMENSIONS

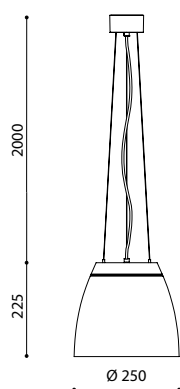

AWARDS



PRODUCT

Name	SALT MINI 3000K WR
Reference	A2800011WR
Color	White-Red
RAL	9016 & 2004
Category	SUSPENSION

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	1400 Lm
Power	10 W
Power values of the system	13,33 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	Mac Adam Step 2
Light beam angle	80°
Lighting efficiency	67%
Efficacy	140 Lm/W
Current intensity	700 mA
Dimming	Phase Cut
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A
LED lifespan	L80B10 (Tc=80°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Cord length	2 m
Fast adjustment tensioner	Yes
Weight	1920 g.
Packaged weight	2437 g.
Packaging dimensions	289 × 289 × 290 mm.
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




High Bay light fitting performance combined with the design of a unique decorative piece. Salt integrates driver and heat dissipation into the design of the fitting itself and achieves on the one hand an excellent thermal management and on the other hand the freedom to hang the fixture at any desired height. And to prevent glare, Salt disposes of a diffuser covering the light source.

POLAR DIAGRAM

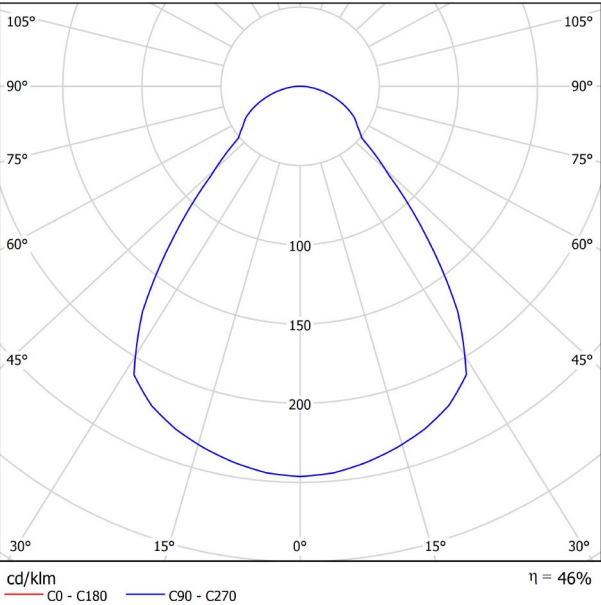


CONICAL DIAGRAM

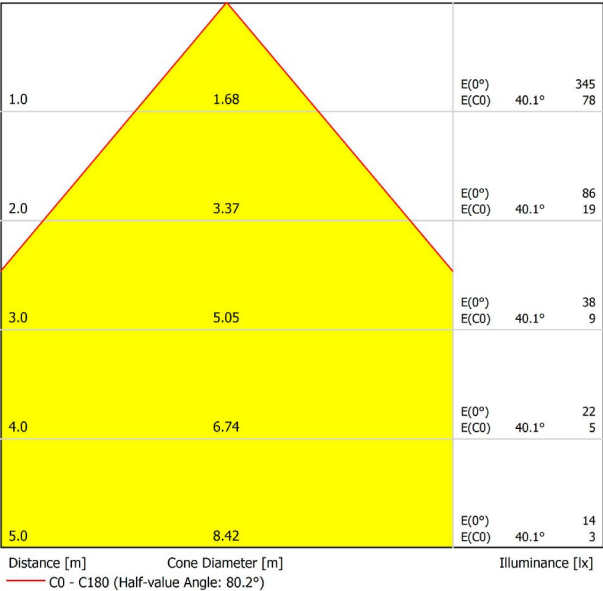



DIMENSIONS

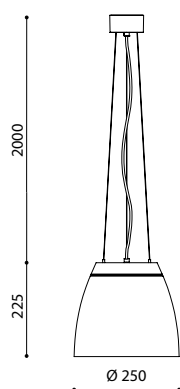

AWARDS



PRODUCT

Name	SALT MINI 3000K WW
Reference	A2800011WW
Color	White-White
RAL	9016 & 9016
Category	SUSPENSION

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	1400 Lm
Power	10 W
Power values of the system	13,33 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	Mac Adam Step 2
Light beam angle	80°
Lighting efficiency	67%
Efficacy	140 Lm/W
Current intensity	700 mA
Dimming	Phase Cut
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A
LED lifespan	L80B10 (Tc=80°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Cord length	2 m
Fast adjustment tensioner	Yes
Weight	1920 g.
Packaged weight	2437 g.
Packaging dimensions	289 × 289 × 290 mm.
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




High Bay light fitting performance combined with the design of a unique decorative piece. Salt integrates driver and heat dissipation into the design of the fitting itself and achieves on the one hand an excellent thermal management and on the other hand the freedom to hang the fixture at any desired height. And to prevent glare, Salt disposes of a diffuser covering the light source.

POLAR DIAGRAM

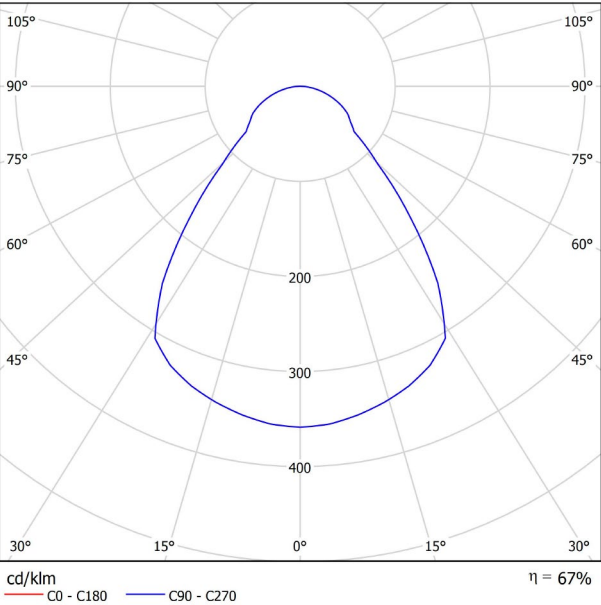


CONICAL DIAGRAM

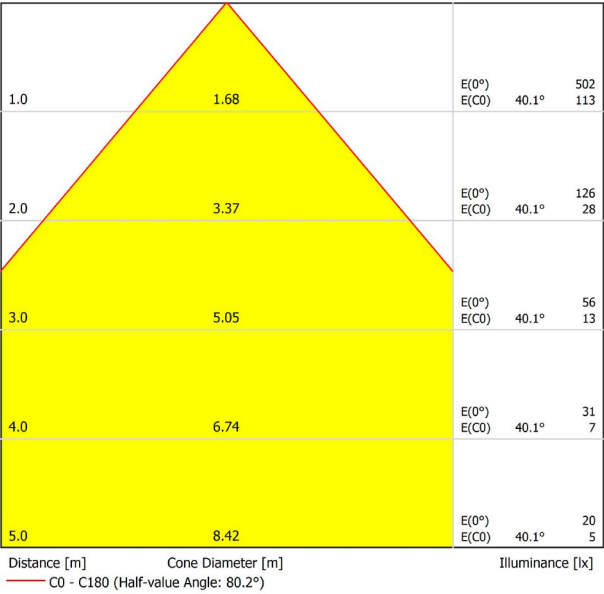



DIMENSIONS

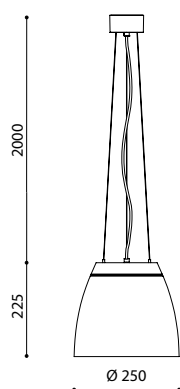

AWARDS



PRODUCT

Name	SALT MINI 4000K NG
Reference	A2800012NG
Color	Black-Gold
RAL	9005 & 1036
Category	SUSPENSION

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	1425 Lm
Power	10 W
Power values of the system	13,33 W
Colour temperature	4000 K
Colour Rendering Index	CRI>90
Chromatic stability	Mac Adam Step 2
Light beam angle	80°
Lighting efficiency	67%
Efficacy	143 Lm/W
Current intensity	700 mA
Dimming	Phase Cut
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A
LED lifespan	L80B10 (Tc=80°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Cord length	2 m
Fast adjustment tensioner	Yes
Weight	1920 g.
Packaged weight	2437 g.
Packaging dimensions	289 × 289 × 290 mm.
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




High Bay light fitting performance combined with the design of a unique decorative piece. Salt integrates driver and heat dissipation into the design of the fitting itself and achieves on the one hand an excellent thermal management and on the other hand the freedom to hang the fixture at any desired height. And to prevent glare, Salt disposes of a diffuser covering the light source.

POLAR DIAGRAM

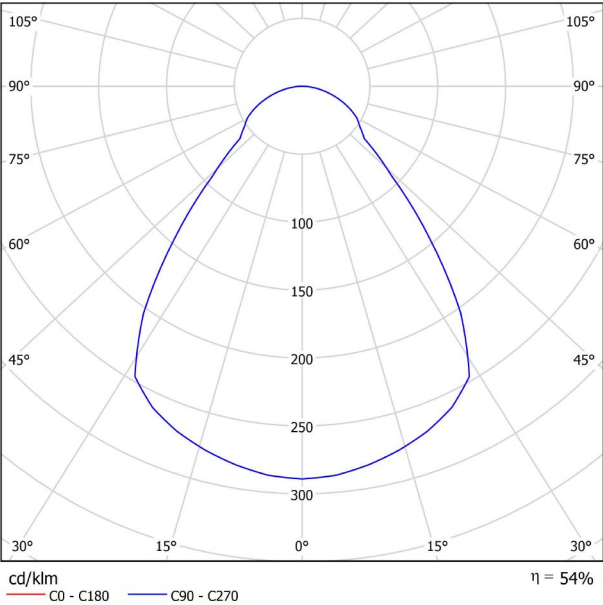


CONICAL DIAGRAM

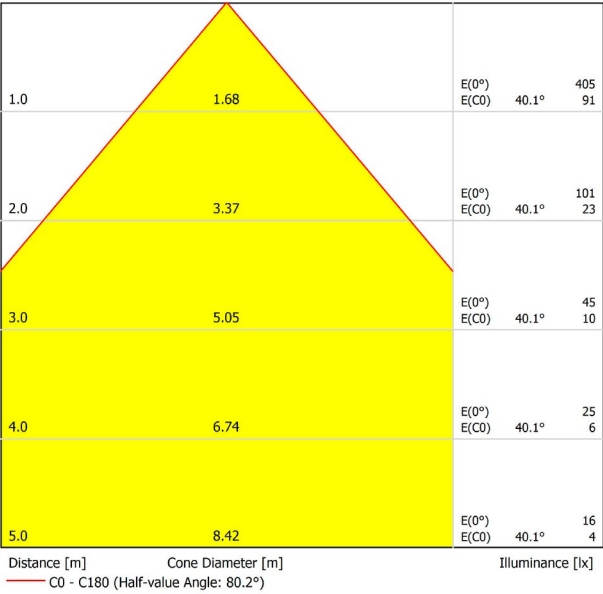



DIMENSIONS

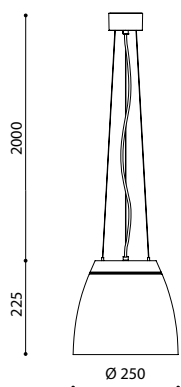

AWARDS



PRODUCT

Name	SALT MINI 4000K NR
Reference	A2800012NR
Color	Black-Red
RAL	9005 & 2004
Category	SUSPENSION

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	1425 Lm
Power	10 W
Power values of the system	13,33 W
Colour temperature	4000 K
Colour Rendering Index	CRI>90
Chromatic stability	Mac Adam Step 2
Light beam angle	80°
Lighting efficiency	67%
Efficacy	143 Lm/W
Current intensity	700 mA
Dimming	Phase Cut
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A
LED lifespan	L80B10 (Tc=80°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Cord length	2 m
Fast adjustment tensioner	Yes
Weight	1920 g.
Packaged weight	2437 g.
Packaging dimensions	289 × 289 × 290 mm.
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




High Bay light fitting performance combined with the design of a unique decorative piece. Salt integrates driver and heat dissipation into the design of the fitting itself and achieves on the one hand an excellent thermal management and on the other hand the freedom to hang the fixture at any desired height. And to prevent glare, Salt disposes of a diffuser covering the light source.

POLAR DIAGRAM

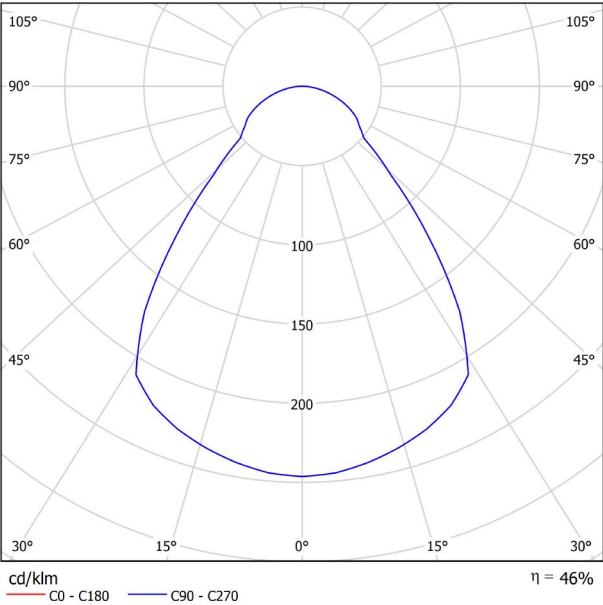


CONICAL DIAGRAM

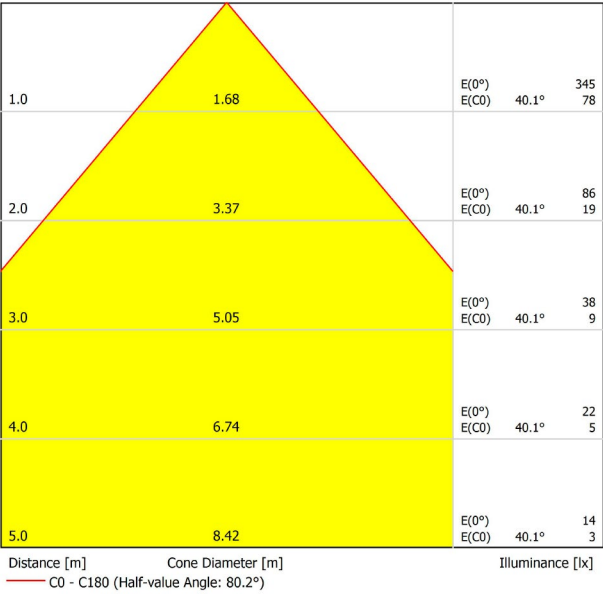



DIMENSIONS

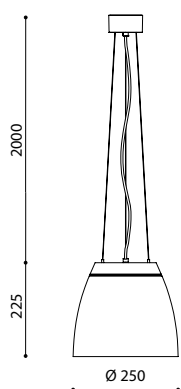

AWARDS



PRODUCT

Name	SALT MINI 4000K NW
Reference	A2800012NW
Color	Black-White
RAL	9005 & 9016
Category	SUSPENSION

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	1425 Lm
Power	10 W
Power values of the system	13,33 W
Colour temperature	4000 K
Colour Rendering Index	CRI>90
Chromatic stability	Mac Adam Step 2
Light beam angle	80°
Lighting efficiency	67%
Efficacy	143 Lm/W
Current intensity	700 mA
Dimming	Phase Cut
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A
LED lifespan	L80B10 (Tc=80°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Cord length	2 m
Fast adjustment tensioner	Yes
Weight	1920 g.
Packaged weight	2437 g.
Packaging dimensions	289 × 289 × 290 mm.
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




High Bay light fitting performance combined with the design of a unique decorative piece. Salt integrates driver and heat dissipation into the design of the fitting itself and achieves on the one hand an excellent thermal management and on the other hand the freedom to hang the fixture at any desired height. And to prevent glare, Salt disposes of a diffuser covering the light source.

POLAR DIAGRAM

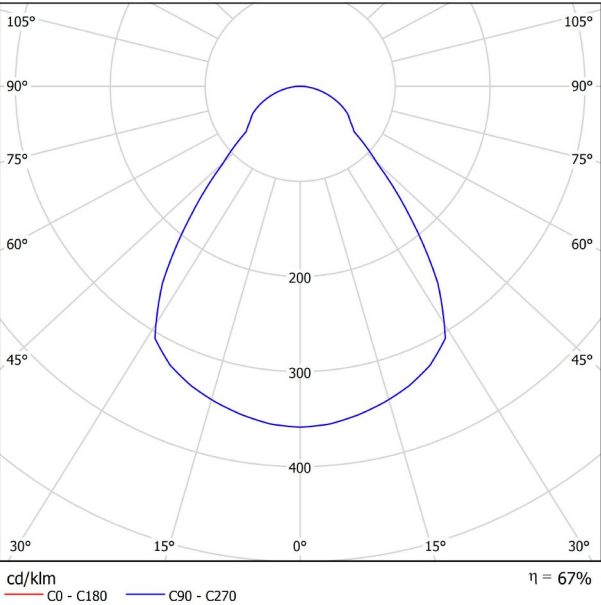


CONICAL DIAGRAM

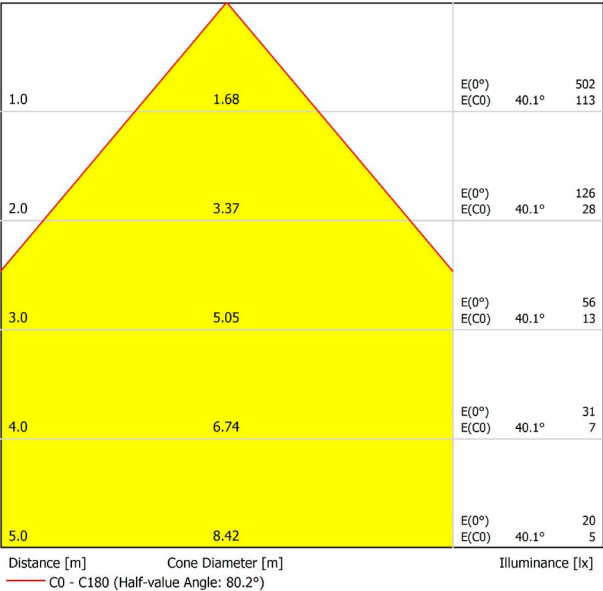



DIMENSIONS

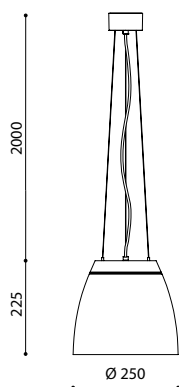

AWARDS



Name	SALT MINI 4000K WG
Reference	A2800012WG
Color	White-Gold
RAL	9016 & 1036
Category	SUSPENSION

PRODUCT

Light source	LED
Gross luminous flux	1425 Lm
Power	10 W
Power values of the system	13,33 W
Colour temperature	4000 K
Colour Rendering Index	CRI>90
Chromatic stability	Mac Adam Step 2
Light beam angle	80°
Lighting efficiency	67%
Efficacy	143 Lm/W
Current intensity	700 mA
Dimming	Phase Cut
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A
LED lifespan	L80B10 (Tc=80°C) >60.000h

LIGHTING INFORMATION


Ingress Protection	IP20
Cord length	2 m
Fast adjustment tensioner	Yes
Weight	1920 g.
Packaged weight	2437 g.
Packaging dimensions	289 × 289 × 290 mm.
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate

OTHER DATA




High Bay light fitting performance combined with the design of a unique decorative piece. Salt integrates driver and heat dissipation into the design of the fitting itself and achieves on the one hand an excellent thermal management and on the other hand the freedom to hang the fixture at any desired height. And to prevent glare, Salt disposes of a diffuser covering the light source.

POLAR DIAGRAM

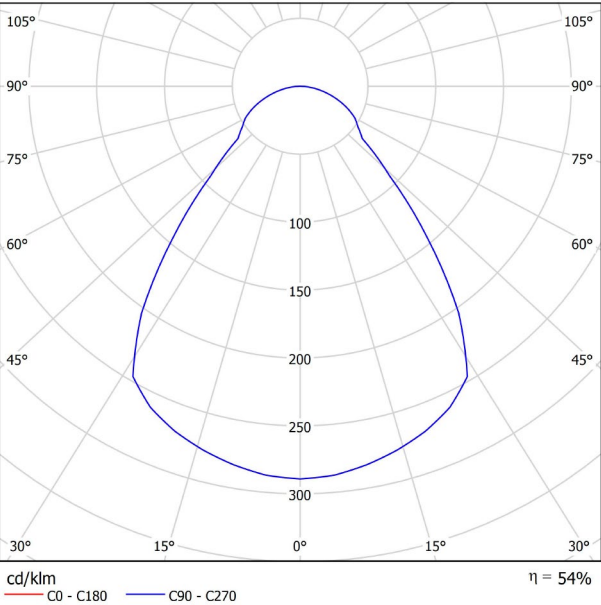


CONICAL DIAGRAM

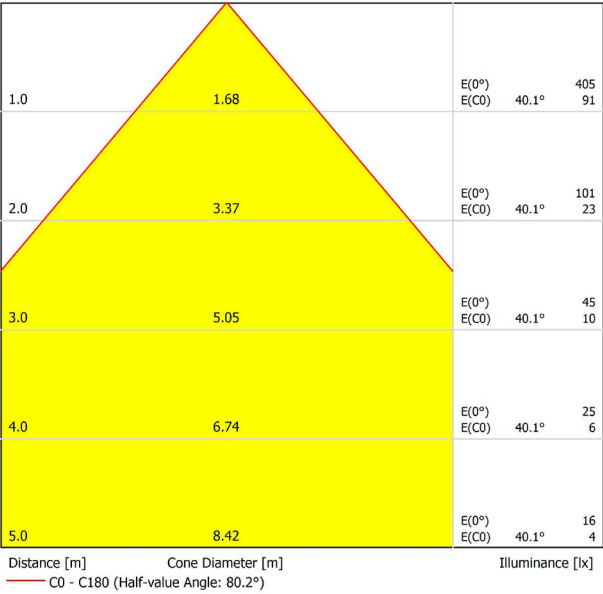



DIMENSIONS

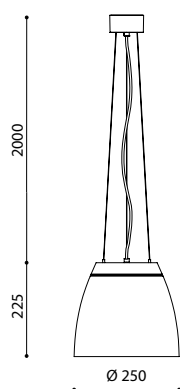

AWARDS



Name	SALT MINI 4000K WR
Reference	A2800012WR
Color	White-Red
RAL	9016 & 2004
Category	SUSPENSION

PRODUCT

Light source	LED
Gross luminous flux	1425 Lm
Power	10 W
Power values of the system	13,33 W
Colour temperature	4000 K
Colour Rendering Index	CRI>90
Chromatic stability	Mac Adam Step 2
Light beam angle	80°
Lighting efficiency	67%
Efficacy	143 Lm/W
Current intensity	700 mA
Dimming	Phase Cut
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A
LED lifespan	L80B10 (Tc=80°C) >60.000h

LIGHTING INFORMATION


Ingress Protection	IP20
Cord length	2 m
Fast adjustment tensioner	Yes
Weight	1920 g.
Packaged weight	2437 g.
Packaging dimensions	289 × 289 × 290 mm.
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate

OTHER DATA




High Bay light fitting performance combined with the design of a unique decorative piece. Salt integrates driver and heat dissipation into the design of the fitting itself and achieves on the one hand an excellent thermal management and on the other hand the freedom to hang the fixture at any desired height. And to prevent glare, Salt disposes of a diffuser covering the light source.

POLAR DIAGRAM

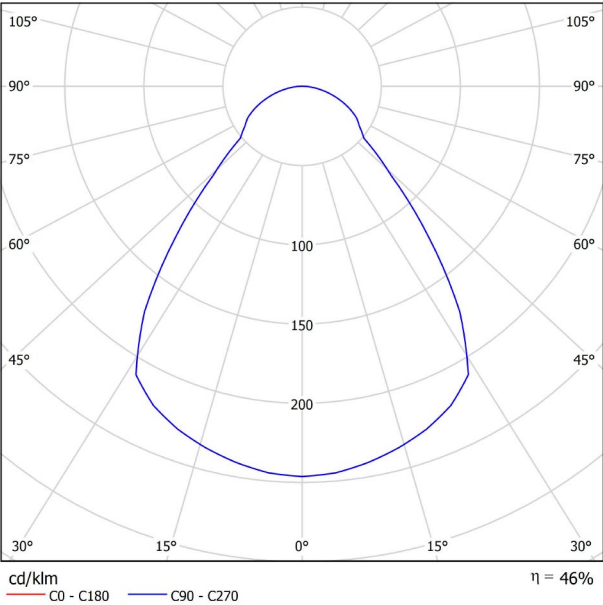


CONICAL DIAGRAM

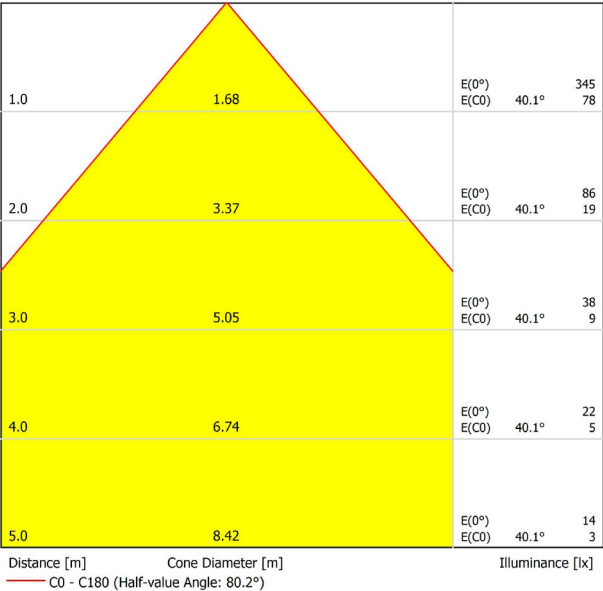



DIMENSIONS

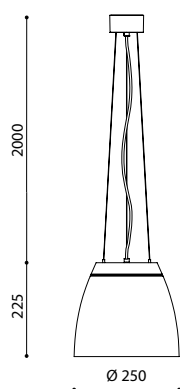

AWARDS



PRODUCT

Name	SALT MINI 4000K WW
Reference	A2800012WW
Color	White-White
RAL	9016 & 9016
Category	SUSPENSION

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	1425 Lm
Power	10 W
Power values of the system	13,33 W
Colour temperature	4000 K
Colour Rendering Index	CRI>90
Chromatic stability	Mac Adam Step 2
Light beam angle	80°
Lighting efficiency	67%
Efficacy	143 Lm/W
Current intensity	700 mA
Dimming	Phase Cut
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A
LED lifespan	L80B10 (Tc=80°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Cord length	2 m
Fast adjustment tensioner	Yes
Weight	1920 g.
Packaged weight	2437 g.
Packaging dimensions	289 × 289 × 290 mm.
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate



High Bay light fitting performance combined with the design of a unique decorative piece. Salt integrates driver and heat dissipation into the design of the fitting itself and achieves on the one hand an excellent thermal management and on the other hand the freedom to hang the fixture at any desired height. And to prevent glare, Salt disposes of a diffuser covering the light source.

POLAR DIAGRAM

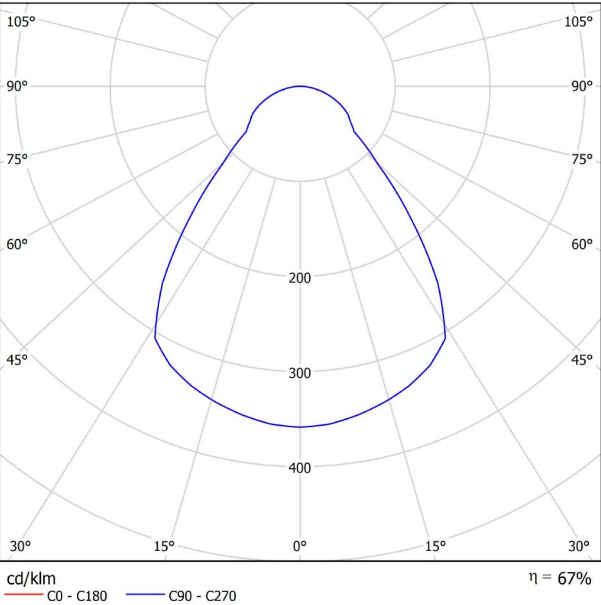

CONICAL DIAGRAM

