


## DIMENSIONS



## AWARDS

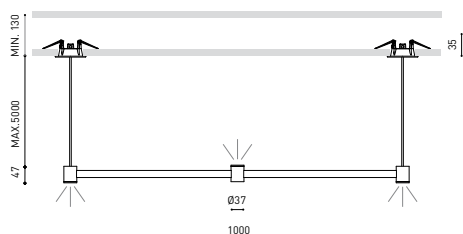

## PRODUCT

|           |                                   |
|-----------|-----------------------------------|
| Name      | ART DIRECT & INDIRECT 5M 2700K BC |
| Reference | A3430010BC                        |
| Color     | Brushed Copper                    |
| RAL       | Paint of metallic nanoparticles   |
| Category  | SUSPENSION                        |

## LIGHTING INFORMATION

|                             |                                    |
|-----------------------------|------------------------------------|
| Light source                | LED                                |
| Gross luminous flux         | 570 Lm                             |
| Power                       | 6,3 W                              |
| Power values of the system  | 7,00 W                             |
| Colour temperature          | 2700 K - Other K, please consult   |
| Colour Rendering Index      | CRI>90                             |
| Chromatic stability         | MacAdam Step 3                     |
| Light beam angle            | 35°                                |
| Lighting efficiency         | 93%                                |
| Efficacy                    | 90 Lm/W                            |
| Current intensity           | 700 mA                             |
| Dimming                     | No Dim - Other DIM, please consult |
| Control through bluetooth   | Please Consult                     |
| Driver                      | Included                           |
| Electrical insulation class |                                    |
| Voltage                     | 220 V/240 V                        |
| Frequency                   | 50/60 Hz                           |
| Energy efficiency           | A+                                 |
| LED lifespan                | L80B10 (Tc=85°C) >60.000h          |


## OTHER DATA

|                           |                                                         |
|---------------------------|---------------------------------------------------------|
| Ingress Protection        | IP20                                                    |
| Recess measurements       | 2 x Ø50 mm.                                             |
| Cord length               | 5 m                                                     |
| Fast adjustment tensioner | No                                                      |
| Weight                    | 1445 g.                                                 |
| Packaged weight           | 1980 g.                                                 |
| Packaging dimensions      | Ø105 x 1080 mm                                          |
| Units per package         | 1                                                       |
| Materials                 | Brass / Acrylonitrile Butadiene Styrene + Polycarbonate |




Art is a minimalist and rational suspended luminaire that allows an ambitious range of composition possibilities. Individually, it transmits a sober look, but when combined – in an ordered or anarchic way – it is revealed as a sculptural piece of Art. This luminaire can offer ambient lighting in any kind of actual interior design project. Its versatility makes possible both, – a discreet lighting over a table or an artistic composition to smoothly light up vertical opened spaces.

POLAR DIAGRAM

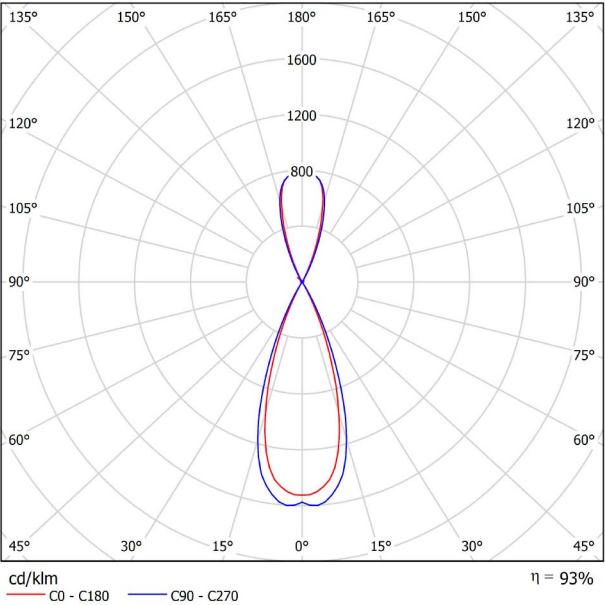


CONICAL DIAGRAM

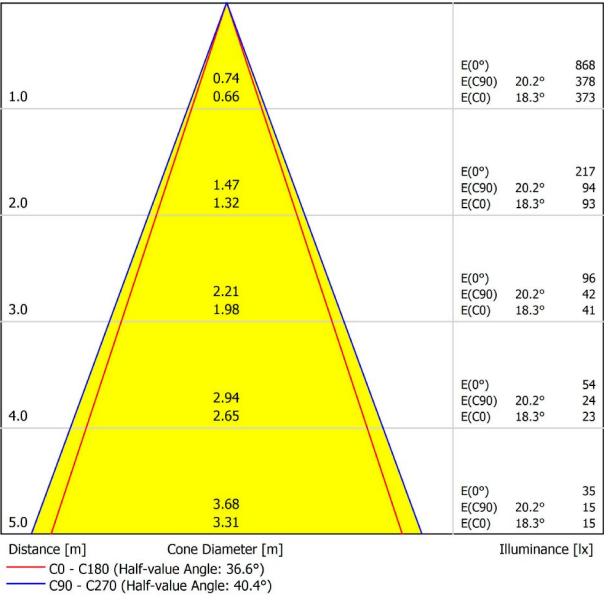



## DIMENSIONS

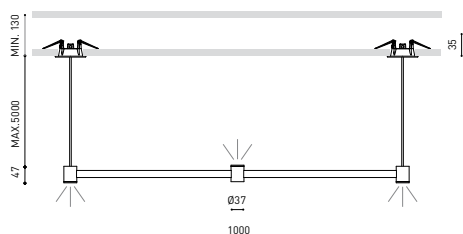

## AWARDS



## PRODUCT

|           |                                   |
|-----------|-----------------------------------|
| Name      | ART DIRECT & INDIRECT 5M 2700K BG |
| Reference | A3430010BG                        |
| Color     | Brushed Gold                      |
| RAL       | Paint of metallic nanoparticles   |
| Category  | SUSPENSION                        |

## LIGHTING INFORMATION

|                             |                                                                                      |
|-----------------------------|--------------------------------------------------------------------------------------|
| Light source                | LED                                                                                  |
| Gross luminous flux         | 570 Lm                                                                               |
| Power                       | 6,3 W                                                                                |
| Power values of the system  | 7,00 W                                                                               |
| Colour temperature          | 2700 K - Other K, please consult                                                     |
| Colour Rendering Index      | CRI>90                                                                               |
| Chromatic stability         | MacAdam Step 3                                                                       |
| Light beam angle            | 35°                                                                                  |
| Lighting efficiency         | 93%                                                                                  |
| Efficacy                    | 90 Lm/W                                                                              |
| Current intensity           | 700 mA                                                                               |
| Dimming                     | No Dim - Other DIM, please consult                                                   |
| Control through bluetooth   | Please Consult                                                                       |
| Driver                      | Included                                                                             |
| Electrical insulation class |  |
| Voltage                     | 220 V/240 V                                                                          |
| Frequency                   | 50/60 Hz                                                                             |
| Energy efficiency           | A+                                                                                   |
| LED lifespan                | L80B10 (Tc=85°C) >60.000h                                                            |


## OTHER DATA

|                           |                                                         |
|---------------------------|---------------------------------------------------------|
| Ingress Protection        | IP20                                                    |
| Recess measurements       | 2 x Ø50 mm.                                             |
| Cord length               | 5 m                                                     |
| Fast adjustment tensioner | No                                                      |
| Weight                    | 1445 g.                                                 |
| Packaged weight           | 1980 g.                                                 |
| Packaging dimensions      | Ø105 x 1080 mm                                          |
| Units per package         | 1                                                       |
| Materials                 | Brass / Acrylonitrile Butadiene Styrene + Polycarbonate |




Art is a minimalist and rational suspended luminaire that allows an ambitious range of composition possibilities. Individually, it transmits a sober look, but when combined – in an ordered or anarchic way – it is revealed as a sculptural piece of Art. This luminaire can offer ambient lighting in any kind of actual interior design project. Its versatility makes possible both, – a discreet lighting over a table or an artistic composition to smoothly light up vertical opened spaces.

POLAR DIAGRAM

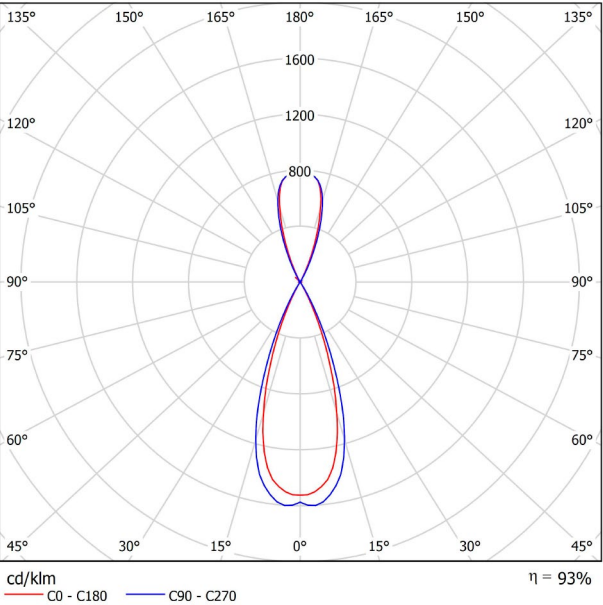


CONICAL DIAGRAM

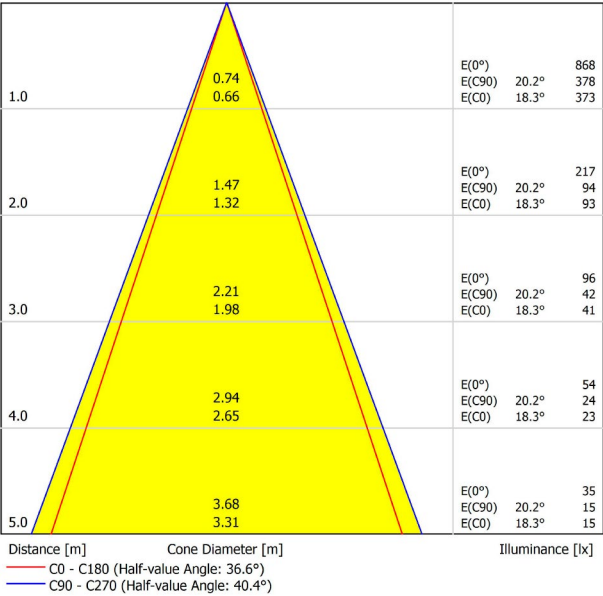



## DIMENSIONS

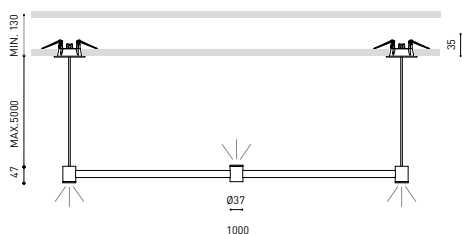

## AWARDS



## PRODUCT

|           |                                   |
|-----------|-----------------------------------|
| Name      | ART DIRECT & INDIRECT 5M 2700K NT |
| Reference | A3430010NT                        |
| Color     | Textured black                    |
| RAL       | 9005                              |
| Category  | SUSPENSION                        |

## LIGHTING INFORMATION

|                             |                                    |
|-----------------------------|------------------------------------|
| Light source                | LED                                |
| Gross luminous flux         | 570 Lm                             |
| Power                       | 6,3 W                              |
| Power values of the system  | 7,00 W                             |
| Colour temperature          | 2700 K - Other K, please consult   |
| Colour Rendering Index      | CRI>90                             |
| Chromatic stability         | MacAdam Step 3                     |
| Light beam angle            | 35°                                |
| Lighting efficiency         | 93%                                |
| Efficacy                    | 90 Lm/W                            |
| Current intensity           | 700 mA                             |
| Dimming                     | No Dim - Other DIM, please consult |
| Control through bluetooth   | Please Consult                     |
| Driver                      | Included                           |
| Electrical insulation class | □                                  |
| Voltage                     | 220 V/240 V                        |
| Frequency                   | 50/60 Hz                           |
| Energy efficiency           | A+                                 |
| LED lifespan                | L80B10 (Tc=85°C) >60.000h          |


## OTHER DATA

|                           |                                                         |
|---------------------------|---------------------------------------------------------|
| Ingress Protection        | IP20                                                    |
| Recess measurements       | 2 x Ø50 mm.                                             |
| Cord length               | 5 m                                                     |
| Fast adjustment tensioner | No                                                      |
| Weight                    | 1445 g.                                                 |
| Packaged weight           | 1980 g.                                                 |
| Packaging dimensions      | Ø105 x 1080 mm                                          |
| Units per package         | 1                                                       |
| Materials                 | Brass / Acrylonitrile Butadiene Styrene + Polycarbonate |




Art is a minimalist and rational suspended luminaire that allows an ambitious range of composition possibilities. Individually, it transmits a sober look, but when combined – in an ordered or anarchic way – it is revealed as a sculptural piece of Art. This luminaire can offer ambient lighting in any kind of actual interior design project. Its versatility makes possible both, – a discreet lighting over a table or an artistic composition to smoothly light up vertical opened spaces.

POLAR DIAGRAM

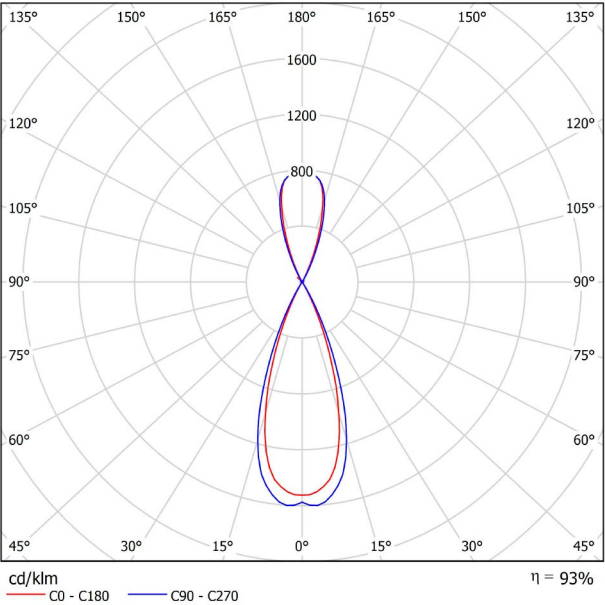


CONICAL DIAGRAM

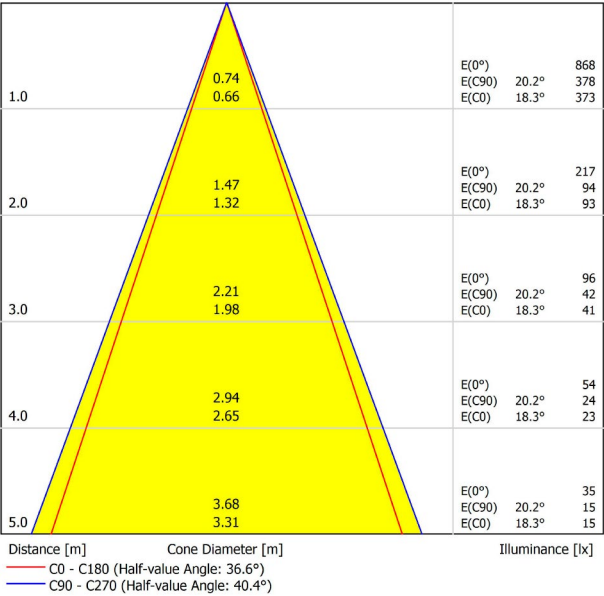



## DIMENSIONS

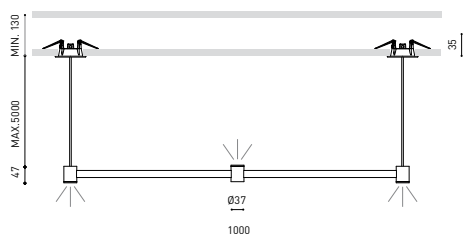

## AWARDS



## PRODUCT

|           |                                   |
|-----------|-----------------------------------|
| Name      | ART DIRECT & INDIRECT 5M 2700K WT |
| Reference | A3430010WT                        |
| Color     | Textured white                    |
| RAL       | 9016                              |
| Category  | SUSPENSION                        |

## LIGHTING INFORMATION

|                             |                                    |
|-----------------------------|------------------------------------|
| Light source                | LED                                |
| Gross luminous flux         | 570 Lm                             |
| Power                       | 6,3 W                              |
| Power values of the system  | 7,00 W                             |
| Colour temperature          | 2700 K - Other K, please consult   |
| Colour Rendering Index      | CRI>90                             |
| Chromatic stability         | MacAdam Step 3                     |
| Light beam angle            | 35°                                |
| Lighting efficiency         | 93%                                |
| Efficacy                    | 90 Lm/W                            |
| Current intensity           | 700 mA                             |
| Dimming                     | No Dim - Other DIM, please consult |
| Control through bluetooth   | Please Consult                     |
| Driver                      | Included                           |
| Electrical insulation class | □                                  |
| Voltage                     | 220 V/240 V                        |
| Frequency                   | 50/60 Hz                           |
| Energy efficiency           | A+                                 |
| LED lifespan                | L80B10 (Tc=85°C) >60.000h          |


## OTHER DATA

|                           |                                                         |
|---------------------------|---------------------------------------------------------|
| Ingress Protection        | IP20                                                    |
| Recess measurements       | 2 x Ø50 mm.                                             |
| Cord length               | 5 m                                                     |
| Fast adjustment tensioner | No                                                      |
| Weight                    | 1445 g.                                                 |
| Packaged weight           | 1980 g.                                                 |
| Packaging dimensions      | Ø105 x 1080 mm                                          |
| Units per package         | 1                                                       |
| Materials                 | Brass / Acrylonitrile Butadiene Styrene + Polycarbonate |





Art is a minimalist and rational suspended luminaire that allows an ambitious range of composition possibilities. Individually, it transmits a sober look, but when combined – in an ordered or anarchic way – it is revealed as a sculptural piece of Art. This luminaire can offer ambient lighting in any kind of actual interior design project. Its versatility makes possible both, – a discreet lighting over a table or an artistic composition to smoothly light up vertical opened spaces.

POLAR DIAGRAM

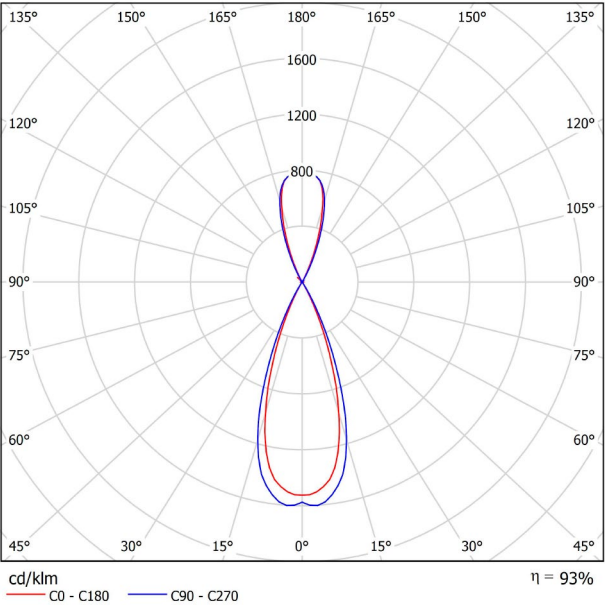


CONICAL DIAGRAM

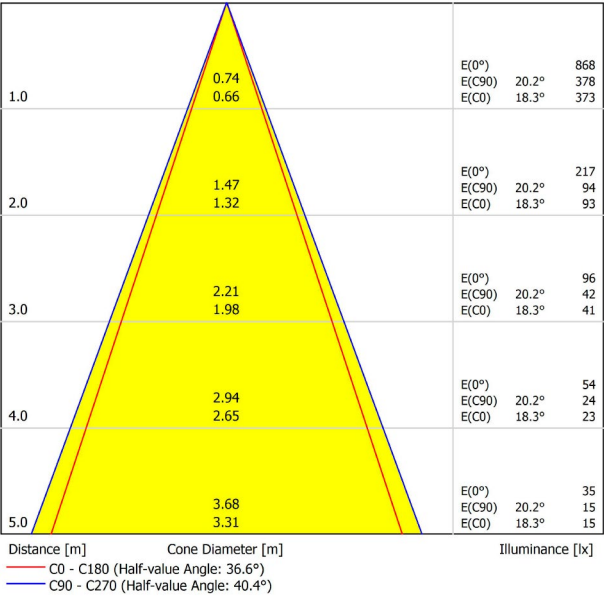



## DIMENSIONS

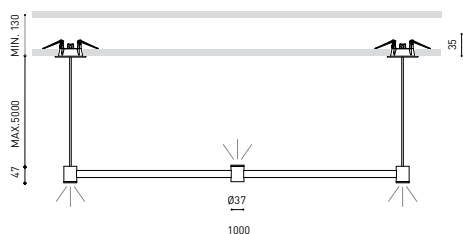

## AWARDS



## PRODUCT

|           |                                   |
|-----------|-----------------------------------|
| Name      | ART DIRECT & INDIRECT 5M 3000K BC |
| Reference | A3430011BC                        |
| Color     | Brushed Copper                    |
| RAL       | Paint of metallic nanoparticles   |
| Category  | SUSPENSION                        |

## LIGHTING INFORMATION

|                             |                                    |
|-----------------------------|------------------------------------|
| Light source                | LED                                |
| Gross luminous flux         | 630 Lm                             |
| Power                       | 6,3 W                              |
| Power values of the system  | 7,00 W                             |
| Colour temperature          | 3000 K - Other K, please consult   |
| Colour Rendering Index      | CRI>90                             |
| Chromatic stability         | MacAdam Step 3                     |
| Light beam angle            | 35°                                |
| Lighting efficiency         | 93%                                |
| Efficacy                    | 100 Lm/W                           |
| Current intensity           | 700 mA                             |
| Dimming                     | No Dim - Other DIM, please consult |
| Control through bluetooth   | Please Consult                     |
| Driver                      | Included                           |
| Electrical insulation class | □                                  |
| Voltage                     | 220 V/240 V                        |
| Frequency                   | 50/60 Hz                           |
| Energy efficiency           | A+                                 |
| LED lifespan                | L80B10 (Tc=85°C) >60.000h          |


## OTHER DATA

|                           |                                                         |
|---------------------------|---------------------------------------------------------|
| Ingress Protection        | IP20                                                    |
| Recess measurements       | 2 x Ø50 mm.                                             |
| Cord length               | 5 m                                                     |
| Fast adjustment tensioner | No                                                      |
| Weight                    | 1445 g.                                                 |
| Packaged weight           | 1980 g.                                                 |
| Packaging dimensions      | Ø105 x 1080 mm                                          |
| Units per package         | 1                                                       |
| Materials                 | Brass / Acrylonitrile Butadiene Styrene + Polycarbonate |




Art is a minimalist and rational suspended luminaire that allows an ambitious range of composition possibilities. Individually, it transmits a sober look, but when combined – in an ordered or anarchic way – it is revealed as a sculptural piece of Art. This luminaire can offer ambient lighting in any kind of actual interior design project. Its versatility makes possible both, – a discreet lighting over a table or an artistic composition to smoothly light up vertical opened spaces.

POLAR DIAGRAM

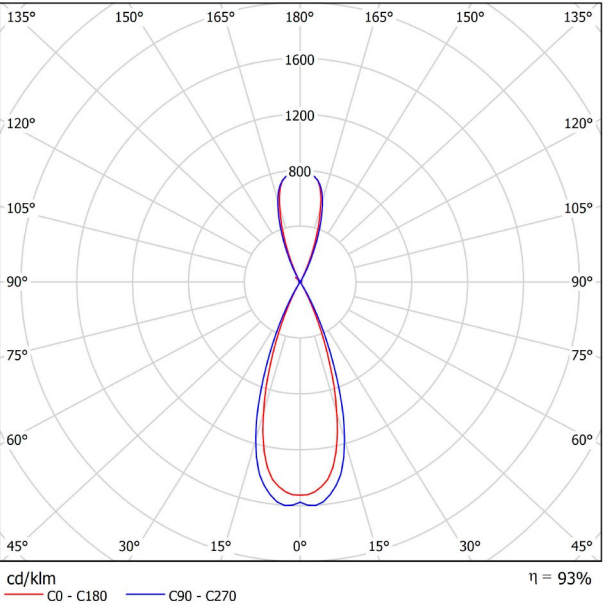


CONICAL DIAGRAM

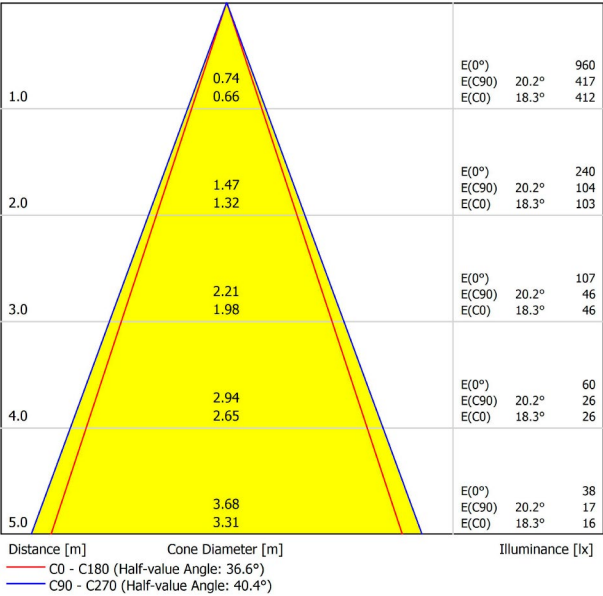



## DIMENSIONS

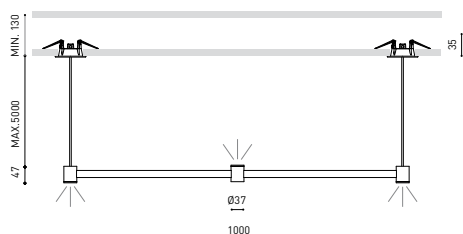

## AWARDS



## PRODUCT

|           |                                   |
|-----------|-----------------------------------|
| Name      | ART DIRECT & INDIRECT 5M 3000K BG |
| Reference | A3430011BG                        |
| Color     | Brushed Gold                      |
| RAL       | Paint of metallic nanoparticles   |
| Category  | SUSPENSION                        |

## LIGHTING INFORMATION

|                             |                                                                                      |
|-----------------------------|--------------------------------------------------------------------------------------|
| Light source                | LED                                                                                  |
| Gross luminous flux         | 630 Lm                                                                               |
| Power                       | 6,3 W                                                                                |
| Power values of the system  | 7,00 W                                                                               |
| Colour temperature          | 3000 K - Other K, please consult                                                     |
| Colour Rendering Index      | CRI>90                                                                               |
| Chromatic stability         | MacAdam Step 3                                                                       |
| Light beam angle            | 35°                                                                                  |
| Lighting efficiency         | 93%                                                                                  |
| Efficacy                    | 100 Lm/W                                                                             |
| Current intensity           | 700 mA                                                                               |
| Dimming                     | No Dim - Other DIM, please consult                                                   |
| Control through bluetooth   | Please Consult                                                                       |
| Driver                      | Included                                                                             |
| Electrical insulation class |  |
| Voltage                     | 220 V/240 V                                                                          |
| Frequency                   | 50/60 Hz                                                                             |
| Energy efficiency           | A+                                                                                   |
| LED lifespan                | L80B10 (Tc=85°C) >60.000h                                                            |


## OTHER DATA

|                           |                                                         |
|---------------------------|---------------------------------------------------------|
| Ingress Protection        | IP20                                                    |
| Recess measurements       | 2 x Ø50 mm.                                             |
| Cord length               | 5 m                                                     |
| Fast adjustment tensioner | No                                                      |
| Weight                    | 1445 g.                                                 |
| Packaged weight           | 1980 g.                                                 |
| Packaging dimensions      | Ø105 x 1080 mm                                          |
| Units per package         | 1                                                       |
| Materials                 | Brass / Acrylonitrile Butadiene Styrene + Polycarbonate |




Art is a minimalist and rational suspended luminary that allows an ambitious range of composition possibilities. Individually, it transmits a sober look, but when combined – in an ordered or anarchic way – it is revealed as a sculptural piece of Art. This luminary can offer ambient lighting in any kind of actual interior design project. Its versatility makes possible both, – a discreet lighting over a table or an artistic composition to smoothly light up vertical opened spaces.

POLAR DIAGRAM

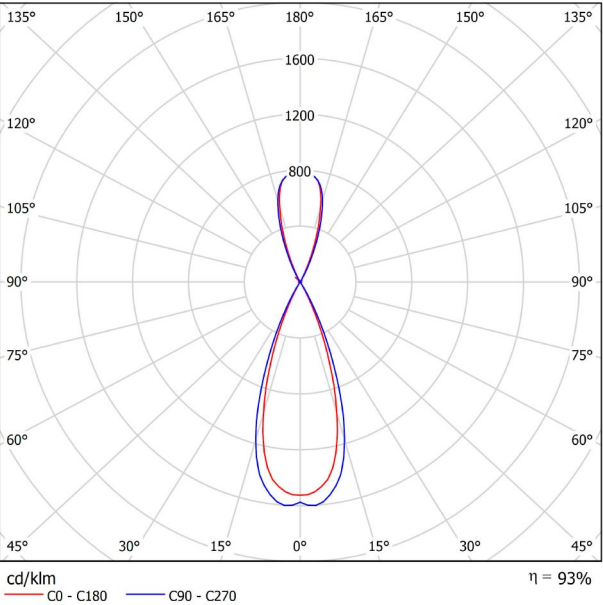


CONICAL DIAGRAM

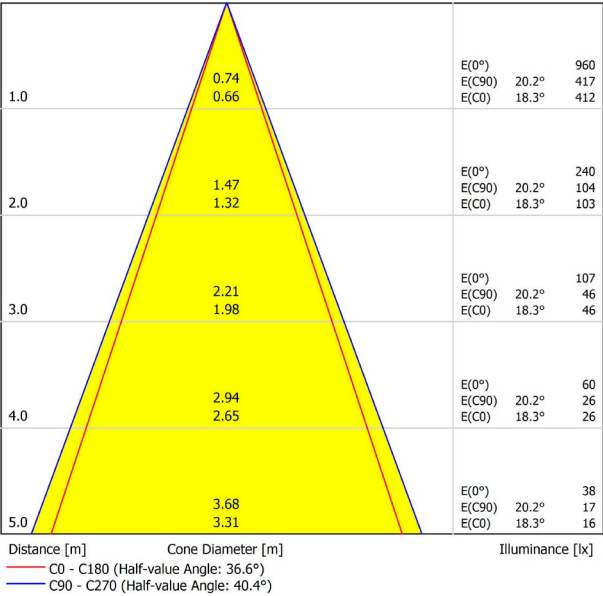



## DIMENSIONS

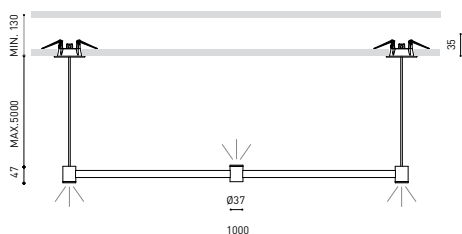

## AWARDS



## PRODUCT

|           |                                   |
|-----------|-----------------------------------|
| Name      | ART DIRECT & INDIRECT 5M 3000K NT |
| Reference | A3430011NT                        |
| Color     | Textured black                    |
| RAL       | 9005                              |
| Category  | SUSPENSION                        |

## LIGHTING INFORMATION

|                             |                                    |
|-----------------------------|------------------------------------|
| Light source                | LED                                |
| Gross luminous flux         | 630 Lm                             |
| Power                       | 6,3 W                              |
| Power values of the system  | 7,00 W                             |
| Colour temperature          | 3000 K - Other K, please consult   |
| Colour Rendering Index      | CRI>90                             |
| Chromatic stability         | MacAdam Step 3                     |
| Light beam angle            | 35°                                |
| Lighting efficiency         | 93%                                |
| Efficacy                    | 100 Lm/W                           |
| Current intensity           | 700 mA                             |
| Dimming                     | No Dim - Other DIM, please consult |
| Control through bluetooth   | Please Consult                     |
| Driver                      | Included                           |
| Electrical insulation class | □                                  |
| Voltage                     | 220 V/240 V                        |
| Frequency                   | 50/60 Hz                           |
| Energy efficiency           | A+                                 |
| LED lifespan                | L80B10 (Tc=85°C) >60.000h          |


## OTHER DATA

|                           |                                                         |
|---------------------------|---------------------------------------------------------|
| Ingress Protection        | IP20                                                    |
| Recess measurements       | 2 x Ø50 mm.                                             |
| Cord length               | 5 m                                                     |
| Fast adjustment tensioner | No                                                      |
| Weight                    | 1445 g.                                                 |
| Packaged weight           | 1980 g.                                                 |
| Packaging dimensions      | Ø105 x 1080 mm                                          |
| Units per package         | 1                                                       |
| Materials                 | Brass / Acrylonitrile Butadiene Styrene + Polycarbonate |




Art is a minimalist and rational suspended luminaire that allows an ambitious range of composition possibilities. Individually, it transmits a sober look, but when combined – in an ordered or anarchic way – it is revealed as a sculptural piece of Art. This luminaire can offer ambient lighting in any kind of actual interior design project. Its versatility makes possible both, – a discreet lighting over a table or an artistic composition to smoothly light up vertical opened spaces.

POLAR DIAGRAM

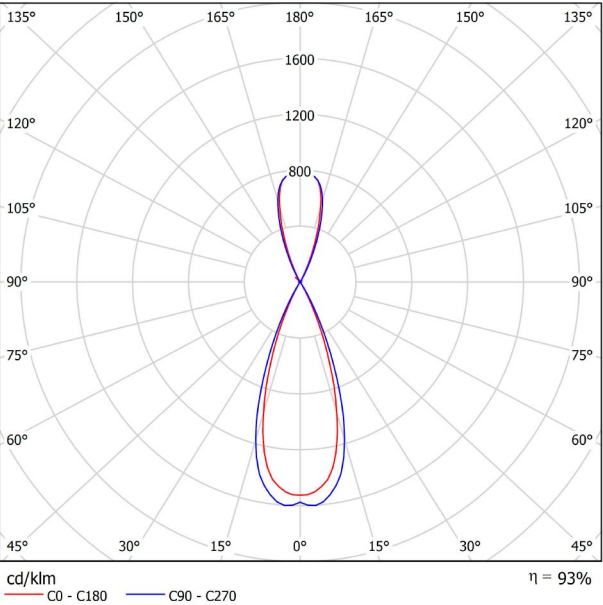


CONICAL DIAGRAM

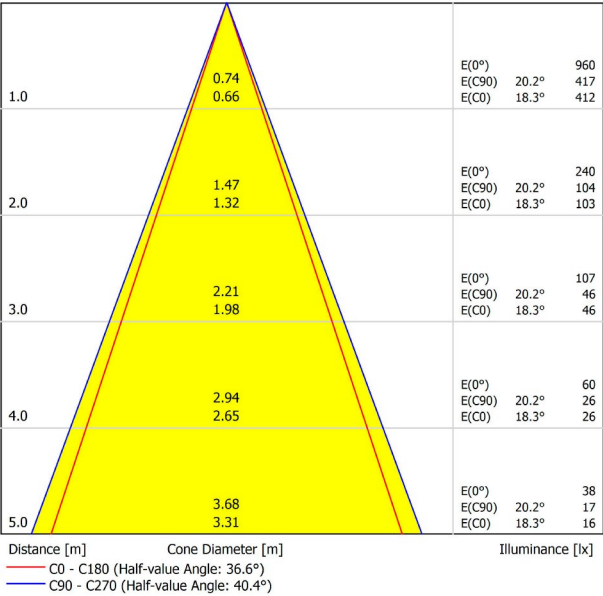



## DIMENSIONS

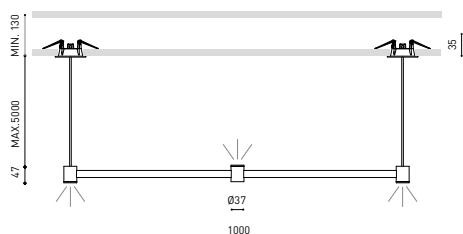

## AWARDS



## PRODUCT

|           |                                   |
|-----------|-----------------------------------|
| Name      | ART DIRECT & INDIRECT 5M 3000K WT |
| Reference | A3430011WT                        |
| Color     | Textured white                    |
| RAL       | 9016                              |
| Category  | SUSPENSION                        |

## LIGHTING INFORMATION

|                             |                                    |
|-----------------------------|------------------------------------|
| Light source                | LED                                |
| Gross luminous flux         | 630 Lm                             |
| Power                       | 6,3 W                              |
| Power values of the system  | 7,00 W                             |
| Colour temperature          | 3000 K - Other K, please consult   |
| Colour Rendering Index      | CRI>90                             |
| Chromatic stability         | MacAdam Step 3                     |
| Light beam angle            | 35°                                |
| Lighting efficiency         | 93%                                |
| Efficacy                    | 100 Lm/W                           |
| Current intensity           | 700 mA                             |
| Dimming                     | No Dim - Other DIM, please consult |
| Control through bluetooth   | Please Consult                     |
| Driver                      | Included                           |
| Electrical insulation class | □                                  |
| Voltage                     | 220 V/240 V                        |
| Frequency                   | 50/60 Hz                           |
| Energy efficiency           | A+                                 |
| LED lifespan                | L80B10 (Tc=85°C) >60.000h          |


## OTHER DATA

|                           |                                                         |
|---------------------------|---------------------------------------------------------|
| Ingress Protection        | IP20                                                    |
| Recess measurements       | 2 x Ø50 mm.                                             |
| Cord length               | 5 m                                                     |
| Fast adjustment tensioner | No                                                      |
| Weight                    | 1445 g.                                                 |
| Packaged weight           | 1980 g.                                                 |
| Packaging dimensions      | Ø105 x 1080 mm                                          |
| Units per package         | 1                                                       |
| Materials                 | Brass / Acrylonitrile Butadiene Styrene + Polycarbonate |





Art is a minimalist and rational suspended luminary that allows an ambitious range of composition possibilities. Individually, it transmits a sober look, but when combined – in an ordered or anarchic way – it is revealed as a sculptural piece of Art. This luminary can offer ambient lighting in any kind of actual interior design project. Its versatility makes possible both, – a discreet lighting over a table or an artistic composition to smoothly light up vertical opened spaces.

POLAR DIAGRAM

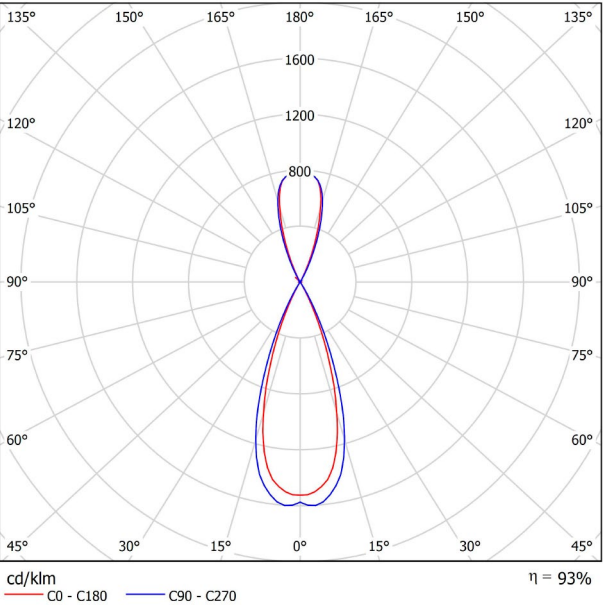


CONICAL DIAGRAM

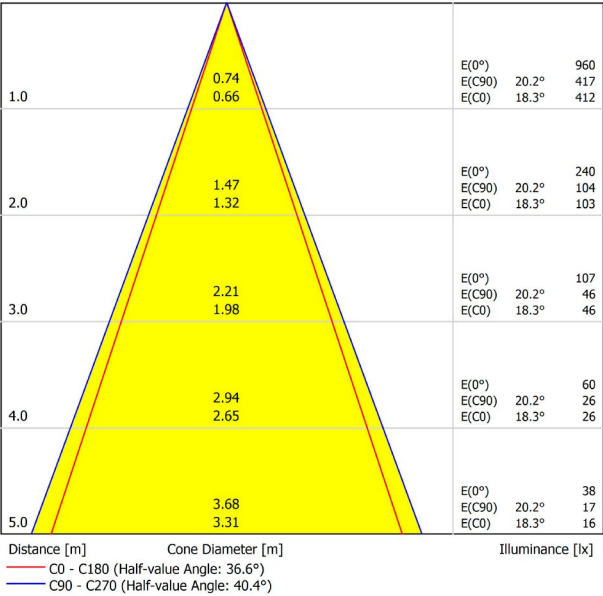



## DIMENSIONS

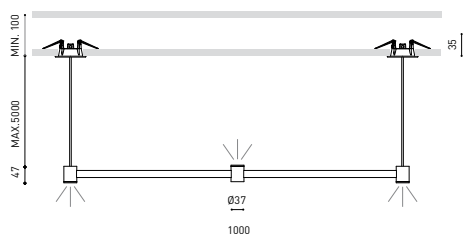

## AWARDS



## PRODUCT

|           |                                            |
|-----------|--------------------------------------------|
| Name      | ART DIRECT & INDIRECT 5M DIM DALI 2700K BC |
| Reference | A3430020BC                                 |
| Color     | Brushed Copper                             |
| RAL       | Paint of metallic nanoparticles            |
| Category  | SUSPENSION                                 |

## LIGHTING INFORMATION

|                             |                                  |
|-----------------------------|----------------------------------|
| Light source                | LED                              |
| Gross luminous flux         | 570 Lm                           |
| Power                       | 6,3 W                            |
| Power values of the system  | 7,68 W                           |
| Colour temperature          | 2700 K - Other K, please consult |
| Colour Rendering Index      | CRI>90                           |
| Chromatic stability         | MacAdam Step 3                   |
| Light beam angle            | 35°                              |
| Lighting efficiency         | 93%                              |
| Efficacy                    | 90 Lm/W                          |
| Current intensity           | 700 mA                           |
| Dimming                     | DALI - Other DIM, please consult |
| Control through bluetooth   | Please Consult                   |
| Driver                      | Included                         |
| Electrical insulation class | □                                |
| Voltage                     | 220 V/240 V                      |
| Frequency                   | 50/60 Hz                         |
| Energy efficiency           | A+                               |
| LED lifespan                | L80B10 (Tc=85°C) >60.000h        |


## OTHER DATA

|                           |                                                         |
|---------------------------|---------------------------------------------------------|
| Ingress Protection        | IP20                                                    |
| Recess measurements       | 2 x Ø50 mm.                                             |
| Cord length               | 5 m                                                     |
| Fast adjustment tensioner | No                                                      |
| Weight                    | 1445 g.                                                 |
| Packaged weight           | 1980 g.                                                 |
| Packaging dimensions      | Ø105 x 1080 mm                                          |
| Units per package         | 1                                                       |
| Materials                 | Brass / Acrylonitrile Butadiene Styrene + Polycarbonate |




Art is a minimalist and rational suspended luminaire that allows an ambitious range of composition possibilities. Individually, it transmits a sober look, but when combined – in an ordered or anarchic way – it is revealed as a sculptural piece of Art. This luminaire can offer ambient lighting in any kind of actual interior design project. Its versatility makes possible both, – a discreet lighting over a table or an artistic composition to smoothly light up vertical opened spaces.

POLAR DIAGRAM

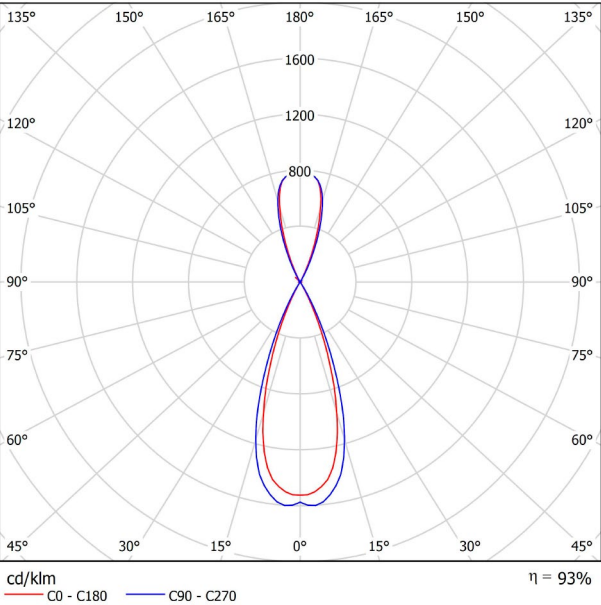


CONICAL DIAGRAM

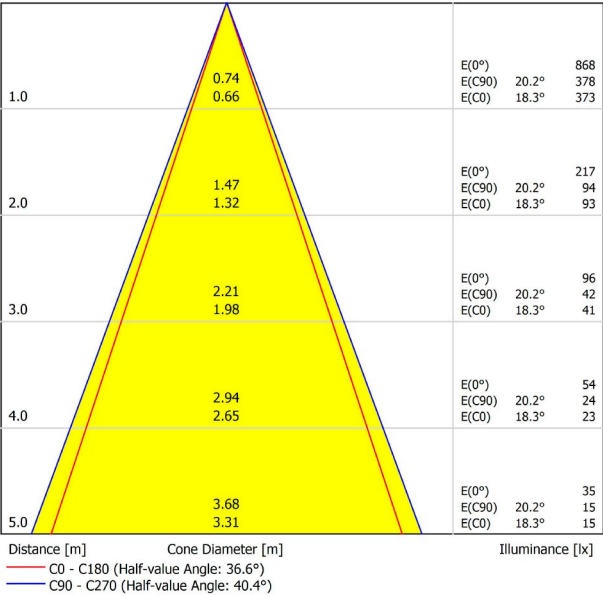



## DIMENSIONS

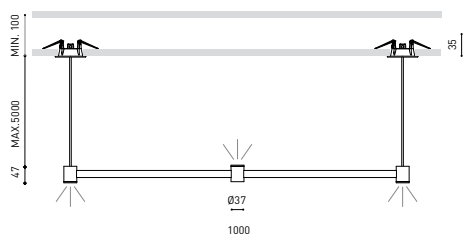

## AWARDS



## PRODUCT

|           |                                            |
|-----------|--------------------------------------------|
| Name      | ART DIRECT & INDIRECT 5M DIM DALI 2700K BG |
| Reference | A3430020BG                                 |
| Color     | Brushed Gold                               |
| RAL       | Paint of metallic nanoparticles            |
| Category  | SUSPENSION                                 |

## LIGHTING INFORMATION

|                             |                                                                                      |
|-----------------------------|--------------------------------------------------------------------------------------|
| Light source                | LED                                                                                  |
| Gross luminous flux         | 570 Lm                                                                               |
| Power                       | 6,3 W                                                                                |
| Power values of the system  | 7,68 W                                                                               |
| Colour temperature          | 2700 K - Other K, please consult                                                     |
| Colour Rendering Index      | CRI>90                                                                               |
| Chromatic stability         | MacAdam Step 3                                                                       |
| Light beam angle            | 35°                                                                                  |
| Lighting efficiency         | 93%                                                                                  |
| Efficacy                    | 90 Lm/W                                                                              |
| Current intensity           | 700 mA                                                                               |
| Dimming                     | DALI - Other DIM, please consult                                                     |
| Control through bluetooth   | Please Consult                                                                       |
| Driver                      | Included                                                                             |
| Electrical insulation class |  |
| Voltage                     | 220 V/240 V                                                                          |
| Frequency                   | 50/60 Hz                                                                             |
| Energy efficiency           | A+                                                                                   |
| LED lifespan                | L80B10 (Tc=85°C) >60.000h                                                            |


## OTHER DATA

|                           |                                                         |
|---------------------------|---------------------------------------------------------|
| Ingress Protection        | IP20                                                    |
| Recess measurements       | 2 x Ø50 mm.                                             |
| Cord length               | 5 m                                                     |
| Fast adjustment tensioner | No                                                      |
| Weight                    | 1445 g.                                                 |
| Packaged weight           | 1980 g.                                                 |
| Packaging dimensions      | Ø105 x 1080 mm                                          |
| Units per package         | 1                                                       |
| Materials                 | Brass / Acrylonitrile Butadiene Styrene + Polycarbonate |




Art is a minimalist and rational suspended luminaire that allows an ambitious range of composition possibilities. Individually, it transmits a sober look, but when combined – in an ordered or anarchic way – it is revealed as a sculptural piece of Art. This luminaire can offer ambient lighting in any kind of actual interior design project. Its versatility makes possible both, – a discreet lighting over a table or an artistic composition to smoothly light up vertical opened spaces.

POLAR DIAGRAM

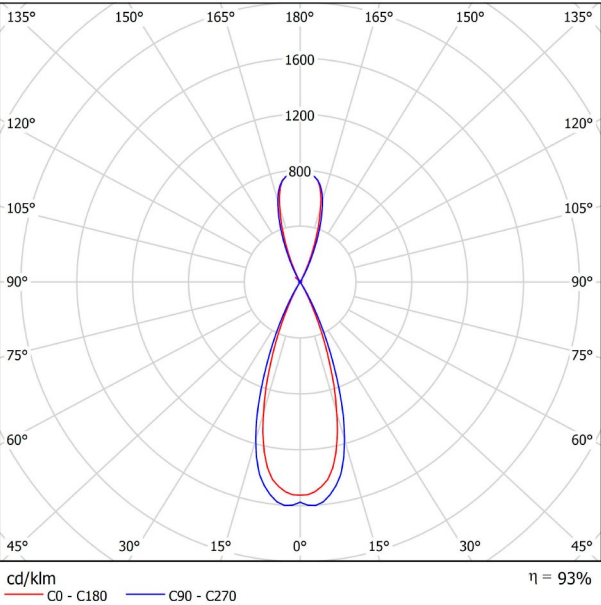


CONICAL DIAGRAM

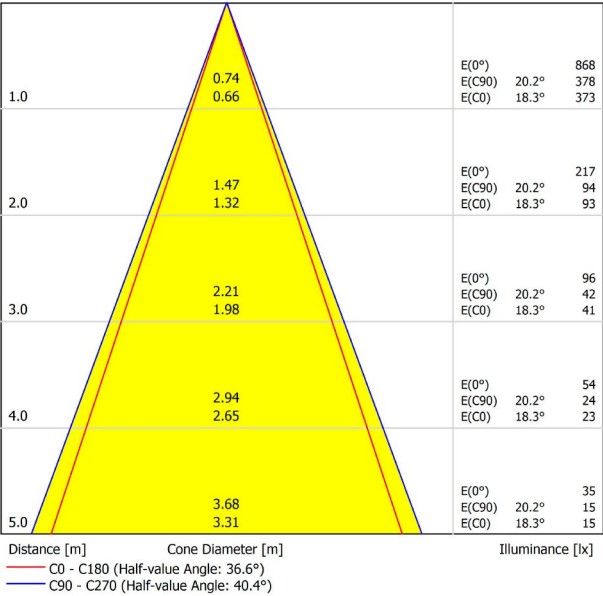



## DIMENSIONS

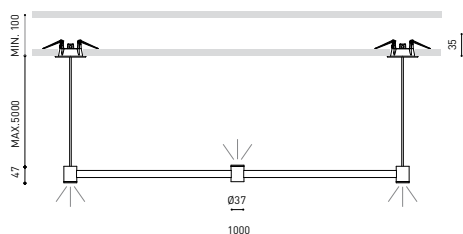

## AWARDS



## PRODUCT

|           |                                            |
|-----------|--------------------------------------------|
| Name      | ART DIRECT & INDIRECT 5M DIM DALI 2700K NT |
| Reference | A3430020NT                                 |
| Color     | Textured black                             |
| RAL       | 9005                                       |
| Category  | SUSPENSION                                 |

## LIGHTING INFORMATION

|                             |                                  |
|-----------------------------|----------------------------------|
| Light source                | LED                              |
| Gross luminous flux         | 570 Lm                           |
| Power                       | 6,3 W                            |
| Power values of the system  | 7,68 W                           |
| Colour temperature          | 2700 K - Other K, please consult |
| Colour Rendering Index      | CRI>90                           |
| Chromatic stability         | MacAdam Step 3                   |
| Light beam angle            | 35°                              |
| Lighting efficiency         | 93%                              |
| Efficacy                    | 90 Lm/W                          |
| Current intensity           | 700 mA                           |
| Dimming                     | DALI - Other DIM, please consult |
| Control through bluetooth   | Please Consult                   |
| Driver                      | Included                         |
| Electrical insulation class |                                  |
| Voltage                     | 220 V/240 V                      |
| Frequency                   | 50/60 Hz                         |
| Energy efficiency           | A+                               |
| LED lifespan                | L80B10 (Tc=85°C) >60.000h        |


## OTHER DATA

|                           |                                                         |
|---------------------------|---------------------------------------------------------|
| Ingress Protection        | IP20                                                    |
| Recess measurements       | 2 x Ø50 mm.                                             |
| Cord length               | 5 m                                                     |
| Fast adjustment tensioner | No                                                      |
| Weight                    | 1445 g.                                                 |
| Packaged weight           | 1980 g.                                                 |
| Packaging dimensions      | Ø105 x 1080 mm                                          |
| Units per package         | 1                                                       |
| Materials                 | Brass / Acrylonitrile Butadiene Styrene + Polycarbonate |




Art is a minimalist and rational suspended luminaire that allows an ambitious range of composition possibilities. Individually, it transmits a sober look, but when combined – in an ordered or anarchic way – it is revealed as a sculptural piece of Art. This luminaire can offer ambient lighting in any kind of actual interior design project. Its versatility makes possible both, – a discreet lighting over a table or an artistic composition to smoothly light up vertical opened spaces.

POLAR DIAGRAM

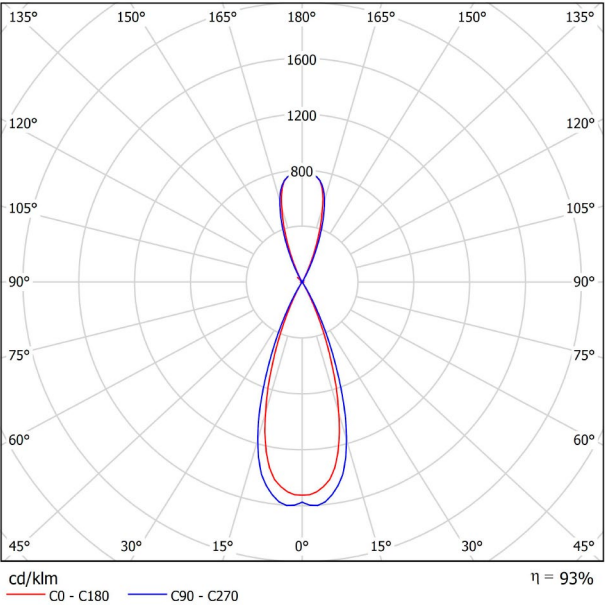


CONICAL DIAGRAM

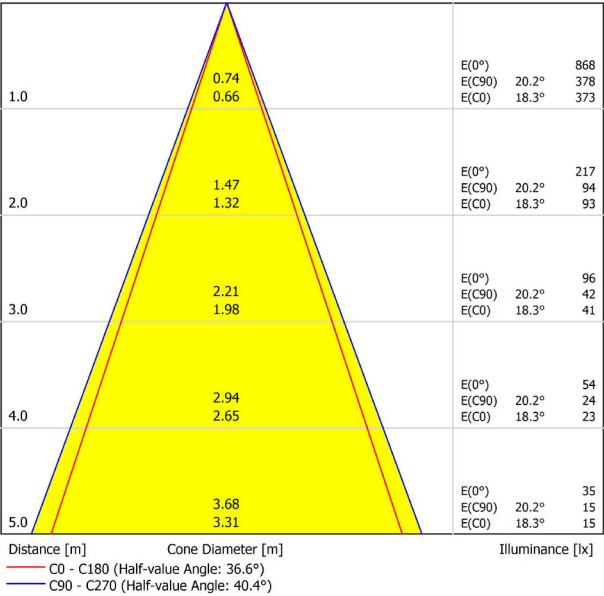



## DIMENSIONS

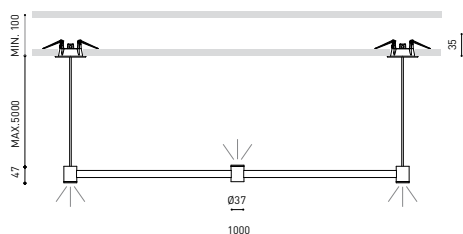

## AWARDS



## PRODUCT

|           |                                            |
|-----------|--------------------------------------------|
| Name      | ART DIRECT & INDIRECT 5M DIM DALI 2700K WT |
| Reference | A3430020WT                                 |
| Color     | Textured white                             |
| RAL       | 9016                                       |
| Category  | SUSPENSION                                 |

## LIGHTING INFORMATION

|                             |                                  |
|-----------------------------|----------------------------------|
| Light source                | LED                              |
| Gross luminous flux         | 570 Lm                           |
| Power                       | 6,3 W                            |
| Power values of the system  | 7,68 W                           |
| Colour temperature          | 2700 K - Other K, please consult |
| Colour Rendering Index      | CRI>90                           |
| Chromatic stability         | MacAdam Step 3                   |
| Light beam angle            | 35°                              |
| Lighting efficiency         | 93%                              |
| Efficacy                    | 90 Lm/W                          |
| Current intensity           | 700 mA                           |
| Dimming                     | DALI - Other DIM, please consult |
| Control through bluetooth   | Please Consult                   |
| Driver                      | Included                         |
| Electrical insulation class |                                  |
| Voltage                     | 220 V/240 V                      |
| Frequency                   | 50/60 Hz                         |
| Energy efficiency           | A+                               |
| LED lifespan                | L80B10 (Tc=85°C) >60.000h        |


## OTHER DATA

|                           |                                                         |
|---------------------------|---------------------------------------------------------|
| Ingress Protection        | IP20                                                    |
| Recess measurements       | 2 x Ø50 mm.                                             |
| Cord length               | 5 m                                                     |
| Fast adjustment tensioner | No                                                      |
| Weight                    | 1445 g.                                                 |
| Packaged weight           | 1980 g.                                                 |
| Packaging dimensions      | Ø105 x 1080 mm                                          |
| Units per package         | 1                                                       |
| Materials                 | Brass / Acrylonitrile Butadiene Styrene + Polycarbonate |





Art is a minimalist and rational suspended luminaire that allows an ambitious range of composition possibilities. Individually, it transmits a sober look, but when combined – in an ordered or anarchic way – it is revealed as a sculptural piece of Art. This luminaire can offer ambient lighting in any kind of actual interior design project. Its versatility makes possible both, – a discreet lighting over a table or an artistic composition to smoothly light up vertical opened spaces.

POLAR DIAGRAM

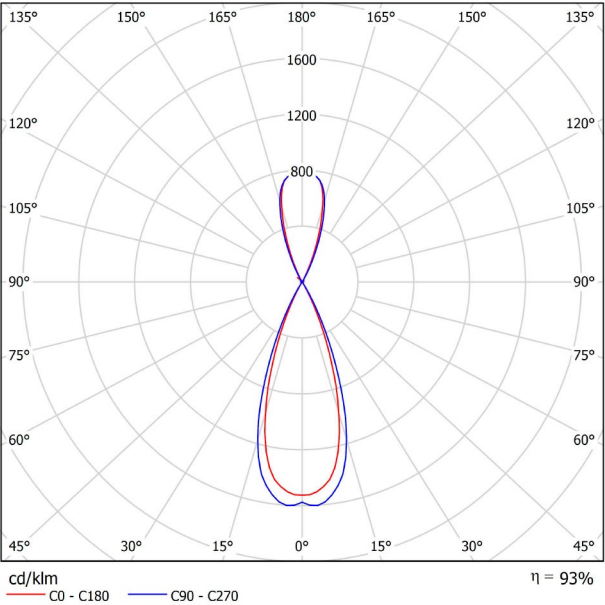


CONICAL DIAGRAM

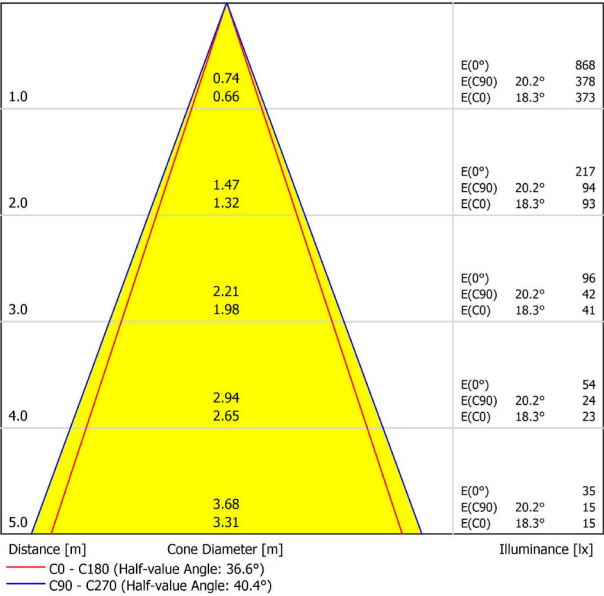



## DIMENSIONS

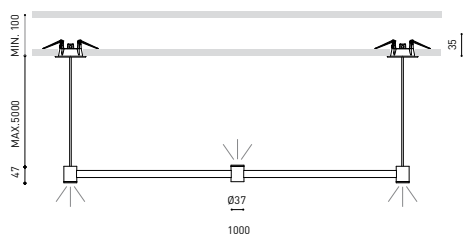

## AWARDS



## PRODUCT

|           |                                            |
|-----------|--------------------------------------------|
| Name      | ART DIRECT & INDIRECT 5M DIM DALI 3000K BC |
| Reference | A3430021BC                                 |
| Color     | Brushed Copper                             |
| RAL       | Paint of metallic nanoparticles            |
| Category  | SUSPENSION                                 |

## LIGHTING INFORMATION

|                             |                                  |
|-----------------------------|----------------------------------|
| Light source                | LED                              |
| Gross luminous flux         | 630 Lm                           |
| Power                       | 6,3 W                            |
| Power values of the system  | 7,68 W                           |
| Colour temperature          | 3000 K - Other K, please consult |
| Colour Rendering Index      | CRI>90                           |
| Chromatic stability         | MacAdam Step 3                   |
| Light beam angle            | 35°                              |
| Lighting efficiency         | 93%                              |
| Efficacy                    | 100 Lm/W                         |
| Current intensity           | 700 mA                           |
| Dimming                     | DALI - Other DIM, please consult |
| Control through bluetooth   | Please Consult                   |
| Driver                      | Included                         |
| Electrical insulation class | □                                |
| Voltage                     | 220 V/240 V                      |
| Frequency                   | 50/60 Hz                         |
| Energy efficiency           | A+                               |
| LED lifespan                | L80B10 (Tc=85°C) >60.000h        |


## OTHER DATA

|                           |                                                         |
|---------------------------|---------------------------------------------------------|
| Ingress Protection        | IP20                                                    |
| Recess measurements       | 2 x Ø50 mm.                                             |
| Cord length               | 5 m                                                     |
| Fast adjustment tensioner | No                                                      |
| Weight                    | 1445 g.                                                 |
| Packaged weight           | 1980 g.                                                 |
| Packaging dimensions      | Ø105 x 1080 mm                                          |
| Units per package         | 1                                                       |
| Materials                 | Brass / Acrylonitrile Butadiene Styrene + Polycarbonate |




Art is a minimalist and rational suspended luminaire that allows an ambitious range of composition possibilities. Individually, it transmits a sober look, but when combined – in an ordered or anarchic way – it is revealed as a sculptural piece of Art. This luminaire can offer ambient lighting in any kind of actual interior design project. Its versatility makes possible both, – a discreet lighting over a table or an artistic composition to smoothly light up vertical opened spaces.

POLAR DIAGRAM

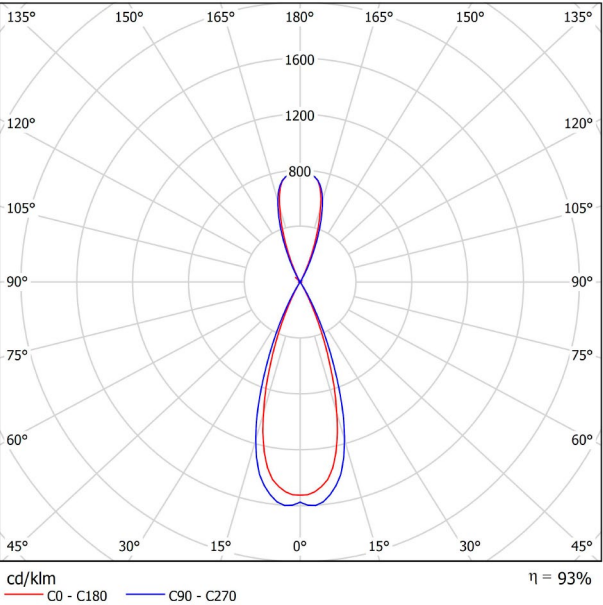


CONICAL DIAGRAM

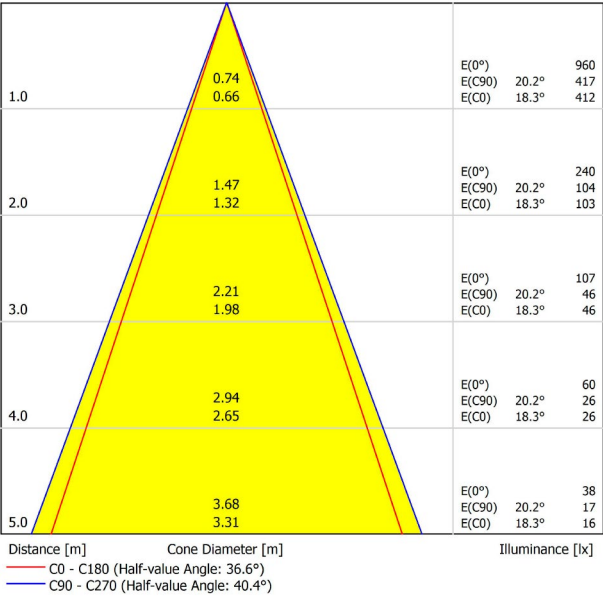



## DIMENSIONS

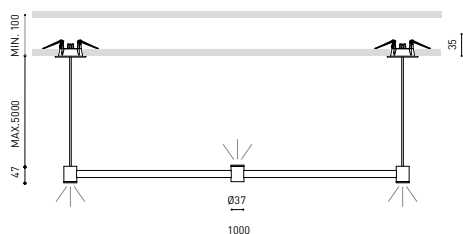

## AWARDS



## PRODUCT

|           |                                            |
|-----------|--------------------------------------------|
| Name      | ART DIRECT & INDIRECT 5M DIM DALI 3000K BG |
| Reference | A3430021BG                                 |
| Color     | Brushed Gold                               |
| RAL       | Paint of metallic nanoparticles            |
| Category  | SUSPENSION                                 |

## LIGHTING INFORMATION

|                             |                                                                                      |
|-----------------------------|--------------------------------------------------------------------------------------|
| Light source                | LED                                                                                  |
| Gross luminous flux         | 630 Lm                                                                               |
| Power                       | 6,3 W                                                                                |
| Power values of the system  | 7,68 W                                                                               |
| Colour temperature          | 3000 K - Other K, please consult                                                     |
| Colour Rendering Index      | CRI>90                                                                               |
| Chromatic stability         | MacAdam Step 3                                                                       |
| Light beam angle            | 35°                                                                                  |
| Lighting efficiency         | 93%                                                                                  |
| Efficacy                    | 100 Lm/W                                                                             |
| Current intensity           | 700 mA                                                                               |
| Dimming                     | DALI - Other DIM, please consult                                                     |
| Control through bluetooth   | Please Consult                                                                       |
| Driver                      | Included                                                                             |
| Electrical insulation class |  |
| Voltage                     | 220 V/240 V                                                                          |
| Frequency                   | 50/60 Hz                                                                             |
| Energy efficiency           | A+                                                                                   |
| LED lifespan                | L80B10 (Tc=85°C) >60.000h                                                            |


## OTHER DATA

|                           |                                                         |
|---------------------------|---------------------------------------------------------|
| Ingress Protection        | IP20                                                    |
| Recess measurements       | 2 x Ø50 mm.                                             |
| Cord length               | 5 m                                                     |
| Fast adjustment tensioner | No                                                      |
| Weight                    | 1445 g.                                                 |
| Packaged weight           | 1980 g.                                                 |
| Packaging dimensions      | Ø105 x 1080 mm                                          |
| Units per package         | 1                                                       |
| Materials                 | Brass / Acrylonitrile Butadiene Styrene + Polycarbonate |




Art is a minimalist and rational suspended luminary that allows an ambitious range of composition possibilities. Individually, it transmits a sober look, but when combined – in an ordered or anarchic way – it is revealed as a sculptural piece of Art. This luminary can offer ambient lighting in any kind of actual interior design project. Its versatility makes possible both, – a discreet lighting over a table or an artistic composition to smoothly light up vertical opened spaces.

POLAR DIAGRAM

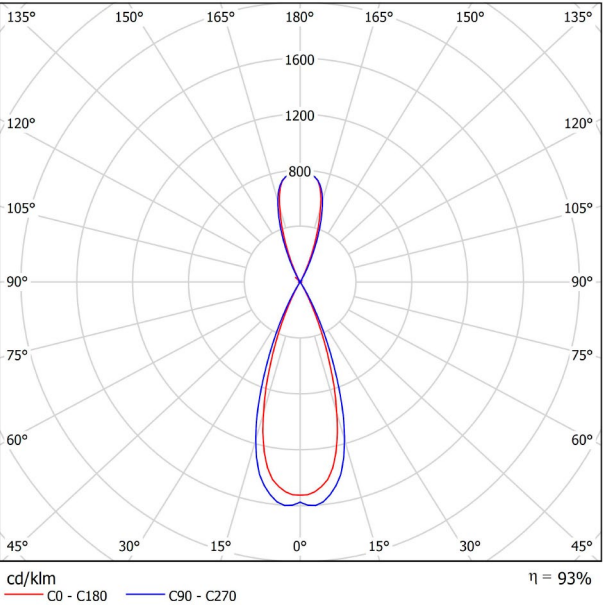


CONICAL DIAGRAM

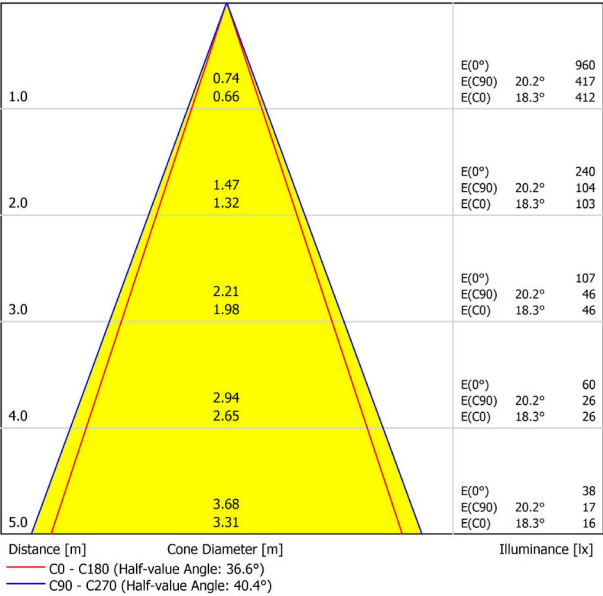



## DIMENSIONS

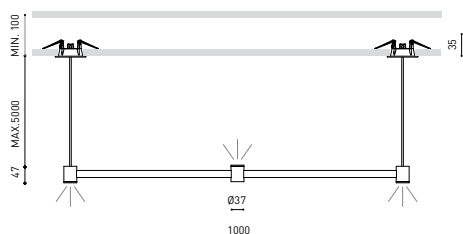

## AWARDS



## PRODUCT

|           |                                            |
|-----------|--------------------------------------------|
| Name      | ART DIRECT & INDIRECT 5M DIM DALI 3000K NT |
| Reference | A3430021NT                                 |
| Color     | Textured black                             |
| RAL       | 9005                                       |
| Category  | SUSPENSION                                 |

## LIGHTING INFORMATION

|                             |                                  |
|-----------------------------|----------------------------------|
| Light source                | LED                              |
| Gross luminous flux         | 630 Lm                           |
| Power                       | 6,3 W                            |
| Power values of the system  | 7,68 W                           |
| Colour temperature          | 3000 K - Other K, please consult |
| Colour Rendering Index      | CRI>90                           |
| Chromatic stability         | MacAdam Step 3                   |
| Light beam angle            | 35°                              |
| Lighting efficiency         | 93%                              |
| Efficacy                    | 100 Lm/W                         |
| Current intensity           | 700 mA                           |
| Dimming                     | DALI - Other DIM, please consult |
| Control through bluetooth   | Please Consult                   |
| Driver                      | Included                         |
| Electrical insulation class | □                                |
| Voltage                     | 220 V/240 V                      |
| Frequency                   | 50/60 Hz                         |
| Energy efficiency           | A+                               |
| LED lifespan                | L80B10 (Tc=85°C) >60.000h        |


## OTHER DATA

|                           |                                                         |
|---------------------------|---------------------------------------------------------|
| Ingress Protection        | IP20                                                    |
| Recess measurements       | 2 x Ø50 mm.                                             |
| Cord length               | 5 m                                                     |
| Fast adjustment tensioner | No                                                      |
| Weight                    | 1445 g.                                                 |
| Packaged weight           | 1980 g.                                                 |
| Packaging dimensions      | Ø105 x 1080 mm                                          |
| Units per package         | 1                                                       |
| Materials                 | Brass / Acrylonitrile Butadiene Styrene + Polycarbonate |




Art is a minimalist and rational suspended luminaire that allows an ambitious range of composition possibilities. Individually, it transmits a sober look, but when combined – in an ordered or anarchic way – it is revealed as a sculptural piece of Art. This luminaire can offer ambient lighting in any kind of actual interior design project. Its versatility makes possible both, – a discreet lighting over a table or an artistic composition to smoothly light up vertical opened spaces.

POLAR DIAGRAM

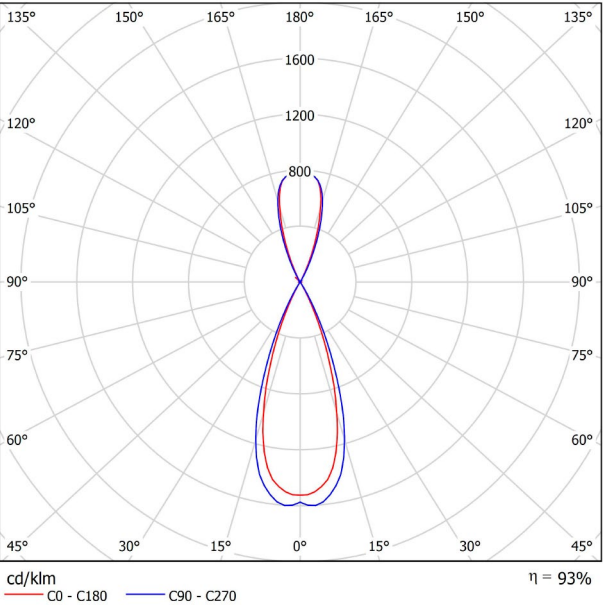


CONICAL DIAGRAM

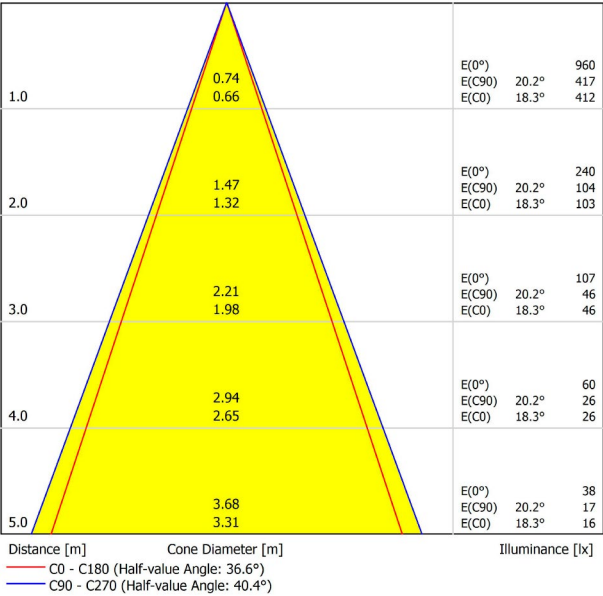



## DIMENSIONS

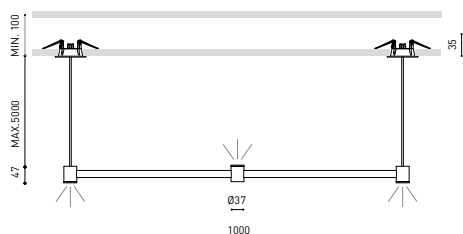

## AWARDS



## PRODUCT

|           |                                            |
|-----------|--------------------------------------------|
| Name      | ART DIRECT & INDIRECT 5M DIM DALI 3000K WT |
| Reference | A3430021WT                                 |
| Color     | Textured white                             |
| RAL       | 9016                                       |
| Category  | SUSPENSION                                 |

## LIGHTING INFORMATION

|                             |                                                                                      |
|-----------------------------|--------------------------------------------------------------------------------------|
| Light source                | LED                                                                                  |
| Gross luminous flux         | 630 Lm                                                                               |
| Power                       | 6,3 W                                                                                |
| Power values of the system  | 7,68 W                                                                               |
| Colour temperature          | 3000 K - Other K, please consult                                                     |
| Colour Rendering Index      | CRI>90                                                                               |
| Chromatic stability         | MacAdam Step 3                                                                       |
| Light beam angle            | 35°                                                                                  |
| Lighting efficiency         | 93%                                                                                  |
| Efficacy                    | 100 Lm/W                                                                             |
| Current intensity           | 700 mA                                                                               |
| Dimming                     | DALI - Other DIM, please consult                                                     |
| Control through bluetooth   | Please Consult                                                                       |
| Driver                      | Included                                                                             |
| Electrical insulation class |  |
| Voltage                     | 220 V/240 V                                                                          |
| Frequency                   | 50/60 Hz                                                                             |
| Energy efficiency           | A+                                                                                   |
| LED lifespan                | L80B10 (Tc=85°C) >60.000h                                                            |


## OTHER DATA

|                           |                                                         |
|---------------------------|---------------------------------------------------------|
| Ingress Protection        | IP20                                                    |
| Recess measurements       | 2 x Ø50 mm.                                             |
| Cord length               | 5 m                                                     |
| Fast adjustment tensioner | No                                                      |
| Weight                    | 1445 g.                                                 |
| Packaged weight           | 1980 g.                                                 |
| Packaging dimensions      | Ø105 x 1080 mm                                          |
| Units per package         | 1                                                       |
| Materials                 | Brass / Acrylonitrile Butadiene Styrene + Polycarbonate |



Art is a minimalist and rational suspended luminaire that allows an ambitious range of composition possibilities. Individually, it transmits a sober look, but when combined – in an ordered or anarchic way – it is revealed as a sculptural piece of Art. This luminaire can offer ambient lighting in any kind of actual interior design project. Its versatility makes possible both, – a discreet lighting over a table or an artistic composition to smoothly light up vertical opened spaces.

POLAR DIAGRAM

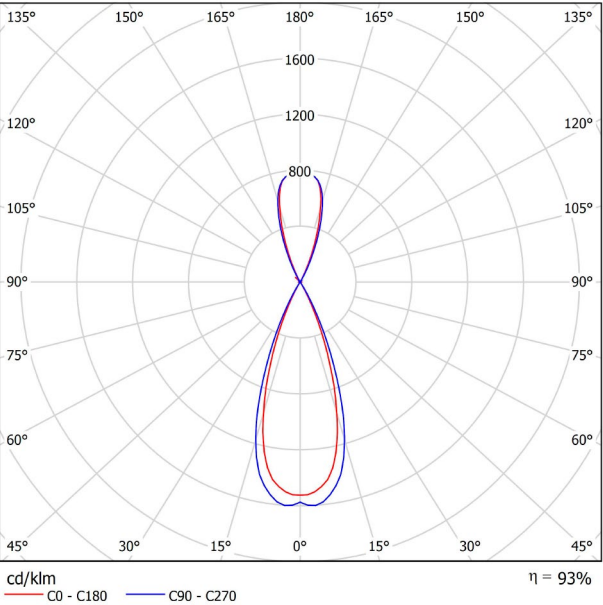

CONICAL DIAGRAM

