



MINIMAL TRACK SUSPENSION



MINIMAL TRACK 24V Suspension

Profile 2m	A384-02-00-	N
Profile 2m Initial feed kit	A400-02-10-	N
Profile 2m Middle feed kit*	A400-02-20-	N

* Unidirectional Middle Feed.




MINIMAL TRACK 24V Suspension Straight Joiner

A400-00-02- | N |



MINIMAL TRACK 24V Suspension Corner 90°

A400-00-03- | N |



Cable Length = 85mm.

MINIMAL TRACK 24V Suspension


Rubber Cable n x 1m A400-00-01- | N |

n = Total Length of System.

24 V | Max. 4A  

MINIMAL TRACK 24V Suspension Kit

A400-02-04- | N |



MINIMAL TRACK 24V Suspension End Caps

A400-00-05- | N |

Two End Caps Included



MINIMAL TRACK 24V Suspension Power Supply Box

ON/OFF

A400-00-06- | N |
A400-00-07- | N |

P

V

D (A x B x C)

40W

24V

280 x 30 x 24mm

100W

24V

280 x 30 x 24mm

Included ON/OFF 24Vdc Power Supply

MINIMAL TRACK 24V Remote Power Supply

ON/OFF

0434-01-37
0433-10-22

60W


24V

180 x 52 x 30mm

100W



24V

295 x 43 x 30mm



DROP VOLTAGE TABLE

		CABLE LENGTH (m)			
		<5	<10	<20	<30
POWER [W]	CABLE SECTION (mm ²)	TRACK LENGTH (m)			
		30	30	30	30
40	0,75	30	30	30	30
	1,5	30	30	30	30
60	0,75	30	30	20	10
	1,5	30	30	30	20
100	0,75	20	10	X	X
	1,5	20	20	10	X

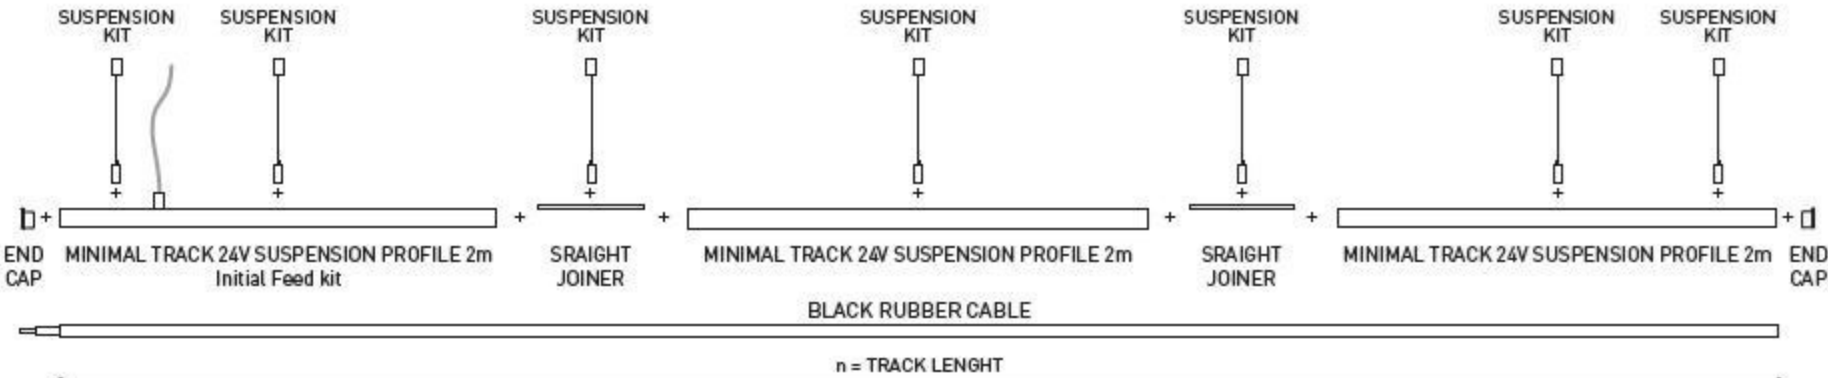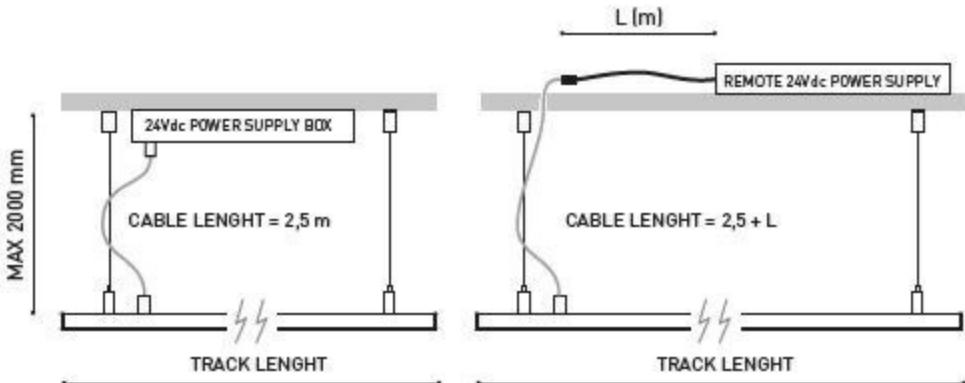



				P	CCT	BEAM	I	Flux	LOR
SIX XS 24V	A389-00-10-	WT	NT	3,5W	2700K	17°	400mA	400Lm	90%
	A389-00-11-	WT	NT	3,5W	3000K	17°	400mA	420Lm	90%
	A389-00-12-	WT	NT	3,5W	4000K	17°	400mA	450Lm	90%
	A389-00-20-	WT	NT	3,5W	2700K	23°	400mA	400Lm	86%
	A389-00-21-	WT	NT	3,5W	3000K	23°	400mA	420Lm	86%
	A389-00-22-	WT	NT	3,5W	4000K	23°	400mA	450Lm	86%
	A389-00-30-	WT	NT	3,5W	2700K	34°	400mA	400Lm	88%
	A389-00-31-	WT	NT	3,5W	3000K	34°	400mA	420Lm	88%
	A389-00-32-	WT	NT	3,5W	4000K	34°	400mA	450Lm	88%



24V



IP20

CRI>90


L80B10
> 60.000h



MINIMAL
TRACK



SIX XS 24V

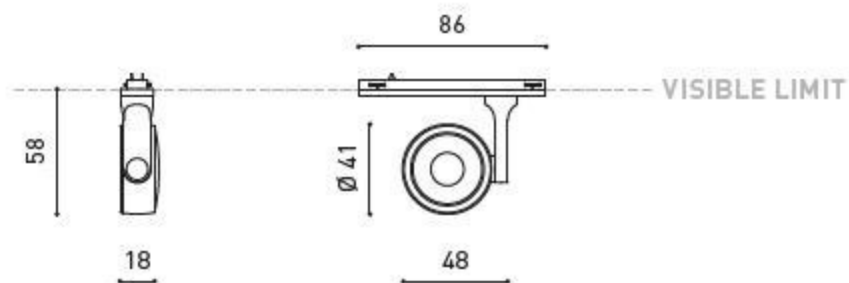

ACCESSORY

SIX High Chromatic LED

ACCESSORY & COLOURS AFFECT THE LIGHTING PARAMETERS
NOT SOLD SEPARATELY

