




DIMENSIONS



AWARDS

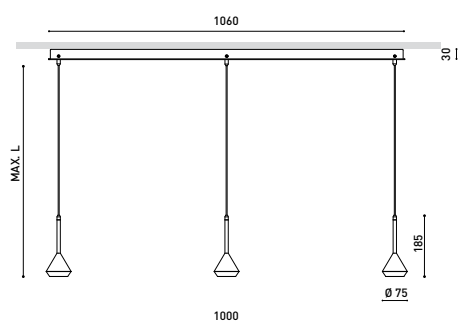

Name	SPIN 3 SURFACE 3M 24° DIM DALI 4000K NT-NT
Reference	A3911202NTNT
Color	Textured black
RAL	9005
Category	SURFACE

PRODUCT

Light source	LED
Gross luminous flux	3 x 680 Lm
Power	3 x 6,5 W
Power values of the system	23,78 W
Colour temperature	4000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	24°
Lighting efficiency	86%
Efficacy	105 Lm/W
Current intensity	700 mA
Dimming	DALI - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


OTHER DATA

Ingress Protection	IP20
Cord length	3 m
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Reduced dimensions, clear lines and a mechanized geometry combined in a pendant luminaire for accent lighting. Its ultra-thin cable gives Spin a sensation of aerial floatability.

POLAR DIAGRAM

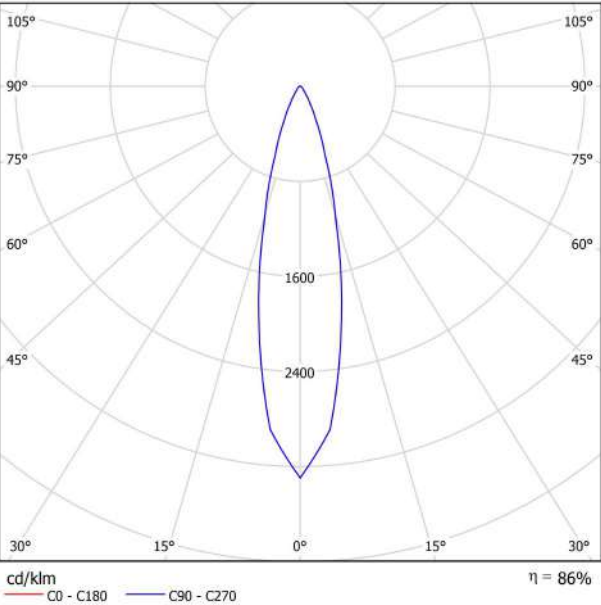


CONICAL DIAGRAM

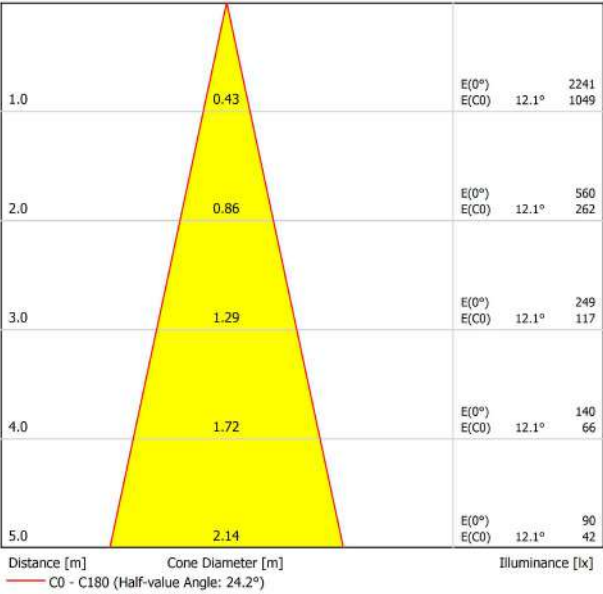



DIMENSIONS

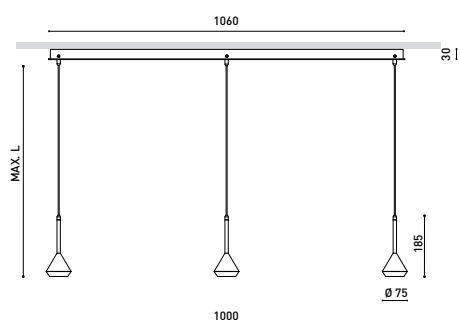

AWARDS



Name	SPIN 3 SURFACE 3M 24° DIM DALI 4000K NT-WT
Reference	A3911202NTWT
Color	Textured black
RAL	9005
Category	SURFACE

PRODUCT

Light source	LED
Gross luminous flux	3 x 680 Lm
Power	3 x 6,5 W
Power values of the system	23,78 W
Colour temperature	4000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	24°
Lighting efficiency	86%
Efficacy	105 Lm/W
Current intensity	700 mA
Dimming	DALI - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


OTHER DATA

Ingress Protection	IP20
Cord length	3 m
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Reduced dimensions, clear lines and a mechanized geometry combined in a pendant luminaire for accent lighting. Its ultra-thin cable gives Spin a sensation of aerial floatability.

POLAR DIAGRAM

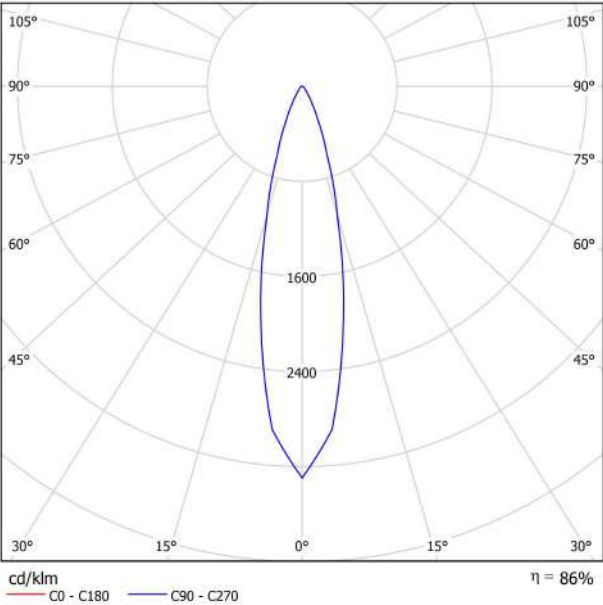


CONICAL DIAGRAM

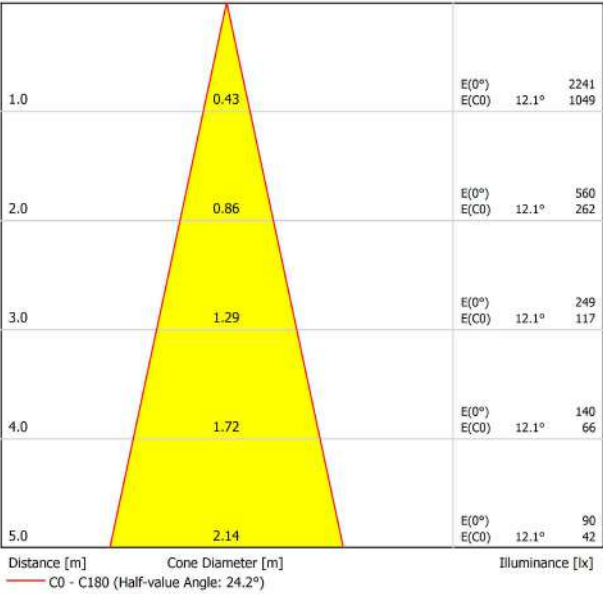



DIMENSIONS

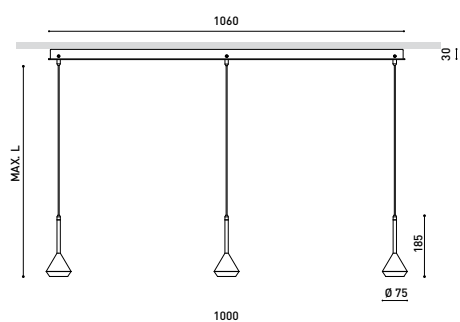

AWARDS



Name	SPIN 3 SURFACE 3M 24° DIM DALI 4000K WT-NT
Reference	A3911202WTNT
Color	Textured white
RAL	9016
Category	SURFACE

PRODUCT

LIGHTING INFORMATION

LED

3 x 680 Lm

3 x 6,5 W

23,78 W

4000 K

CRI>90

MacAdam Step 2

24°

86%

105 Lm/W

700 mA

DALI - Other DIM, please consult

Please Consult

Included

☐

220 V/240 V

50/60 Hz

A+

L80B10 (Tc=85°C) >60.000h

OTHER DATA

IP20

3 m

No

4150 g.

4577 g.

1078 x 139 x 89 mm


1

Aluminium / Polymethyl Methacrylate




Reduced dimensions, clear lines and a mechanized geometry combined in a pendant luminaire for accent lighting. Its ultra-thin cable gives Spin a sensation of aerial floatability.

POLAR DIAGRAM

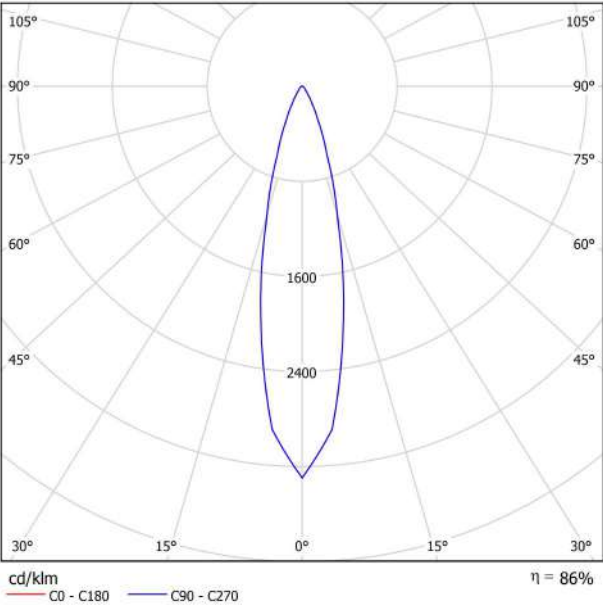


CONICAL DIAGRAM

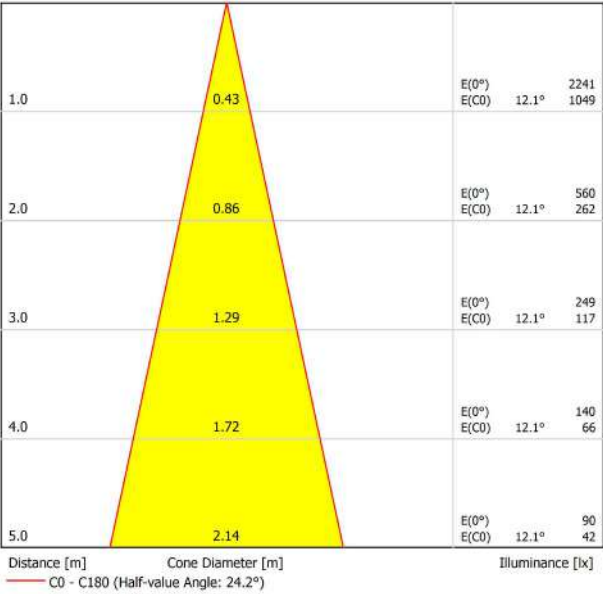



DIMENSIONS

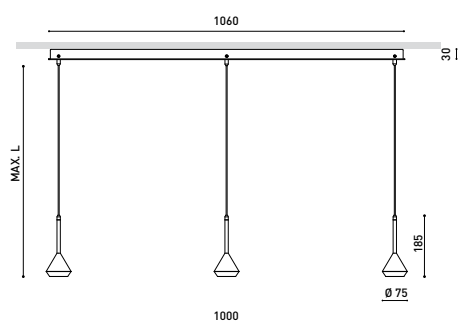

AWARDS



Name	SPIN 3 SURFACE 3M 24° DIM DALI 4000K WT-WT
Reference	A3911202WTWT
Color	Textured white
RAL	9016
Category	SURFACE

PRODUCT

Light source	LED
Gross luminous flux	3 x 680 Lm
Power	3 x 6,5 W
Power values of the system	23,78 W
Colour temperature	4000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	24°
Lighting efficiency	86%
Efficacy	105 Lm/W
Current intensity	700 mA
Dimming	DALI - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Cord length	3 m
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Reduced dimensions, clear lines and a mechanized geometry combined in a pendant luminaire for accent lighting. Its ultra-thin cable gives Spin a sensation of aerial floatability.

POLAR DIAGRAM

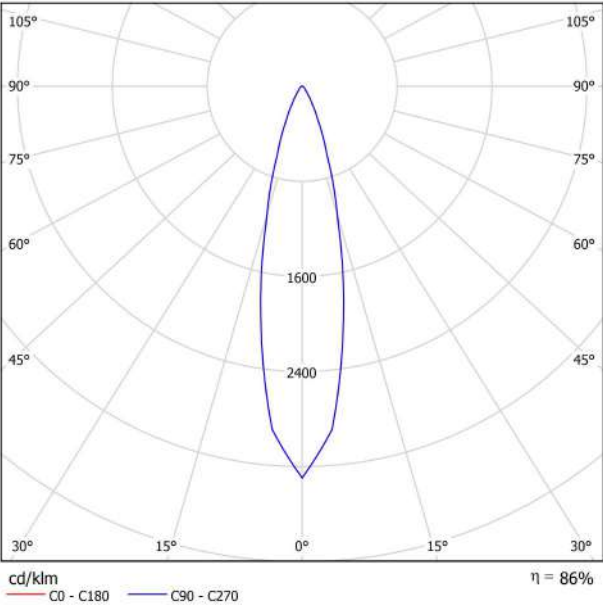


CONICAL DIAGRAM

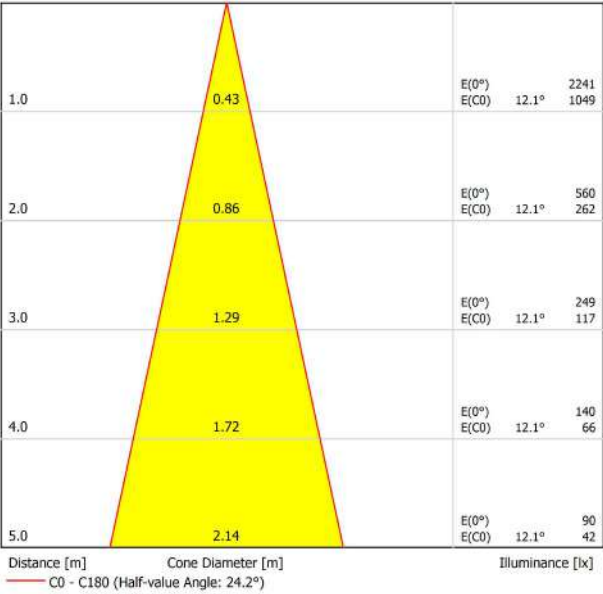



DIMENSIONS

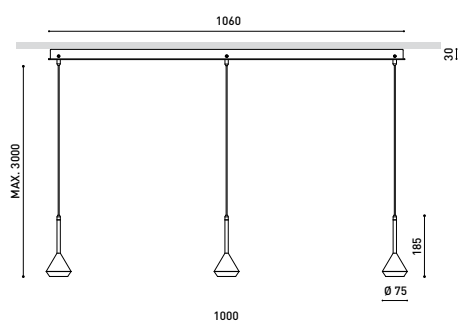

AWARDS



Name	SPIN 3 SURFACE 3M 40° DIM DALI 2700K MC-NT
Reference	A3911210MCNT
Color	Metallized copper
RAL	Electrolytic bath
Category	SUSPENSION

PRODUCT

Light source	LED
Gross luminous flux	3 x 600 Lm
Power	3 x 6,5 W
Power values of the system	23,78 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	40°
Lighting efficiency	84%
Efficacy	92 Lm/W
Current intensity	700 mA
Dimming	DALI - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


OTHER DATA

Ingress Protection	IP20
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Spin Surface is a version that allows it to be installed in places where it is impossible to access the false ceiling. Cement, concrete, vault ... its base, set to apply three luminaires, houses the driver and allows the luminaire to be installed on all types of surfaces.

POLAR DIAGRAM

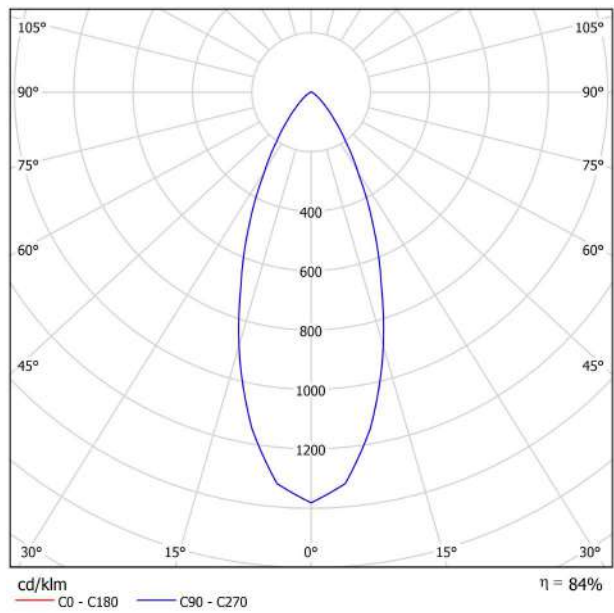


CONICAL DIAGRAM

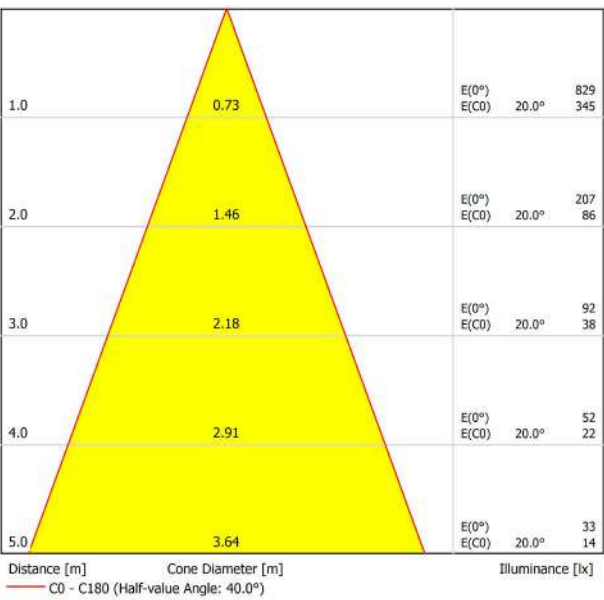



DIMENSIONS

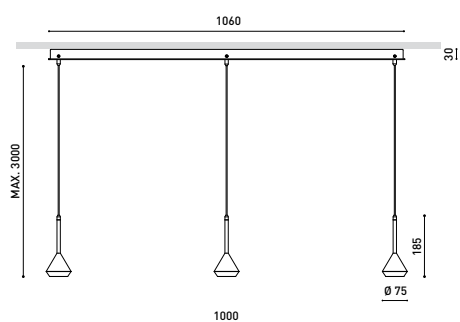

AWARDS



Name	SPIN 3 SURFACE 3M 40° DIM DALI 2700K MC-WT
Reference	A3911210MCWT
Color	Metallized copper
RAL	Electrolytic bath
Category	SUSPENSION

PRODUCT

Light source	LED
Gross luminous flux	3 x 600 Lm
Power	3 x 6,5 W
Power values of the system	23,78 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	40°
Lighting efficiency	84%
Efficacy	92 Lm/W
Current intensity	700 mA
Dimming	DALI - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


OTHER DATA

Ingress Protection	IP20
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Spin Surface is a version that allows it to be installed in places where it is impossible to access the false ceiling. Cement, concrete, vault ... its base, set to apply three luminaires, houses the driver and allows the luminaire to be installed on all types of surfaces.

POLAR DIAGRAM

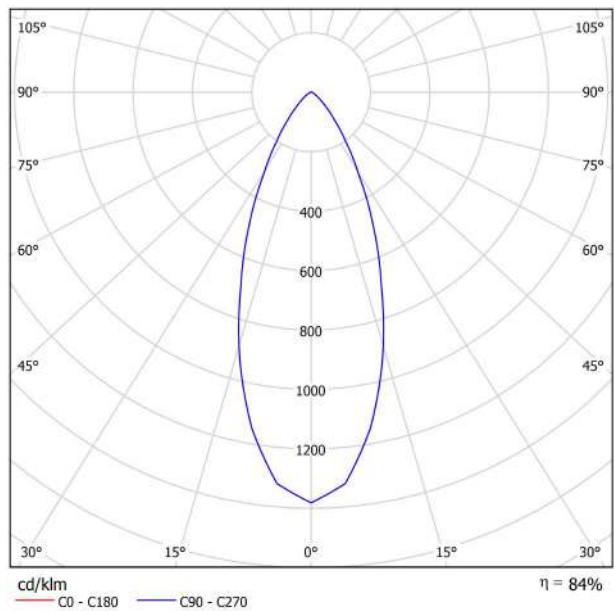


CONICAL DIAGRAM

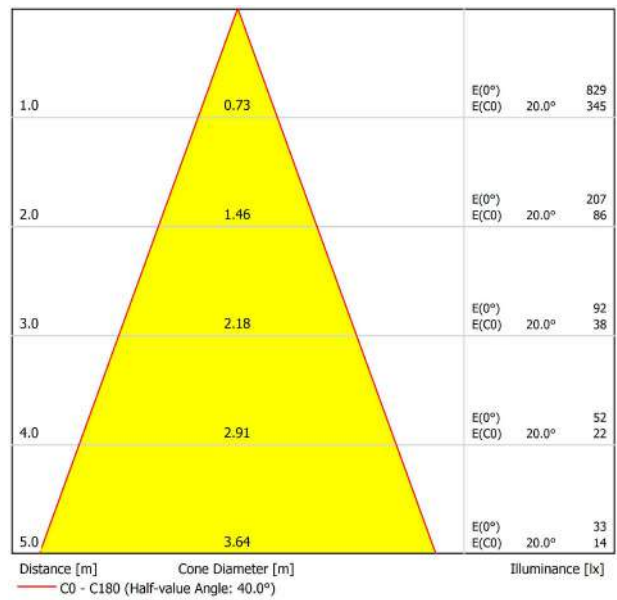



DIMENSIONS

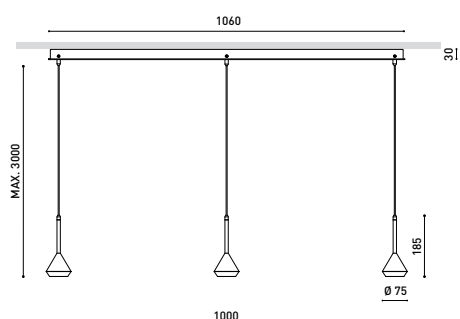

AWARDS



Name	SPIN 3 SURFACE 3M 40° DIM DALI 2700K MG-NT
Reference	A3911210MGNT
Color	Metallized gold
RAL	Electrolytic bath
Category	SUSPENSION

PRODUCT

Light source	LED
Gross luminous flux	3 x 600 Lm
Power	3 x 6,5 W
Power values of the system	23,78 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	40°
Lighting efficiency	84%
Efficacy	92 Lm/W
Current intensity	700 mA
Dimming	DALI - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


OTHER DATA

Ingress Protection	IP20
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Spin Surface is a version that allows it to be installed in places where it is impossible to access the false ceiling. Cement, concrete, vault ... its base, set to apply three luminaires, houses the driver and allows the luminaire to be installed on all types of surfaces.

POLAR DIAGRAM

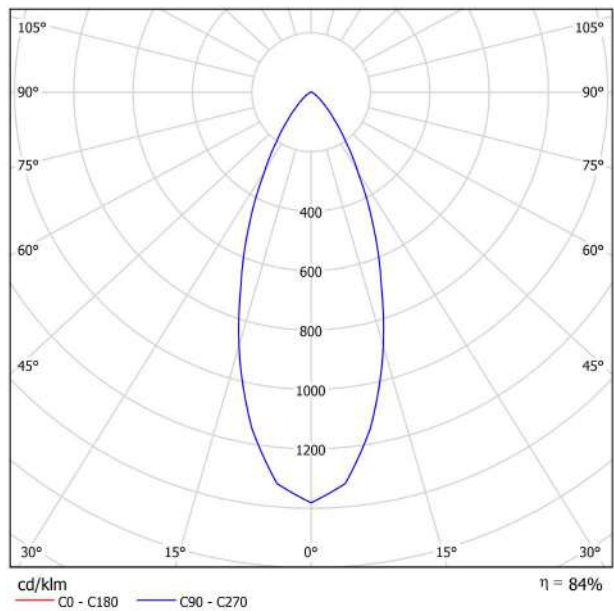


CONICAL DIAGRAM

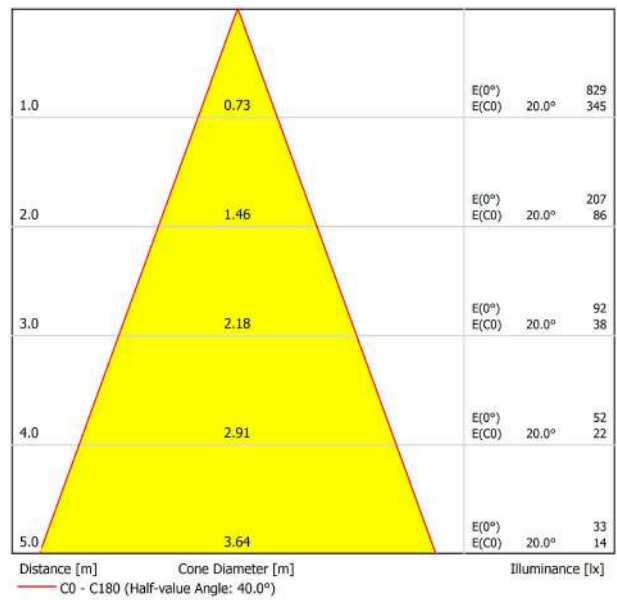



DIMENSIONS

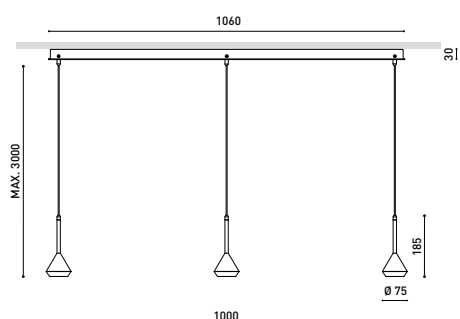

AWARDS



Name	SPIN 3 SURFACE 3M 40° DIM DALI 2700K MG-WT
Reference	A3911210MGWT
Color	Metallized gold
RAL	Electrolytic bath
Category	SUSPENSION

PRODUCT

Light source	LED
Gross luminous flux	3 x 600 Lm
Power	3 x 6,5 W
Power values of the system	23,78 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	40°
Lighting efficiency	84%
Efficacy	92 Lm/W
Current intensity	700 mA
Dimming	DALI - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


OTHER DATA

Ingress Protection	IP20
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Spin Surface is a version that allows it to be installed in places where it is impossible to access the false ceiling. Cement, concrete, vault ... its base, set to apply three luminaires, houses the driver and allows the luminaire to be installed on all types of surfaces.

POLAR DIAGRAM

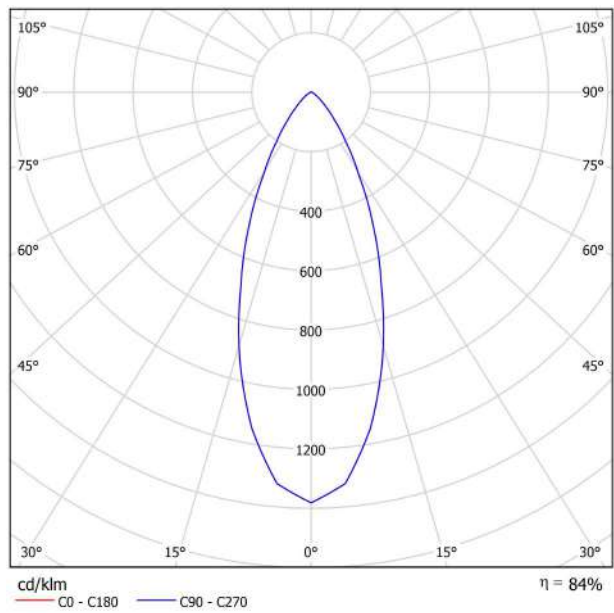


CONICAL DIAGRAM

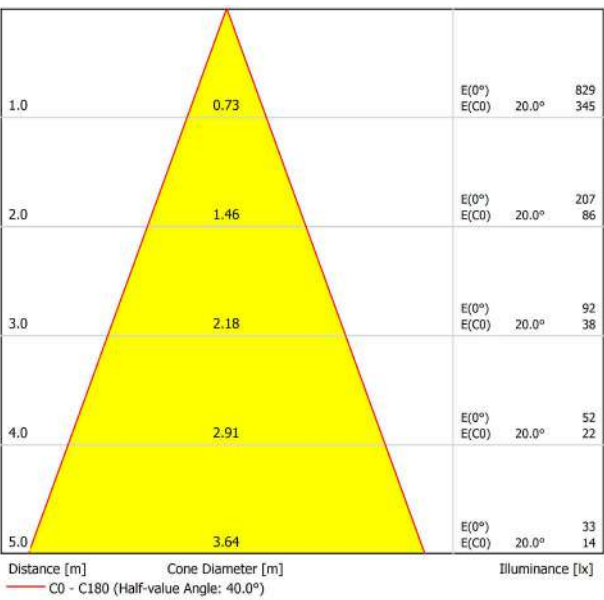



DIMENSIONS

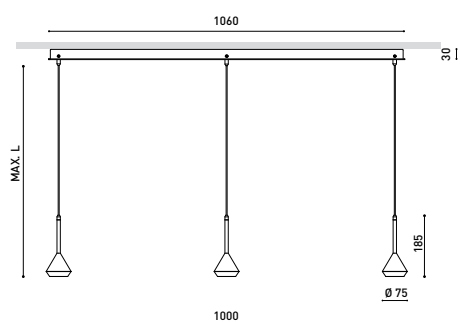

AWARDS



Name	SPIN 3 SURFACE 3M 40° DIM DALI 2700K NT-NT
Reference	A3911210NTNT
Color	Textured black
RAL	9005
Category	SURFACE

PRODUCT

Light source	LED
Gross luminous flux	3 x 600 Lm
Power	3 x 6,5 W
Power values of the system	23,78 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	40°
Lighting efficiency	84%
Efficacy	92 Lm/W
Current intensity	700 mA
Dimming	DALI - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Cord length	3 m
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Reduced dimensions, clear lines and a mechanized geometry combined in a pendant luminaire for accent lighting. Its ultra-thin cable gives Spin a sensation of aerial floatability.

POLAR DIAGRAM

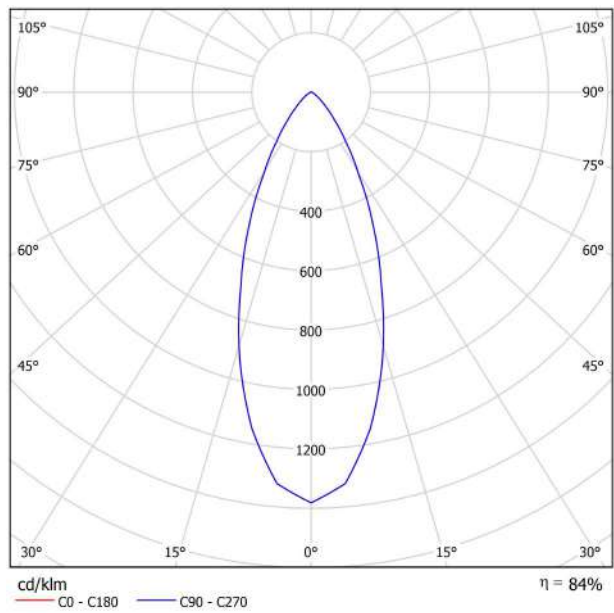


CONICAL DIAGRAM

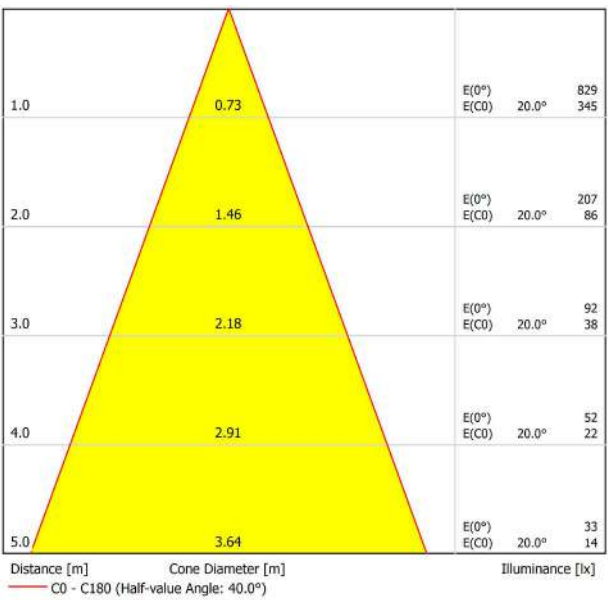



DIMENSIONS

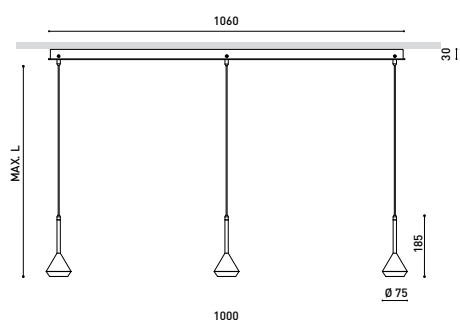

AWARDS



Name	SPIN 3 SURFACE 3M 40° DIM DALI 2700K NT-WT
Reference	A3911210NTWT
Color	Textured black
RAL	9005
Category	SURFACE

PRODUCT

Light source	LED
Gross luminous flux	3 x 600 Lm
Power	3 x 6,5 W
Power values of the system	23,78 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	40°
Lighting efficiency	84%
Efficacy	92 Lm/W
Current intensity	700 mA
Dimming	DALI - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Cord length	3 m
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Reduced dimensions, clear lines and a mechanized geometry combined in a pendant luminaire for accent lighting. Its ultra-thin cable gives Spin a sensation of aerial floatability.

POLAR DIAGRAM

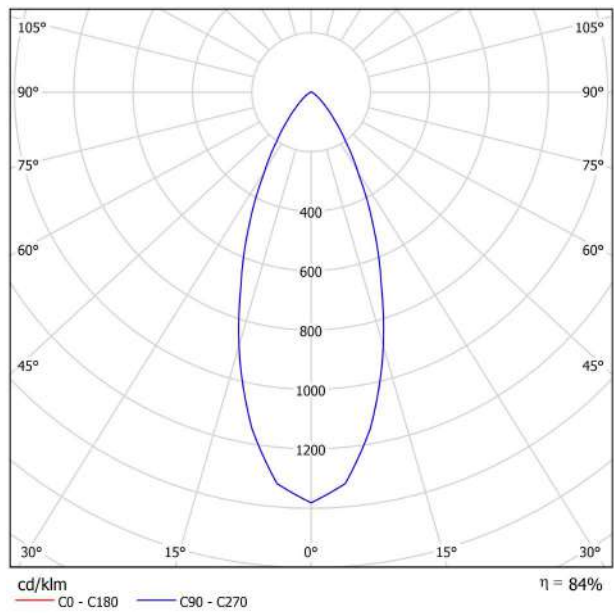


CONICAL DIAGRAM

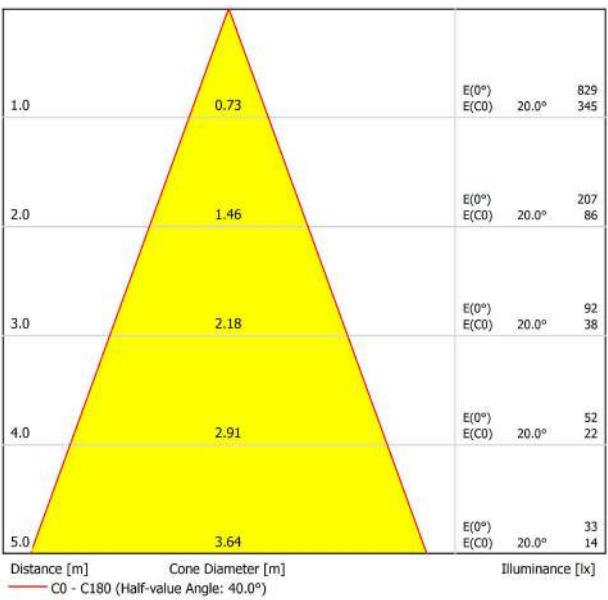



DIMENSIONS

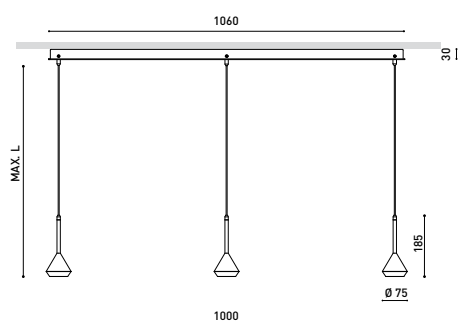

AWARDS



Name	SPIN 3 SURFACE 3M 40° DIM DALI 2700K WT-NT
Reference	A3911210WTNT
Color	Textured white
RAL	9016
Category	SURFACE

PRODUCT

Light source	LED
Gross luminous flux	3 x 600 Lm
Power	3 x 6,5 W
Power values of the system	23,78 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	40°
Lighting efficiency	84%
Efficacy	92 Lm/W
Current intensity	700 mA
Dimming	DALI - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


OTHER DATA

Ingress Protection	IP20
Cord length	3 m
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Reduced dimensions, clear lines and a mechanized geometry combined in a pendant luminaire for accent lighting. Its ultra-thin cable gives Spin a sensation of aerial floatability.

POLAR DIAGRAM

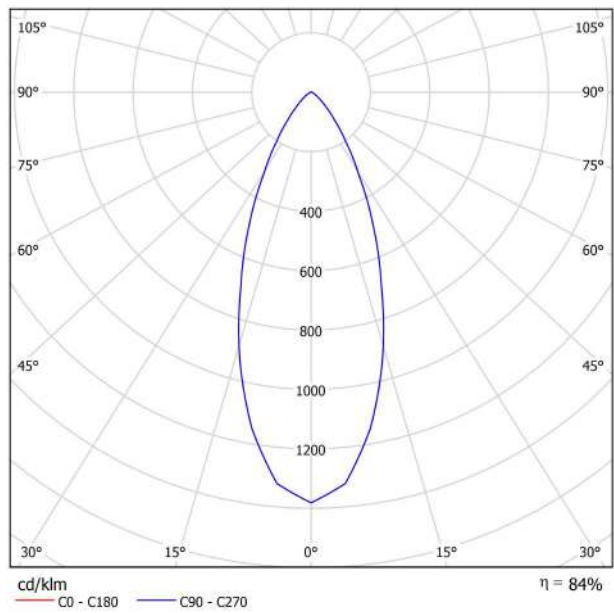


CONICAL DIAGRAM

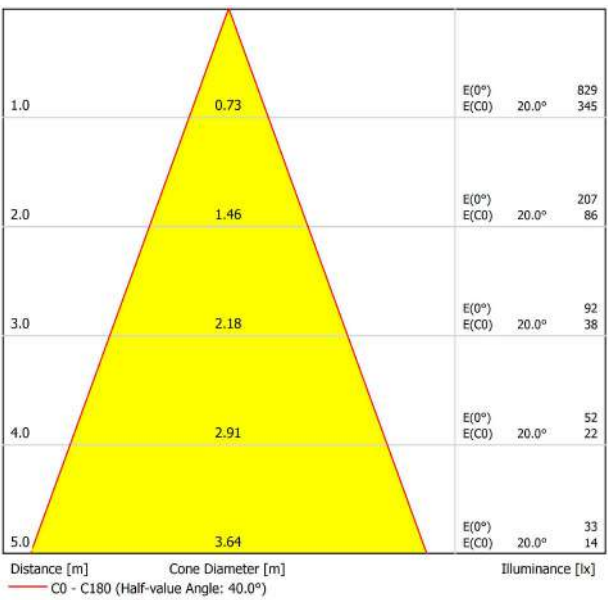



DIMENSIONS

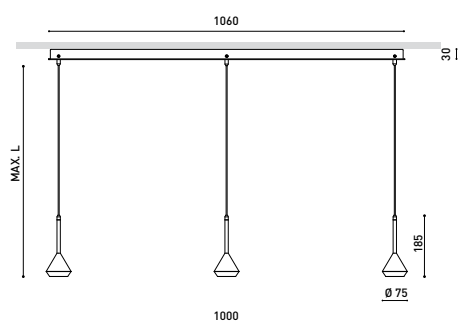

AWARDS



Name	SPIN 3 SURFACE 3M 24° DIM DALI 2700K WT-NT
Reference	A3911200WTNT
Color	Textured white
RAL	9016
Category	SURFACE

PRODUCT

Light source	LED
Gross luminous flux	3 x 600 Lm
Power	3 x 6,5 W
Power values of the system	23,78 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	24°
Lighting efficiency	86%
Efficacy	92 Lm/W
Current intensity	700 mA
Dimming	DALI - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	□
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Cord length	3 m
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Reduced dimensions, clear lines and a mechanized geometry combined in a pendant luminaire for accent lighting. Its ultra-thin cable gives Spin a sensation of aerial floatability.

POLAR DIAGRAM

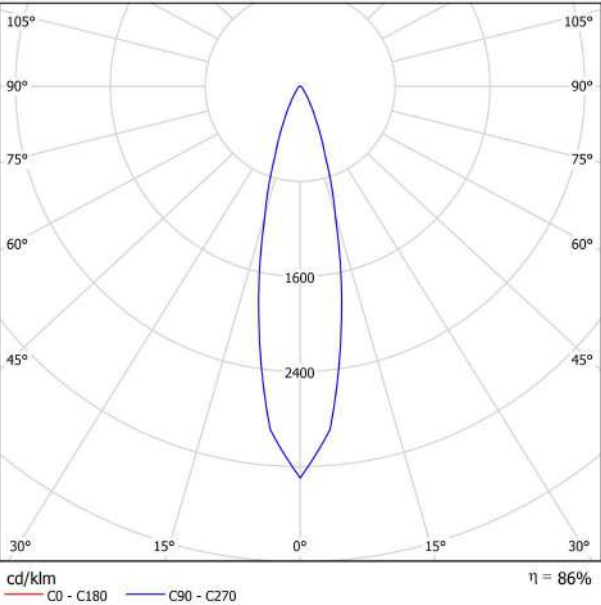


CONICAL DIAGRAM

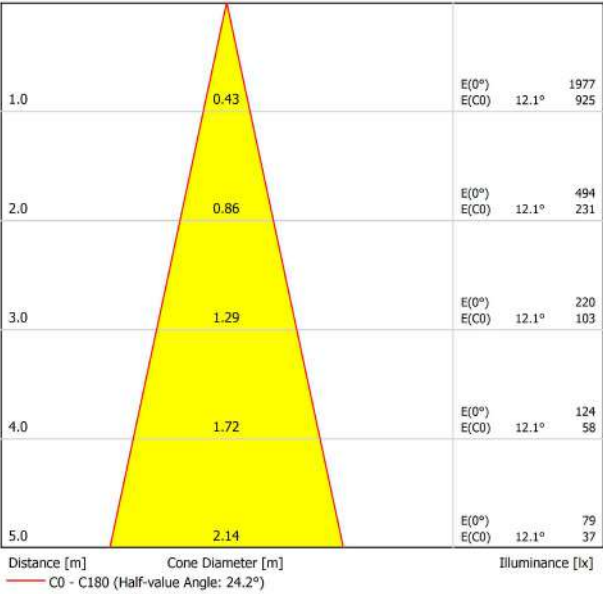



DIMENSIONS

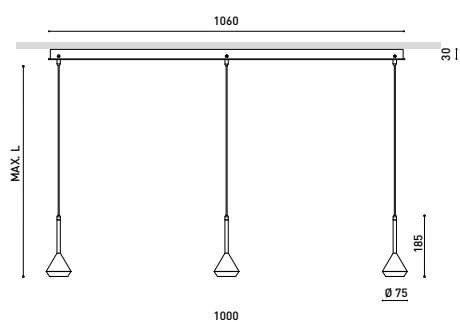

AWARDS



Name	SPIN 3 SURFACE 3M 24° DIM DALI 2700K WT-WT
Reference	A3911200WTWT
Color	Textured white
RAL	9016
Category	SURFACE

PRODUCT

Light source	LED
Gross luminous flux	3 x 600 Lm
Power	3 x 6,5 W
Power values of the system	23,78 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	24°
Lighting efficiency	86%
Efficacy	92 Lm/W
Current intensity	700 mA
Dimming	DALI - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Cord length	3 m
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Reduced dimensions, clear lines and a mechanized geometry combined in a pendant luminaire for accent lighting. Its ultra-thin cable gives Spin a sensation of aerial floatability.

POLAR DIAGRAM

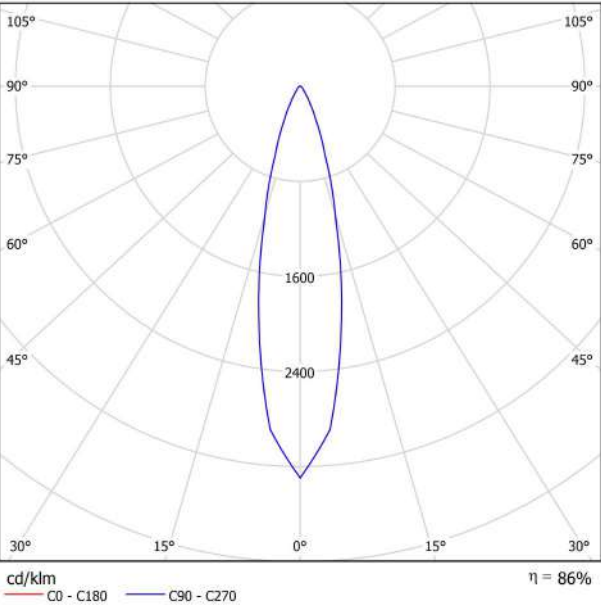


CONICAL DIAGRAM

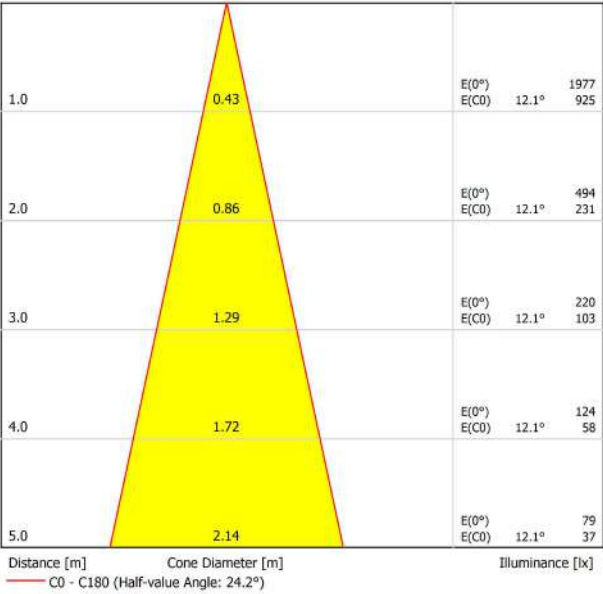



DIMENSIONS

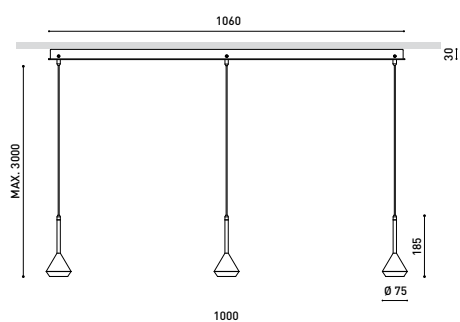

AWARDS



Name	SPIN 3 SURFACE 3M 24° DIM DALI 3000K MC-NT
Reference	A3911201MCNT
Color	Metallized copper
RAL	Electrolytic bath
Category	SUSPENSION

PRODUCT

Light source	LED
Gross luminous flux	3 x 630 Lm
Power	3 x 6,5 W
Power values of the system	23,78 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	24°
Lighting efficiency	86%
Efficacy	97 Lm/W
Current intensity	700 mA
Dimming	DALI - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


OTHER DATA

Ingress Protection	IP20
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Spin Surface is a version that allows it to be installed in places where it is impossible to access the false ceiling. Cement, concrete, vault ... its base, set to apply three luminaires, houses the driver and allows the luminaire to be installed on all types of surfaces.

POLAR DIAGRAM

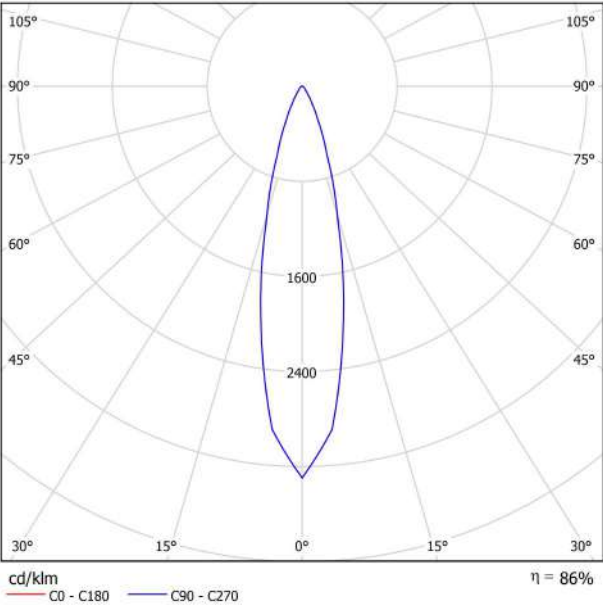


CONICAL DIAGRAM

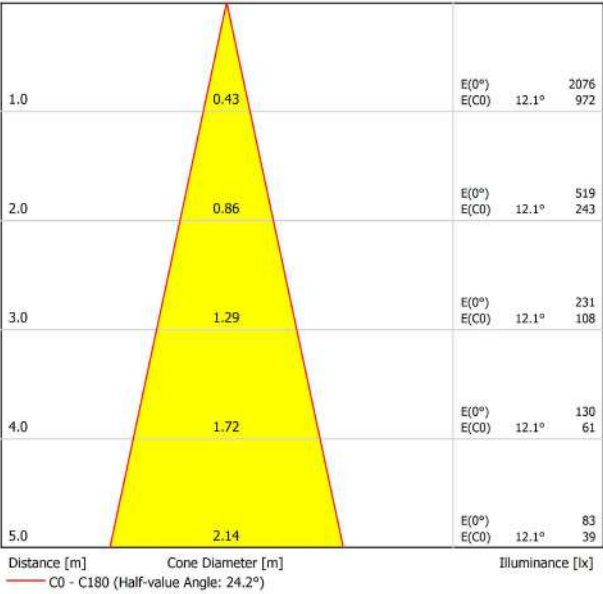



DIMENSIONS

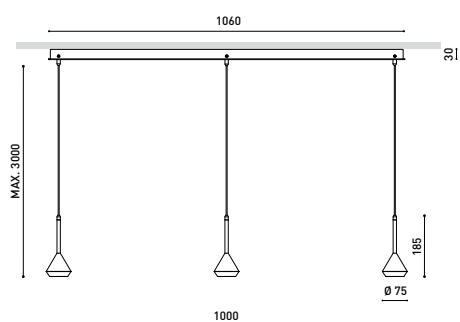

AWARDS



Name	SPIN 3 SURFACE 3M 24° DIM DALI 3000K MC-WT
Reference	A3911201MCWT
Color	Metallized copper
RAL	Electrolytic bath
Category	SUSPENSION

PRODUCT

Light source	LED
Gross luminous flux	3 x 630 Lm
Power	3 x 6,5 W
Power values of the system	23,78 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	24°
Lighting efficiency	86%
Efficacy	97 Lm/W
Current intensity	700 mA
Dimming	DALI - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


OTHER DATA

Ingress Protection	IP20
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Spin Surface is a version that allows it to be installed in places where it is impossible to access the false ceiling. Cement, concrete, vault ... its base, set to apply three luminaires, houses the driver and allows the luminaire to be installed on all types of surfaces.

POLAR DIAGRAM

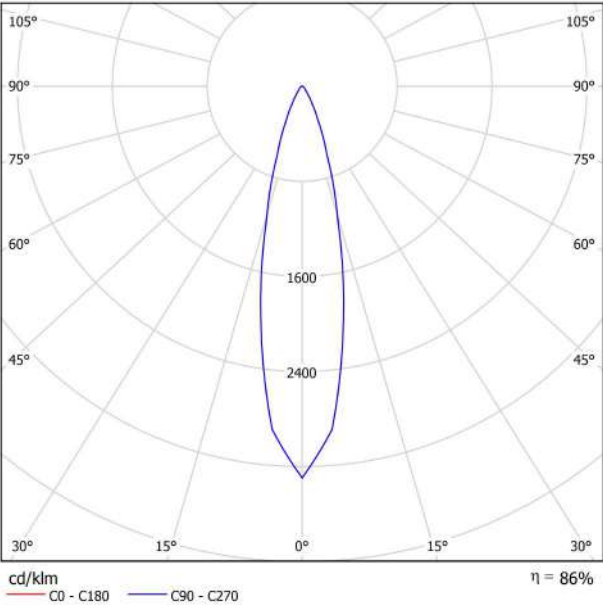


CONICAL DIAGRAM

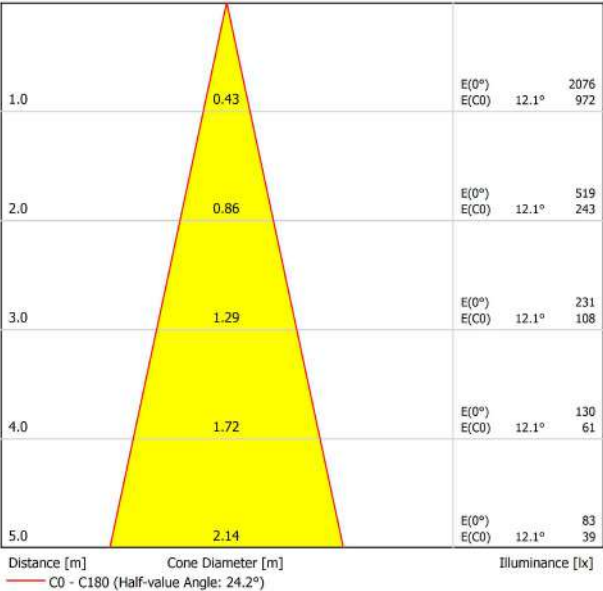



DIMENSIONS

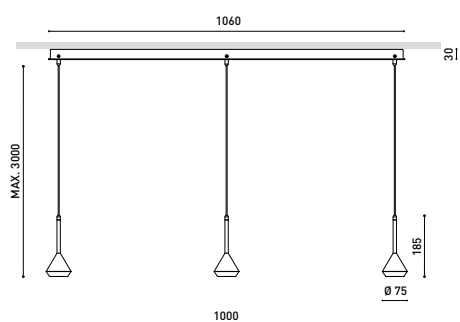

Name	SPIN 3 SURFACE 3M 24° DIM DALI 3000K MG-NT
Reference	A3911201MGNT
Color	Metallized gold
RAL	Electrolytic bath
Category	SUSPENSION

PRODUCT

LIGHTING INFORMATION

LED

3 x 630 Lm

3 x 6,5 W

23,78 W

3000 K

CRI>90

MacAdam Step 2

24°

86%

97 Lm/W

700 mA

DALI - Other DIM, please consult

Please Consult

Included

☐

220 V/240 V

50/60 Hz

A+

L80B10 (Tc=85°C) >60.000h

OTHER DATA

IP20

No

4150 g.

4577 g.

1078 x 139 x 89 mm

1

Aluminium / Polymethyl Methacrylate




AWARDS




Spin Surface is a version that allows it to be installed in places where it is impossible to access the false ceiling. Cement, concrete, vault ... its base, set to apply three luminaires, houses the driver and allows the luminaire to be installed on all types of surfaces.

POLAR DIAGRAM

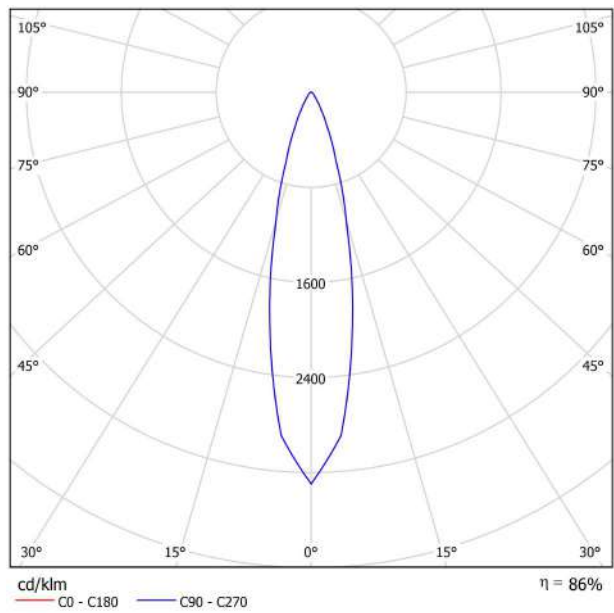


CONICAL DIAGRAM

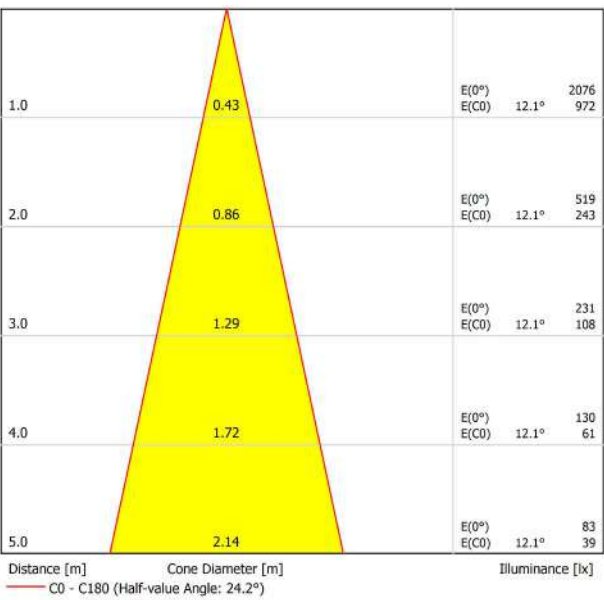



DIMENSIONS

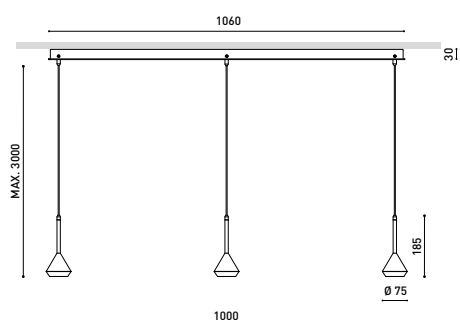

AWARDS



Name	SPIN 3 SURFACE 3M 24° DIM DALI 3000K MG-WT
Reference	A3911201MGWT
Color	Metallized gold
RAL	Electrolytic bath
Category	SUSPENSION

PRODUCT

Light source	LED
Gross luminous flux	3 x 630 Lm
Power	3 x 6,5 W
Power values of the system	23,78 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	24°
Lighting efficiency	86%
Efficacy	97 Lm/W
Current intensity	700 mA
Dimming	DALI - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	□
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


OTHER DATA

Ingress Protection	IP20
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Spin Surface is a version that allows it to be installed in places where it is impossible to access the false ceiling. Cement, concrete, vault ... its base, set to apply three luminaires, houses the driver and allows the luminaire to be installed on all types of surfaces.

POLAR DIAGRAM

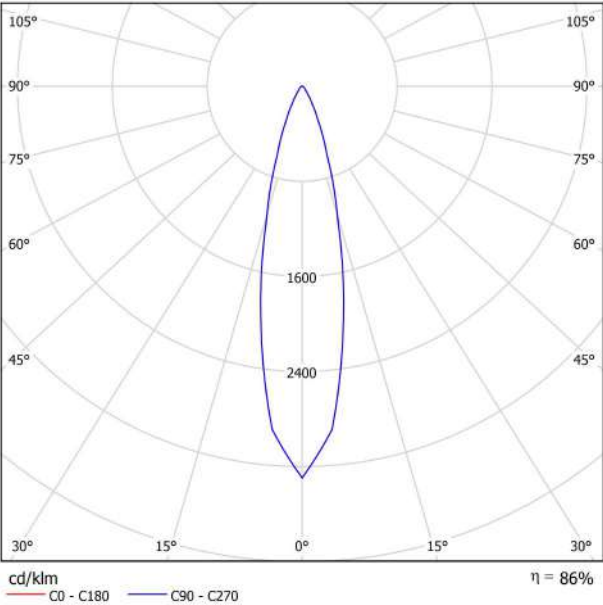


CONICAL DIAGRAM

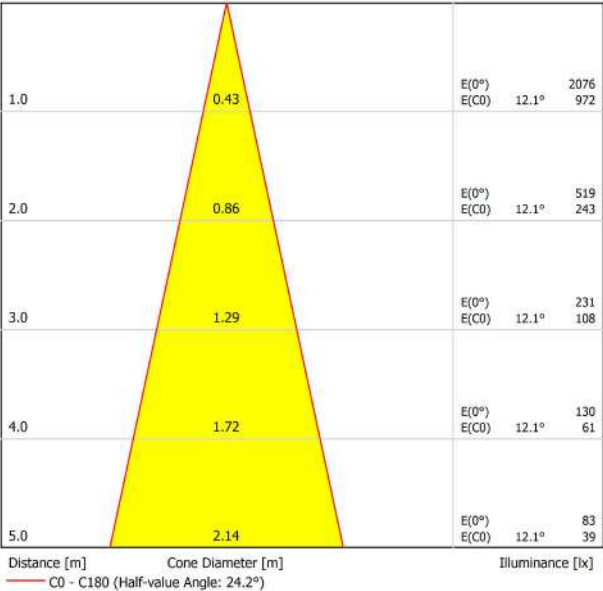



DIMENSIONS

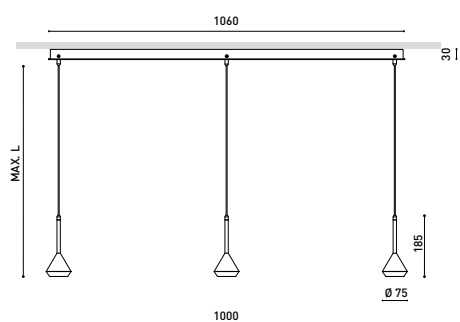

AWARDS



Name	SPIN 3 SURFACE 3M 24° DIM DALI 3000K NT-NT
Reference	A3911201NTNT
Color	Textured black
RAL	9005
Category	SURFACE

PRODUCT

Light source	LED
Gross luminous flux	3 x 630 Lm
Power	3 x 6,5 W
Power values of the system	23,78 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	24°
Lighting efficiency	86%
Efficacy	97 Lm/W
Current intensity	700 mA
Dimming	DALI - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Cord length	3 m
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Reduced dimensions, clear lines and a mechanized geometry combined in a pendant luminaire for accent lighting. Its ultra-thin cable gives Spin a sensation of aerial floatability.

POLAR DIAGRAM

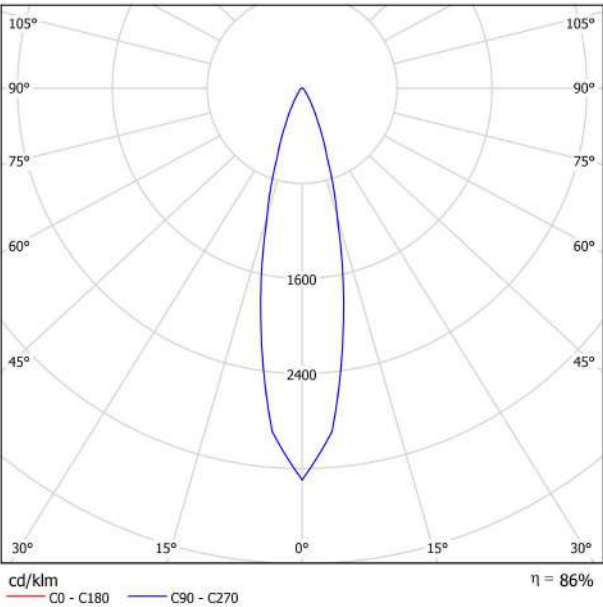


CONICAL DIAGRAM

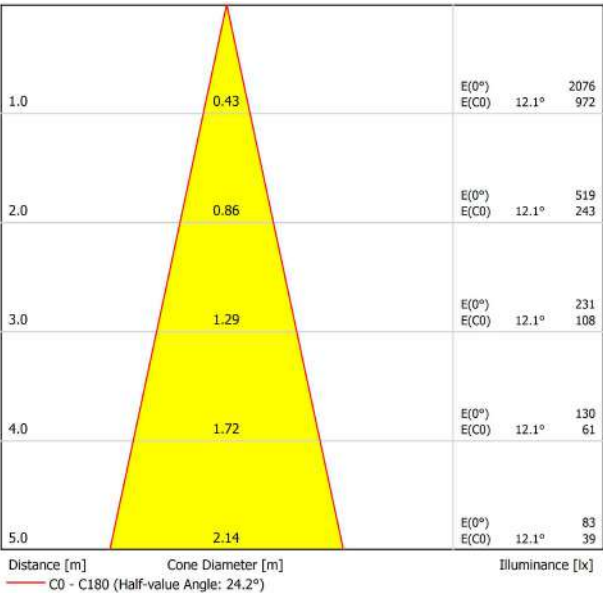



DIMENSIONS

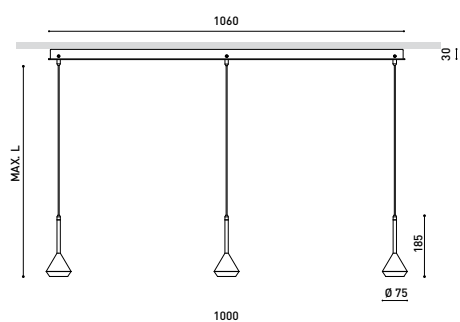

AWARDS



Name	SPIN 3 SURFACE 3M 24° DIM DALI 3000K NT-WT
Reference	A3911201NTWT
Color	Textured black
RAL	9005
Category	SURFACE

PRODUCT

SPIN 3 SURFACE 3M 24° DIM DALI 3000K NT-WT
A3911201NTWT
Textured black
9005
SURFACE

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	3 x 630 Lm
Power	3 x 6,5 W
Power values of the system	23,78 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	24°
Lighting efficiency	86%
Efficacy	97 Lm/W
Current intensity	700 mA
Dimming	DALI - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Cord length	3 m
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Reduced dimensions, clear lines and a mechanized geometry combined in a pendant luminaire for accent lighting. Its ultra-thin cable gives Spin a sensation of aerial floatability.

POLAR DIAGRAM

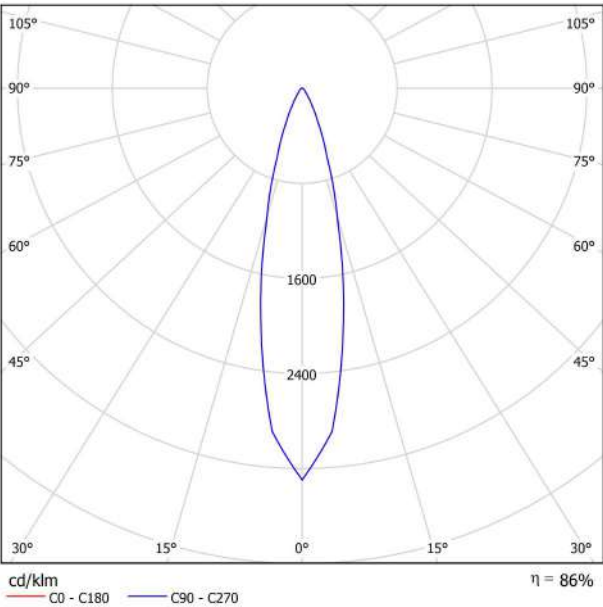


CONICAL DIAGRAM

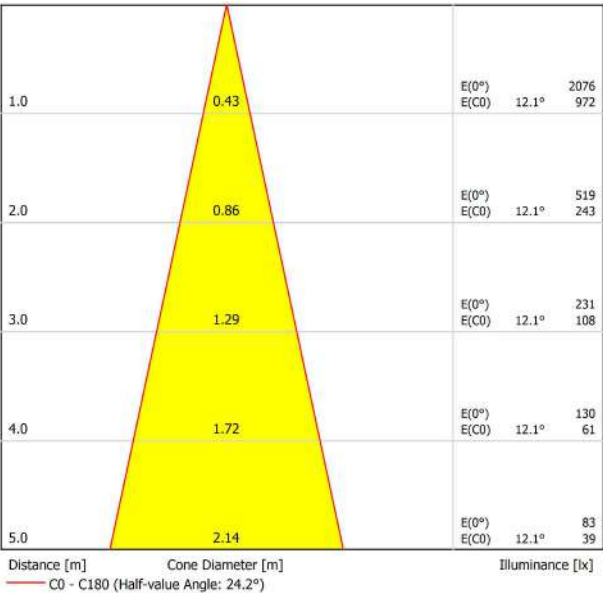



DIMENSIONS

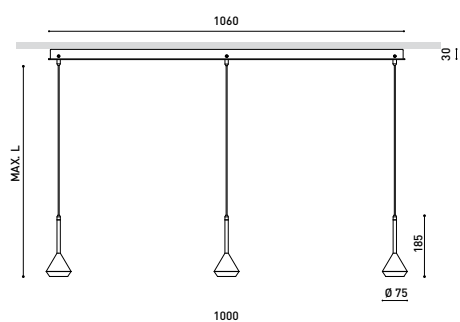

AWARDS



Name	SPIN 3 SURFACE 3M 24° DIM DALI 3000K WT-NT
Reference	A3911201WTNT
Color	Textured white
RAL	9016
Category	SURFACE

PRODUCT

Light source	LED
Gross luminous flux	3 x 630 Lm
Power	3 x 6,5 W
Power values of the system	23,78 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	24°
Lighting efficiency	86%
Efficacy	97 Lm/W
Current intensity	700 mA
Dimming	DALI - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Cord length	3 m
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Reduced dimensions, clear lines and a mechanized geometry combined in a pendant luminaire for accent lighting. Its ultra-thin cable gives Spin a sensation of aerial floatability.

POLAR DIAGRAM

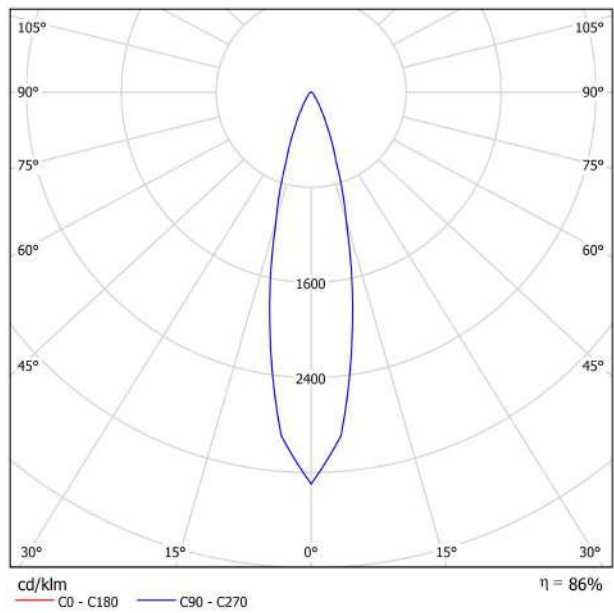


CONICAL DIAGRAM

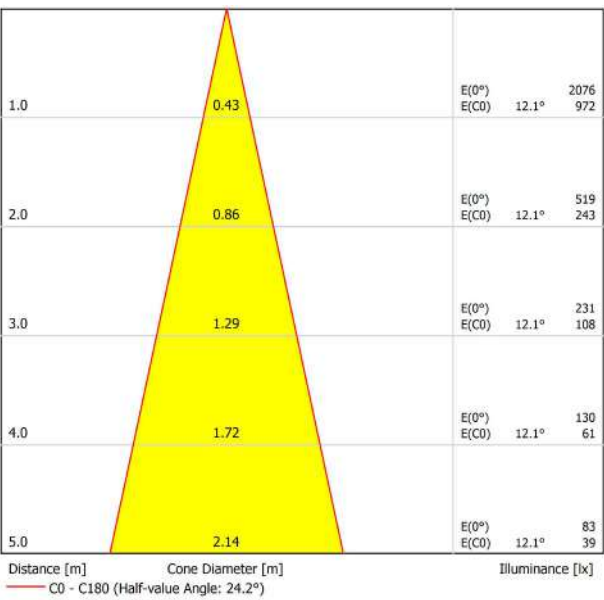



DIMENSIONS

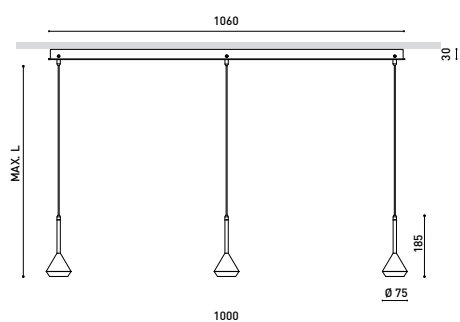

AWARDS



Name	SPIN 3 SURFACE 3M 24° DIM DALI 3000K WT-WT
Reference	A3911201WTWT
Color	Textured white
RAL	9016
Category	SURFACE

PRODUCT

Light source	LED
Gross luminous flux	3 x 630 Lm
Power	3 x 6,5 W
Power values of the system	23,78 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	24°
Lighting efficiency	86%
Efficacy	97 Lm/W
Current intensity	700 mA
Dimming	DALI - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Cord length	3 m
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Reduced dimensions, clear lines and a mechanized geometry combined in a pendant luminaire for accent lighting. Its ultra-thin cable gives Spin a sensation of aerial floatability.

POLAR DIAGRAM

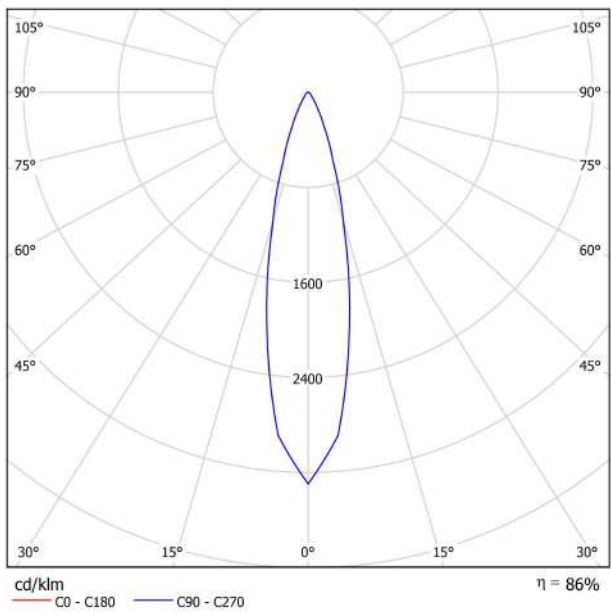


CONICAL DIAGRAM

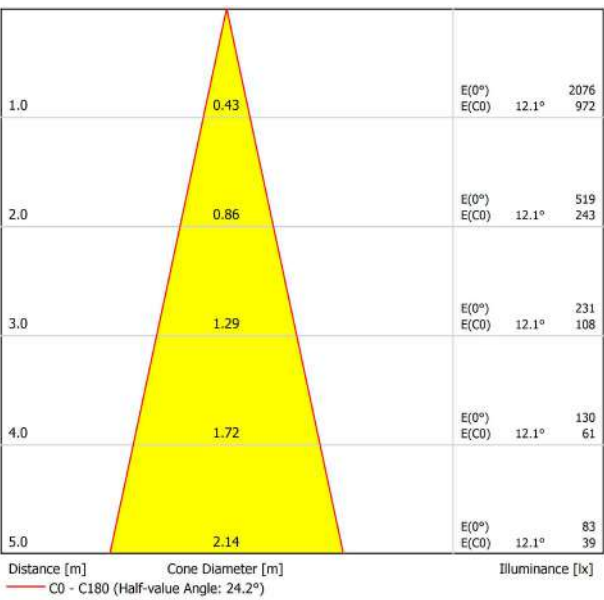



DIMENSIONS

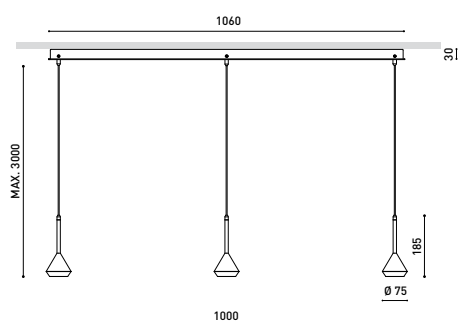

AWARDS



Name	SPIN 3 SURFACE 3M 24° DIM DALI 4000K MC-NT
Reference	A3911202MCNT
Color	Metallized copper
RAL	Electrolytic bath
Category	SUSPENSION

PRODUCT

Light source	LED
Gross luminous flux	3 x 680 Lm
Power	3 x 6,5 W
Power values of the system	23,78 W
Colour temperature	4000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	24°
Lighting efficiency	86%
Efficacy	105 Lm/W
Current intensity	700 mA
Dimming	DALI - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	□
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


OTHER DATA

Ingress Protection	IP20
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Spin Surface is a version that allows it to be installed in places where it is impossible to access the false ceiling. Cement, concrete, vault ... its base, set to apply three luminaires, houses the driver and allows the luminaire to be installed on all types of surfaces.

POLAR DIAGRAM

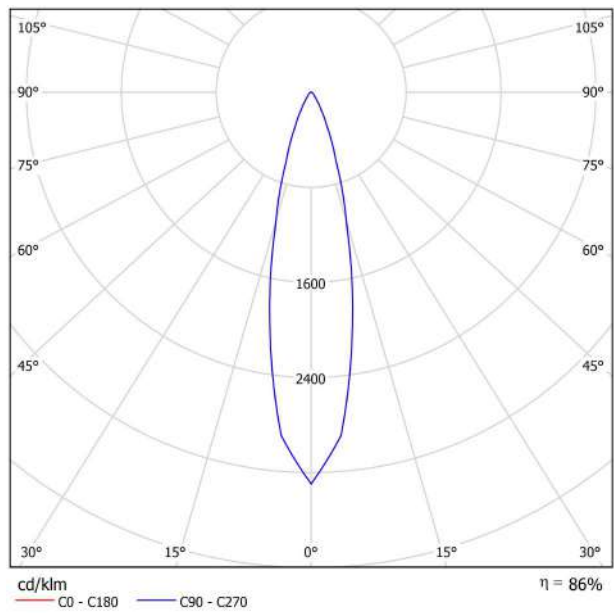


CONICAL DIAGRAM

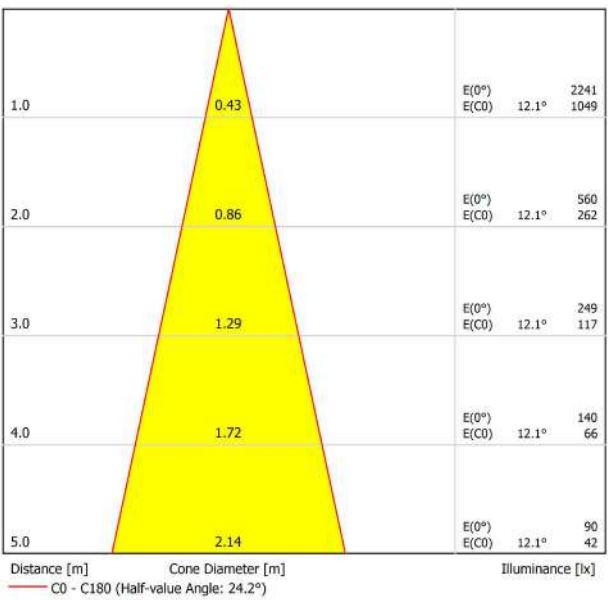



DIMENSIONS

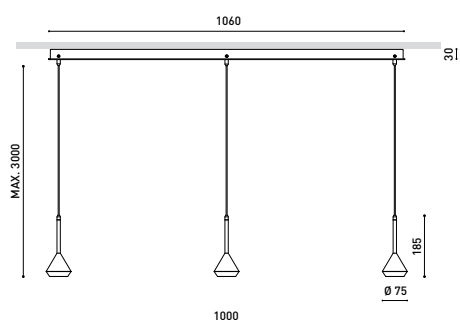

AWARDS



Name	SPIN 3 SURFACE 3M 24° DIM DALI 4000K MC-WT
Reference	A3911202MCWT
Color	Metallized copper
RAL	Electrolytic bath
Category	SUSPENSION

PRODUCT

Light source	LED
Gross luminous flux	3 x 680 Lm
Power	3 x 6,5 W
Power values of the system	23,78 W
Colour temperature	4000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	24°
Lighting efficiency	86%
Efficacy	105 Lm/W
Current intensity	700 mA
Dimming	DALI - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


OTHER DATA

Ingress Protection	IP20
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Spin Surface is a version that allows it to be installed in places where it is impossible to access the false ceiling. Cement, concrete, vault ... its base, set to apply three luminaires, houses the driver and allows the luminaire to be installed on all types of surfaces.

POLAR DIAGRAM

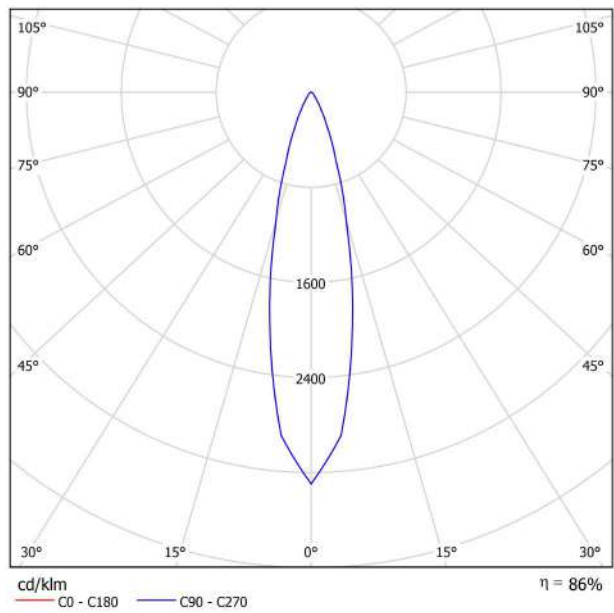


CONICAL DIAGRAM

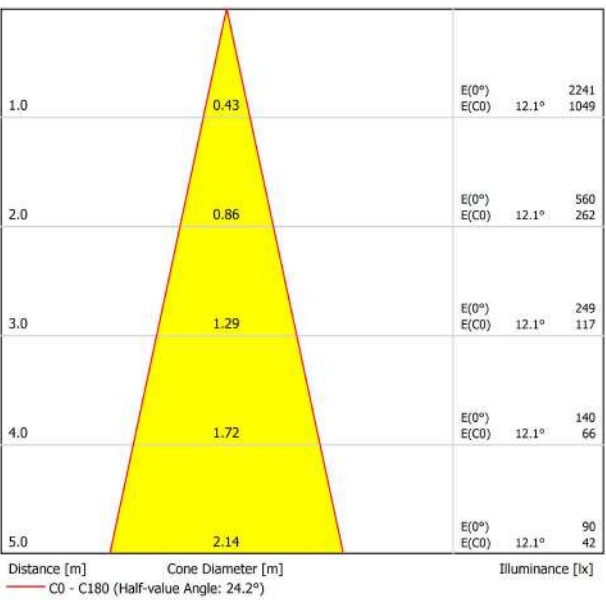



DIMENSIONS

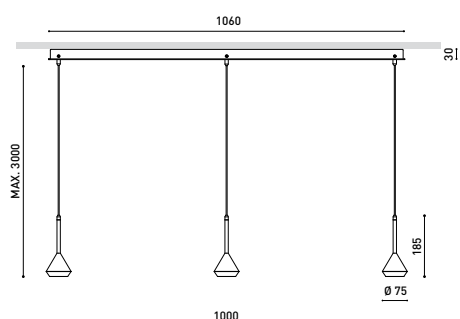

Name	SPIN 3 SURFACE 3M 24° DIM DALI 4000K MG-NT
Reference	A3911202MGNT
Color	Metallized gold
RAL	Electrolytic bath
Category	SUSPENSION

PRODUCT

LIGHTING INFORMATION

LED

3 x 680 Lm

3 x 6,5 W

23,78 W

4000 K

CRI>90

MacAdam Step 2

24°

86%

105 Lm/W

700 mA

DALI - Other DIM, please consult

Please Consult

Included

☐

220 V/240 V

50/60 Hz

A+

L80B10 (Tc=85°C) >60.000h

OTHER DATA

IP20

No

4150 g.

4577 g.

1078 x 139 x 89 mm

1

Aluminium / Polymethyl Methacrylate




AWARDS




Spin Surface is a version that allows it to be installed in places where it is impossible to access the false ceiling. Cement, concrete, vault ... its base, set to apply three luminaires, houses the driver and allows the luminaire to be installed on all types of surfaces.

POLAR DIAGRAM

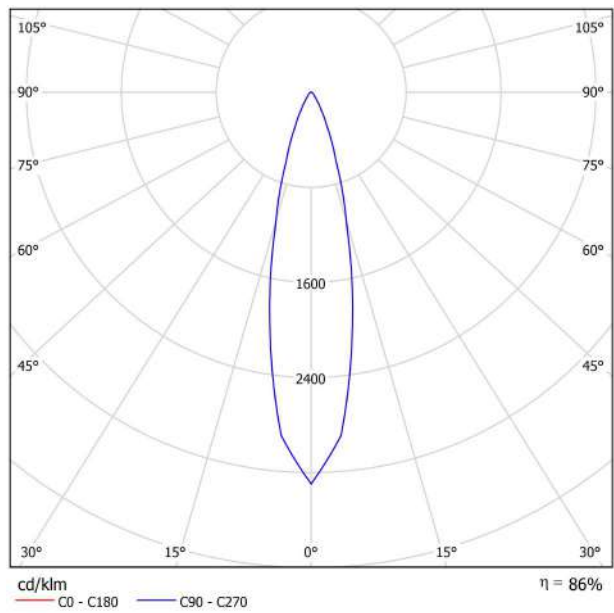


CONICAL DIAGRAM

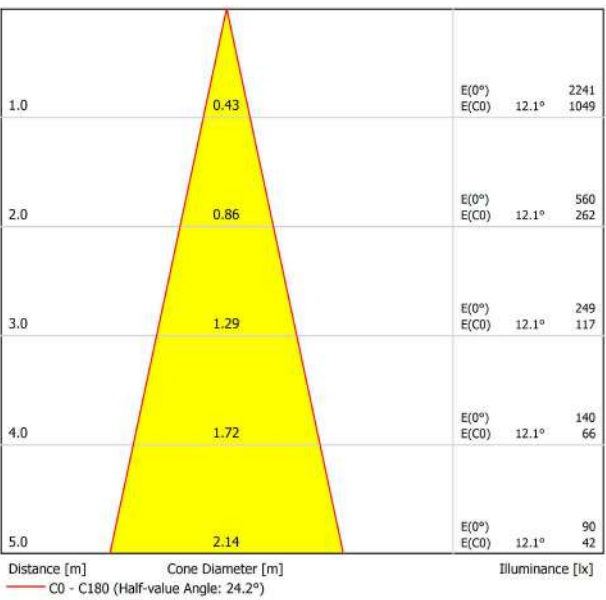



DIMENSIONS

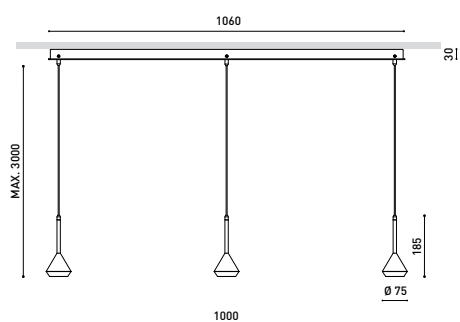

AWARDS



Name	SPIN 3 SURFACE 3M 24° DIM DALI 4000K MG-WT
Reference	A3911202MGWT
Color	Metallized gold
RAL	Electrolytic bath
Category	SUSPENSION

PRODUCT

Light source	LED
Gross luminous flux	3 x 680 Lm
Power	3 x 6,5 W
Power values of the system	23,78 W
Colour temperature	4000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	24°
Lighting efficiency	86%
Efficacy	105 Lm/W
Current intensity	700 mA
Dimming	DALI - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	□
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


OTHER DATA

Ingress Protection	IP20
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Spin Surface is a version that allows it to be installed in places where it is impossible to access the false ceiling. Cement, concrete, vault ... its base, set to apply three luminaires, houses the driver and allows the luminaire to be installed on all types of surfaces.

POLAR DIAGRAM

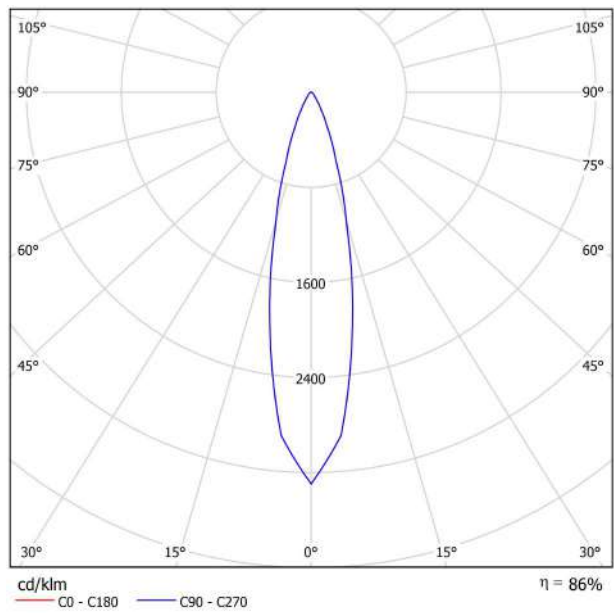


CONICAL DIAGRAM

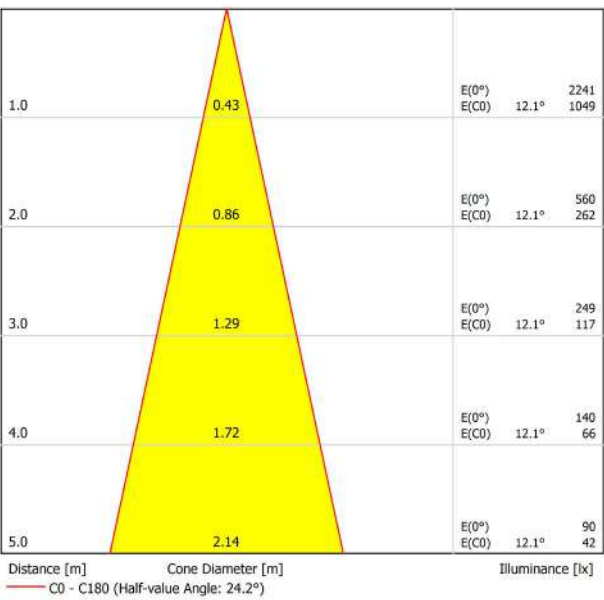



DIMENSIONS

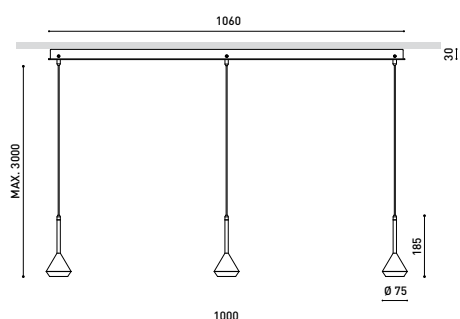

Name	SPIN 3 SURFACE 3M 24° DIM DALI 2700K MG-NT
Reference	A3911200MGNT
Color	Metallized gold
RAL	Electrolytic bath
Category	SUSPENSION

PRODUCT

LIGHTING INFORMATION

LED

3 x 600 Lm

3 x 6,5 W

23,78 W

2700 K

CRI>90

MacAdam Step 2

24°

86%

92 Lm/W

700 mA

DALI - Other DIM, please consult

Please Consult

Included

☐

220 V/240 V

50/60 Hz

A+

L80B10 (Tc=85°C) >60.000h

OTHER DATA

IP20

No

4150 g.

4577 g.

1078 x 139 x 89 mm

1

Aluminium / Polymethyl Methacrylate




AWARDS




Spin Surface is a version that allows it to be installed in places where it is impossible to access the false ceiling. Cement, concrete, vault ... its base, set to apply three luminaires, houses the driver and allows the luminaire to be installed on all types of surfaces.

POLAR DIAGRAM

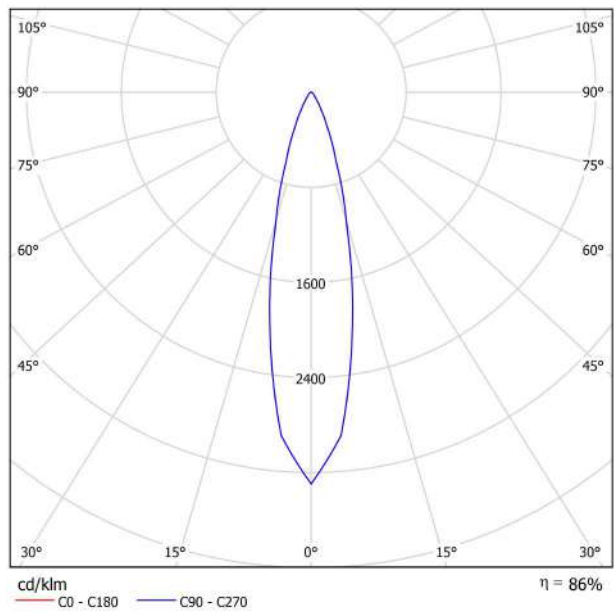


CONICAL DIAGRAM

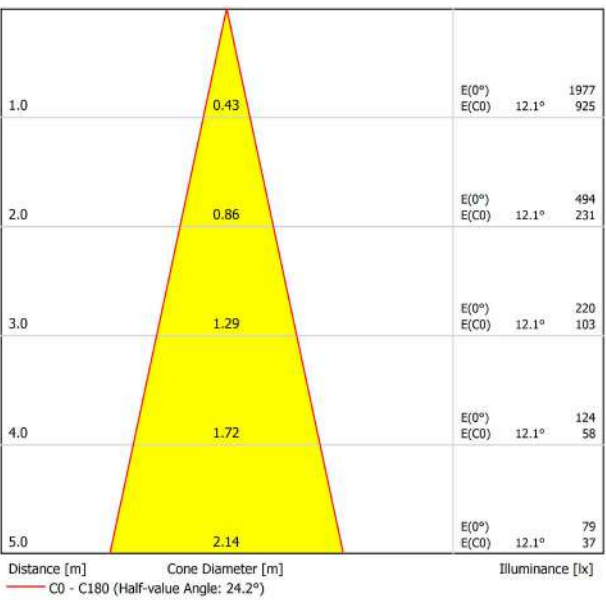



DIMENSIONS

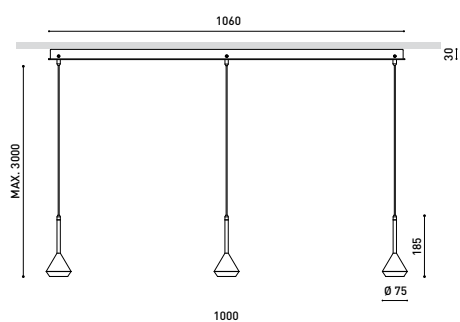

AWARDS



Name	SPIN 3 SURFACE 3M 24° DIM DALI 2700K MG-WT
Reference	A3911200MGWT
Color	Metallized gold
RAL	Electrolytic bath
Category	SUSPENSION

PRODUCT

Light source	LED
Gross luminous flux	3 x 600 Lm
Power	3 x 6,5 W
Power values of the system	23,78 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	24°
Lighting efficiency	86%
Efficacy	92 Lm/W
Current intensity	700 mA
Dimming	DALI - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


OTHER DATA

Ingress Protection	IP20
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Spin Surface is a version that allows it to be installed in places where it is impossible to access the false ceiling. Cement, concrete, vault ... its base, set to apply three luminaires, houses the driver and allows the luminaire to be installed on all types of surfaces.

POLAR DIAGRAM

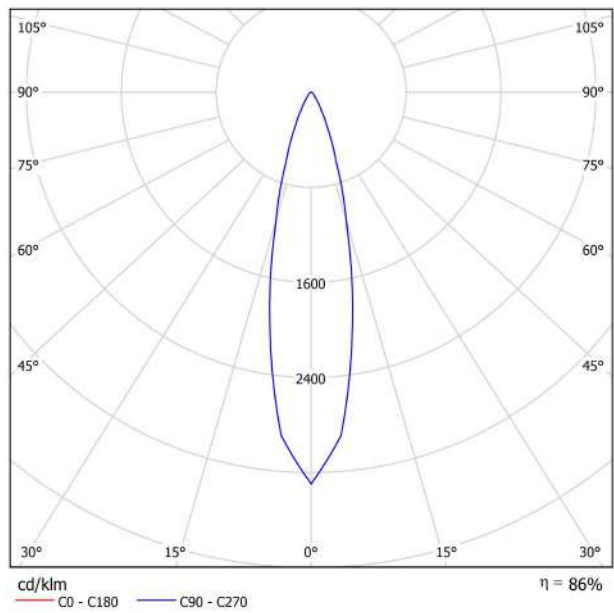


CONICAL DIAGRAM

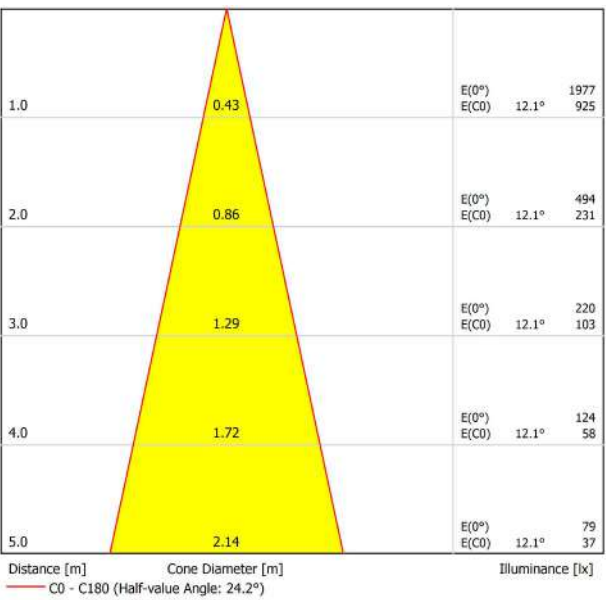



DIMENSIONS

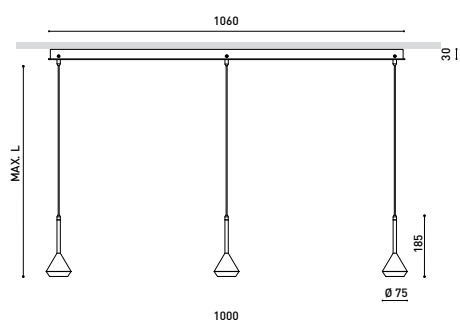

AWARDS



Name	SPIN 3 SURFACE 3M 24° DIM DALI 2700K NT-NT
Reference	A3911200NTNT
Color	Textured black
RAL	9005
Category	SURFACE

PRODUCT

LIGHTING INFORMATION

LED

3 x 600 Lm

3 x 6,5 W

23,78 W

2700 K

CRI>90

MacAdam Step 2

24°

86%

92 Lm/W

700 mA

DALI - Other DIM, please consult

Please Consult

Included

☐

220 V/240 V

50/60 Hz

A+

L80B10 (Tc=85°C) >60.000h

OTHER DATA

IP20

3 m

No

4150 g.

4577 g.

1078 x 139 x 89 mm


1

Aluminium / Polymethyl Methacrylate




Reduced dimensions, clear lines and a mechanized geometry combined in a pendant luminaire for accent lighting. Its ultra-thin cable gives Spin a sensation of aerial floatability.

POLAR DIAGRAM

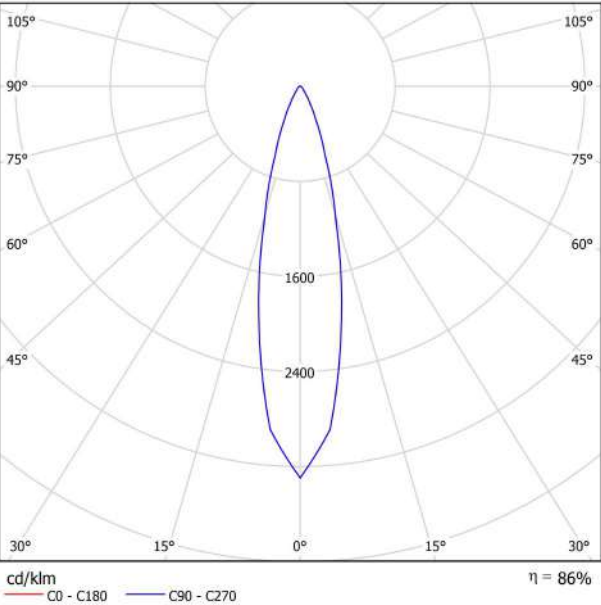


CONICAL DIAGRAM

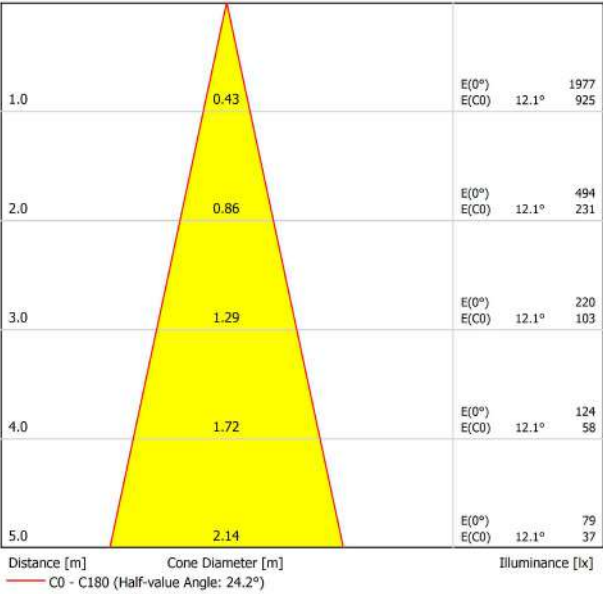



DIMENSIONS

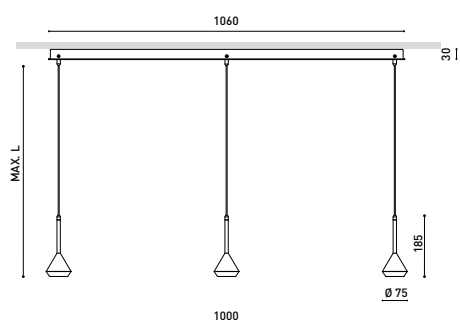

AWARDS



Name	SPIN 3 SURFACE 3M 24° DIM DALI 2700K NT-WT
Reference	A3911200NTWT
Color	Textured black
RAL	9005
Category	SURFACE

PRODUCT

Light source	LED
Gross luminous flux	3 x 600 Lm
Power	3 x 6,5 W
Power values of the system	23,78 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	24°
Lighting efficiency	86%
Efficacy	92 Lm/W
Current intensity	700 mA
Dimming	DALI - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Cord length	3 m
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Reduced dimensions, clear lines and a mechanized geometry combined in a pendant luminaire for accent lighting. Its ultra-thin cable gives Spin a sensation of aerial floatability.

POLAR DIAGRAM

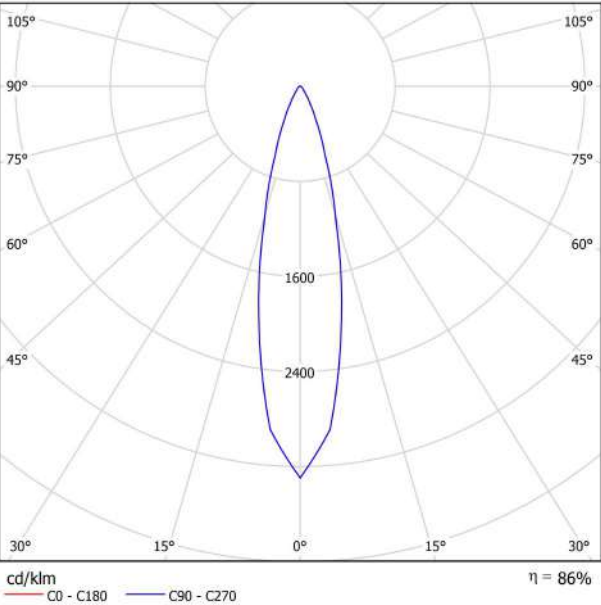


CONICAL DIAGRAM

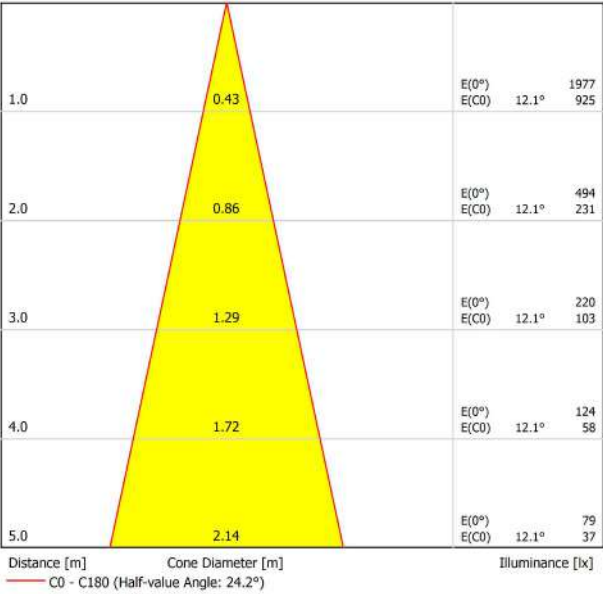



DIMENSIONS

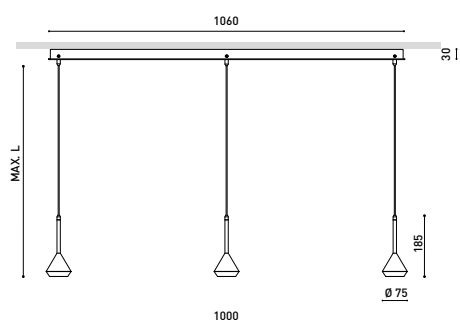

AWARDS



Name	SPIN 3 SURFACE 3M 40° 2700K NT-WT
Reference	A3911110NTWT
Color	Textured black
RAL	9005
Category	SURFACE

PRODUCT

Light source	LED
Gross luminous flux	3 x 600 Lm
Power	3 x 6,5 W
Power values of the system	21,67 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	40°
Lighting efficiency	84%
Efficacy	92 Lm/W
Current intensity	700 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Cord length	3 m
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Reduced dimensions, clear lines and a mechanized geometry combined in a pendant luminaire for accent lighting. Its ultra-thin cable gives Spin a sensation of aerial floatability.

POLAR DIAGRAM

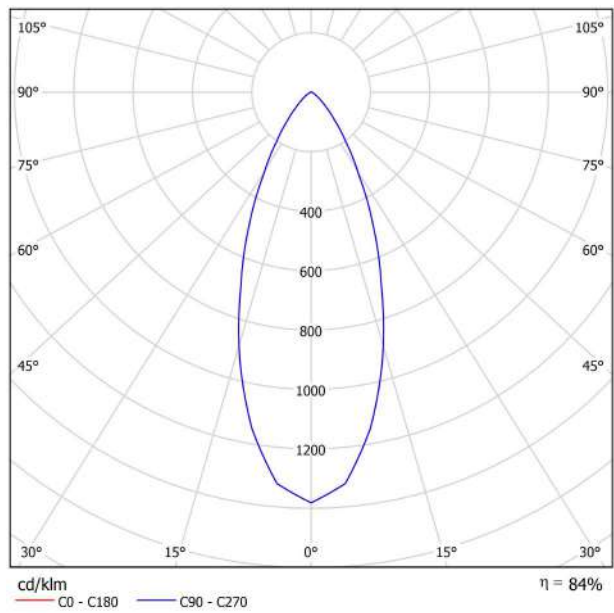


CONICAL DIAGRAM

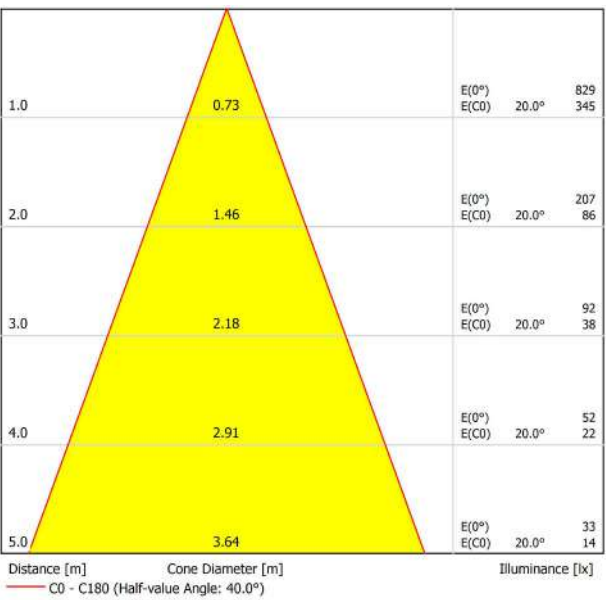



DIMENSIONS

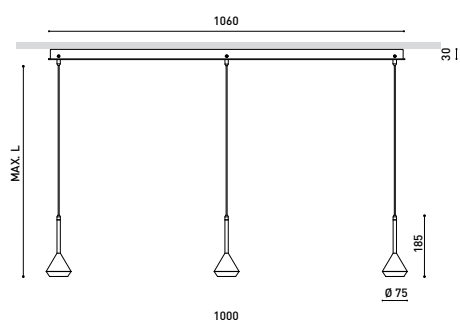

AWARDS



Name	SPIN 3 SURFACE 3M 40° 2700K WT-NT
Reference	A3911110WTNT
Color	Textured white
RAL	9016
Category	SURFACE

PRODUCT

Light source	LED
Gross luminous flux	3 x 600 Lm
Power	3 x 6,5 W
Power values of the system	21,67 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	40°
Lighting efficiency	84%
Efficacy	92 Lm/W
Current intensity	700 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Cord length	3 m
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Reduced dimensions, clear lines and a mechanized geometry combined in a pendant luminaire for accent lighting. Its ultra-thin cable gives Spin a sensation of aerial floatability.

POLAR DIAGRAM

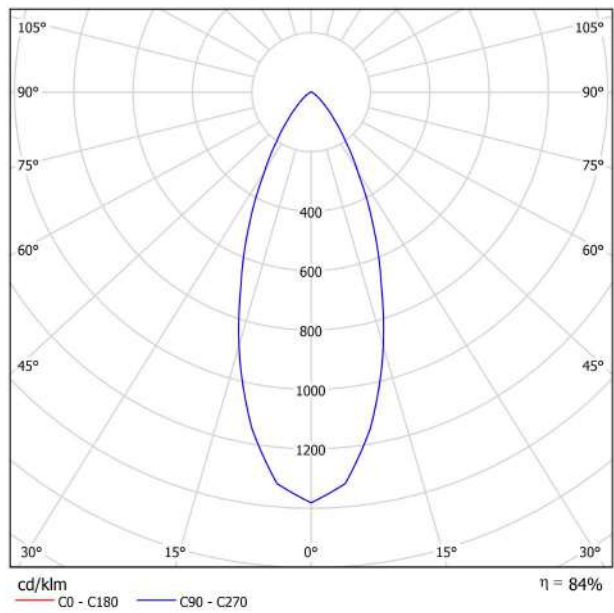


CONICAL DIAGRAM

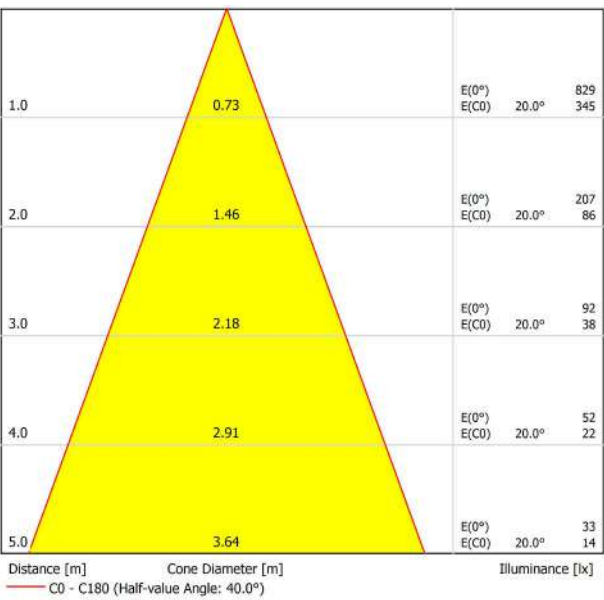



DIMENSIONS

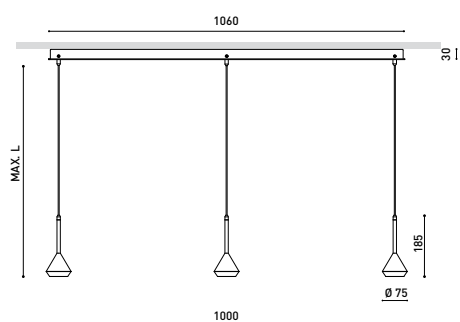

AWARDS



Name	SPIN 3 SURFACE 3M 40° 2700K WT-WT
Reference	A3911110WTWT
Color	Textured white
RAL	9016
Category	SURFACE

PRODUCT

Light source	LED
Gross luminous flux	3 x 600 Lm
Power	3 x 6,5 W
Power values of the system	21,67 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	40°
Lighting efficiency	84%
Efficacy	92 Lm/W
Current intensity	700 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


LIGHTING INFORMATION

OTHER DATA


Ingress Protection	IP20
Cord length	3 m
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate



POLAR DIAGRAM

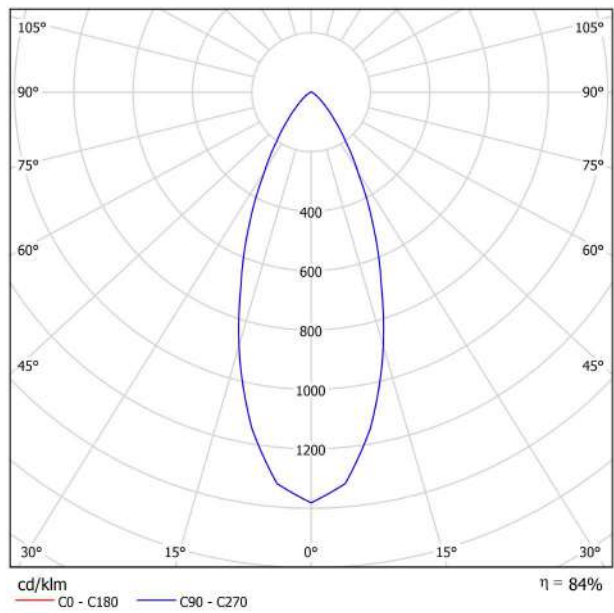


CONICAL DIAGRAM

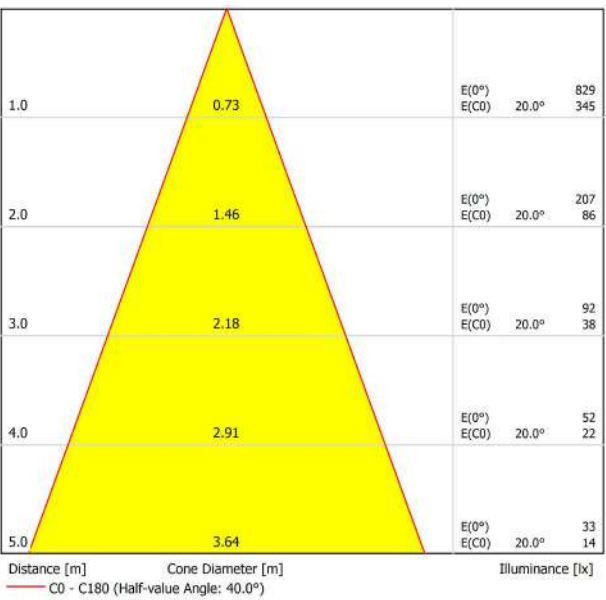



DIMENSIONS

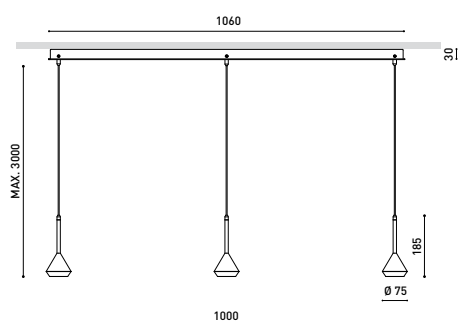

AWARDS



Name	SPIN 3 SURFACE 3M 40° 3000K MC-NT
Reference	A3911111MCNT
Color	Metallized copper
RAL	Electrolytic bath
Category	SUSPENSION

PRODUCT

Light source	LED
Gross luminous flux	3 x 630 Lm
Power	3 x 6,5 W
Power values of the system	21,67 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	40°
Lighting efficiency	84%
Efficacy	97 Lm/W
Current intensity	700 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


OTHER DATA

Ingress Protection	IP20
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Spin Surface is a version that allows it to be installed in places where it is impossible to access the false ceiling. Cement, concrete, vault ... its base, set to apply three luminaires, houses the driver and allows the luminaire to be installed on all types of surfaces.

POLAR DIAGRAM

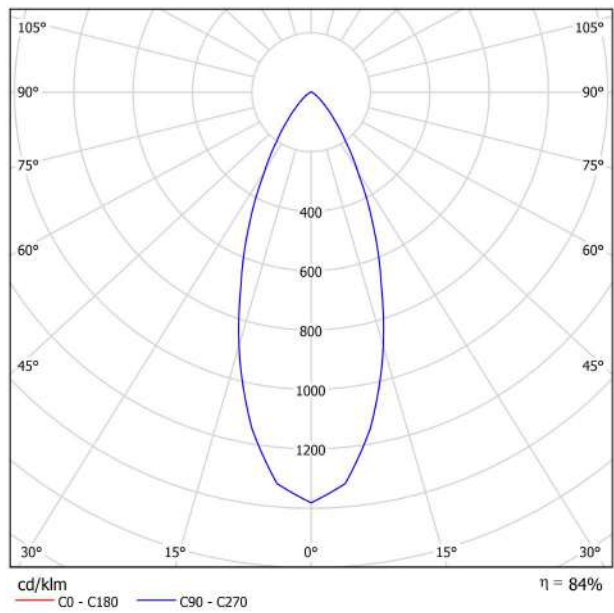


CONICAL DIAGRAM

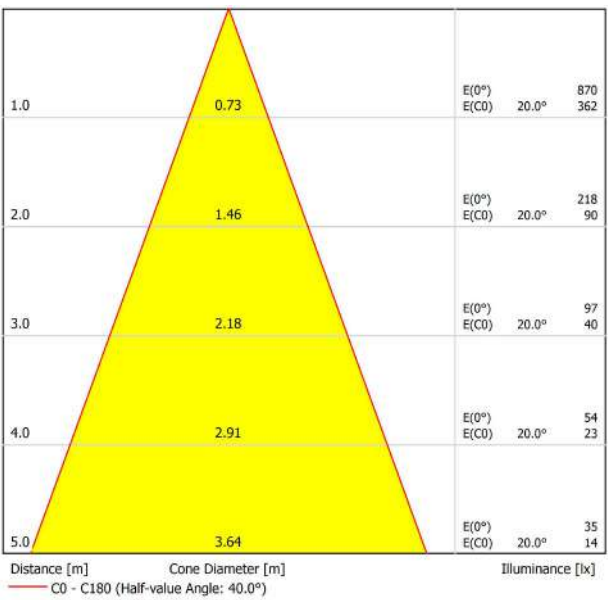



DIMENSIONS

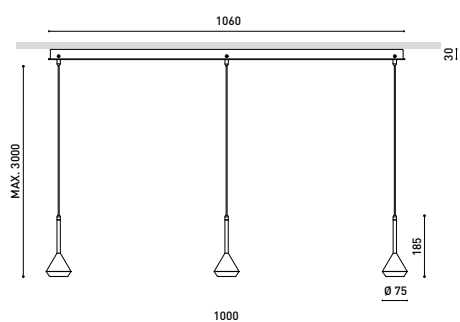

AWARDS



Name	SPIN 3 SURFACE 3M 40° 3000K MC-WT
Reference	A3911111MCWT
Color	Metallized copper
RAL	Electrolytic bath
Category	SUSPENSION

PRODUCT

Light source	LED
Gross luminous flux	3 x 630 Lm
Power	3 x 6,5 W
Power values of the system	21,67 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	40°
Lighting efficiency	84%
Efficacy	97 Lm/W
Current intensity	700 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


OTHER DATA

Ingress Protection	IP20
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Spin Surface is a version that allows it to be installed in places where it is impossible to access the false ceiling. Cement, concrete, vault ... its base, set to apply three luminaires, houses the driver and allows the luminaire to be installed on all types of surfaces.

POLAR DIAGRAM

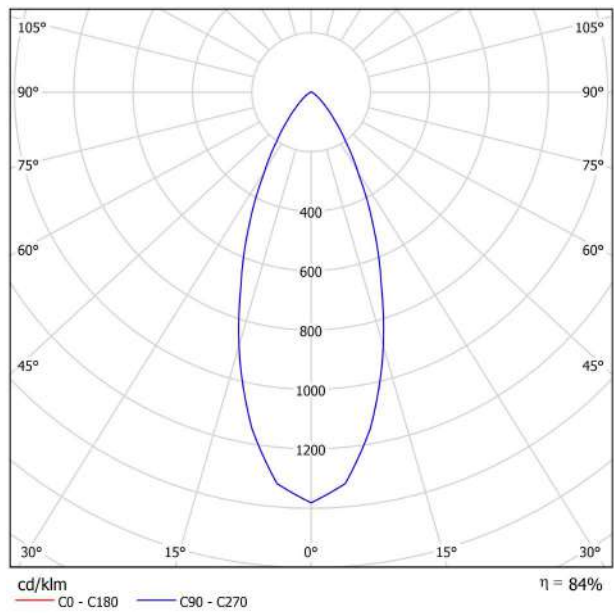


CONICAL DIAGRAM

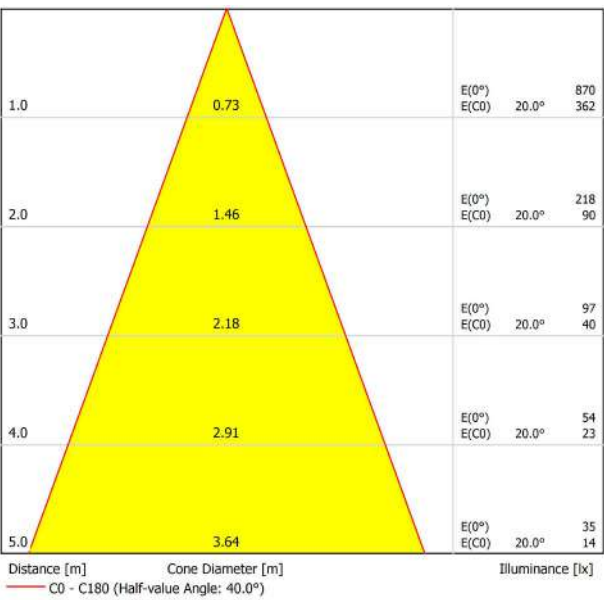



DIMENSIONS

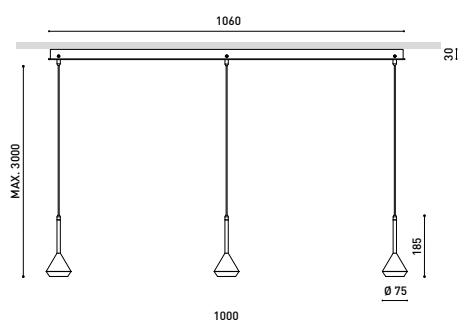

AWARDS



Name	SPIN 3 SURFACE 3M 40° 3000K MG-NT
Reference	A3911111MGNT
Color	Metallized gold
RAL	Electrolytic bath
Category	SUSPENSION

PRODUCT

Light source	LED
Gross luminous flux	3 x 630 Lm
Power	3 x 6,5 W
Power values of the system	21,67 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	40°
Lighting efficiency	84%
Efficacy	97 Lm/W
Current intensity	700 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Spin Surface is a version that allows it to be installed in places where it is impossible to access the false ceiling. Cement, concrete, vault ... its base, set to apply three luminaires, houses the driver and allows the luminaire to be installed on all types of surfaces.

POLAR DIAGRAM

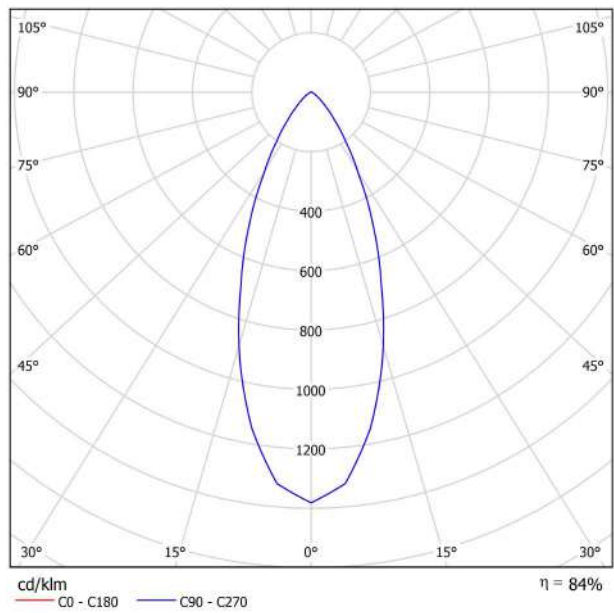


CONICAL DIAGRAM

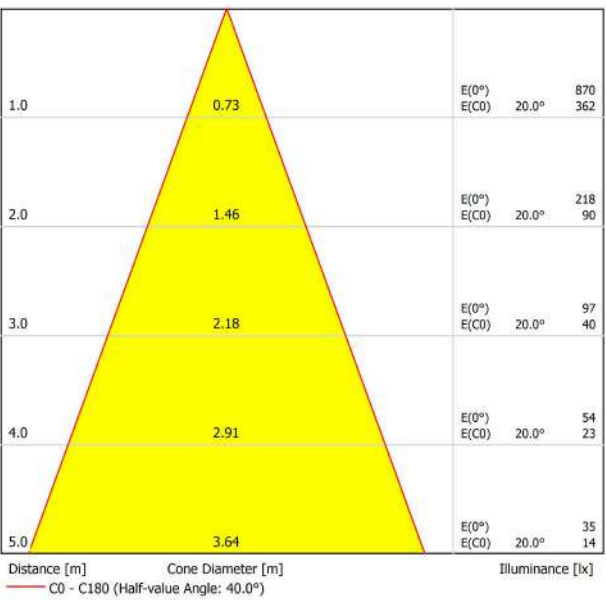



DIMENSIONS

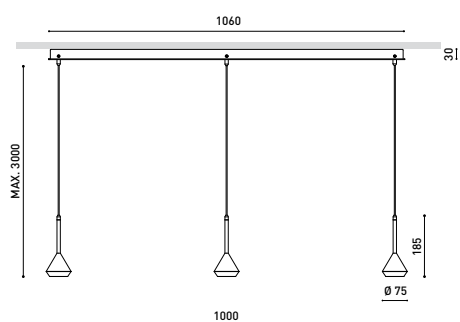

AWARDS



Name	SPIN 3 SURFACE 3M 40° 3000K MG-WT
Reference	A3911111MGWT
Color	Metallized gold
RAL	Electrolytic bath
Category	SUSPENSION

PRODUCT

Light source	LED
Gross luminous flux	3 x 630 Lm
Power	3 x 6,5 W
Power values of the system	21,67 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	40°
Lighting efficiency	84%
Efficacy	97 Lm/W
Current intensity	700 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


OTHER DATA

Ingress Protection	IP20
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Spin Surface is a version that allows it to be installed in places where it is impossible to access the false ceiling. Cement, concrete, vault ... its base, set to apply three luminaires, houses the driver and allows the luminaire to be installed on all types of surfaces.

POLAR DIAGRAM

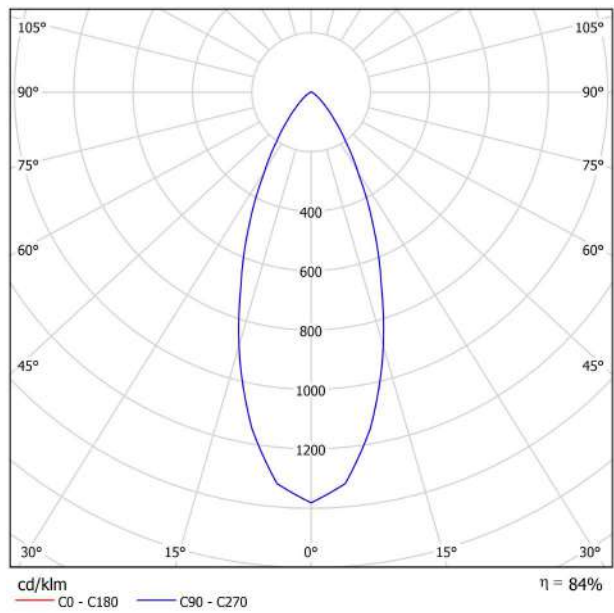


CONICAL DIAGRAM

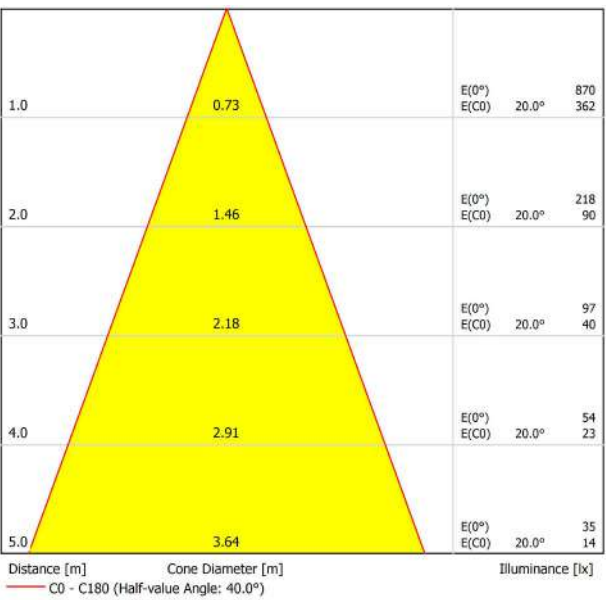



DIMENSIONS

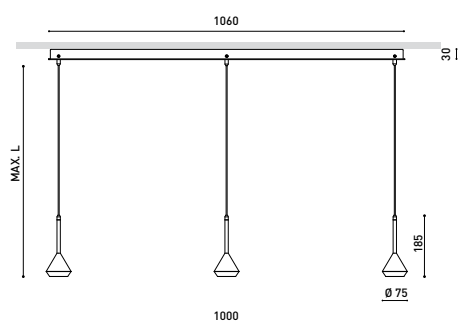

AWARDS



Name	SPIN 3 SURFACE 3M 40° 3000K NT-NT
Reference	A3911111NTNT
Color	Textured black
RAL	9005
Category	SURFACE

PRODUCT

Light source	LED
Gross luminous flux	3 x 630 Lm
Power	3 x 6,5 W
Power values of the system	21,67 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	40°
Lighting efficiency	84%
Efficacy	97 Lm/W
Current intensity	700 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Cord length	3 m
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Reduced dimensions, clear lines and a mechanized geometry combined in a pendant luminaire for accent lighting. Its ultra-thin cable gives Spin a sensation of aerial floatability.

POLAR DIAGRAM

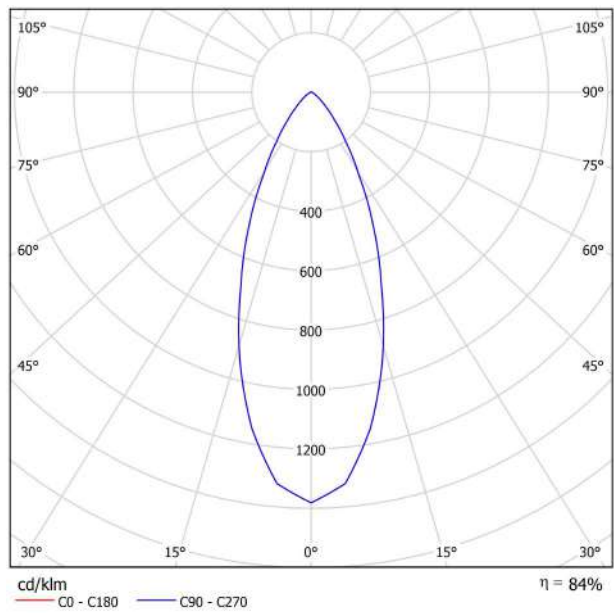


CONICAL DIAGRAM

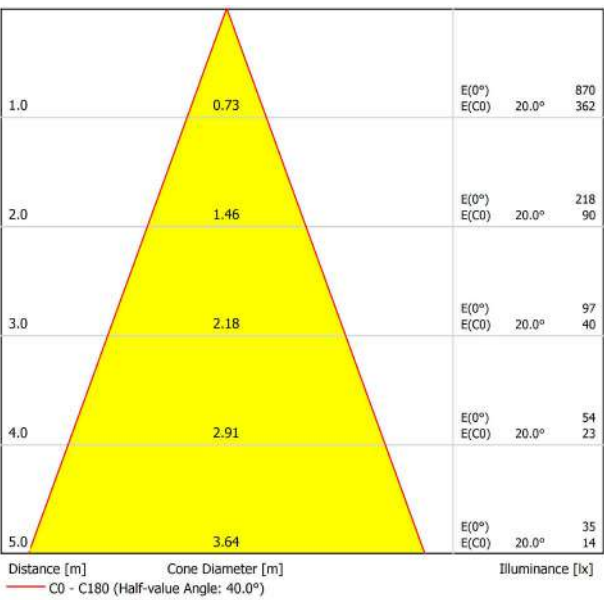



DIMENSIONS

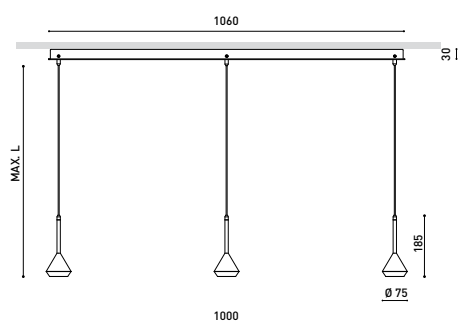

AWARDS



Name	SPIN 3 SURFACE 3M 40° 3000K NT-WT
Reference	A3911111NTWT
Color	Textured black
RAL	9005
Category	SURFACE

PRODUCT

Light source	LED
Gross luminous flux	3 x 630 Lm
Power	3 x 6,5 W
Power values of the system	21,67 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	40°
Lighting efficiency	84%
Efficacy	97 Lm/W
Current intensity	700 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Cord length	3 m
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Reduced dimensions, clear lines and a mechanized geometry combined in a pendant luminaire for accent lighting. Its ultra-thin cable gives Spin a sensation of aerial floatability.

POLAR DIAGRAM

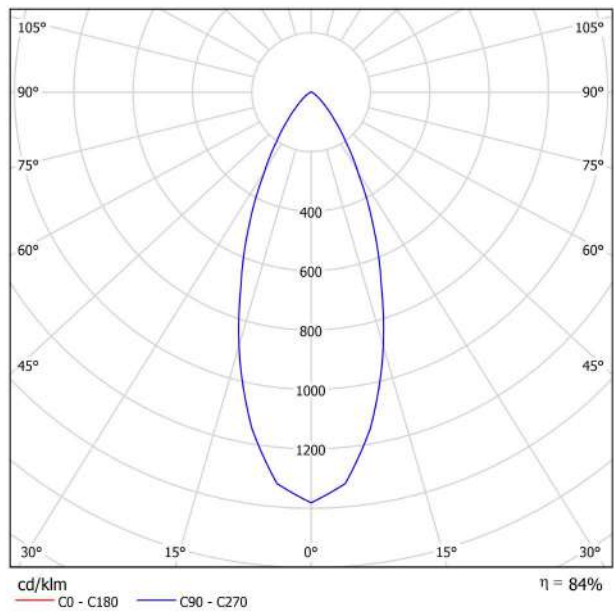


CONICAL DIAGRAM

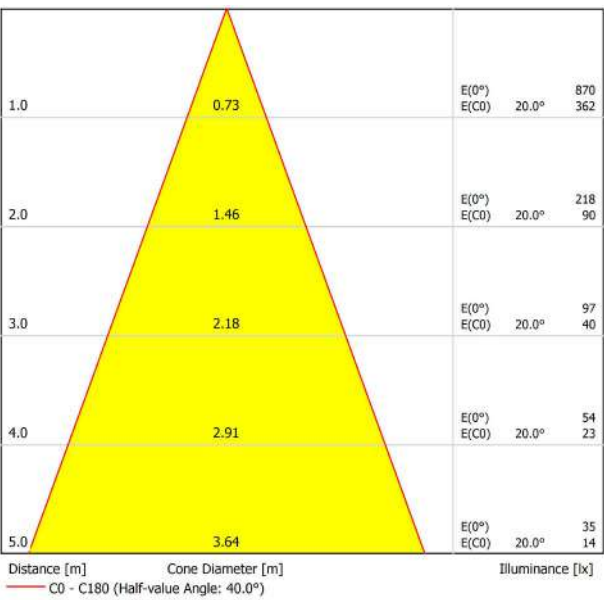



DIMENSIONS

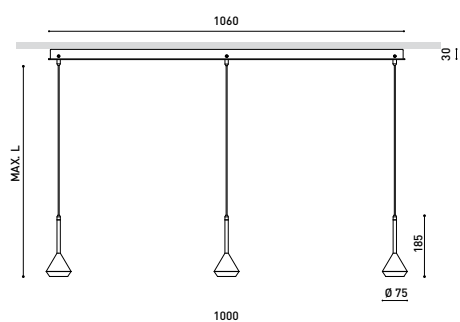

AWARDS



Name	SPIN 3 SURFACE 3M 40° 3000K WT-NT
Reference	A391111WTNT
Color	Textured white
RAL	9016
Category	SURFACE

PRODUCT

Light source	LED
Gross luminous flux	3 x 630 Lm
Power	3 x 6,5 W
Power values of the system	21,67 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	40°
Lighting efficiency	84%
Efficacy	97 Lm/W
Current intensity	700 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Cord length	3 m
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Reduced dimensions, clear lines and a mechanized geometry combined in a pendant luminaire for accent lighting. Its ultra-thin cable gives Spin a sensation of aerial floatability.

POLAR DIAGRAM

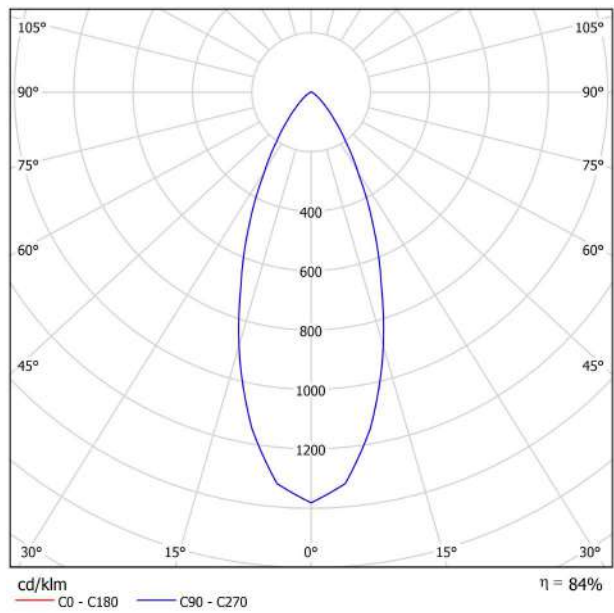


CONICAL DIAGRAM

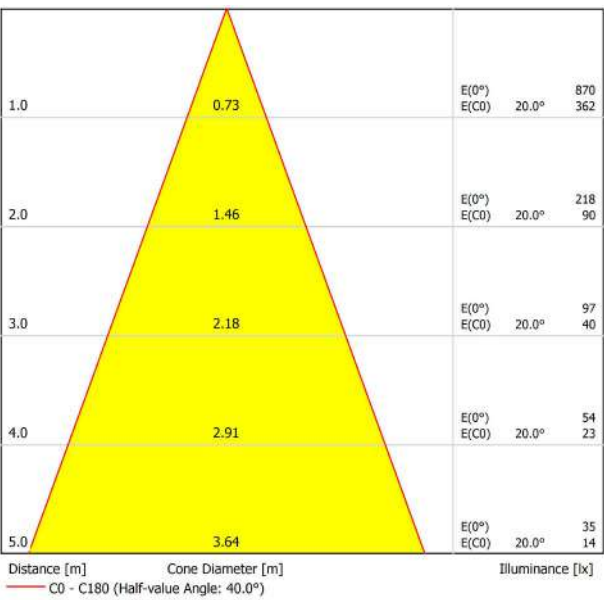



DIMENSIONS

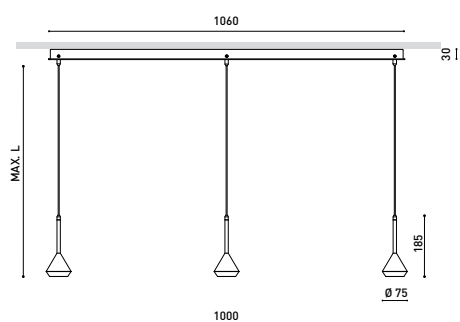

AWARDS



Name	SPIN 3 SURFACE 3M 40° 3000K WT-WT
Reference	A391111WTWT
Color	Textured white
RAL	9016
Category	SURFACE

PRODUCT

Light source	LED
Gross luminous flux	3 x 630 Lm
Power	3 x 6,5 W
Power values of the system	21,67 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	40°
Lighting efficiency	84%
Efficacy	97 Lm/W
Current intensity	700 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Cord length	3 m
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Reduced dimensions, clear lines and a mechanized geometry combined in a pendant luminaire for accent lighting. Its ultra-thin cable gives Spin a sensation of aerial floatability.

POLAR DIAGRAM

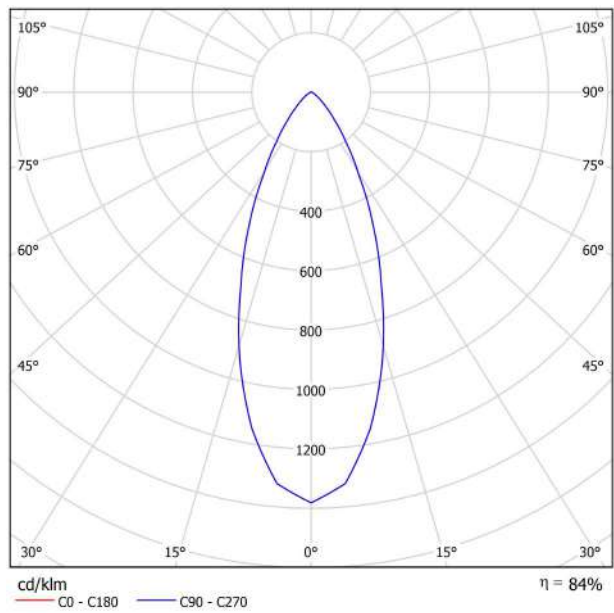


CONICAL DIAGRAM

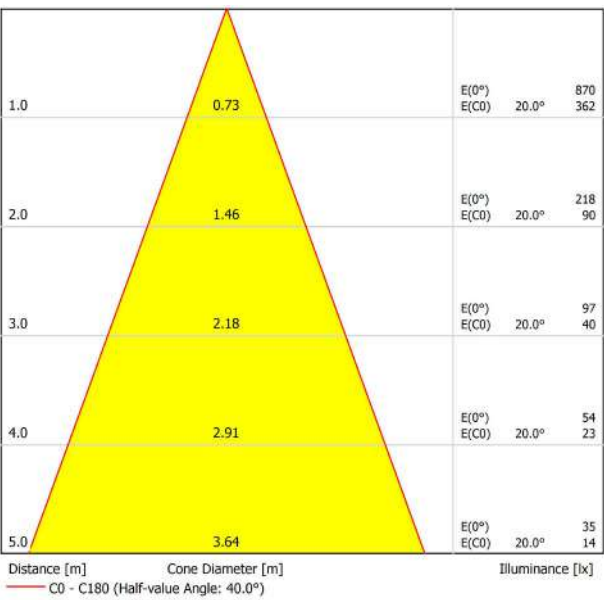



DIMENSIONS

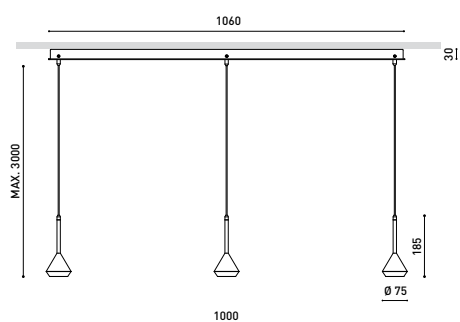

AWARDS



Name	SPIN 3 SURFACE 3M 40° 4000K MC-NT
Reference	A3911112MCNT
Color	Metallized copper
RAL	Electrolytic bath
Category	SUSPENSION

PRODUCT

Light source	LED
Gross luminous flux	3 x 680 Lm
Power	3 x 6,5 W
Power values of the system	21,67 W
Colour temperature	4000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	40°
Lighting efficiency	84%
Efficacy	105 Lm/W
Current intensity	700 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


OTHER DATA

Ingress Protection	IP20
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Spin Surface is a version that allows it to be installed in places where it is impossible to access the false ceiling. Cement, concrete, vault ... its base, set to apply three luminaires, houses the driver and allows the luminaire to be installed on all types of surfaces.

POLAR DIAGRAM

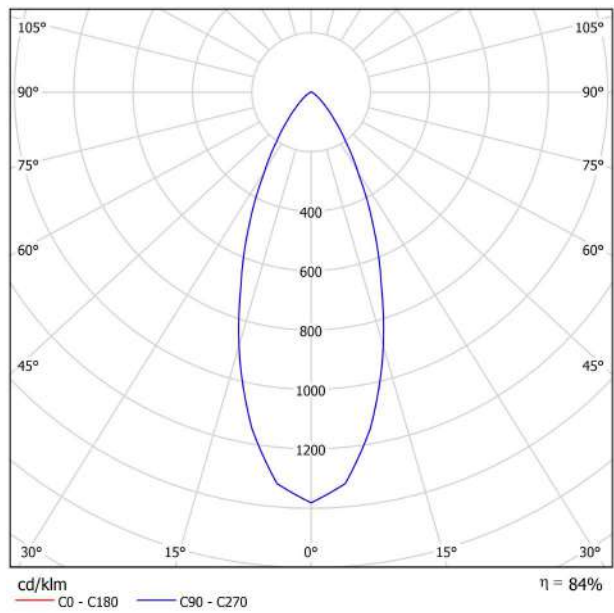


CONICAL DIAGRAM

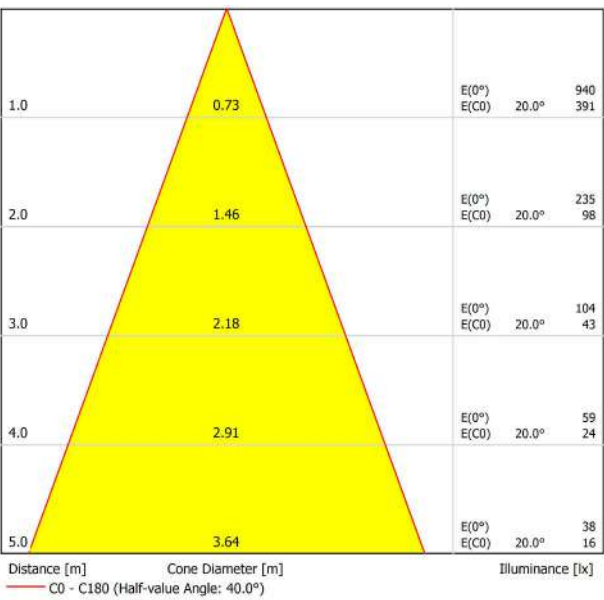



DIMENSIONS

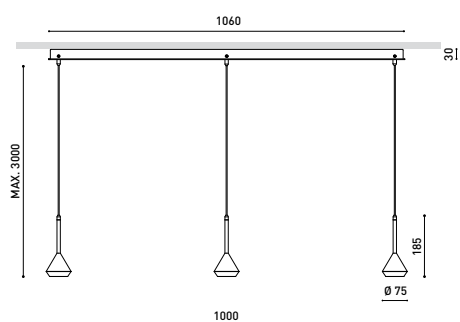

AWARDS



Name	SPIN 3 SURFACE 3M 40° 4000K MC-WT
Reference	A3911112MCWT
Color	Metallized copper
RAL	Electrolytic bath
Category	SUSPENSION

PRODUCT

Light source	LED
Gross luminous flux	3 x 680 Lm
Power	3 x 6,5 W
Power values of the system	21,67 W
Colour temperature	4000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	40°
Lighting efficiency	84%
Efficacy	105 Lm/W
Current intensity	700 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


OTHER DATA

Ingress Protection	IP20
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Spin Surface is a version that allows it to be installed in places where it is impossible to access the false ceiling. Cement, concrete, vault ... its base, set to apply three luminaires, houses the driver and allows the luminaire to be installed on all types of surfaces.

POLAR DIAGRAM

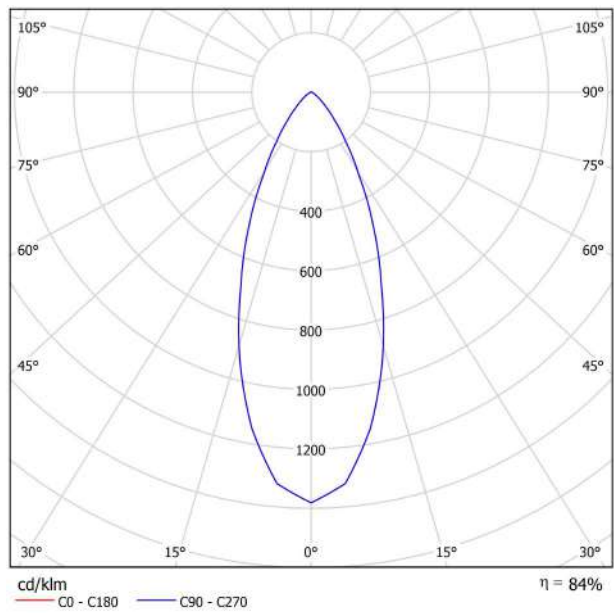


CONICAL DIAGRAM

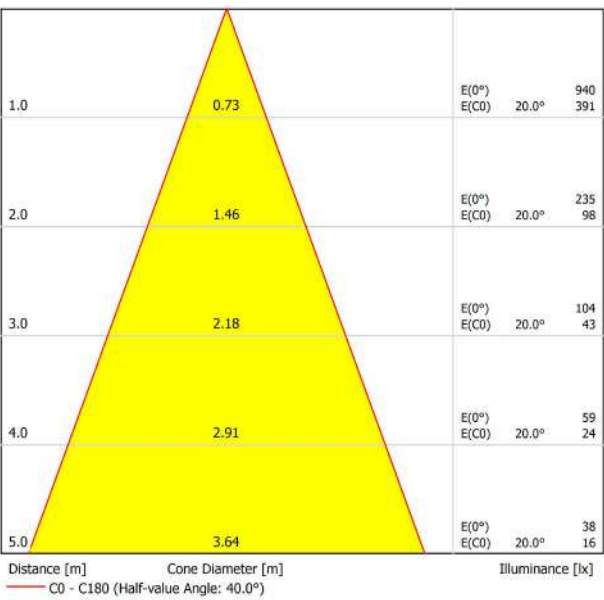



DIMENSIONS

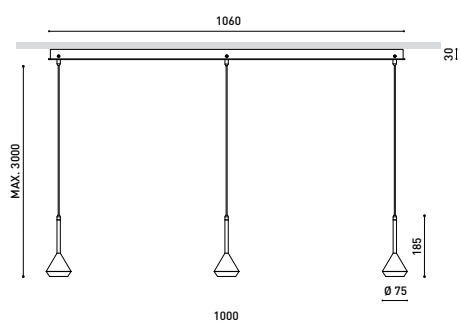

AWARDS



Name	SPIN 3 SURFACE 3M 40° 4000K MG-NT
Reference	A3911112MGNT
Color	Metallized gold
RAL	Electrolytic bath
Category	SUSPENSION

PRODUCT

Light source	LED
Gross luminous flux	3 x 680 Lm
Power	3 x 6,5 W
Power values of the system	21,67 W
Colour temperature	4000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	40°
Lighting efficiency	84%
Efficacy	105 Lm/W
Current intensity	700 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


LIGHTING INFORMATION

OTHER DATA


Ingress Protection	IP20
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate



POLAR DIAGRAM

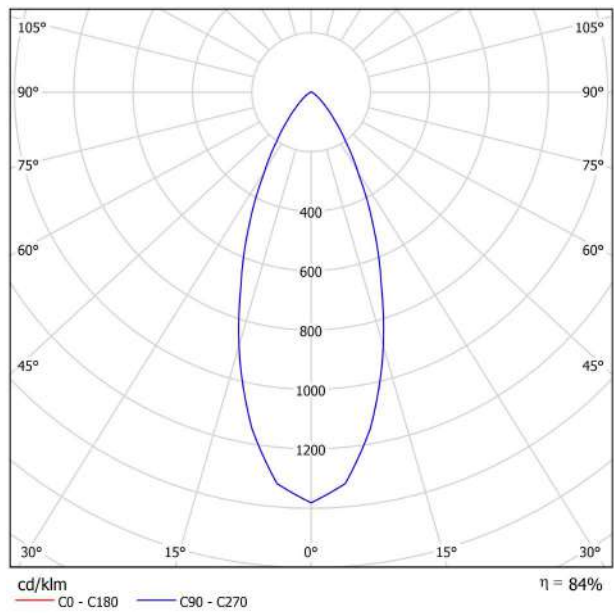


CONICAL DIAGRAM

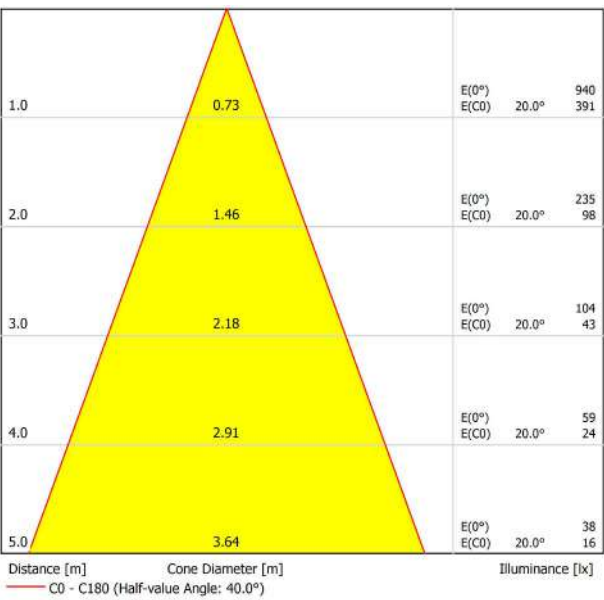



DIMENSIONS

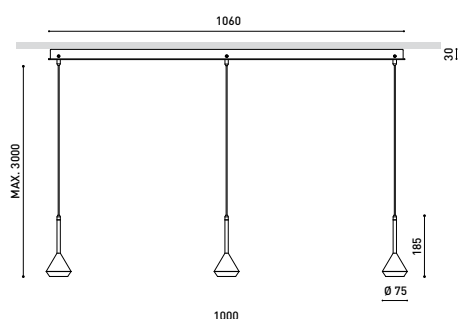

AWARDS



Name	SPIN 3 SURFACE 3M 40° 4000K MG-WT
Reference	A3911112MGWT
Color	Metallized gold
RAL	Electrolytic bath
Category	SUSPENSION

PRODUCT

Light source	LED
Gross luminous flux	3 x 680 Lm
Power	3 x 6,5 W
Power values of the system	21,67 W
Colour temperature	4000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	40°
Lighting efficiency	84%
Efficacy	105 Lm/W
Current intensity	700 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


LIGHTING INFORMATION

OTHER DATA


Ingress Protection	IP20
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate



POLAR DIAGRAM

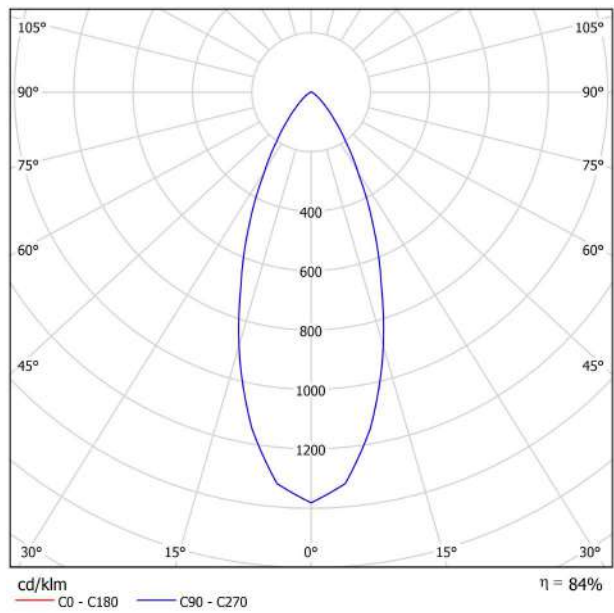


CONICAL DIAGRAM

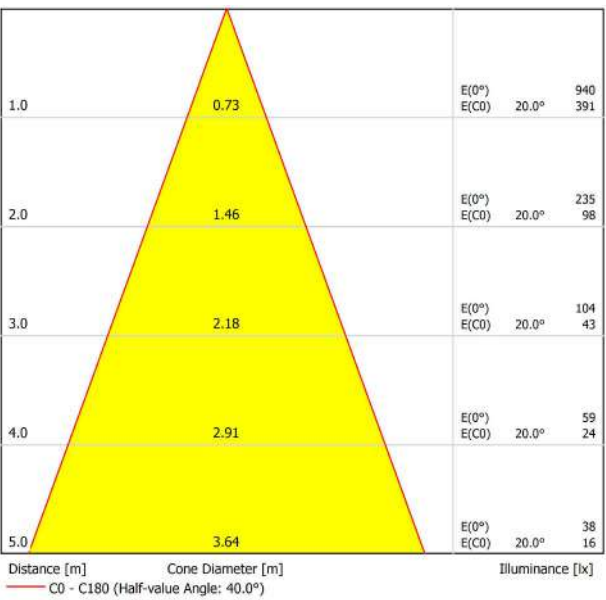



DIMENSIONS

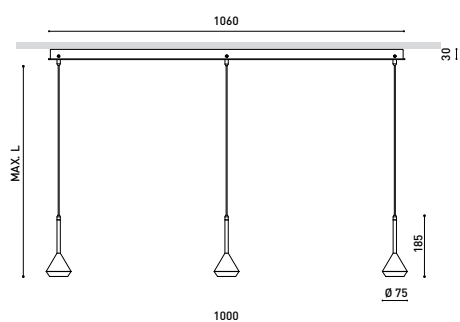

AWARDS



Name	SPIN 3 SURFACE 3M 40° 4000K NT-NT
Reference	A3911112NTNT
Color	Textured black
RAL	9005
Category	SURFACE

PRODUCT

Light source	LED
Gross luminous flux	3 x 680 Lm
Power	3 x 6,5 W
Power values of the system	21,67 W
Colour temperature	4000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	40°
Lighting efficiency	84%
Efficacy	105 Lm/W
Current intensity	700 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Cord length	3 m
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Reduced dimensions, clear lines and a mechanized geometry combined in a pendant luminaire for accent lighting. Its ultra-thin cable gives Spin a sensation of aerial floatability.

POLAR DIAGRAM

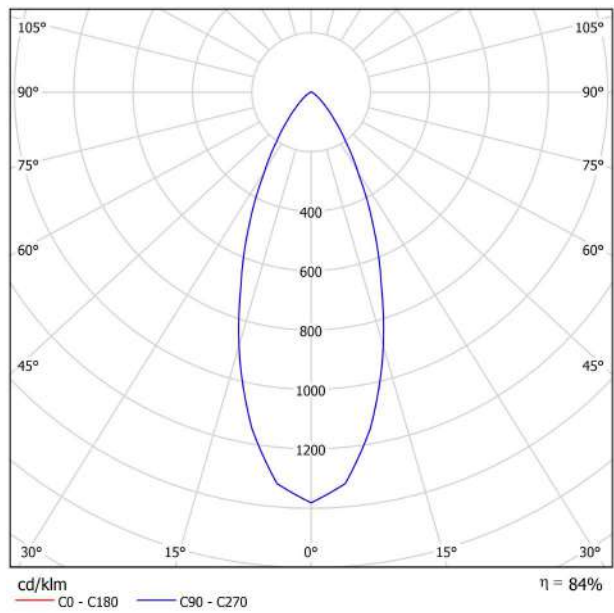


CONICAL DIAGRAM

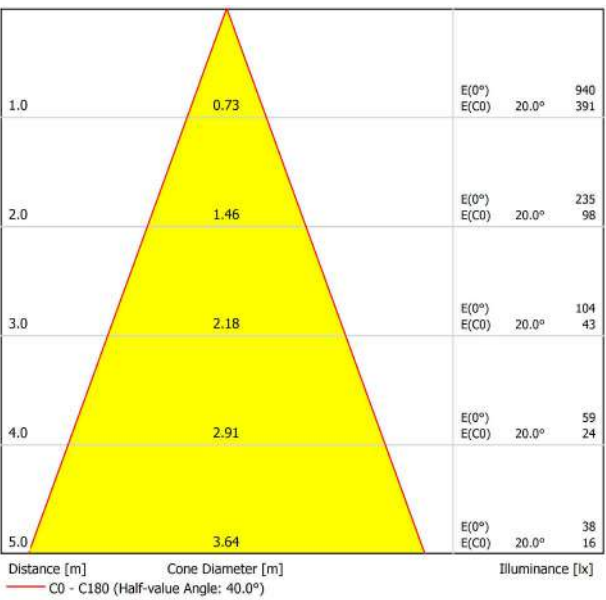



DIMENSIONS

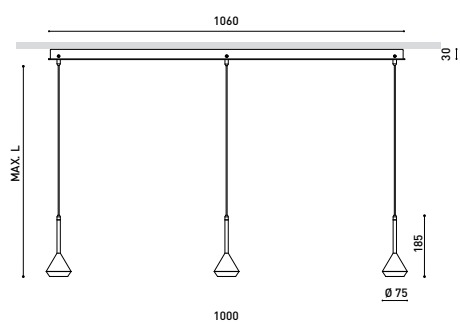

AWARDS



Name	SPIN 3 SURFACE 3M 40° 4000K NT-WT
Reference	A3911112NTWT
Color	Textured black
RAL	9005
Category	SURFACE

PRODUCT

Light source	LED
Gross luminous flux	3 x 680 Lm
Power	3 x 6,5 W
Power values of the system	21,67 W
Colour temperature	4000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	40°
Lighting efficiency	84%
Efficacy	105 Lm/W
Current intensity	700 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Cord length	3 m
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Reduced dimensions, clear lines and a mechanized geometry combined in a pendant luminaire for accent lighting. Its ultra-thin cable gives Spin a sensation of aerial floatability.

POLAR DIAGRAM

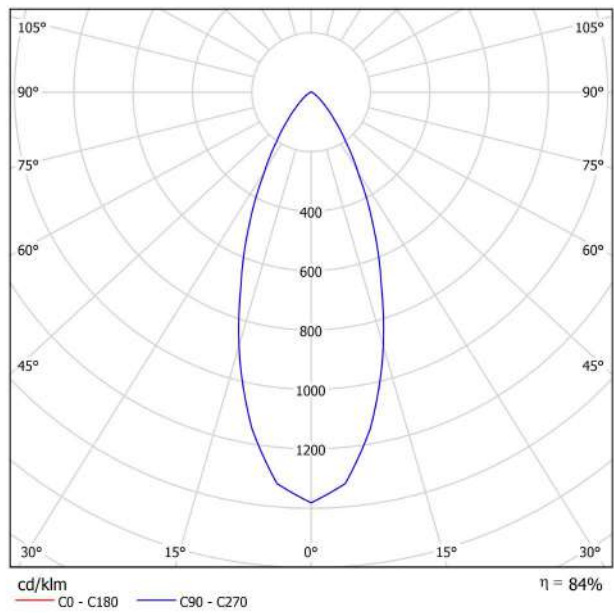


CONICAL DIAGRAM

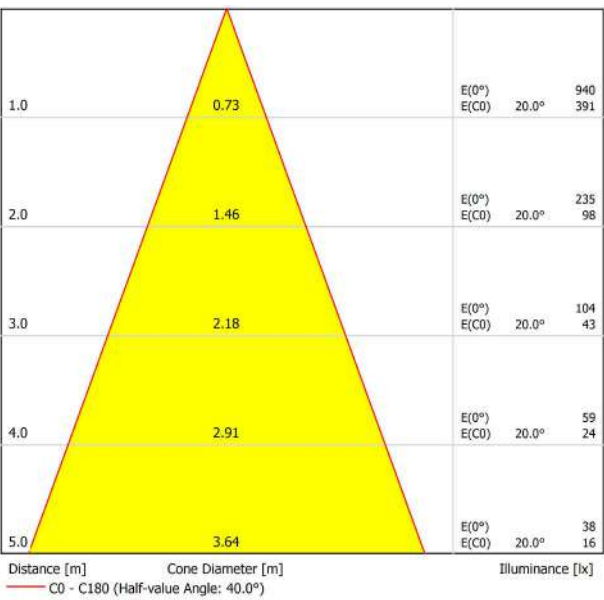



DIMENSIONS

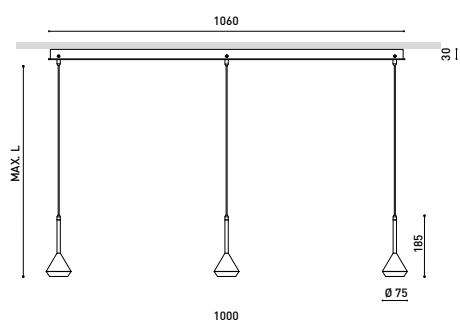

AWARDS



Name	SPIN 3 SURFACE 3M 40° 4000K WT-NT
Reference	A3911112WTNT
Color	Textured white
RAL	9016
Category	SURFACE

PRODUCT

Light source	LED
Gross luminous flux	3 x 680 Lm
Power	3 x 6,5 W
Power values of the system	21,67 W
Colour temperature	4000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	40°
Lighting efficiency	84%
Efficacy	105 Lm/W
Current intensity	700 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Cord length	3 m
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Reduced dimensions, clear lines and a mechanized geometry combined in a pendant luminaire for accent lighting. Its ultra-thin cable gives Spin a sensation of aerial floatability.

POLAR DIAGRAM

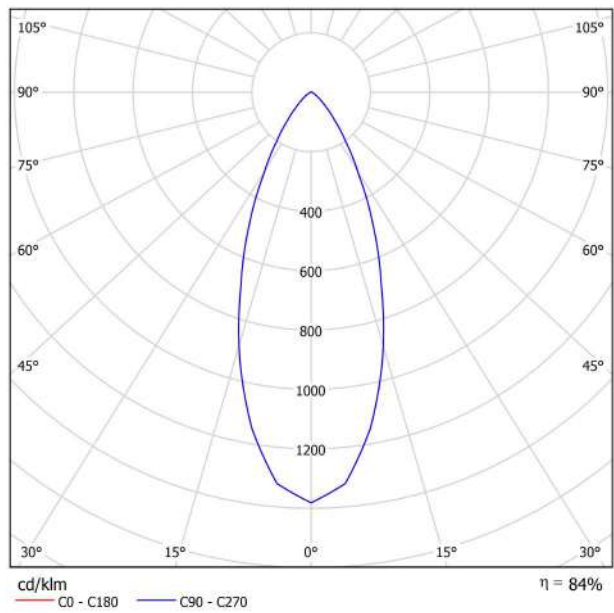


CONICAL DIAGRAM

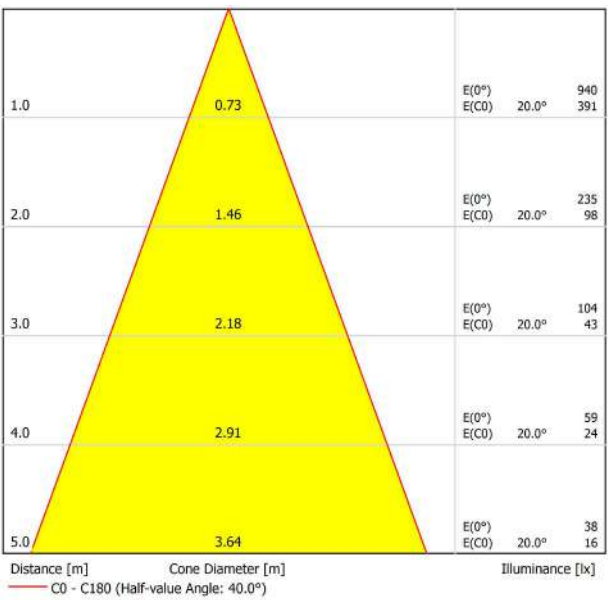



DIMENSIONS

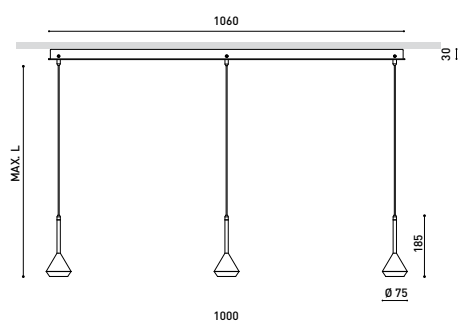

AWARDS



Name	SPIN 3 SURFACE 3M 40° 4000K WT-WT
Reference	A3911112WTWT
Color	Textured white
RAL	9016
Category	SURFACE

PRODUCT

Light source	LED
Gross luminous flux	3 x 680 Lm
Power	3 x 6,5 W
Power values of the system	21,67 W
Colour temperature	4000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	40°
Lighting efficiency	84%
Efficacy	105 Lm/W
Current intensity	700 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Cord length	3 m
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Reduced dimensions, clear lines and a mechanized geometry combined in a pendant luminaire for accent lighting. Its ultra-thin cable gives Spin a sensation of aerial floatability.

POLAR DIAGRAM

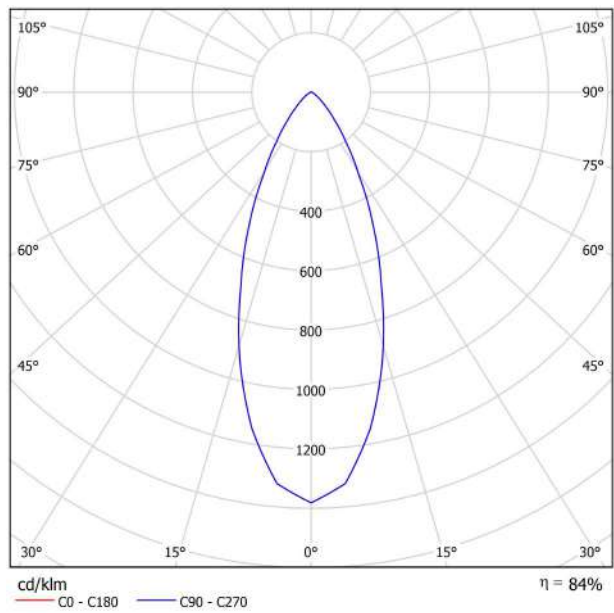


CONICAL DIAGRAM

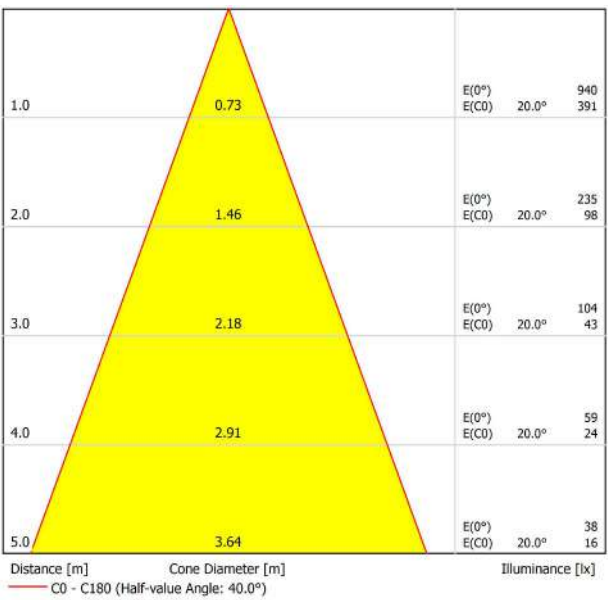



DIMENSIONS

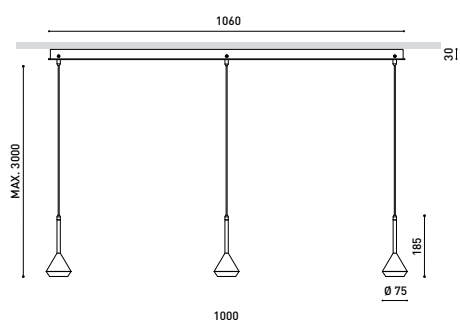

AWARDS



Name	SPIN 3 SURFACE 3M 24° DIM DALI 2700K MC-NT
Reference	A3911200MCNT
Color	Metallized copper
RAL	Electrolytic bath
Category	SUSPENSION

PRODUCT

LIGHTING INFORMATION

LED

3 x 600 Lm

3 x 6,5 W

23,78 W

2700 K

CRI>90

MacAdam Step 2

24°

86%

92 Lm/W

700 mA

DALI - Other DIM, please consult

Please Consult

Included

☐

220 V/240 V

50/60 Hz

A+

L80B10 (Tc=85°C) >60.000h

OTHER DATA

IP20

No

4150 g.

4577 g.

1078 x 139 x 89 mm


1

Aluminium / Polymethyl Methacrylate




Spin Surface is a version that allows it to be installed in places where it is impossible to access the false ceiling. Cement, concrete, vault ... its base, set to apply three luminaires, houses the driver and allows the luminaire to be installed on all types of surfaces.

POLAR DIAGRAM

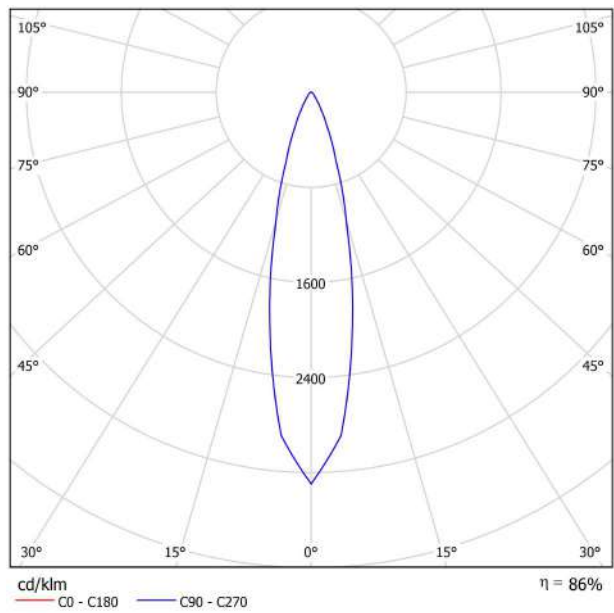


CONICAL DIAGRAM

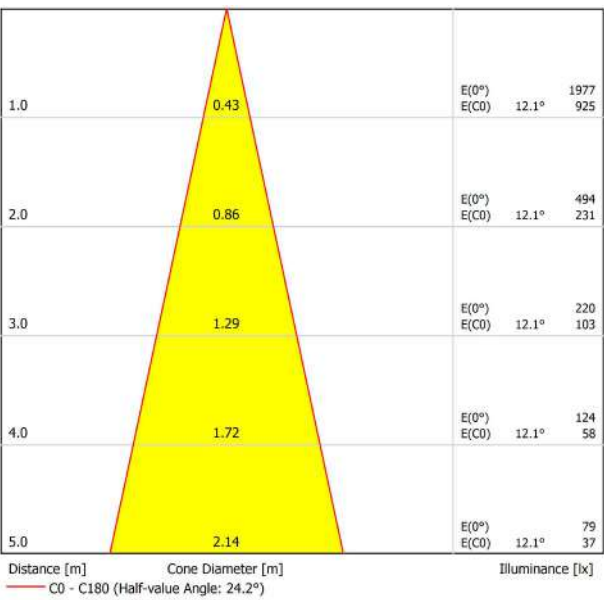



DIMENSIONS

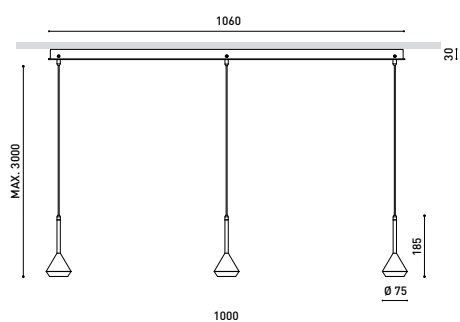

AWARDS



Name	SPIN 3 SURFACE 3M 24° DIM DALI 2700K MC-WT
Reference	A3911200MCWT
Color	Metallized copper
RAL	Electrolytic bath
Category	SUSPENSION

PRODUCT

Light source	LED
Gross luminous flux	3 x 600 Lm
Power	3 x 6,5 W
Power values of the system	23,78 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	24°
Lighting efficiency	86%
Efficacy	92 Lm/W
Current intensity	700 mA
Dimming	DALI - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


OTHER DATA

Ingress Protection	IP20
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Spin Surface is a version that allows it to be installed in places where it is impossible to access the false ceiling. Cement, concrete, vault ... its base, set to apply three luminaires, houses the driver and allows the luminaire to be installed on all types of surfaces.

POLAR DIAGRAM

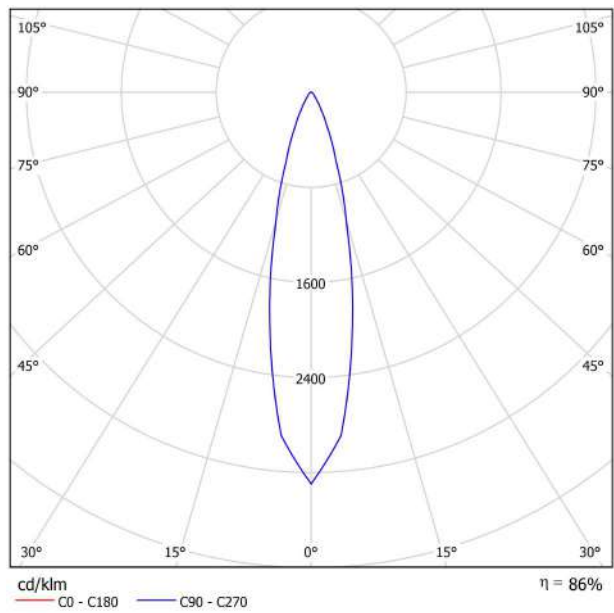


CONICAL DIAGRAM

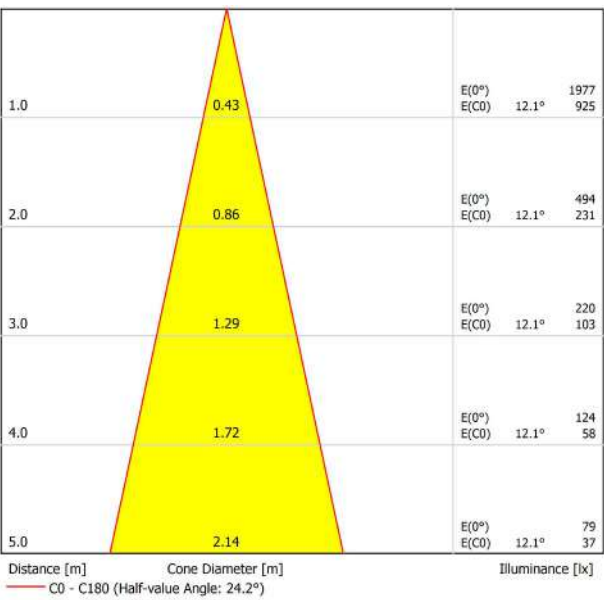



DIMENSIONS

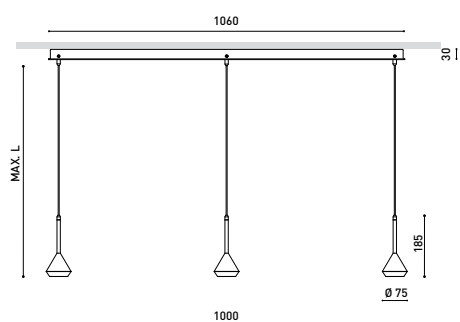

AWARDS



Name	SPIN 3 SURFACE 3M 24° 4000K WT-WT
Reference	A3911102WTWT
Color	Textured white
RAL	9016
Category	SURFACE

PRODUCT

Light source	LED
Gross luminous flux	3 x 680 Lm
Power	3 x 6,5 W
Power values of the system	21,67 W
Colour temperature	4000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	24°
Lighting efficiency	86%
Efficacy	105 Lm/W
Current intensity	700 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Cord length	3 m
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Reduced dimensions, clear lines and a mechanized geometry combined in a pendant luminaire for accent lighting. Its ultra-thin cable gives Spin a sensation of aerial floatability.

POLAR DIAGRAM

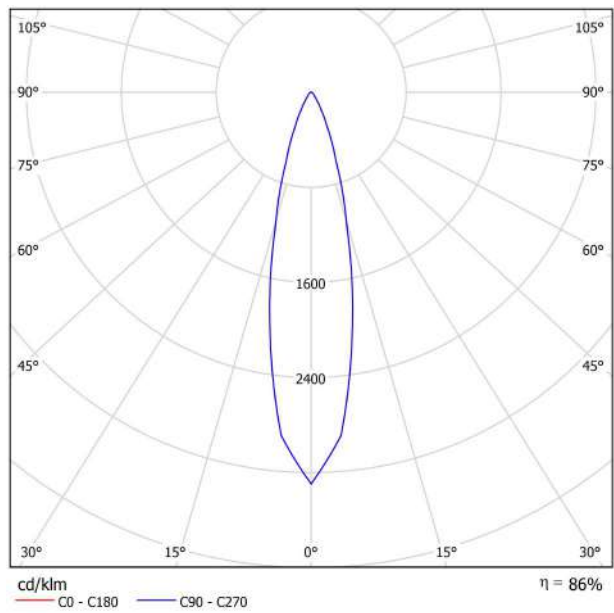


CONICAL DIAGRAM

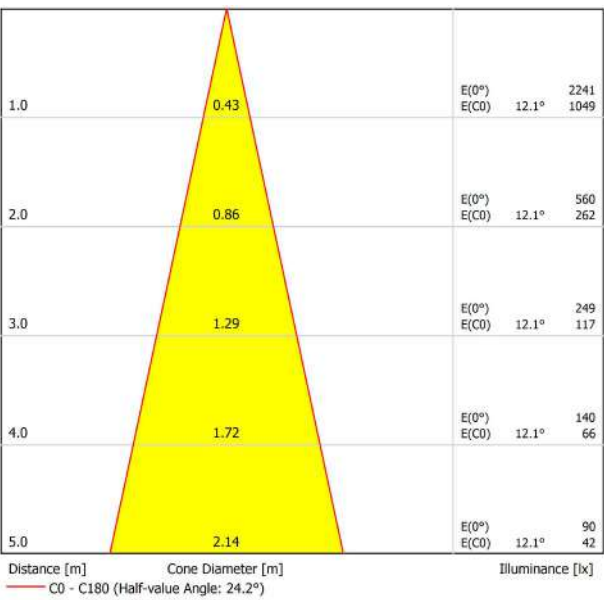



DIMENSIONS

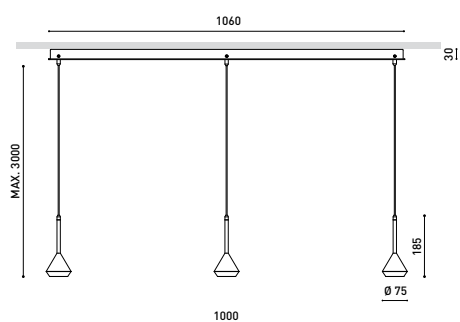

AWARDS



Name	SPIN 3 SURFACE 3M 40° 2700K MC-NT
Reference	A3911110MCNT
Color	Metallized copper
RAL	Electrolytic bath
Category	SUSPENSION

PRODUCT

Light source	LED
Gross luminous flux	3 x 600 Lm
Power	3 x 6,5 W
Power values of the system	21,67 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	40°
Lighting efficiency	84%
Efficacy	92 Lm/W
Current intensity	700 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


OTHER DATA

Ingress Protection	IP20
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Spin Surface is a version that allows it to be installed in places where it is impossible to access the false ceiling. Cement, concrete, vault ... its base, set to apply three luminaires, houses the driver and allows the luminaire to be installed on all types of surfaces.

POLAR DIAGRAM

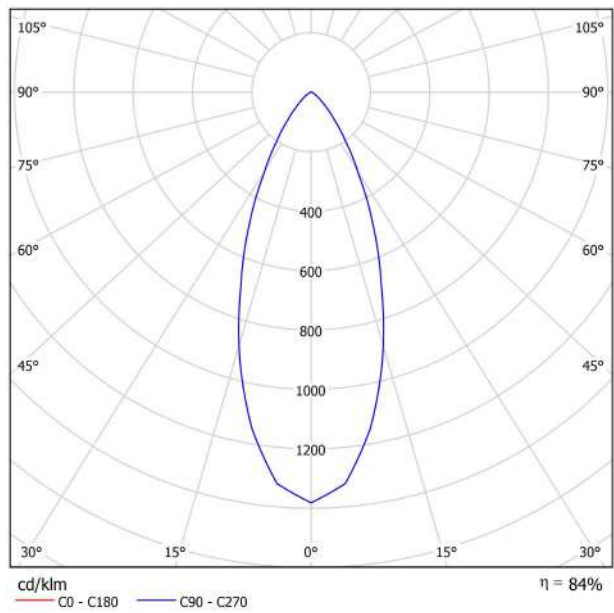


CONICAL DIAGRAM

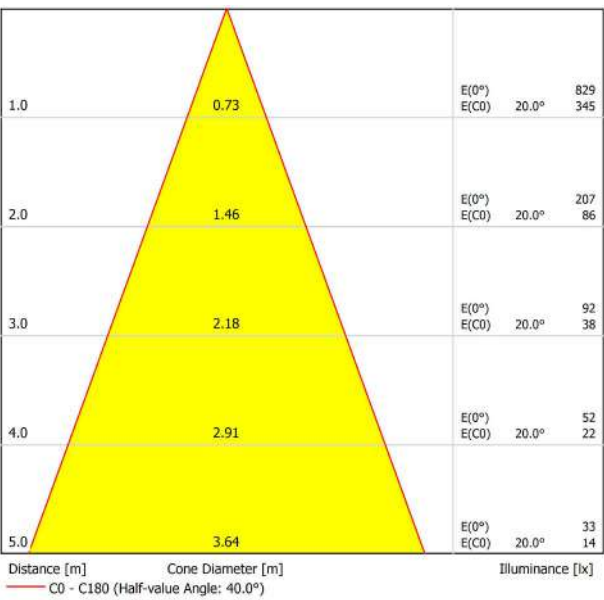



DIMENSIONS

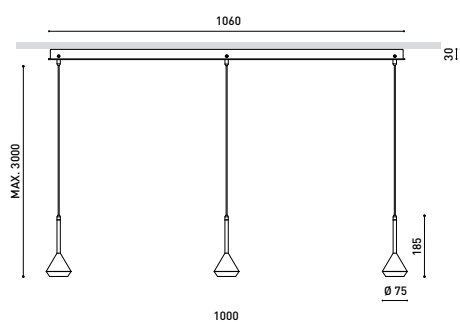

AWARDS



Name	SPIN 3 SURFACE 3M 40° 2700K MC-WT
Reference	A3911110MCWT
Color	Metallized copper
RAL	Electrolytic bath
Category	SUSPENSION

PRODUCT

LIGHTING INFORMATION

LED

3 x 600 Lm

3 x 6,5 W

21,67 W

2700 K

CRI>90

MacAdam Step 2

40°

84%

92 Lm/W

700 mA

No Dim - Other DIM, please consult

Please Consult

Included

☐

220 V/240 V

50/60 Hz

A+

L80B10 (Tc=85°C) >60.000h

OTHER DATA

IP20

No

4150 g.

4577 g.

1078 x 139 x 89 mm


1

Aluminium / Polymethyl Methacrylate




Spin Surface is a version that allows it to be installed in places where it is impossible to access the false ceiling. Cement, concrete, vault ... its base, set to apply three luminaires, houses the driver and allows the luminaire to be installed on all types of surfaces.

POLAR DIAGRAM

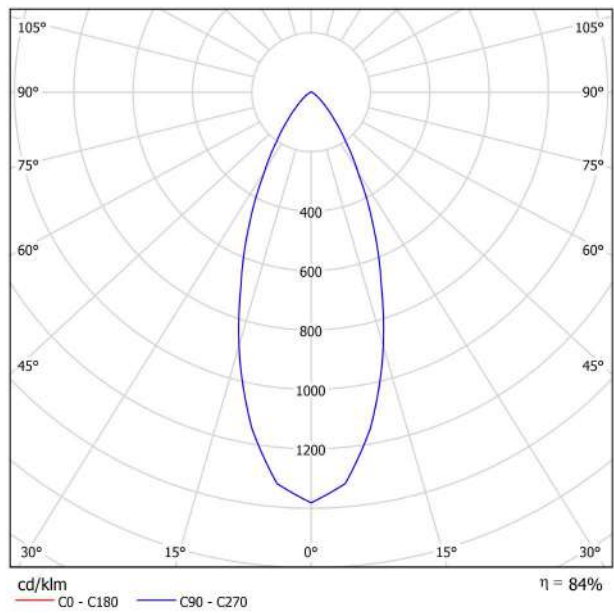


CONICAL DIAGRAM

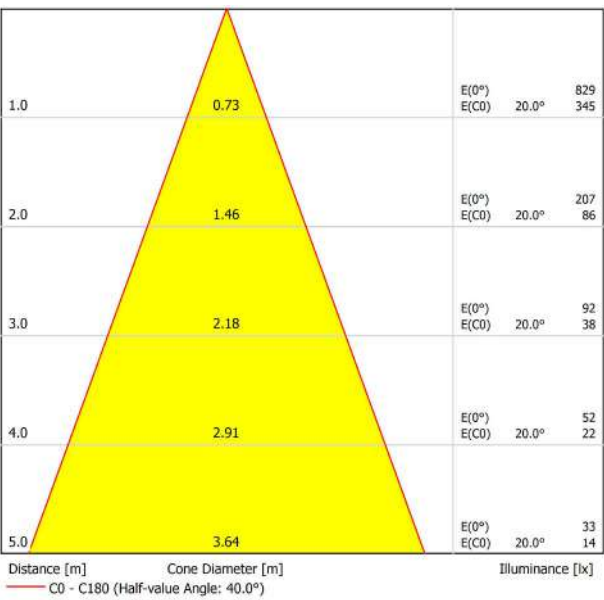



DIMENSIONS

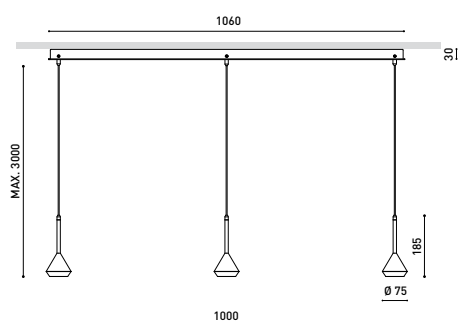

AWARDS



Name	SPIN 3 SURFACE 3M 40° 2700K MG-NT
Reference	A3911110MGNT
Color	Metallized gold
RAL	Electrolytic bath
Category	SUSPENSION

PRODUCT

Light source	LED
Gross luminous flux	3 x 600 Lm
Power	3 x 6,5 W
Power values of the system	21,67 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	40°
Lighting efficiency	84%
Efficacy	92 Lm/W
Current intensity	700 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


LIGHTING INFORMATION

OTHER DATA


Ingress Protection	IP20
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate



POLAR DIAGRAM

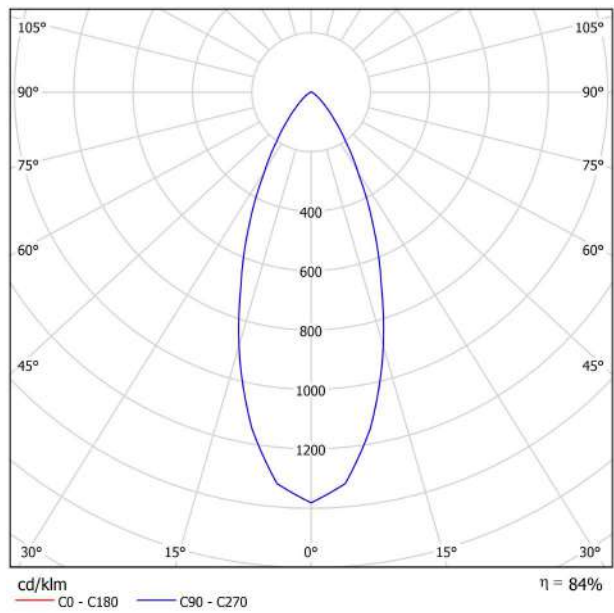


CONICAL DIAGRAM

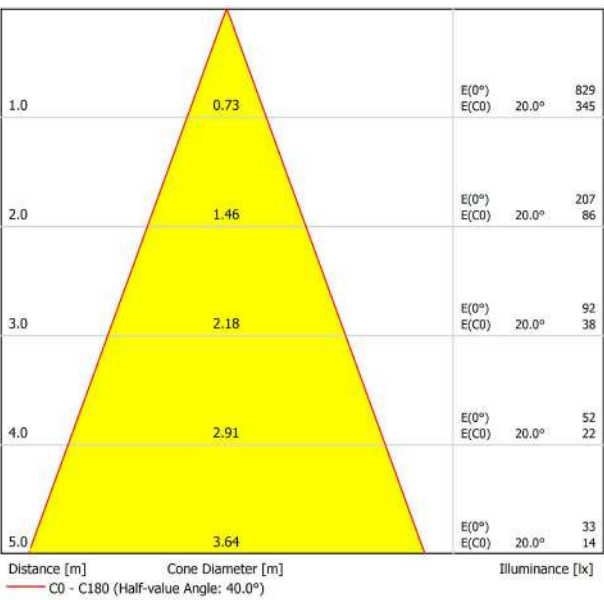



DIMENSIONS

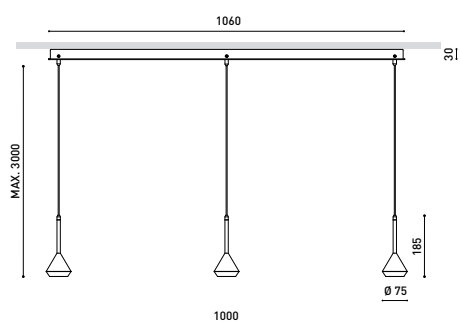

AWARDS



Name	SPIN 3 SURFACE 3M 40° 2700K MG-WT
Reference	A3911110MGWT
Color	Metallized gold
RAL	Electrolytic bath
Category	SUSPENSION

PRODUCT

Light source	LED
Gross luminous flux	3 x 600 Lm
Power	3 x 6,5 W
Power values of the system	21,67 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	40°
Lighting efficiency	84%
Efficacy	92 Lm/W
Current intensity	700 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


LIGHTING INFORMATION

OTHER DATA


Ingress Protection	IP20
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate



POLAR DIAGRAM

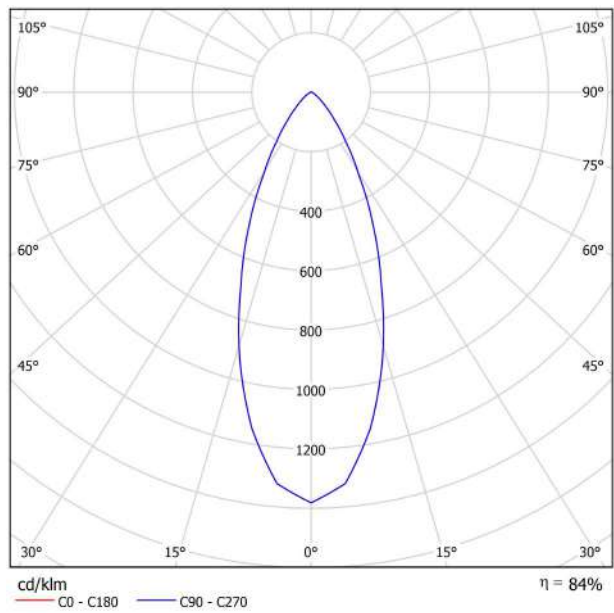


CONICAL DIAGRAM

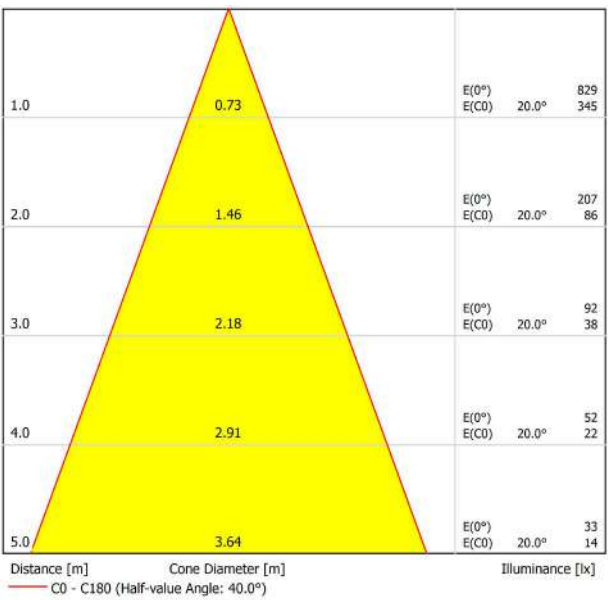



DIMENSIONS

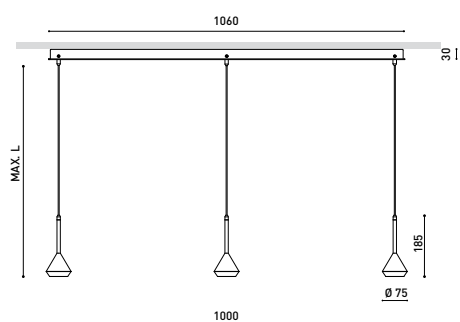

AWARDS



Name	SPIN 3 SURFACE 3M 40° 2700K NT-NT
Reference	A3911110NTNT
Color	Textured black
RAL	9005
Category	SURFACE

PRODUCT

Light source	LED
Gross luminous flux	3 x 600 Lm
Power	3 x 6,5 W
Power values of the system	21,67 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	40°
Lighting efficiency	84%
Efficacy	92 Lm/W
Current intensity	700 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Cord length	3 m
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Reduced dimensions, clear lines and a mechanized geometry combined in a pendant luminaire for accent lighting. Its ultra-thin cable gives Spin a sensation of aerial floatability.

POLAR DIAGRAM

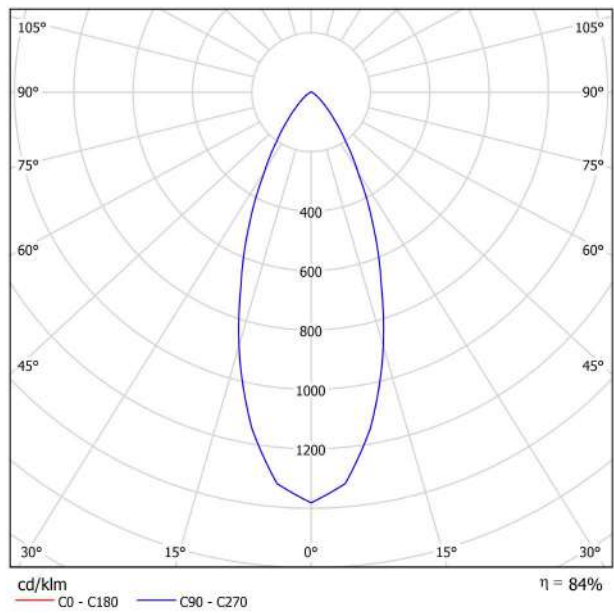


CONICAL DIAGRAM

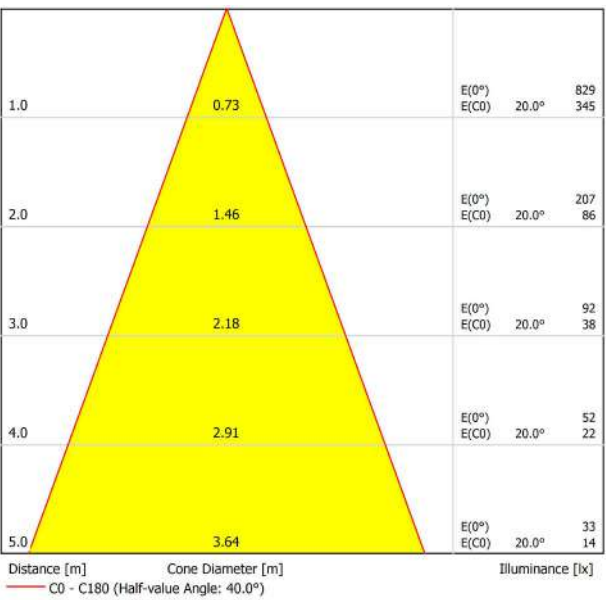



DIMENSIONS

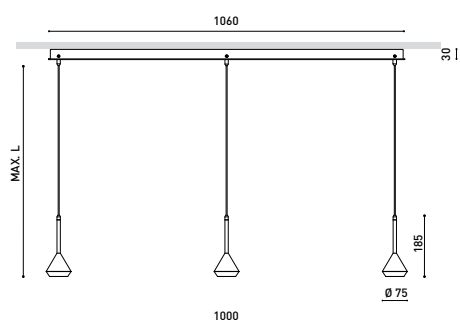

AWARDS



Name	SPIN 3 SURFACE 3M 24° 2700K NT-NT
Reference	A3911100NTNT
Color	Textured black
RAL	9005
Category	SURFACE

PRODUCT

Light source	LED
Gross luminous flux	3 x 600 Lm
Power	3 x 6,5 W
Power values of the system	21,67 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	24°
Lighting efficiency	86%
Efficacy	105 Lm/W
Current intensity	700 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Cord length	3 m
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Reduced dimensions, clear lines and a mechanized geometry combined in a pendant luminaire for accent lighting. Its ultra-thin cable gives Spin a sensation of aerial floatability.

POLAR DIAGRAM

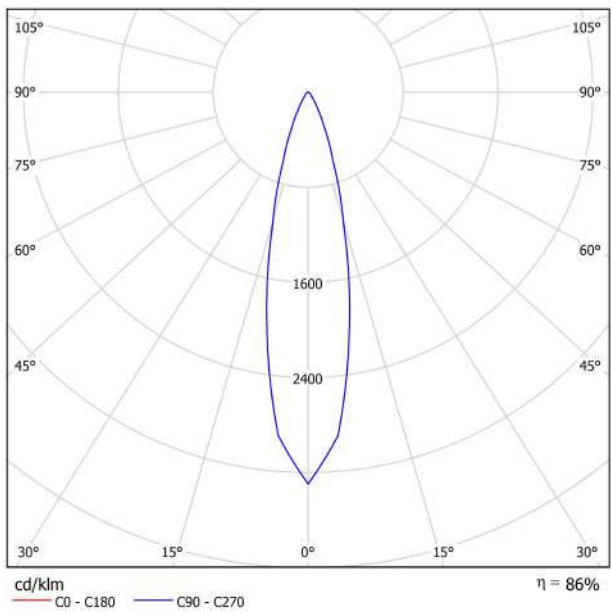


CONICAL DIAGRAM

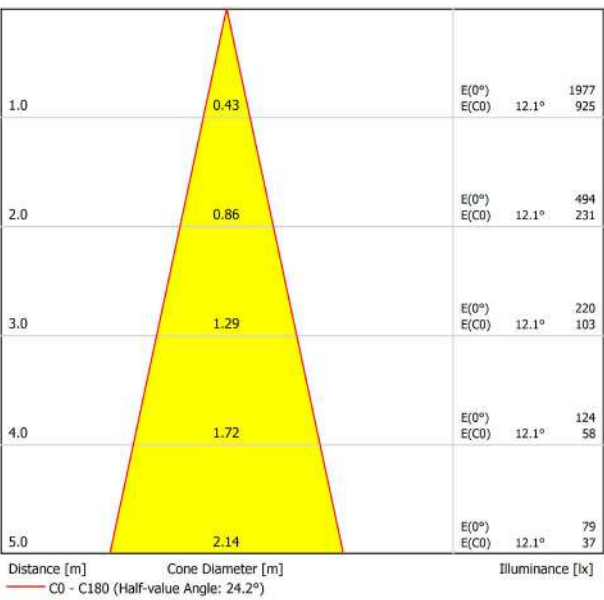



DIMENSIONS

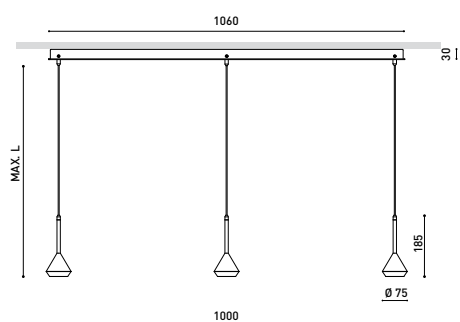

AWARDS



Name	SPIN 3 SURFACE 3M 24° 2700K NT-WT
Reference	A3911100NTWT
Color	Textured black
RAL	9005
Category	SURFACE

PRODUCT

Light source	LED
Gross luminous flux	3 x 600 Lm
Power	3 x 6,5 W
Power values of the system	21,67 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	24°
Lighting efficiency	86%
Efficacy	105 Lm/W
Current intensity	700 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Cord length	3 m
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Reduced dimensions, clear lines and a mechanized geometry combined in a pendant luminaire for accent lighting. Its ultra-thin cable gives Spin a sensation of aerial floatability.

POLAR DIAGRAM

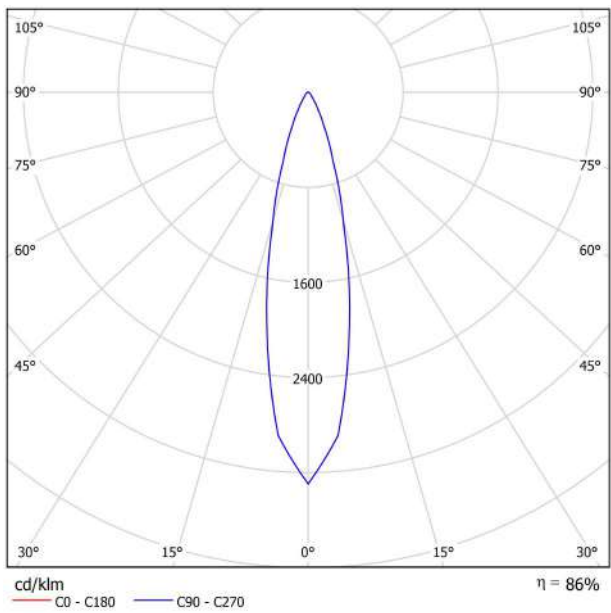


CONICAL DIAGRAM

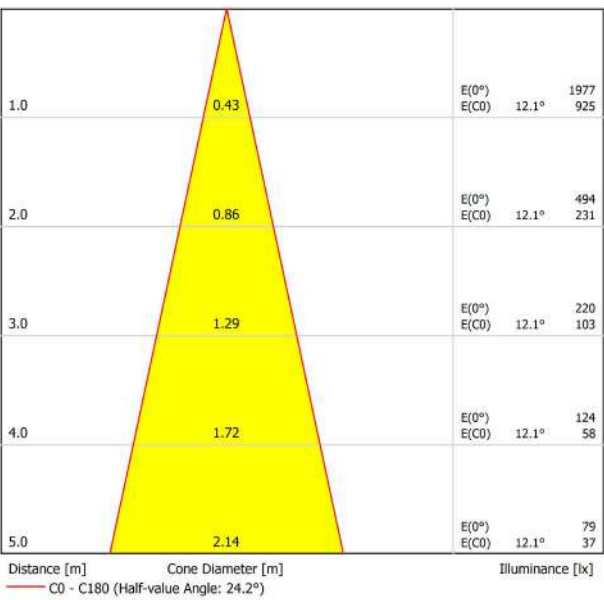



DIMENSIONS

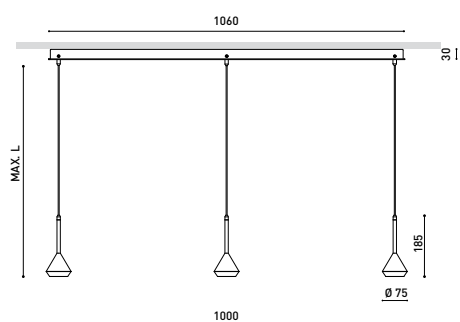

AWARDS



Name	SPIN 3 SURFACE 3M 24° 2700K WT-NT
Reference	A3911100WTNT
Color	Textured white
RAL	9016
Category	SURFACE

PRODUCT

Light source	LED
Gross luminous flux	3 x 600 Lm
Power	3 x 6,5 W
Power values of the system	21,67 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	24°
Lighting efficiency	86%
Efficacy	92 Lm/W
Current intensity	700 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	□
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Cord length	3 m
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Reduced dimensions, clear lines and a mechanized geometry combined in a pendant luminaire for accent lighting. Its ultra-thin cable gives Spin a sensation of aerial floatability.

POLAR DIAGRAM

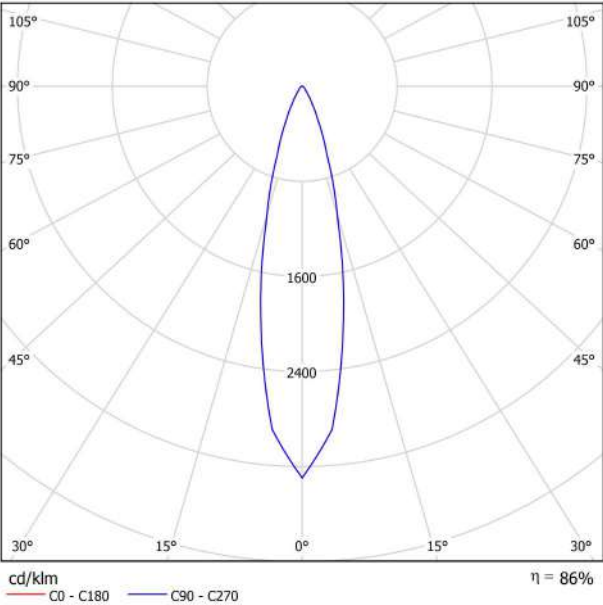


CONICAL DIAGRAM

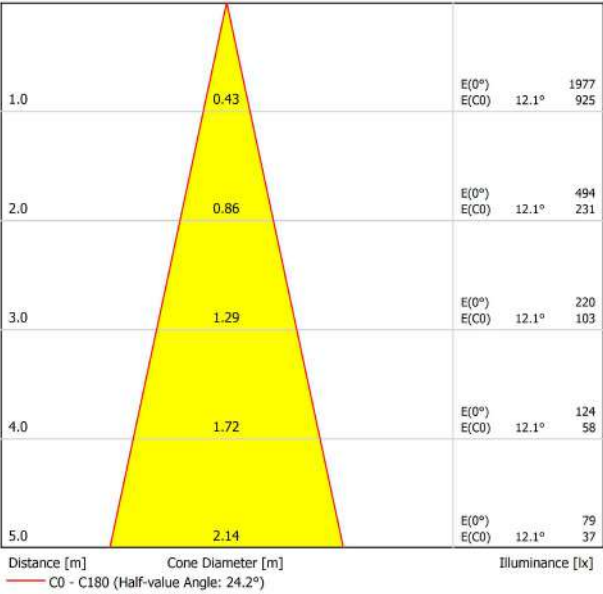



DIMENSIONS

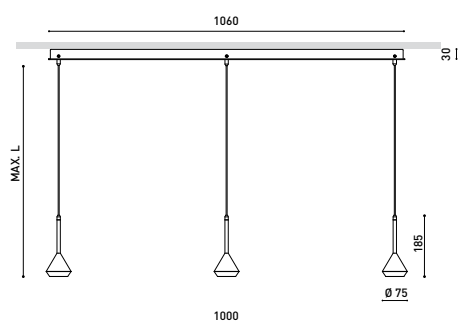

AWARDS



Name	SPIN 3 SURFACE 3M 24° 2700K WT-WT
Reference	A3911100WTWT
Color	Textured white
RAL	9016
Category	SURFACE

PRODUCT

Light source	LED
Gross luminous flux	3 x 600 Lm
Power	3 x 6,5 W
Power values of the system	21,67 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	24°
Lighting efficiency	86%
Efficacy	92 Lm/W
Current intensity	700 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Cord length	3 m
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Reduced dimensions, clear lines and a mechanized geometry combined in a pendant luminaire for accent lighting. Its ultra-thin cable gives Spin a sensation of aerial floatability.

POLAR DIAGRAM

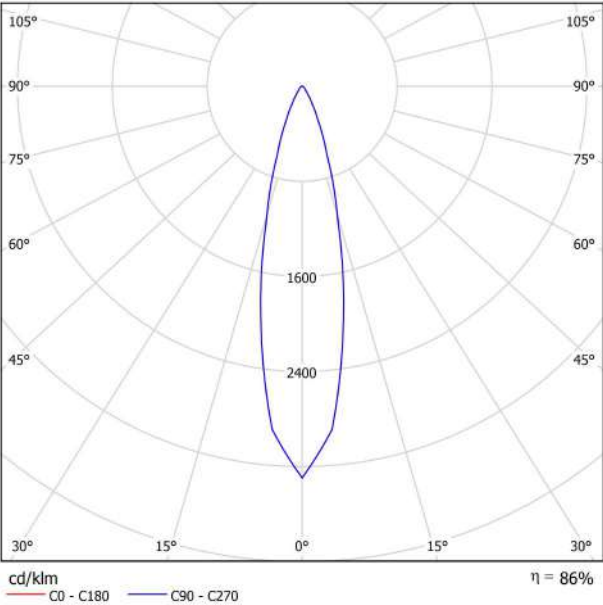


CONICAL DIAGRAM

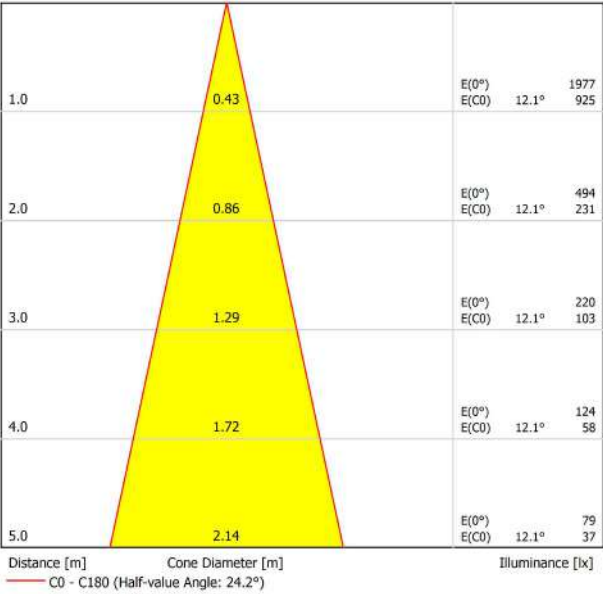



DIMENSIONS

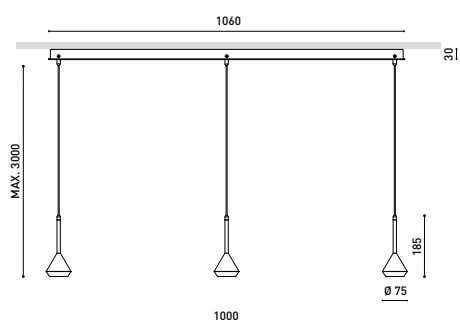

AWARDS



Name	SPIN 3 SURFACE 3M 40° 3000K MC-NT
Reference	A3911101MCNT
Color	Metallized copper
RAL	Electrolytic bath
Category	SUSPENSION

PRODUCT

Light source	LED
Gross luminous flux	3 x 630 Lm
Power	3 x 6,5 W
Power values of the system	21,67 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	24°
Lighting efficiency	86%
Efficacy	97 Lm/W
Current intensity	700 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


OTHER DATA

Ingress Protection	IP20
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Spin Surface is a version that allows it to be installed in places where it is impossible to access the false ceiling. Cement, concrete, vault ... its base, set to apply three luminaires, houses the driver and allows the luminaire to be installed on all types of surfaces.

POLAR DIAGRAM

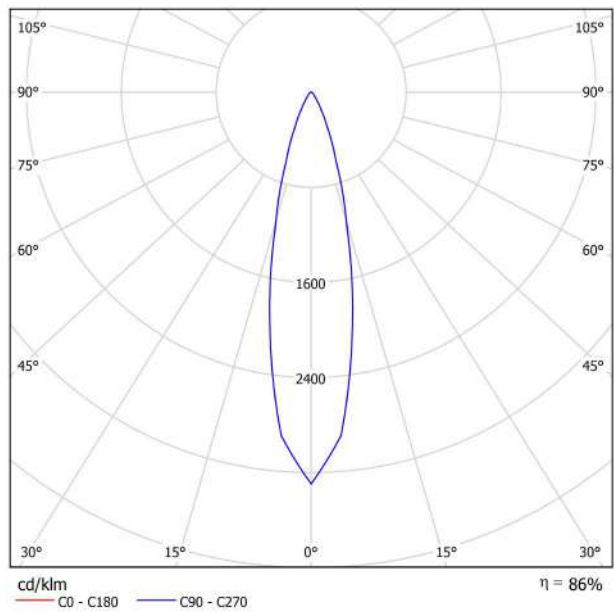


CONICAL DIAGRAM

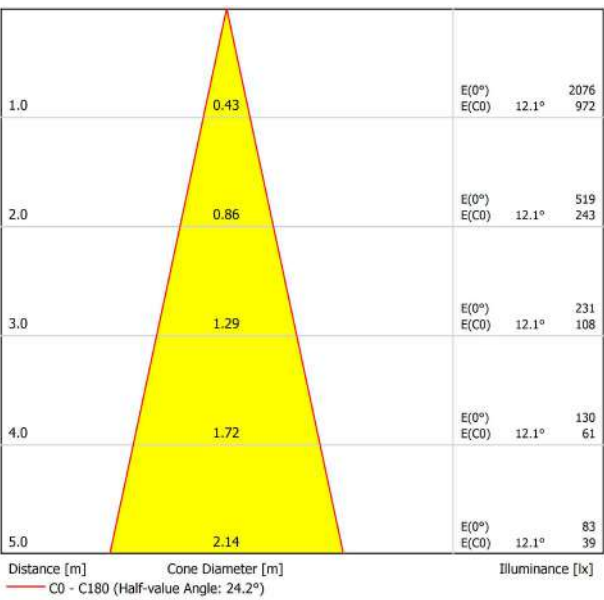



DIMENSIONS

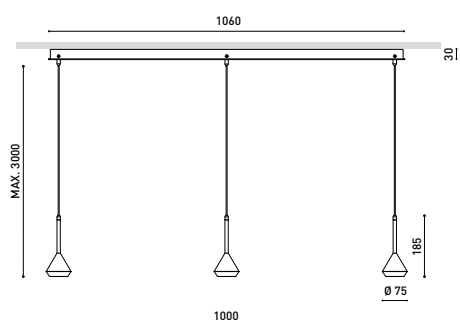

AWARDS



Name	SPIN 3 SURFACE 3M 40° 3000K MC-WT
Reference	A3911101MCWT
Color	Metallized copper
RAL	Electrolytic bath
Category	SUSPENSION

PRODUCT

Light source	LED
Gross luminous flux	3 x 630 Lm
Power	3 x 6,5 W
Power values of the system	21,67 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	24°
Lighting efficiency	86%
Efficacy	97 Lm/W
Current intensity	700 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


OTHER DATA

Ingress Protection	IP20
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Spin Surface is a version that allows it to be installed in places where it is impossible to access the false ceiling. Cement, concrete, vault ... its base, set to apply three luminaires, houses the driver and allows the luminaire to be installed on all types of surfaces.

POLAR DIAGRAM

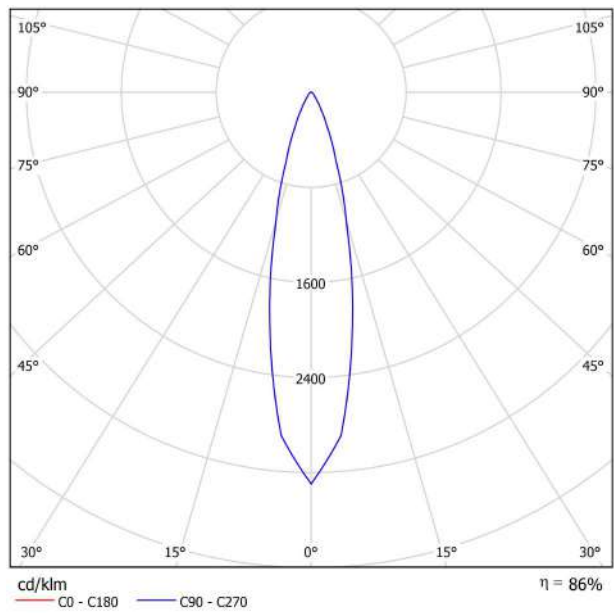


CONICAL DIAGRAM

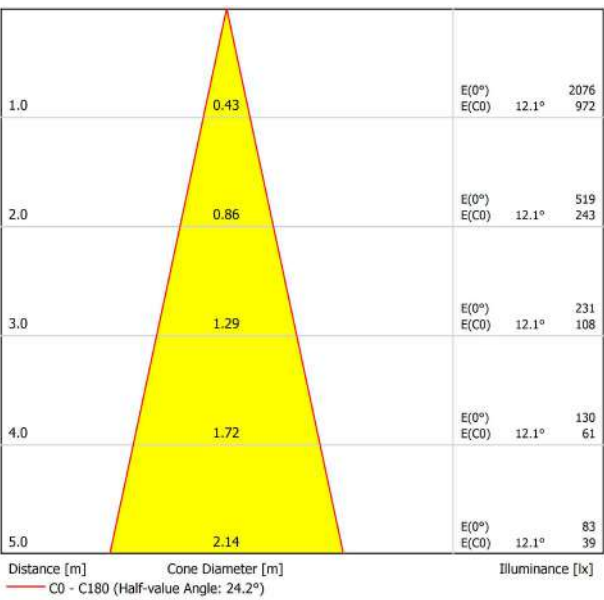



DIMENSIONS

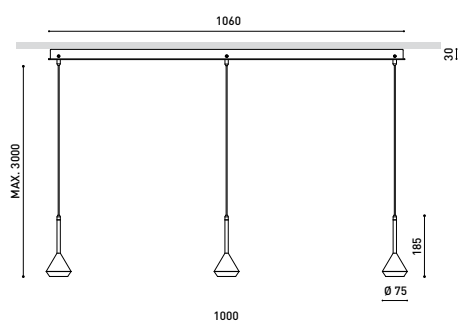

AWARDS



Name	SPIN 3 SURFACE 3M 40° 3000K MG-NT
Reference	A3911101MGNT
Color	Metallized gold
RAL	Electrolytic bath
Category	SUSPENSION

PRODUCT

Light source	LED
Gross luminous flux	3 x 630 Lm
Power	3 x 6,5 W
Power values of the system	21,67 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	24°
Lighting efficiency	86%
Efficacy	97 Lm/W
Current intensity	700 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Spin Surface is a version that allows it to be installed in places where it is impossible to access the false ceiling. Cement, concrete, vault ... its base, set to apply three luminaires, houses the driver and allows the luminaire to be installed on all types of surfaces.

POLAR DIAGRAM

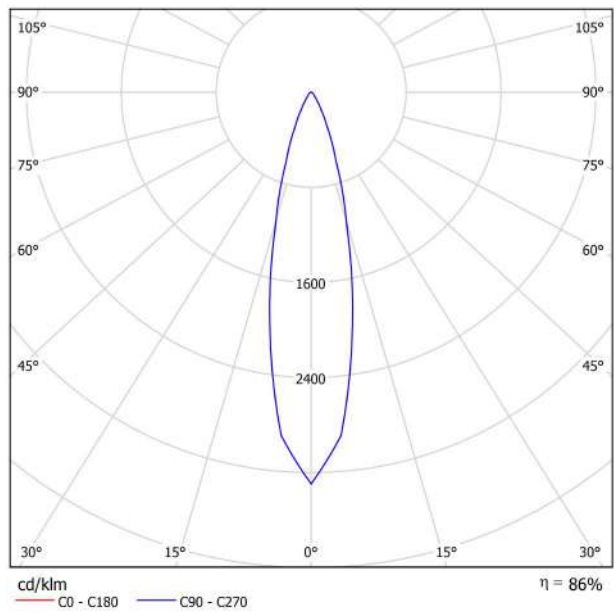


CONICAL DIAGRAM

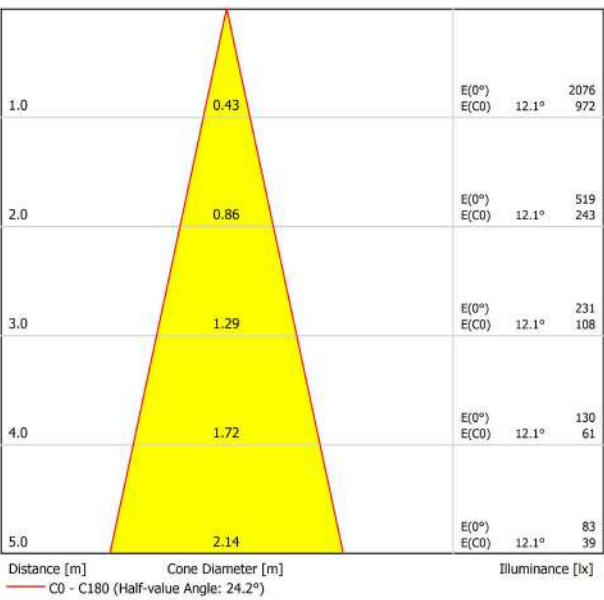



DIMENSIONS

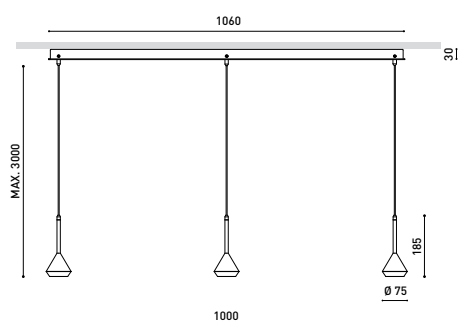

PRODUCT

Name	SPIN 3 SURFACE 3M 40° 3000K MG-WT
Reference	A3911101MGWT
Color	Metallized gold
RAL	Electrolytic bath
Category	SUSPENSION

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	3 x 630 Lm
Power	3 x 6,5 W
Power values of the system	21,67 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	24°
Lighting efficiency	86%
Efficacy	97 Lm/W
Current intensity	700 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h

OTHER DATA

Ingress Protection	IP20
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




AWARDS




Spin Surface is a version that allows it to be installed in places where it is impossible to access the false ceiling. Cement, concrete, vault ... its base, set to apply three luminaires, houses the driver and allows the luminaire to be installed on all types of surfaces.

POLAR DIAGRAM

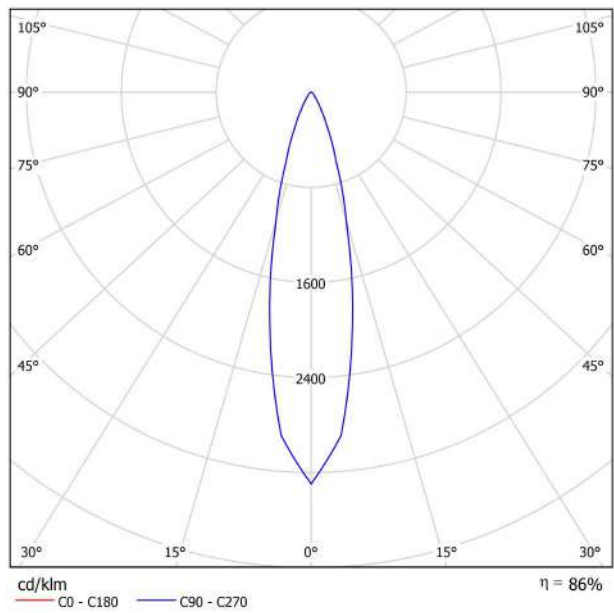


CONICAL DIAGRAM

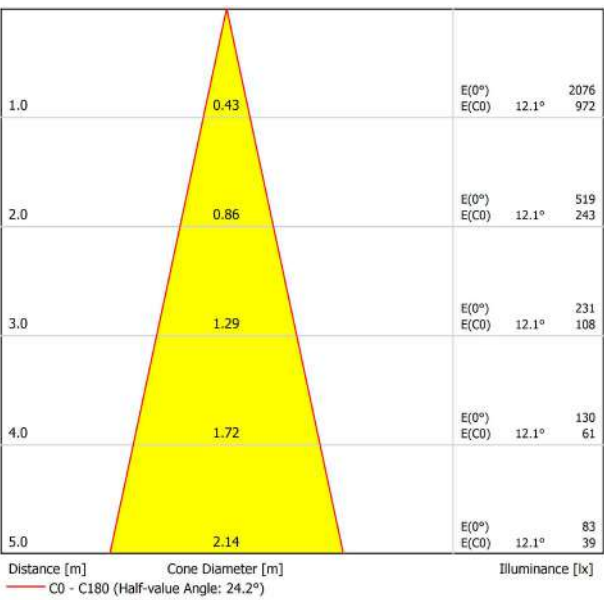



DIMENSIONS

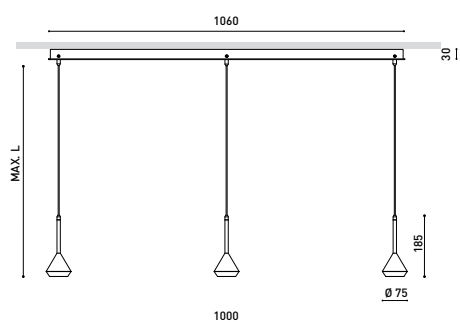

AWARDS



Name	SPIN 3 SURFACE 3M 40° 3000K NT-NT
Reference	A3911101NTNT
Color	Textured black
RAL	9005
Category	SURFACE

PRODUCT

Light source	LED
Gross luminous flux	3 x 630 Lm
Power	3 x 6,5 W
Power values of the system	21,67 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	24°
Lighting efficiency	86%
Efficacy	97 Lm/W
Current intensity	700 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Cord length	3 m
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Reduced dimensions, clear lines and a mechanized geometry combined in a pendant luminaire for accent lighting. Its ultra-thin cable gives Spin a sensation of aerial floatability.

POLAR DIAGRAM

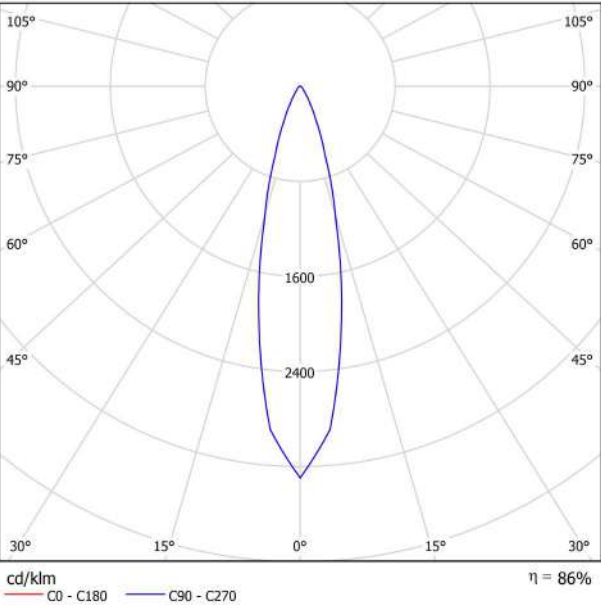


CONICAL DIAGRAM

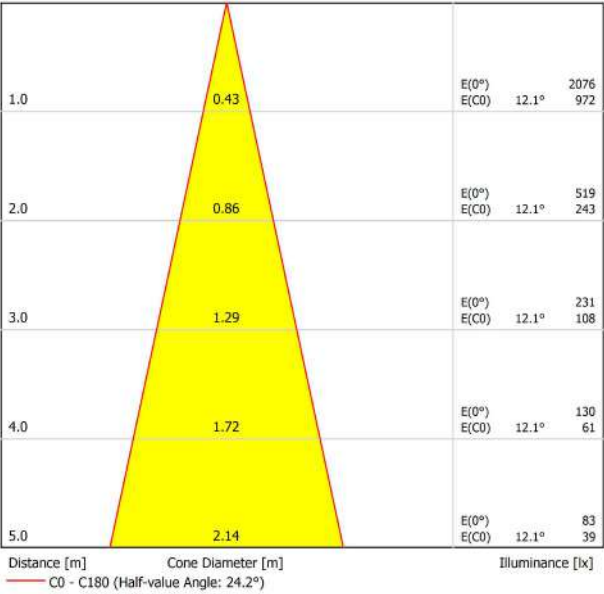



DIMENSIONS

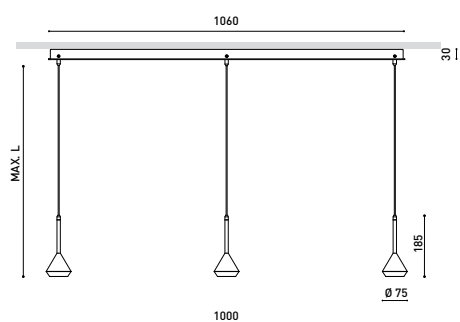

AWARDS



Name	SPIN 3 SURFACE 3M 40° 3000K NT-WT
Reference	A3911101NTWT
Color	Textured black
RAL	9005
Category	SURFACE

PRODUCT

Light source	LED
Gross luminous flux	3 x 630 Lm
Power	3 x 6,5 W
Power values of the system	21,67 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	24°
Lighting efficiency	86%
Efficacy	97 Lm/W
Current intensity	700 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


OTHER DATA

Ingress Protection	IP20
Cord length	3 m
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Reduced dimensions, clear lines and a mechanized geometry combined in a pendant luminaire for accent lighting. Its ultra-thin cable gives Spin a sensation of aerial floatability.

POLAR DIAGRAM

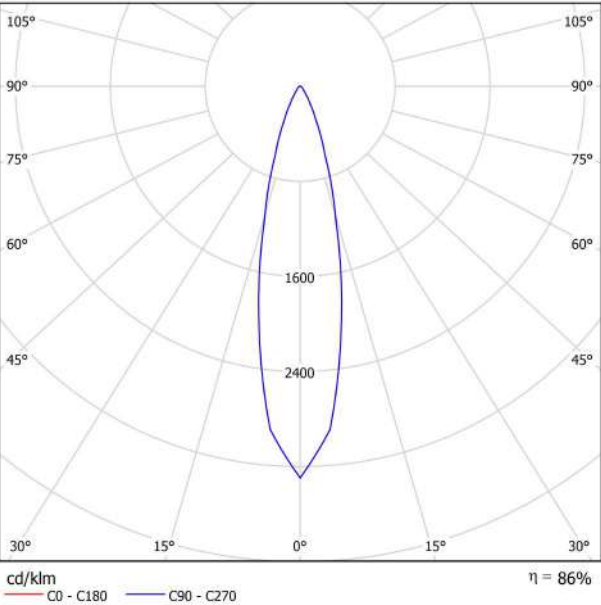


CONICAL DIAGRAM

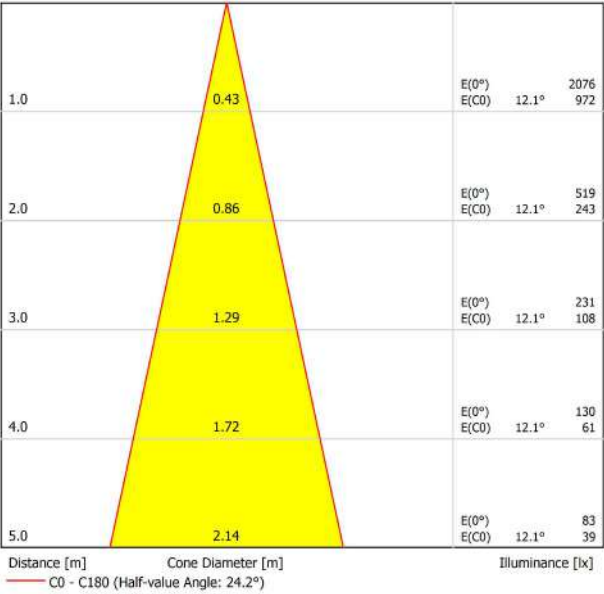



DIMENSIONS

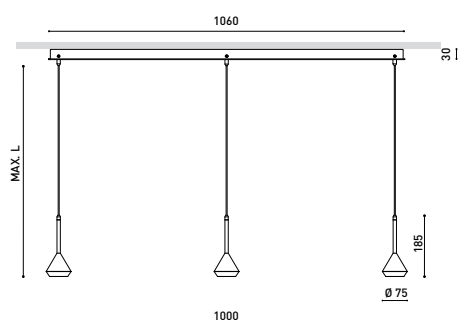

AWARDS



Name	SPIN 3 SURFACE 3M 40° 3000K WT-NT
Reference	A3911101WTNT
Color	Textured white
RAL	9016
Category	SURFACE

PRODUCT

Light source	LED
Gross luminous flux	3 x 630 Lm
Power	3 x 6,5 W
Power values of the system	21,67 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	24°
Lighting efficiency	86%
Efficacy	97 Lm/W
Current intensity	700 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Cord length	3 m
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Reduced dimensions, clear lines and a mechanized geometry combined in a pendant luminaire for accent lighting. Its ultra-thin cable gives Spin a sensation of aerial floatability.

POLAR DIAGRAM

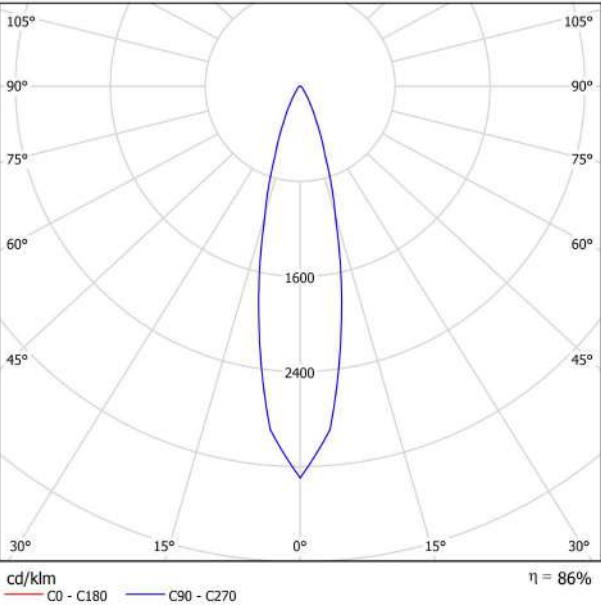


CONICAL DIAGRAM

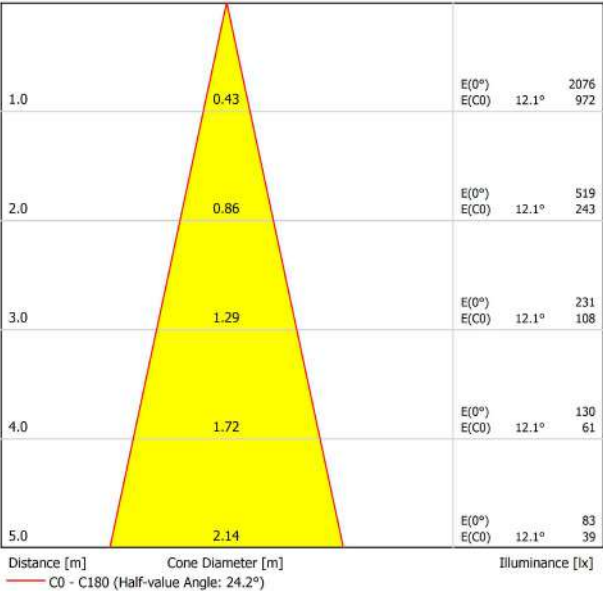



DIMENSIONS

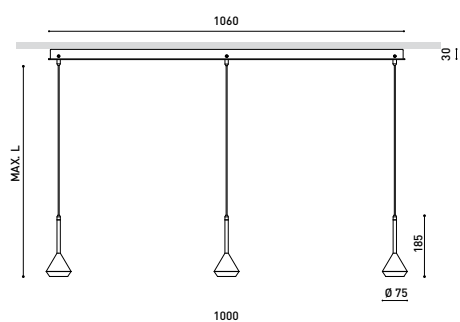

AWARDS



Name	SPIN 3 SURFACE 3M 40° 3000K WT-WT
Reference	A3911101WTWT
Color	Textured white
RAL	9016
Category	SURFACE

PRODUCT

Light source	LED
Gross luminous flux	3 x 630 Lm
Power	3 x 6,5 W
Power values of the system	21,67 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	24°
Lighting efficiency	86%
Efficacy	97 Lm/W
Current intensity	700 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Cord length	3 m
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Reduced dimensions, clear lines and a mechanized geometry combined in a pendant luminaire for accent lighting. Its ultra-thin cable gives Spin a sensation of aerial floatability.

POLAR DIAGRAM

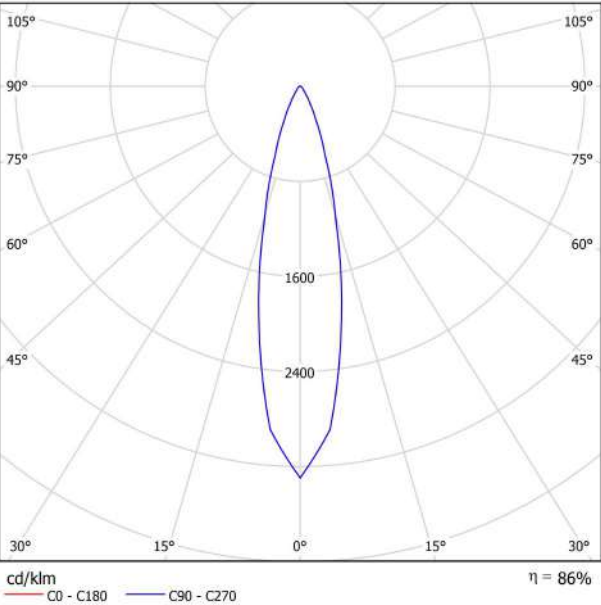


CONICAL DIAGRAM

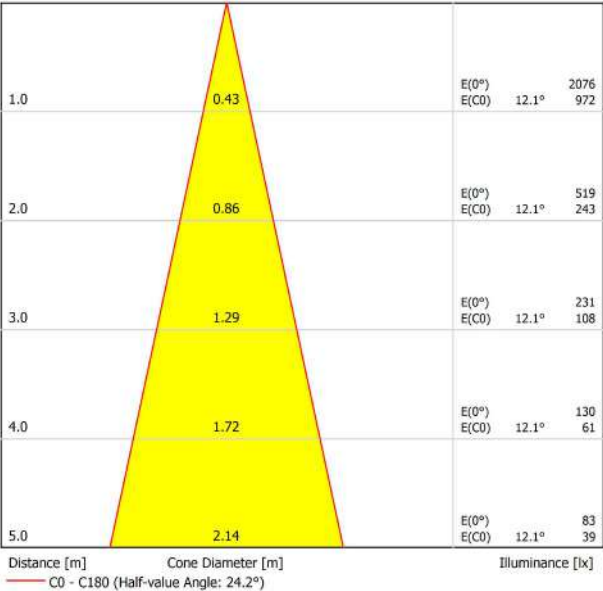



DIMENSIONS

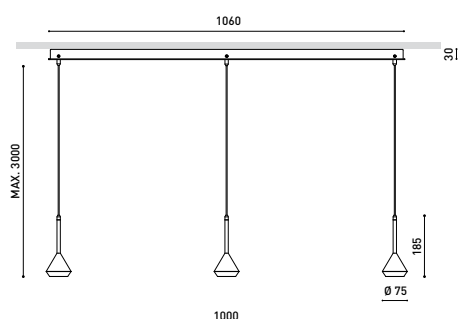

AWARDS



Name	SPIN 3 SURFACE 3M 24° 4000K MC-NT
Reference	A3911102MCNT
Color	Metallized copper
RAL	Electrolytic bath
Category	SUSPENSION

PRODUCT

Light source	LED
Gross luminous flux	3 x 680 Lm
Power	3 x 6,5 W
Power values of the system	21,67 W
Colour temperature	4000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	24°
Lighting efficiency	86%
Efficacy	105 Lm/W
Current intensity	700 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


OTHER DATA

Ingress Protection	IP20
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Spin Surface is a version that allows it to be installed in places where it is impossible to access the false ceiling. Cement, concrete, vault ... its base, set to apply three luminaires, houses the driver and allows the luminaire to be installed on all types of surfaces.

POLAR DIAGRAM

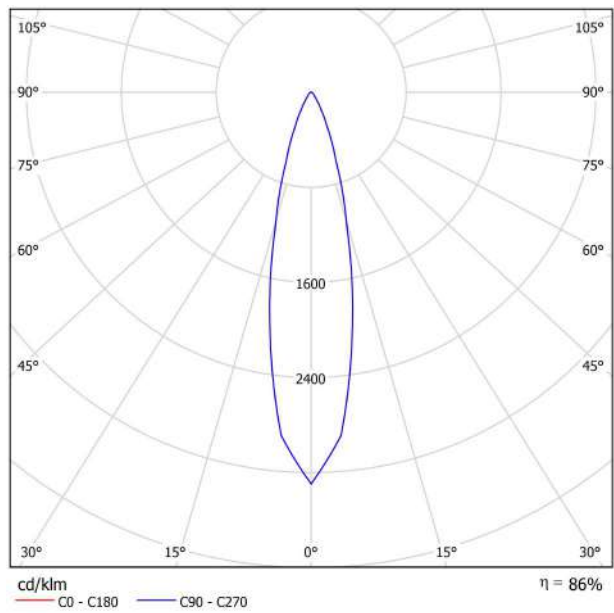


CONICAL DIAGRAM

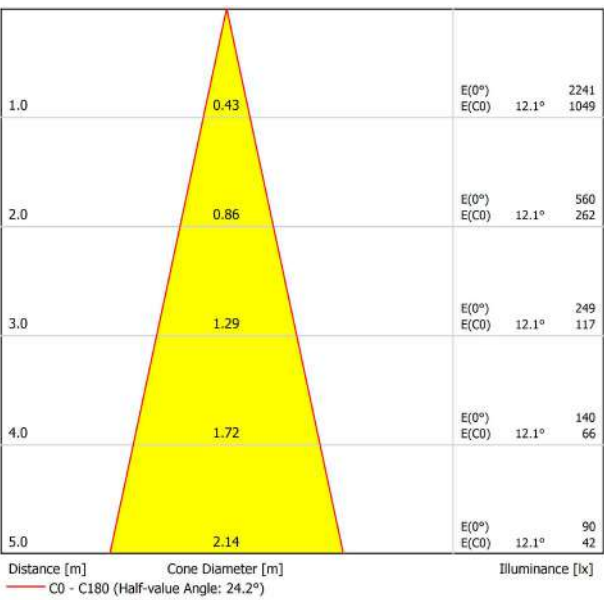



DIMENSIONS

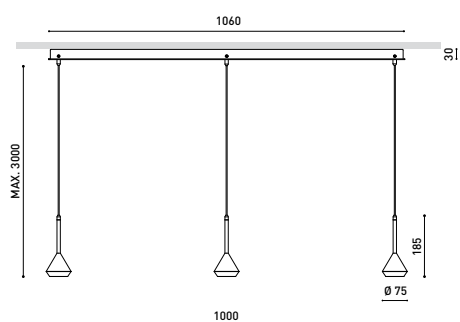

AWARDS



Name	SPIN 3 SURFACE 3M 24° 4000K MC-WT
Reference	A3911102MCWT
Color	Metallized copper
RAL	Electrolytic bath
Category	SUSPENSION

PRODUCT

Light source	LED
Gross luminous flux	3 x 680 Lm
Power	3 x 6,5 W
Power values of the system	21,67 W
Colour temperature	4000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	24°
Lighting efficiency	86%
Efficacy	105 Lm/W
Current intensity	700 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


OTHER DATA

Ingress Protection	IP20
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Spin Surface is a version that allows it to be installed in places where it is impossible to access the false ceiling. Cement, concrete, vault ... its base, set to apply three luminaires, houses the driver and allows the luminaire to be installed on all types of surfaces.

POLAR DIAGRAM

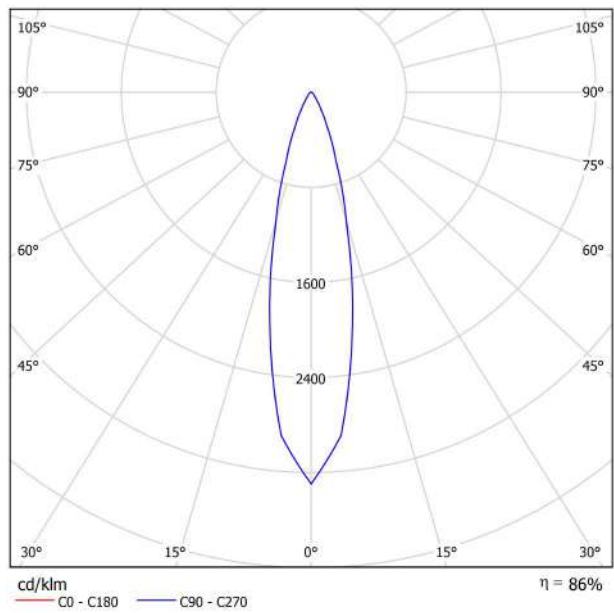


CONICAL DIAGRAM

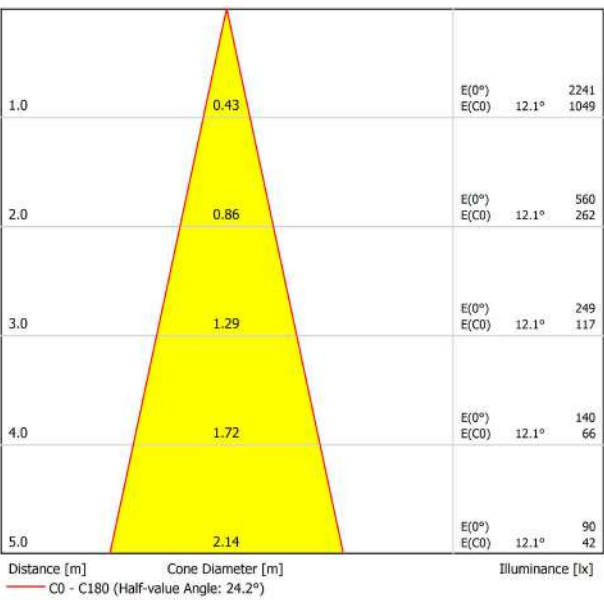



DIMENSIONS

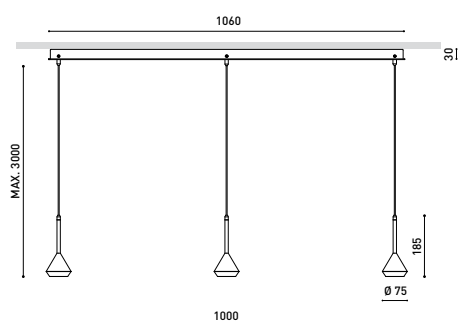

AWARDS



Name	SPIN 3 SURFACE 3M 24° 4000K MG-NT
Reference	A3911102MGNT
Color	Metallized gold
RAL	Electrolytic bath
Category	SUSPENSION

PRODUCT

Light source	LED
Gross luminous flux	3 x 680 Lm
Power	3 x 6,5 W
Power values of the system	21,67 W
Colour temperature	4000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	24°
Lighting efficiency	86%
Efficacy	105 Lm/W
Current intensity	700 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


OTHER DATA

Ingress Protection	IP20
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Spin Surface is a version that allows it to be installed in places where it is impossible to access the false ceiling. Cement, concrete, vault ... its base, set to apply three luminaires, houses the driver and allows the luminaire to be installed on all types of surfaces.

POLAR DIAGRAM

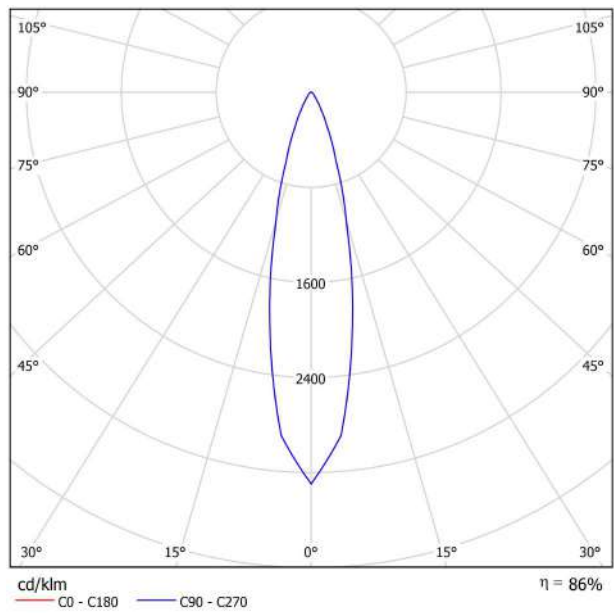


CONICAL DIAGRAM

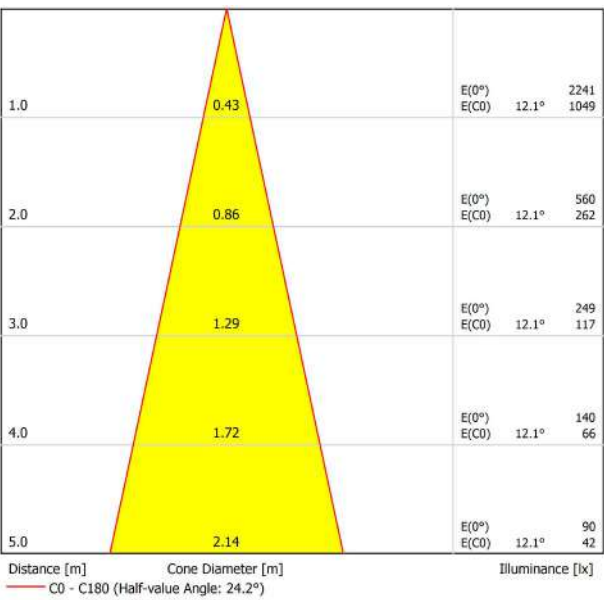



DIMENSIONS

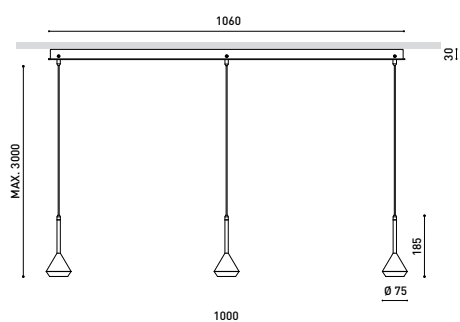

AWARDS



Name	SPIN 3 SURFACE 3M 24° 4000K MG-WT
Reference	A3911102MGWT
Color	Metallized gold
RAL	Electrolytic bath
Category	SUSPENSION

PRODUCT

Light source	LED
Gross luminous flux	3 x 680 Lm
Power	3 x 6,5 W
Power values of the system	21,67 W
Colour temperature	4000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	24°
Lighting efficiency	86%
Efficacy	105 Lm/W
Current intensity	700 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Spin Surface is a version that allows it to be installed in places where it is impossible to access the false ceiling. Cement, concrete, vault ... its base, set to apply three luminaires, houses the driver and allows the luminaire to be installed on all types of surfaces.

POLAR DIAGRAM

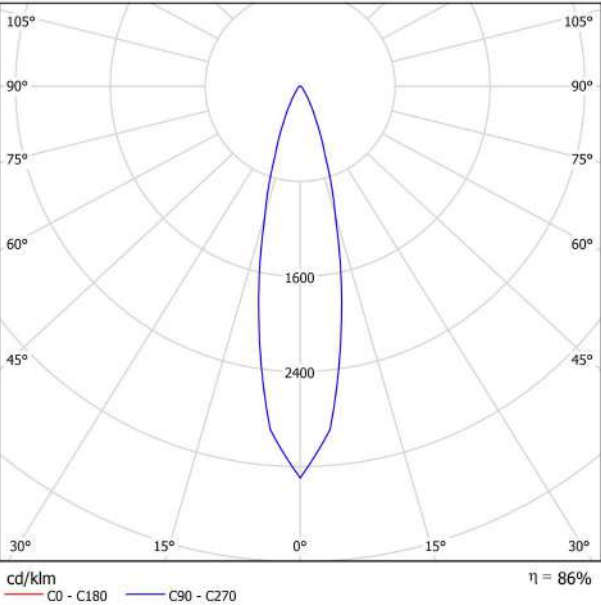


CONICAL DIAGRAM

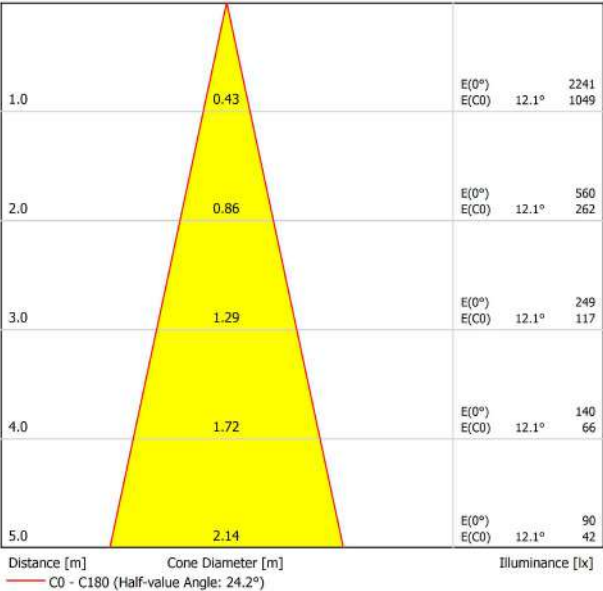



DIMENSIONS

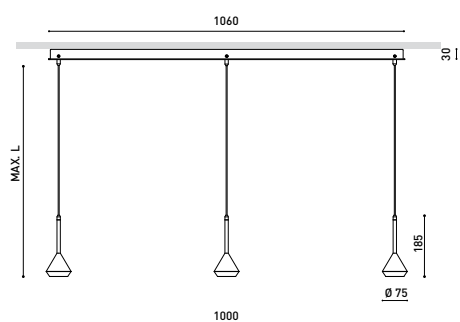

AWARDS



Name	SPIN 3 SURFACE 3M 24° 4000K NT-NT
Reference	A3911102NTNT
Color	Textured black
RAL	9005
Category	SURFACE

PRODUCT

SPIN 3 SURFACE 3M 24° 4000K NT-NT

A3911102NTNT

Textured black

9005

SURFACE

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	3 x 680 Lm
Power	3 x 6,5 W
Power values of the system	21,67 W
Colour temperature	4000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	24°
Lighting efficiency	86%
Efficacy	105 Lm/W
Current intensity	700 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Cord length	3 m
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Reduced dimensions, clear lines and a mechanized geometry combined in a pendant luminaire for accent lighting. Its ultra-thin cable gives Spin a sensation of aerial floatability.

POLAR DIAGRAM

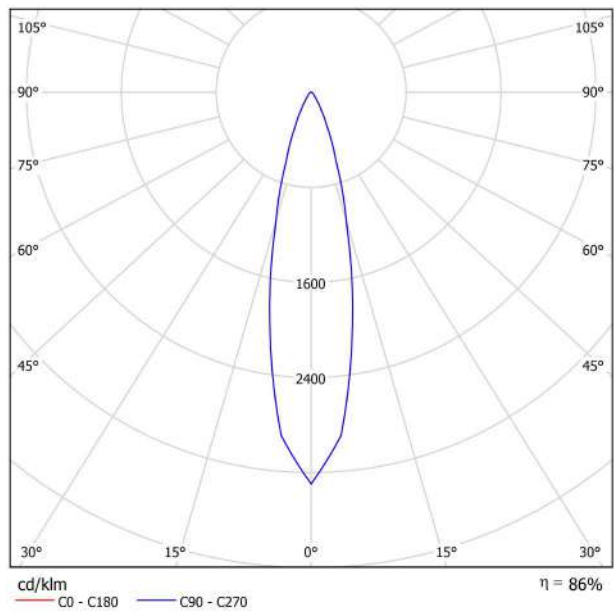


CONICAL DIAGRAM

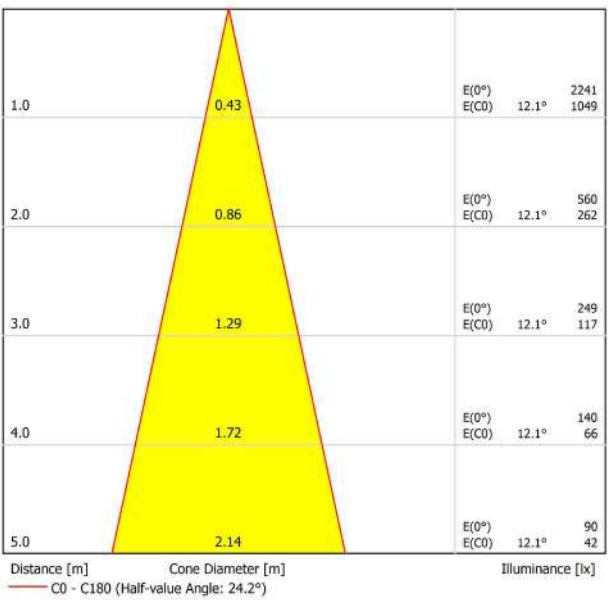



DIMENSIONS

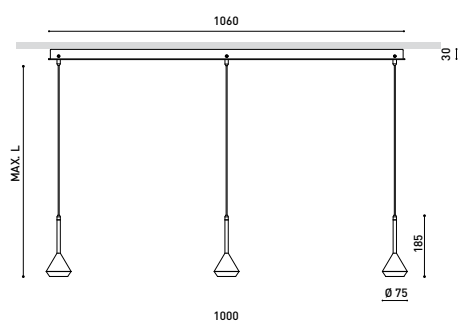

AWARDS



Name	SPIN 3 SURFACE 3M 24° 4000K NT-WT
Reference	A3911102NTWT
Color	Textured black
RAL	9005
Category	SURFACE

PRODUCT

Light source	LED
Gross luminous flux	3 x 680 Lm
Power	3 x 6,5 W
Power values of the system	21,67 W
Colour temperature	4000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	24°
Lighting efficiency	86%
Efficacy	105 Lm/W
Current intensity	700 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Cord length	3 m
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Reduced dimensions, clear lines and a mechanized geometry combined in a pendant luminaire for accent lighting. Its ultra-thin cable gives Spin a sensation of aerial floatability.

POLAR DIAGRAM

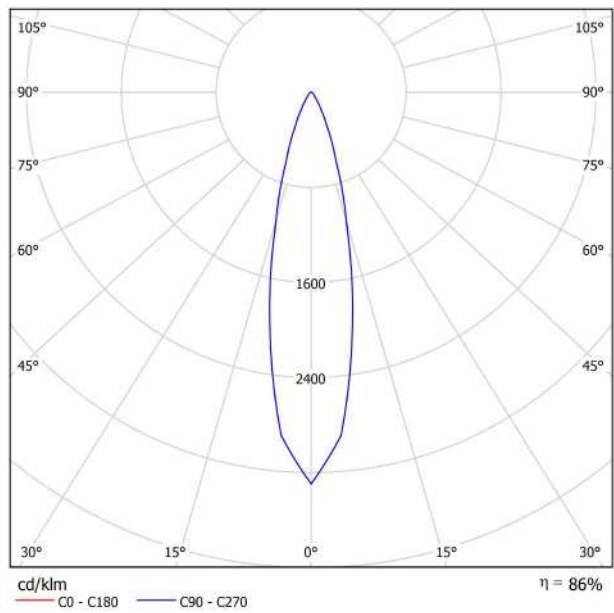


CONICAL DIAGRAM

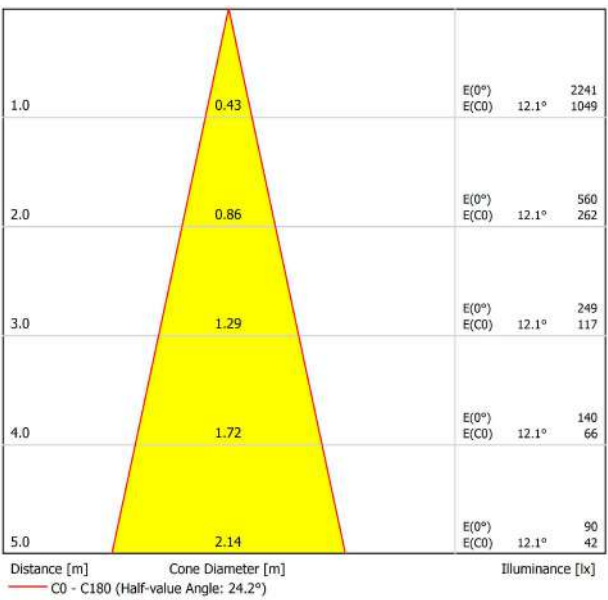



DIMENSIONS

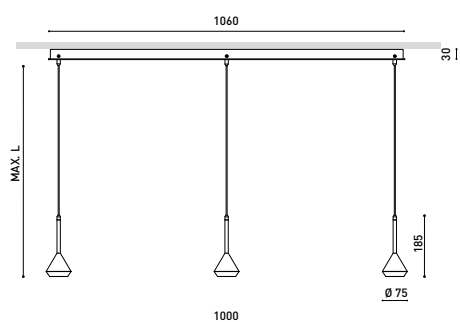

AWARDS



Name	SPIN 3 SURFACE 3M 24° 4000K WT-NT
Reference	A3911102WTNT
Color	Textured white
RAL	9016
Category	SURFACE

PRODUCT

Light source	LED
Gross luminous flux	3 x 680 Lm
Power	3 x 6,5 W
Power values of the system	21,67 W
Colour temperature	4000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	24°
Lighting efficiency	86%
Efficacy	105 Lm/W
Current intensity	700 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Cord length	3 m
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Reduced dimensions, clear lines and a mechanized geometry combined in a pendant luminaire for accent lighting. Its ultra-thin cable gives Spin a sensation of aerial floatability.

POLAR DIAGRAM

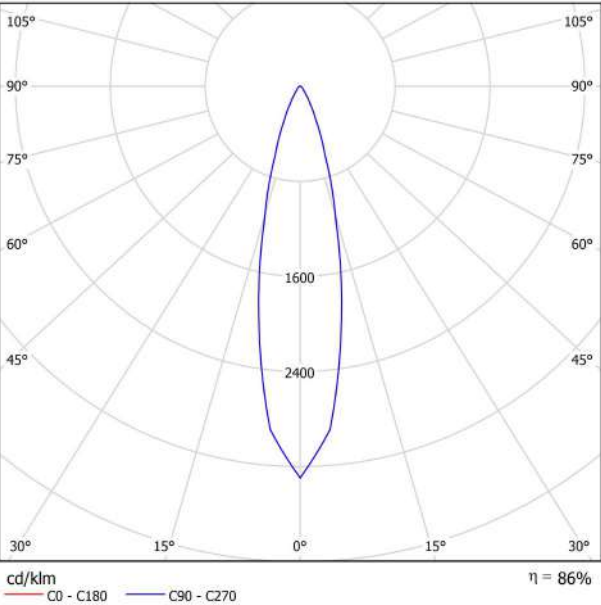


CONICAL DIAGRAM

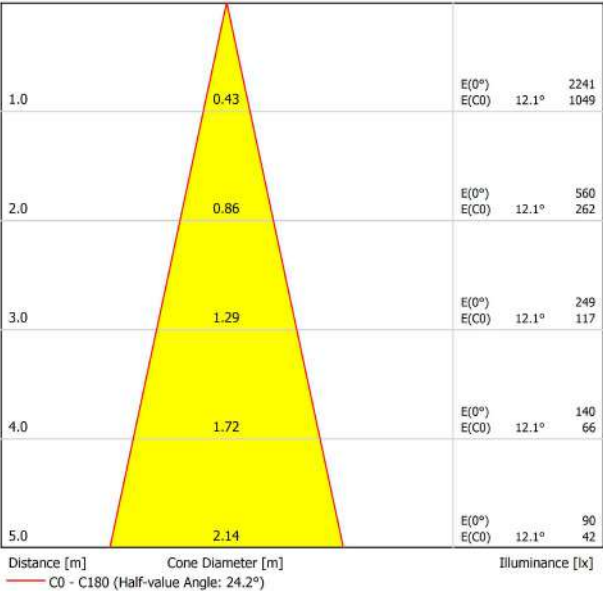



DIMENSIONS

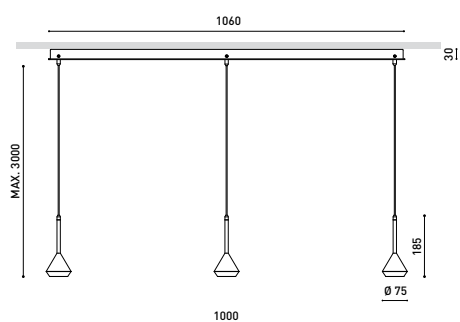

AWARDS



Name	SPIN 3 SURFACE 3M 24° 2700K MC-NT
Reference	A3911100MCNT
Color	Metallized copper
RAL	Electrolytic bath
Category	SUSPENSION

PRODUCT

Light source	LED
Gross luminous flux	3 x 600 Lm
Power	3 x 6,5 W
Power values of the system	21,67 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	24°
Lighting efficiency	86%
Efficacy	105 Lm/W
Current intensity	700 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


OTHER DATA

Ingress Protection	IP20
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Spin Surface is a version that allows it to be installed in places where it is impossible to access the false ceiling. Cement, concrete, vault ... its base, set to apply three luminaires, houses the driver and allows the luminaire to be installed on all types of surfaces.

POLAR DIAGRAM

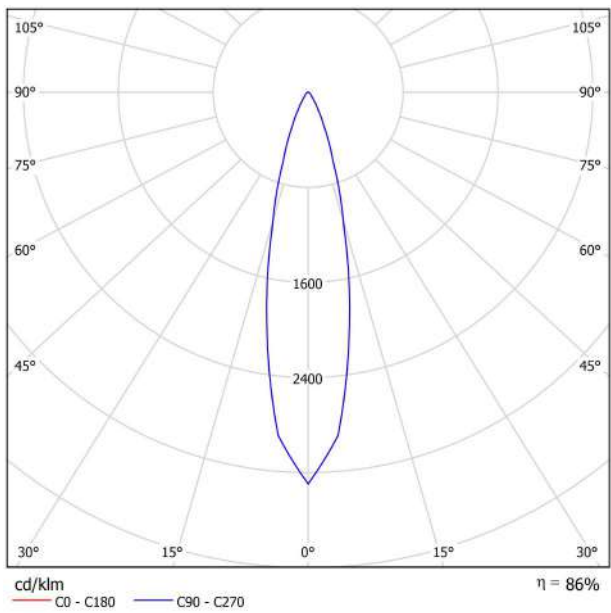


CONICAL DIAGRAM

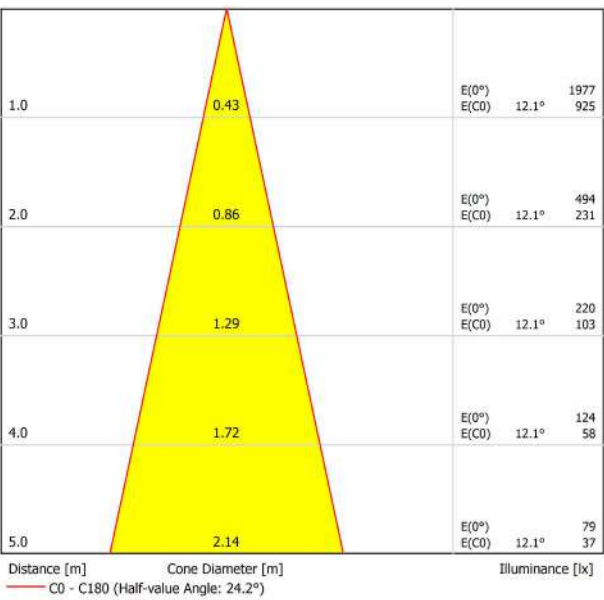



DIMENSIONS

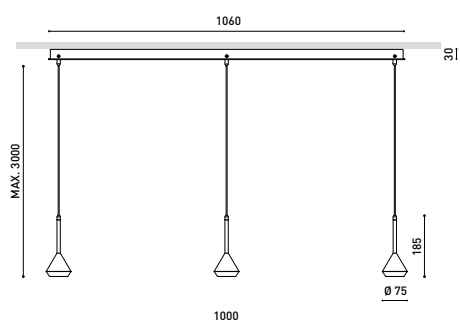

AWARDS



Name	SPIN 3 SURFACE 3M 24° 2700K MC-WT
Reference	A3911100MCWT
Color	Metallized copper
RAL	Electrolytic bath
Category	SUSPENSION

PRODUCT

Light source	LED
Gross luminous flux	3 x 600 Lm
Power	3 x 6,5 W
Power values of the system	21,67 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	24°
Lighting efficiency	86%
Efficacy	105 Lm/W
Current intensity	700 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


OTHER DATA

Ingress Protection	IP20
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Spin Surface is a version that allows it to be installed in places where it is impossible to access the false ceiling. Cement, concrete, vault ... its base, set to apply three luminaires, houses the driver and allows the luminaire to be installed on all types of surfaces.

POLAR DIAGRAM

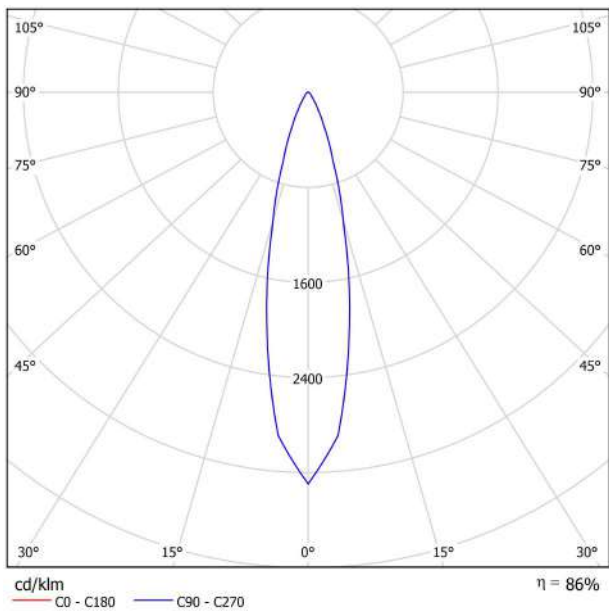


CONICAL DIAGRAM

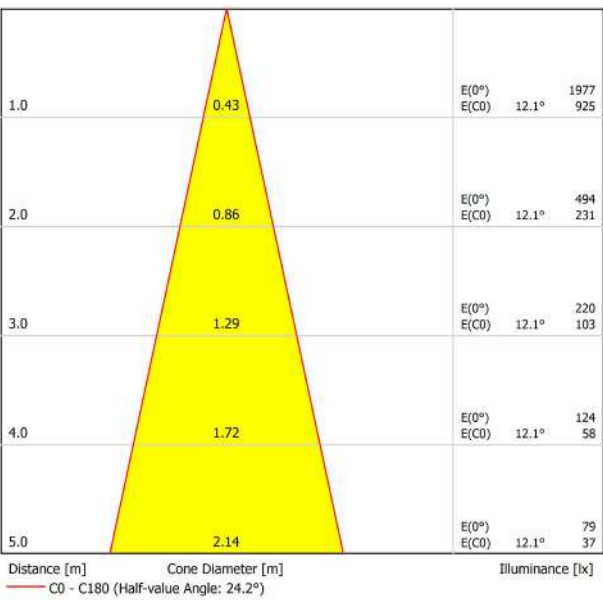



DIMENSIONS

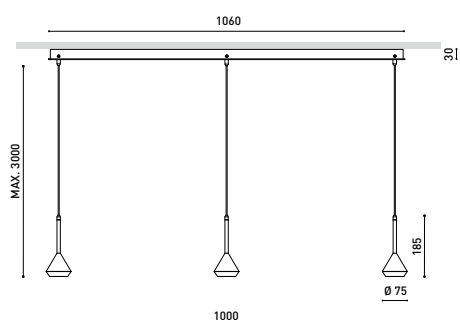

AWARDS



Name	SPIN 3 SURFACE 3M 24° 2700K MG-NT
Reference	A3911100MGNT
Color	Metallized gold
RAL	Electrolytic bath
Category	SUSPENSION

PRODUCT

Light source	LED
Gross luminous flux	3 x 600 Lm
Power	3 x 6,5 W
Power values of the system	21,67 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	24°
Lighting efficiency	86%
Efficacy	105 Lm/W
Current intensity	700 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


OTHER DATA

Ingress Protection	IP20
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Spin Surface is a version that allows it to be installed in places where it is impossible to access the false ceiling. Cement, concrete, vault ... its base, set to apply three luminaires, houses the driver and allows the luminaire to be installed on all types of surfaces.

POLAR DIAGRAM

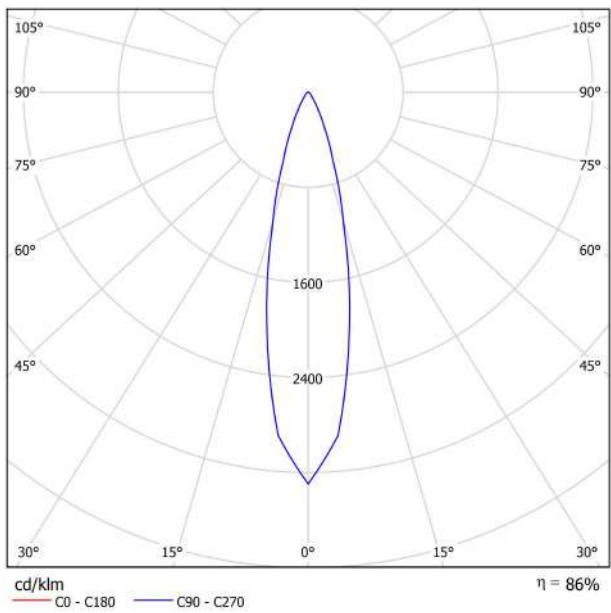


CONICAL DIAGRAM

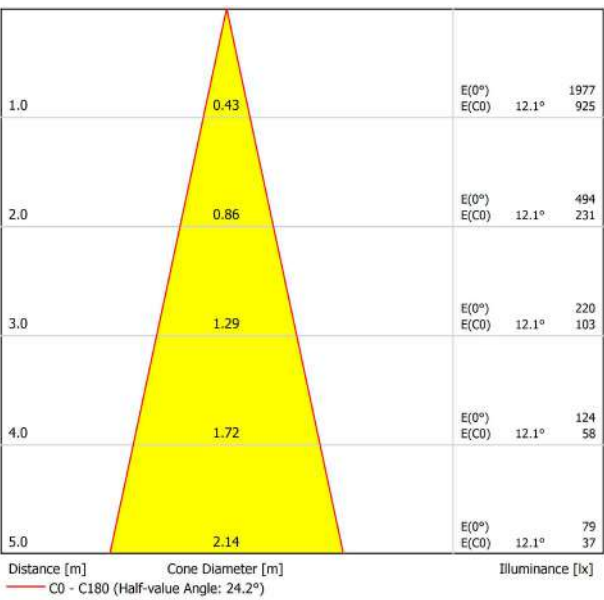



DIMENSIONS

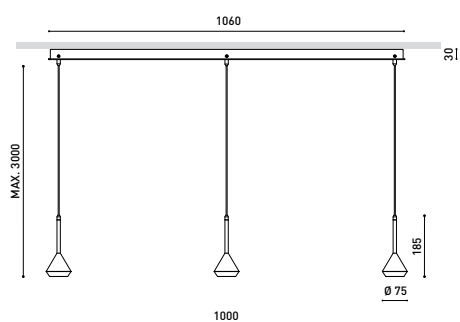

AWARDS



Name	SPIN 3 SURFACE 3M 24° 2700K MG-WT
Reference	A3911100MGWT
Color	Metallized gold
RAL	Electrolytic bath
Category	SUSPENSION

PRODUCT

Light source	LED
Gross luminous flux	3 x 600 Lm
Power	3 x 6,5 W
Power values of the system	21,67 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	24°
Lighting efficiency	86%
Efficacy	105 Lm/W
Current intensity	700 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Spin Surface is a version that allows it to be installed in places where it is impossible to access the false ceiling. Cement, concrete, vault ... its base, set to apply three luminaires, houses the driver and allows the luminaire to be installed on all types of surfaces.

POLAR DIAGRAM

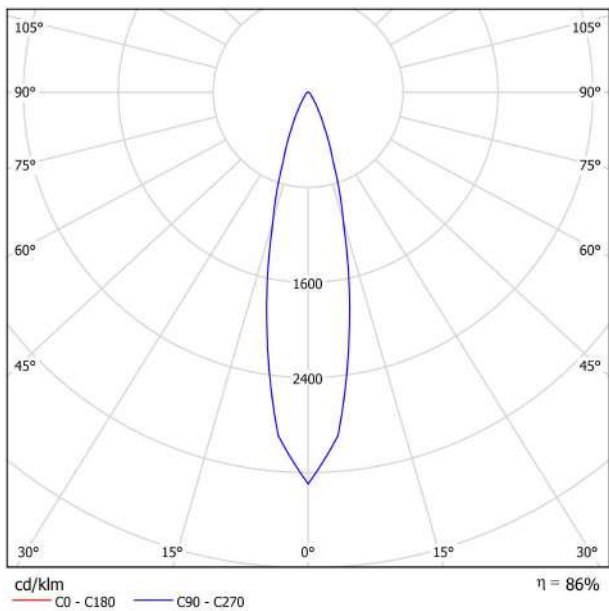


CONICAL DIAGRAM

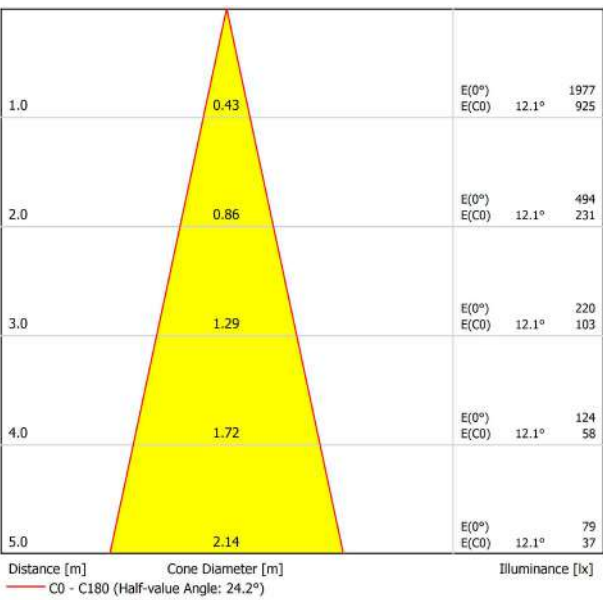



DIMENSIONS

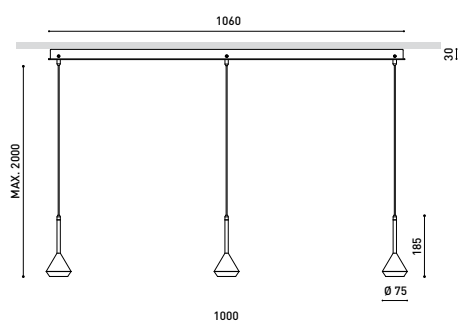

AWARDS



Name	SPIN 3 SURFACE 2M 40° DIM DALI 2700K MG-WT
Reference	A3910210MGWT
Color	Metallized gold
RAL	Electrolytic bath
Category	SUSPENSION

PRODUCT

Light source	LED
Gross luminous flux	3 x 600 Lm
Power	3 x 6,5 W
Power values of the system	23,78 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	40°
Lighting efficiency	84%
Efficacy	105 Lm/W
Current intensity	700 mA
Dimming	DALI - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


OTHER DATA

Ingress Protection	IP20
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Spin Surface is a version that allows it to be installed in places where it is impossible to access the false ceiling. Cement, concrete, vault ... its base, set to apply three luminaires, houses the driver and allows the luminaire to be installed on all types of surfaces.

POLAR DIAGRAM

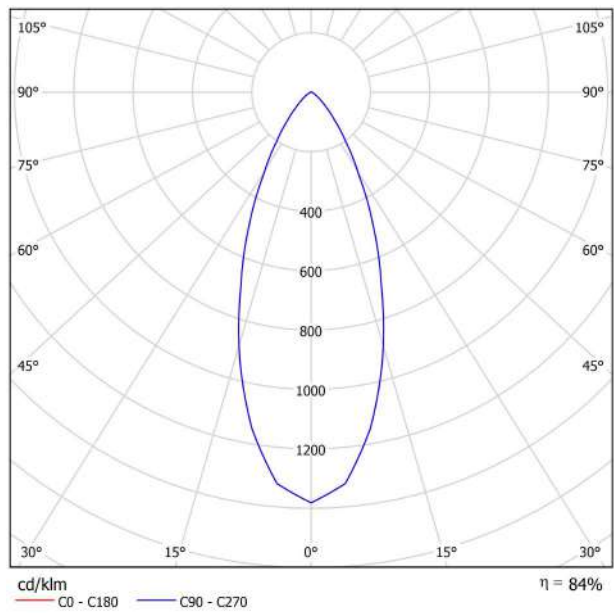


CONICAL DIAGRAM

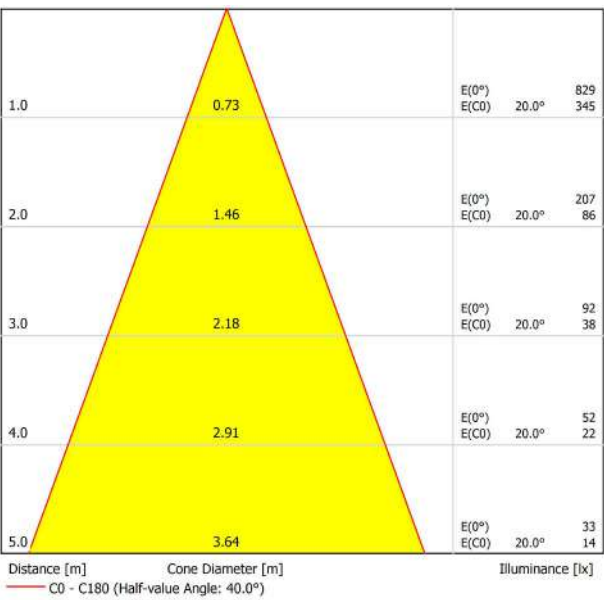



DIMENSIONS

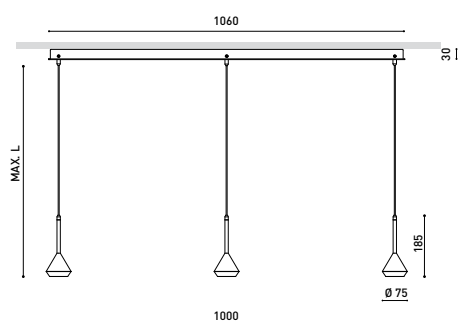

AWARDS



Name	SPIN 3 SURFACE 2M 40° DIM DALI 2700K NT-NT
Reference	A3910210NTNT
Color	Textured black
RAL	9005
Category	SURFACE

PRODUCT

Light source	LED
Gross luminous flux	3 x 600 Lm
Power	3 x 6,5 W
Power values of the system	23,78 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	40°
Lighting efficiency	84%
Efficacy	105 Lm/W
Current intensity	700 mA
Dimming	DALI - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


OTHER DATA

Ingress Protection	IP20
Cord length	2 m
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Reduced dimensions, clear lines and a mechanized geometry combined in a pendant luminaire for accent lighting. Its ultra-thin cable gives Spin a sensation of aerial floatability.

POLAR DIAGRAM

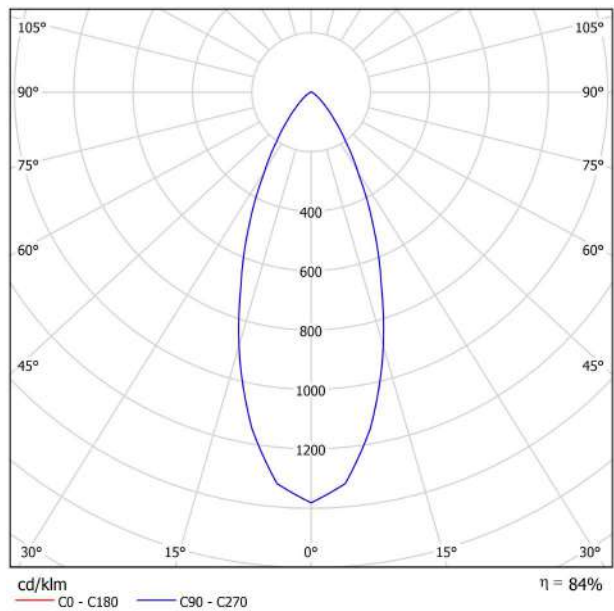


CONICAL DIAGRAM

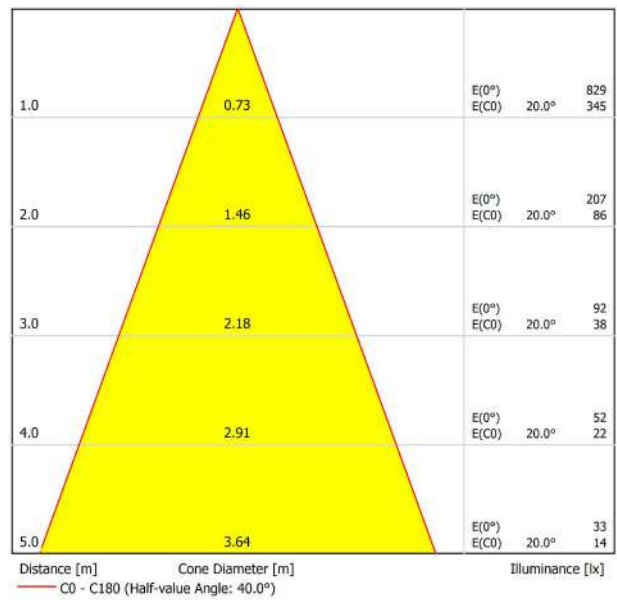



DIMENSIONS

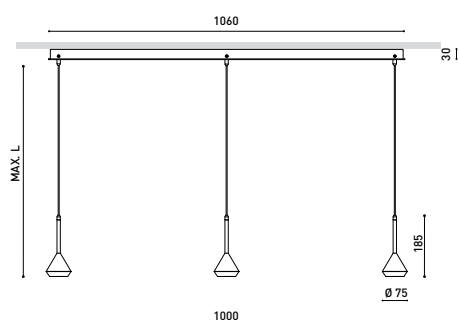

AWARDS



Name	SPIN 3 SURFACE 2M 40° DIM DALI 2700K NT-WT
Reference	A3910210NTWT
Color	Textured black
RAL	9005
Category	SURFACE

PRODUCT

Light source	LED
Gross luminous flux	3 x 600 Lm
Power	3 x 6,5 W
Power values of the system	23,78 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	40°
Lighting efficiency	84%
Efficacy	105 Lm/W
Current intensity	700 mA
Dimming	DALI - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Cord length	2 m
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Reduced dimensions, clear lines and a mechanized geometry combined in a pendant luminaire for accent lighting. Its ultra-thin cable gives Spin a sensation of aerial floatability.

POLAR DIAGRAM

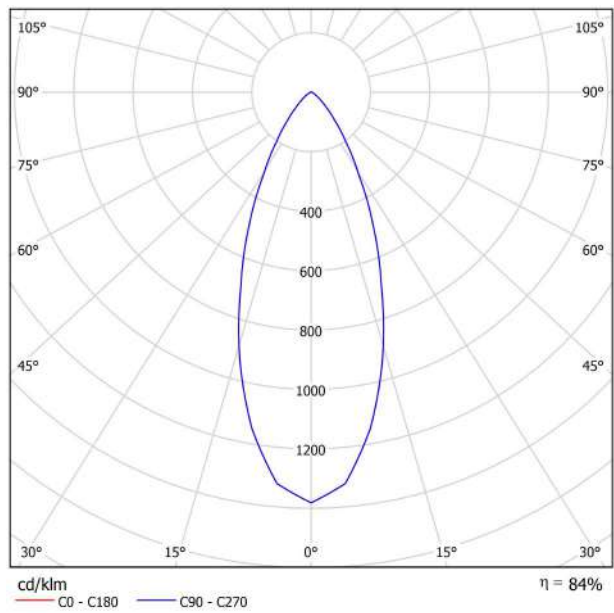


CONICAL DIAGRAM

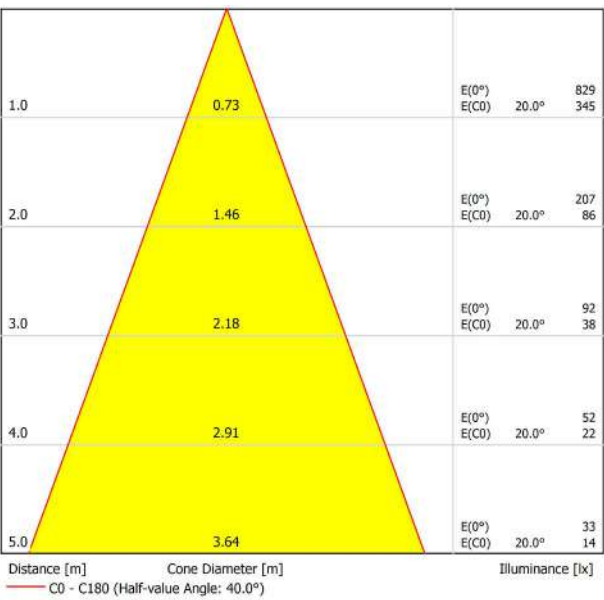



DIMENSIONS

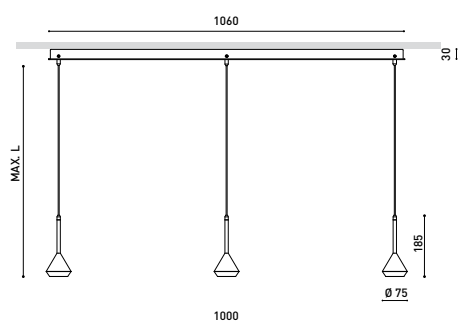

AWARDS



Name	SPIN 3 SURFACE 2M 40° DIM DALI 2700K WT-NT
Reference	A3910210WTNT
Color	Textured white
RAL	9016
Category	SURFACE

PRODUCT

Light source	LED
Gross luminous flux	3 x 600 Lm
Power	3 x 6,5 W
Power values of the system	23,78 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	40°
Lighting efficiency	84%
Efficacy	92 Lm/W
Current intensity	700 mA
Dimming	DALI - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Cord length	2 m
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Reduced dimensions, clear lines and a mechanized geometry combined in a pendant luminaire for accent lighting. Its ultra-thin cable gives Spin a sensation of aerial floatability.

POLAR DIAGRAM

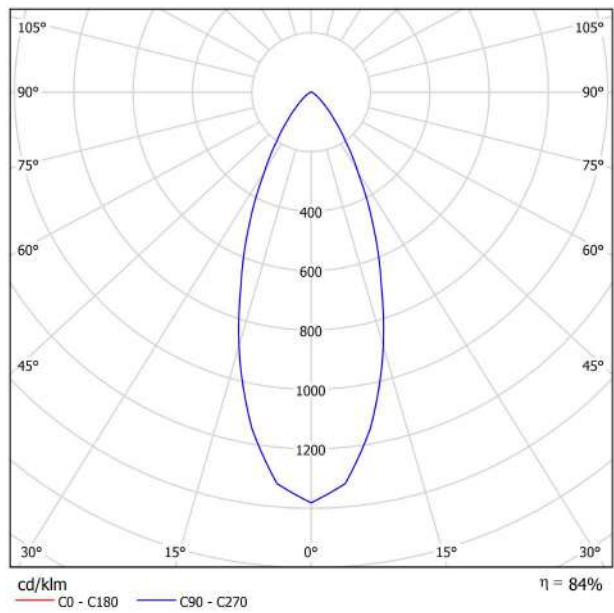


CONICAL DIAGRAM

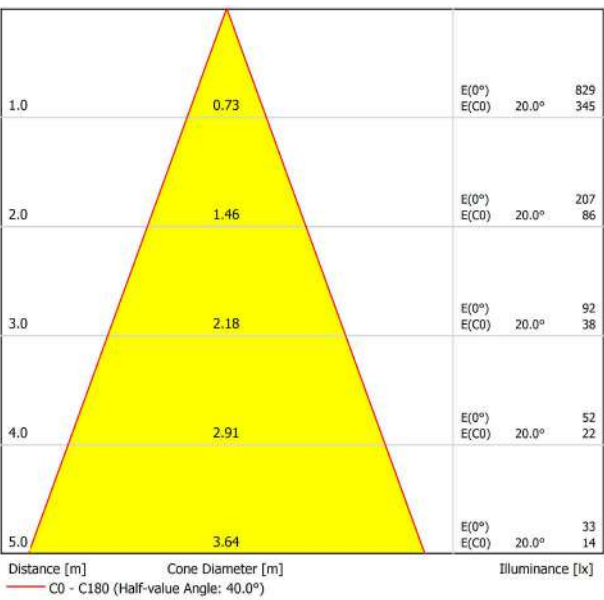



DIMENSIONS

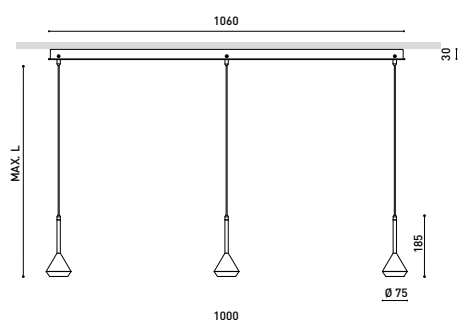

AWARDS



Name	SPIN 3 SURFACE 2M 40° DIM DALI 2700K WT-WT
Reference	A3910210WTWT
Color	Textured white
RAL	9016
Category	SURFACE

PRODUCT

Light source	LED
Gross luminous flux	3 x 600 Lm
Power	3 x 6,5 W
Power values of the system	23,78 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	40°
Lighting efficiency	84%
Efficacy	92 Lm/W
Current intensity	700 mA
Dimming	DALI - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


OTHER DATA

Ingress Protection	IP20
Cord length	2 m
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Reduced dimensions, clear lines and a mechanized geometry combined in a pendant luminaire for accent lighting. Its ultra-thin cable gives Spin a sensation of aerial floatability.

POLAR DIAGRAM

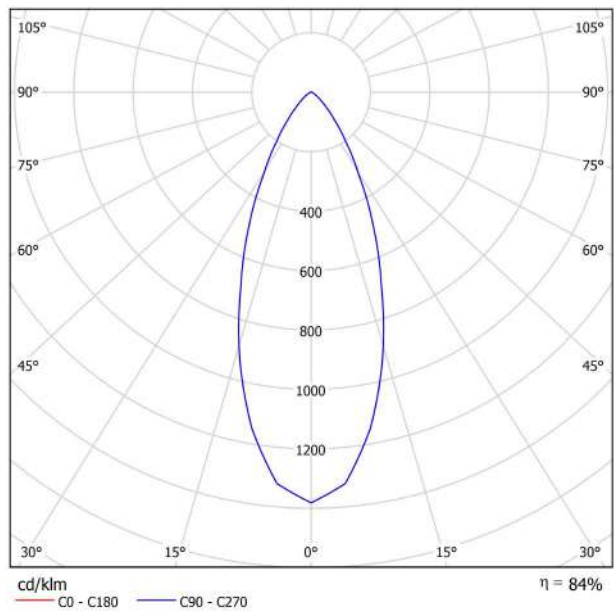


CONICAL DIAGRAM

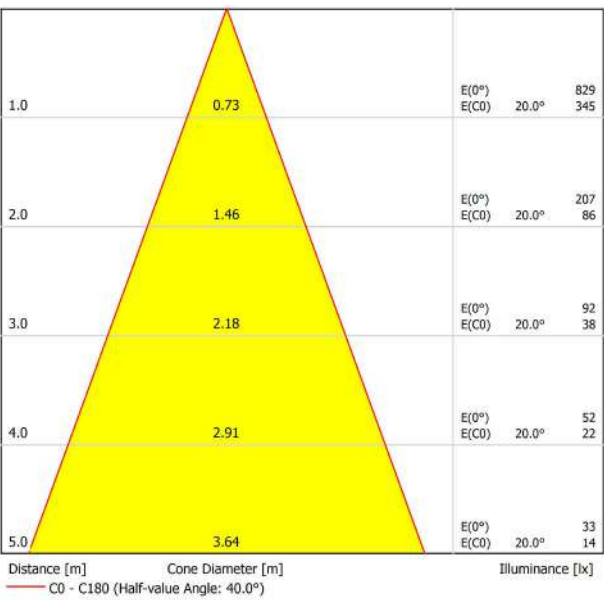



DIMENSIONS

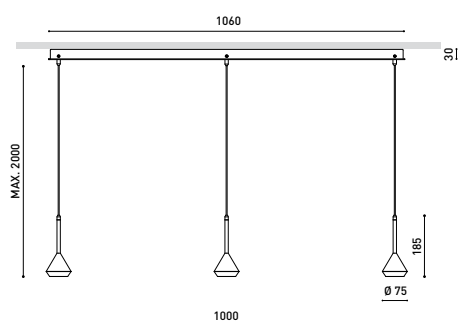

AWARDS



Name	SPIN 3 SURFACE 2M 40° DIM DALI 3000K MC-NT
Reference	A3910211MCNT
Color	Metallized copper
RAL	Electrolytic bath
Category	SUSPENSION

PRODUCT

Light source	LED
Gross luminous flux	3 x 630 Lm
Power	3 x 6,5 W
Power values of the system	23,78 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	40°
Lighting efficiency	84%
Efficacy	92 Lm/W
Current intensity	700 mA
Dimming	DALI - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


OTHER DATA

Ingress Protection	IP20
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Spin Surface is a version that allows it to be installed in places where it is impossible to access the false ceiling. Cement, concrete, vault ... its base, set to apply three luminaires, houses the driver and allows the luminaire to be installed on all types of surfaces.

POLAR DIAGRAM

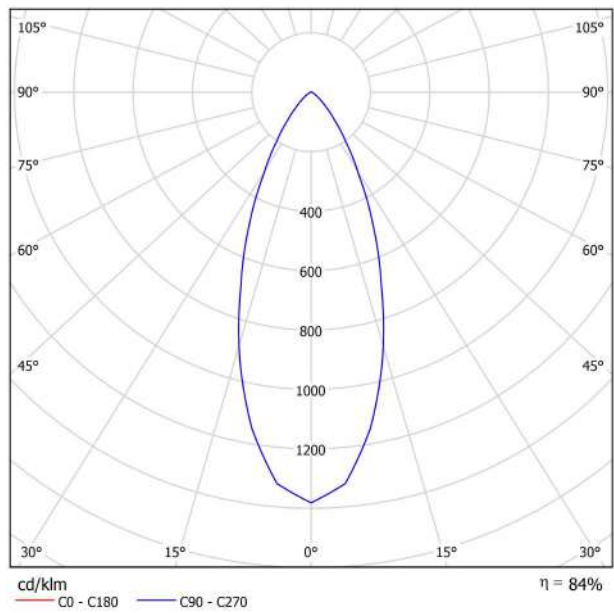


CONICAL DIAGRAM

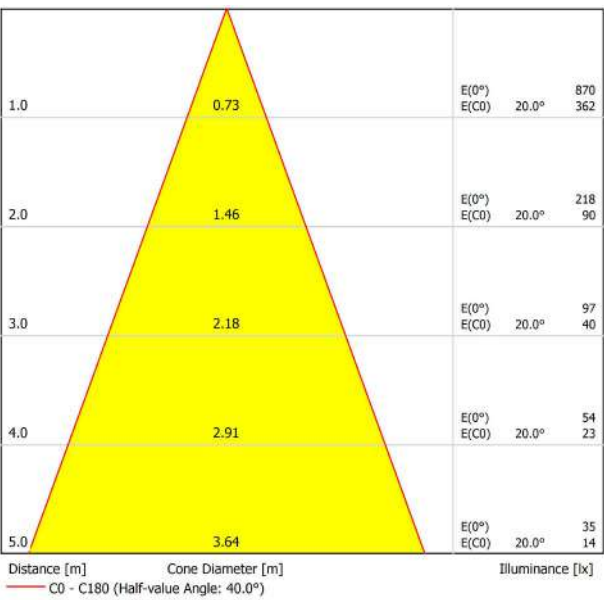



DIMENSIONS

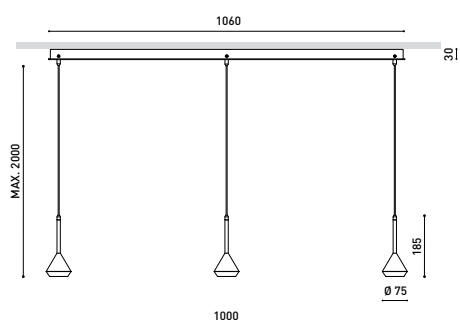

AWARDS



Name	SPIN 3 SURFACE 2M 40° DIM DALI 3000K MC-WT
Reference	A3910211MCWT
Color	Metallized copper
RAL	Electrolytic bath
Category	SUSPENSION

PRODUCT

Light source	LED
Gross luminous flux	3 x 630 Lm
Power	3 x 6,5 W
Power values of the system	23,78 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	40°
Lighting efficiency	84%
Efficacy	92 Lm/W
Current intensity	700 mA
Dimming	DALI - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


OTHER DATA

Ingress Protection	IP20
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Spin Surface is a version that allows it to be installed in places where it is impossible to access the false ceiling. Cement, concrete, vault ... its base, set to apply three luminaires, houses the driver and allows the luminaire to be installed on all types of surfaces.

POLAR DIAGRAM

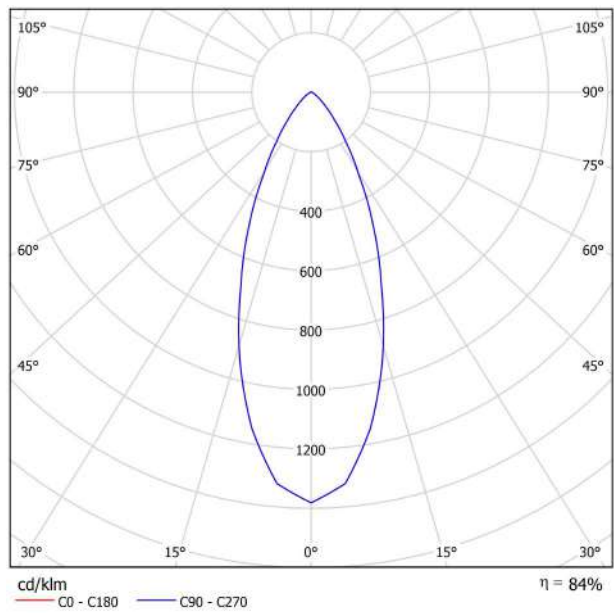


CONICAL DIAGRAM

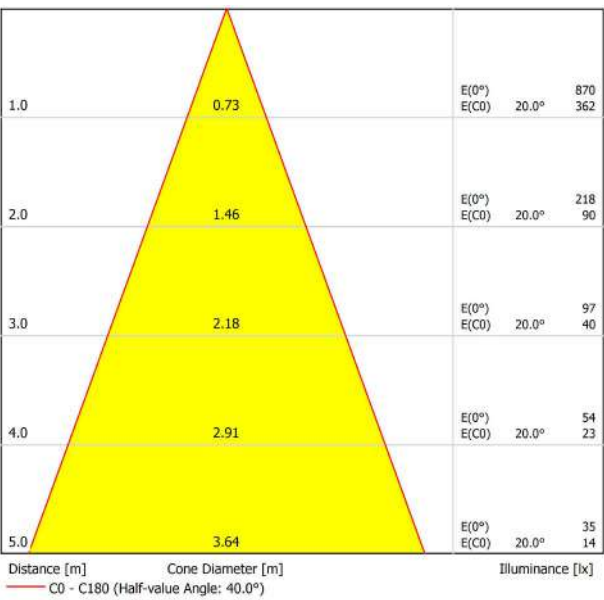



DIMENSIONS

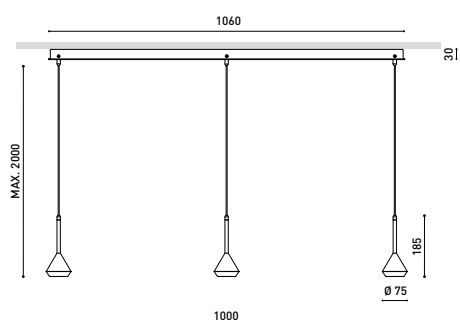

AWARDS



Name	SPIN 3 SURFACE 2M 40° DIM DALI 3000K MG-NT
Reference	A3910211MGNT
Color	Metallized gold
RAL	Electrolytic bath
Category	SUSPENSION

PRODUCT

LIGHTING INFORMATION

LED

3 x 630 Lm

3 x 6,5 W

23,78 W

3000 K

CRI>90

MacAdam Step 2

40°

84%

92 Lm/W

700 mA

DALI - Other DIM, please consult

Please Consult

Included

☐

220 V/240 V

50/60 Hz

A+

L80B10 (Tc=85°C) >60.000h

OTHER DATA

IP20

No

4150 g.

4577 g.

1078 x 139 x 89 mm


1

Aluminium / Polymethyl Methacrylate




Spin Surface is a version that allows it to be installed in places where it is impossible to access the false ceiling. Cement, concrete, vault ... its base, set to apply three luminaires, houses the driver and allows the luminaire to be installed on all types of surfaces.

POLAR DIAGRAM

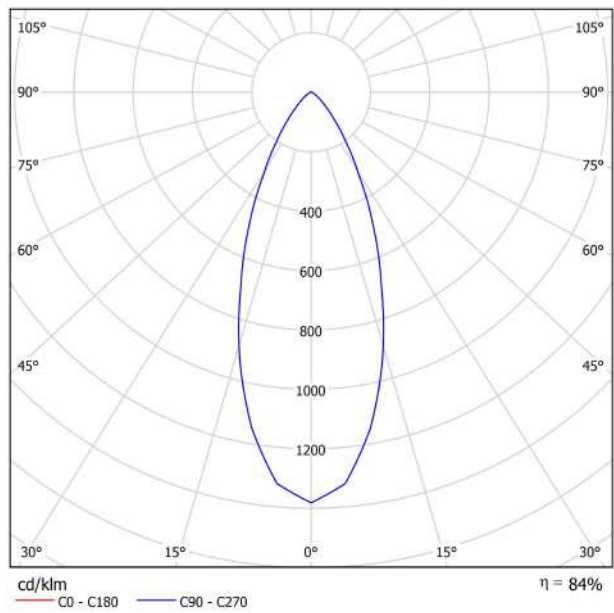


CONICAL DIAGRAM

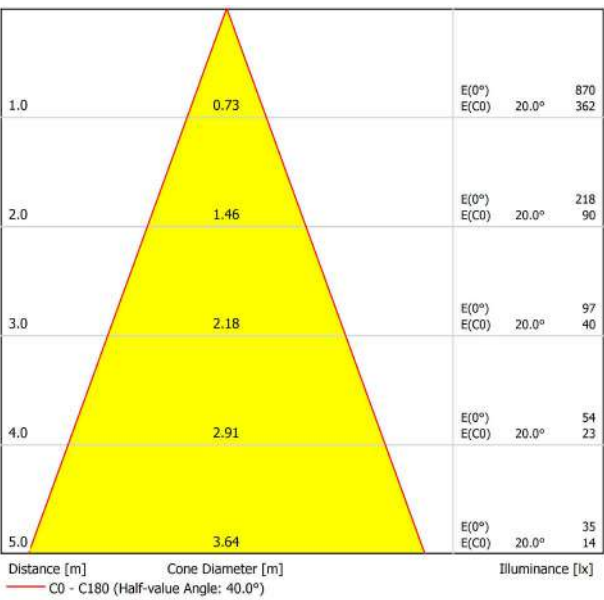



DIMENSIONS

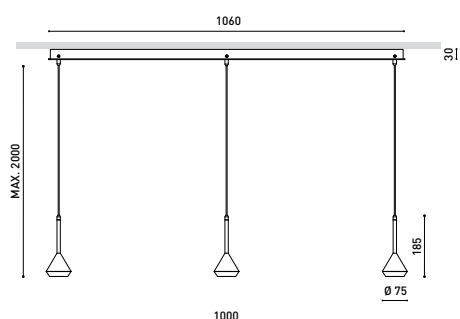

AWARDS



Name	SPIN 3 SURFACE 2M 40° DIM DALI 3000K MG-WT
Reference	A3910211MGWT
Color	Metallized gold
RAL	Electrolytic bath
Category	SUSPENSION

PRODUCT

Light source	LED
Gross luminous flux	3 x 630 Lm
Power	3 x 6,5 W
Power values of the system	23,78 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	40°
Lighting efficiency	84%
Efficacy	92 Lm/W
Current intensity	700 mA
Dimming	DALI - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


OTHER DATA

Ingress Protection	IP20
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Spin Surface is a version that allows it to be installed in places where it is impossible to access the false ceiling. Cement, concrete, vault ... its base, set to apply three luminaires, houses the driver and allows the luminaire to be installed on all types of surfaces.

POLAR DIAGRAM

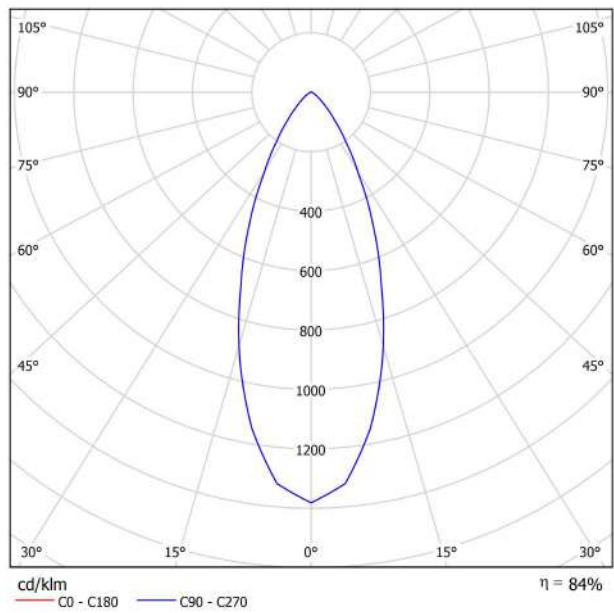


CONICAL DIAGRAM

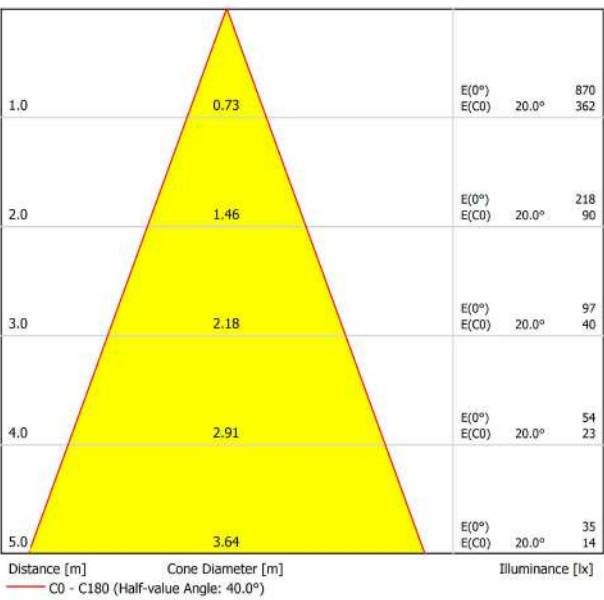



DIMENSIONS

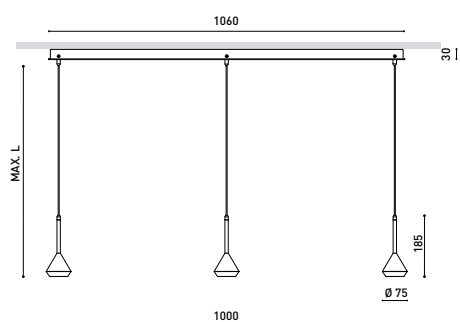

AWARDS



Name	SPIN 3 SURFACE 2M 40° DIM DALI 3000K NT-NT
Reference	A3910211NTNT
Color	Textured black
RAL	9005
Category	SURFACE

PRODUCT

Light source	LED
Gross luminous flux	3 x 630 Lm
Power	3 x 6,5 W
Power values of the system	23,78 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	40°
Lighting efficiency	84%
Efficacy	92 Lm/W
Current intensity	700 mA
Dimming	DALI - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Cord length	2 m
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Reduced dimensions, clear lines and a mechanized geometry combined in a pendant luminaire for accent lighting. Its ultra-thin cable gives Spin a sensation of aerial floatability.

POLAR DIAGRAM

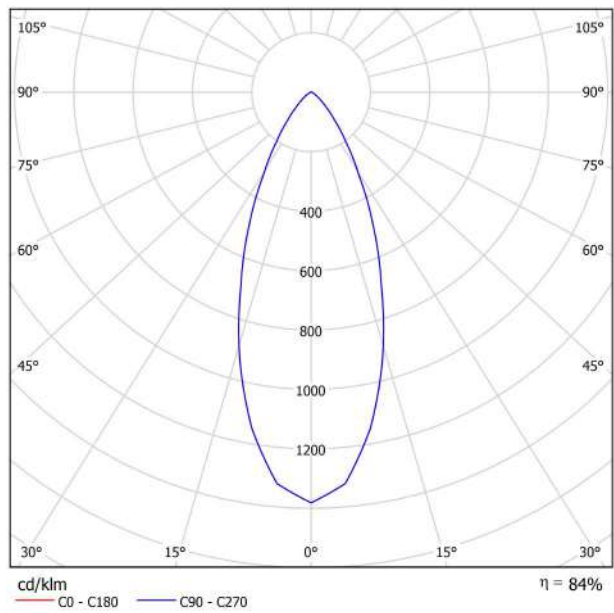


CONICAL DIAGRAM

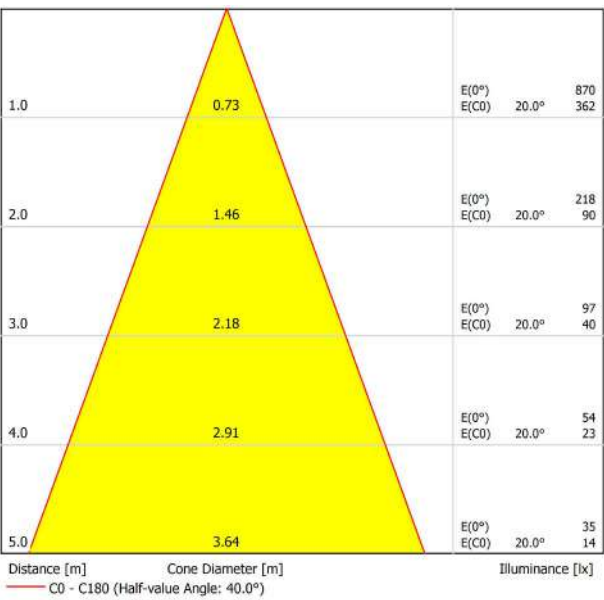



DIMENSIONS

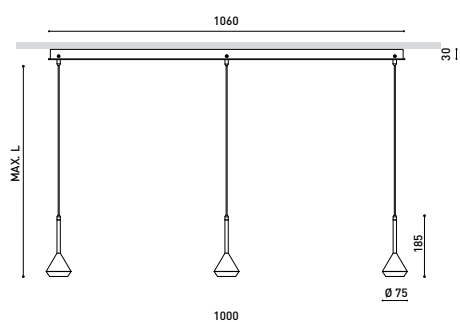

AWARDS



Name	SPIN 3 SURFACE 2M 40° DIM DALI 3000K NT-WT
Reference	A3910211NTWT
Color	Textured black
RAL	9005
Category	SURFACE

PRODUCT

Light source	LED
Gross luminous flux	3 x 630 Lm
Power	3 x 6,5 W
Power values of the system	23,78 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	40°
Lighting efficiency	84%
Efficacy	92 Lm/W
Current intensity	700 mA
Dimming	DALI - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Cord length	2 m
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Reduced dimensions, clear lines and a mechanized geometry combined in a pendant luminaire for accent lighting. Its ultra-thin cable gives Spin a sensation of aerial floatability.

POLAR DIAGRAM

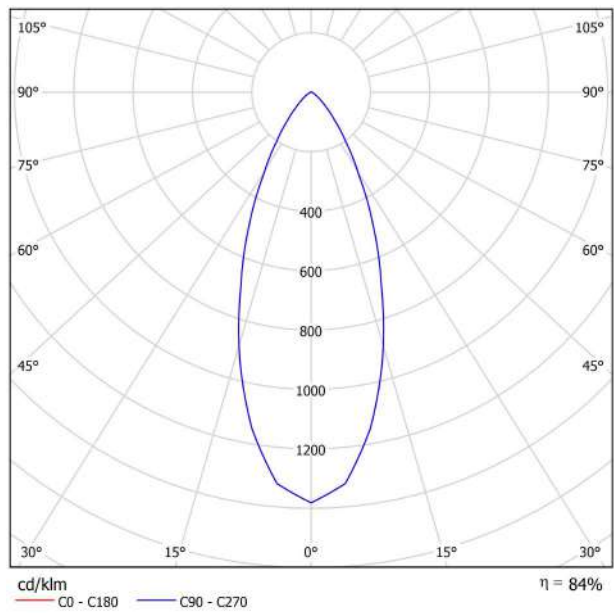


CONICAL DIAGRAM

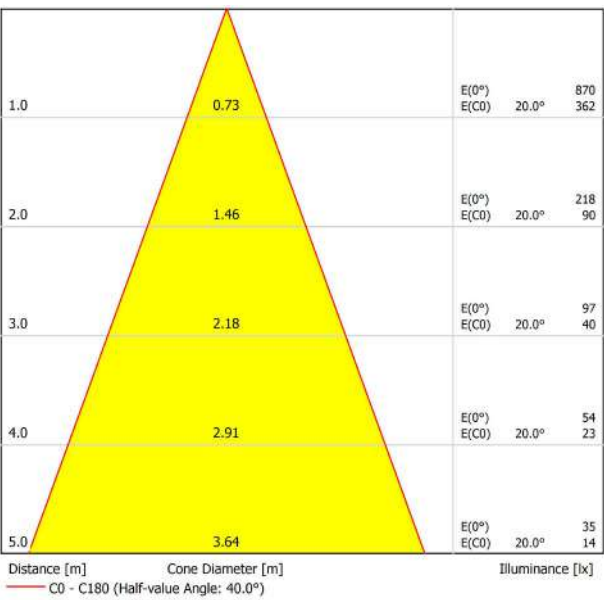



DIMENSIONS

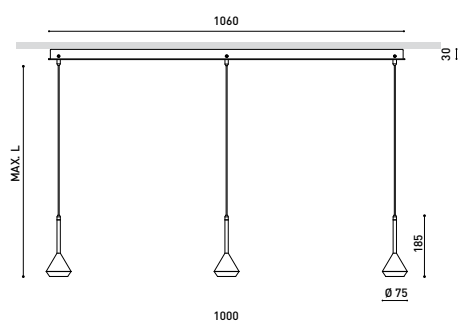

AWARDS



Name	SPIN 3 SURFACE 2M 40° DIM DALI 3000K WT-NT
Reference	A3910211WTNT
Color	Textured white
RAL	9016
Category	SURFACE

PRODUCT

Light source	LED
Gross luminous flux	3 x 630 Lm
Power	3 x 6,5 W
Power values of the system	23,78 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	40°
Lighting efficiency	84%
Efficacy	97 Lm/W
Current intensity	700 mA
Dimming	DALI - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Cord length	2 m
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Reduced dimensions, clear lines and a mechanized geometry combined in a pendant luminaire for accent lighting. Its ultra-thin cable gives Spin a sensation of aerial floatability.

POLAR DIAGRAM

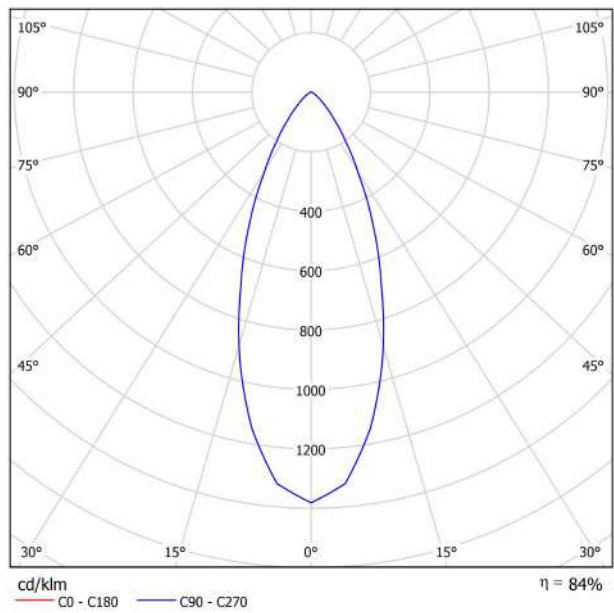


CONICAL DIAGRAM

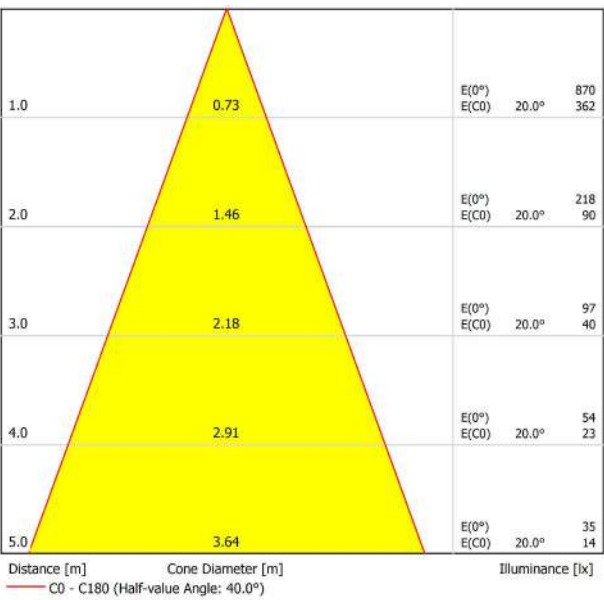



DIMENSIONS

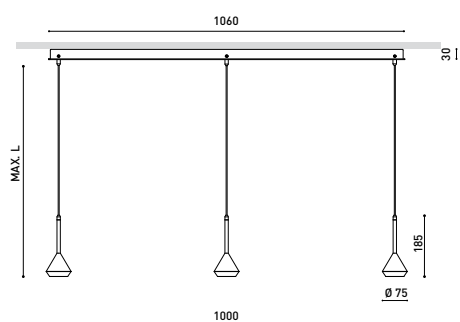

AWARDS



Name	SPIN 3 SURFACE 2M 40° DIM DALI 3000K WT-WT
Reference	A3910211WTWT
Color	Textured white
RAL	9016
Category	SURFACE

PRODUCT

Light source	LED
Gross luminous flux	3 x 630 Lm
Power	3 x 6,5 W
Power values of the system	23,78 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	40°
Lighting efficiency	84%
Efficacy	97 Lm/W
Current intensity	700 mA
Dimming	DALI - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


LIGHTING INFORMATION

OTHER DATA


Ingress Protection	IP20
Cord length	2 m
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate



POLAR DIAGRAM

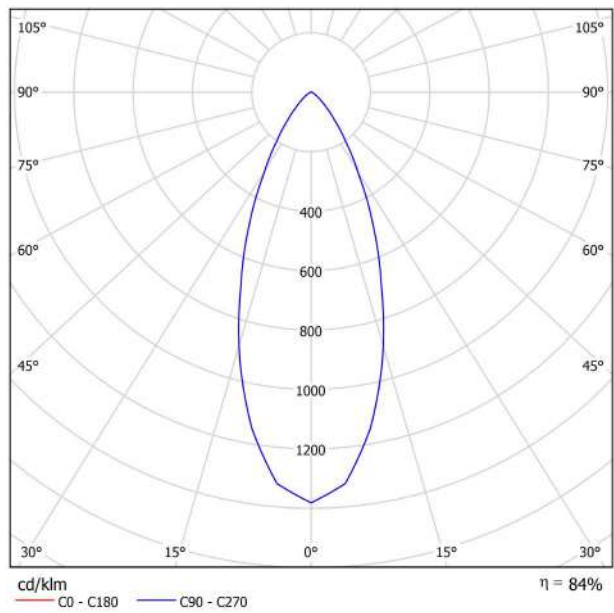


CONICAL DIAGRAM

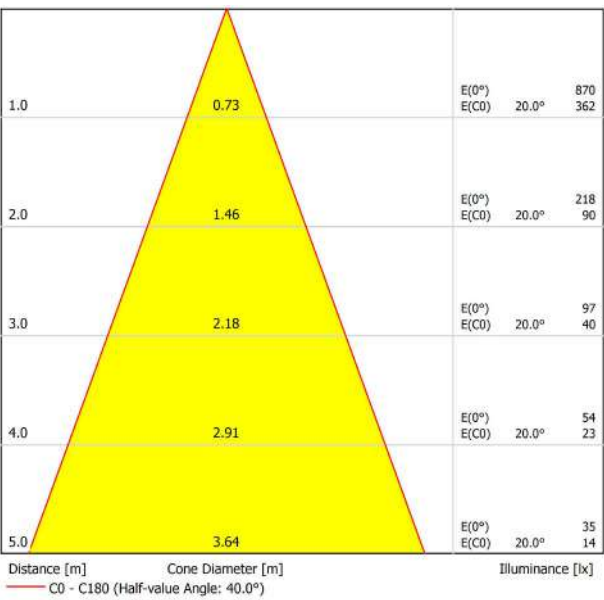



DIMENSIONS

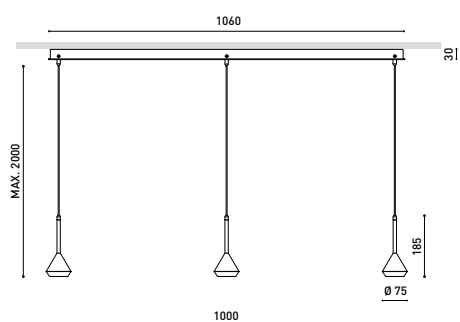

AWARDS



Name	SPIN 3 SURFACE 2M 40° DIM DALI 4000K MC-NT
Reference	A3910212MCNT
Color	Metallized copper
RAL	Electrolytic bath
Category	SUSPENSION

PRODUCT

Light source	LED
Gross luminous flux	3 x 680 Lm
Power	3 x 6,5 W
Power values of the system	23,78 W
Colour temperature	4000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	40°
Lighting efficiency	84%
Efficacy	97 Lm/W
Current intensity	700 mA
Dimming	DALI - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


OTHER DATA

Ingress Protection	IP20
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Spin Surface is a version that allows it to be installed in places where it is impossible to access the false ceiling. Cement, concrete, vault ... its base, set to apply three luminaires, houses the driver and allows the luminaire to be installed on all types of surfaces.

POLAR DIAGRAM

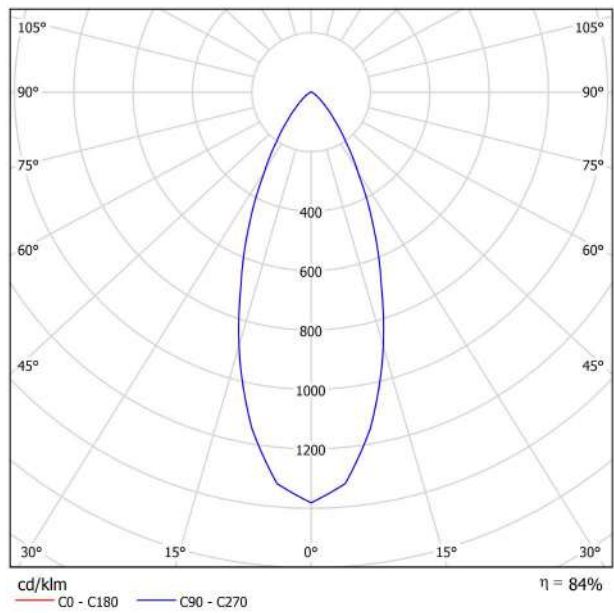


CONICAL DIAGRAM

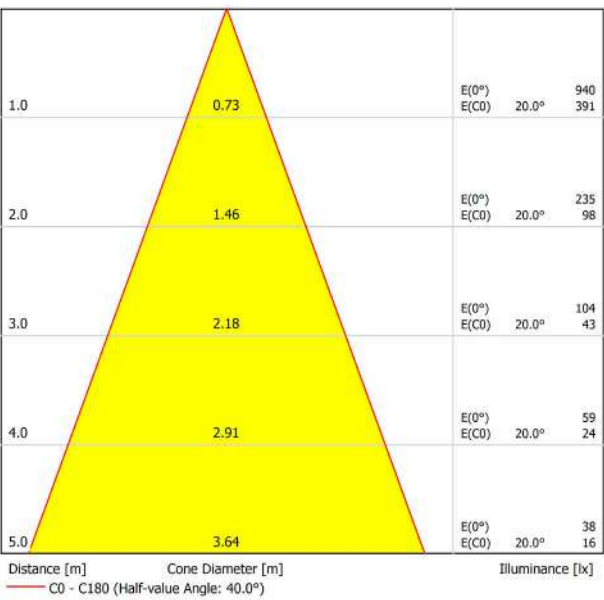



DIMENSIONS

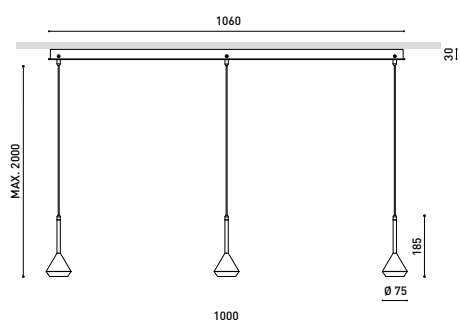

AWARDS



Name	SPIN 3 SURFACE 2M 40° DIM DALI 4000K MC-WT
Reference	A3910212MCWT
Color	Metallized copper
RAL	Electrolytic bath
Category	SUSPENSION

PRODUCT

Light source	LED
Gross luminous flux	3 x 680 Lm
Power	3 x 6,5 W
Power values of the system	23,78 W
Colour temperature	4000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	40°
Lighting efficiency	84%
Efficacy	97 Lm/W
Current intensity	700 mA
Dimming	DALI - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


OTHER DATA

Ingress Protection	IP20
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Spin Surface is a version that allows it to be installed in places where it is impossible to access the false ceiling. Cement, concrete, vault ... its base, set to apply three luminaires, houses the driver and allows the luminaire to be installed on all types of surfaces.

POLAR DIAGRAM

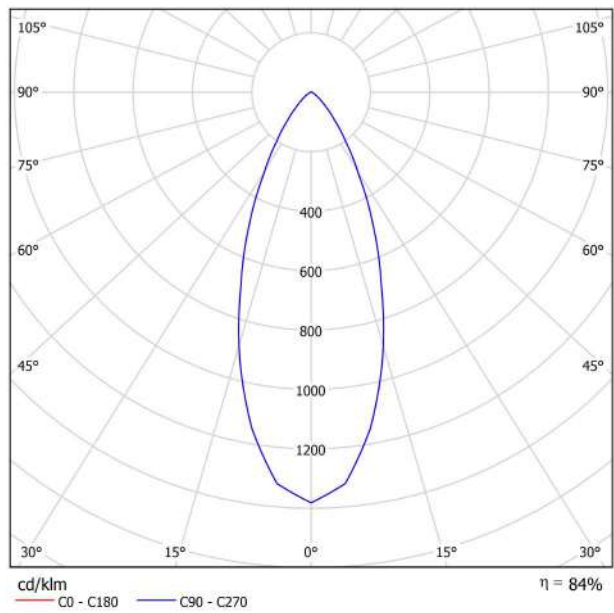


CONICAL DIAGRAM

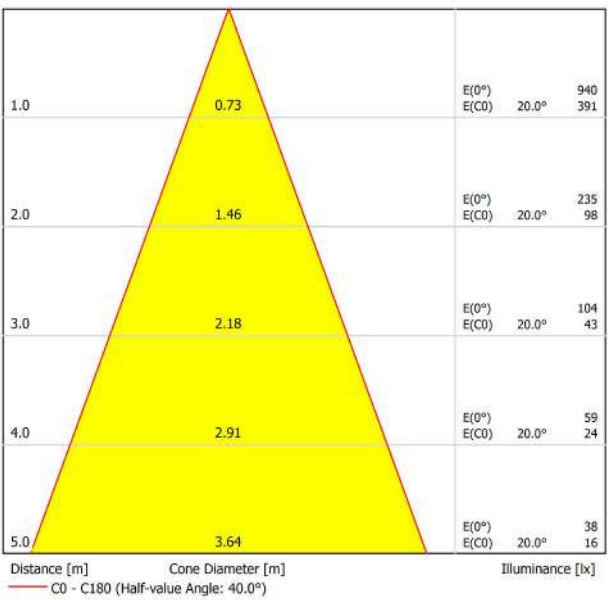



DIMENSIONS

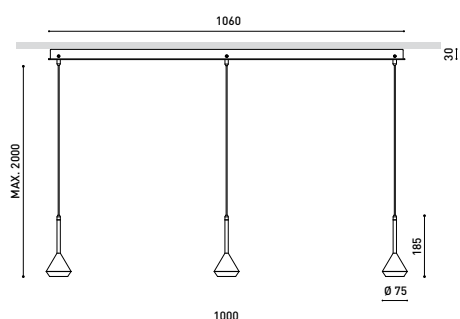

AWARDS



Name	SPIN 3 SURFACE 2M 40° DIM DALI 4000K MG-NT
Reference	A3910212MGNT
Color	Metallized gold
RAL	Electrolytic bath
Category	SUSPENSION

PRODUCT

Light source	LED
Gross luminous flux	3 x 680 Lm
Power	3 x 6,5 W
Power values of the system	23,78 W
Colour temperature	4000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	40°
Lighting efficiency	84%
Efficacy	97 Lm/W
Current intensity	700 mA
Dimming	DALI - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


OTHER DATA

Ingress Protection	IP20
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Spin Surface is a version that allows it to be installed in places where it is impossible to access the false ceiling. Cement, concrete, vault ... its base, set to apply three luminaires, houses the driver and allows the luminaire to be installed on all types of surfaces.

POLAR DIAGRAM

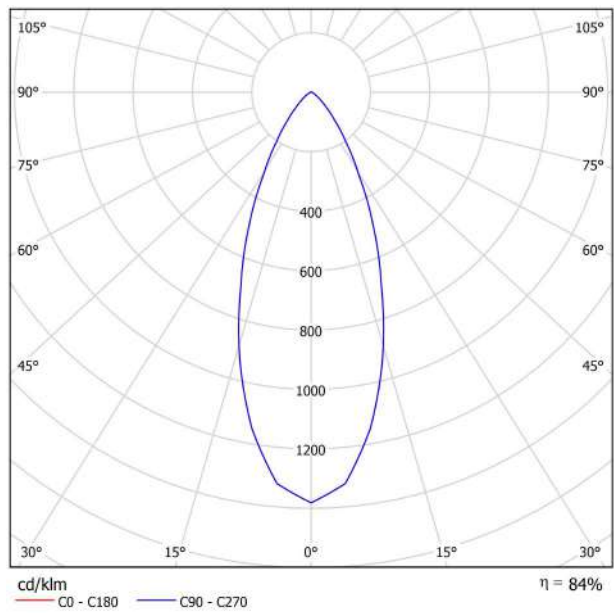


CONICAL DIAGRAM

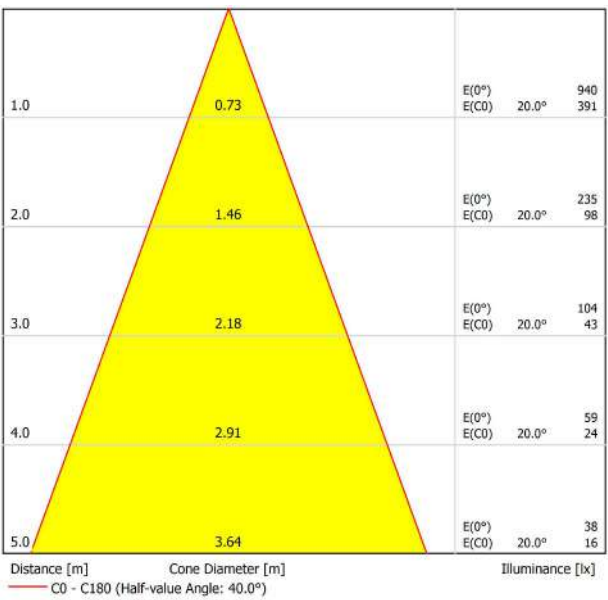



DIMENSIONS

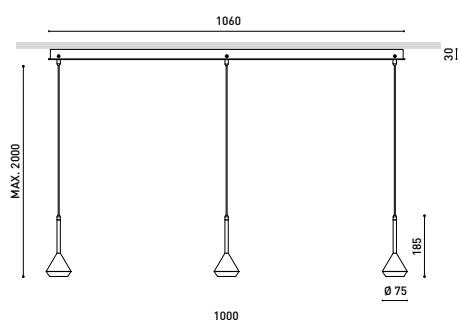

AWARDS



Name	SPIN 3 SURFACE 2M 40° DIM DALI 4000K MG-WT
Reference	A3910212MGWT
Color	Metallized gold
RAL	Electrolytic bath
Category	SUSPENSION

PRODUCT

Light source	LED
Gross luminous flux	3 x 680 Lm
Power	3 x 6,5 W
Power values of the system	23,78 W
Colour temperature	4000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	40°
Lighting efficiency	84%
Efficacy	97 Lm/W
Current intensity	700 mA
Dimming	DALI - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


OTHER DATA

Ingress Protection	IP20
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Spin Surface is a version that allows it to be installed in places where it is impossible to access the false ceiling. Cement, concrete, vault ... its base, set to apply three luminaires, houses the driver and allows the luminaire to be installed on all types of surfaces.

POLAR DIAGRAM

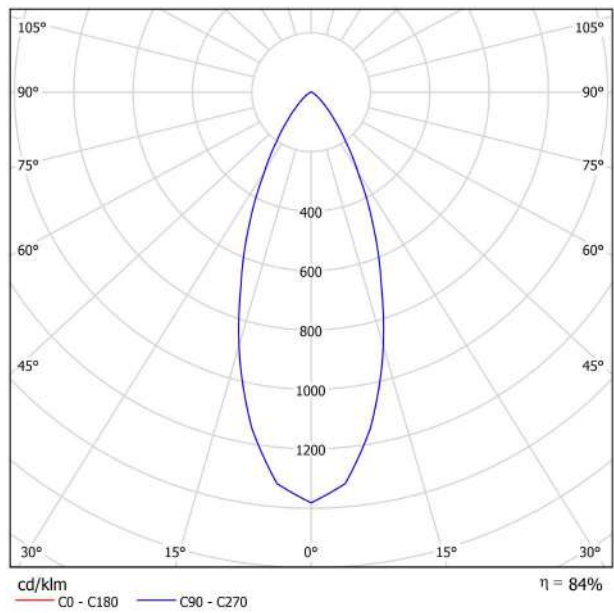


CONICAL DIAGRAM

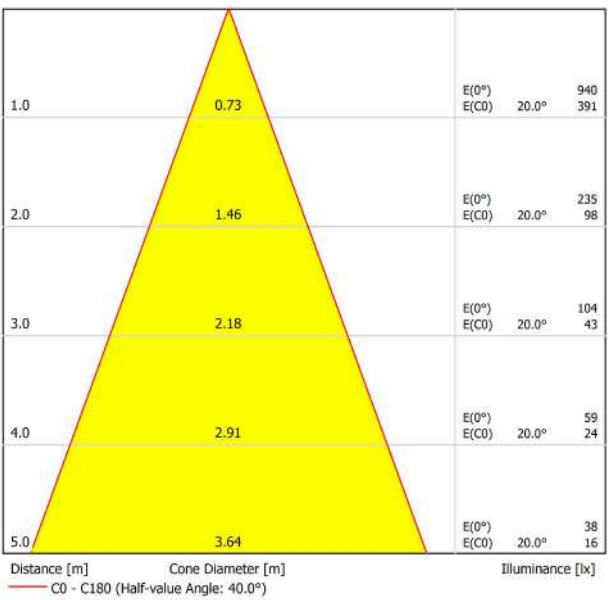



DIMENSIONS

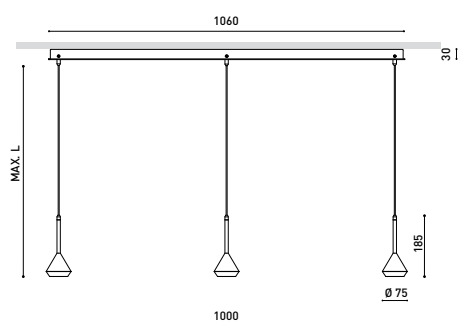

AWARDS



Name	SPIN 3 SURFACE 2M 40° DIM DALI 4000K NT-NT
Reference	A3910212NTNT
Color	Textured black
RAL	9005
Category	SURFACE

PRODUCT

Light source	LED
Gross luminous flux	3 x 680 Lm
Power	3 x 6,5 W
Power values of the system	23,78 W
Colour temperature	4000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	40°
Lighting efficiency	84%
Efficacy	97 Lm/W
Current intensity	700 mA
Dimming	DALI - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Cord length	2 m
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Reduced dimensions, clear lines and a mechanized geometry combined in a pendant luminaire for accent lighting. Its ultra-thin cable gives Spin a sensation of aerial floatability.

POLAR DIAGRAM

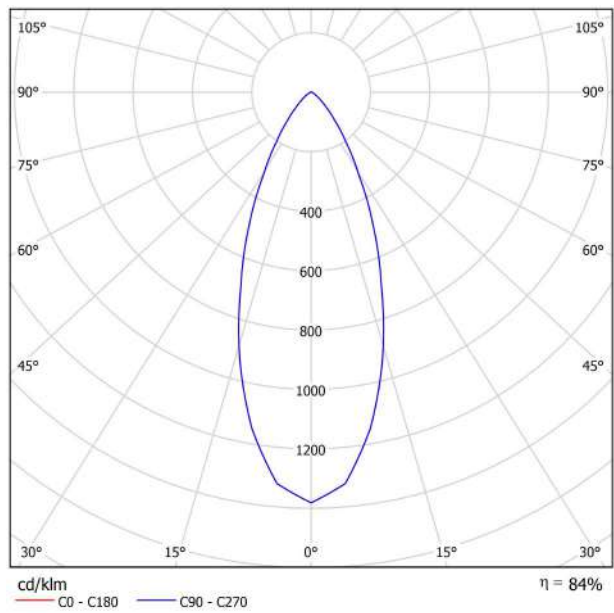


CONICAL DIAGRAM

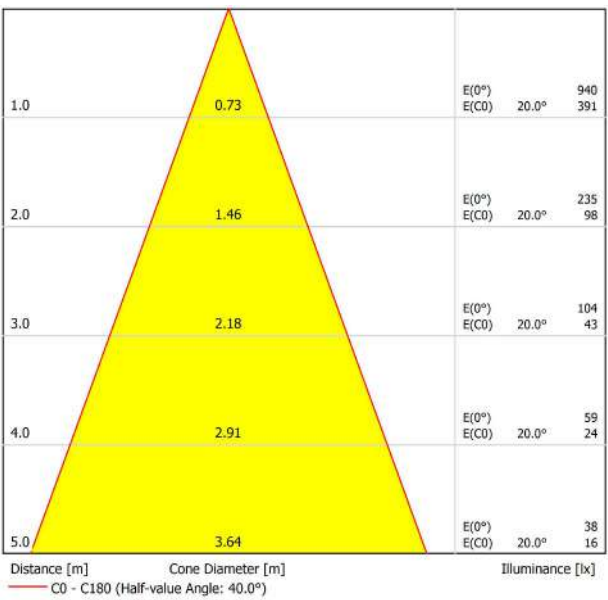



DIMENSIONS

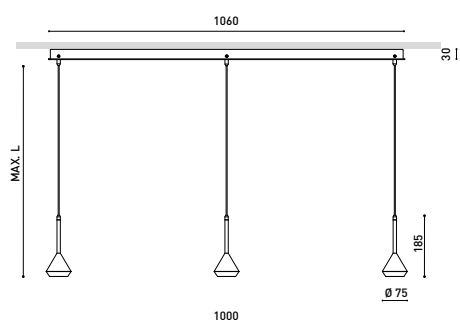

AWARDS



Name	SPIN 3 SURFACE 2M 40° DIM DALI 4000K NT-WT
Reference	A3910212NTWT
Color	Textured black
RAL	9005
Category	SURFACE

PRODUCT

Light source	LED
Gross luminous flux	3 x 680 Lm
Power	3 x 6,5 W
Power values of the system	23,78 W
Colour temperature	4000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	40°
Lighting efficiency	84%
Efficacy	97 Lm/W
Current intensity	700 mA
Dimming	DALI - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Cord length	2 m
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Reduced dimensions, clear lines and a mechanized geometry combined in a pendant luminaire for accent lighting. Its ultra-thin cable gives Spin a sensation of aerial floatability.

POLAR DIAGRAM

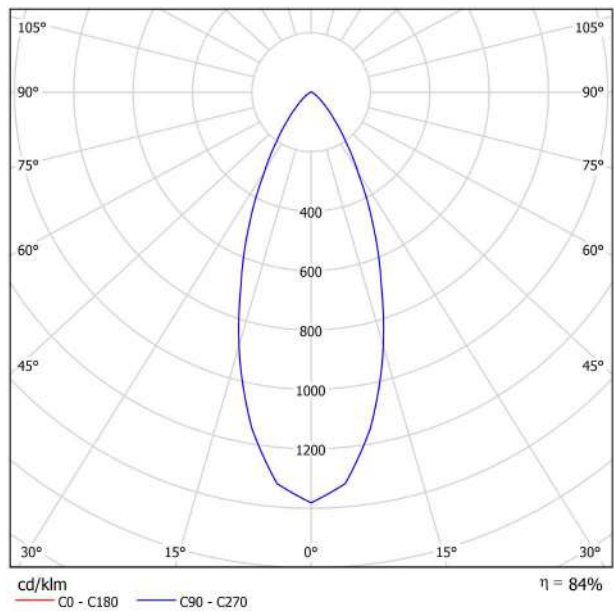


CONICAL DIAGRAM

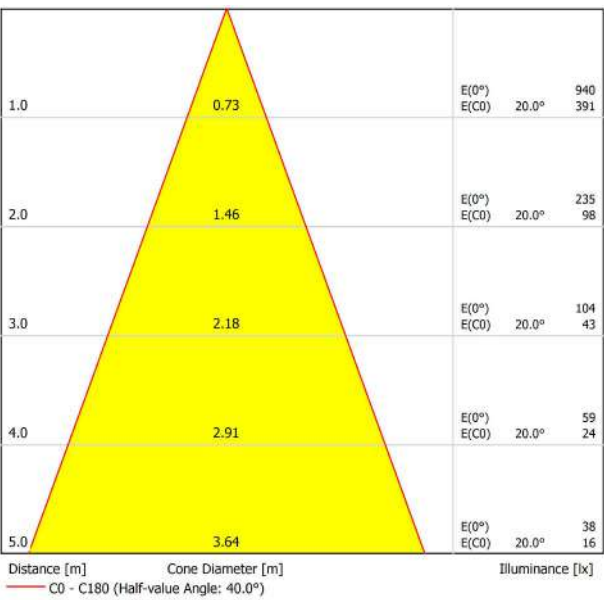



DIMENSIONS

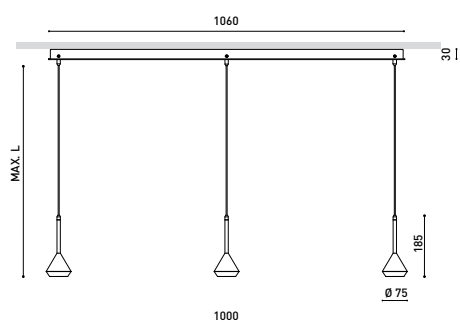

AWARDS



Name	SPIN 3 SURFACE 2M 40° DIM DALI 4000K WT-NT
Reference	A3910212WTNT
Color	Textured white
RAL	9016
Category	SURFACE

PRODUCT

Light source	LED
Gross luminous flux	3 x 680 Lm
Power	3 x 6,5 W
Power values of the system	23,78 W
Colour temperature	4000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	40°
Lighting efficiency	84%
Efficacy	105 Lm/W
Current intensity	700 mA
Dimming	DALI - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


OTHER DATA

Ingress Protection	IP20
Cord length	2 m
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Reduced dimensions, clear lines and a mechanized geometry combined in a pendant luminaire for accent lighting. Its ultra-thin cable gives Spin a sensation of aerial floatability.

POLAR DIAGRAM

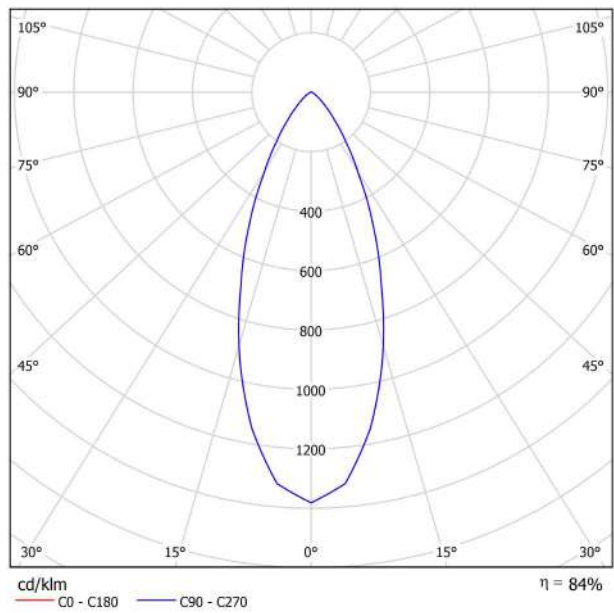


CONICAL DIAGRAM

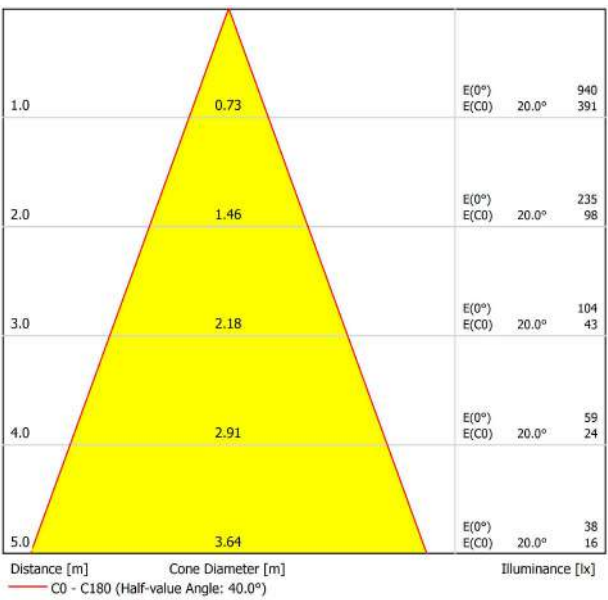



DIMENSIONS

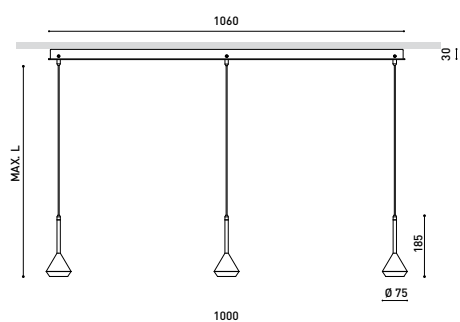

AWARDS



Name	SPIN 3 SURFACE 2M 40° DIM DALI 4000K WT-WT
Reference	A3910212WTWT
Color	Textured white
RAL	9016
Category	SURFACE

PRODUCT

Light source	LED
Gross luminous flux	3 x 680 Lm
Power	3 x 6,5 W
Power values of the system	23,78 W
Colour temperature	4000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	40°
Lighting efficiency	84%
Efficacy	105 Lm/W
Current intensity	700 mA
Dimming	DALI - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Cord length	2 m
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Reduced dimensions, clear lines and a mechanized geometry combined in a pendant luminaire for accent lighting. Its ultra-thin cable gives Spin a sensation of aerial floatability.

POLAR DIAGRAM

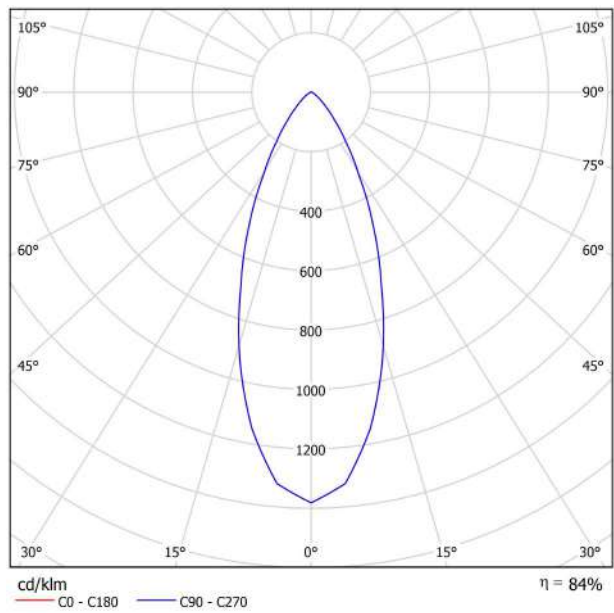


CONICAL DIAGRAM

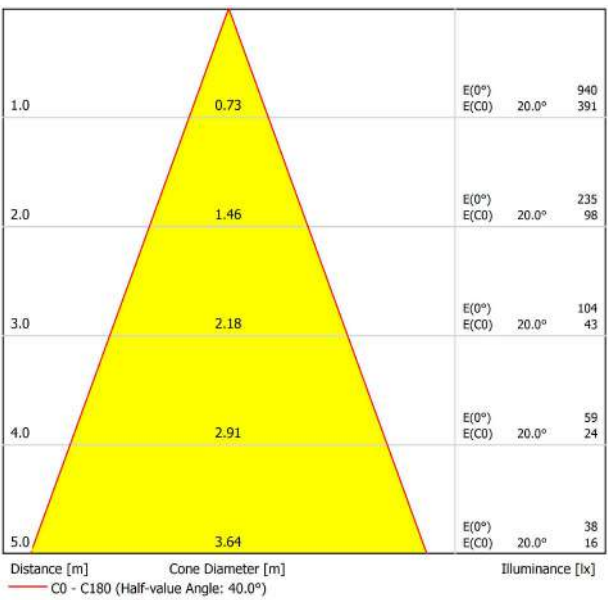



DIMENSIONS

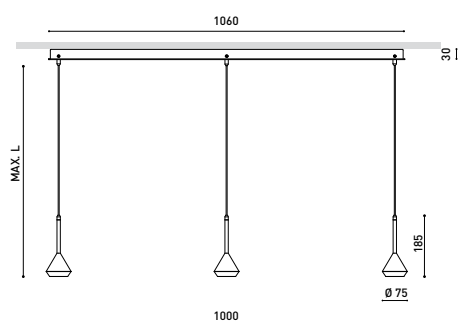

AWARDS



Name	SPIN 3 SURFACE 2M 24° DIM DALI 4000K NT-WT
Reference	A3910202NTWT
Color	Textured black
RAL	9005
Category	SURFACE

PRODUCT

SPIN 3 SURFACE 2M 24° DIM DALI 4000K NT-WT

A3910202NTWT

Textured black

9005

SURFACE

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	3 x 680 Lm
Power	3 x 6,5 W
Power values of the system	23,78 W
Colour temperature	4000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	24°
Lighting efficiency	86%
Efficacy	97 Lm/W
Current intensity	700 mA
Dimming	DALI - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Cord length	2 m
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Reduced dimensions, clear lines and a mechanized geometry combined in a pendant luminaire for accent lighting. Its ultra-thin cable gives Spin a sensation of aerial floatability.

POLAR DIAGRAM

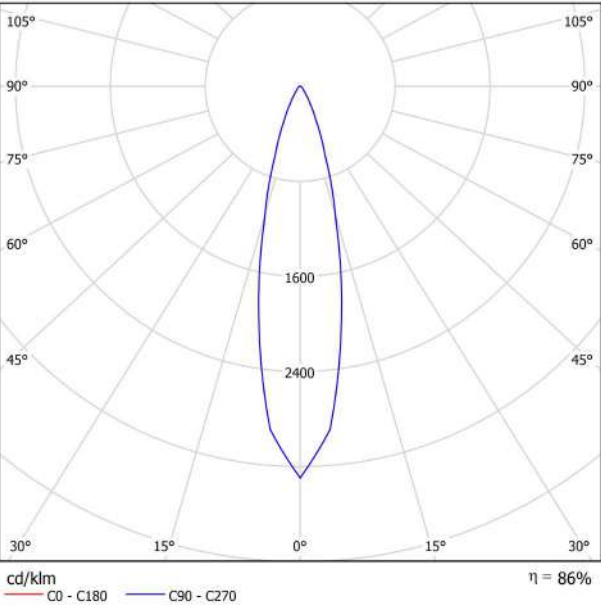


CONICAL DIAGRAM

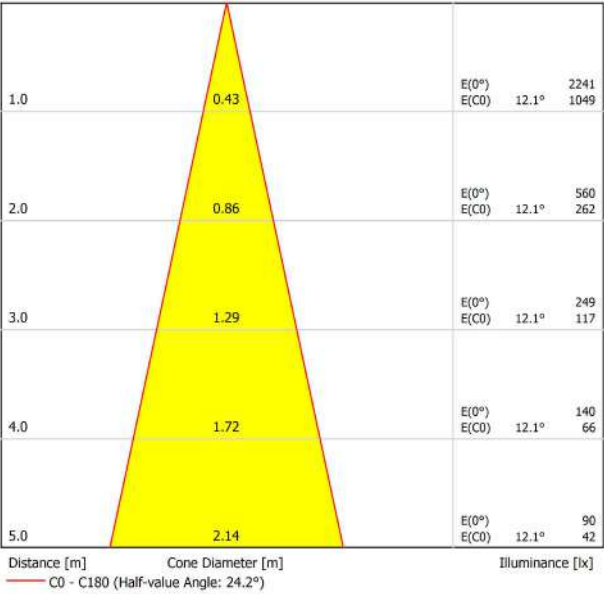



DIMENSIONS

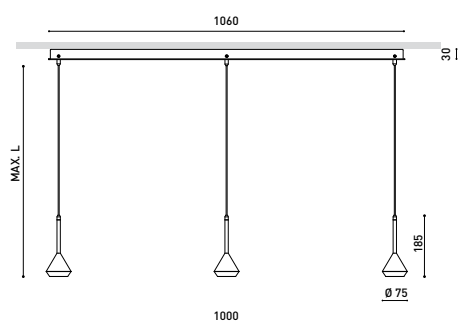

AWARDS



Name	SPIN 3 SURFACE 2M 24° DIM DALI 4000K WT-NT
Reference	A3910202WTNT
Color	Textured white
RAL	9016
Category	SURFACE

PRODUCT

Light source	LED
Gross luminous flux	3 x 680 Lm
Power	3 x 6,5 W
Power values of the system	23,78 W
Colour temperature	4000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	24°
Lighting efficiency	86%
Efficacy	105 Lm/W
Current intensity	700 mA
Dimming	DALI - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Cord length	2 m
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Reduced dimensions, clear lines and a mechanized geometry combined in a pendant luminaire for accent lighting. Its ultra-thin cable gives Spin a sensation of aerial floatability.

POLAR DIAGRAM

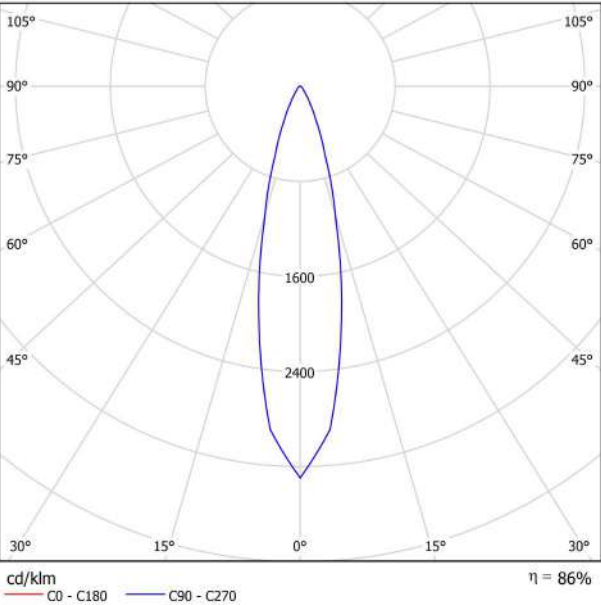


CONICAL DIAGRAM

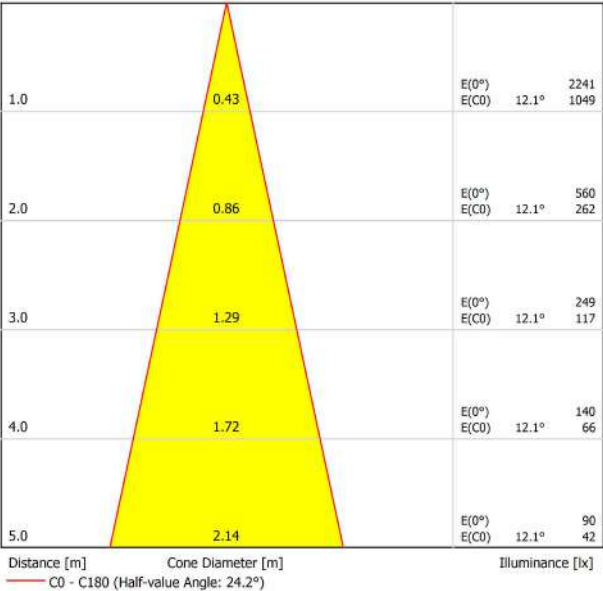



DIMENSIONS

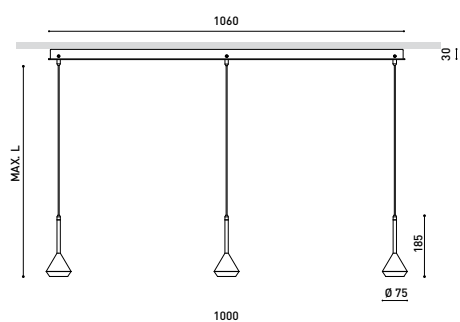

AWARDS



Name	SPIN 3 SURFACE 2M 24° DIM DALI 4000K WT-WT
Reference	A3910202WTWT
Color	Textured white
RAL	9016
Category	SURFACE

PRODUCT

Light source	LED
Gross luminous flux	3 x 680 Lm
Power	3 x 6,5 W
Power values of the system	23,78 W
Colour temperature	4000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	24°
Lighting efficiency	86%
Efficacy	105 Lm/W
Current intensity	700 mA
Dimming	DALI - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


OTHER DATA

Ingress Protection	IP20
Cord length	2 m
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Reduced dimensions, clear lines and a mechanized geometry combined in a pendant luminaire for accent lighting. Its ultra-thin cable gives Spin a sensation of aerial floatability.

POLAR DIAGRAM

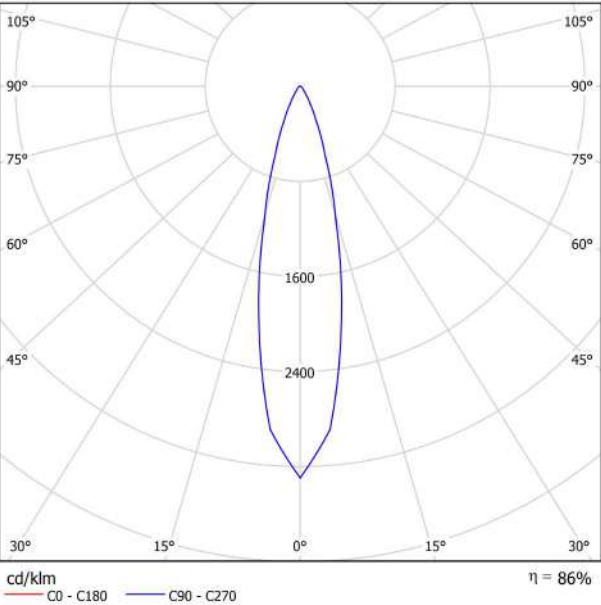


CONICAL DIAGRAM

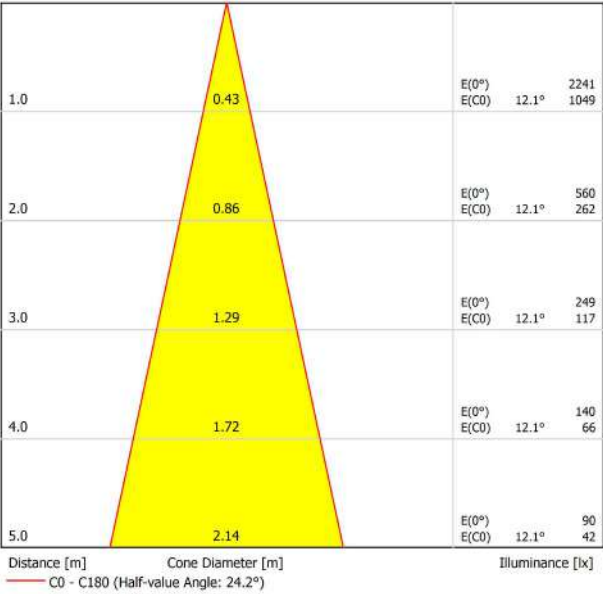



DIMENSIONS

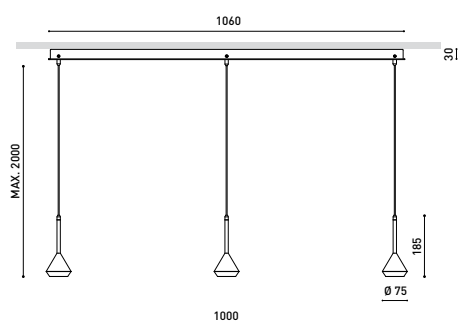

AWARDS



Name	SPIN 3 SURFACE 2M 40° DIM DALI 2700K MC-NT
Reference	A3910210MCNT
Color	Metallized copper
RAL	Electrolytic bath
Category	SUSPENSION

PRODUCT

LIGHTING INFORMATION

LED

3 x 600 Lm

3 x 6,5 W

23,78 W

2700 K

CRI>90

MacAdam Step 2

40°

84%

105 Lm/W

700 mA

DALI - Other DIM, please consult

Please Consult

Included

Electrical insulation class



220 V/240 V

50/60 Hz

A+

L80B10 (Tc=85°C) >60.000h

OTHER DATA

IP20

No

4150 g.

4577 g.

1078 x 139 x 89 mm


1

Aluminium / Polymethyl Methacrylate




Spin Surface is a version that allows it to be installed in places where it is impossible to access the false ceiling. Cement, concrete, vault ... its base, set to apply three luminaires, houses the driver and allows the luminaire to be installed on all types of surfaces.

POLAR DIAGRAM

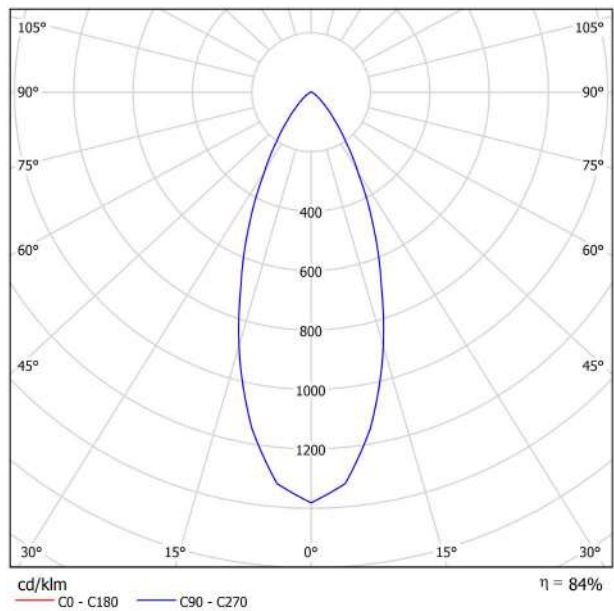


CONICAL DIAGRAM

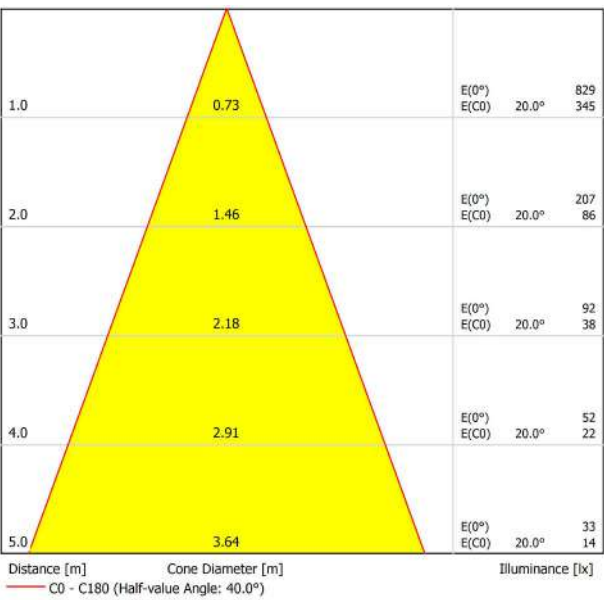



DIMENSIONS

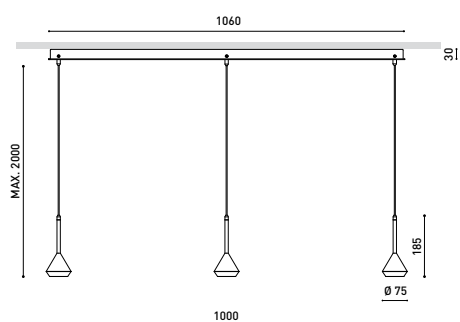

PRODUCT

Name	SPIN 3 SURFACE 2M 40° DIM DALI 2700K MC-WT
Reference	A3910210MCWT
Color	Metallized copper
RAL	Electrolytic bath
Category	SUSPENSION

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	3 x 600 Lm
Power	3 x 6,5 W
Power values of the system	23,78 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	40°
Lighting efficiency	84%
Efficacy	105 Lm/W
Current intensity	700 mA
Dimming	DALI - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h

OTHER DATA

Ingress Protection	IP20
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




AWARDS




Spin Surface is a version that allows it to be installed in places where it is impossible to access the false ceiling. Cement, concrete, vault ... its base, set to apply three luminaires, houses the driver and allows the luminaire to be installed on all types of surfaces.

POLAR DIAGRAM

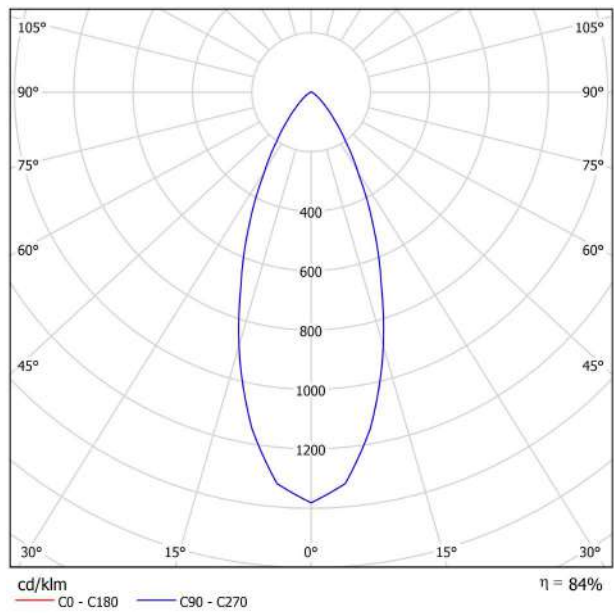


CONICAL DIAGRAM

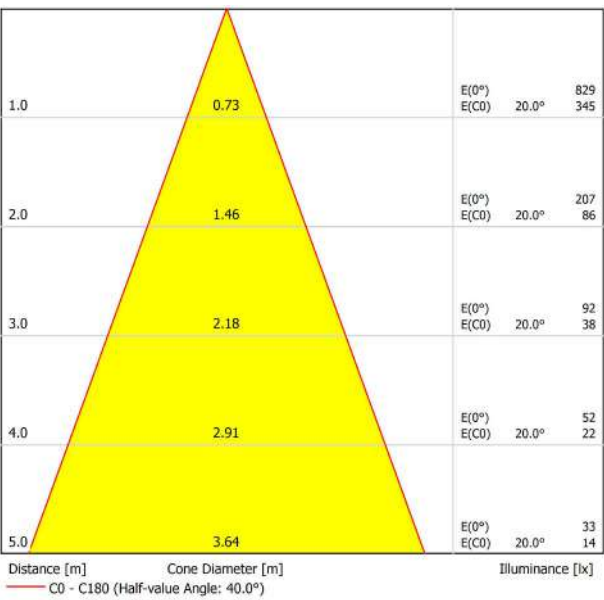



DIMENSIONS

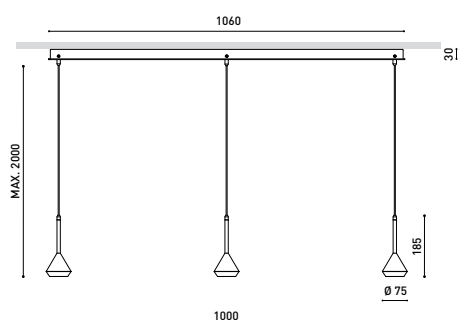

AWARDS



Name	SPIN 3 SURFACE 2M 40° DIM DALI 2700K MG-NT
Reference	A3910210MGNT
Color	Metallized gold
RAL	Electrolytic bath
Category	SUSPENSION

PRODUCT

Light source	LED
Gross luminous flux	3 x 600 Lm
Power	3 x 6,5 W
Power values of the system	23,78 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	40°
Lighting efficiency	84%
Efficacy	105 Lm/W
Current intensity	700 mA
Dimming	DALI - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


OTHER DATA

Ingress Protection	IP20
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Spin Surface is a version that allows it to be installed in places where it is impossible to access the false ceiling. Cement, concrete, vault ... its base, set to apply three luminaires, houses the driver and allows the luminaire to be installed on all types of surfaces.

POLAR DIAGRAM

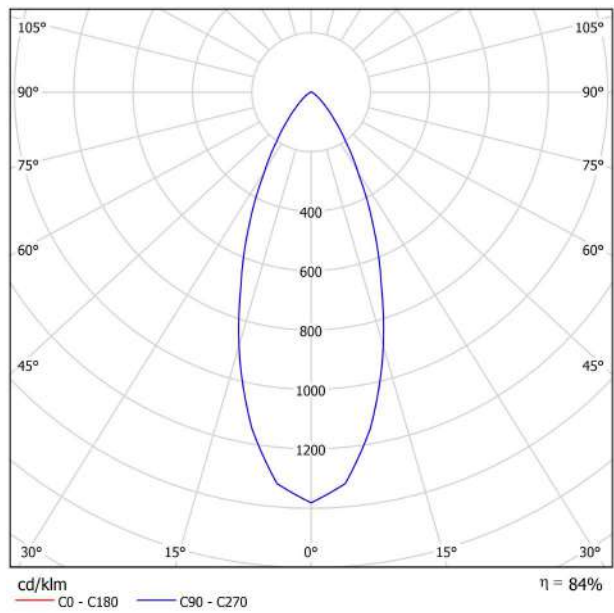


CONICAL DIAGRAM

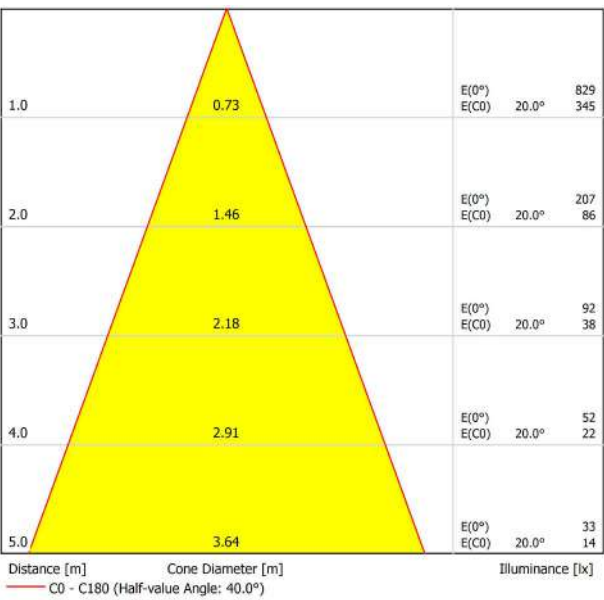



DIMENSIONS

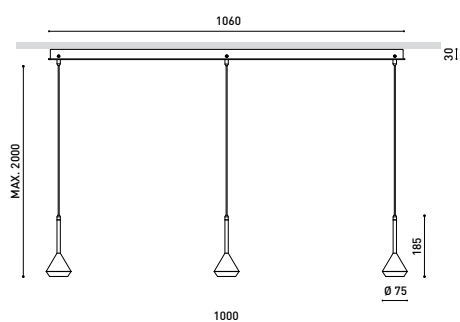

Name	SPIN 3 SURFACE 2M 24° DIM DALI 2700K MG-NT
Reference	A3910200MGNT
Color	Metallized gold
RAL	Electrolytic bath
Category	SUSPENSION

PRODUCT

LIGHTING INFORMATION

LED

3 x 600 Lm

3 x 6,5 W

23,78 W

2700 K

CRI>90

MacAdam Step 2

24°

86%

105 Lm/W

700 mA

DALI - Other DIM, please consult

Please Consult

Included

☐

220 V/240 V

50/60 Hz

A+

L80B10 (Tc=85°C) >60.000h

OTHER DATA

IP20

No

4150 g.

4577 g.

1078 x 139 x 89 mm

1

Aluminium / Polymethyl Methacrylate




AWARDS




Spin Surface is a version that allows it to be installed in places where it is impossible to access the false ceiling. Cement, concrete, vault ... its base, set to apply three luminaires, houses the driver and allows the luminaire to be installed on all types of surfaces.

POLAR DIAGRAM

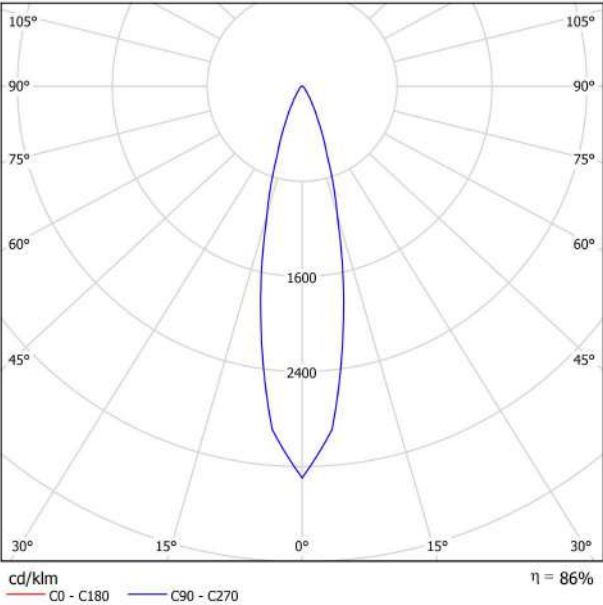


CONICAL DIAGRAM

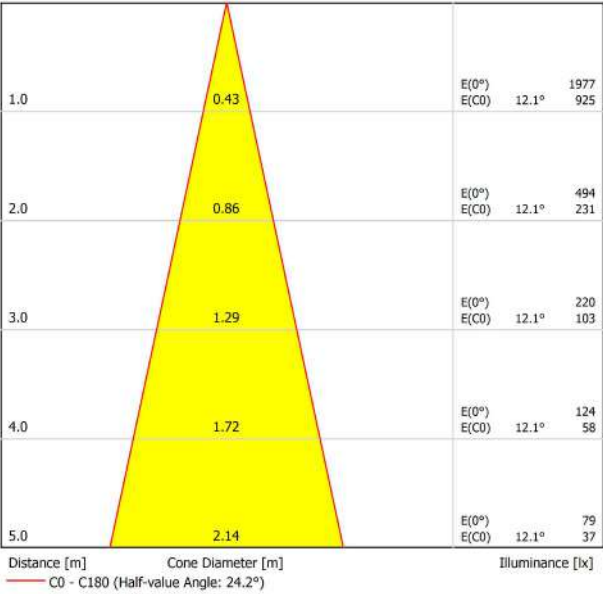



DIMENSIONS

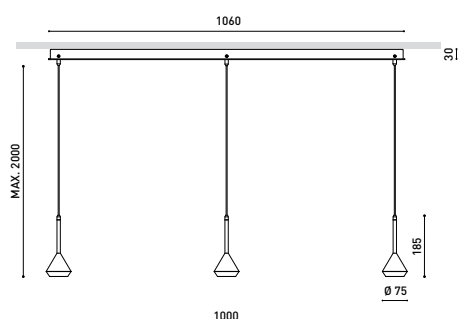

Name	SPIN 3 SURFACE 2M 24° DIM DALI 2700K MG-WT
Reference	A3910200MGWT
Color	Metallized gold
RAL	Electrolytic bath
Category	SUSPENSION

PRODUCT

LIGHTING INFORMATION

LED

3 x 600 Lm

3 x 6,5 W

23,78 W

2700 K

CRI>90

MacAdam Step 2

24°

86%

105 Lm/W

700 mA

DALI - Other DIM, please consult

Please Consult

Included

☐

220 V/240 V

50/60 Hz

A+

L80B10 (Tc=85°C) >60.000h

OTHER DATA

IP20

No

4150 g.

4577 g.

1078 x 139 x 89 mm

1

Aluminium / Polymethyl Methacrylate




AWARDS




Spin Surface is a version that allows it to be installed in places where it is impossible to access the false ceiling. Cement, concrete, vault ... its base, set to apply three luminaires, houses the driver and allows the luminaire to be installed on all types of surfaces.

POLAR DIAGRAM

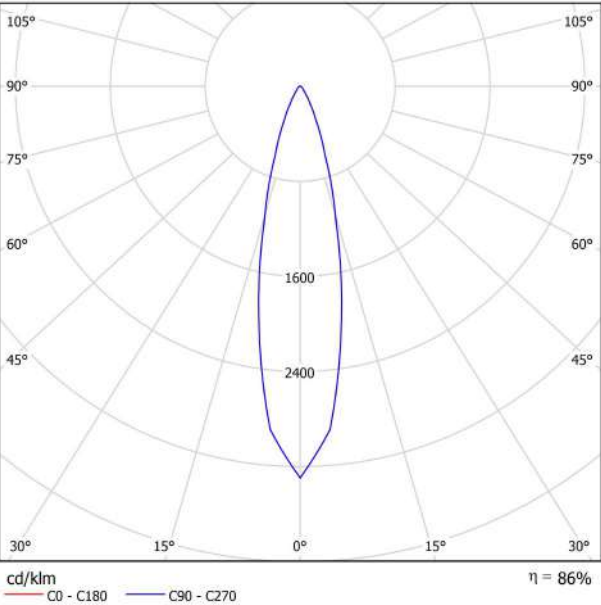


CONICAL DIAGRAM

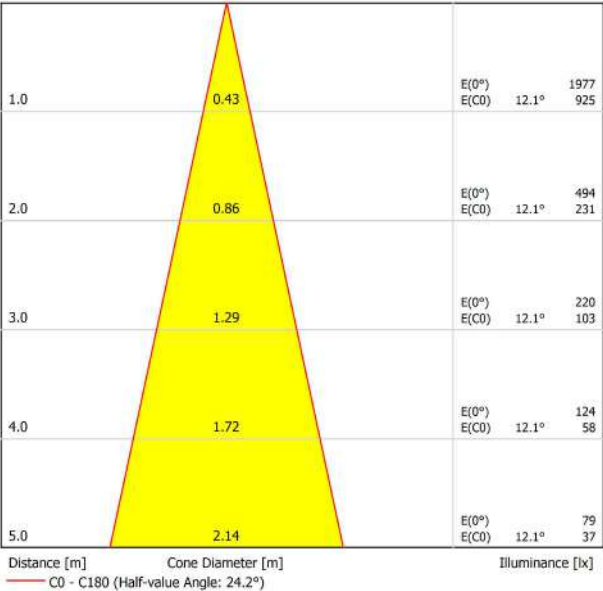



DIMENSIONS

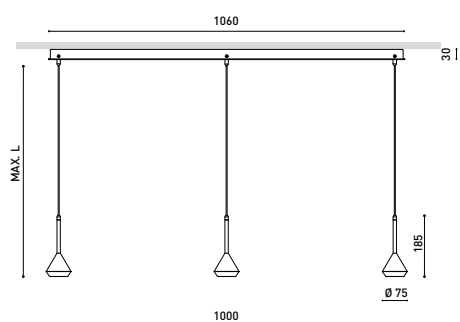

AWARDS



Name	SPIN 3 SURFACE 2M 24° DIM DALI 2700K NT-NT
Reference	A3910200NTNT
Color	Textured black
RAL	9005
Category	SURFACE

PRODUCT

Light source	LED
Gross luminous flux	3 x 600 Lm
Power	3 x 6,5 W
Power values of the system	23,78 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	24°
Lighting efficiency	86%
Efficacy	105 Lm/W
Current intensity	700 mA
Dimming	DALI - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Cord length	2 m
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Reduced dimensions, clear lines and a mechanized geometry combined in a pendant luminaire for accent lighting. Its ultra-thin cable gives Spin a sensation of aerial floatability.

POLAR DIAGRAM

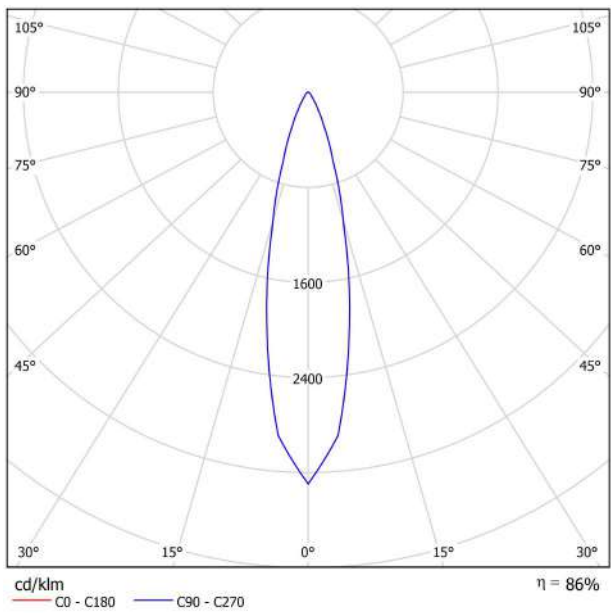


CONICAL DIAGRAM

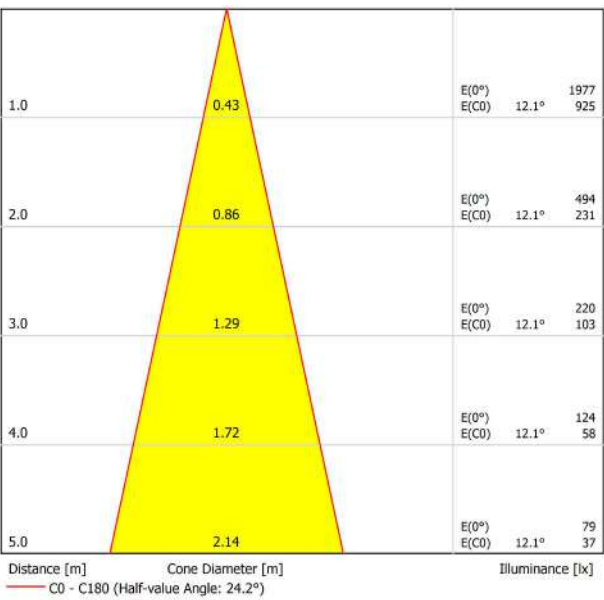



DIMENSIONS

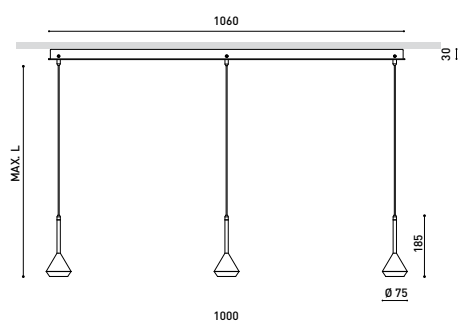

AWARDS



Name	SPIN 3 SURFACE 2M 24° DIM DALI 2700K NT-WT
Reference	A3910200NTWT
Color	Textured black
RAL	9005
Category	SURFACE

PRODUCT

Light source	LED
Gross luminous flux	3 x 600 Lm
Power	3 x 6,5 W
Power values of the system	23,78 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	24°
Lighting efficiency	86%
Efficacy	105 Lm/W
Current intensity	700 mA
Dimming	DALI - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


OTHER DATA

Ingress Protection	IP20
Cord length	2 m
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Reduced dimensions, clear lines and a mechanized geometry combined in a pendant luminaire for accent lighting. Its ultra-thin cable gives Spin a sensation of aerial floatability.

POLAR DIAGRAM

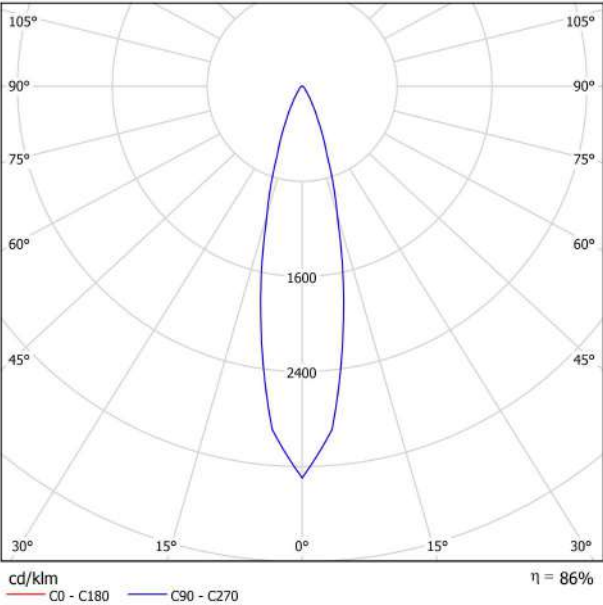


CONICAL DIAGRAM

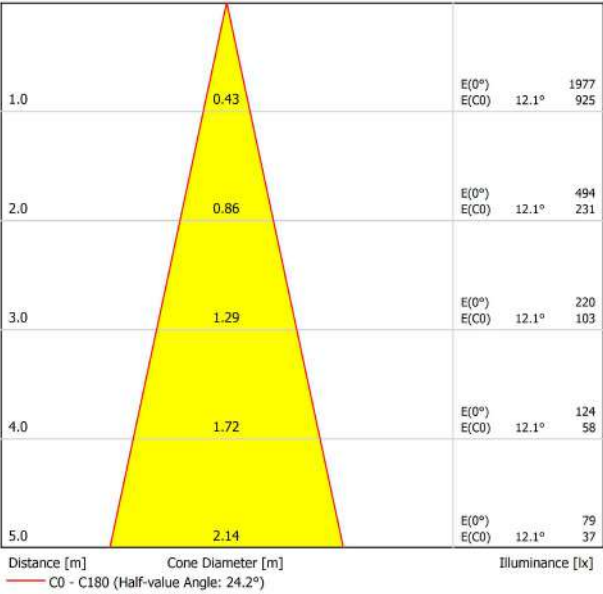



DIMENSIONS

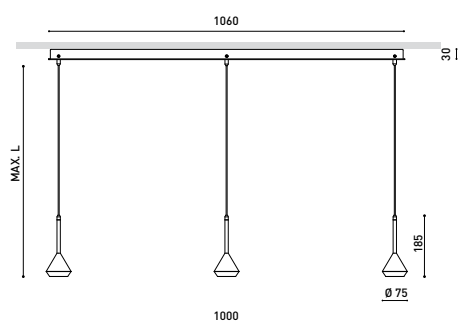

AWARDS



Name	SPIN 3 SURFACE 2M 24° DIM DALI 2700K WT-NT
Reference	A3910200WTNT
Color	Textured white
RAL	9016
Category	SURFACE

PRODUCT

Light source	LED
Gross luminous flux	3 x 600 Lm
Power	3 x 6,5 W
Power values of the system	23,78 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	24°
Lighting efficiency	86%
Efficacy	92 Lm/W
Current intensity	700 mA
Dimming	DALI - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


LIGHTING INFORMATION

OTHER DATA


Ingress Protection	IP20
Cord length	2 m
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate



POLAR DIAGRAM

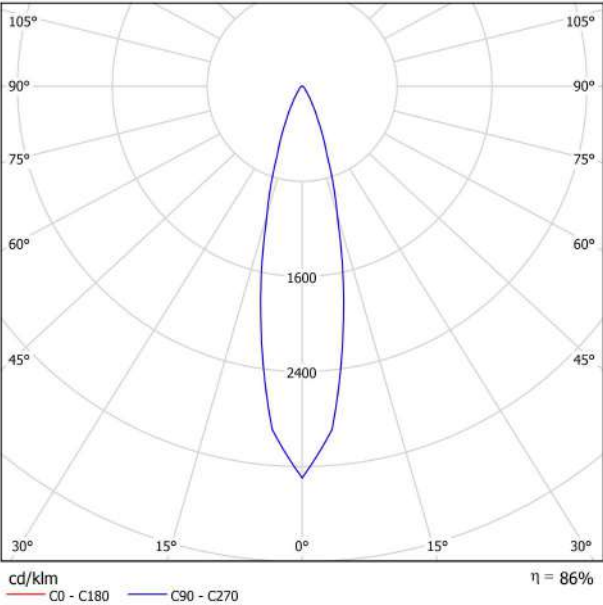


CONICAL DIAGRAM

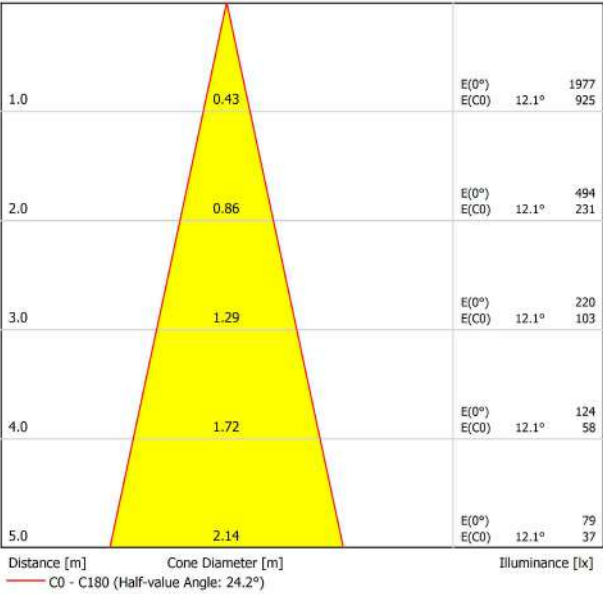



DIMENSIONS

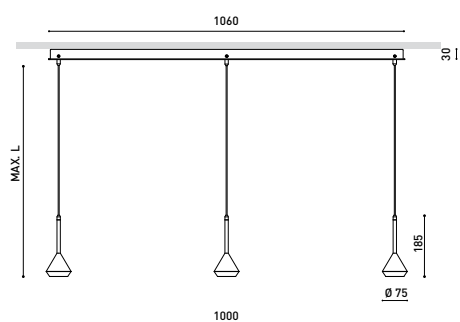

AWARDS



Name	SPIN 3 SURFACE 2M 24° DIM DALI 2700K WT-WT
Reference	A3910200WTWT
Color	Textured white
RAL	9016
Category	SURFACE

PRODUCT

Light source	LED
Gross luminous flux	3 x 600 Lm
Power	3 x 6,5 W
Power values of the system	23,78 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	24°
Lighting efficiency	86%
Efficacy	92 Lm/W
Current intensity	700 mA
Dimming	DALI - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


LIGHTING INFORMATION

OTHER DATA


Ingress Protection	IP20
Cord length	2 m
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate



POLAR DIAGRAM

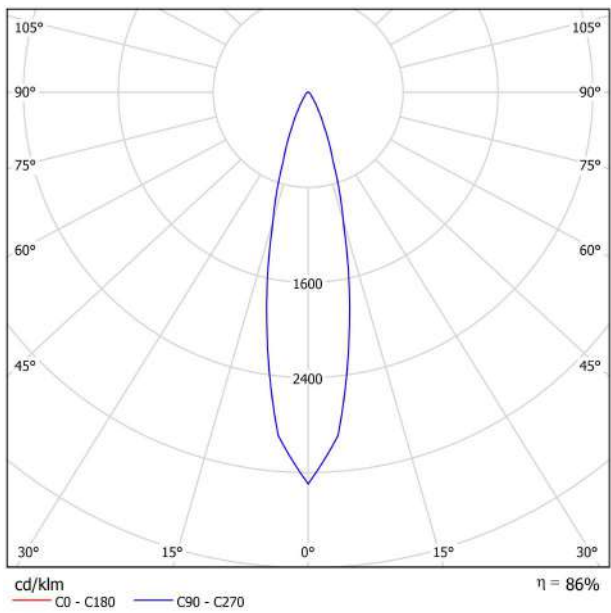


CONICAL DIAGRAM

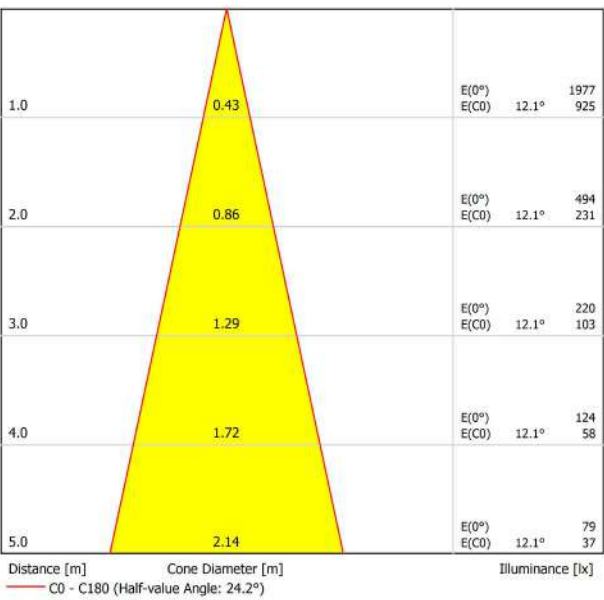



DIMENSIONS

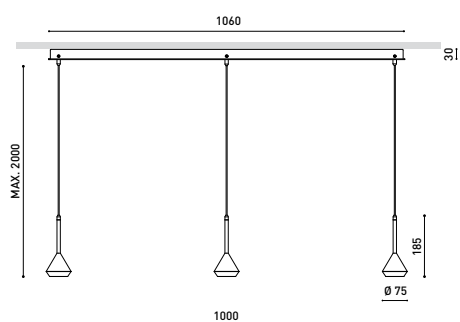

AWARDS



Name	SPIN 3 SURFACE 2M 24° DIM DALI 3000K MC-NT
Reference	A3910201MCNT
Color	Metallized copper
RAL	Electrolytic bath
Category	SUSPENSION

PRODUCT

Light source	LED
Gross luminous flux	3 x 630 Lm
Power	3 x 6,5 W
Power values of the system	23,78 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	24°
Lighting efficiency	86%
Efficacy	92 Lm/W
Current intensity	700 mA
Dimming	DALI - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


OTHER DATA

Ingress Protection	IP20
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Spin Surface is a version that allows it to be installed in places where it is impossible to access the false ceiling. Cement, concrete, vault ... its base, set to apply three luminaires, houses the driver and allows the luminaire to be installed on all types of surfaces.

POLAR DIAGRAM

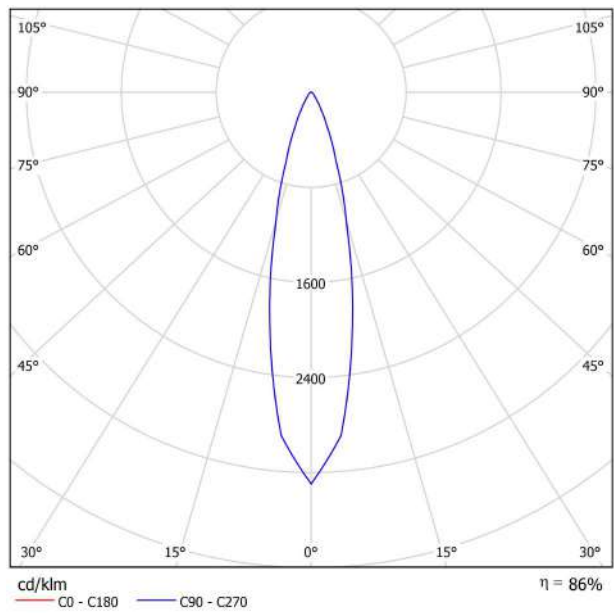


CONICAL DIAGRAM

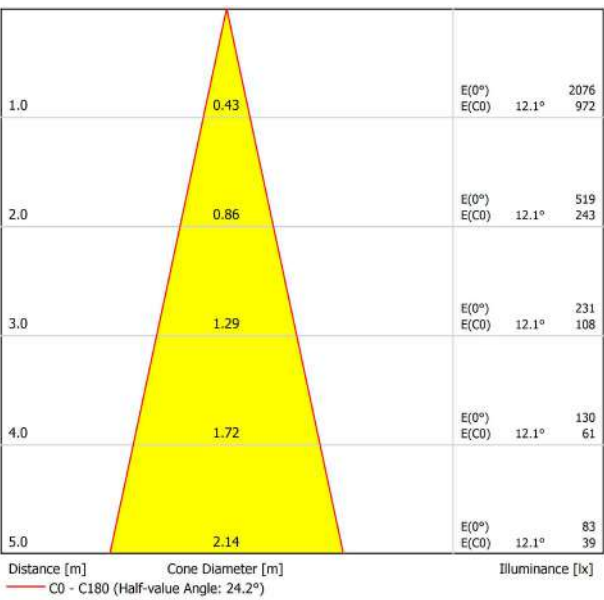



DIMENSIONS

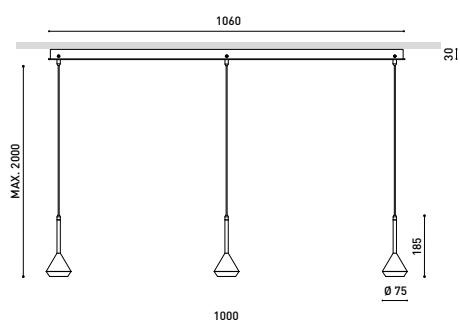

AWARDS



Name	SPIN 3 SURFACE 2M 24° DIM DALI 3000K MC-WT
Reference	A3910201MCWT
Color	Metallized copper
RAL	Electrolytic bath
Category	SUSPENSION

PRODUCT

Light source	LED
Gross luminous flux	3 x 630 Lm
Power	3 x 6,5 W
Power values of the system	23,78 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	24°
Lighting efficiency	86%
Efficacy	92 Lm/W
Current intensity	700 mA
Dimming	DALI - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


OTHER DATA

Ingress Protection	IP20
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Spin Surface is a version that allows it to be installed in places where it is impossible to access the false ceiling. Cement, concrete, vault ... its base, set to apply three luminaires, houses the driver and allows the luminaire to be installed on all types of surfaces.

POLAR DIAGRAM

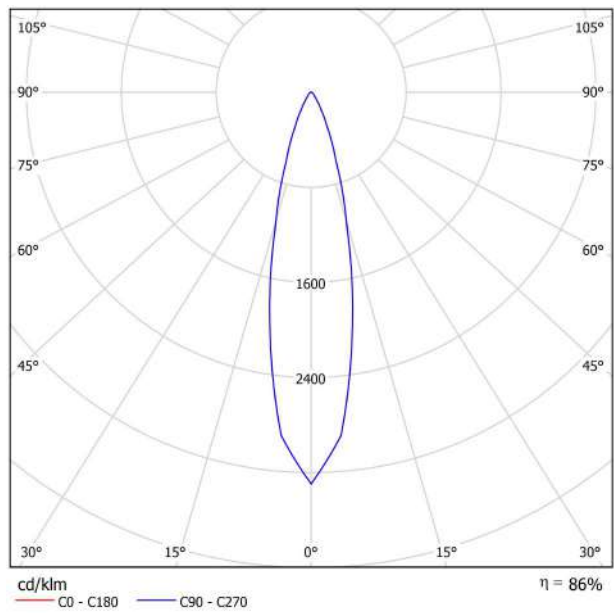


CONICAL DIAGRAM

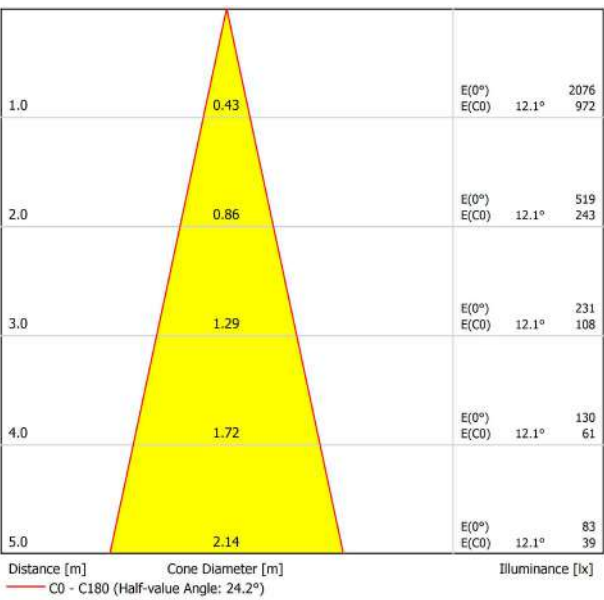



DIMENSIONS

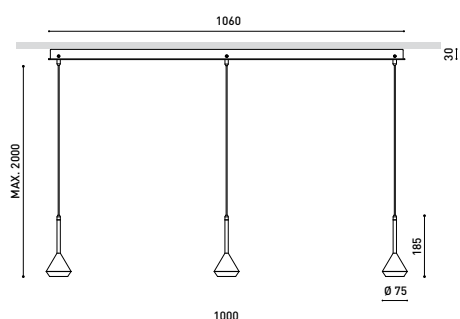

Name	SPIN 3 SURFACE 2M 24° DIM DALI 3000K MG-NT
Reference	A3910201MGNT
Color	Metallized gold
RAL	Electrolytic bath
Category	SUSPENSION

PRODUCT

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	3 x 630 Lm
Power	3 x 6,5 W
Power values of the system	23,78 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	24°
Lighting efficiency	86%
Efficacy	92 Lm/W
Current intensity	700 mA
Dimming	DALI - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	□
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h

OTHER DATA

Ingress Protection	IP20
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




AWARDS




Spin Surface is a version that allows it to be installed in places where it is impossible to access the false ceiling. Cement, concrete, vault ... its base, set to apply three luminaires, houses the driver and allows the luminaire to be installed on all types of surfaces.

POLAR DIAGRAM

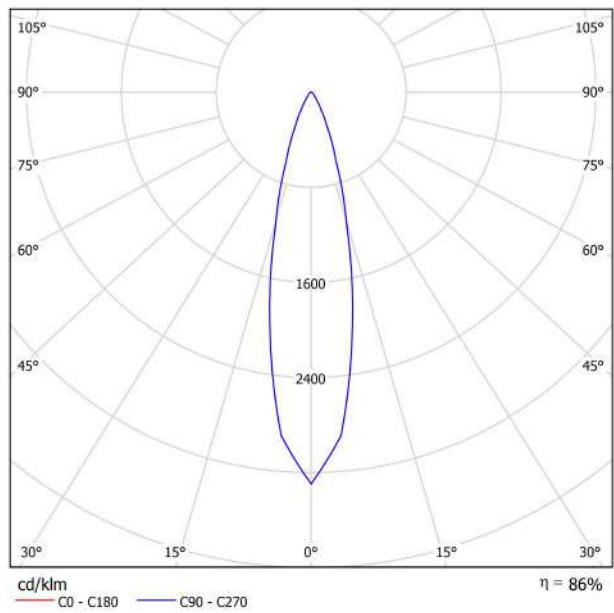


CONICAL DIAGRAM

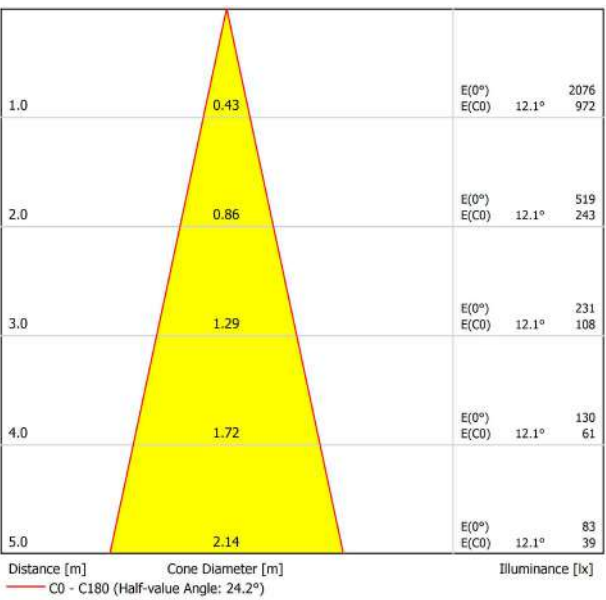



DIMENSIONS

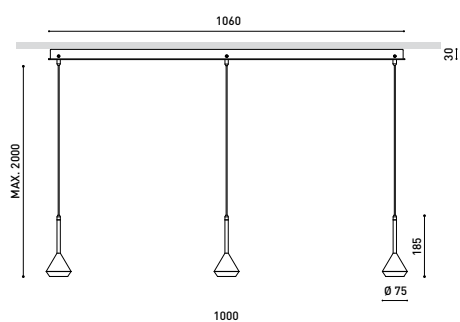

AWARDS



Name	SPIN 3 SURFACE 2M 24° DIM DALI 3000K MG-WT
Reference	A3910201MGWT
Color	Metallized gold
RAL	Electrolytic bath
Category	SUSPENSION

PRODUCT

Light source	LED
Gross luminous flux	3 x 630 Lm
Power	3 x 6,5 W
Power values of the system	23,78 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	24°
Lighting efficiency	86%
Efficacy	92 Lm/W
Current intensity	700 mA
Dimming	DALI - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


OTHER DATA

Ingress Protection	IP20
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Spin Surface is a version that allows it to be installed in places where it is impossible to access the false ceiling. Cement, concrete, vault ... its base, set to apply three luminaires, houses the driver and allows the luminaire to be installed on all types of surfaces.

POLAR DIAGRAM

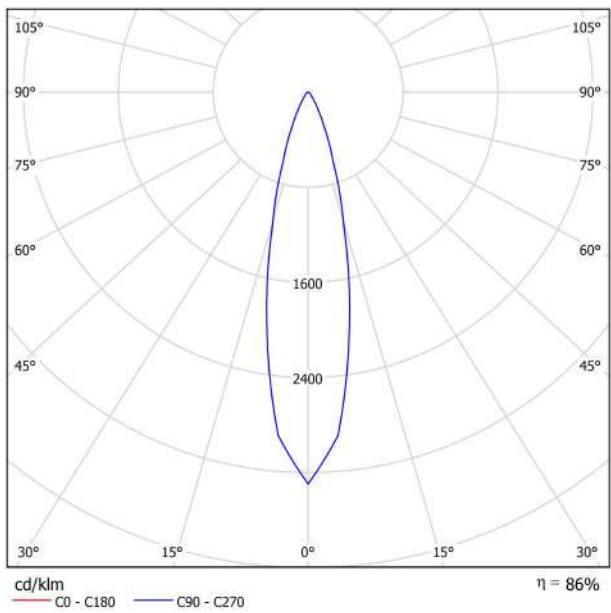


CONICAL DIAGRAM

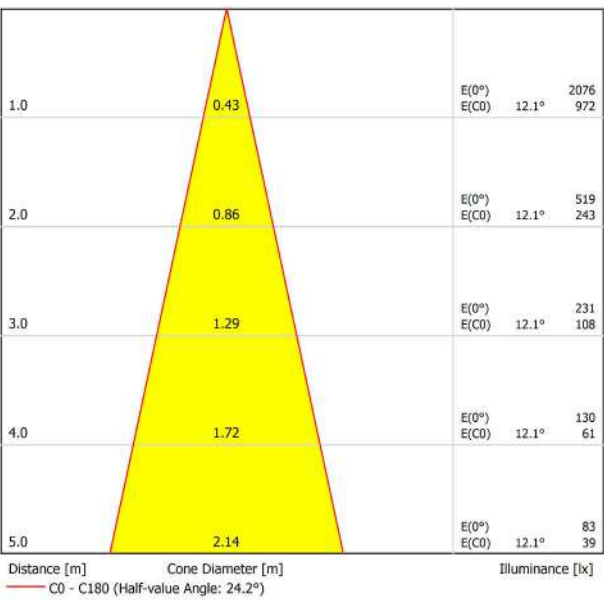



DIMENSIONS

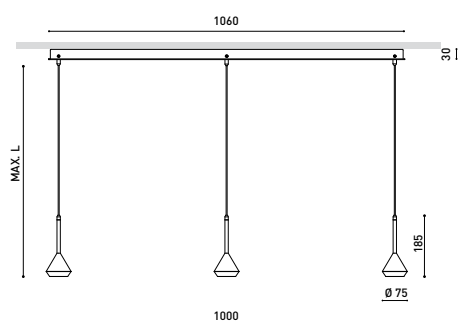

AWARDS



Name	SPIN 3 SURFACE 2M 24° DIM DALI 3000K NT-NT
Reference	A3910201NTNT
Color	Textured black
RAL	9005
Category	SURFACE

PRODUCT

Light source	LED
Gross luminous flux	3 x 630 Lm
Power	3 x 6,5 W
Power values of the system	23,78 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	24°
Lighting efficiency	86%
Efficacy	92 Lm/W
Current intensity	700 mA
Dimming	DALI - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


LIGHTING INFORMATION

OTHER DATA


Ingress Protection	IP20
Cord length	2 m
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate



POLAR DIAGRAM

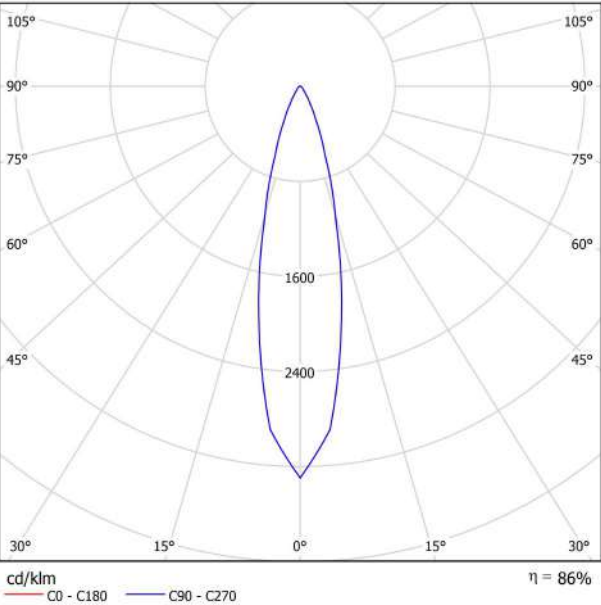


CONICAL DIAGRAM

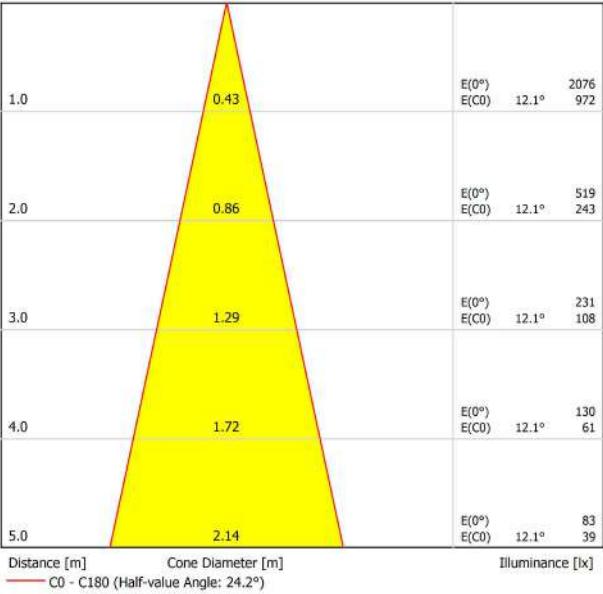



DIMENSIONS

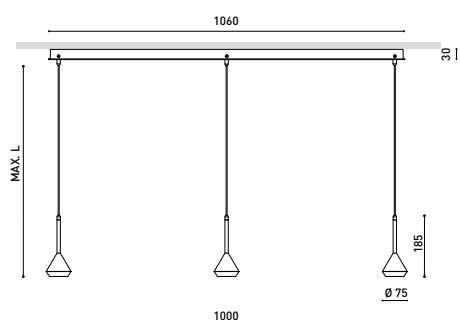

AWARDS



Name	SPIN 3 SURFACE 2M 24° DIM DALI 3000K NT-WT
Reference	A3910201NTWT
Color	Textured black
RAL	9005
Category	SURFACE

PRODUCT

SPIN 3 SURFACE 2M 24° DIM DALI 3000K NT-WT

A3910201NTWT

Textured black

9005

SURFACE

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	3 x 630 Lm
Power	3 x 6,5 W
Power values of the system	23,78 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	24°
Lighting efficiency	86%
Efficacy	92 Lm/W
Current intensity	700 mA
Dimming	DALI - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Cord length	2 m
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Reduced dimensions, clear lines and a mechanized geometry combined in a pendant luminaire for accent lighting. Its ultra-thin cable gives Spin a sensation of aerial floatability.

POLAR DIAGRAM

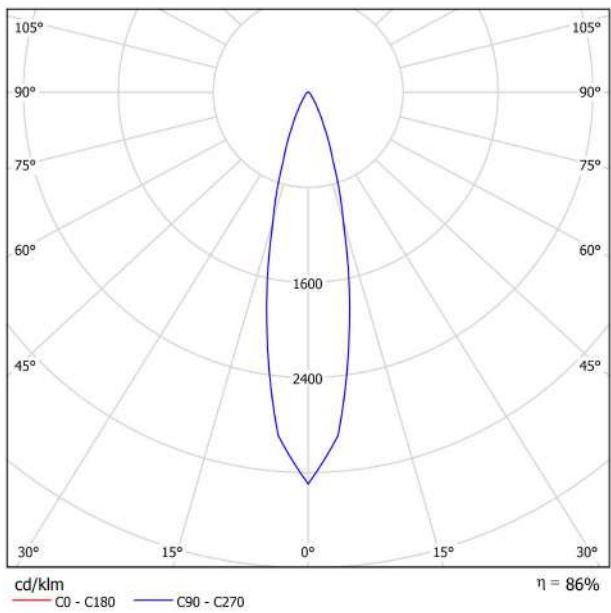


CONICAL DIAGRAM

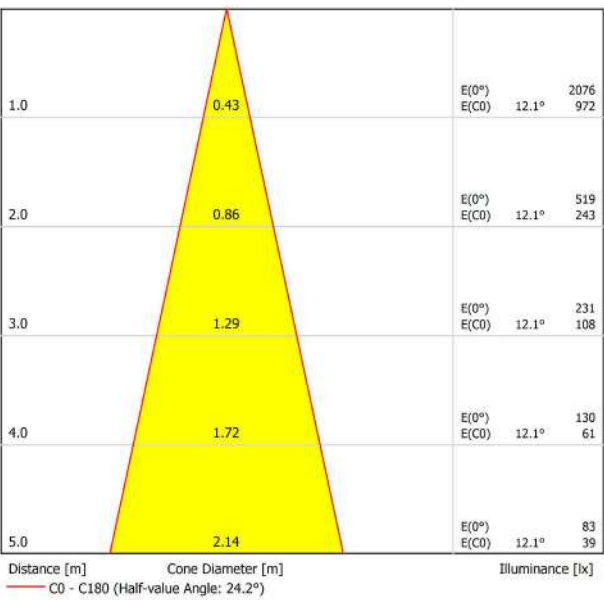



DIMENSIONS

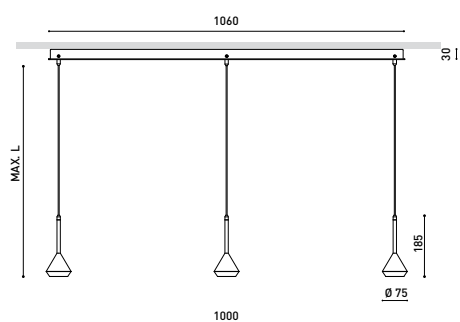

AWARDS



Name	SPIN 3 SURFACE 2M 24° DIM DALI 3000K WT-NT
Reference	A3910201WTNT
Color	Textured white
RAL	9016
Category	SURFACE

PRODUCT

Light source	LED
Gross luminous flux	3 x 630 Lm
Power	3 x 6,5 W
Power values of the system	23,78 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	24°
Lighting efficiency	86%
Efficacy	97 Lm/W
Current intensity	700 mA
Dimming	DALI - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Cord length	2 m
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Reduced dimensions, clear lines and a mechanized geometry combined in a pendant luminaire for accent lighting. Its ultra-thin cable gives Spin a sensation of aerial floatability.

POLAR DIAGRAM

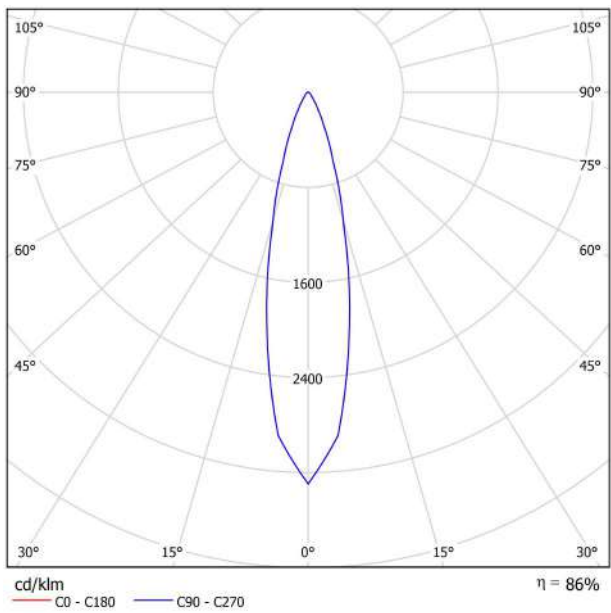


CONICAL DIAGRAM

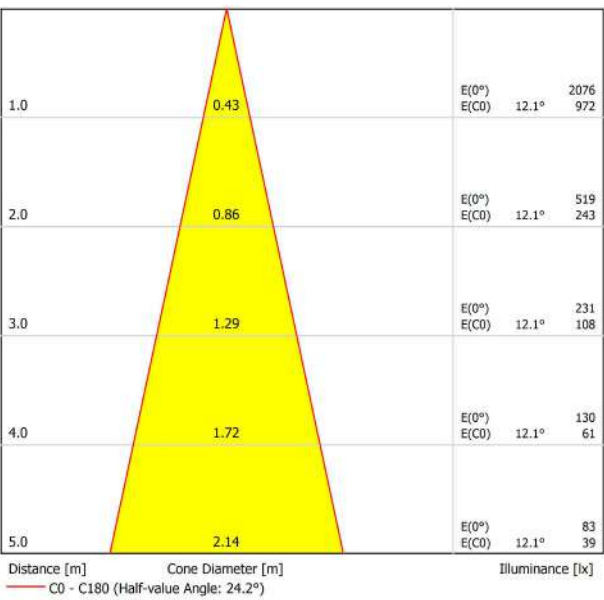



DIMENSIONS

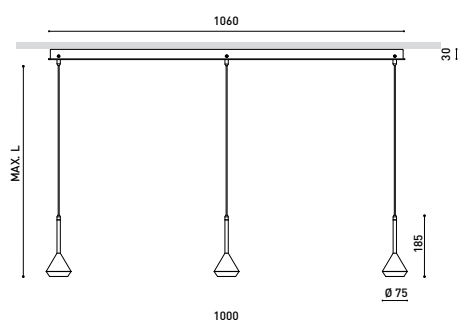

AWARDS



Name	SPIN 3 SURFACE 2M 24° DIM DALI 3000K WT-WT
Reference	A3910201WTWT
Color	Textured white
RAL	9016
Category	SURFACE

PRODUCT

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	3 x 630 Lm
Power	3 x 6,5 W
Power values of the system	23,78 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	24°
Lighting efficiency	86%
Efficacy	97 Lm/W
Current intensity	700 mA
Dimming	DALI - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Cord length	2 m
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Reduced dimensions, clear lines and a mechanized geometry combined in a pendant luminaire for accent lighting. Its ultra-thin cable gives Spin a sensation of aerial floatability.

POLAR DIAGRAM

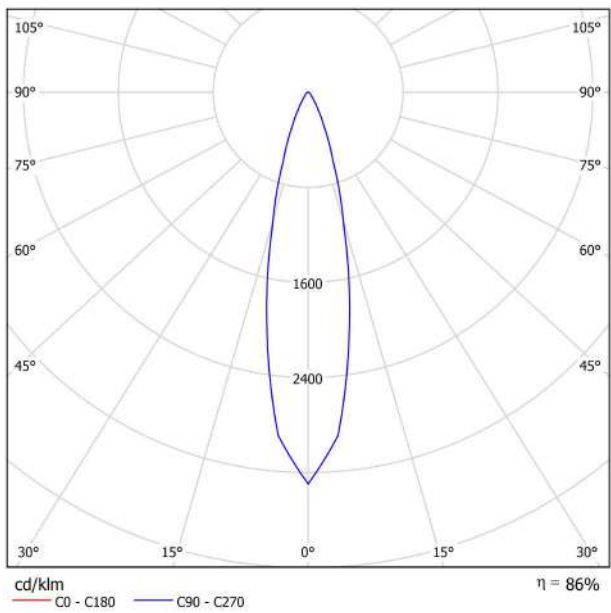


CONICAL DIAGRAM

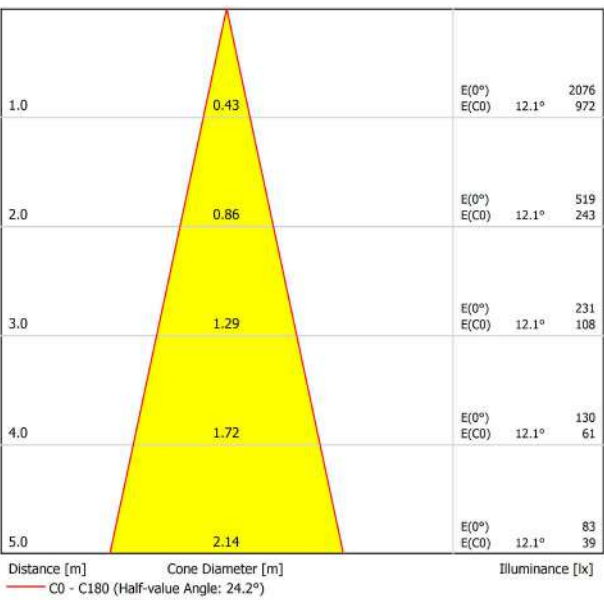



DIMENSIONS

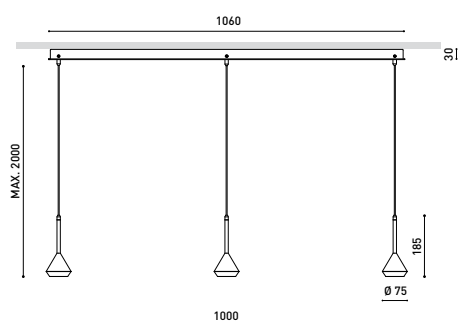

AWARDS



Name	SPIN 3 SURFACE 2M 24° DIM DALI 4000K MC-NT
Reference	A3910202MCNT
Color	Metallized copper
RAL	Electrolytic bath
Category	SUSPENSION

PRODUCT

Light source	LED
Gross luminous flux	3 x 680 Lm
Power	3 x 6,5 W
Power values of the system	23,78 W
Colour temperature	4000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	24°
Lighting efficiency	86%
Efficacy	97 Lm/W
Current intensity	700 mA
Dimming	DALI - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


OTHER DATA

Ingress Protection	IP20
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Spin Surface is a version that allows it to be installed in places where it is impossible to access the false ceiling. Cement, concrete, vault ... its base, set to apply three luminaires, houses the driver and allows the luminaire to be installed on all types of surfaces.

POLAR DIAGRAM

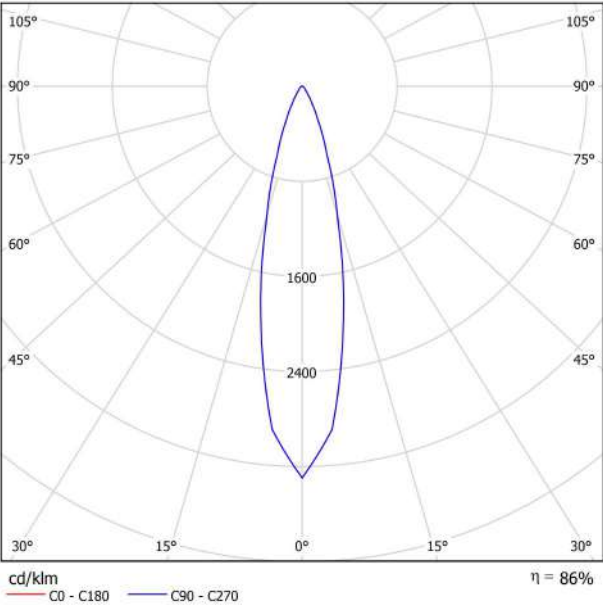


CONICAL DIAGRAM

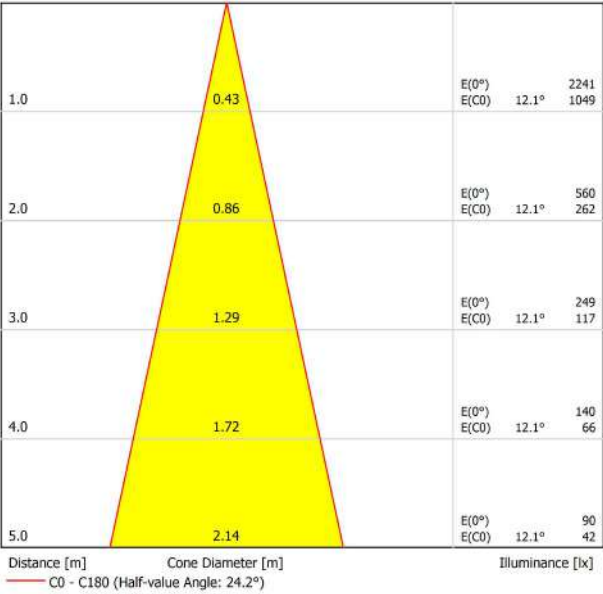



DIMENSIONS

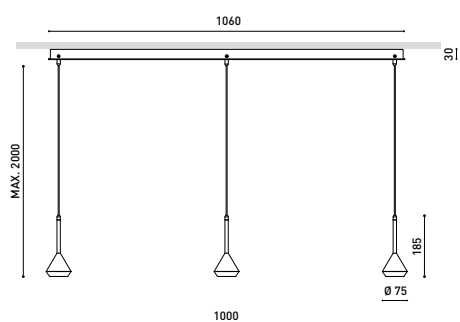

AWARDS



Name	SPIN 3 SURFACE 2M 24° DIM DALI 4000K MC-WT
Reference	A3910202MCWT
Color	Metallized copper
RAL	Electrolytic bath
Category	SUSPENSION

PRODUCT

Light source	LED
Gross luminous flux	3 x 680 Lm
Power	3 x 6,5 W
Power values of the system	23,78 W
Colour temperature	4000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	24°
Lighting efficiency	86%
Efficacy	97 Lm/W
Current intensity	700 mA
Dimming	DALI - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


OTHER DATA

Ingress Protection	IP20
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Spin Surface is a version that allows it to be installed in places where it is impossible to access the false ceiling. Cement, concrete, vault ... its base, set to apply three luminaires, houses the driver and allows the luminaire to be installed on all types of surfaces.

POLAR DIAGRAM

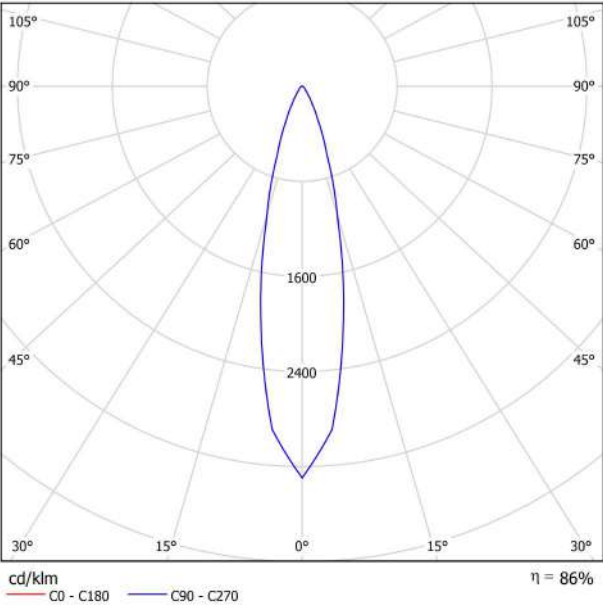


CONICAL DIAGRAM

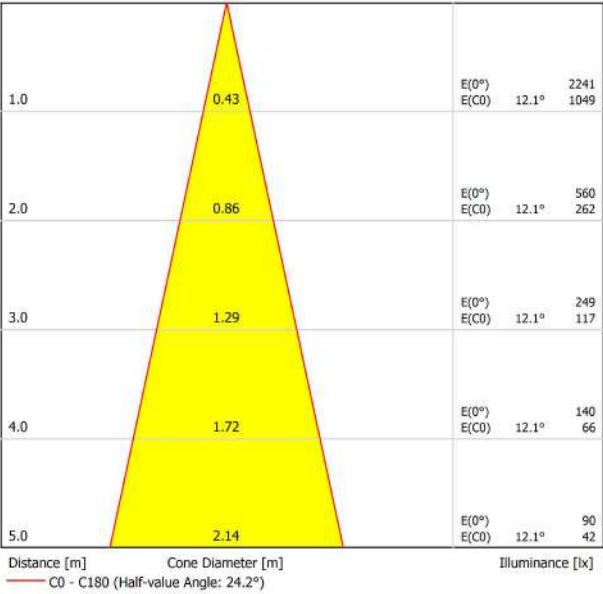



DIMENSIONS

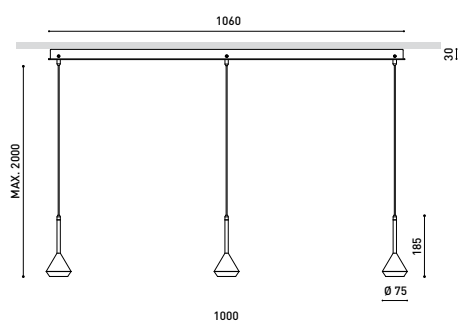

AWARDS



Name	SPIN 3 SURFACE 2M 24° DIM DALI 4000K MG-NT
Reference	A3910202MGNT
Color	Metallized gold
RAL	Electrolytic bath
Category	SUSPENSION

PRODUCT

Light source	LED
Gross luminous flux	3 x 680 Lm
Power	3 x 6,5 W
Power values of the system	23,78 W
Colour temperature	4000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	24°
Lighting efficiency	86%
Efficacy	97 Lm/W
Current intensity	700 mA
Dimming	DALI - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


OTHER DATA

Ingress Protection	IP20
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Spin Surface is a version that allows it to be installed in places where it is impossible to access the false ceiling. Cement, concrete, vault ... its base, set to apply three luminaires, houses the driver and allows the luminaire to be installed on all types of surfaces.

POLAR DIAGRAM

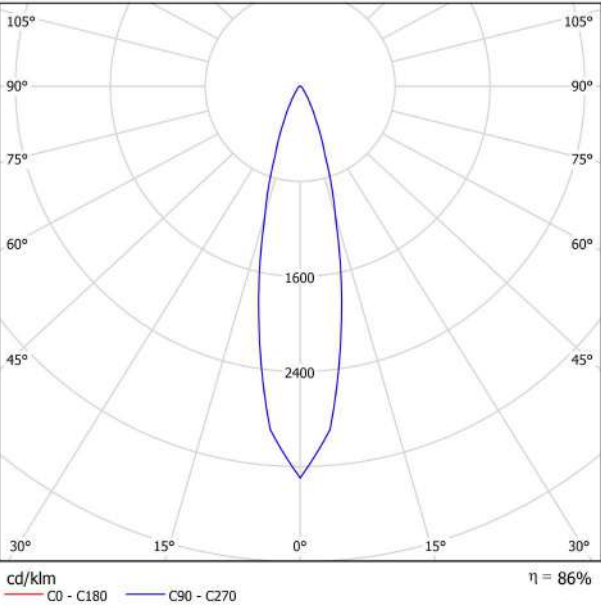


CONICAL DIAGRAM

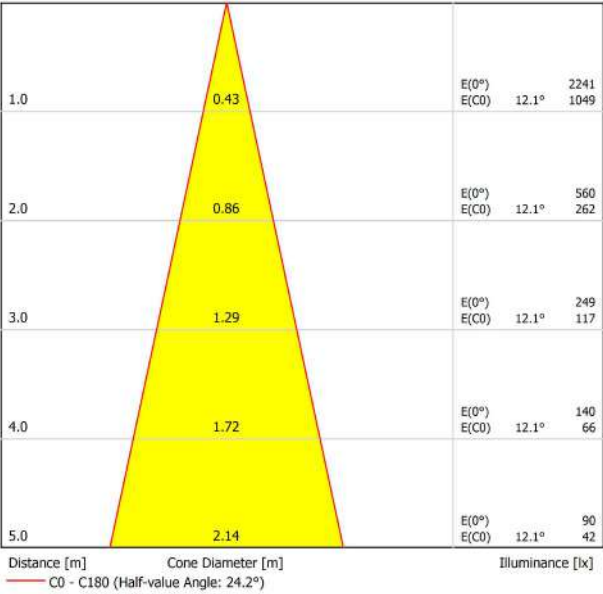



DIMENSIONS

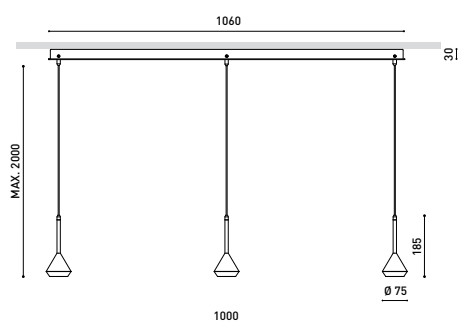

AWARDS



Name	SPIN 3 SURFACE 2M 24° DIM DALI 4000K MG-WT
Reference	A3910202MGWT
Color	Metallized gold
RAL	Electrolytic bath
Category	SUSPENSION

PRODUCT

Light source	LED
Gross luminous flux	3 x 680 Lm
Power	3 x 6,5 W
Power values of the system	23,78 W
Colour temperature	4000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	24°
Lighting efficiency	86%
Efficacy	97 Lm/W
Current intensity	700 mA
Dimming	DALI - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


OTHER DATA

Ingress Protection	IP20
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Spin Surface is a version that allows it to be installed in places where it is impossible to access the false ceiling. Cement, concrete, vault ... its base, set to apply three luminaires, houses the driver and allows the luminaire to be installed on all types of surfaces.

POLAR DIAGRAM

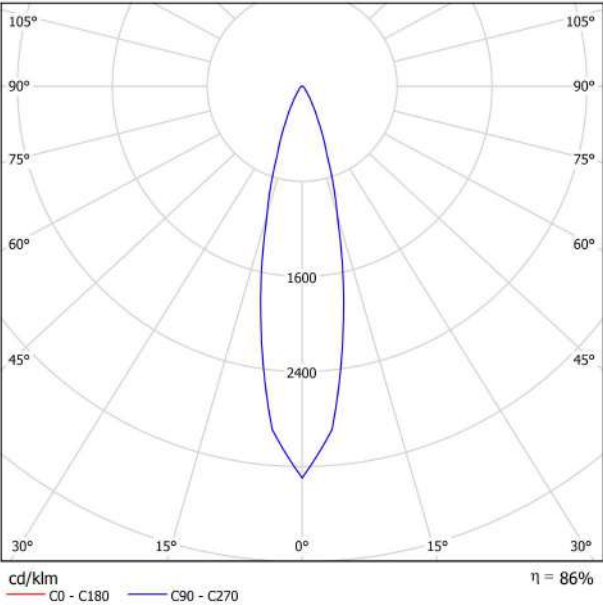


CONICAL DIAGRAM

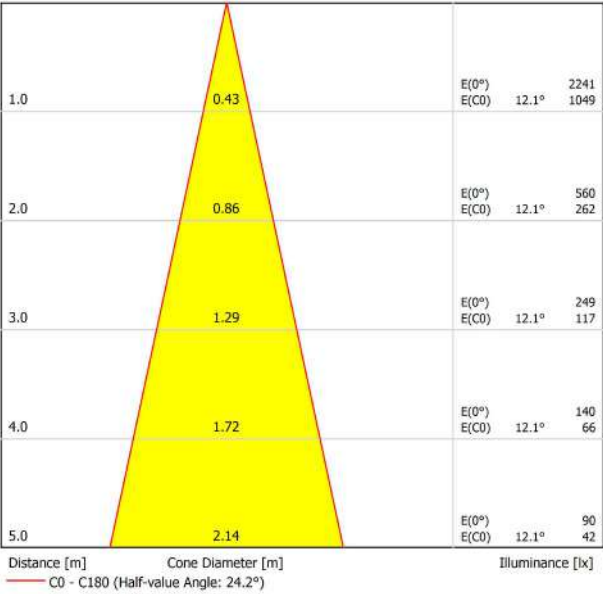



DIMENSIONS

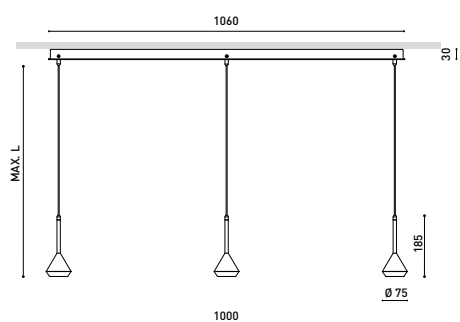

AWARDS



Name	SPIN 3 SURFACE 2M 24° DIM DALI 4000K NT-NT
Reference	A3910202NTNT
Color	Textured black
RAL	9005
Category	SURFACE

PRODUCT

SPIN 3 SURFACE 2M 24° DIM DALI 4000K NT-NT

A3910202NTNT

Textured black

9005

SURFACE

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	3 x 680 Lm
Power	3 x 6,5 W
Power values of the system	23,78 W
Colour temperature	4000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	24°
Lighting efficiency	86%
Efficacy	97 Lm/W
Current intensity	700 mA
Dimming	DALI - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Cord length	2 m
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Reduced dimensions, clear lines and a mechanized geometry combined in a pendant luminaire for accent lighting. Its ultra-thin cable gives Spin a sensation of aerial floatability.

POLAR DIAGRAM

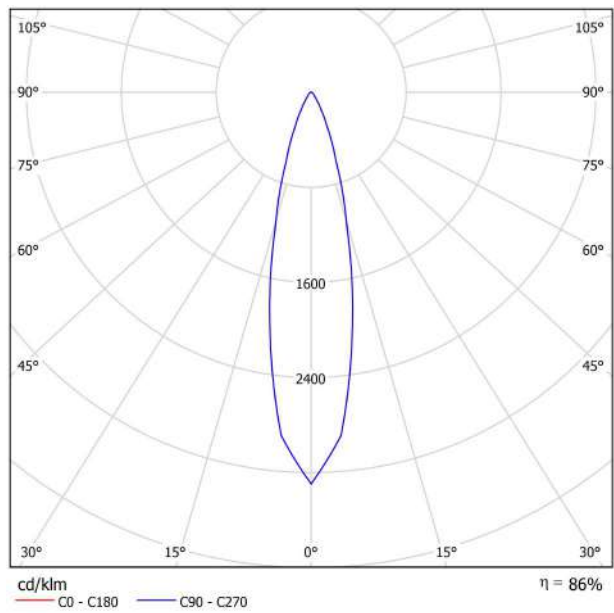


CONICAL DIAGRAM

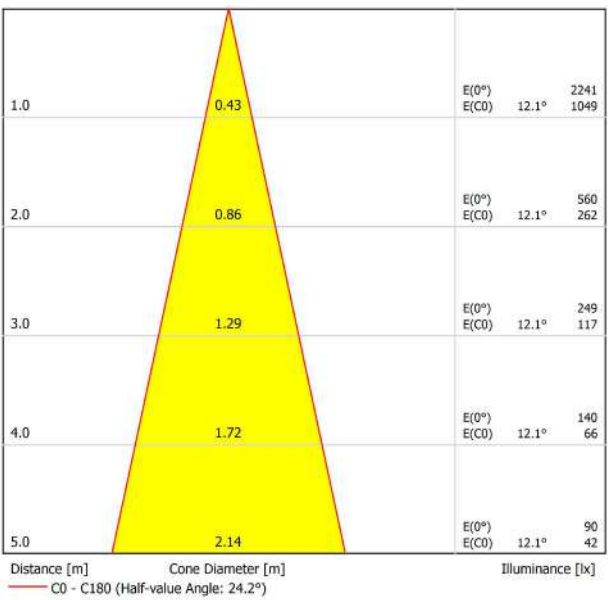



DIMENSIONS

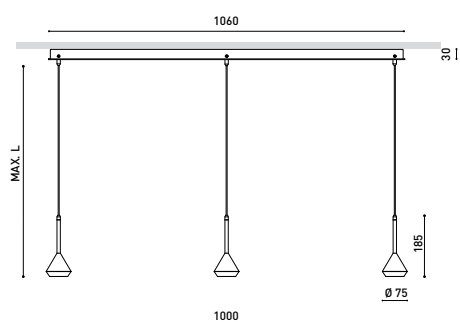

AWARDS



Name	SPIN 3 SURFACE 2M 40° 3000K WT-NT
Reference	A3910111WTNT
Color	Textured white
RAL	9016
Category	SURFACE

PRODUCT

Light source	LED
Gross luminous flux	3 x 630 Lm
Power	3 x 6,5 W
Power values of the system	21,67 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	40°
Lighting efficiency	84%
Efficacy	97 Lm/W
Current intensity	700 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


OTHER DATA

Ingress Protection	IP20
Cord length	2 m
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Reduced dimensions, clear lines and a mechanized geometry combined in a pendant luminaire for accent lighting. Its ultra-thin cable gives Spin a sensation of aerial floatability.

POLAR DIAGRAM

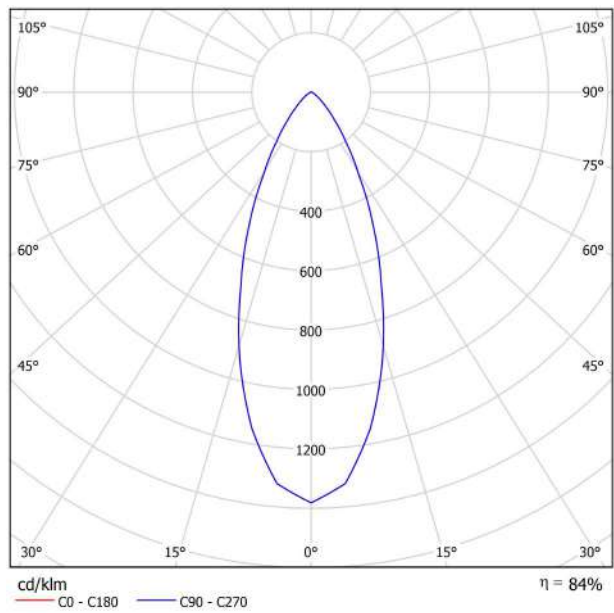


CONICAL DIAGRAM

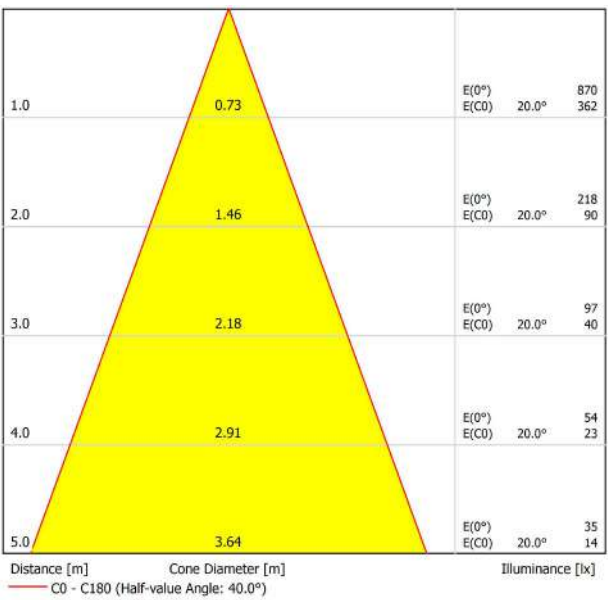



DIMENSIONS

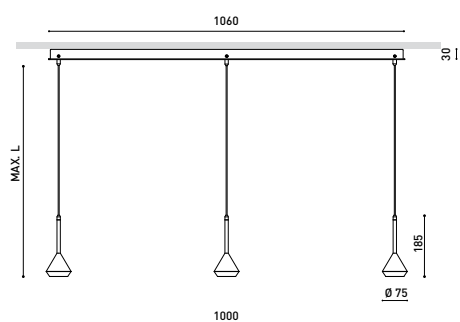

AWARDS



Name	SPIN 3 SURFACE 2M 40° 3000K WT-WT
Reference	A3910111WTWT
Color	Textured white
RAL	9016
Category	SURFACE

PRODUCT

Light source	LED
Gross luminous flux	3 x 630 Lm
Power	3 x 6,5 W
Power values of the system	21,67 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	40°
Lighting efficiency	84%
Efficacy	97 Lm/W
Current intensity	700 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Cord length	2 m
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Reduced dimensions, clear lines and a mechanized geometry combined in a pendant luminaire for accent lighting. Its ultra-thin cable gives Spin a sensation of aerial floatability.

POLAR DIAGRAM

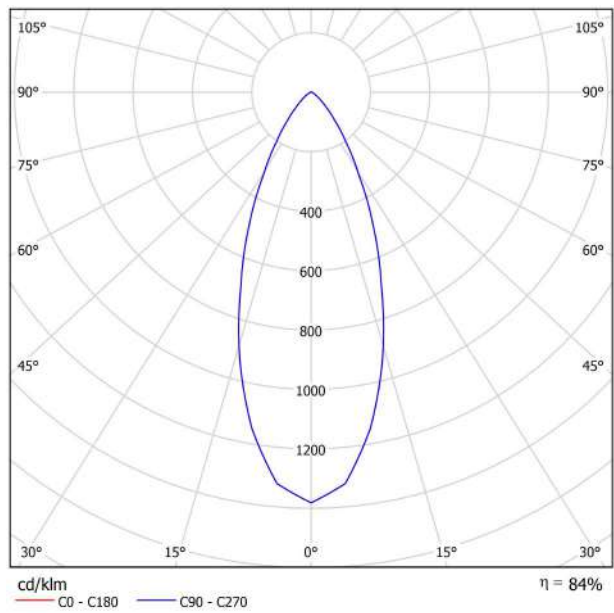


CONICAL DIAGRAM

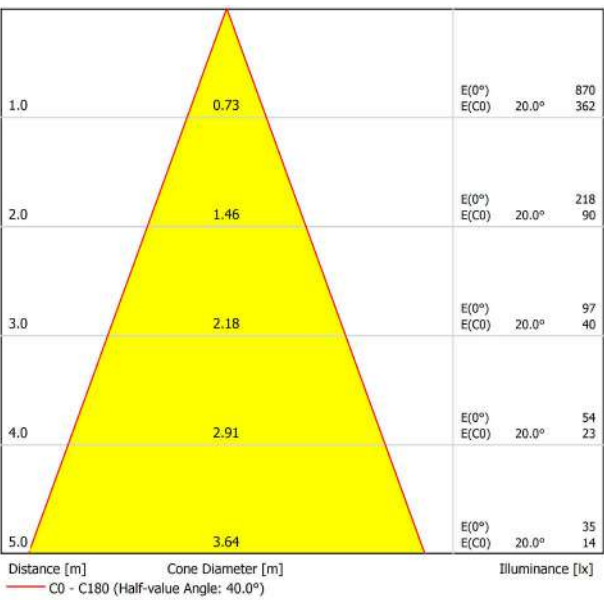



DIMENSIONS

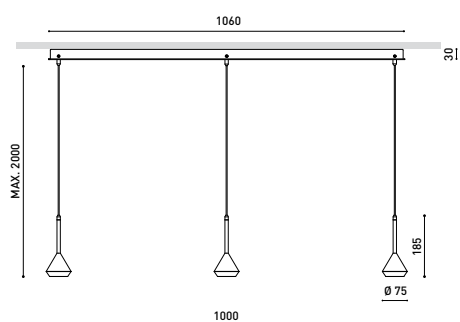

PRODUCT

Name	SPIN 3 SURFACE 2M 40° 4000K MC-NT
Reference	A3910112MCNT
Color	Metallized copper
RAL	Electrolytic bath
Category	SUSPENSION

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	3 x 680 Lm
Power	3 x 6,5 W
Power values of the system	21,67 W
Colour temperature	4000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	40°
Lighting efficiency	84%
Efficacy	97 Lm/W
Current intensity	700 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h

OTHER DATA

Ingress Protection	IP20
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




AWARDS




Spin Surface is a version that allows it to be installed in places where it is impossible to access the false ceiling. Cement, concrete, vault ... its base, set to apply three luminaires, houses the driver and allows the luminaire to be installed on all types of surfaces.

POLAR DIAGRAM

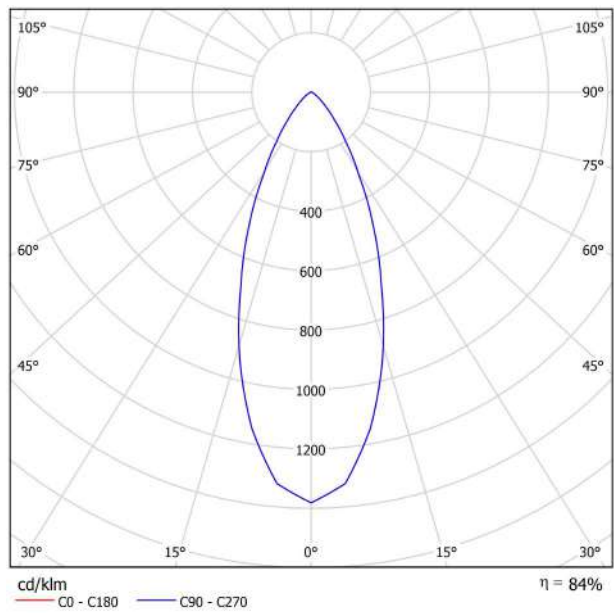


CONICAL DIAGRAM

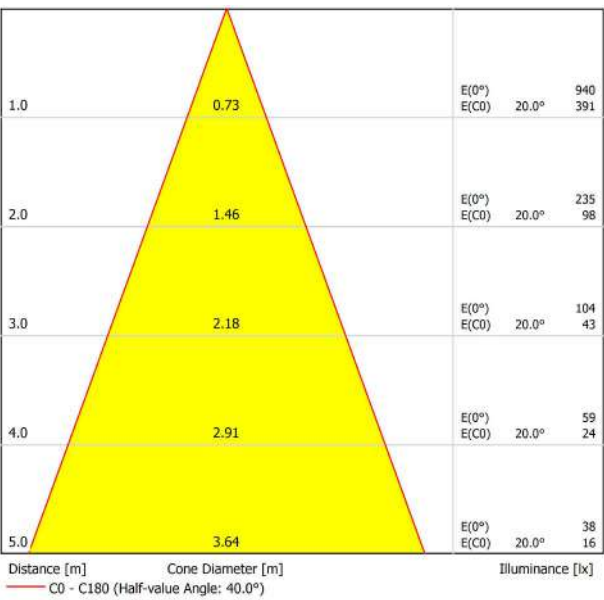



DIMENSIONS

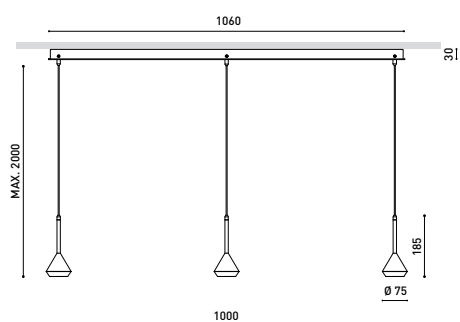

AWARDS



Name	SPIN 3 SURFACE 2M 40° 4000K MC-WT
Reference	A3910112MCWT
Color	Metallized copper
RAL	Electrolytic bath
Category	SUSPENSION

PRODUCT

Light source	LED
Gross luminous flux	3 x 680 Lm
Power	3 x 6,5 W
Power values of the system	21,67 W
Colour temperature	4000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	40°
Lighting efficiency	84%
Efficacy	97 Lm/W
Current intensity	700 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


LIGHTING INFORMATION

OTHER DATA


Ingress Protection	IP20
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate



POLAR DIAGRAM

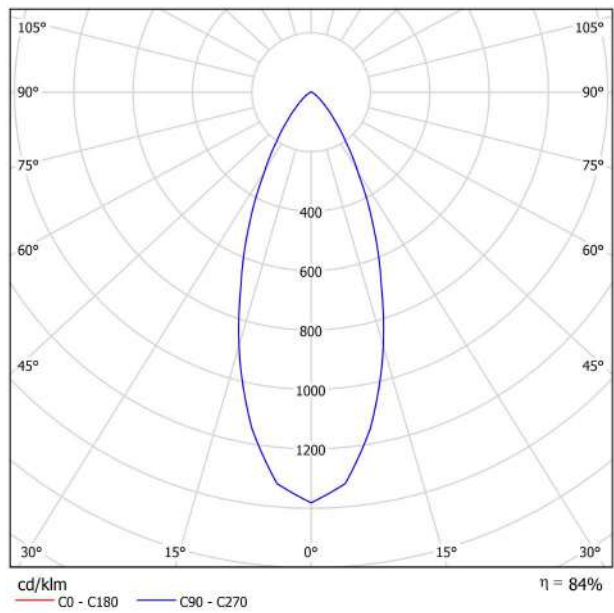


CONICAL DIAGRAM

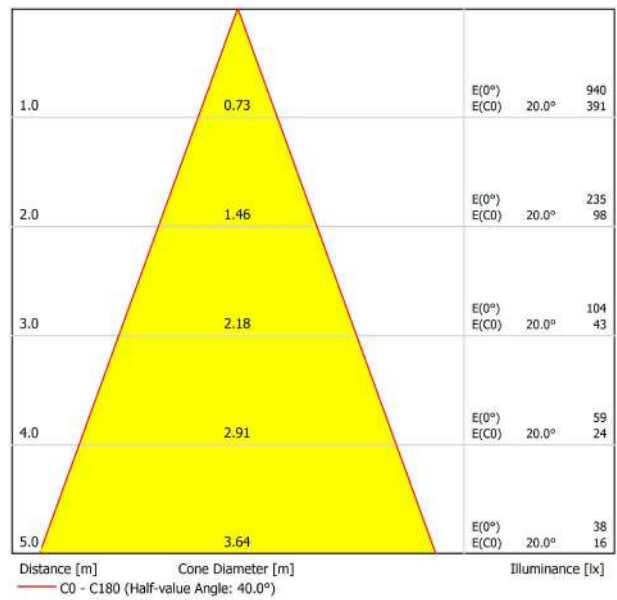



DIMENSIONS

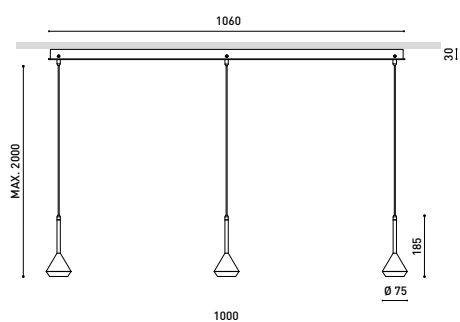

AWARDS



Name	SPIN 3 SURFACE 2M 40° 4000K MG-NT
Reference	A3910112MGNT
Color	Metallized gold
RAL	Electrolytic bath
Category	SUSPENSION

PRODUCT

Light source	LED
Gross luminous flux	3 x 680 Lm
Power	3 x 6,5 W
Power values of the system	21,67 W
Colour temperature	4000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	40°
Lighting efficiency	84%
Efficacy	97 Lm/W
Current intensity	700 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Spin Surface is a version that allows it to be installed in places where it is impossible to access the false ceiling. Cement, concrete, vault ... its base, set to apply three luminaires, houses the driver and allows the luminaire to be installed on all types of surfaces.

POLAR DIAGRAM

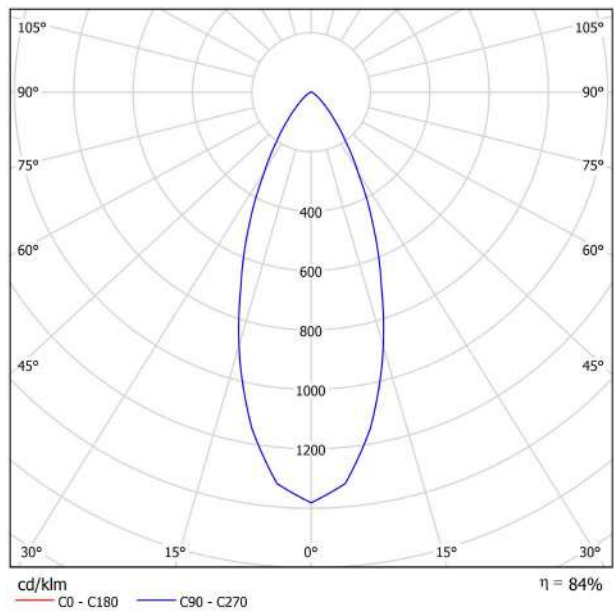


CONICAL DIAGRAM

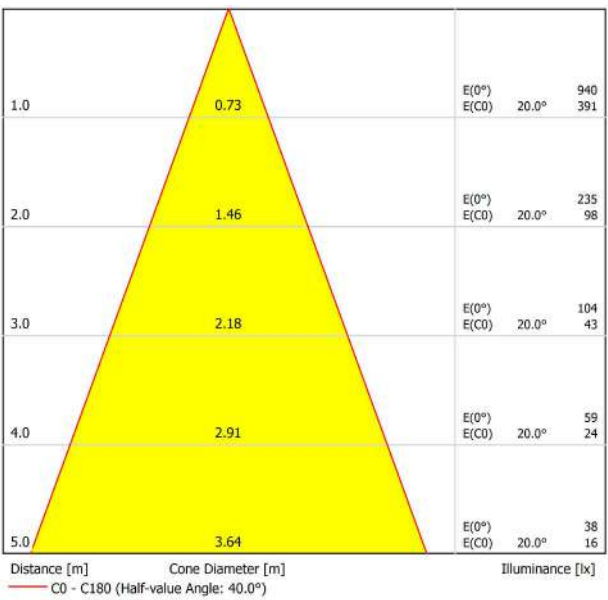



DIMENSIONS

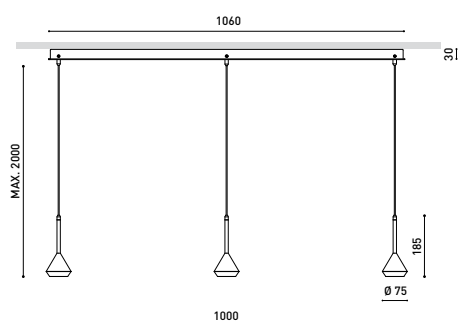

AWARDS



Name	SPIN 3 SURFACE 2M 40° 4000K MG-WT
Reference	A3910112MGWT
Color	Metallized gold
RAL	Electrolytic bath
Category	SUSPENSION

PRODUCT

Light source	LED
Gross luminous flux	3 x 680 Lm
Power	3 x 6,5 W
Power values of the system	21,67 W
Colour temperature	4000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	40°
Lighting efficiency	84%
Efficacy	97 Lm/W
Current intensity	700 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Spin Surface is a version that allows it to be installed in places where it is impossible to access the false ceiling. Cement, concrete, vault ... its base, set to apply three luminaires, houses the driver and allows the luminaire to be installed on all types of surfaces.

POLAR DIAGRAM

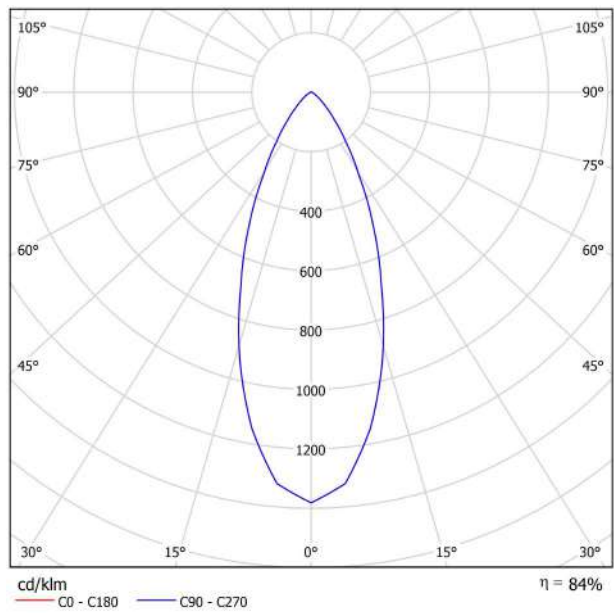


CONICAL DIAGRAM

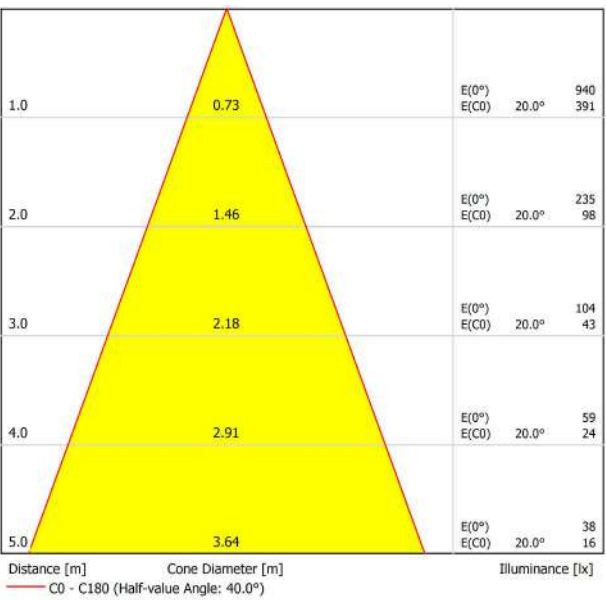



DIMENSIONS

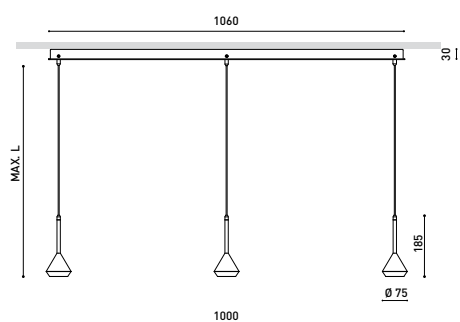

AWARDS



Name	SPIN 3 SURFACE 2M 40° 4000K NT-NT
Reference	A3910112NTNT
Color	Textured black
RAL	9005
Category	SURFACE

PRODUCT

Light source	LED
Gross luminous flux	3 x 680 Lm
Power	3 x 6,5 W
Power values of the system	21,67 W
Colour temperature	4000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	40°
Lighting efficiency	84%
Efficacy	97 Lm/W
Current intensity	700 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Cord length	2 m
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Reduced dimensions, clear lines and a mechanized geometry combined in a pendant luminaire for accent lighting. Its ultra-thin cable gives Spin a sensation of aerial floatability.

POLAR DIAGRAM

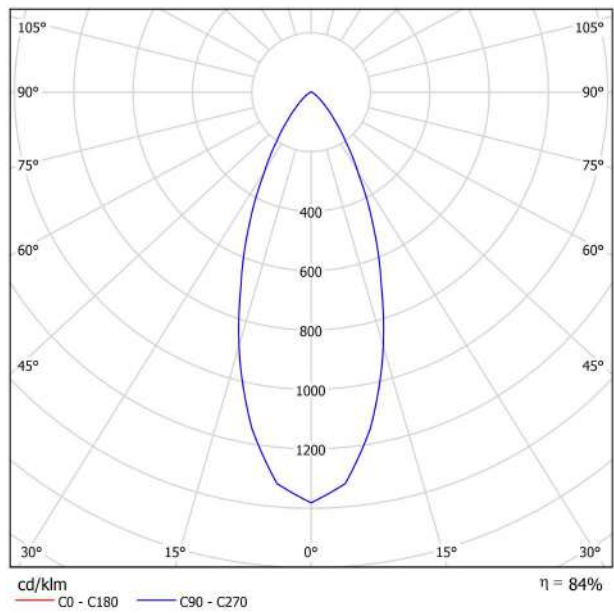


CONICAL DIAGRAM

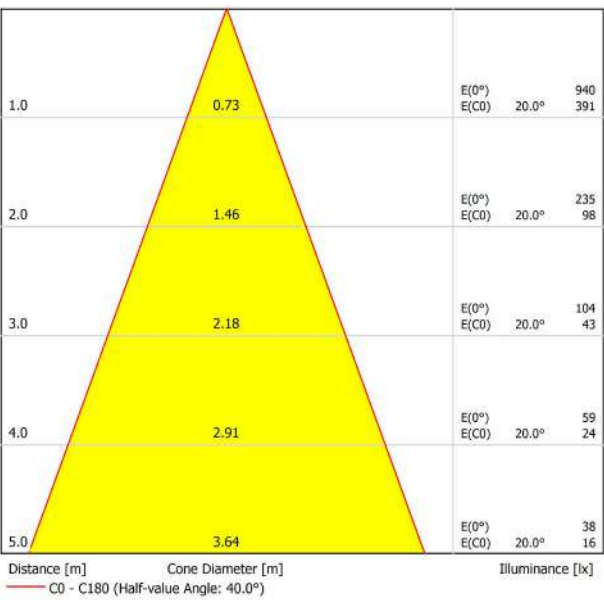



DIMENSIONS

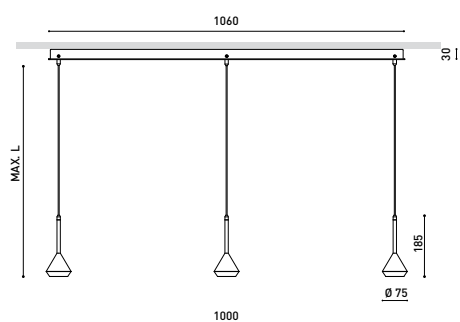

AWARDS



Name	SPIN 3 SURFACE 2M 40° 4000K NT-WT
Reference	A3910112NTWT
Color	Textured black
RAL	9005
Category	SURFACE

PRODUCT

Light source	LED
Gross luminous flux	3 x 680 Lm
Power	3 x 6,5 W
Power values of the system	21,67 W
Colour temperature	4000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	40°
Lighting efficiency	84%
Efficacy	97 Lm/W
Current intensity	700 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Cord length	2 m
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Reduced dimensions, clear lines and a mechanized geometry combined in a pendant luminaire for accent lighting. Its ultra-thin cable gives Spin a sensation of aerial floatability.

POLAR DIAGRAM

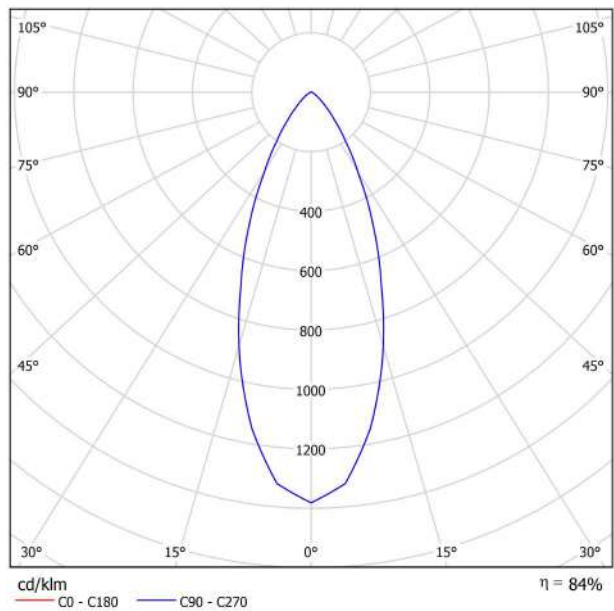


CONICAL DIAGRAM

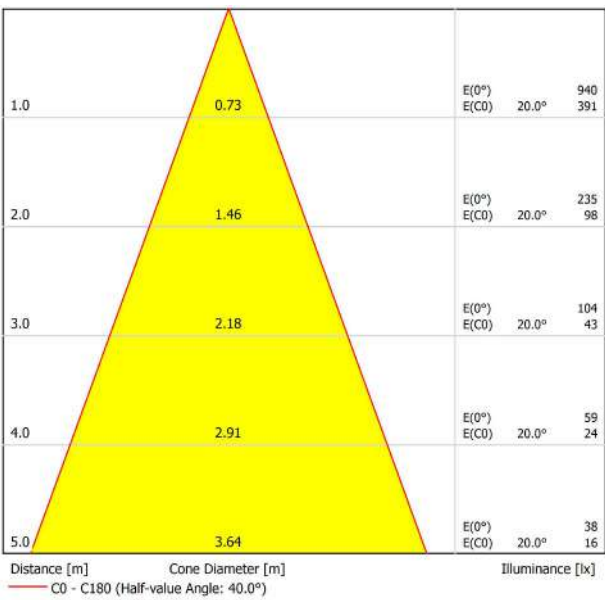



DIMENSIONS

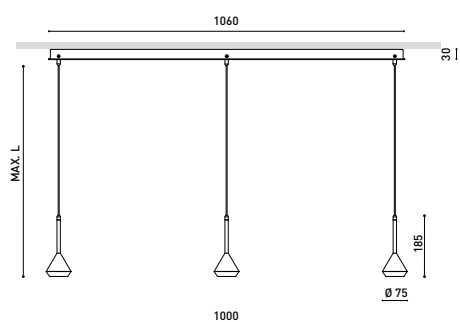

AWARDS



Name	SPIN 3 SURFACE 2M 40° 4000K WT-NT
Reference	A3910112WTNT
Color	Textured white
RAL	9016
Category	SURFACE

PRODUCT

Light source	LED
Gross luminous flux	3 x 680 Lm
Power	3 x 6,5 W
Power values of the system	21,67 W
Colour temperature	4000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	40°
Lighting efficiency	84%
Efficacy	105 Lm/W
Current intensity	700 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Cord length	2 m
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Reduced dimensions, clear lines and a mechanized geometry combined in a pendant luminaire for accent lighting. Its ultra-thin cable gives Spin a sensation of aerial floatability.

POLAR DIAGRAM

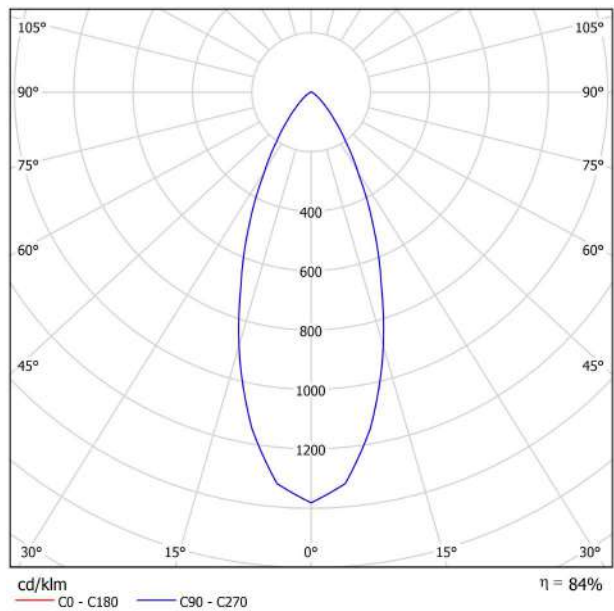


CONICAL DIAGRAM

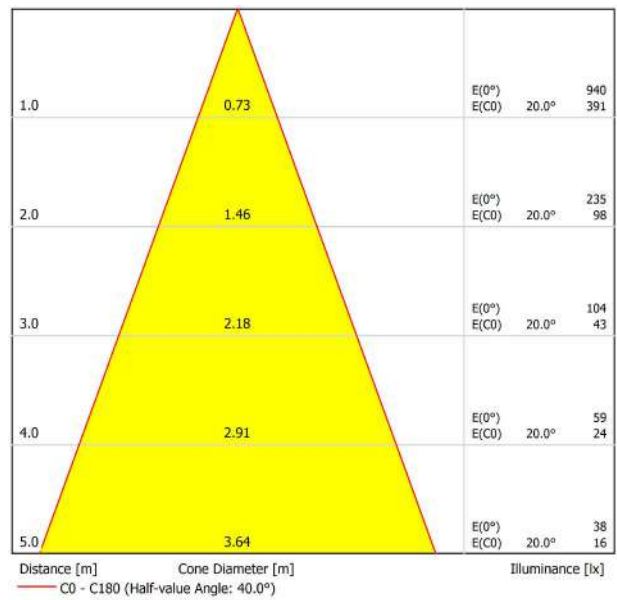



DIMENSIONS

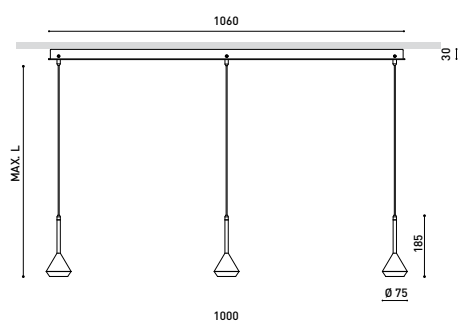

AWARDS



Name	SPIN 3 SURFACE 2M 40° 4000K WT-WT
Reference	A3910112WTWT
Color	Textured white
RAL	9016
Category	SURFACE

PRODUCT

Light source	LED
Gross luminous flux	3 x 680 Lm
Power	3 x 6,5 W
Power values of the system	21,67 W
Colour temperature	4000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	40°
Lighting efficiency	84%
Efficacy	105 Lm/W
Current intensity	700 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Cord length	2 m
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Reduced dimensions, clear lines and a mechanized geometry combined in a pendant luminaire for accent lighting. Its ultra-thin cable gives Spin a sensation of aerial floatability.

POLAR DIAGRAM

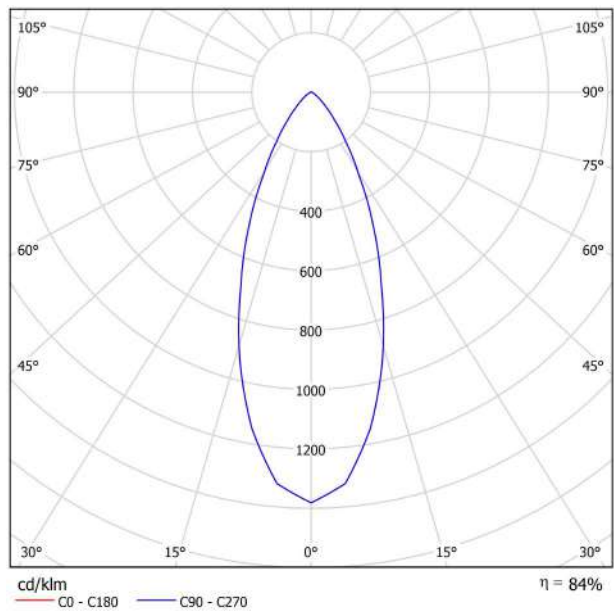


CONICAL DIAGRAM

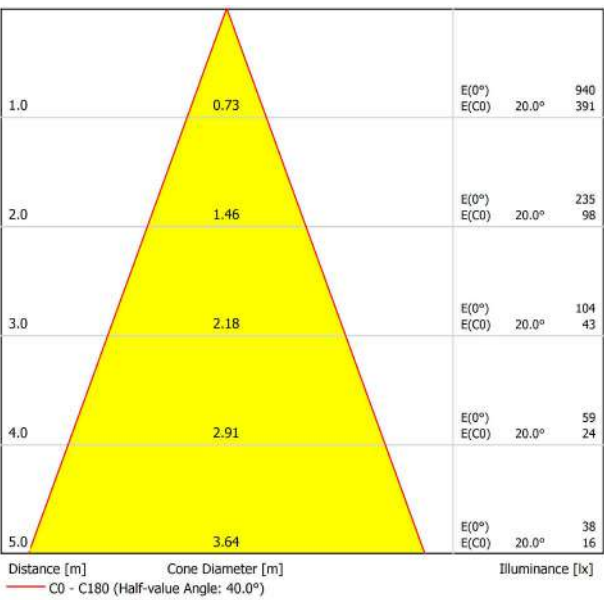



DIMENSIONS

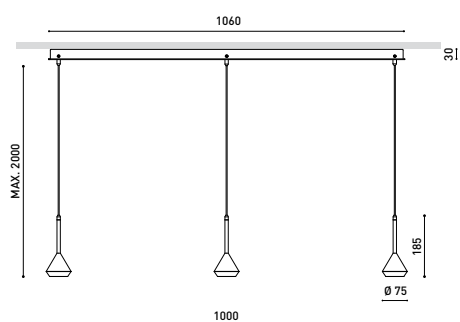

AWARDS



Name	SPIN 3 SURFACE 2M 24° DIM DALI 2700K MC-NT
Reference	A3910200MCNT
Color	Metallized copper
RAL	Electrolytic bath
Category	SUSPENSION

PRODUCT

LIGHTING INFORMATION

LED

3 x 600 Lm

3 x 6,5 W

23,78 W

2700 K

CRI>90

MacAdam Step 2

24°

86%

105 Lm/W

700 mA

DALI - Other DIM, please consult

Please Consult

Included

☐

220 V/240 V

50/60 Hz

A+

L80B10 (Tc=85°C) >60.000h

OTHER DATA

IP20

No

4150 g.

4577 g.

1078 x 139 x 89 mm


1

Aluminium / Polymethyl Methacrylate




Spin Surface is a version that allows it to be installed in places where it is impossible to access the false ceiling. Cement, concrete, vault ... its base, set to apply three luminaires, houses the driver and allows the luminaire to be installed on all types of surfaces.

POLAR DIAGRAM

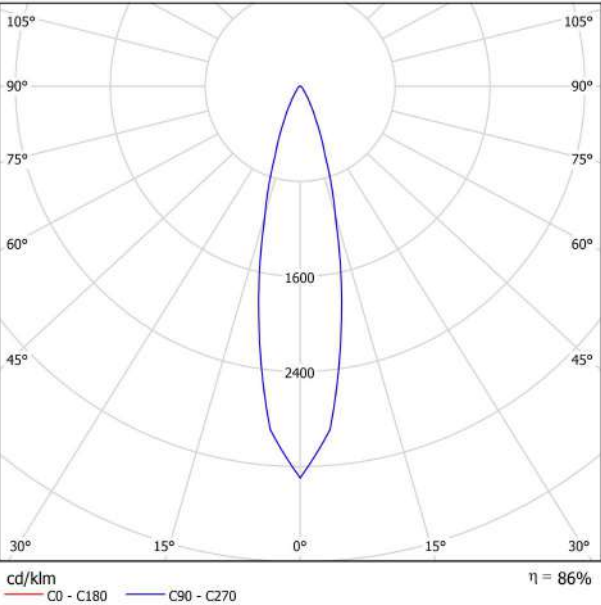


CONICAL DIAGRAM

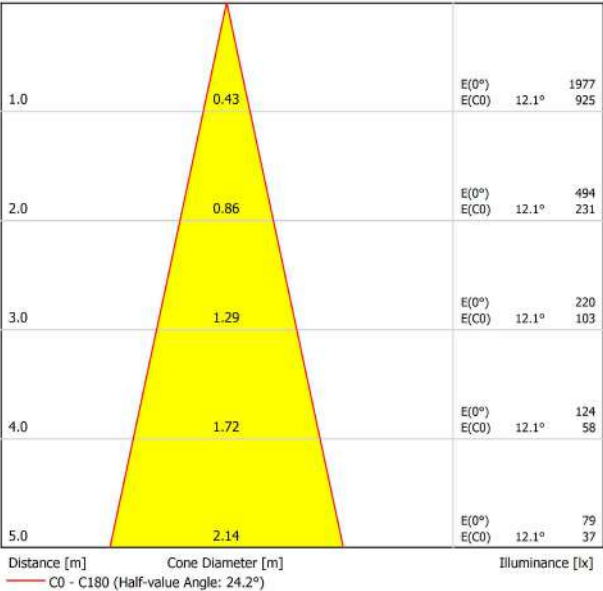



DIMENSIONS

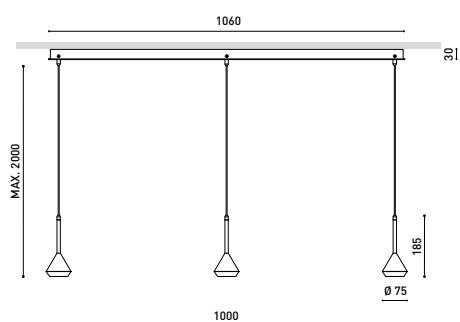

AWARDS



Name	SPIN 3 SURFACE 2M 24° DIM DALI 2700K MC-WT
Reference	A3910200MCWT
Color	Metallized copper
RAL	Electrolytic bath
Category	SUSPENSION

PRODUCT

Light source	LED
Gross luminous flux	3 x 600 Lm
Power	3 x 6,5 W
Power values of the system	23,78 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	24°
Lighting efficiency	86%
Efficacy	105 Lm/W
Current intensity	700 mA
Dimming	DALI - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


OTHER DATA

Ingress Protection	IP20
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Spin Surface is a version that allows it to be installed in places where it is impossible to access the false ceiling. Cement, concrete, vault ... its base, set to apply three luminaires, houses the driver and allows the luminaire to be installed on all types of surfaces.

POLAR DIAGRAM

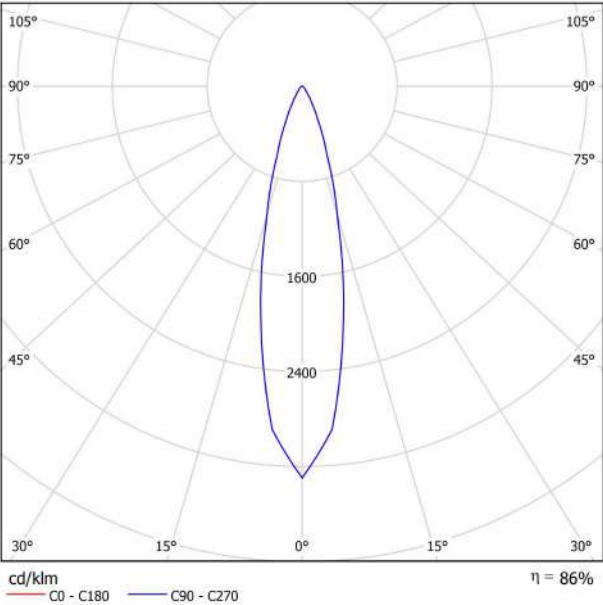


CONICAL DIAGRAM

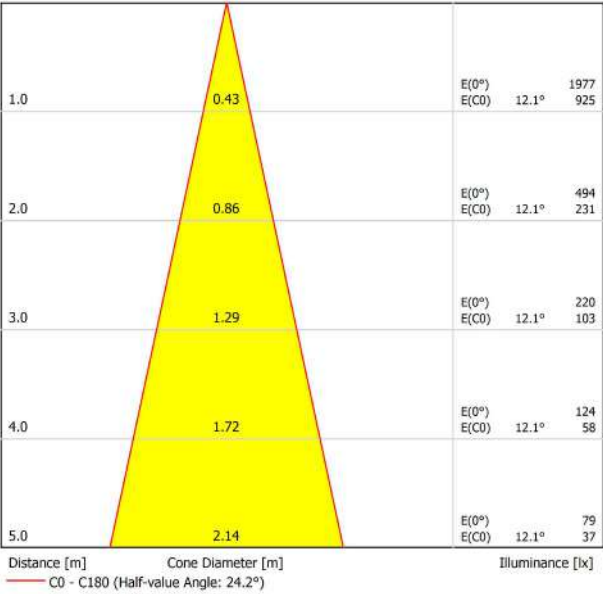



DIMENSIONS

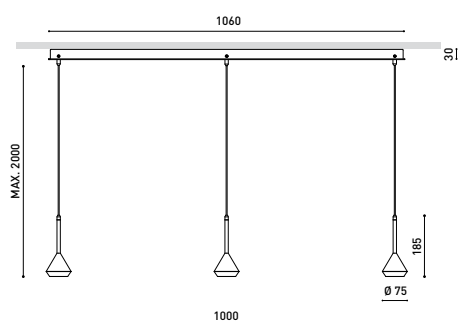

AWARDS



Name	SPIN 3 SURFACE 2M 40° 2700K MC-WT
Reference	A3910110MCWT
Color	Metallized copper
RAL	Electrolytic bath
Category	SUSPENSION

PRODUCT

Light source	LED
Gross luminous flux	3 x 600 Lm
Power	3 x 6,5 W
Power values of the system	21,67 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	40°
Lighting efficiency	84%
Efficacy	105 Lm/W
Current intensity	700 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


OTHER DATA

Ingress Protection	IP20
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Spin Surface is a version that allows it to be installed in places where it is impossible to access the false ceiling. Cement, concrete, vault ... its base, set to apply three luminaires, houses the driver and allows the luminaire to be installed on all types of surfaces.

POLAR DIAGRAM

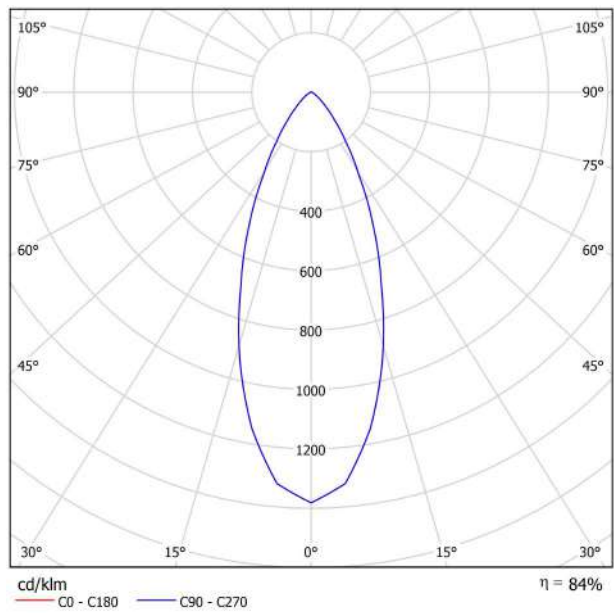


CONICAL DIAGRAM

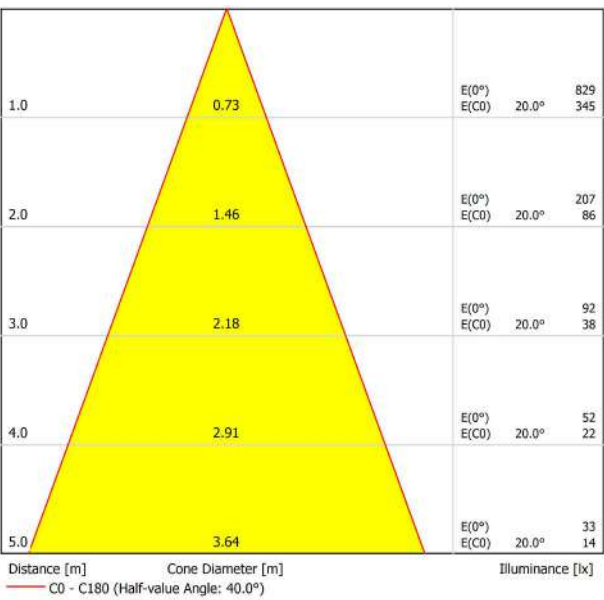



DIMENSIONS

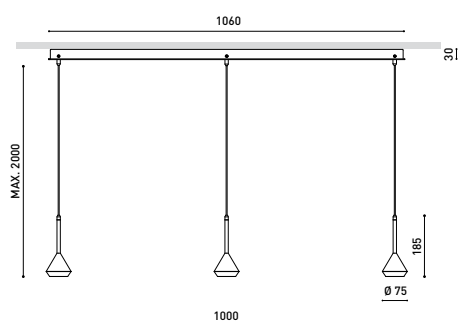

AWARDS



Name	SPIN 3 SURFACE 2M 40° 2700K MG-NT
Reference	A3910110MGNT
Color	Metallized gold
RAL	Electrolytic bath
Category	SUSPENSION

PRODUCT

Light source	LED
Gross luminous flux	3 x 600 Lm
Power	3 x 6,5 W
Power values of the system	21,67 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	40°
Lighting efficiency	84%
Efficacy	105 Lm/W
Current intensity	700 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


LIGHTING INFORMATION

OTHER DATA


Ingress Protection	IP20
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate



POLAR DIAGRAM

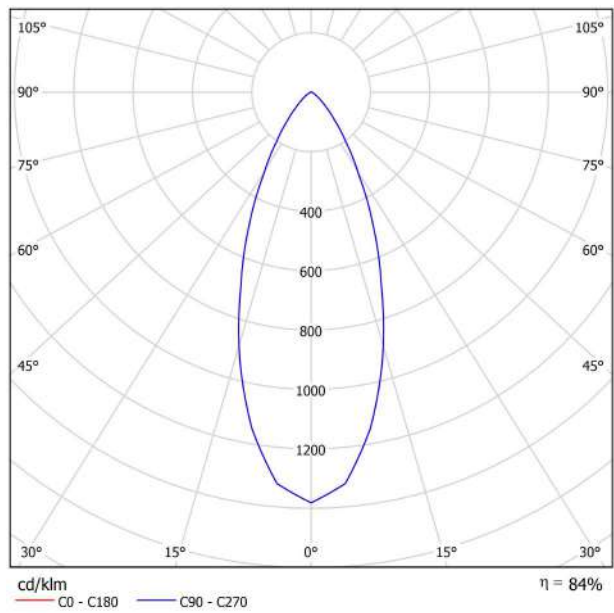


CONICAL DIAGRAM

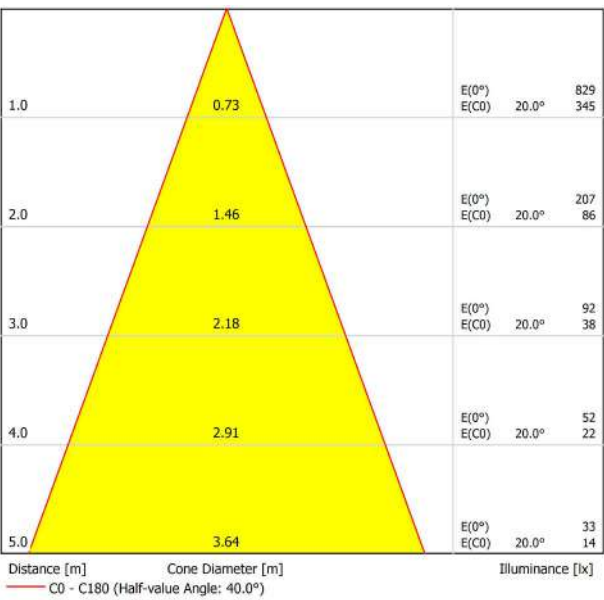



DIMENSIONS

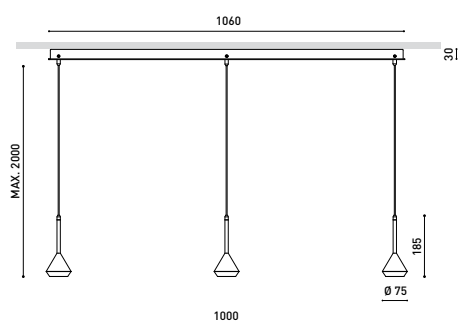

AWARDS



Name	SPIN 3 SURFACE 2M 40° 2700K MG-WT
Reference	A3910110MGWT
Color	Metallized gold
RAL	Electrolytic bath
Category	SUSPENSION

PRODUCT

Light source	LED
Gross luminous flux	3 x 600 Lm
Power	3 x 6,5 W
Power values of the system	21,67 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	40°
Lighting efficiency	84%
Efficacy	105 Lm/W
Current intensity	700 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


OTHER DATA

Ingress Protection	IP20
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Spin Surface is a version that allows it to be installed in places where it is impossible to access the false ceiling. Cement, concrete, vault ... its base, set to apply three luminaires, houses the driver and allows the luminaire to be installed on all types of surfaces.

POLAR DIAGRAM

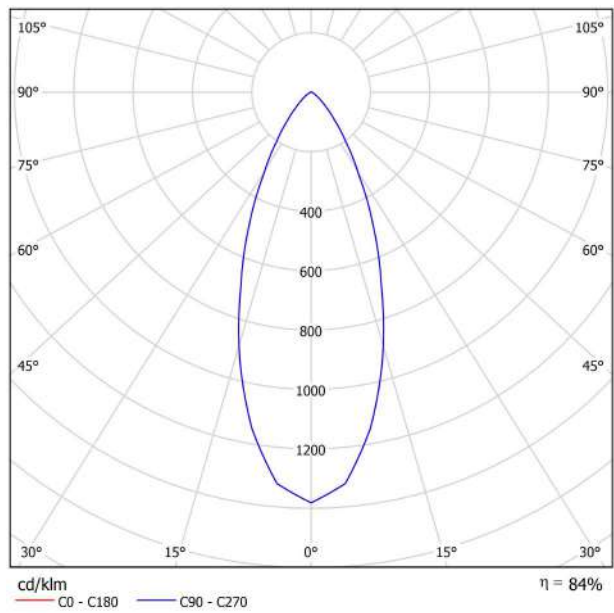


CONICAL DIAGRAM

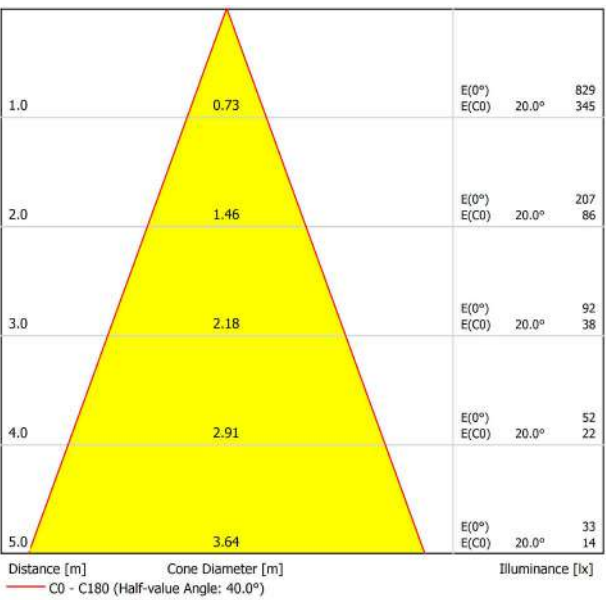



DIMENSIONS

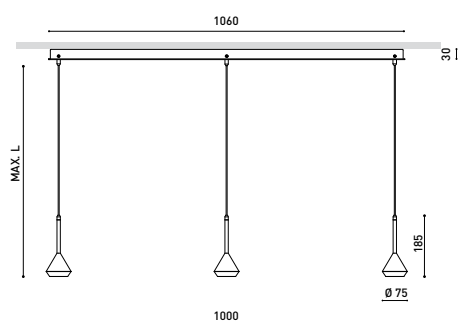

AWARDS



Name	SPIN 3 SURFACE 2M 40° 2700K NT-NT
Reference	A3910110NTNT
Color	Textured black
RAL	9005
Category	SURFACE

PRODUCT

Light source	LED
Gross luminous flux	3 x 600 Lm
Power	3 x 6,5 W
Power values of the system	21,67 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	40°
Lighting efficiency	84%
Efficacy	105 Lm/W
Current intensity	700 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Cord length	2 m
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Reduced dimensions, clear lines and a mechanized geometry combined in a pendant luminaire for accent lighting. Its ultra-thin cable gives Spin a sensation of aerial floatability.

POLAR DIAGRAM

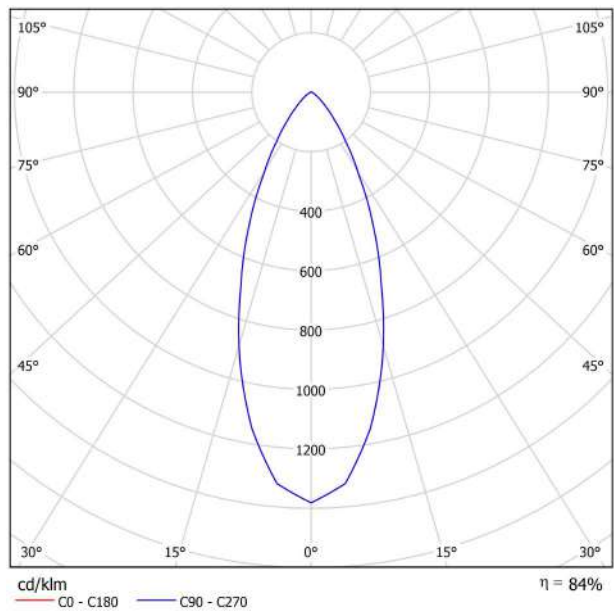


CONICAL DIAGRAM

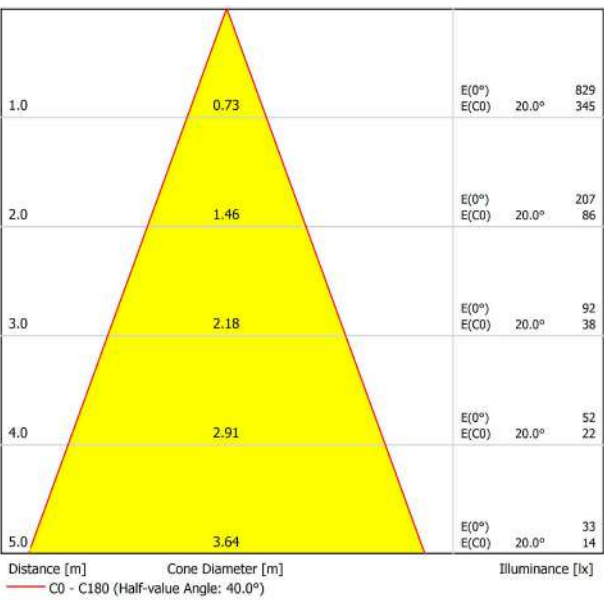



DIMENSIONS

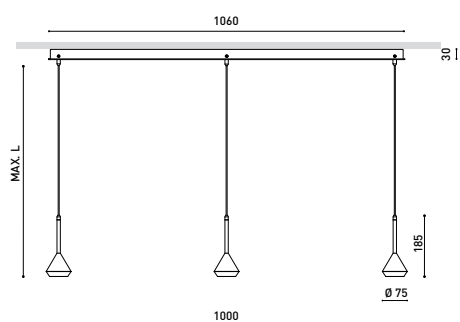

AWARDS



Name	SPIN 3 SURFACE 2M 40° 2700K NT-WT
Reference	A3910110NTWT
Color	Textured black
RAL	9005
Category	SURFACE

PRODUCT

Light source	LED
Gross luminous flux	3 x 600 Lm
Power	3 x 6,5 W
Power values of the system	21,67 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	40°
Lighting efficiency	84%
Efficacy	105 Lm/W
Current intensity	700 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Cord length	2 m
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Reduced dimensions, clear lines and a mechanized geometry combined in a pendant luminaire for accent lighting. Its ultra-thin cable gives Spin a sensation of aerial floatability.

POLAR DIAGRAM

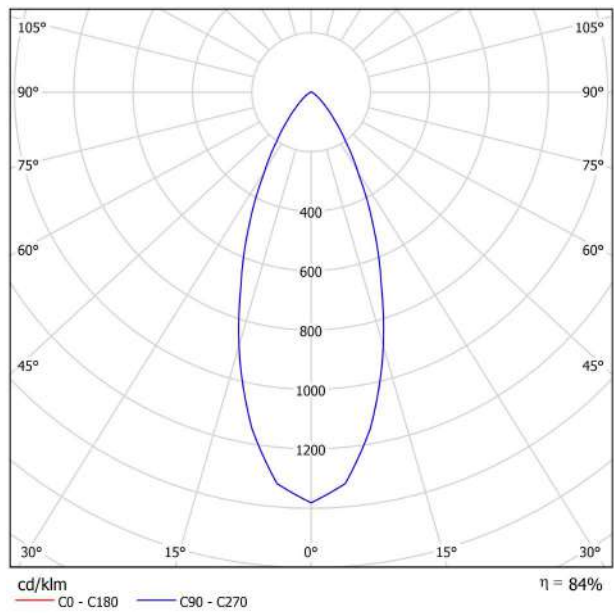


CONICAL DIAGRAM

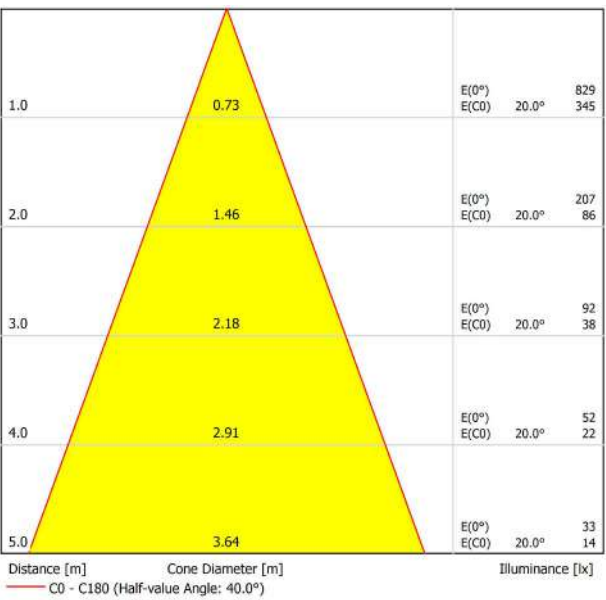



DIMENSIONS

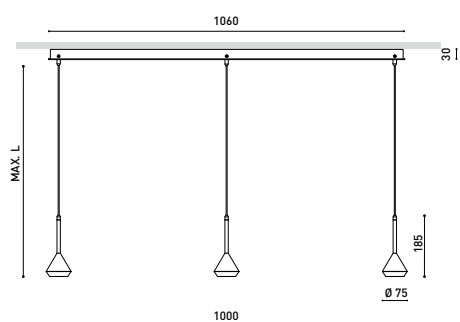

AWARDS



Name	SPIN 3 SURFACE 2M 40° 2700K WT-NT
Reference	A3910110WTNT
Color	Textured white
RAL	9016
Category	SURFACE

PRODUCT

Light source	LED
Gross luminous flux	3 x 600 Lm
Power	3 x 6,5 W
Power values of the system	21,67 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	40°
Lighting efficiency	84%
Efficacy	92 Lm/W
Current intensity	700 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Cord length	2 m
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Reduced dimensions, clear lines and a mechanized geometry combined in a pendant luminaire for accent lighting. Its ultra-thin cable gives Spin a sensation of aerial floatability.

POLAR DIAGRAM

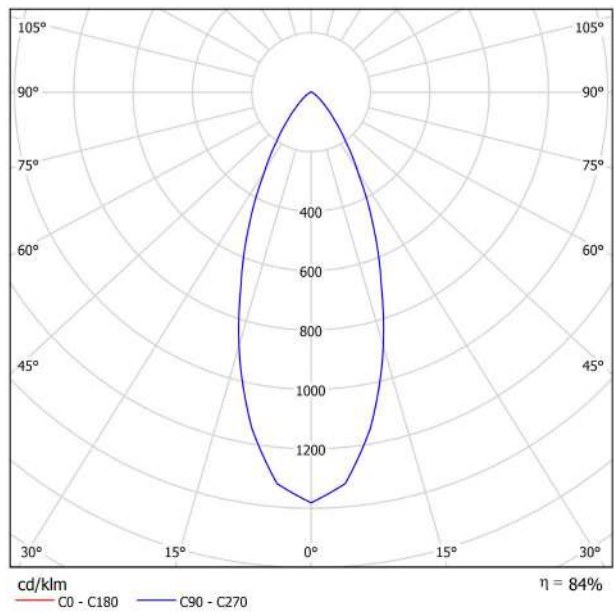


CONICAL DIAGRAM

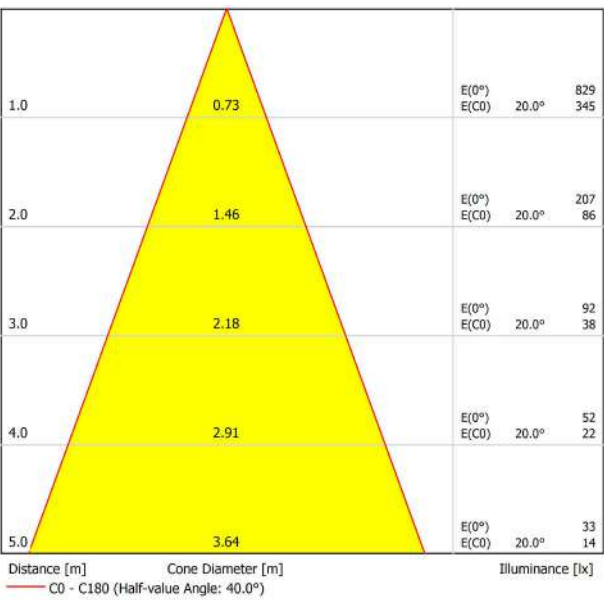



DIMENSIONS

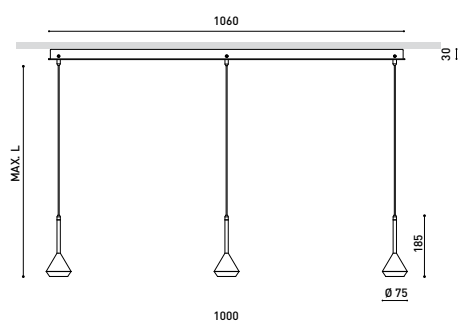

AWARDS



Name	SPIN 3 SURFACE 2M 40° 2700K WT-WT
Reference	A3910110WTWT
Color	Textured white
RAL	9016
Category	SURFACE

PRODUCT

Light source	LED
Gross luminous flux	3 x 600 Lm
Power	3 x 6,5 W
Power values of the system	21,67 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	40°
Lighting efficiency	84%
Efficacy	92 Lm/W
Current intensity	700 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Cord length	2 m
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Reduced dimensions, clear lines and a mechanized geometry combined in a pendant luminaire for accent lighting. Its ultra-thin cable gives Spin a sensation of aerial floatability.

POLAR DIAGRAM

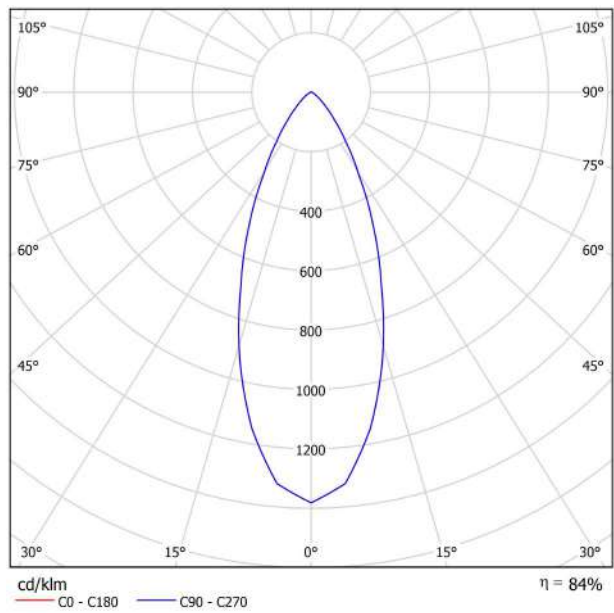


CONICAL DIAGRAM

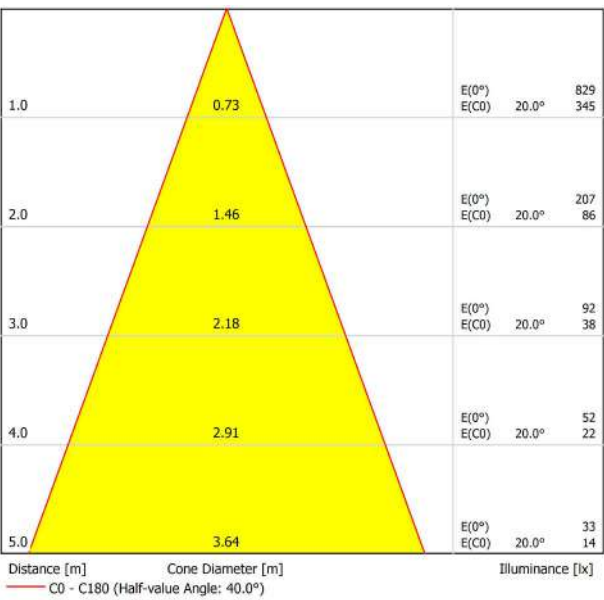



DIMENSIONS

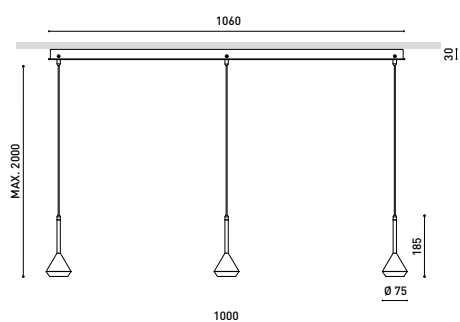

AWARDS



Name	SPIN 3 SURFACE 2M 40° 3000K MC-NT
Reference	A3910111MCNT
Color	Metallized copper
RAL	Electrolytic bath
Category	SUSPENSION

PRODUCT

Light source	LED
Gross luminous flux	3 x 630 Lm
Power	3 x 6,5 W
Power values of the system	21,67 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	40°
Lighting efficiency	84%
Efficacy	92 Lm/W
Current intensity	700 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


OTHER DATA

Ingress Protection	IP20
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Spin Surface is a version that allows it to be installed in places where it is impossible to access the false ceiling. Cement, concrete, vault ... its base, set to apply three luminaires, houses the driver and allows the luminaire to be installed on all types of surfaces.

POLAR DIAGRAM

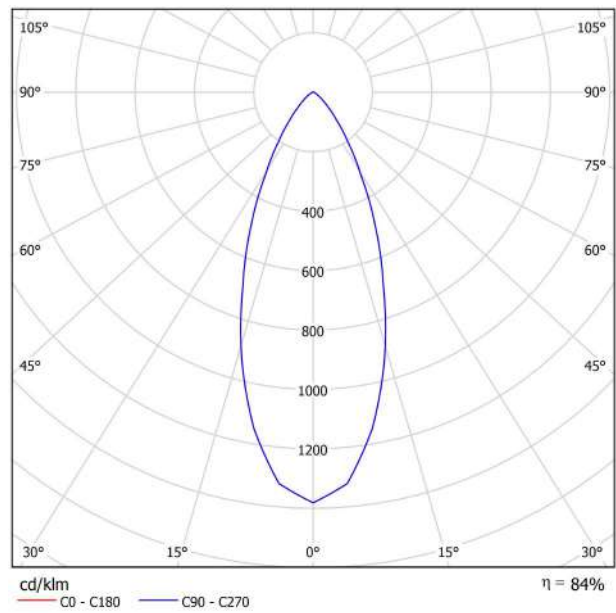


CONICAL DIAGRAM

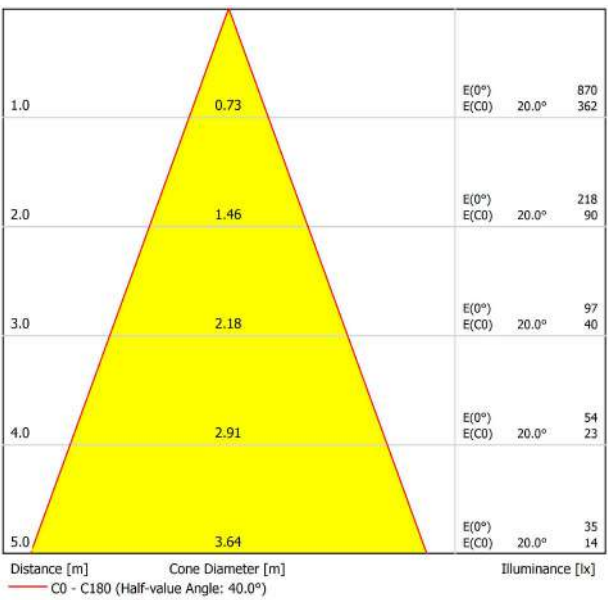



DIMENSIONS

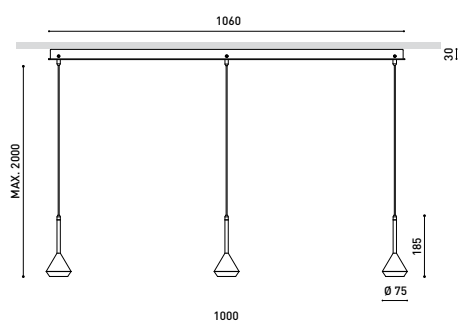

AWARDS



Name	SPIN 3 SURFACE 2M 40° 3000K MC-WT
Reference	A3910111MCWT
Color	Metallized copper
RAL	Electrolytic bath
Category	SUSPENSION

PRODUCT

Light source	LED
Gross luminous flux	3 x 630 Lm
Power	3 x 6,5 W
Power values of the system	21,67 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	40°
Lighting efficiency	84%
Efficacy	92 Lm/W
Current intensity	700 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


OTHER DATA

Ingress Protection	IP20
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Spin Surface is a version that allows it to be installed in places where it is impossible to access the false ceiling. Cement, concrete, vault ... its base, set to apply three luminaires, houses the driver and allows the luminaire to be installed on all types of surfaces.

POLAR DIAGRAM

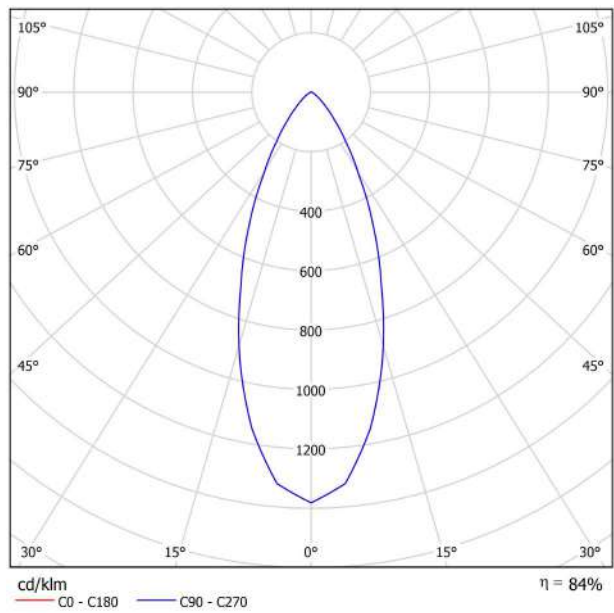


CONICAL DIAGRAM

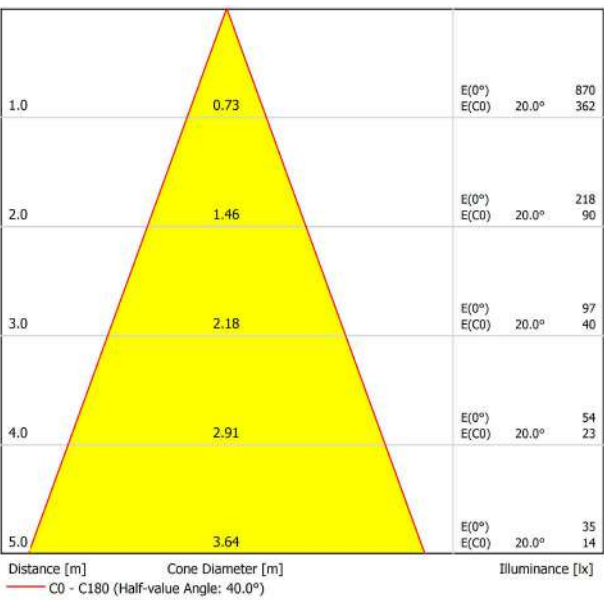



DIMENSIONS

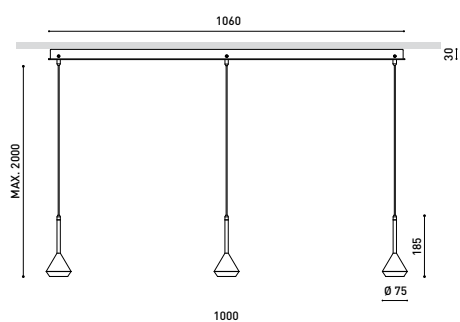

AWARDS



Name	SPIN 3 SURFACE 2M 40° 3000K MG-NT
Reference	A3910111MGNT
Color	Metallized gold
RAL	Electrolytic bath
Category	SUSPENSION

PRODUCT

Light source	LED
Gross luminous flux	3 x 630 Lm
Power	3 x 6,5 W
Power values of the system	21,67 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	40°
Lighting efficiency	84%
Efficacy	92 Lm/W
Current intensity	700 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Spin Surface is a version that allows it to be installed in places where it is impossible to access the false ceiling. Cement, concrete, vault ... its base, set to apply three luminaires, houses the driver and allows the luminaire to be installed on all types of surfaces.

POLAR DIAGRAM

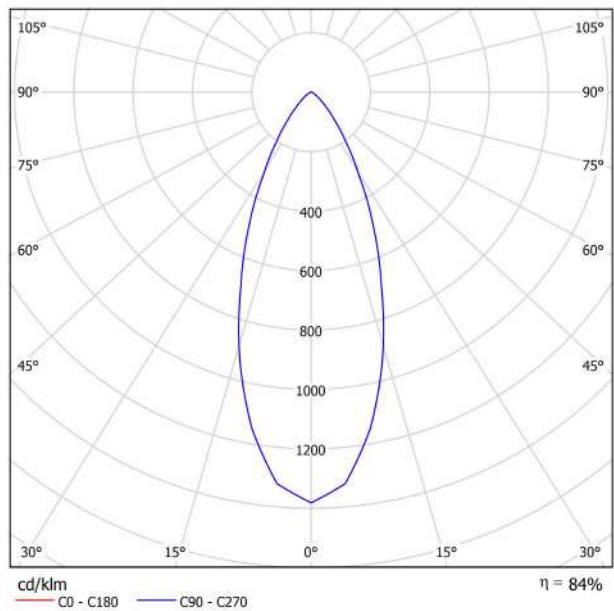


CONICAL DIAGRAM

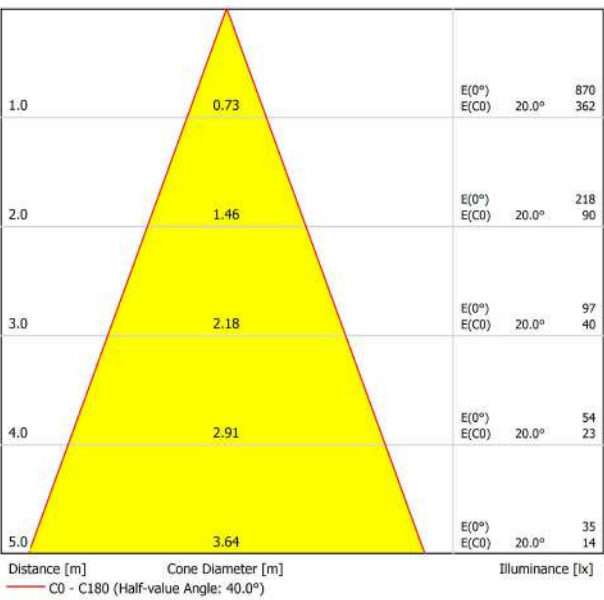



DIMENSIONS

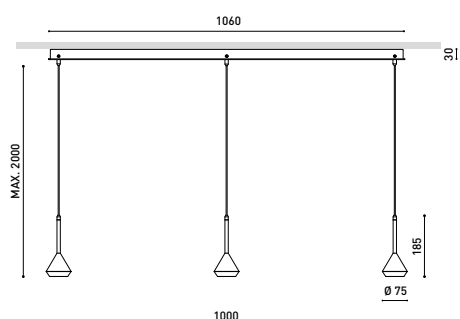

AWARDS



Name	SPIN 3 SURFACE 2M 40° 3000K MG-WT
Reference	A3910111MGWT
Color	Metallized gold
RAL	Electrolytic bath
Category	SUSPENSION

PRODUCT

Light source	LED
Gross luminous flux	3 x 630 Lm
Power	3 x 6,5 W
Power values of the system	21,67 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	40°
Lighting efficiency	84%
Efficacy	92 Lm/W
Current intensity	700 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


OTHER DATA

Ingress Protection	IP20
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Spin Surface is a version that allows it to be installed in places where it is impossible to access the false ceiling. Cement, concrete, vault ... its base, set to apply three luminaires, houses the driver and allows the luminaire to be installed on all types of surfaces.

POLAR DIAGRAM

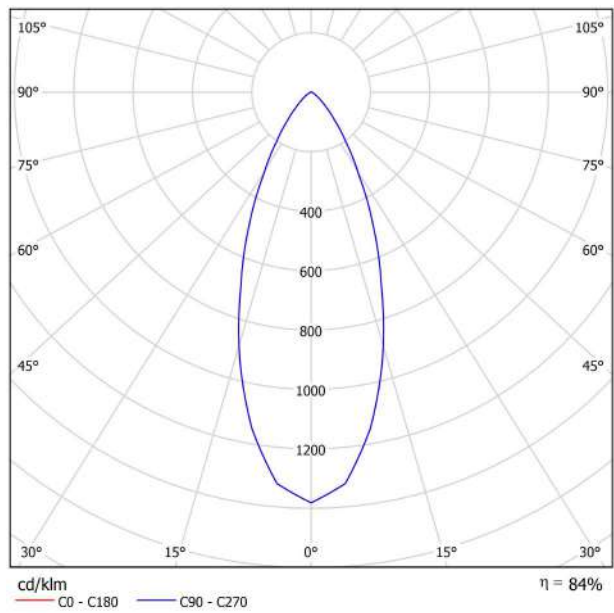


CONICAL DIAGRAM

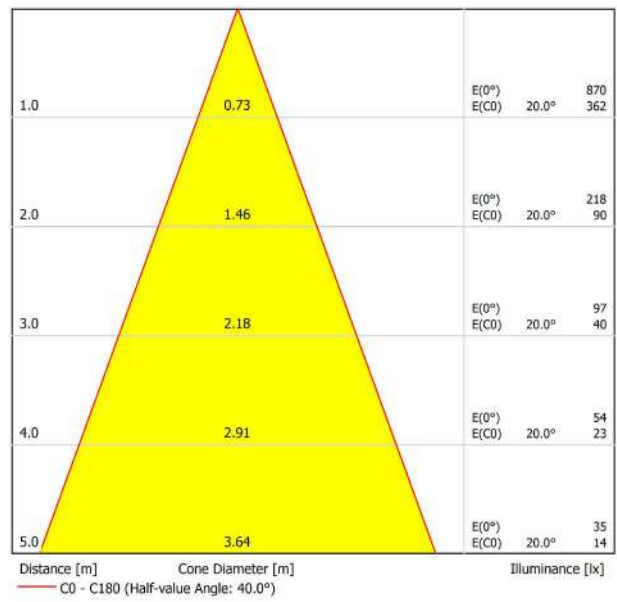



DIMENSIONS

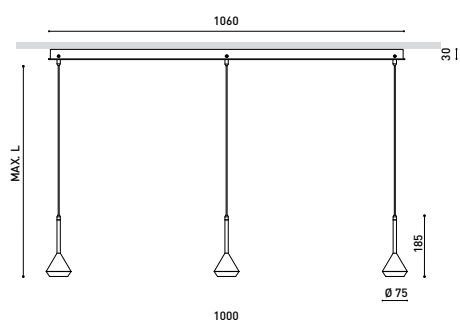

AWARDS



Name	SPIN 3 SURFACE 2M 40° 3000K NT-NT
Reference	A3910111NTNT
Color	Textured black
RAL	9005
Category	SURFACE

PRODUCT

Light source	LED
Gross luminous flux	3 x 630 Lm
Power	3 x 6,5 W
Power values of the system	21,67 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	40°
Lighting efficiency	84%
Efficacy	92 Lm/W
Current intensity	700 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Cord length	2 m
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Reduced dimensions, clear lines and a mechanized geometry combined in a pendant luminaire for accent lighting. Its ultra-thin cable gives Spin a sensation of aerial floatability.

POLAR DIAGRAM

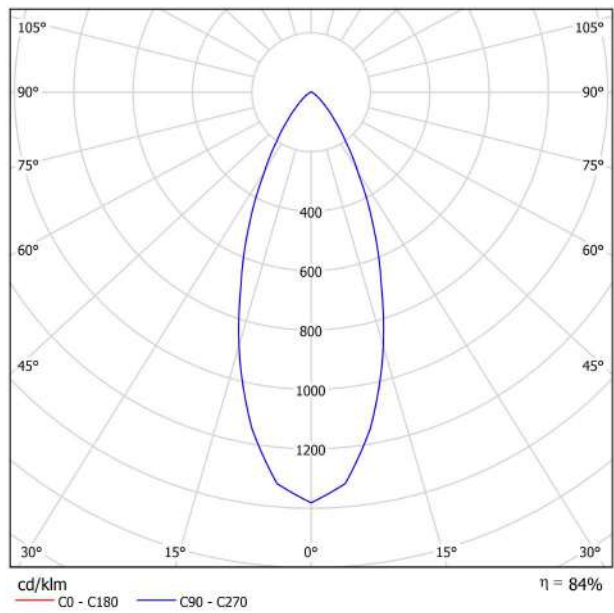


CONICAL DIAGRAM

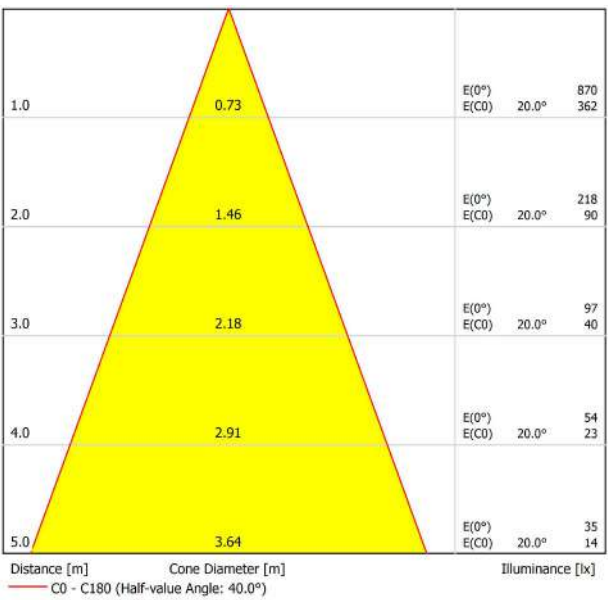



DIMENSIONS

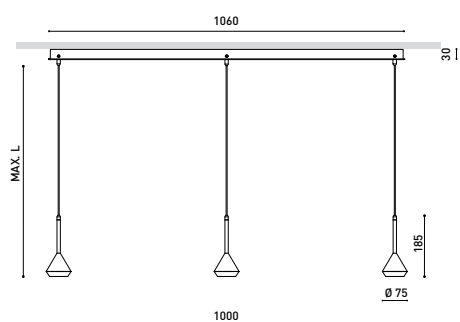

AWARDS



Name	SPIN 3 SURFACE 2M 40° 3000K NT-WT
Reference	A3910111NTWT
Color	Textured black
RAL	9005
Category	SURFACE

PRODUCT

Light source	LED
Gross luminous flux	3 x 630 Lm
Power	3 x 6,5 W
Power values of the system	21,67 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	40°
Lighting efficiency	84%
Efficacy	92 Lm/W
Current intensity	700 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Cord length	2 m
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Reduced dimensions, clear lines and a mechanized geometry combined in a pendant luminaire for accent lighting. Its ultra-thin cable gives Spin a sensation of aerial floatability.

POLAR DIAGRAM

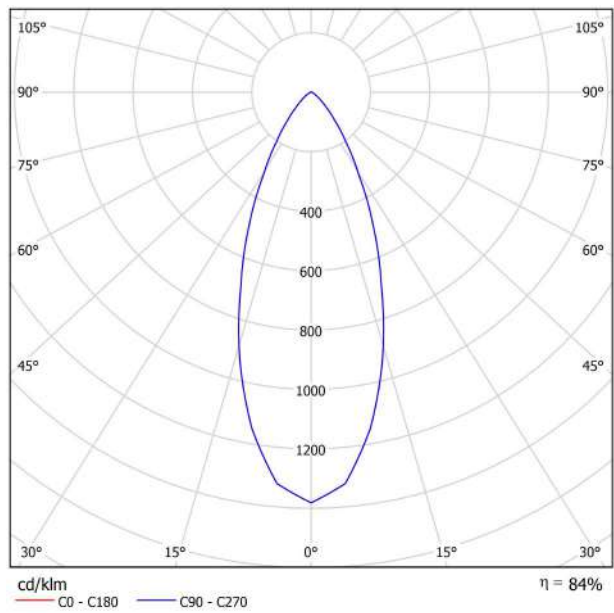


CONICAL DIAGRAM

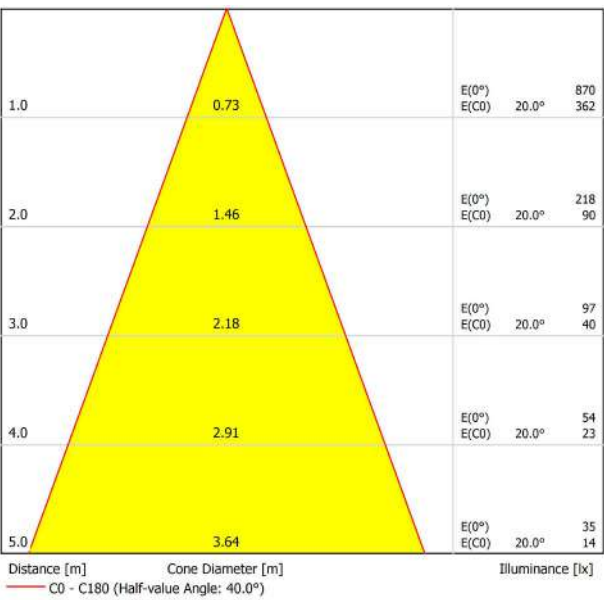



DIMENSIONS

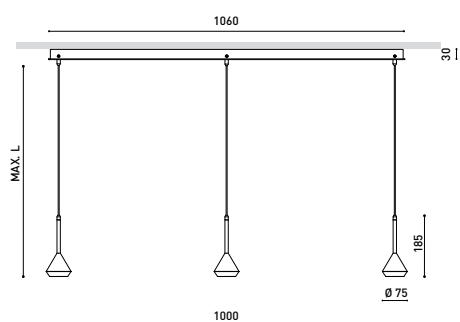

AWARDS



Name	SPIN 3 SURFACE 2M 24° 3000K WT-NT
Reference	A3910101WTNT
Color	Textured white
RAL	9016
Category	SURFACE

PRODUCT

Light source	LED
Gross luminous flux	3 x 630 Lm
Power	3 x 6,5 W
Power values of the system	21,67 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	24°
Lighting efficiency	86%
Efficacy	97 Lm/W
Current intensity	700 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Cord length	2 m
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Reduced dimensions, clear lines and a mechanized geometry combined in a pendant luminaire for accent lighting. Its ultra-thin cable gives Spin a sensation of aerial floatability.

POLAR DIAGRAM

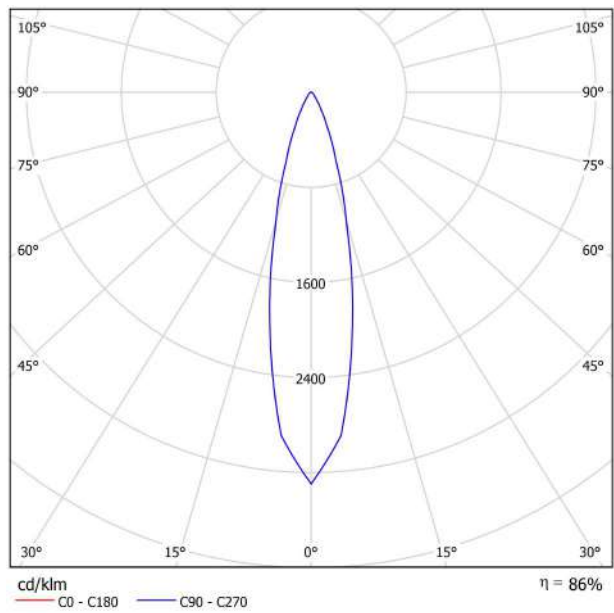


CONICAL DIAGRAM

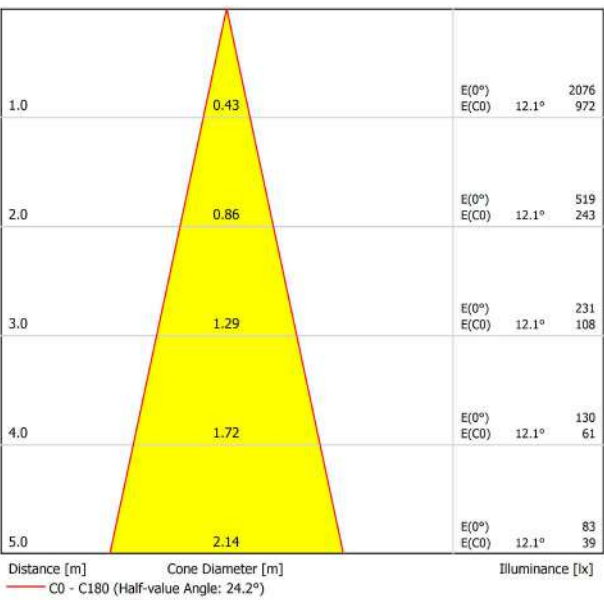



DIMENSIONS

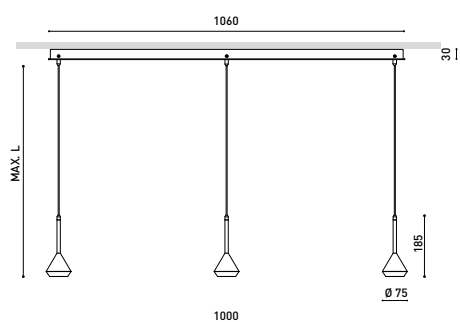

AWARDS



Name	SPIN 3 SURFACE 2M 24° 3000K WT-WT
Reference	A3910101WTWT
Color	Textured white
RAL	9016
Category	SURFACE

PRODUCT

Light source	LED
Gross luminous flux	3 x 630 Lm
Power	3 x 6,5 W
Power values of the system	21,67 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	24°
Lighting efficiency	86%
Efficacy	97 Lm/W
Current intensity	700 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Cord length	2 m
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Reduced dimensions, clear lines and a mechanized geometry combined in a pendant luminaire for accent lighting. Its ultra-thin cable gives Spin a sensation of aerial floatability.

POLAR DIAGRAM

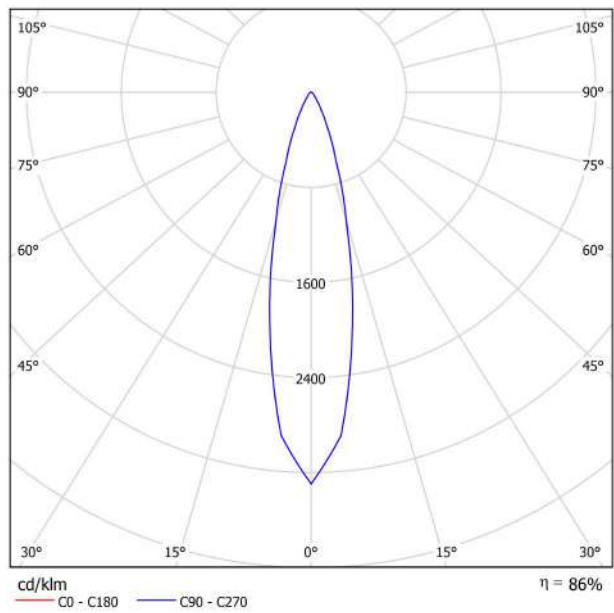


CONICAL DIAGRAM

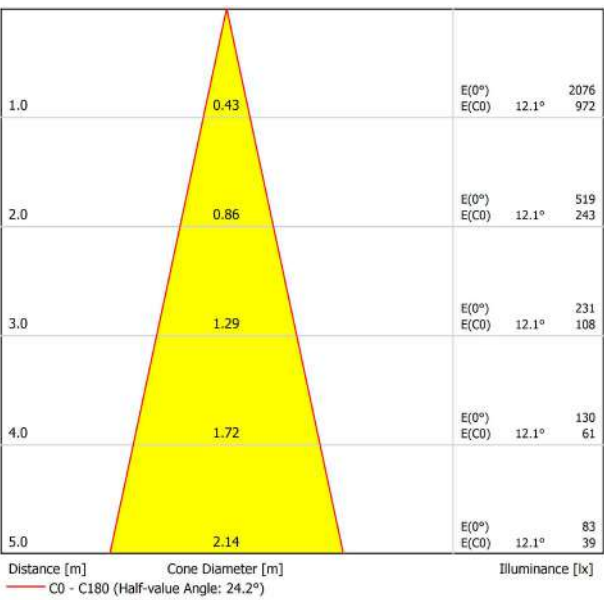



DIMENSIONS

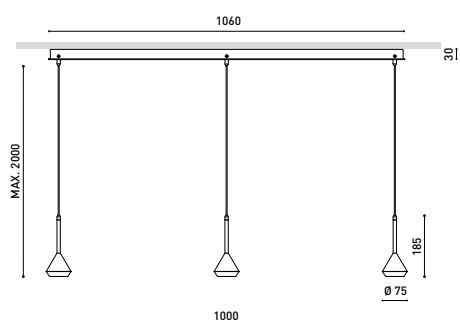

AWARDS



Name	SPIN 3 SURFACE 2M 24° 4000K MC-NT
Reference	A3910102MCNT
Color	Metallized copper
RAL	Electrolytic bath
Category	SUSPENSION

PRODUCT

Light source	LED
Gross luminous flux	3 x 680 Lm
Power	3 x 6,5 W
Power values of the system	21,67 W
Colour temperature	4000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	24°
Lighting efficiency	86%
Efficacy	97 Lm/W
Current intensity	700 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


OTHER DATA

Ingress Protection	IP20
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Spin Surface is a version that allows it to be installed in places where it is impossible to access the false ceiling. Cement, concrete, vault ... its base, set to apply three luminaires, houses the driver and allows the luminaire to be installed on all types of surfaces.

POLAR DIAGRAM

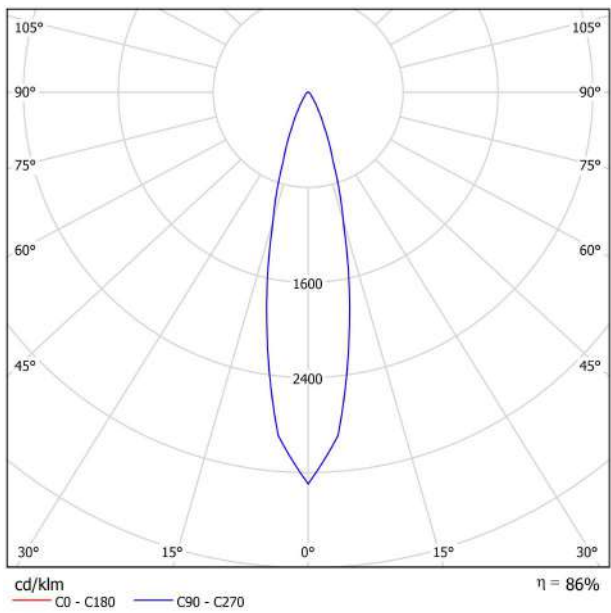


CONICAL DIAGRAM

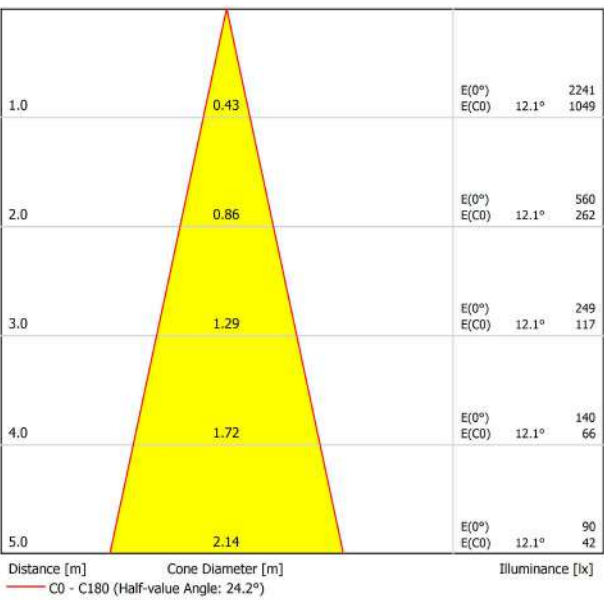



DIMENSIONS

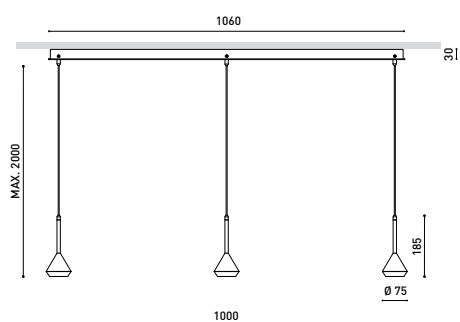

PRODUCT

Name	SPIN 3 SURFACE 2M 24° 4000K MC-WT
Reference	A3910102MCWT
Color	Metallized copper
RAL	Electrolytic bath
Category	SUSPENSION

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	3 x 680 Lm
Power	3 x 6,5 W
Power values of the system	21,67 W
Colour temperature	4000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	24°
Lighting efficiency	86%
Efficacy	97 Lm/W
Current intensity	700 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h

OTHER DATA

Ingress Protection	IP20
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




AWARDS




Spin Surface is a version that allows it to be installed in places where it is impossible to access the false ceiling. Cement, concrete, vault ... its base, set to apply three luminaires, houses the driver and allows the luminaire to be installed on all types of surfaces.

POLAR DIAGRAM

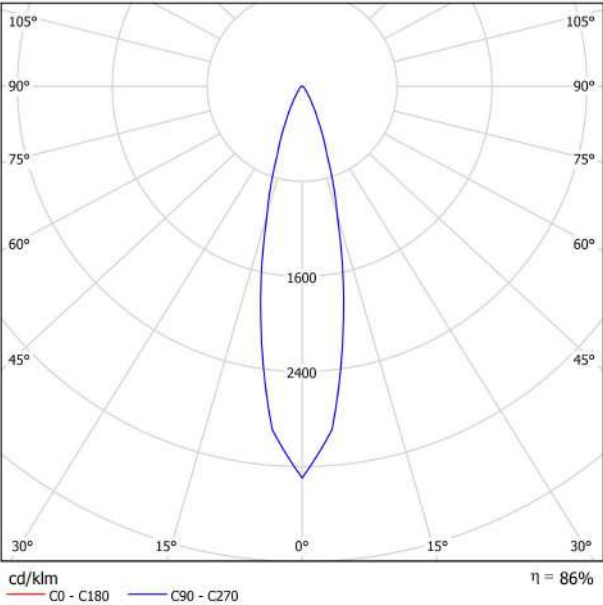


CONICAL DIAGRAM

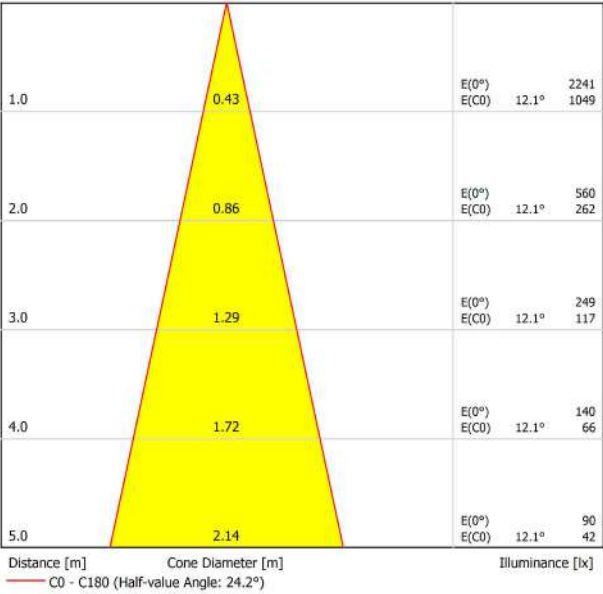



DIMENSIONS

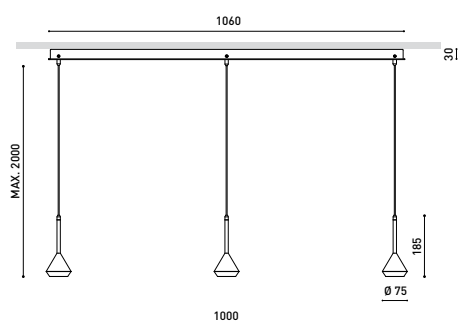

AWARDS



Name	SPIN 3 SURFACE 2M 24° 4000K MG-NT
Reference	A3910102MGNT
Color	Metallized gold
RAL	Electrolytic bath
Category	SUSPENSION

PRODUCT

Light source	LED
Gross luminous flux	3 x 680 Lm
Power	3 x 6,5 W
Power values of the system	21,67 W
Colour temperature	4000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	24°
Lighting efficiency	86%
Efficacy	97 Lm/W
Current intensity	700 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Spin Surface is a version that allows it to be installed in places where it is impossible to access the false ceiling. Cement, concrete, vault ... its base, set to apply three luminaires, houses the driver and allows the luminaire to be installed on all types of surfaces.

POLAR DIAGRAM

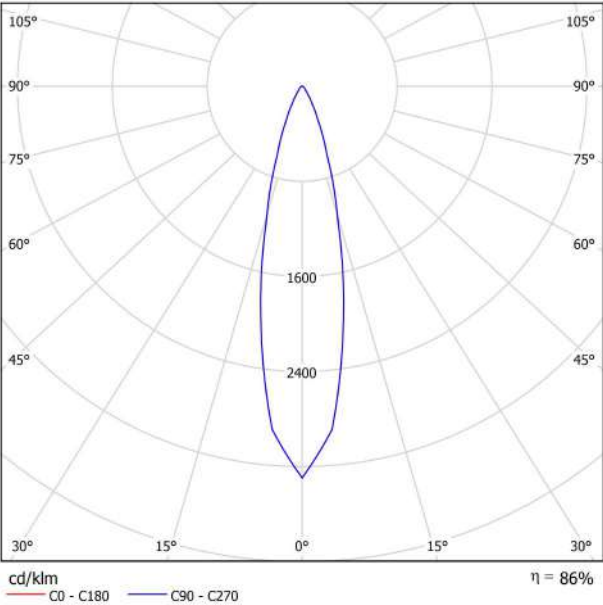


CONICAL DIAGRAM

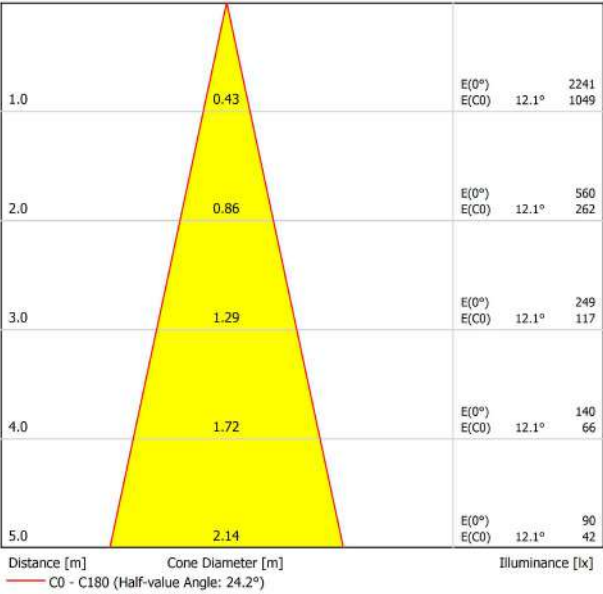



DIMENSIONS

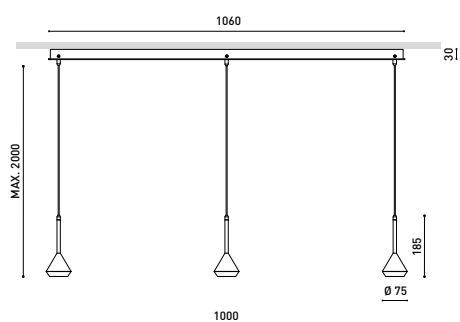

AWARDS



Name	SPIN 3 SURFACE 2M 24° 4000K MG-WT
Reference	A3910102MGWT
Color	Metallized gold
RAL	Electrolytic bath
Category	SUSPENSION

PRODUCT

Light source	LED
Gross luminous flux	3 x 680 Lm
Power	3 x 6,5 W
Power values of the system	21,67 W
Colour temperature	4000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	24°
Lighting efficiency	86%
Efficacy	97 Lm/W
Current intensity	700 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


OTHER DATA

Ingress Protection	IP20
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Spin Surface is a version that allows it to be installed in places where it is impossible to access the false ceiling. Cement, concrete, vault ... its base, set to apply three luminaires, houses the driver and allows the luminaire to be installed on all types of surfaces.

POLAR DIAGRAM

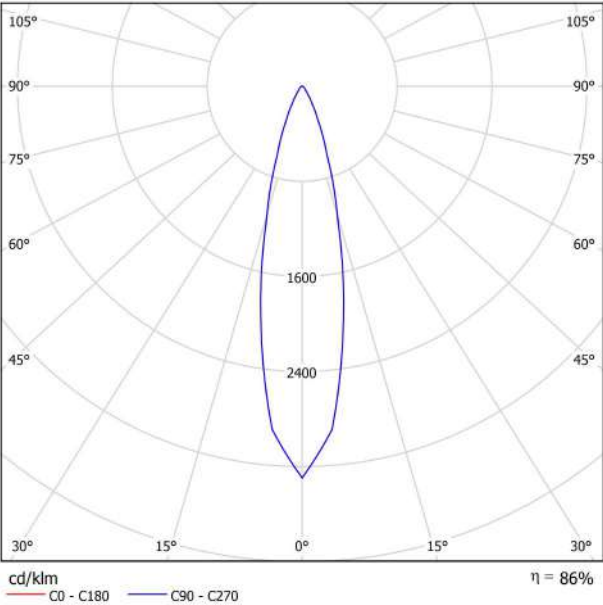


CONICAL DIAGRAM

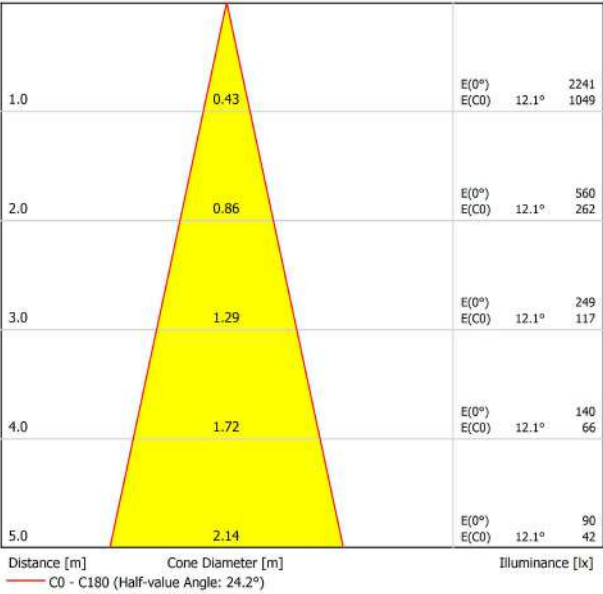



DIMENSIONS

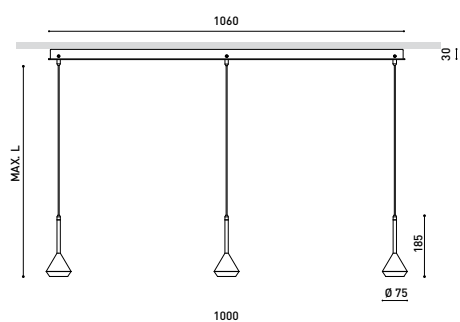

AWARDS



Name	SPIN 3 SURFACE 2M 24° 4000K NT-NT
Reference	A3910102NTNT
Color	Textured black
RAL	9005
Category	SURFACE

PRODUCT

Light source	LED
Gross luminous flux	3 x 680 Lm
Power	3 x 6,5 W
Power values of the system	21,67 W
Colour temperature	4000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	24°
Lighting efficiency	86%
Efficacy	97 Lm/W
Current intensity	700 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Cord length	2 m
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Reduced dimensions, clear lines and a mechanized geometry combined in a pendant luminaire for accent lighting. Its ultra-thin cable gives Spin a sensation of aerial floatability.

POLAR DIAGRAM

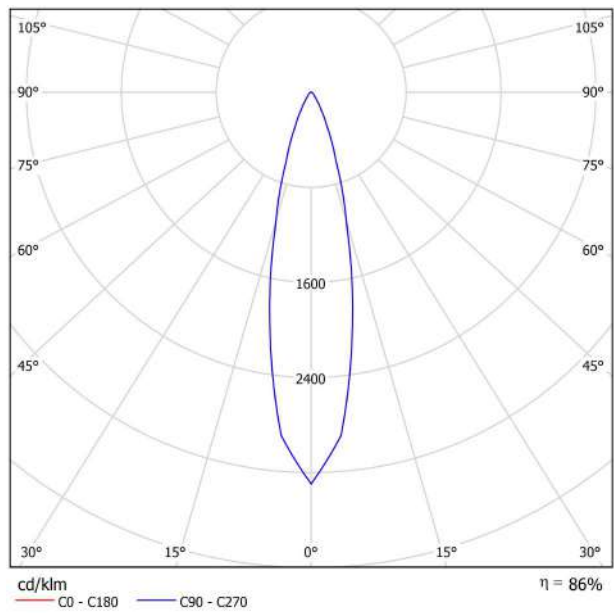


CONICAL DIAGRAM

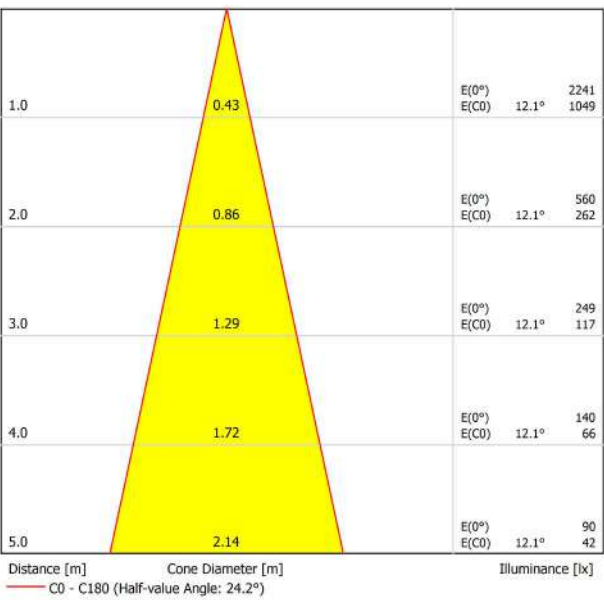



DIMENSIONS

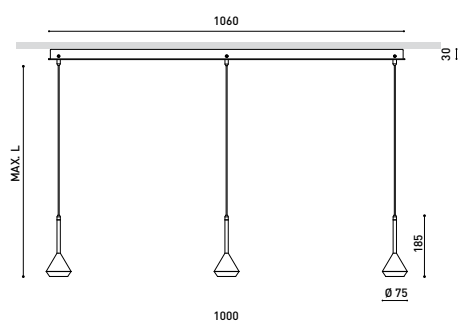

AWARDS



Name	SPIN 3 SURFACE 2M 24° 4000K NT-WT
Reference	A3910102NTWT
Color	Textured black
RAL	9005
Category	SURFACE

PRODUCT

Light source	LED
Gross luminous flux	3 x 680 Lm
Power	3 x 6,5 W
Power values of the system	21,67 W
Colour temperature	4000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	24°
Lighting efficiency	86%
Efficacy	97 Lm/W
Current intensity	700 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Cord length	2 m
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Reduced dimensions, clear lines and a mechanized geometry combined in a pendant luminaire for accent lighting. Its ultra-thin cable gives Spin a sensation of aerial floatability.

POLAR DIAGRAM

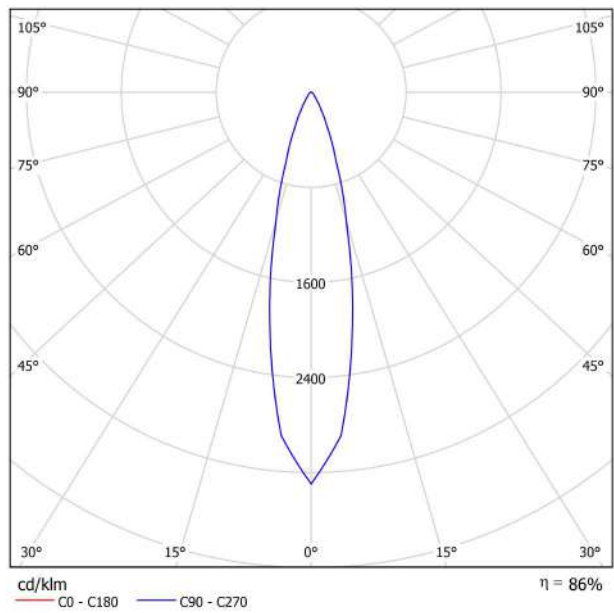


CONICAL DIAGRAM

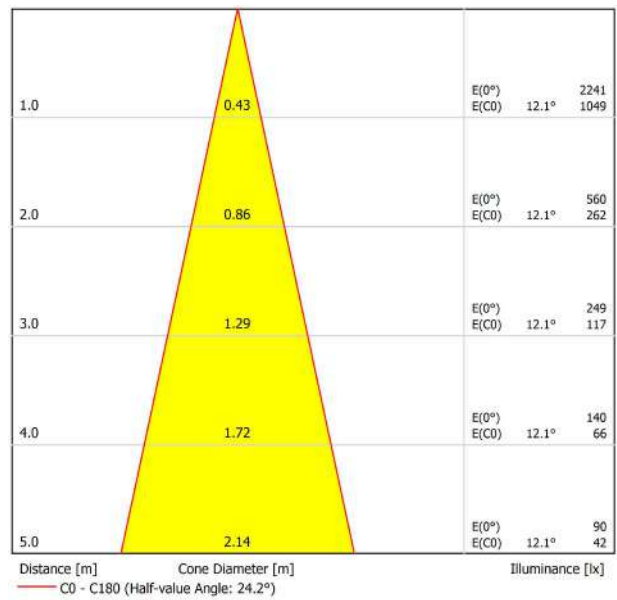



DIMENSIONS

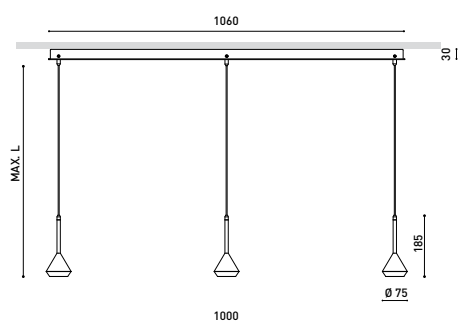

AWARDS



Name	SPIN 3 SURFACE 2M 24° 4000K WT-NT
Reference	A3910102WTNT
Color	Textured white
RAL	9016
Category	SURFACE

PRODUCT

Light source	LED
Gross luminous flux	3 x 680 Lm
Power	3 x 6,5 W
Power values of the system	21,67 W
Colour temperature	4000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	24°
Lighting efficiency	86%
Efficacy	105 Lm/W
Current intensity	700 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Cord length	2 m
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Reduced dimensions, clear lines and a mechanized geometry combined in a pendant luminaire for accent lighting. Its ultra-thin cable gives Spin a sensation of aerial floatability.

POLAR DIAGRAM

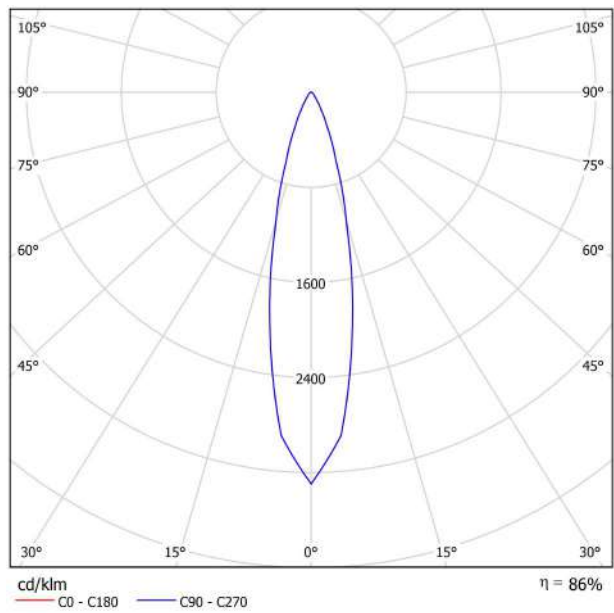


CONICAL DIAGRAM

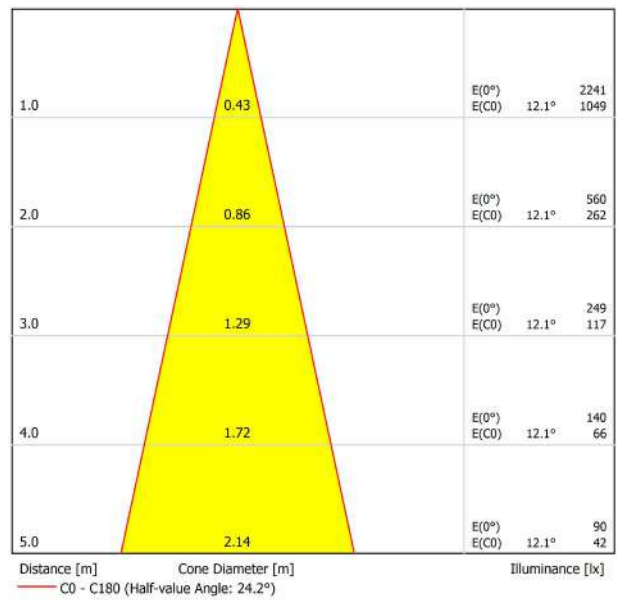



DIMENSIONS

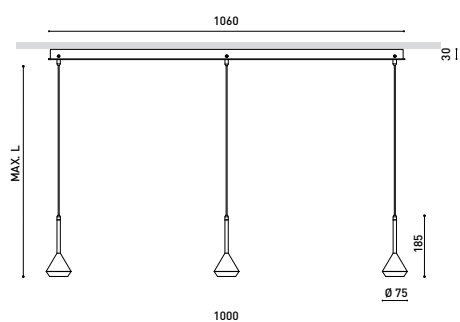

AWARDS



Name	SPIN 3 SURFACE 2M 24° 4000K WT-WT
Reference	A3910102WTWT
Color	Textured white
RAL	9016
Category	SURFACE

PRODUCT

Light source	LED
Gross luminous flux	3 x 680 Lm
Power	3 x 6,5 W
Power values of the system	21,67 W
Colour temperature	4000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	24°
Lighting efficiency	86%
Efficacy	105 Lm/W
Current intensity	700 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Cord length	2 m
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Reduced dimensions, clear lines and a mechanized geometry combined in a pendant luminaire for accent lighting. Its ultra-thin cable gives Spin a sensation of aerial floatability.

POLAR DIAGRAM

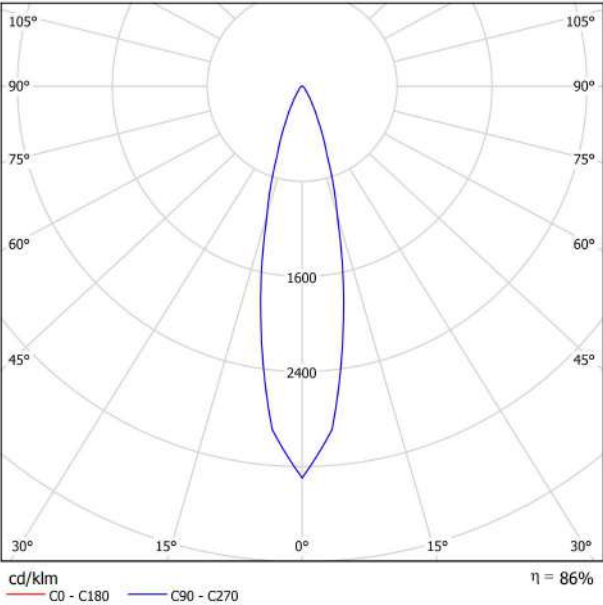


CONICAL DIAGRAM

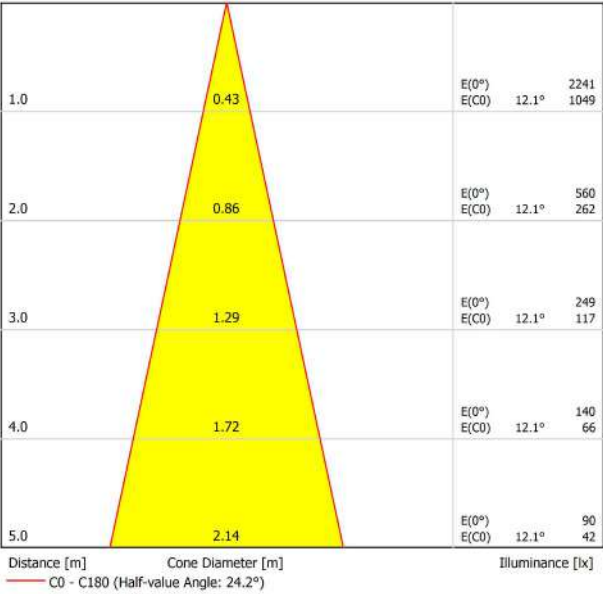



DIMENSIONS

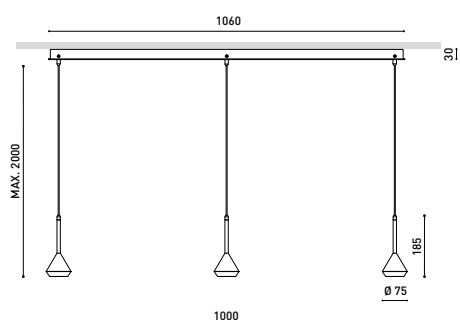

AWARDS



Name	SPIN 3 SURFACE 2M 40° 2700K MC-NT
Reference	A3910110MCNT
Color	Metallized copper
RAL	Electrolytic bath
Category	SUSPENSION

PRODUCT

Light source	LED
Gross luminous flux	3 x 600 Lm
Power	3 x 6,5 W
Power values of the system	21,67 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	40°
Lighting efficiency	84%
Efficacy	105 Lm/W
Current intensity	700 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


OTHER DATA

Ingress Protection	IP20
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Spin Surface is a version that allows it to be installed in places where it is impossible to access the false ceiling. Cement, concrete, vault ... its base, set to apply three luminaires, houses the driver and allows the luminaire to be installed on all types of surfaces.

POLAR DIAGRAM

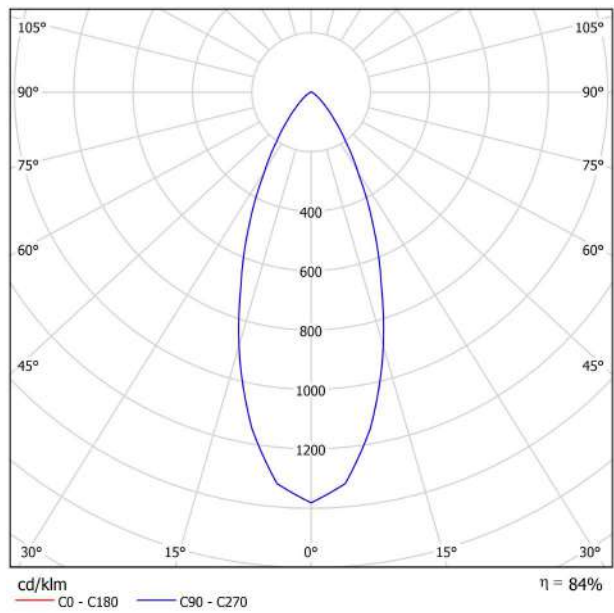


CONICAL DIAGRAM

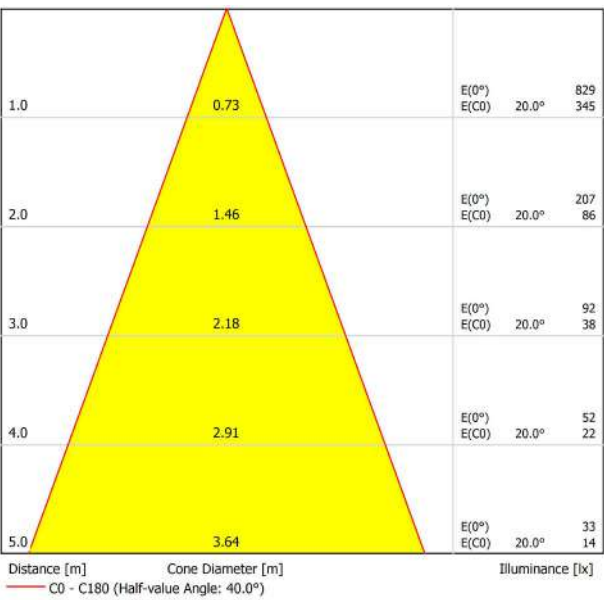



DIMENSIONS

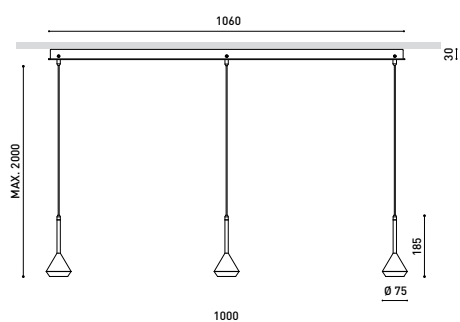

AWARDS



Name	SPIN 3 SURFACE 2M 24° 2700K MC-NT
Reference	A3910100MCNT
Color	Metallized copper
RAL	Electrolytic bath
Category	SUSPENSION

PRODUCT

Light source	LED
Gross luminous flux	3 x 600 Lm
Power	3 x 6,5 W
Power values of the system	21,67 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	24°
Lighting efficiency	86%
Efficacy	105 Lm/W
Current intensity	700 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


OTHER DATA

Ingress Protection	IP20
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Spin Surface is a version that allows it to be installed in places where it is impossible to access the false ceiling. Cement, concrete, vault ... its base, set to apply three luminaires, houses the driver and allows the luminaire to be installed on all types of surfaces.

POLAR DIAGRAM

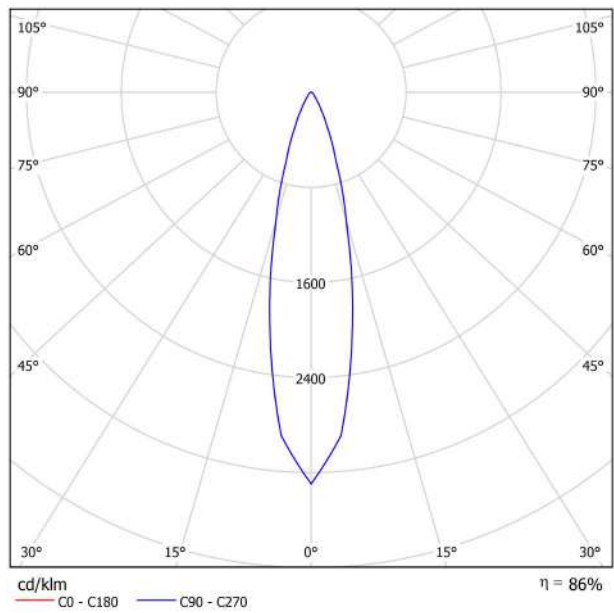


CONICAL DIAGRAM

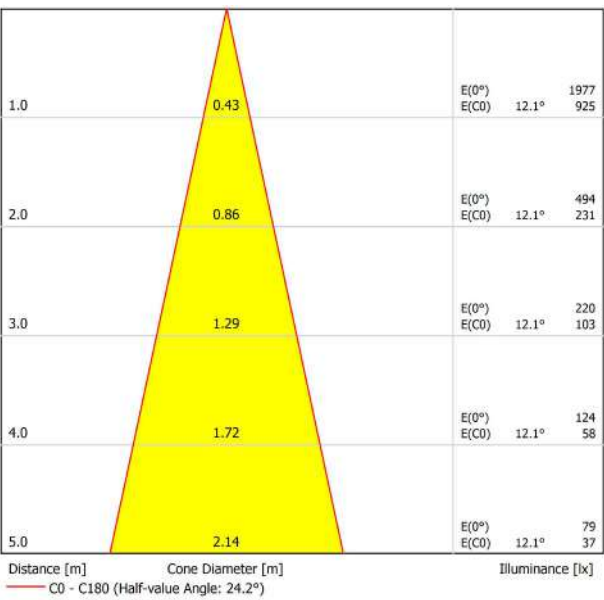



DIMENSIONS

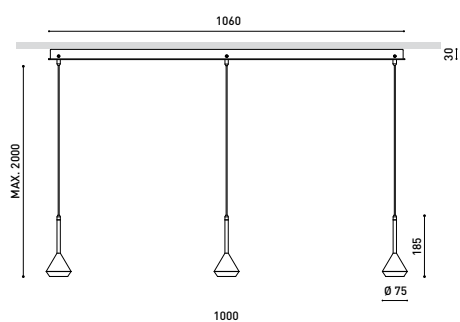

AWARDS



Name	SPIN 3 SURFACE 2M 24° 2700K MC-WT
Reference	A3910100MCWT
Color	Metallized copper
RAL	Electrolytic bath
Category	SUSPENSION

PRODUCT

Light source	LED
Gross luminous flux	3 x 600 Lm
Power	3 x 6,5 W
Power values of the system	21,67 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	24°
Lighting efficiency	86%
Efficacy	105 Lm/W
Current intensity	700 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


OTHER DATA

Ingress Protection	IP20
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Spin Surface is a version that allows it to be installed in places where it is impossible to access the false ceiling. Cement, concrete, vault ... its base, set to apply three luminaires, houses the driver and allows the luminaire to be installed on all types of surfaces.

POLAR DIAGRAM

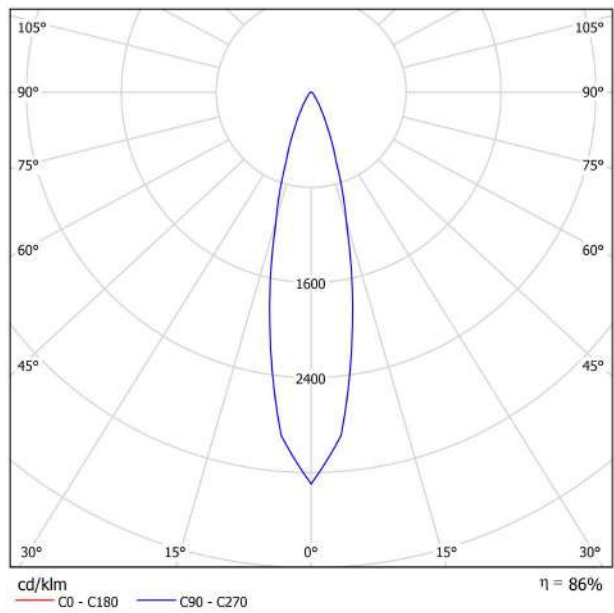


CONICAL DIAGRAM

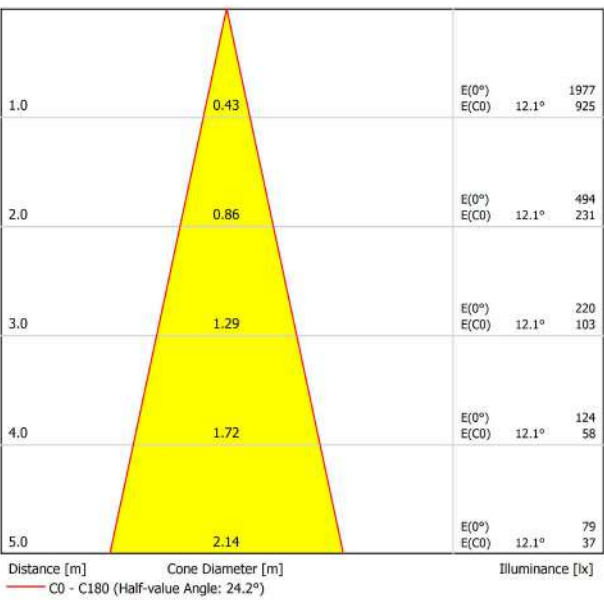



DIMENSIONS

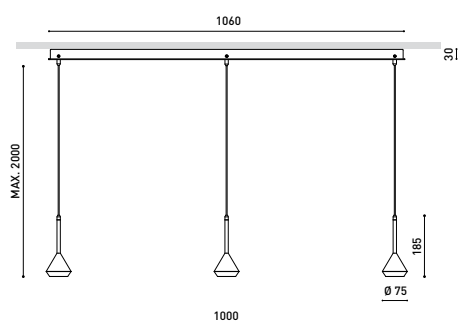

AWARDS



Name	SPIN 3 SURFACE 2M 24° 2700K MG-NT
Reference	A3910100MGNT
Color	Metallized gold
RAL	Electrolytic bath
Category	SUSPENSION

PRODUCT

Light source	LED
Gross luminous flux	3 x 600 Lm
Power	3 x 6,5 W
Power values of the system	21,67 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	24°
Lighting efficiency	86%
Efficacy	105 Lm/W
Current intensity	700 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	□
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


OTHER DATA

Ingress Protection	IP20
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Spin Surface is a version that allows it to be installed in places where it is impossible to access the false ceiling. Cement, concrete, vault ... its base, set to apply three luminaires, houses the driver and allows the luminaire to be installed on all types of surfaces.

POLAR DIAGRAM

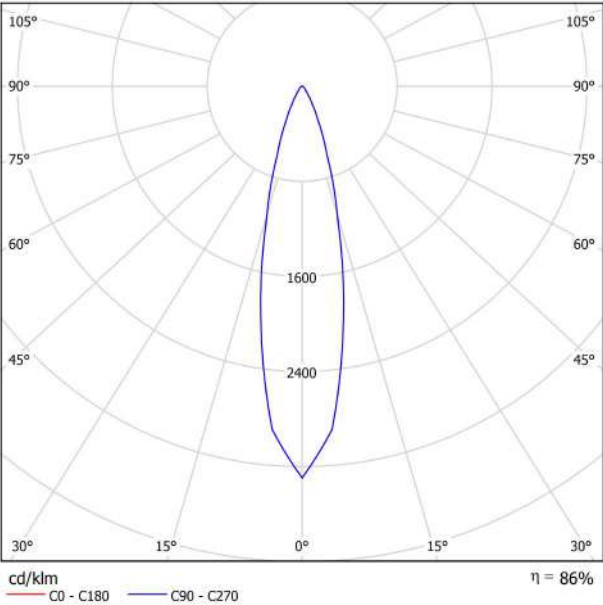


CONICAL DIAGRAM

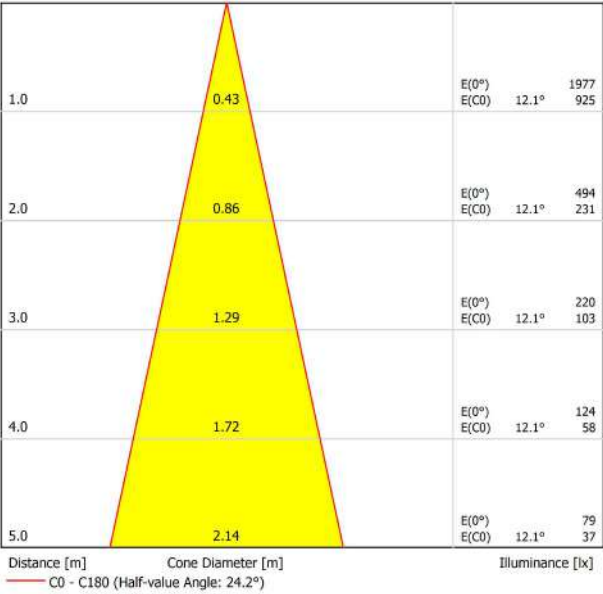



DIMENSIONS

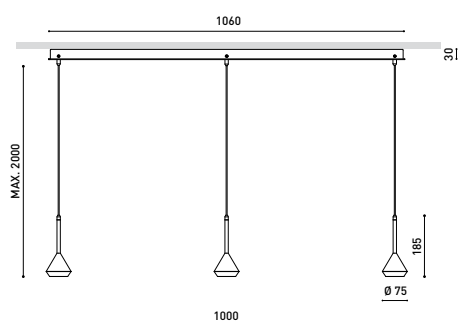

AWARDS



Name	SPIN 3 SURFACE 2M 24° 2700K MG-WT
Reference	A3910100MGWT
Color	Metallized gold
RAL	Electrolytic bath
Category	SUSPENSION

PRODUCT

Light source	LED
Gross luminous flux	3 x 600 Lm
Power	3 x 6,5 W
Power values of the system	21,67 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	24°
Lighting efficiency	86%
Efficacy	105 Lm/W
Current intensity	700 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	□
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


OTHER DATA

Ingress Protection	IP20
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Spin Surface is a version that allows it to be installed in places where it is impossible to access the false ceiling. Cement, concrete, vault ... its base, set to apply three luminaires, houses the driver and allows the luminaire to be installed on all types of surfaces.

POLAR DIAGRAM

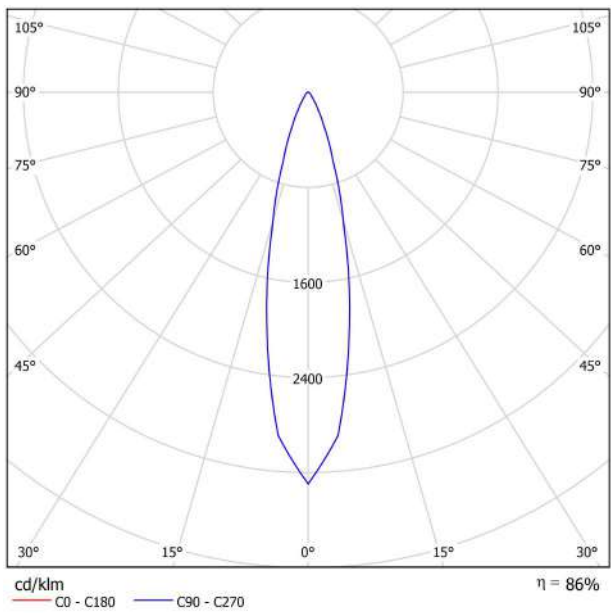


CONICAL DIAGRAM

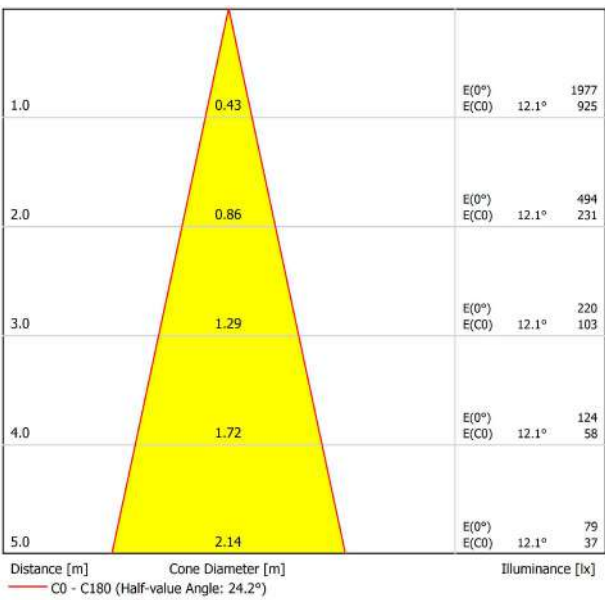



DIMENSIONS

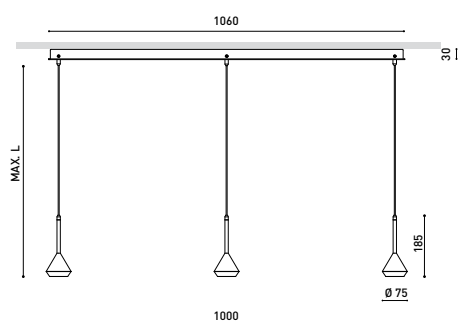

AWARDS



Name	SPIN 3 SURFACE 2M 24° 2700K NT-NT
Reference	A3910100NTNT
Color	Textured black
RAL	9005
Category	SURFACE

PRODUCT

Light source	LED
Gross luminous flux	3 x 600 Lm
Power	3 x 6,5 W
Power values of the system	21,67 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	24°
Lighting efficiency	86%
Efficacy	105 Lm/W
Current intensity	700 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Cord length	2 m
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Reduced dimensions, clear lines and a mechanized geometry combined in a pendant luminaire for accent lighting. Its ultra-thin cable gives Spin a sensation of aerial floatability.

POLAR DIAGRAM

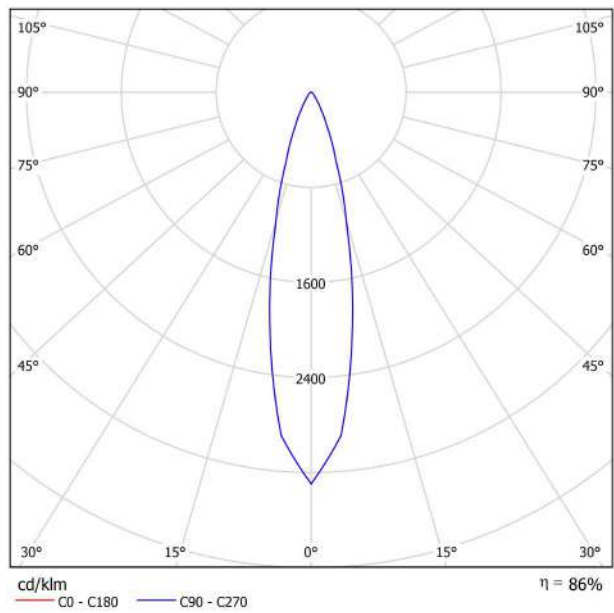


CONICAL DIAGRAM

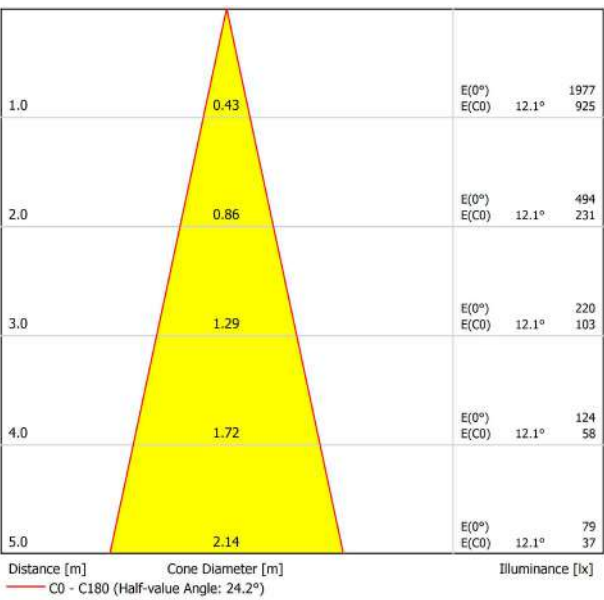



DIMENSIONS

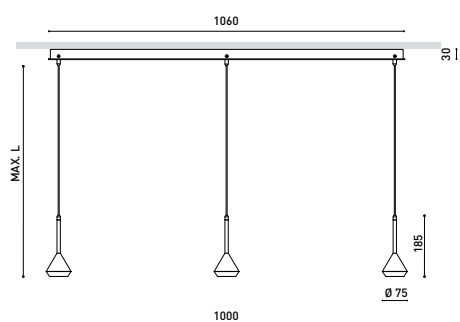

AWARDS



Name	SPIN 3 SURFACE 2M 24° 2700K NT-WT
Reference	A3910100NTWT
Color	Textured black
RAL	9005
Category	SURFACE

PRODUCT

Light source	LED
Gross luminous flux	3 x 600 Lm
Power	3 x 6,5 W
Power values of the system	21,67 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	24°
Lighting efficiency	86%
Efficacy	105 Lm/W
Current intensity	700 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Cord length	2 m
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Reduced dimensions, clear lines and a mechanized geometry combined in a pendant luminaire for accent lighting. Its ultra-thin cable gives Spin a sensation of aerial floatability.

POLAR DIAGRAM

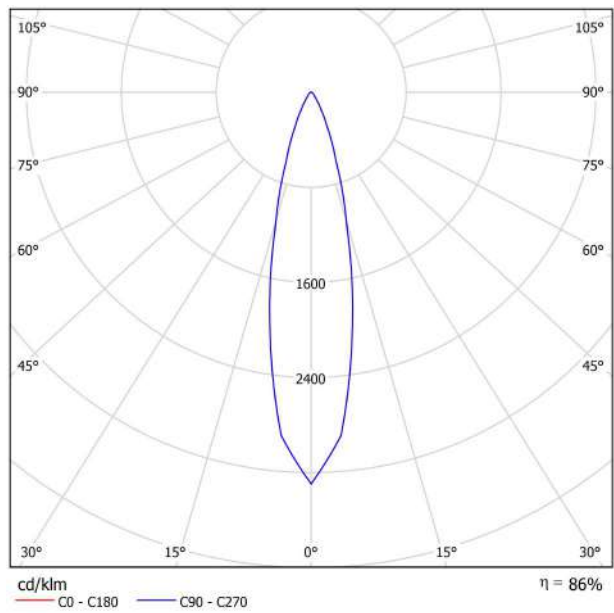


CONICAL DIAGRAM

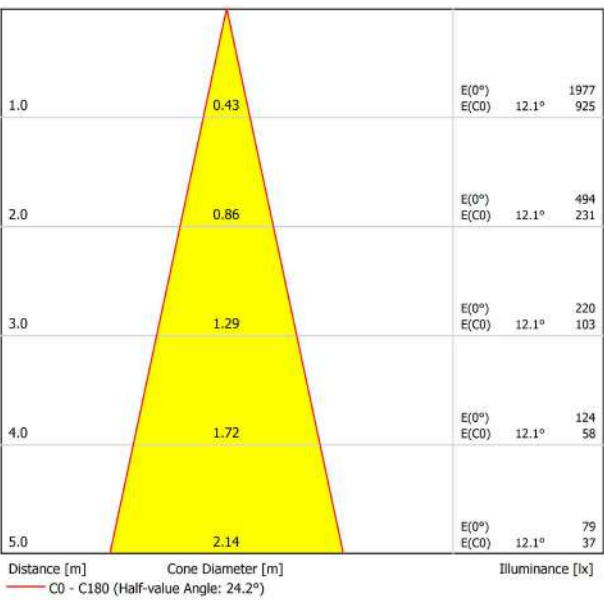



DIMENSIONS

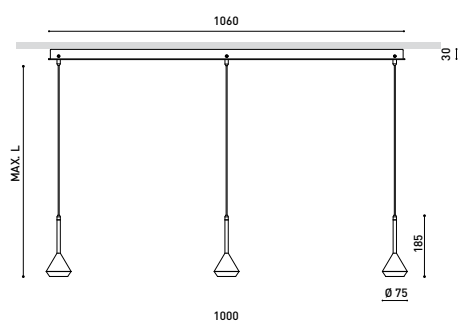

AWARDS



Name	SPIN 3 SURFACE 2M 24° 2700K WT-NT
Reference	A3910100WTNT
Color	Textured white
RAL	9016
Category	SURFACE

PRODUCT

Light source	LED
Gross luminous flux	3 x 600 Lm
Power	3 x 6,5 W
Power values of the system	21,67 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	24°
Lighting efficiency	86%
Efficacy	92 Lm/W
Current intensity	700 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Cord length	2 m
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Reduced dimensions, clear lines and a mechanized geometry combined in a pendant luminaire for accent lighting. Its ultra-thin cable gives Spin a sensation of aerial floatability.

POLAR DIAGRAM

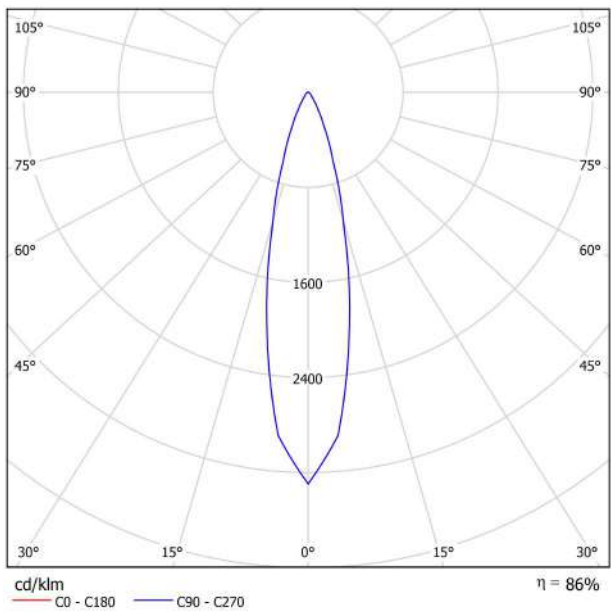


CONICAL DIAGRAM

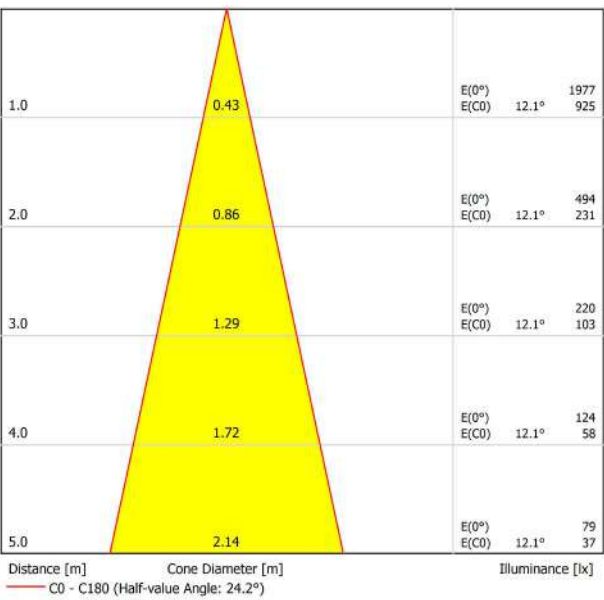



DIMENSIONS

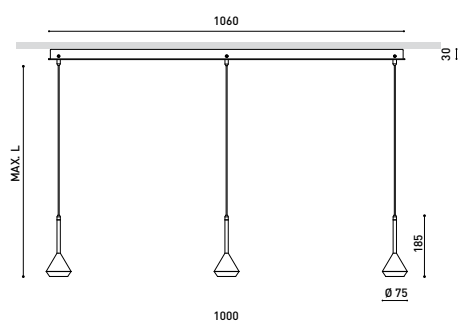

AWARDS



Name	SPIN 3 SURFACE 2M 24° 2700K WT-WT
Reference	A3910100WTWT
Color	Textured white
RAL	9016
Category	SURFACE

PRODUCT

Light source	LED
Gross luminous flux	3 x 600 Lm
Power	3 x 6,5 W
Power values of the system	21,67 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	24°
Lighting efficiency	86%
Efficacy	92 Lm/W
Current intensity	700 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Cord length	2 m
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Reduced dimensions, clear lines and a mechanized geometry combined in a pendant luminaire for accent lighting. Its ultra-thin cable gives Spin a sensation of aerial floatability.

POLAR DIAGRAM

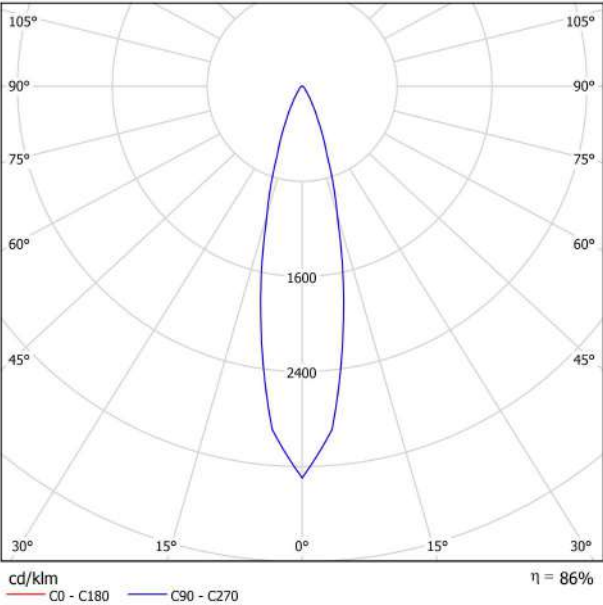


CONICAL DIAGRAM

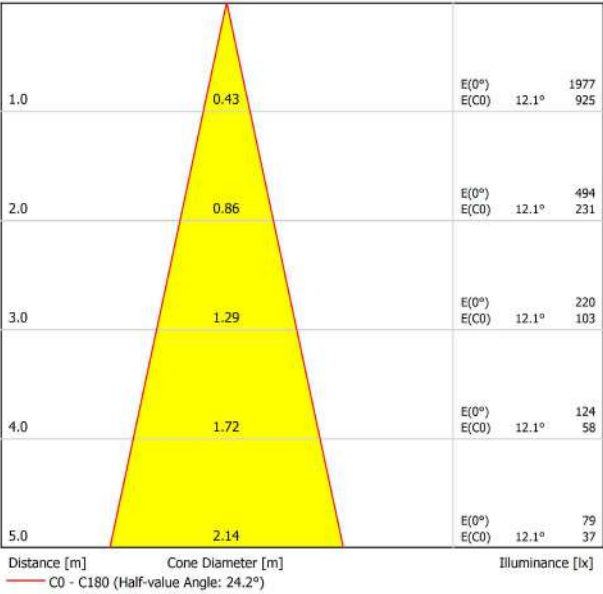



DIMENSIONS

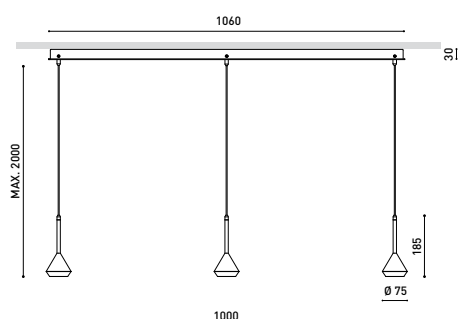

AWARDS



Name	SPIN 3 SURFACE 2M 24° 3000K MC-NT
Reference	A3910101MCNT
Color	Metallized copper
RAL	Electrolytic bath
Category	SUSPENSION

PRODUCT

Light source	LED
Gross luminous flux	3 x 630 Lm
Power	3 x 6,5 W
Power values of the system	21,67 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	24°
Lighting efficiency	86%
Efficacy	92 Lm/W
Current intensity	700 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


OTHER DATA

Ingress Protection	IP20
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Spin Surface is a version that allows it to be installed in places where it is impossible to access the false ceiling. Cement, concrete, vault ... its base, set to apply three luminaires, houses the driver and allows the luminaire to be installed on all types of surfaces.

POLAR DIAGRAM

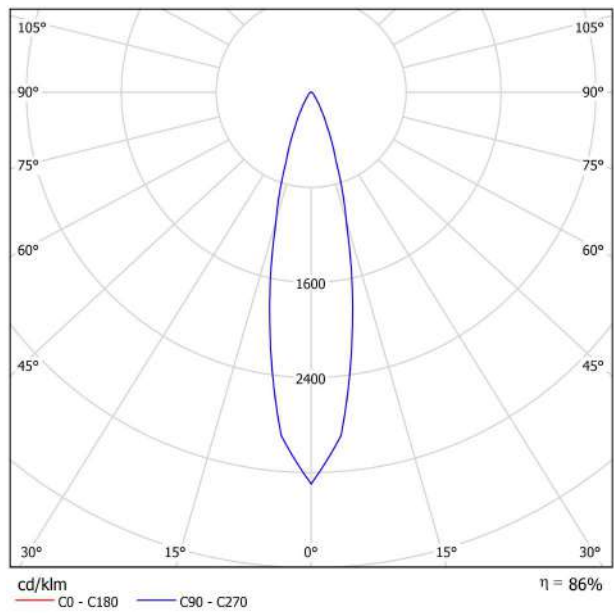


CONICAL DIAGRAM

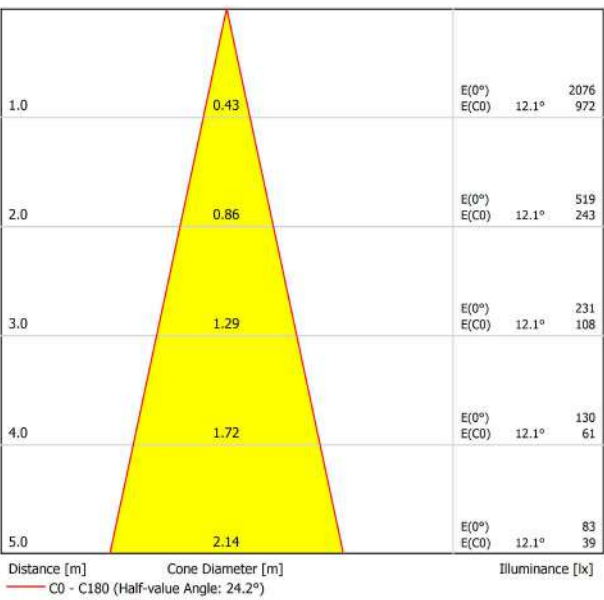



DIMENSIONS

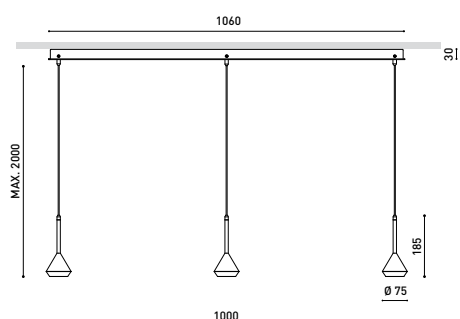

AWARDS



Name	SPIN 3 SURFACE 2M 24° 3000K MC-WT
Reference	A3910101MCWT
Color	Metallized copper
RAL	Electrolytic bath
Category	SUSPENSION

PRODUCT

Light source	LED
Gross luminous flux	3 x 630 Lm
Power	3 x 6,5 W
Power values of the system	21,67 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	24°
Lighting efficiency	86%
Efficacy	92 Lm/W
Current intensity	700 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


OTHER DATA

Ingress Protection	IP20
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Spin Surface is a version that allows it to be installed in places where it is impossible to access the false ceiling. Cement, concrete, vault ... its base, set to apply three luminaires, houses the driver and allows the luminaire to be installed on all types of surfaces.

POLAR DIAGRAM

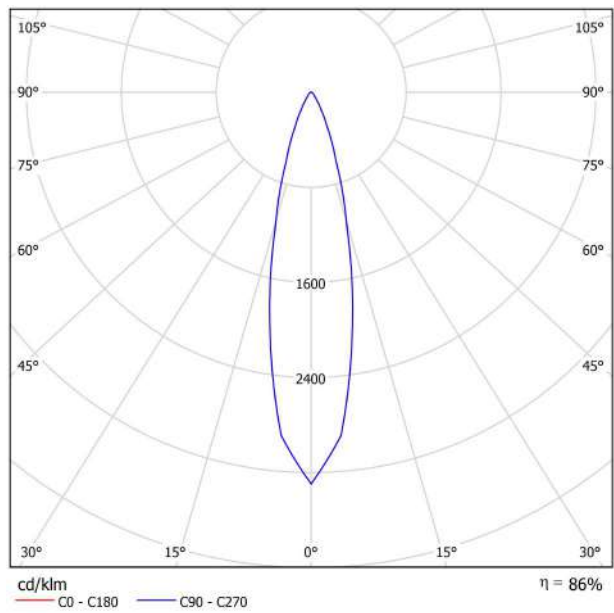


CONICAL DIAGRAM

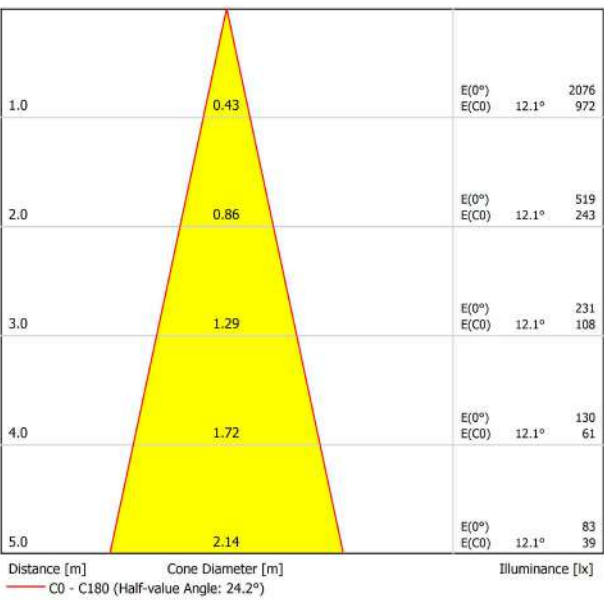



DIMENSIONS

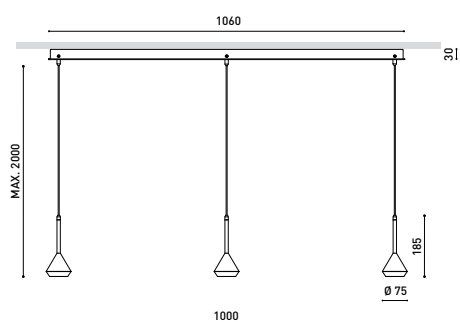

AWARDS



Name	SPIN 3 SURFACE 2M 24° 3000K MG-NT
Reference	A3910101MGNT
Color	Metallized gold
RAL	Electrolytic bath
Category	SUSPENSION

PRODUCT

Light source	LED
Gross luminous flux	3 x 630 Lm
Power	3 x 6,5 W
Power values of the system	21,67 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	24°
Lighting efficiency	86%
Efficacy	92 Lm/W
Current intensity	700 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


OTHER DATA

Ingress Protection	IP20
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Spin Surface is a version that allows it to be installed in places where it is impossible to access the false ceiling. Cement, concrete, vault ... its base, set to apply three luminaires, houses the driver and allows the luminaire to be installed on all types of surfaces.

POLAR DIAGRAM

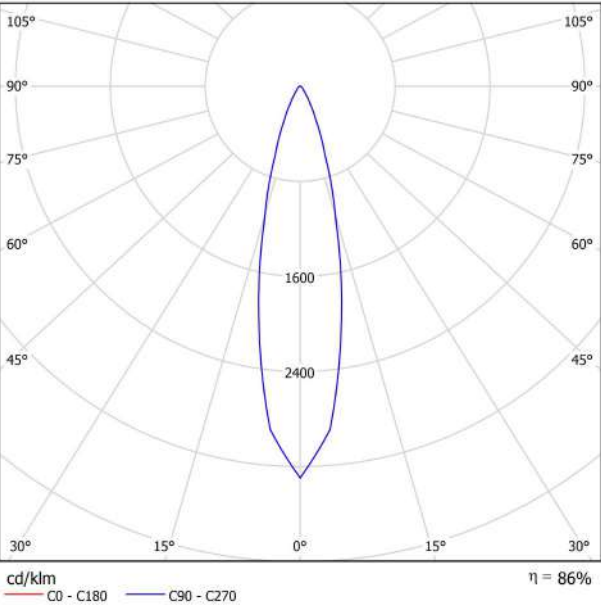


CONICAL DIAGRAM

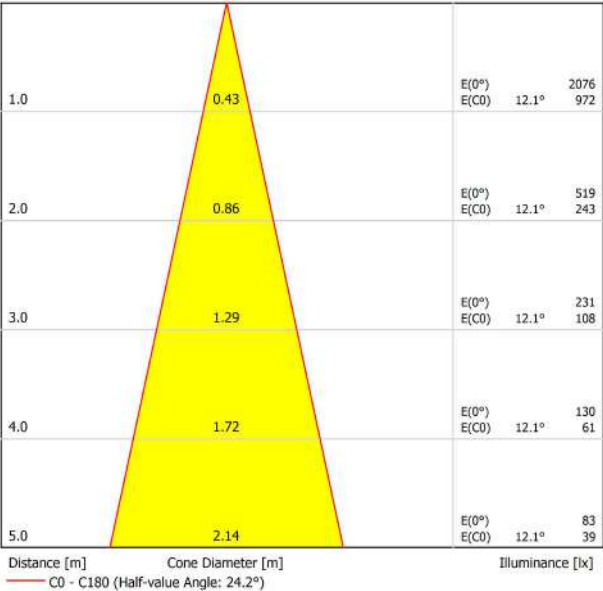



DIMENSIONS

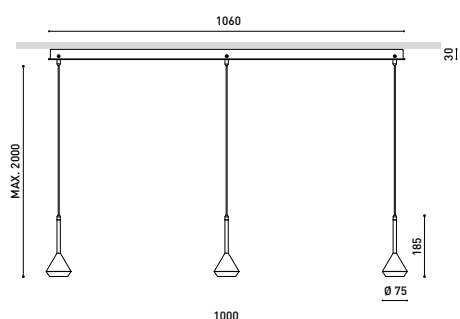

AWARDS



Name	SPIN 3 SURFACE 2M 24° 3000K MG-WT
Reference	A3910101MGWT
Color	Metallized gold
RAL	Electrolytic bath
Category	SUSPENSION

PRODUCT

Light source	LED
Gross luminous flux	3 x 630 Lm
Power	3 x 6,5 W
Power values of the system	21,67 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	24°
Lighting efficiency	86%
Efficacy	92 Lm/W
Current intensity	700 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


OTHER DATA

Ingress Protection	IP20
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Spin Surface is a version that allows it to be installed in places where it is impossible to access the false ceiling. Cement, concrete, vault ... its base, set to apply three luminaires, houses the driver and allows the luminaire to be installed on all types of surfaces.

POLAR DIAGRAM

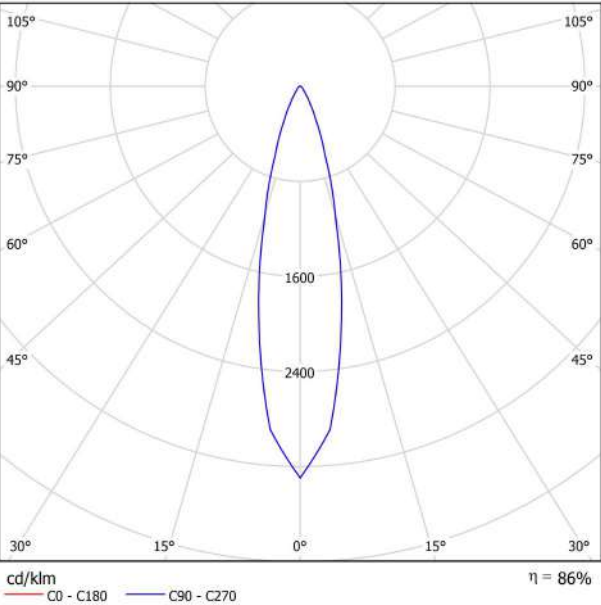


CONICAL DIAGRAM

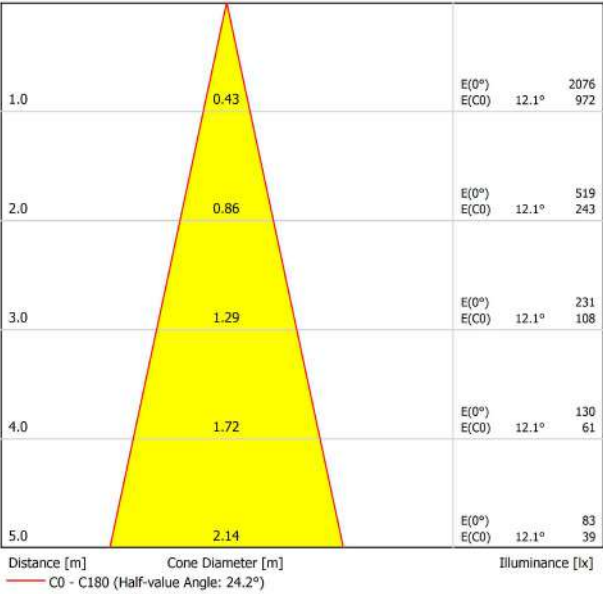



DIMENSIONS

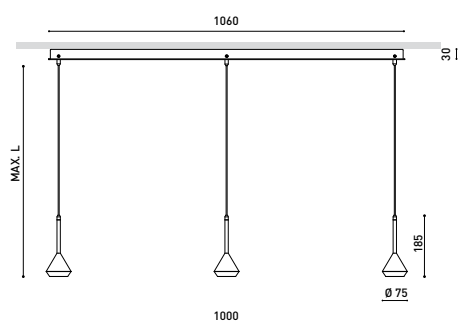

AWARDS



Name	SPIN 3 SURFACE 2M 24° 3000K NT-NT
Reference	A3910101NTNT
Color	Textured black
RAL	9005
Category	SURFACE

PRODUCT

Light source	LED
Gross luminous flux	3 x 630 Lm
Power	3 x 6,5 W
Power values of the system	21,67 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	24°
Lighting efficiency	86%
Efficacy	92 Lm/W
Current intensity	700 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Cord length	2 m
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Reduced dimensions, clear lines and a mechanized geometry combined in a pendant luminaire for accent lighting. Its ultra-thin cable gives Spin a sensation of aerial floatability.

POLAR DIAGRAM

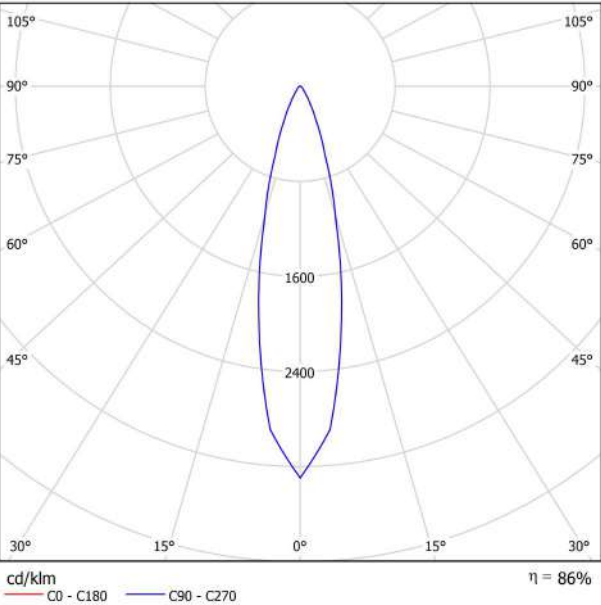


CONICAL DIAGRAM

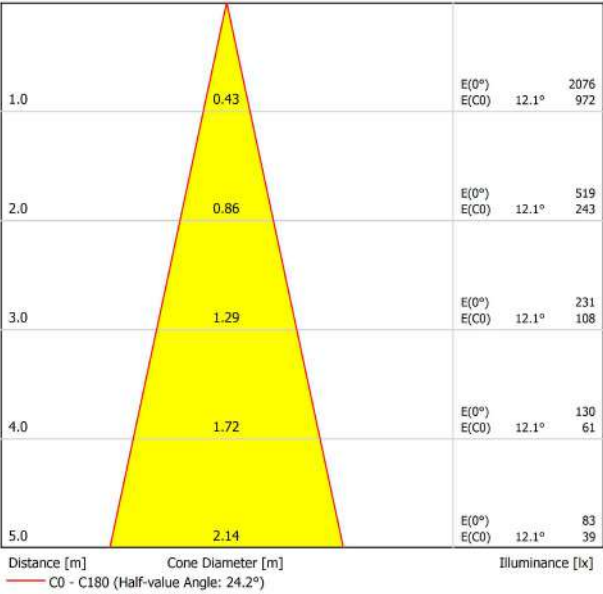



DIMENSIONS

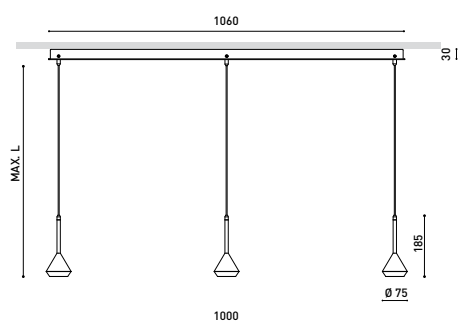

AWARDS



Name	SPIN 3 SURFACE 2M 24° 3000K NT-WT
Reference	A3910101NTWT
Color	Textured black
RAL	9005
Category	SURFACE

PRODUCT

Light source	LED
Gross luminous flux	3 x 630 Lm
Power	3 x 6,5 W
Power values of the system	21,67 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	24°
Lighting efficiency	86%
Efficacy	92 Lm/W
Current intensity	700 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Cord length	2 m
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Reduced dimensions, clear lines and a mechanized geometry combined in a pendant luminaire for accent lighting. Its ultra-thin cable gives Spin a sensation of aerial floatability.

POLAR DIAGRAM

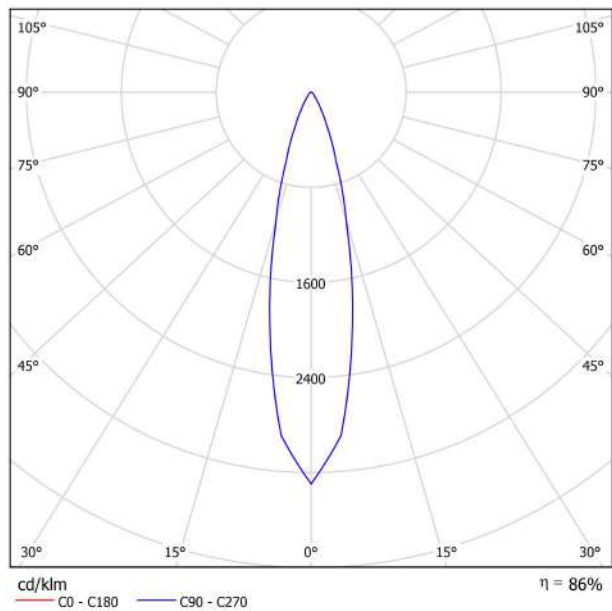


CONICAL DIAGRAM

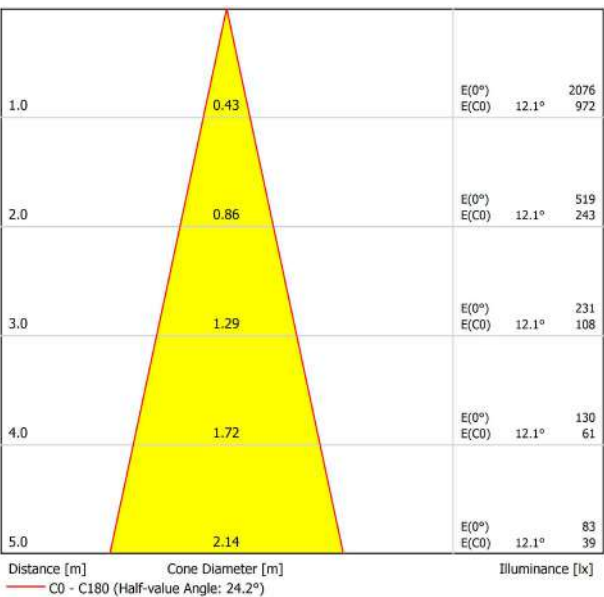



DIMENSIONS

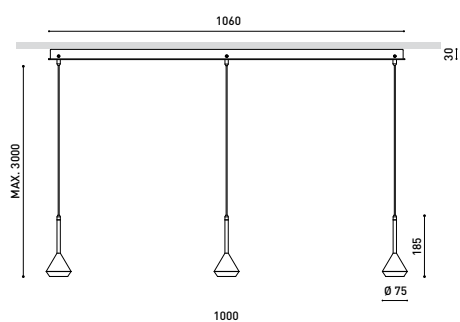

AWARDS



Name	SPIN 3 SURFACE 3M 40° DIM DALI 4000K MG-WT
Reference	A3911212MGWT
Color	Metallized gold
RAL	Electrolytic bath
Category	SUSPENSION

PRODUCT

Light source	LED
Gross luminous flux	3 x 680 Lm
Power	3 x 6,5 W
Power values of the system	23,78 W
Colour temperature	4000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	40°
Lighting efficiency	84%
Efficacy	105 Lm/W
Current intensity	700 mA
Dimming	DALI - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	□
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


OTHER DATA

Ingress Protection	IP20
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Spin Surface is a version that allows it to be installed in places where it is impossible to access the false ceiling. Cement, concrete, vault ... its base, set to apply three luminaires, houses the driver and allows the luminaire to be installed on all types of surfaces.

POLAR DIAGRAM

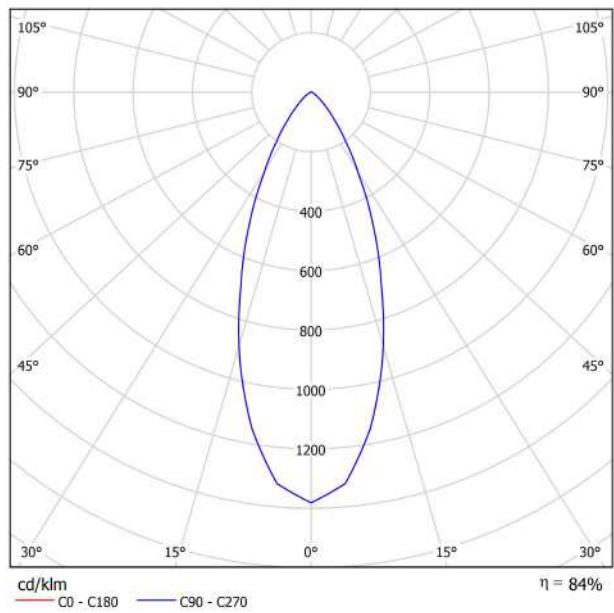


CONICAL DIAGRAM

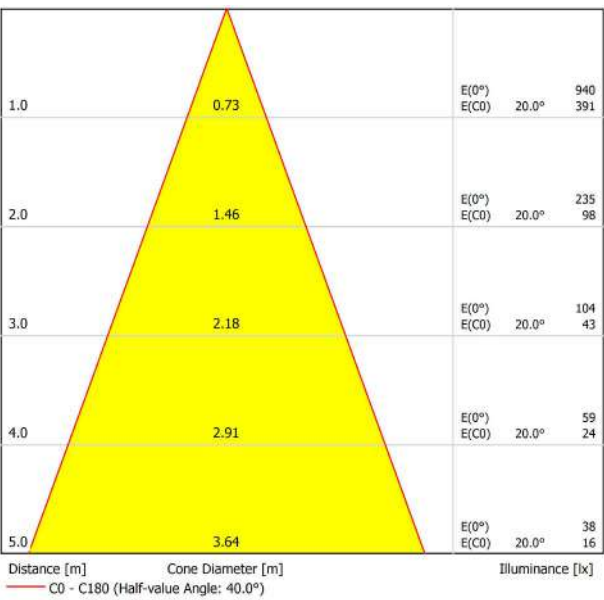



DIMENSIONS

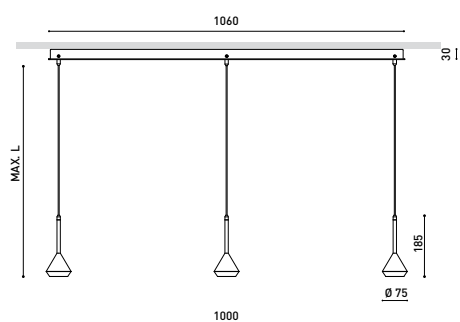

AWARDS



Name	SPIN 3 SURFACE 3M 40° DIM DALI 4000K NT-NT
Reference	A3911212NTNT
Color	Textured black
RAL	9005
Category	SURFACE

PRODUCT

Light source	LED
Gross luminous flux	3 x 680 Lm
Power	3 x 6,5 W
Power values of the system	23,78 W
Colour temperature	4000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	40°
Lighting efficiency	84%
Efficacy	105 Lm/W
Current intensity	700 mA
Dimming	DALI - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Cord length	3 m
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Reduced dimensions, clear lines and a mechanized geometry combined in a pendant luminaire for accent lighting. Its ultra-thin cable gives Spin a sensation of aerial floatability.

POLAR DIAGRAM

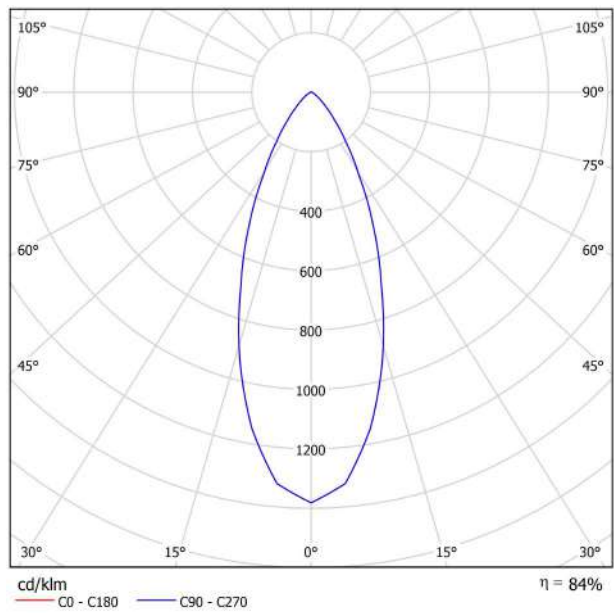


CONICAL DIAGRAM

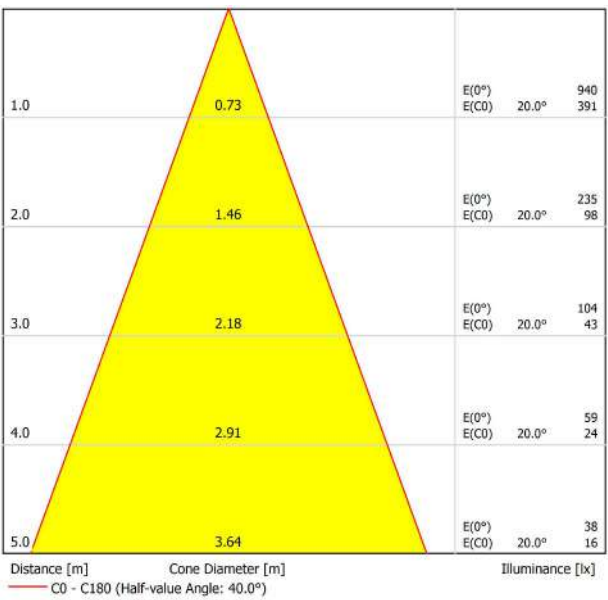



DIMENSIONS

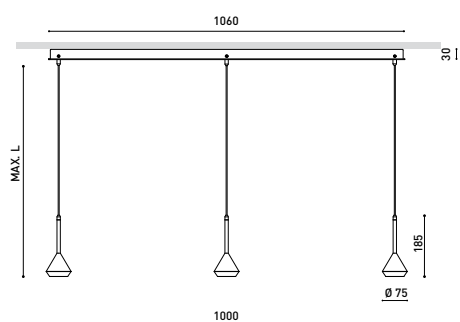

AWARDS



Name	SPIN 3 SURFACE 3M 40° DIM DALI 4000K NT-WT
Reference	A3911212NTWT
Color	Textured black
RAL	9005
Category	SURFACE

PRODUCT

Light source	LED
Gross luminous flux	3 x 680 Lm
Power	3 x 6,5 W
Power values of the system	23,78 W
Colour temperature	4000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	40°
Lighting efficiency	84%
Efficacy	105 Lm/W
Current intensity	700 mA
Dimming	DALI - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


OTHER DATA

Ingress Protection	IP20
Cord length	3 m
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Reduced dimensions, clear lines and a mechanized geometry combined in a pendant luminaire for accent lighting. Its ultra-thin cable gives Spin a sensation of aerial floatability.

POLAR DIAGRAM

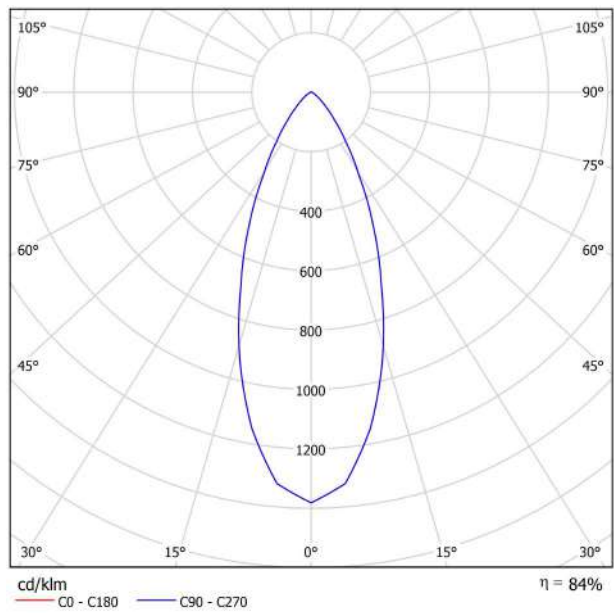


CONICAL DIAGRAM

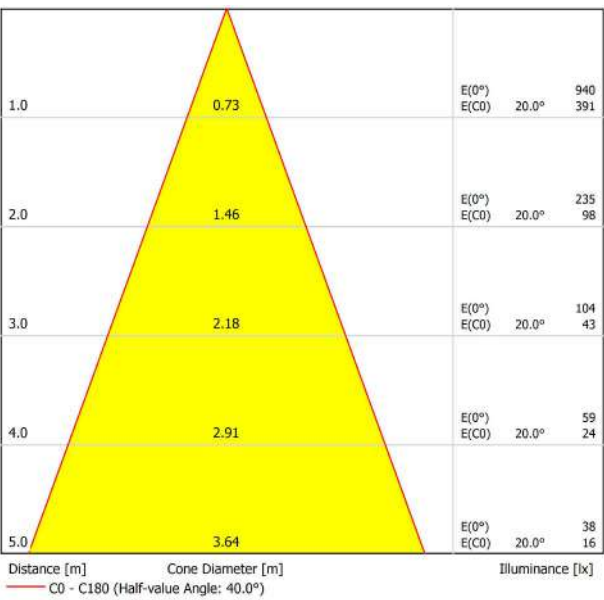



DIMENSIONS

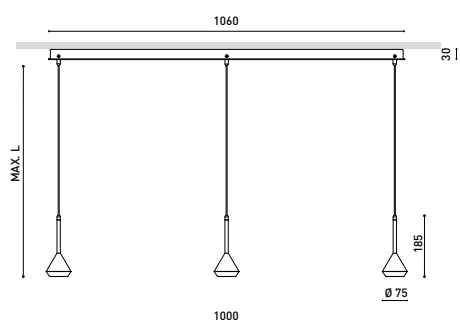

AWARDS



Name	SPIN 3 SURFACE 3M 40° DIM DALI 4000K WT-NT
Reference	A3911212WTNT
Color	Textured white
RAL	9016
Category	SURFACE

PRODUCT

Light source	LED
Gross luminous flux	3 x 680 Lm
Power	3 x 6,5 W
Power values of the system	23,78 W
Colour temperature	4000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	40°
Lighting efficiency	84%
Efficacy	105 Lm/W
Current intensity	700 mA
Dimming	DALI - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Cord length	3 m
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Reduced dimensions, clear lines and a mechanized geometry combined in a pendant luminaire for accent lighting. Its ultra-thin cable gives Spin a sensation of aerial floatability.

POLAR DIAGRAM

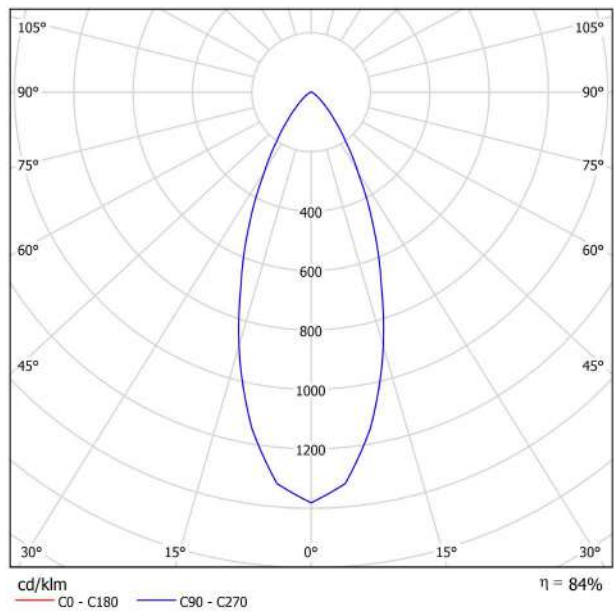


CONICAL DIAGRAM

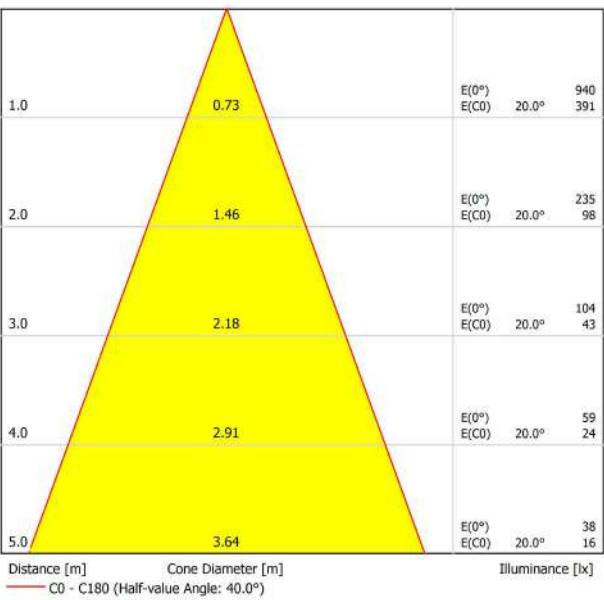



DIMENSIONS

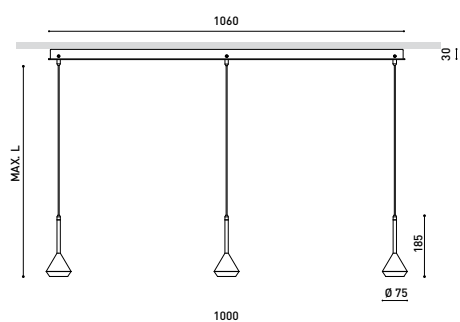

AWARDS



Name	SPIN 3 SURFACE 3M 40° DIM DALI 4000K WT-WT
Reference	A3911212WTWT
Color	Textured white
RAL	9016
Category	SURFACE

PRODUCT

SPIN 3 SURFACE 3M 40° DIM DALI 4000K WT-WT
A3911212WTWT
Textured white
9016
SURFACE

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	3 x 680 Lm
Power	3 x 6,5 W
Power values of the system	23,78 W
Colour temperature	4000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	40°
Lighting efficiency	84%
Efficacy	105 Lm/W
Current intensity	700 mA
Dimming	DALI - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Cord length	3 m
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Reduced dimensions, clear lines and a mechanized geometry combined in a pendant luminaire for accent lighting. Its ultra-thin cable gives Spin a sensation of aerial floatability.

POLAR DIAGRAM

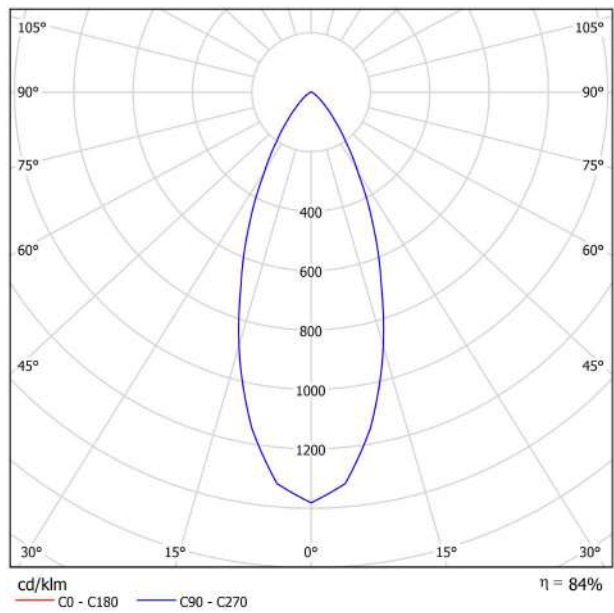


CONICAL DIAGRAM

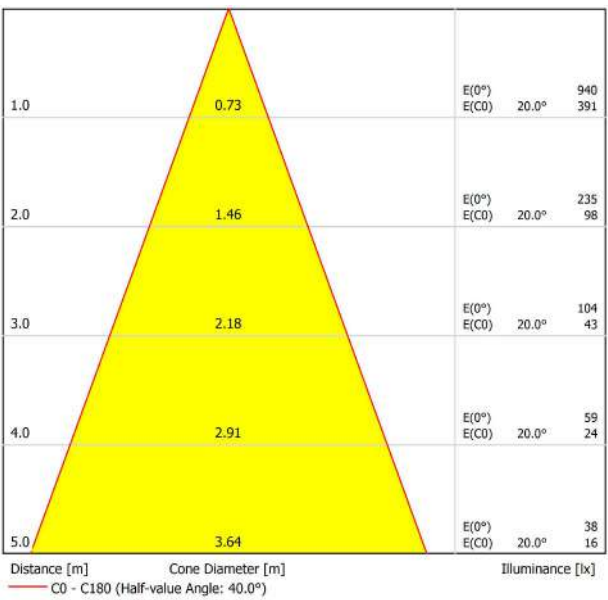



DIMENSIONS

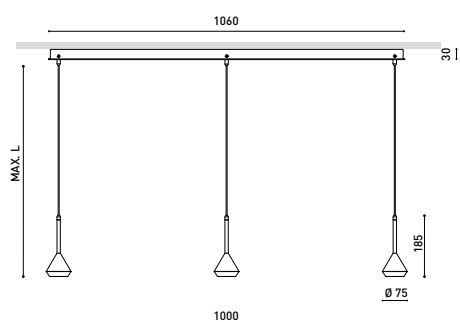

AWARDS



Name	SPIN 3 SURFACE 3M 24° DIM DALI 4000K WT-WT
Reference	A3911202WTWT
Color	Textured white
RAL	9016
Category	SURFACE

PRODUCT

Light source	LED
Gross luminous flux	3 x 680 Lm
Power	3 x 6,5 W
Power values of the system	23,78 W
Colour temperature	4000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	24°
Lighting efficiency	86%
Efficacy	105 Lm/W
Current intensity	700 mA
Dimming	DALI - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Cord length	3 m
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Reduced dimensions, clear lines and a mechanized geometry combined in a pendant luminaire for accent lighting. Its ultra-thin cable gives Spin a sensation of aerial floatability.

POLAR DIAGRAM

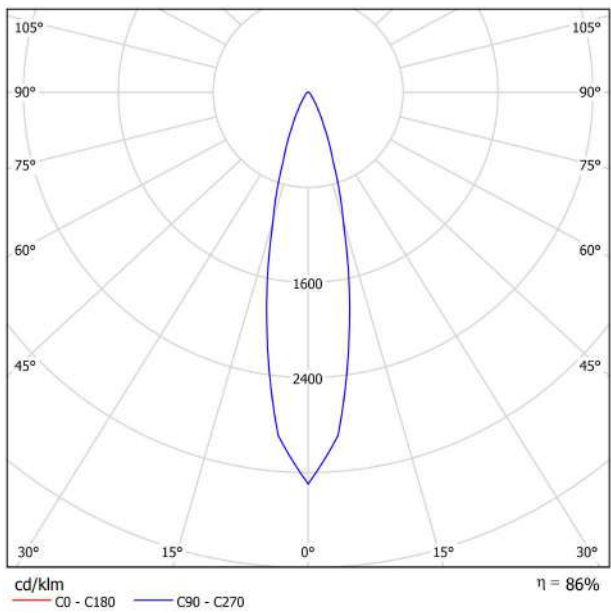


CONICAL DIAGRAM

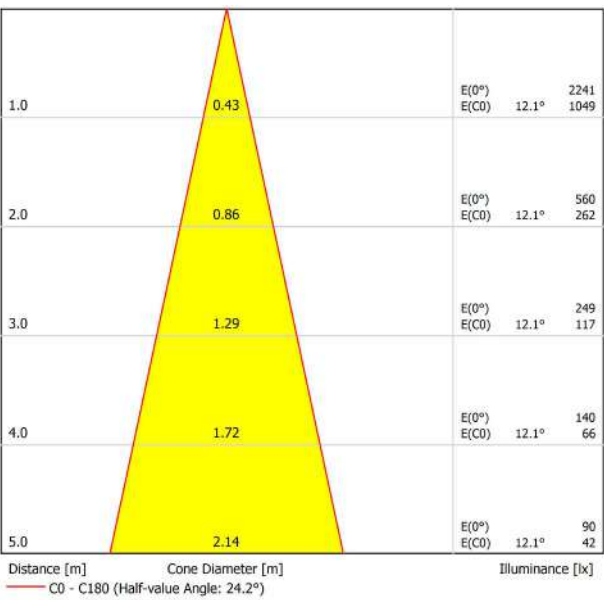



DIMENSIONS

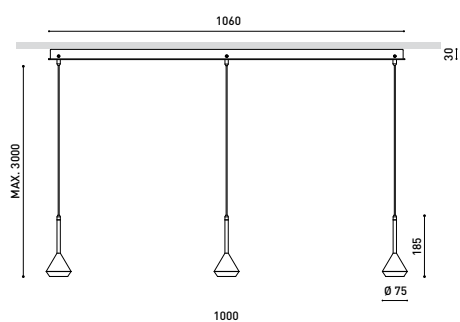

AWARDS



Name	SPIN 3 SURFACE 3M 40° DIM DALI 2700K MC-NT
Reference	A3911210MCNT
Color	Metallized copper
RAL	Electrolytic bath
Category	SUSPENSION

PRODUCT

Light source	LED
Gross luminous flux	3 x 600 Lm
Power	3 x 6,5 W
Power values of the system	23,78 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	40°
Lighting efficiency	84%
Efficacy	92 Lm/W
Current intensity	700 mA
Dimming	DALI - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


OTHER DATA

Ingress Protection	IP20
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Spin Surface is a version that allows it to be installed in places where it is impossible to access the false ceiling. Cement, concrete, vault ... its base, set to apply three luminaires, houses the driver and allows the luminaire to be installed on all types of surfaces.

POLAR DIAGRAM

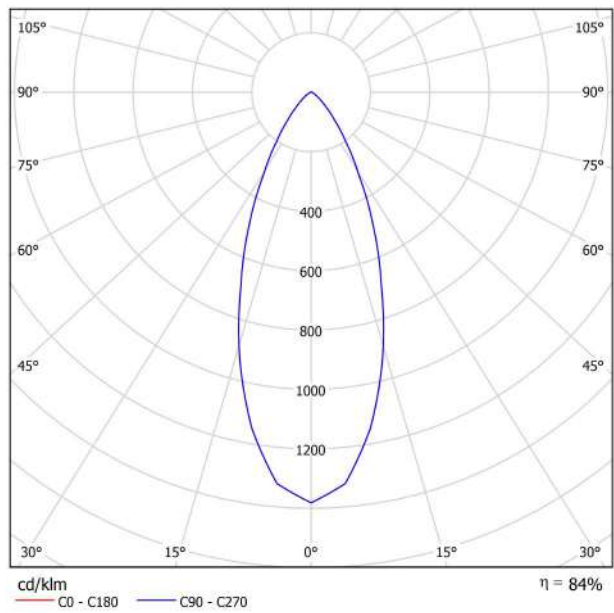


CONICAL DIAGRAM

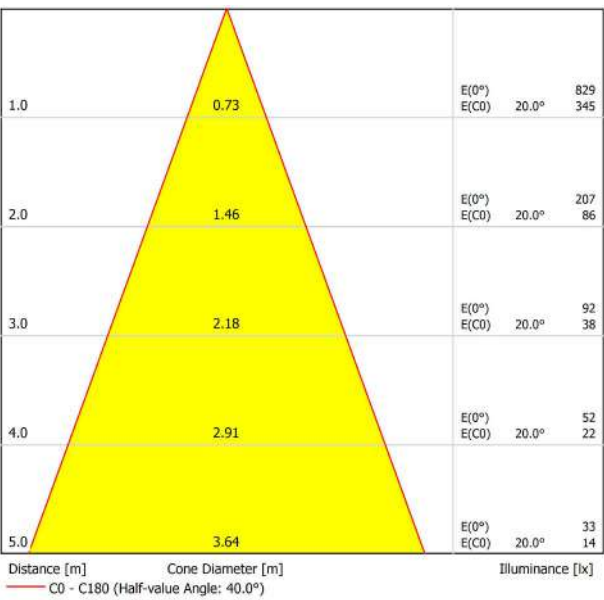



DIMENSIONS

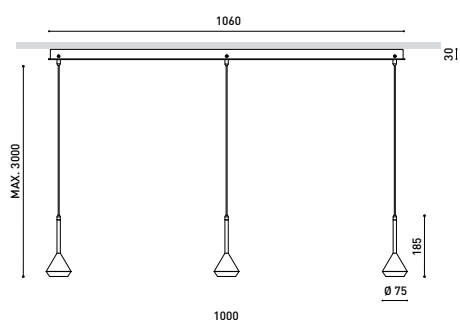

AWARDS



Name	SPIN 3 SURFACE 3M 40° DIM DALI 2700K MC-WT
Reference	A3911210MCWT
Color	Metallized copper
RAL	Electrolytic bath
Category	SUSPENSION

PRODUCT

Light source	LED
Gross luminous flux	3 x 600 Lm
Power	3 x 6,5 W
Power values of the system	23,78 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	40°
Lighting efficiency	84%
Efficacy	92 Lm/W
Current intensity	700 mA
Dimming	DALI - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


OTHER DATA

Ingress Protection	IP20
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Spin Surface is a version that allows it to be installed in places where it is impossible to access the false ceiling. Cement, concrete, vault ... its base, set to apply three luminaires, houses the driver and allows the luminaire to be installed on all types of surfaces.

POLAR DIAGRAM

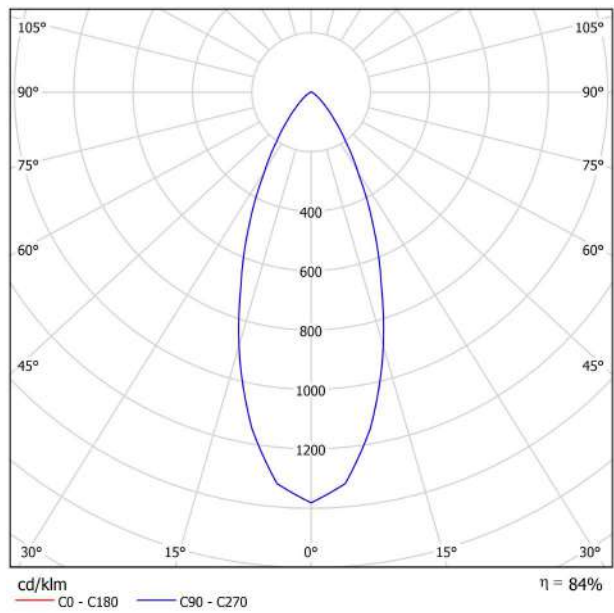


CONICAL DIAGRAM

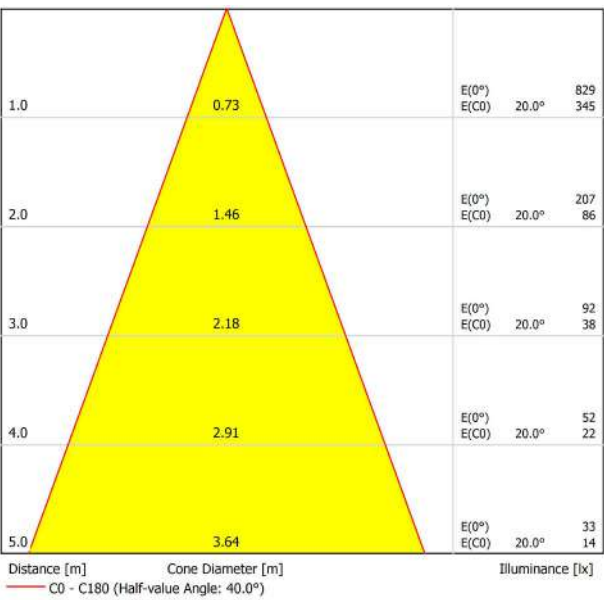



DIMENSIONS

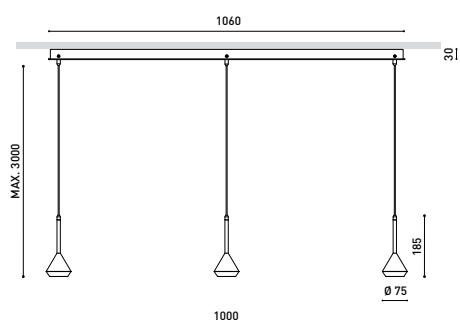

AWARDS



Name	SPIN 3 SURFACE 3M 40° DIM DALI 2700K MG-NT
Reference	A3911210MGNT
Color	Metallized gold
RAL	Electrolytic bath
Category	SUSPENSION

PRODUCT

Light source	LED
Gross luminous flux	3 x 600 Lm
Power	3 x 6,5 W
Power values of the system	23,78 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	40°
Lighting efficiency	84%
Efficacy	92 Lm/W
Current intensity	700 mA
Dimming	DALI - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


OTHER DATA

Ingress Protection	IP20
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Spin Surface is a version that allows it to be installed in places where it is impossible to access the false ceiling. Cement, concrete, vault ... its base, set to apply three luminaires, houses the driver and allows the luminaire to be installed on all types of surfaces.

POLAR DIAGRAM

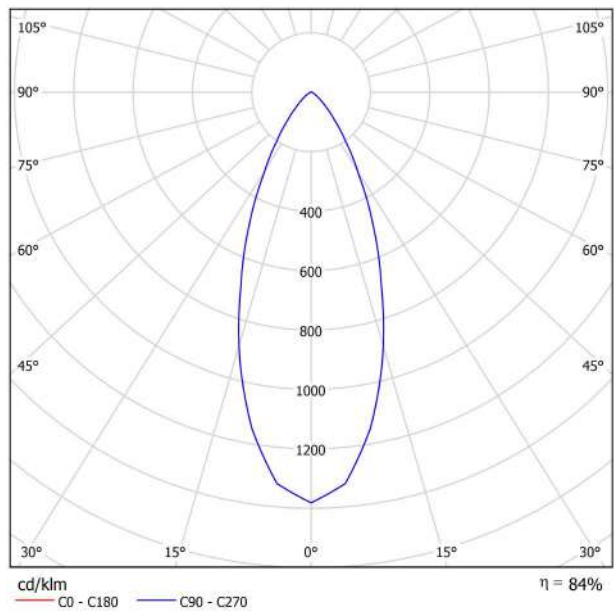


CONICAL DIAGRAM

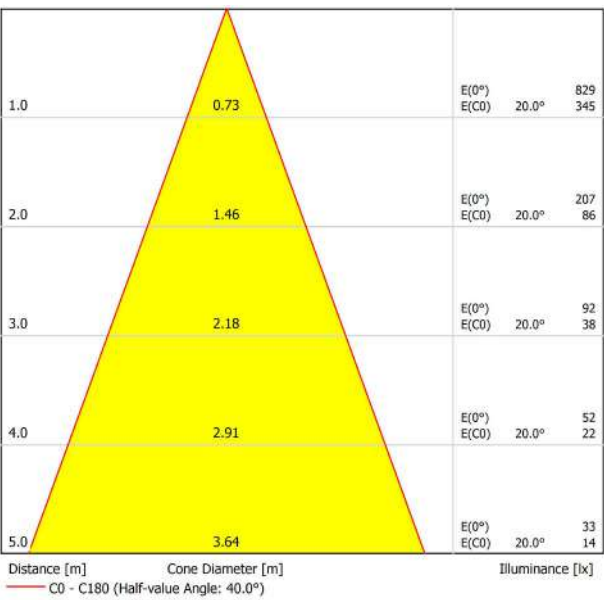



DIMENSIONS

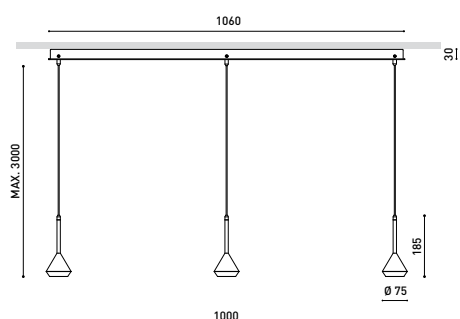

AWARDS



Name	SPIN 3 SURFACE 3M 40° DIM DALI 2700K MG-WT
Reference	A3911210MGWT
Color	Metallized gold
RAL	Electrolytic bath
Category	SUSPENSION

PRODUCT

Light source	LED
Gross luminous flux	3 x 600 Lm
Power	3 x 6,5 W
Power values of the system	23,78 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	40°
Lighting efficiency	84%
Efficacy	92 Lm/W
Current intensity	700 mA
Dimming	DALI - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


OTHER DATA

Ingress Protection	IP20
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Spin Surface is a version that allows it to be installed in places where it is impossible to access the false ceiling. Cement, concrete, vault ... its base, set to apply three luminaires, houses the driver and allows the luminaire to be installed on all types of surfaces.

POLAR DIAGRAM

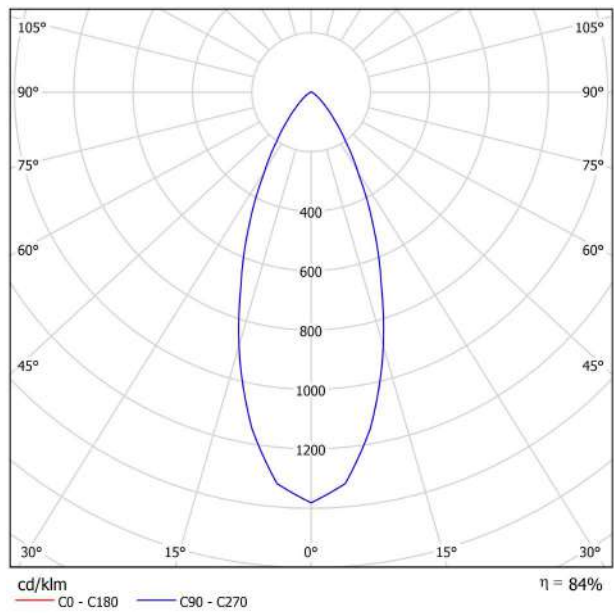


CONICAL DIAGRAM

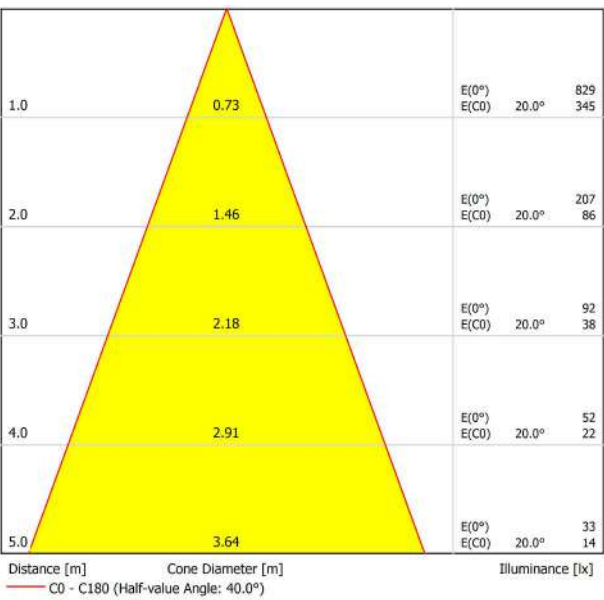



DIMENSIONS

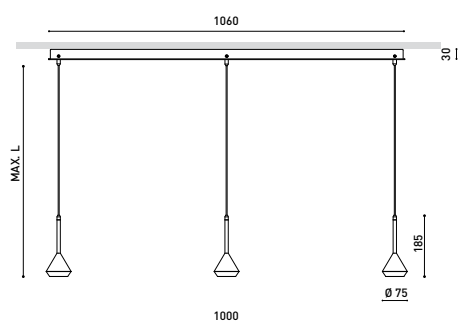

AWARDS



Name	SPIN 3 SURFACE 3M 40° DIM DALI 2700K NT-NT
Reference	A3911210NTNT
Color	Textured black
RAL	9005
Category	SURFACE

PRODUCT

Light source	LED
Gross luminous flux	3 x 600 Lm
Power	3 x 6,5 W
Power values of the system	23,78 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	40°
Lighting efficiency	84%
Efficacy	92 Lm/W
Current intensity	700 mA
Dimming	DALI - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Cord length	3 m
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Reduced dimensions, clear lines and a mechanized geometry combined in a pendant luminaire for accent lighting. Its ultra-thin cable gives Spin a sensation of aerial floatability.

POLAR DIAGRAM

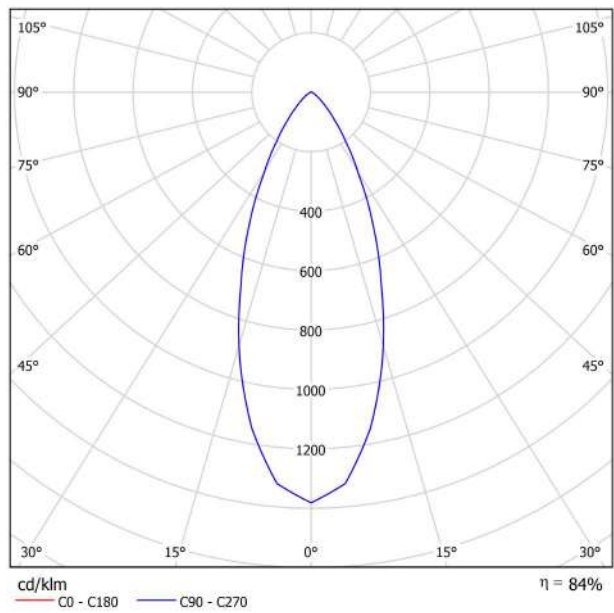


CONICAL DIAGRAM

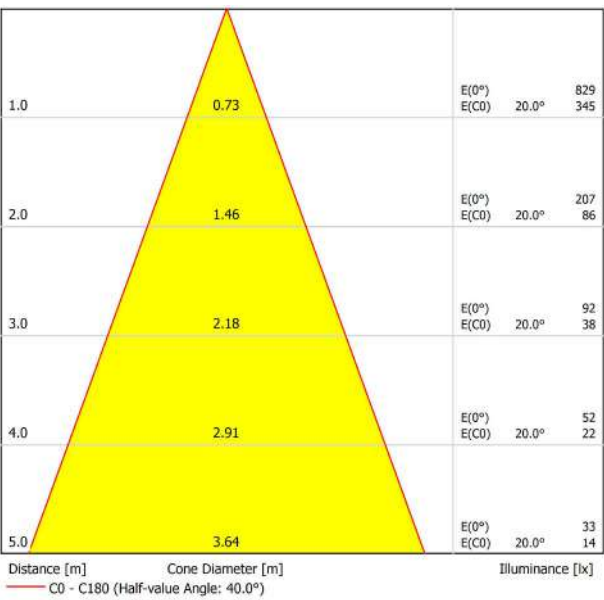



DIMENSIONS

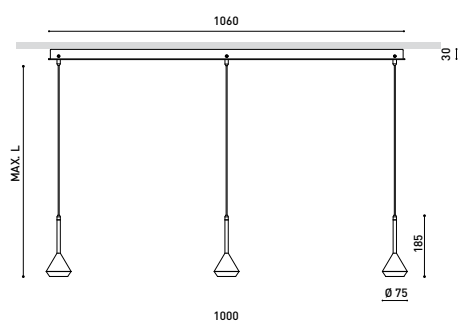

AWARDS



Name	SPIN 3 SURFACE 3M 40° DIM DALI 2700K NT-WT
Reference	A3911210NTWT
Color	Textured black
RAL	9005
Category	SURFACE

PRODUCT

Light source	LED
Gross luminous flux	3 x 600 Lm
Power	3 x 6,5 W
Power values of the system	23,78 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	40°
Lighting efficiency	84%
Efficacy	92 Lm/W
Current intensity	700 mA
Dimming	DALI - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Cord length	3 m
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Reduced dimensions, clear lines and a mechanized geometry combined in a pendant luminaire for accent lighting. Its ultra-thin cable gives Spin a sensation of aerial floatability.

POLAR DIAGRAM

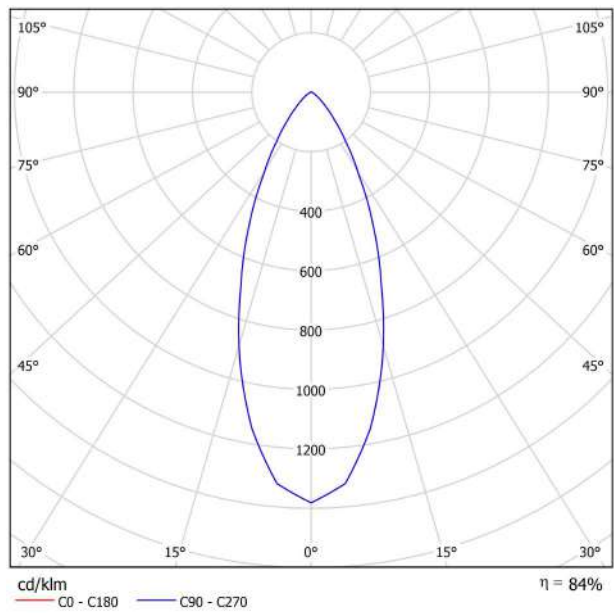


CONICAL DIAGRAM

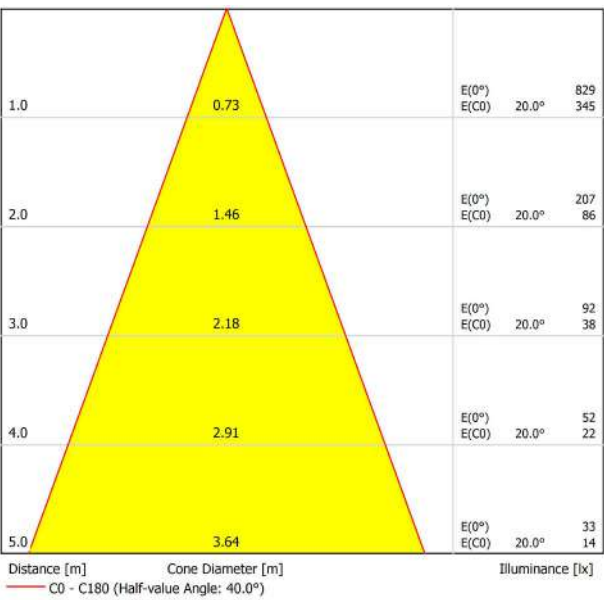



DIMENSIONS

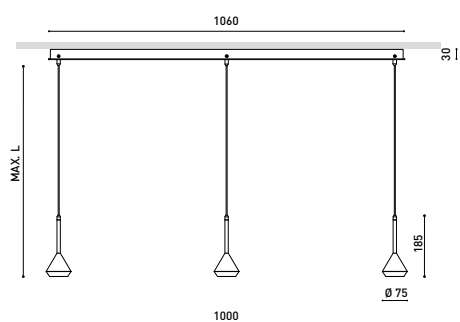

AWARDS



Name	SPIN 3 SURFACE 3M 40° DIM DALI 2700K WT-NT
Reference	A3911210WTNT
Color	Textured white
RAL	9016
Category	SURFACE

PRODUCT

SPIN 3 SURFACE 3M 40° DIM DALI 2700K WT-NT

A3911210WTNT

Textured white

9016

SURFACE

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	3 x 600 Lm
Power	3 x 6,5 W
Power values of the system	23,78 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	40°
Lighting efficiency	84%
Efficacy	92 Lm/W
Current intensity	700 mA
Dimming	DALI - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Cord length	3 m
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Reduced dimensions, clear lines and a mechanized geometry combined in a pendant luminaire for accent lighting. Its ultra-thin cable gives Spin a sensation of aerial floatability.

POLAR DIAGRAM

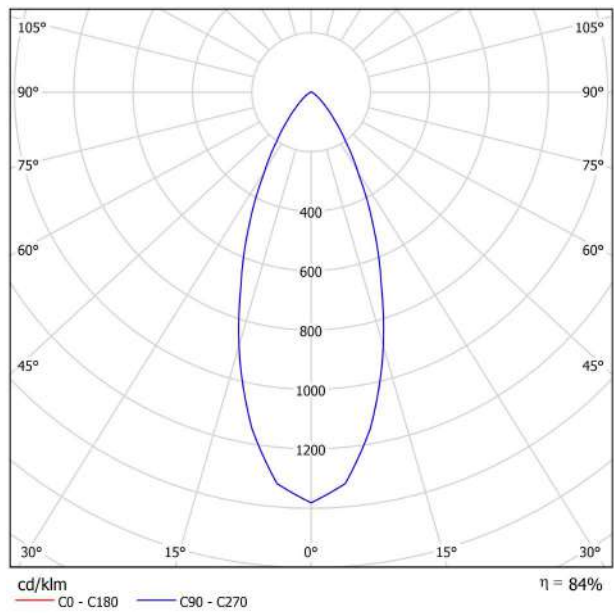


CONICAL DIAGRAM

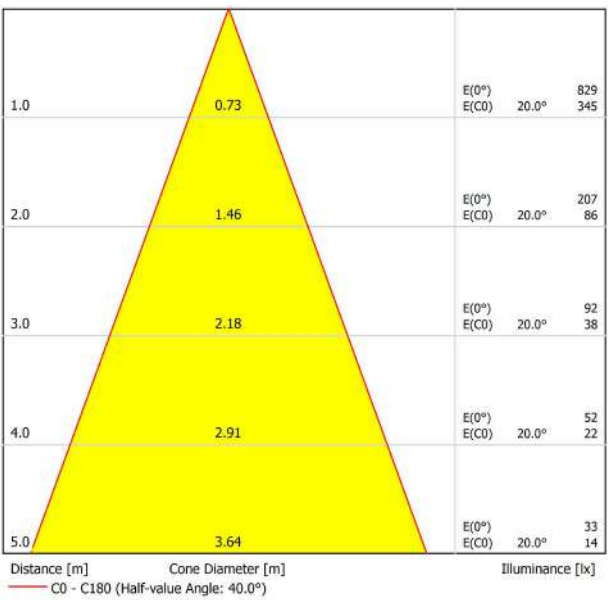



DIMENSIONS

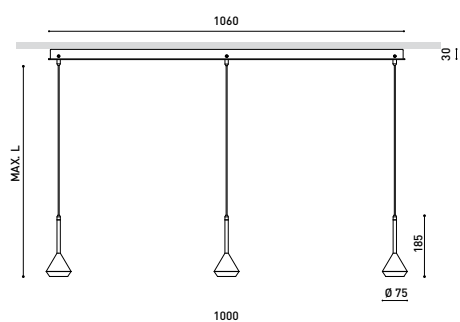

AWARDS



Name	SPIN 3 SURFACE 3M 40° DIM DALI 2700K WT-WT
Reference	A3911210WTWT
Color	Textured white
RAL	9016
Category	SURFACE

PRODUCT

Light source	LED
Gross luminous flux	3 x 600 Lm
Power	3 x 6,5 W
Power values of the system	23,78 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	40°
Lighting efficiency	84%
Efficacy	92 Lm/W
Current intensity	700 mA
Dimming	DALI - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Cord length	3 m
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Reduced dimensions, clear lines and a mechanized geometry combined in a pendant luminaire for accent lighting. Its ultra-thin cable gives Spin a sensation of aerial floatability.

POLAR DIAGRAM

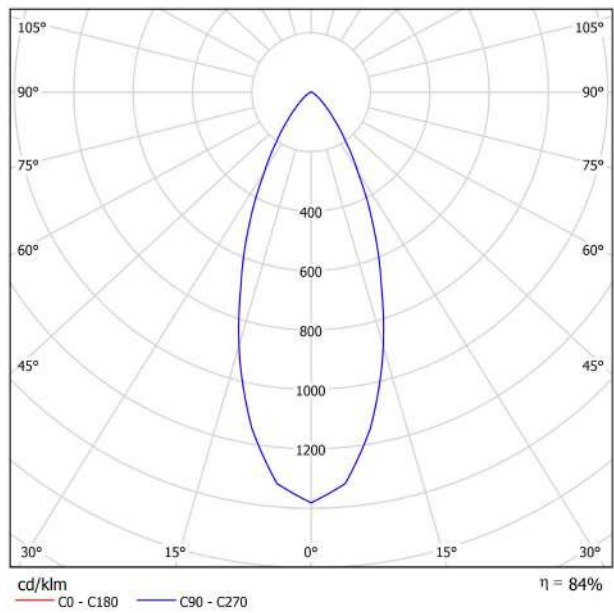


CONICAL DIAGRAM

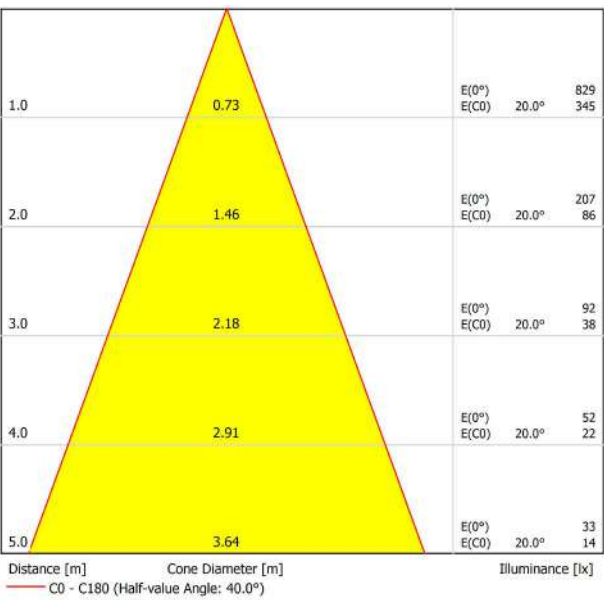



DIMENSIONS

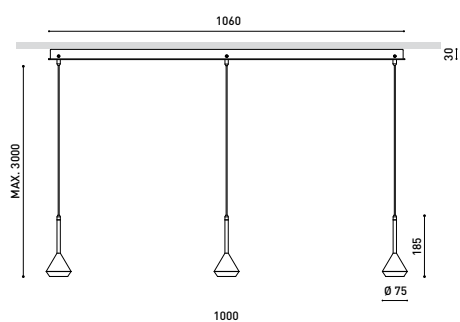

AWARDS



Name	SPIN 3 SURFACE 3M 40° DIM DALI 3000K MC-NT
Reference	A3911211MCNT
Color	Metallized copper
RAL	Electrolytic bath
Category	SUSPENSION

PRODUCT

Light source	LED
Gross luminous flux	3 x 630 Lm
Power	3 x 6,5 W
Power values of the system	23,78 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	40°
Lighting efficiency	84%
Efficacy	97 Lm/W
Current intensity	700 mA
Dimming	DALI - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


OTHER DATA

Ingress Protection	IP20
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Spin Surface is a version that allows it to be installed in places where it is impossible to access the false ceiling. Cement, concrete, vault ... its base, set to apply three luminaires, houses the driver and allows the luminaire to be installed on all types of surfaces.

POLAR DIAGRAM

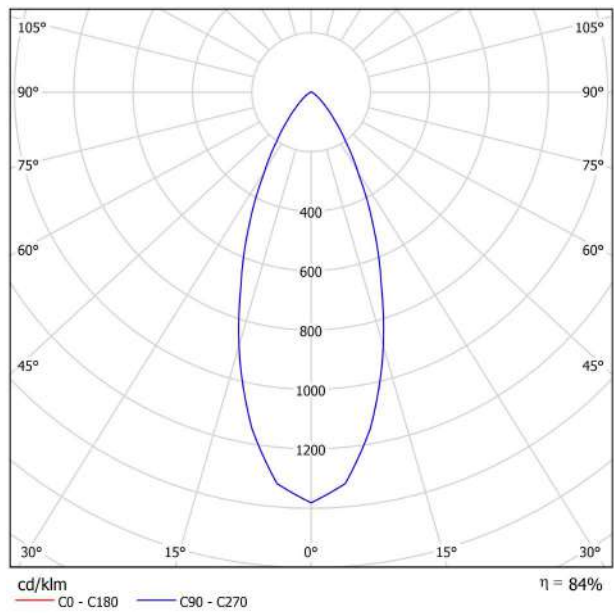


CONICAL DIAGRAM

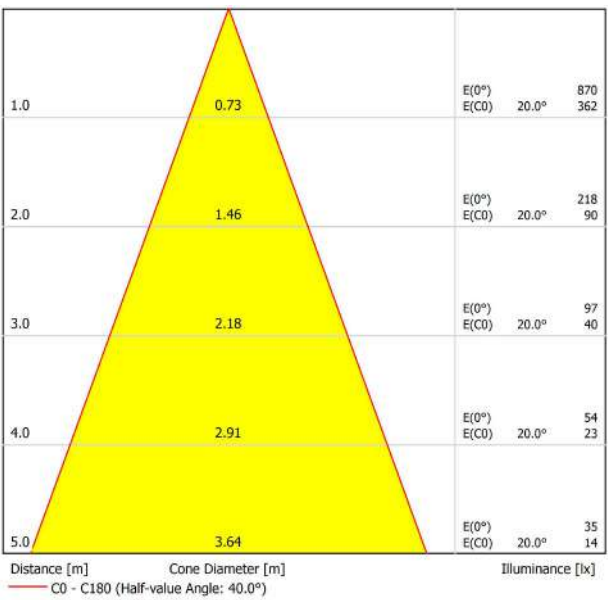



DIMENSIONS

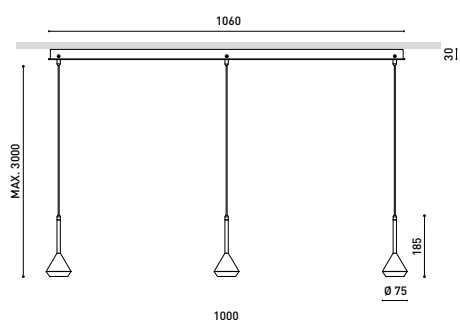

AWARDS



Name	SPIN 3 SURFACE 3M 40° DIM DALI 3000K MC-WT
Reference	A3911211MCWT
Color	Metallized copper
RAL	Electrolytic bath
Category	SUSPENSION

PRODUCT

Light source	LED
Gross luminous flux	3 x 630 Lm
Power	3 x 6,5 W
Power values of the system	23,78 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	40°
Lighting efficiency	84%
Efficacy	97 Lm/W
Current intensity	700 mA
Dimming	DALI - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


OTHER DATA

Ingress Protection	IP20
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Spin Surface is a version that allows it to be installed in places where it is impossible to access the false ceiling. Cement, concrete, vault ... its base, set to apply three luminaires, houses the driver and allows the luminaire to be installed on all types of surfaces.

POLAR DIAGRAM

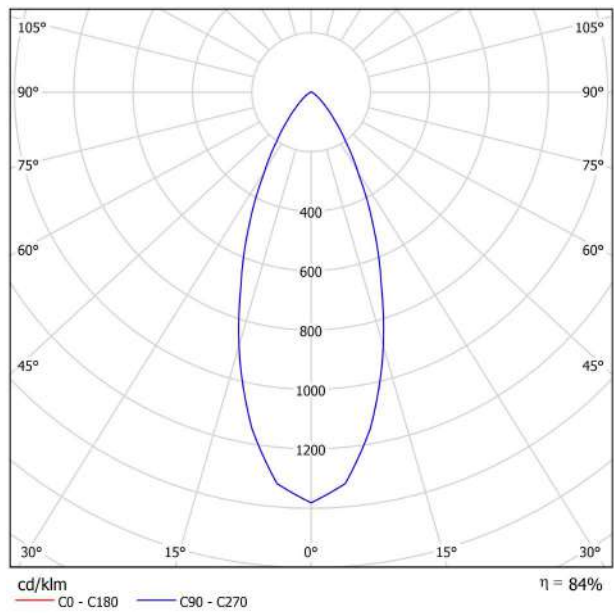


CONICAL DIAGRAM

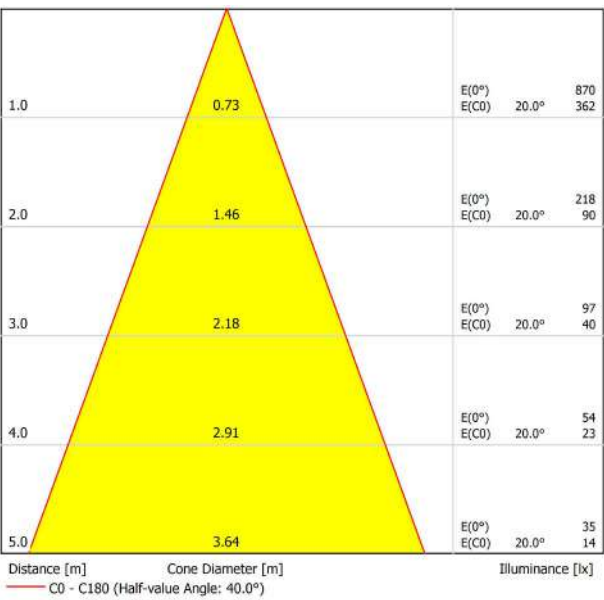



DIMENSIONS

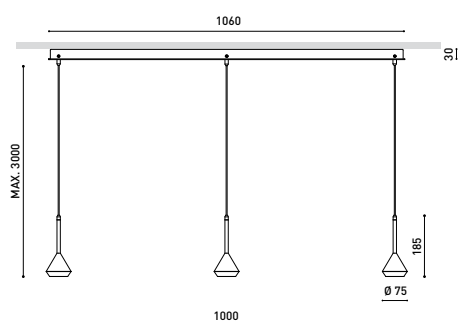

AWARDS



Name	SPIN 3 SURFACE 3M 40° DIM DALI 3000K MG-NT
Reference	A3911211MGNT
Color	Metallized gold
RAL	Electrolytic bath
Category	SUSPENSION

PRODUCT

Light source	LED
Gross luminous flux	3 x 630 Lm
Power	3 x 6,5 W
Power values of the system	23,78 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	40°
Lighting efficiency	84%
Efficacy	97 Lm/W
Current intensity	700 mA
Dimming	DALI - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


OTHER DATA

Ingress Protection	IP20
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Spin Surface is a version that allows it to be installed in places where it is impossible to access the false ceiling. Cement, concrete, vault ... its base, set to apply three luminaires, houses the driver and allows the luminaire to be installed on all types of surfaces.

POLAR DIAGRAM

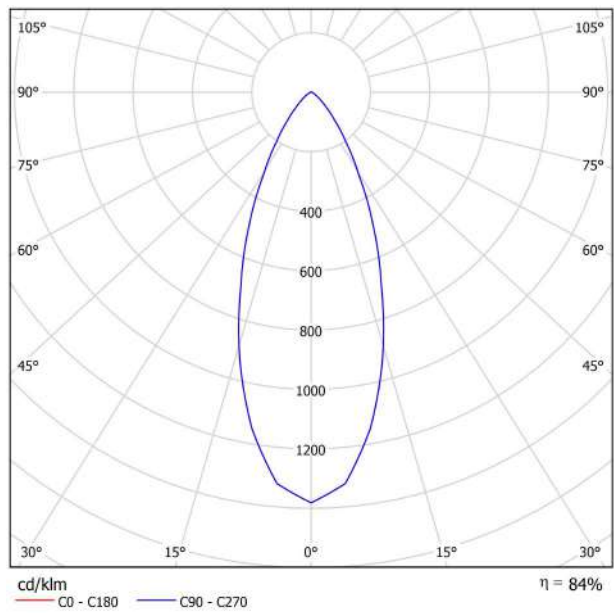


CONICAL DIAGRAM

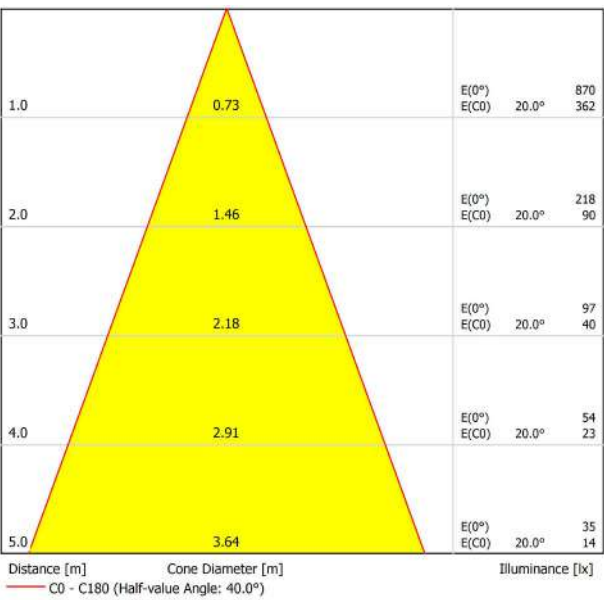



DIMENSIONS

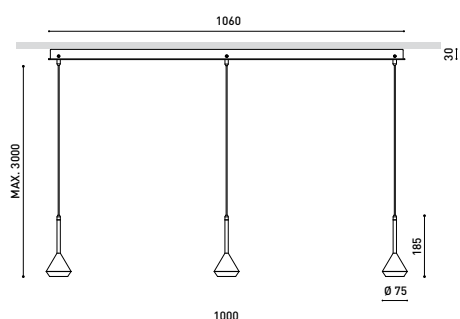

Name	SPIN 3 SURFACE 3M 40° DIM DALI 3000K MG-WT
Reference	A3911211MGWT
Color	Metallized gold
RAL	Electrolytic bath
Category	SUSPENSION

PRODUCT

LIGHTING INFORMATION

LED

3 x 630 Lm

3 x 6,5 W

23,78 W

3000 K

CRI>90

MacAdam Step 2

40°

84%

97 Lm/W

700 mA

DALI - Other DIM, please consult

Please Consult

Included

☐

220 V/240 V

50/60 Hz

A+

L80B10 (Tc=85°C) >60.000h

OTHER DATA

IP20

No

4150 g.

4577 g.

1078 x 139 x 89 mm

1

Aluminium / Polymethyl Methacrylate




AWARDS




Spin Surface is a version that allows it to be installed in places where it is impossible to access the false ceiling. Cement, concrete, vault ... its base, set to apply three luminaires, houses the driver and allows the luminaire to be installed on all types of surfaces.

POLAR DIAGRAM

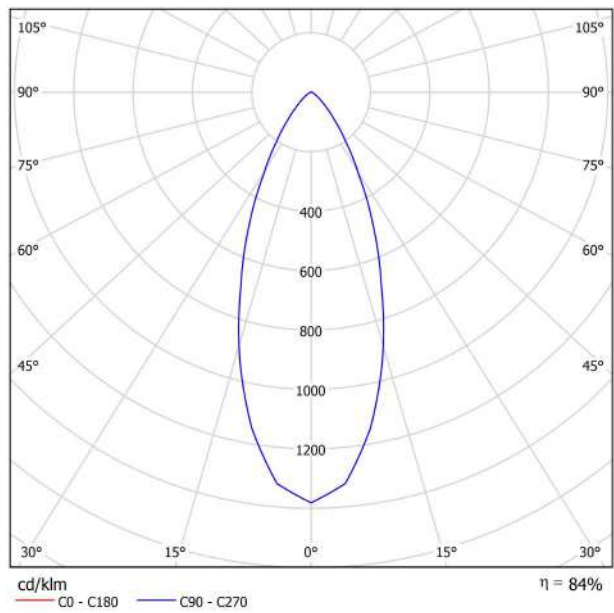


CONICAL DIAGRAM

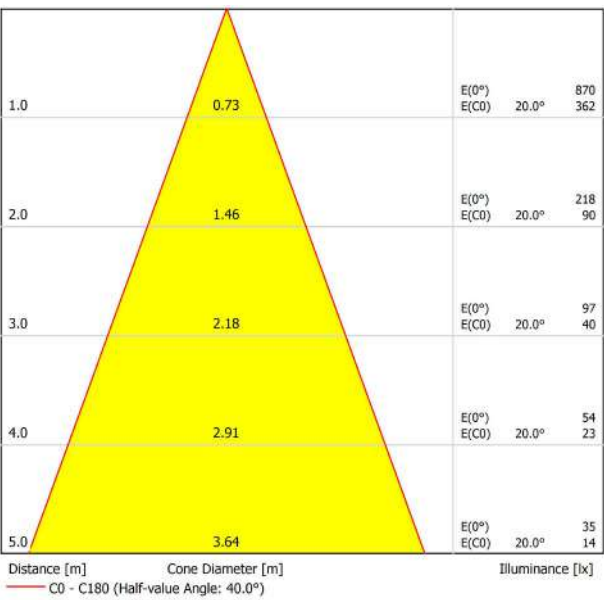



DIMENSIONS

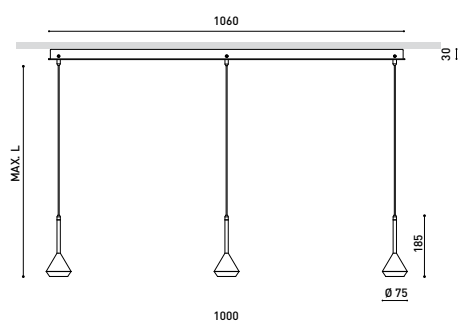

AWARDS



Name	SPIN 3 SURFACE 3M 40° DIM DALI 3000K NT-NT
Reference	A3911211NTNT
Color	Textured black
RAL	9005
Category	SURFACE

PRODUCT

Light source	LED
Gross luminous flux	3 x 630 Lm
Power	3 x 6,5 W
Power values of the system	23,78 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	40°
Lighting efficiency	84%
Efficacy	97 Lm/W
Current intensity	700 mA
Dimming	DALI - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Cord length	3 m
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Reduced dimensions, clear lines and a mechanized geometry combined in a pendant luminaire for accent lighting. Its ultra-thin cable gives Spin a sensation of aerial floatability.

POLAR DIAGRAM

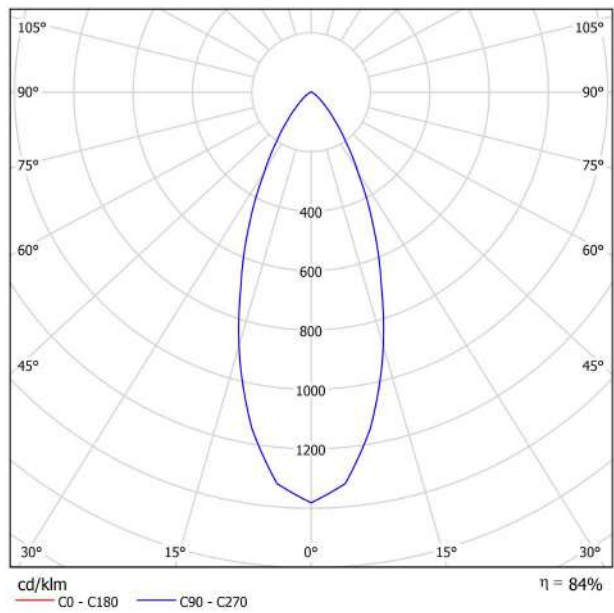


CONICAL DIAGRAM

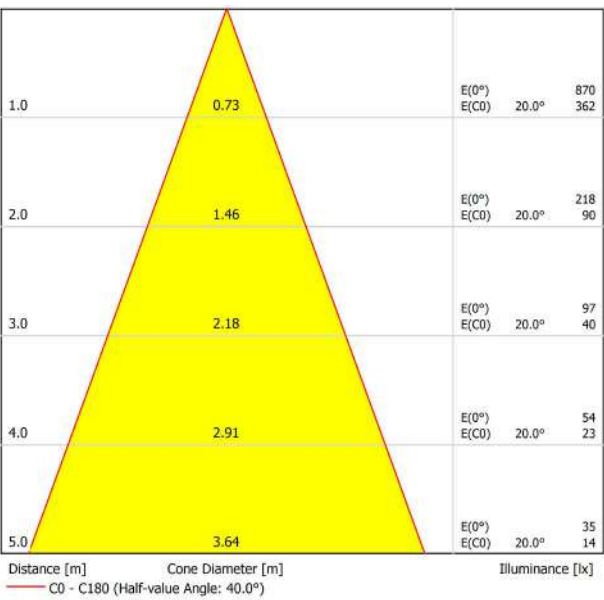



DIMENSIONS

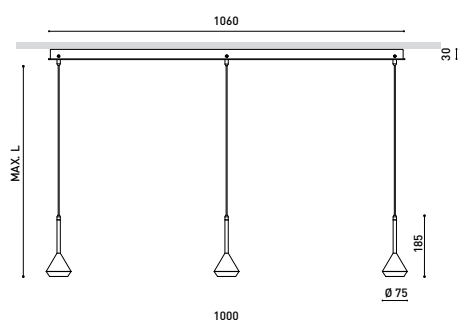

AWARDS



Name	SPIN 3 SURFACE 3M 40° DIM DALI 3000K NT-WT
Reference	A3911211NTWT
Color	Textured black
RAL	9005
Category	SURFACE

PRODUCT

Light source	LED
Gross luminous flux	3 x 630 Lm
Power	3 x 6,5 W
Power values of the system	23,78 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	40°
Lighting efficiency	84%
Efficacy	97 Lm/W
Current intensity	700 mA
Dimming	DALI - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Cord length	3 m
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Reduced dimensions, clear lines and a mechanized geometry combined in a pendant luminaire for accent lighting. Its ultra-thin cable gives Spin a sensation of aerial floatability.

POLAR DIAGRAM

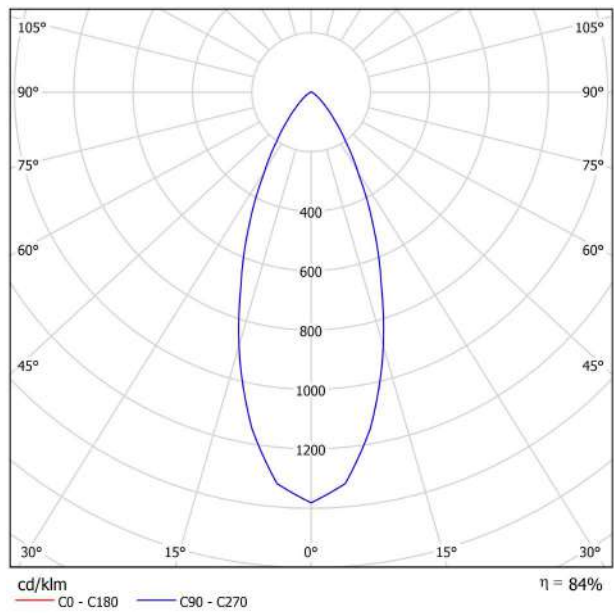


CONICAL DIAGRAM

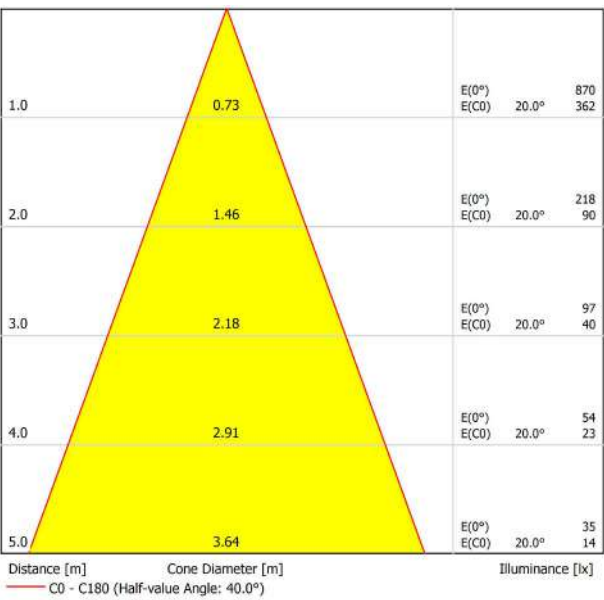



DIMENSIONS

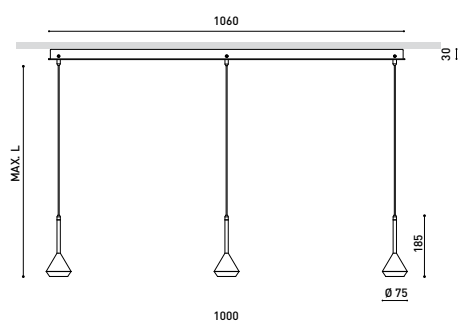

AWARDS



Name	SPIN 3 SURFACE 3M 40° DIM DALI 3000K WT-NT
Reference	A3911211WTNT
Color	Textured white
RAL	9016
Category	SURFACE

PRODUCT

Light source	LED
Gross luminous flux	3 x 630 Lm
Power	3 x 6,5 W
Power values of the system	23,78 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	40°
Lighting efficiency	84%
Efficacy	97 Lm/W
Current intensity	700 mA
Dimming	DALI - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Cord length	3 m
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Reduced dimensions, clear lines and a mechanized geometry combined in a pendant luminaire for accent lighting. Its ultra-thin cable gives Spin a sensation of aerial floatability.

POLAR DIAGRAM

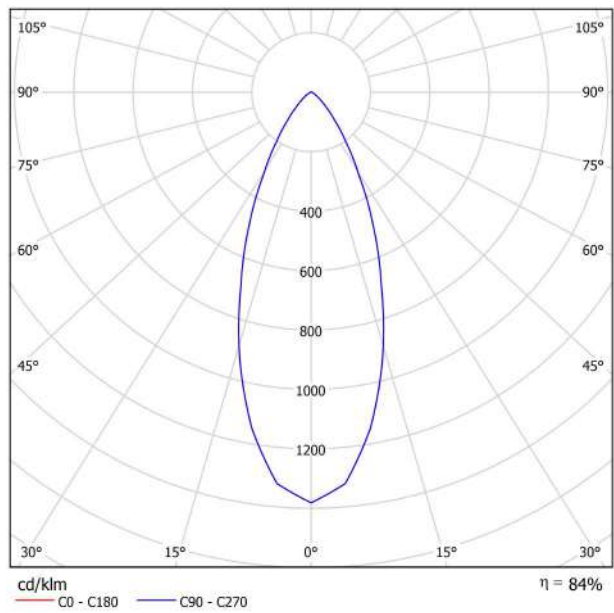


CONICAL DIAGRAM

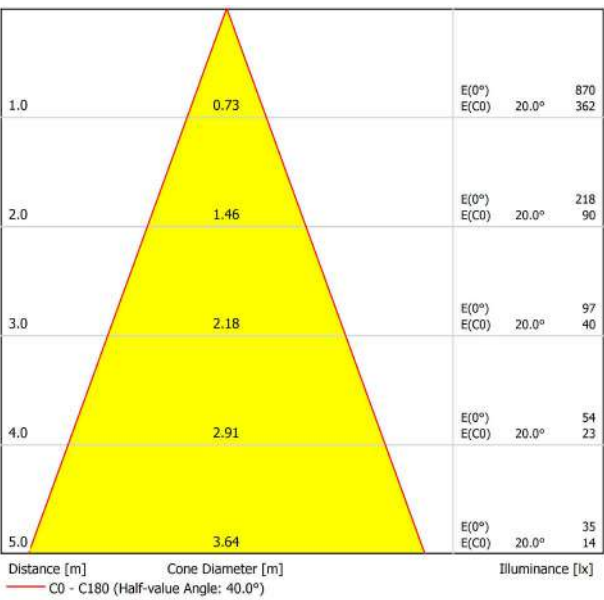



DIMENSIONS

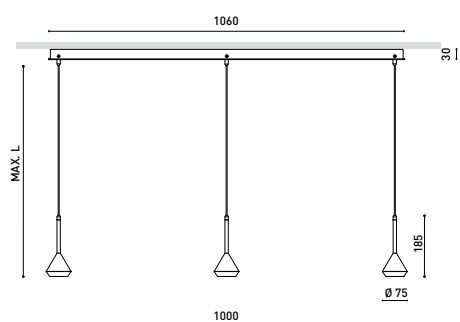

AWARDS



Name	SPIN 3 SURFACE 3M 40° DIM DALI 3000K WT-WT
Reference	A3911211WTWT
Color	Textured white
RAL	9016
Category	SURFACE

PRODUCT

Light source	LED
Gross luminous flux	3 x 630 Lm
Power	3 x 6,5 W
Power values of the system	23,78 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	40°
Lighting efficiency	84%
Efficacy	97 Lm/W
Current intensity	700 mA
Dimming	DALI - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


OTHER DATA

Ingress Protection	IP20
Cord length	3 m
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Reduced dimensions, clear lines and a mechanized geometry combined in a pendant luminaire for accent lighting. Its ultra-thin cable gives Spin a sensation of aerial floatability.

POLAR DIAGRAM

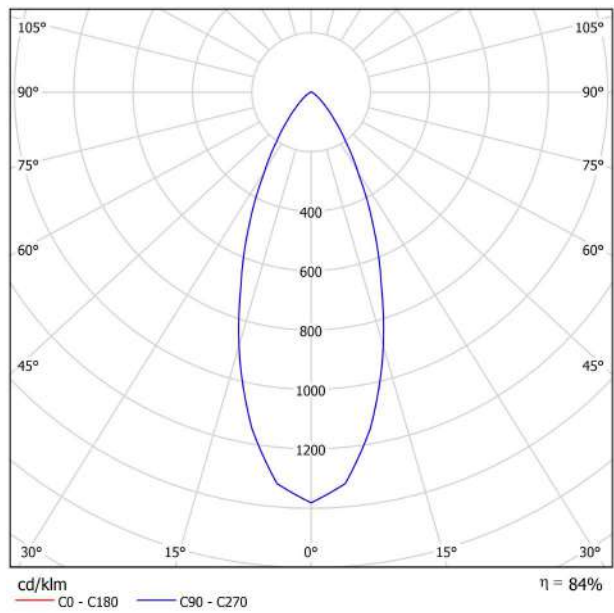


CONICAL DIAGRAM

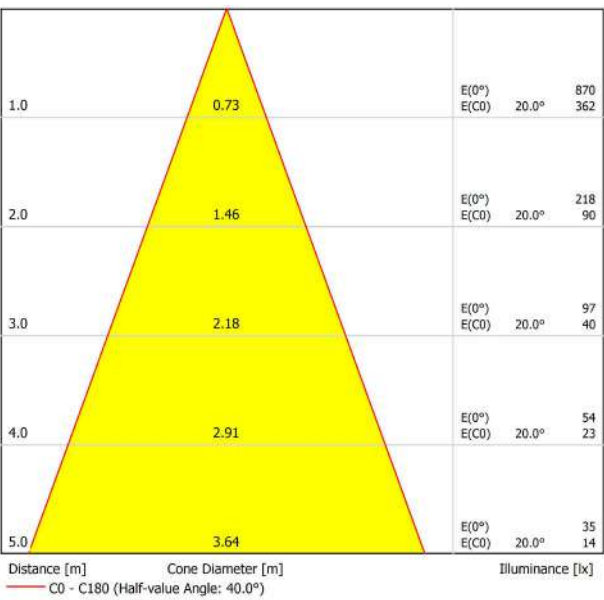



DIMENSIONS

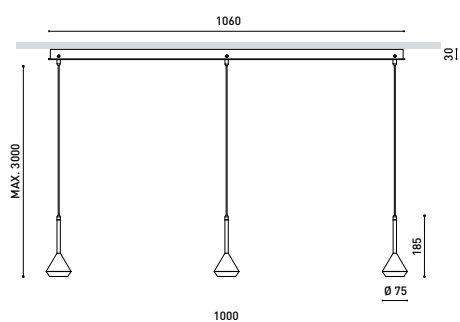

AWARDS



Name	SPIN 3 SURFACE 3M 40° DIM DALI 4000K MC-NT
Reference	A3911212MCNT
Color	Metallized copper
RAL	Electrolytic bath
Category	SUSPENSION

PRODUCT

Light source	LED
Gross luminous flux	3 x 680 Lm
Power	3 x 6,5 W
Power values of the system	23,78 W
Colour temperature	4000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	40°
Lighting efficiency	84%
Efficacy	105 Lm/W
Current intensity	700 mA
Dimming	DALI - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


OTHER DATA

Ingress Protection	IP20
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Spin Surface is a version that allows it to be installed in places where it is impossible to access the false ceiling. Cement, concrete, vault ... its base, set to apply three luminaires, houses the driver and allows the luminaire to be installed on all types of surfaces.

POLAR DIAGRAM

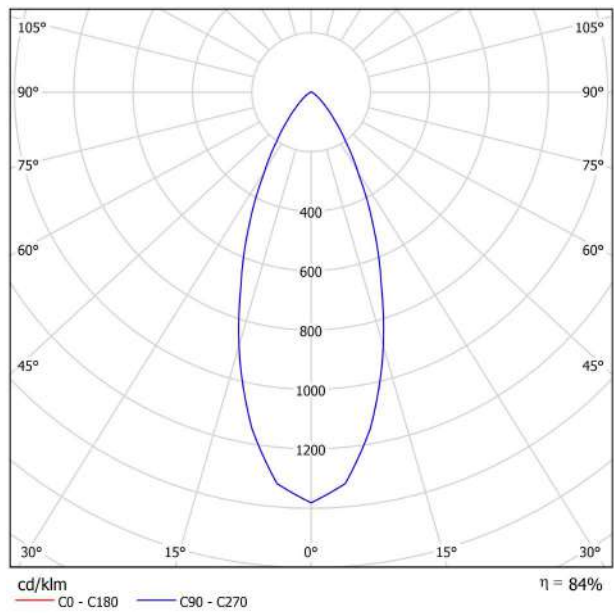


CONICAL DIAGRAM

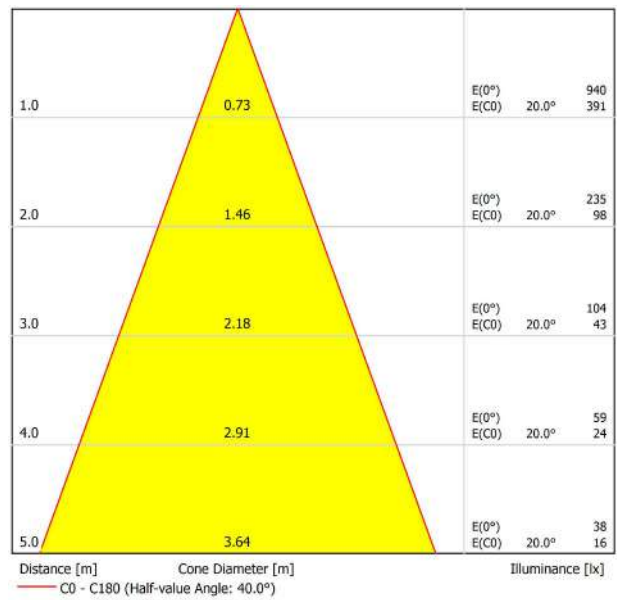



DIMENSIONS

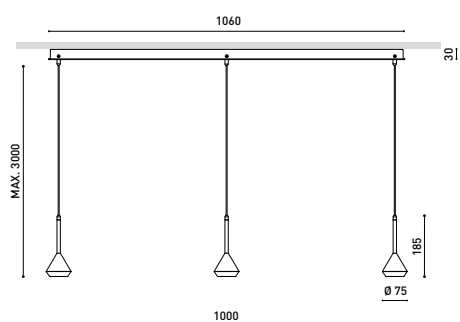

AWARDS



Name	SPIN 3 SURFACE 3M 40° DIM DALI 4000K MC-WT
Reference	A3911212MCWT
Color	Metallized copper
RAL	Electrolytic bath
Category	SUSPENSION

PRODUCT

Light source	LED
Gross luminous flux	3 x 680 Lm
Power	3 x 6,5 W
Power values of the system	23,78 W
Colour temperature	4000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	40°
Lighting efficiency	84%
Efficacy	105 Lm/W
Current intensity	700 mA
Dimming	DALI - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


OTHER DATA

Ingress Protection	IP20
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Spin Surface is a version that allows it to be installed in places where it is impossible to access the false ceiling. Cement, concrete, vault ... its base, set to apply three luminaires, houses the driver and allows the luminaire to be installed on all types of surfaces.

POLAR DIAGRAM

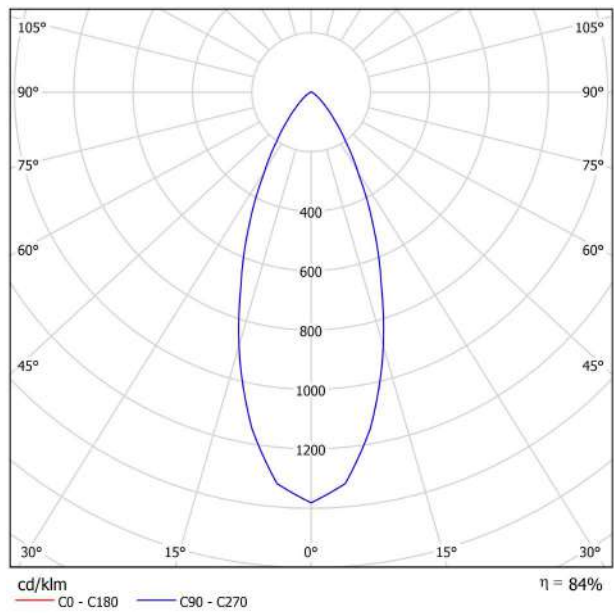


CONICAL DIAGRAM

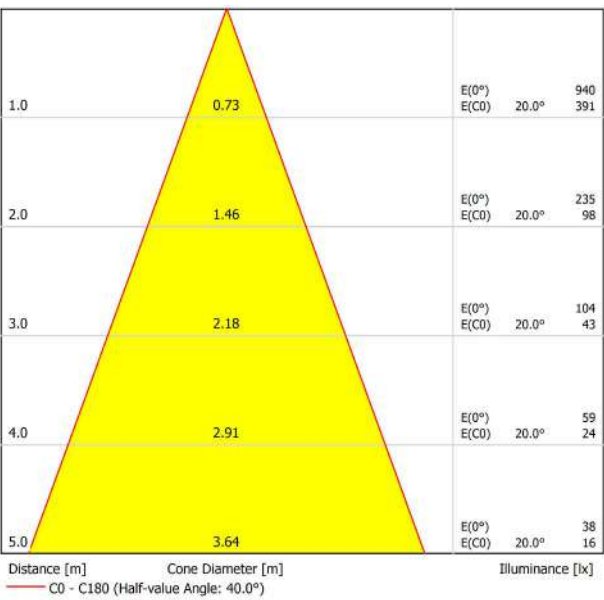



DIMENSIONS

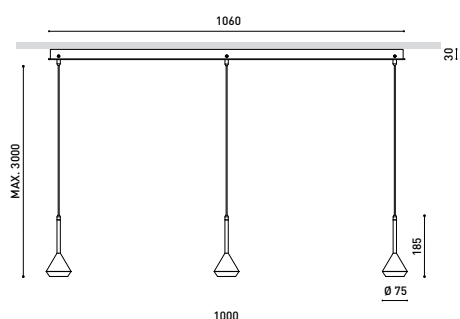

AWARDS



Name	SPIN 3 SURFACE 3M 40° DIM DALI 4000K MG-NT
Reference	A3911212MGNT
Color	Metallized gold
RAL	Electrolytic bath
Category	SUSPENSION

PRODUCT

Light source	LED
Gross luminous flux	3 x 680 Lm
Power	3 x 6,5 W
Power values of the system	23,78 W
Colour temperature	4000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	40°
Lighting efficiency	84%
Efficacy	105 Lm/W
Current intensity	700 mA
Dimming	DALI - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


OTHER DATA

Ingress Protection	IP20
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Spin Surface is a version that allows it to be installed in places where it is impossible to access the false ceiling. Cement, concrete, vault ... its base, set to apply three luminaires, houses the driver and allows the luminaire to be installed on all types of surfaces.

POLAR DIAGRAM

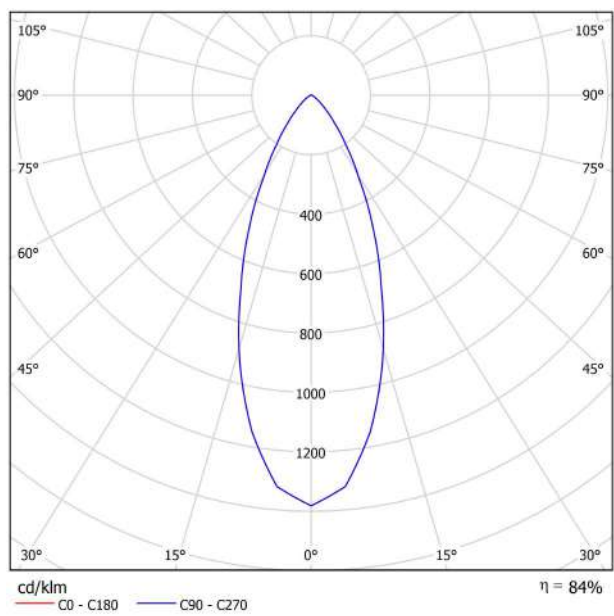


CONICAL DIAGRAM

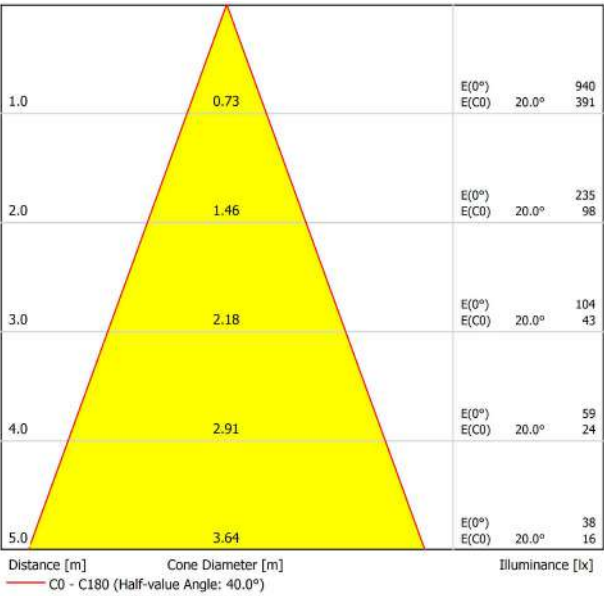



DIMENSIONS

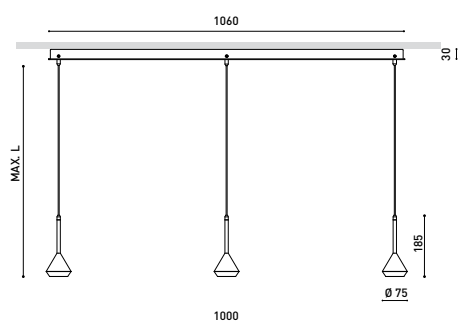

AWARDS



Name	SPIN 3 SURFACE 5M 24° 4000K NT-NT
Reference	A3912102NTNT
Color	Textured black
RAL	9005
Category	SURFACE

PRODUCT

Light source	LED
Gross luminous flux	3 x 680 Lm
Power	3 x 6,5 W
Power values of the system	21,67 W
Colour temperature	4000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	24°
Lighting efficiency	86%
Efficacy	105 Lm/W
Current intensity	700 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Cord length	5 m
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Reduced dimensions, clear lines and a mechanized geometry combined in a pendant luminaire for accent lighting. Its ultra-thin cable gives Spin a sensation of aerial floatability.

POLAR DIAGRAM

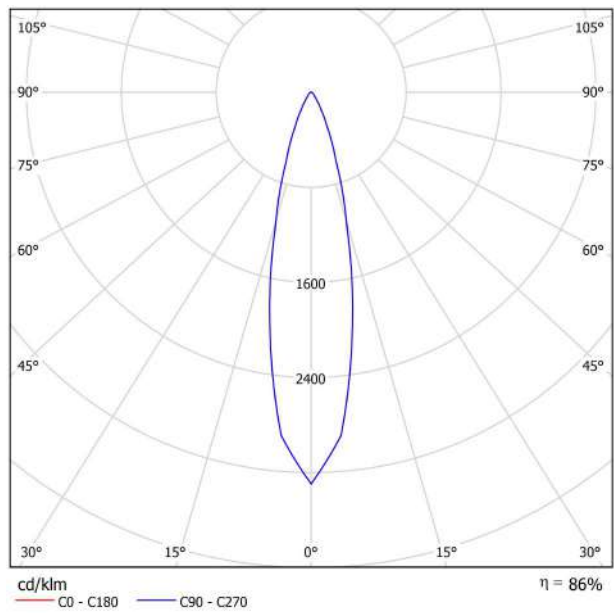


CONICAL DIAGRAM

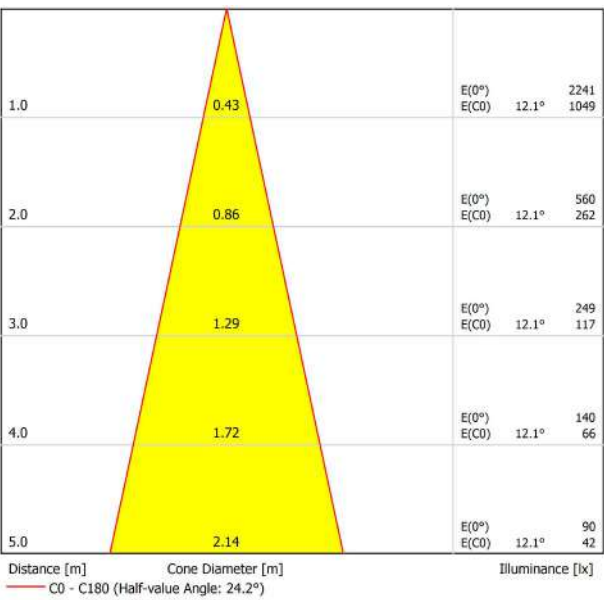



DIMENSIONS

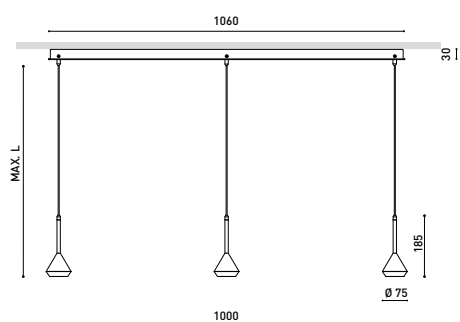

AWARDS



Name	SPIN 3 SURFACE 5M 24° 4000K NT-WT
Reference	A3912102NTWT
Color	Textured black
RAL	9005
Category	SURFACE

PRODUCT

Light source	LED
Gross luminous flux	3 x 680 Lm
Power	3 x 6,5 W
Power values of the system	21,67 W
Colour temperature	4000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	24°
Lighting efficiency	86%
Efficacy	105 Lm/W
Current intensity	700 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Cord length	5 m
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Reduced dimensions, clear lines and a mechanized geometry combined in a pendant luminaire for accent lighting. Its ultra-thin cable gives Spin a sensation of aerial floatability.

POLAR DIAGRAM

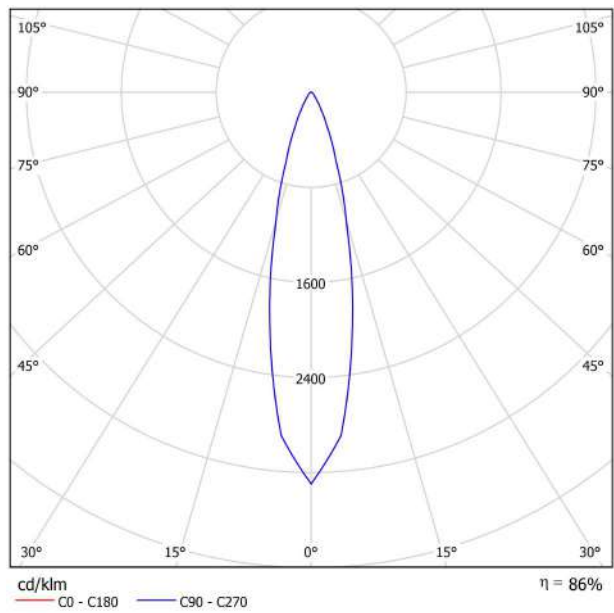


CONICAL DIAGRAM

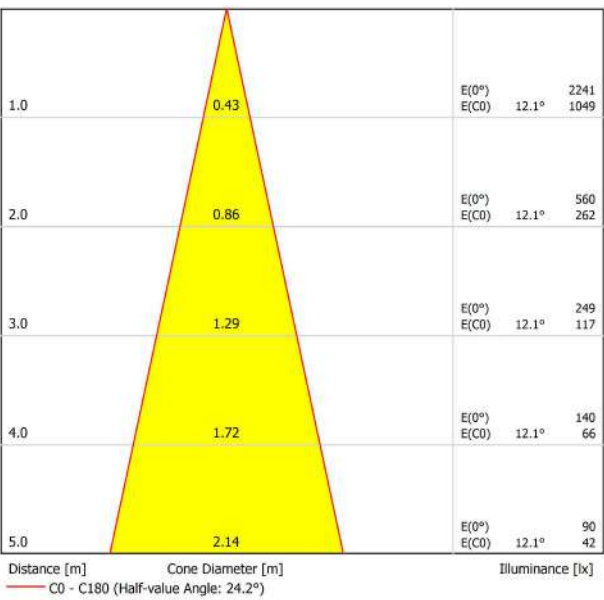



DIMENSIONS

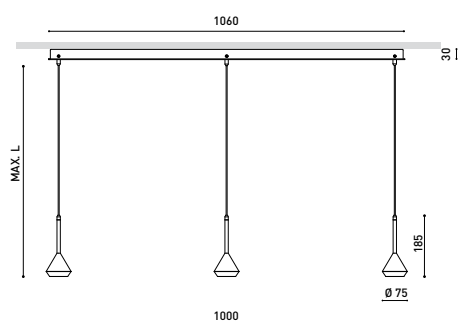

AWARDS



Name	SPIN 3 SURFACE 5M 24° 4000K WT-NT
Reference	A3912102WTNT
Color	Textured white
RAL	9016
Category	SURFACE

PRODUCT

Light source	LED
Gross luminous flux	3 x 680 Lm
Power	3 x 6,5 W
Power values of the system	21,67 W
Colour temperature	4000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	24°
Lighting efficiency	86%
Efficacy	105 Lm/W
Current intensity	700 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Cord length	5 m
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Reduced dimensions, clear lines and a mechanized geometry combined in a pendant luminaire for accent lighting. Its ultra-thin cable gives Spin a sensation of aerial floatability.

POLAR DIAGRAM

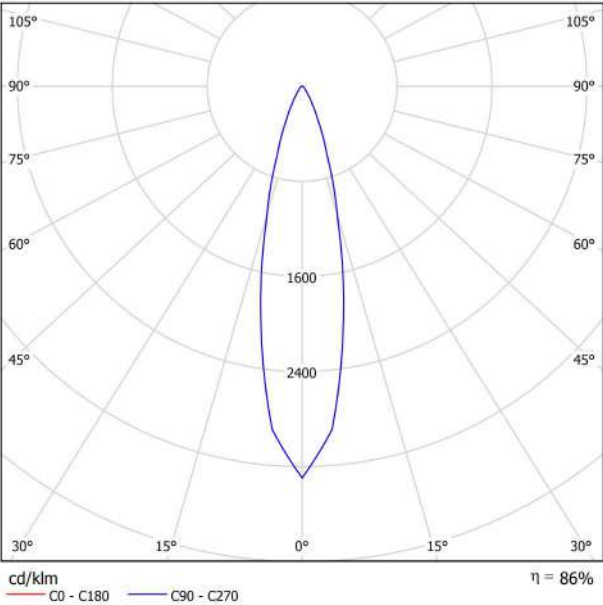


CONICAL DIAGRAM

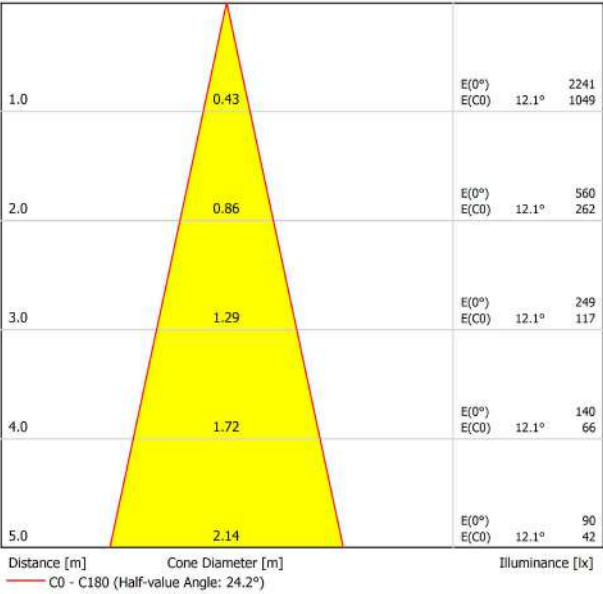



DIMENSIONS

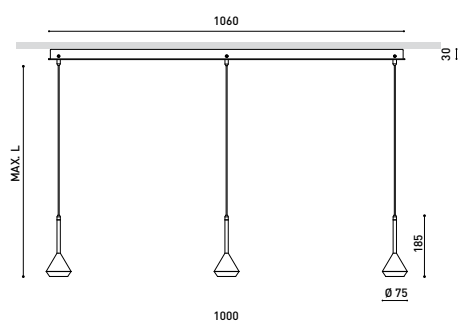

AWARDS



Name	SPIN 3 SURFACE 5M 24° 4000K WT-WT
Reference	A3912102WTWT
Color	Textured white
RAL	9016
Category	SURFACE

PRODUCT

Light source	LED
Gross luminous flux	3 x 680 Lm
Power	3 x 6,5 W
Power values of the system	21,67 W
Colour temperature	4000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	24°
Lighting efficiency	86%
Efficacy	105 Lm/W
Current intensity	700 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


OTHER DATA

Ingress Protection	IP20
Cord length	5 m
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Reduced dimensions, clear lines and a mechanized geometry combined in a pendant luminaire for accent lighting. Its ultra-thin cable gives Spin a sensation of aerial floatability.

POLAR DIAGRAM

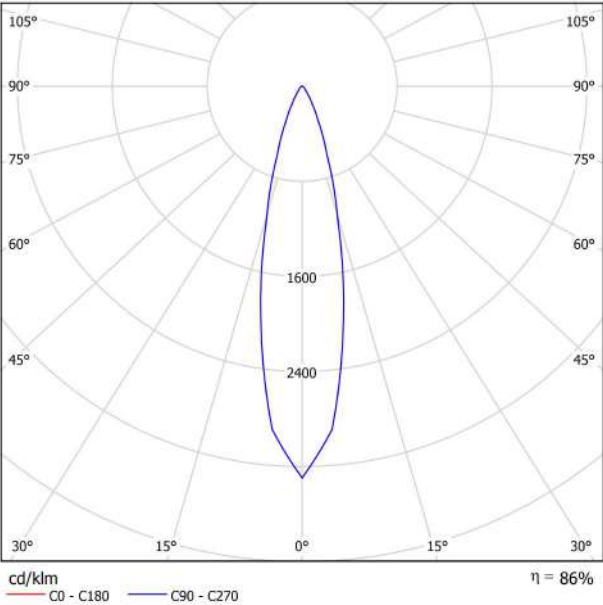


CONICAL DIAGRAM

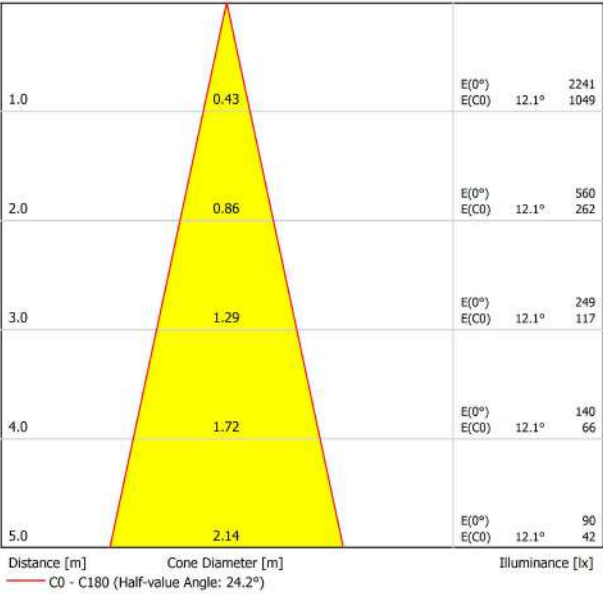



DIMENSIONS

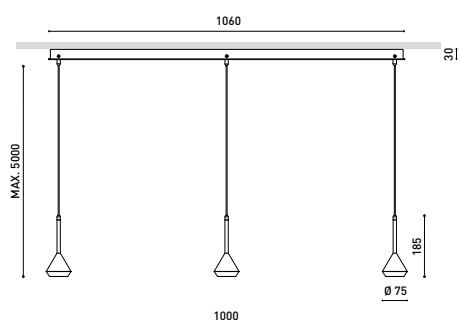

AWARDS



Name	SPIN 3 SURFACE 5M 40° 2700K MC-NT
Reference	A3912110MCNT
Color	Metallized copper
RAL	Electrolytic bath
Category	SUSPENSION

PRODUCT

Light source	LED
Gross luminous flux	3 x 600 Lm
Power	3 x 6,5 W
Power values of the system	21,67 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	40°
Lighting efficiency	84%
Efficacy	92 Lm/W
Current intensity	700 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


OTHER DATA

Ingress Protection	IP20
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Spin Surface is a version that allows it to be installed in places where it is impossible to access the false ceiling. Cement, concrete, vault ... its base, set to apply three luminaires, houses the driver and allows the luminaire to be installed on all types of surfaces.

POLAR DIAGRAM

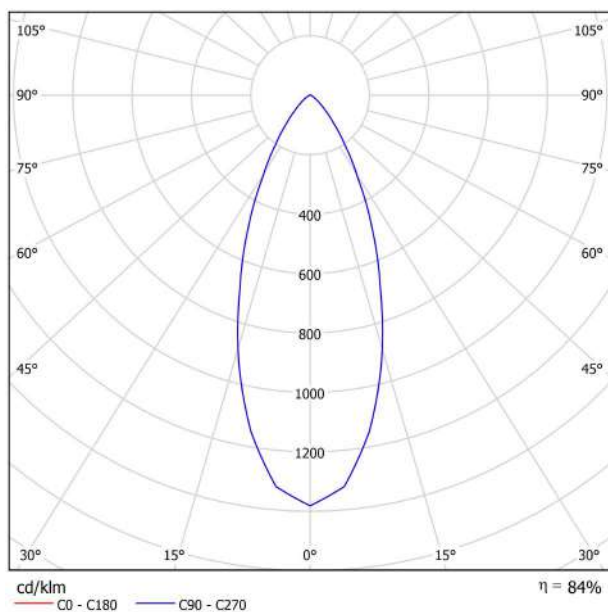


CONICAL DIAGRAM

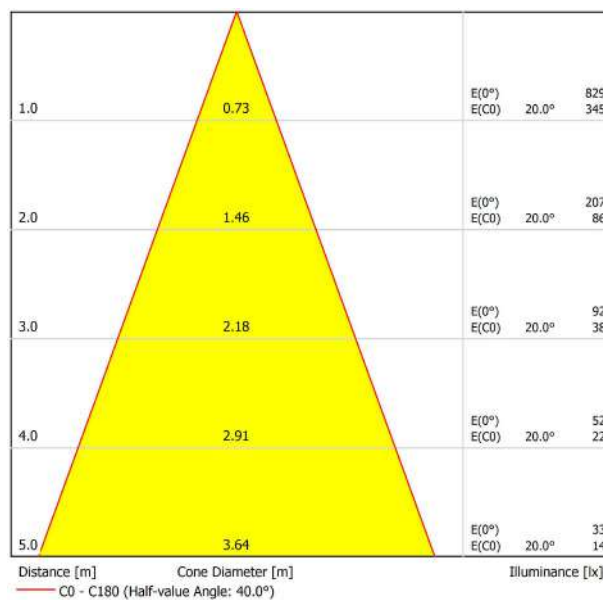



DIMENSIONS

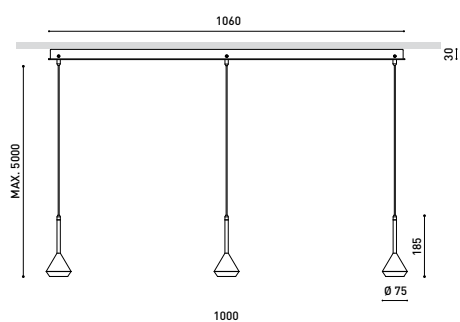

AWARDS



Name	SPIN 3 SURFACE 5M 24° 2700K MC-NT
Reference	A3912100MCNT
Color	Metallized copper
RAL	Electrolytic bath
Category	SUSPENSION

PRODUCT

Light source	LED
Gross luminous flux	3 x 600 Lm
Power	3 x 6,5 W
Power values of the system	21,67 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	24°
Lighting efficiency	86%
Efficacy	92 Lm/W
Current intensity	700 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


OTHER DATA

Ingress Protection	IP20
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Spin Surface is a version that allows it to be installed in places where it is impossible to access the false ceiling. Cement, concrete, vault ... its base, set to apply three luminaires, houses the driver and allows the luminaire to be installed on all types of surfaces.

POLAR DIAGRAM

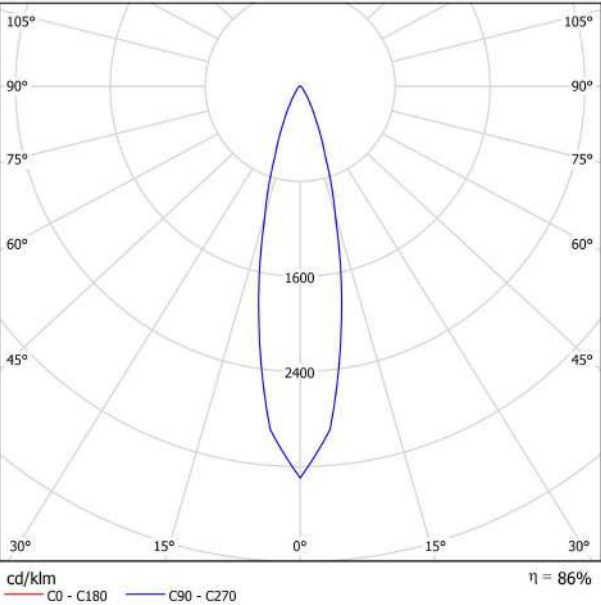


CONICAL DIAGRAM

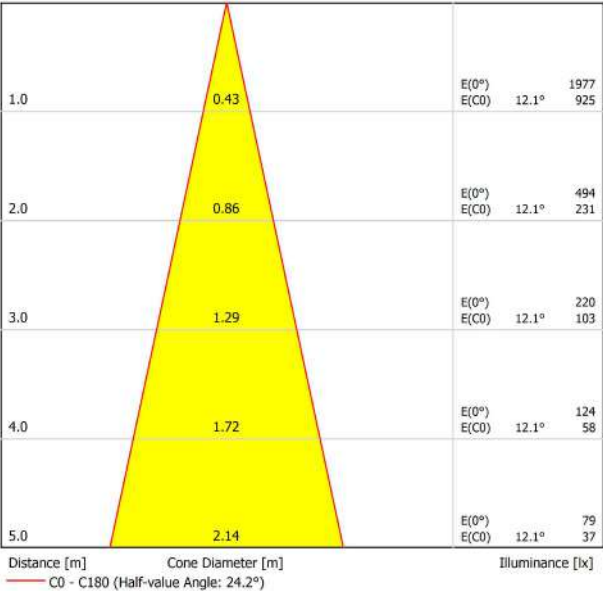



DIMENSIONS

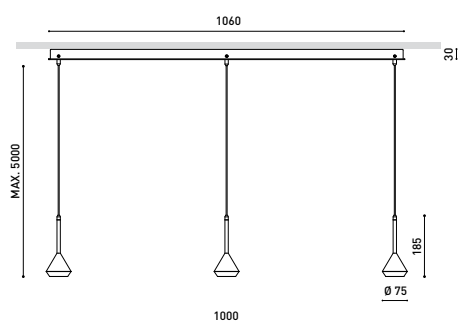

AWARDS



Name	SPIN 3 SURFACE 5M 24° 2700K MC-WT
Reference	A3912100MCWT
Color	Metallized copper
RAL	Electrolytic bath
Category	SUSPENSION

PRODUCT

Light source	LED
Gross luminous flux	3 x 600 Lm
Power	3 x 6,5 W
Power values of the system	21,67 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	24°
Lighting efficiency	86%
Efficacy	92 Lm/W
Current intensity	700 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


OTHER DATA

Ingress Protection	IP20
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Spin Surface is a version that allows it to be installed in places where it is impossible to access the false ceiling. Cement, concrete, vault ... its base, set to apply three luminaires, houses the driver and allows the luminaire to be installed on all types of surfaces.

POLAR DIAGRAM

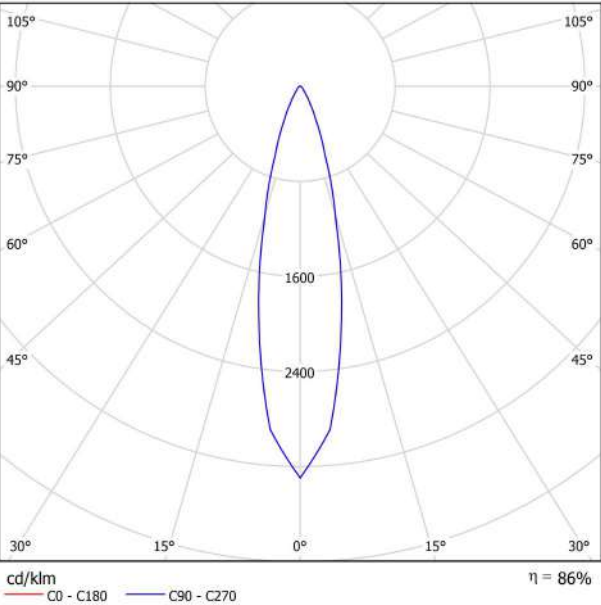


CONICAL DIAGRAM

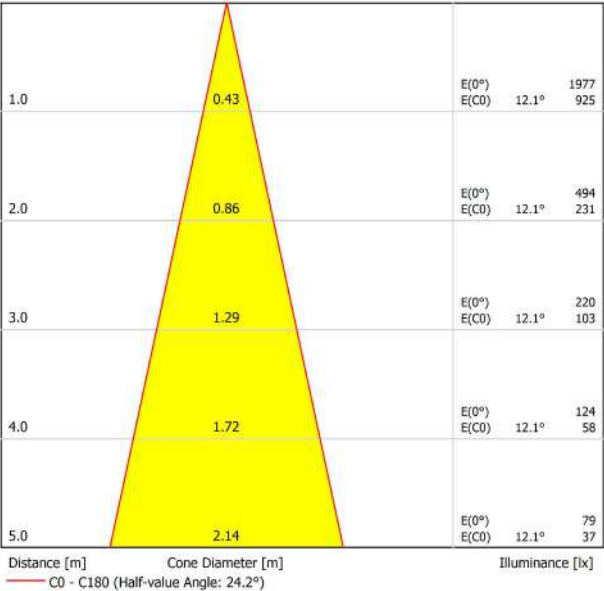



DIMENSIONS

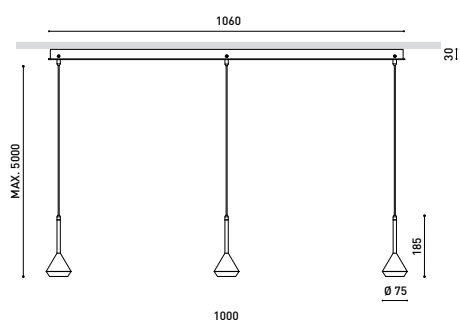

AWARDS



Name	SPIN 3 SURFACE 5M 24° 2700K MG-NT
Reference	A3912100MGNT
Color	Metallized gold
RAL	Electrolytic bath
Category	SUSPENSION

PRODUCT

SPIN 3 SURFACE 5M 24° 2700K MG-NT

A3912100MGNT

Metallized gold

Electrolytic bath

SUSPENSION

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	3 x 600 Lm
Power	3 x 6,5 W
Power values of the system	21,67 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	24°
Lighting efficiency	86%
Efficacy	92 Lm/W
Current intensity	700 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Spin Surface is a version that allows it to be installed in places where it is impossible to access the false ceiling. Cement, concrete, vault ... its base, set to apply three luminaires, houses the driver and allows the luminaire to be installed on all types of surfaces.

POLAR DIAGRAM

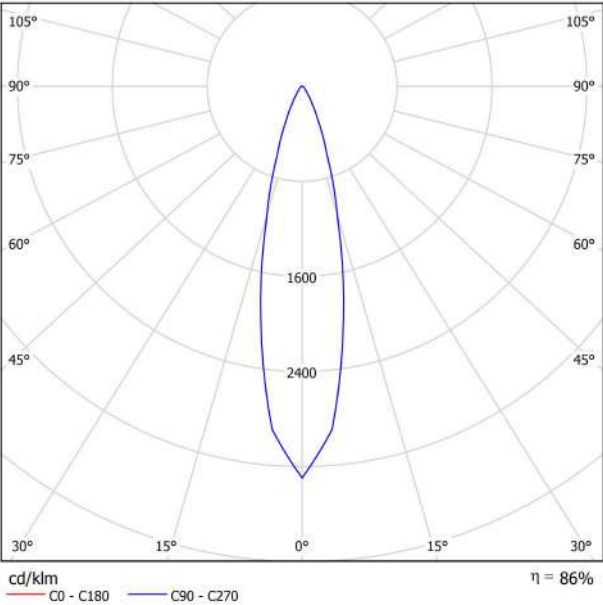


CONICAL DIAGRAM

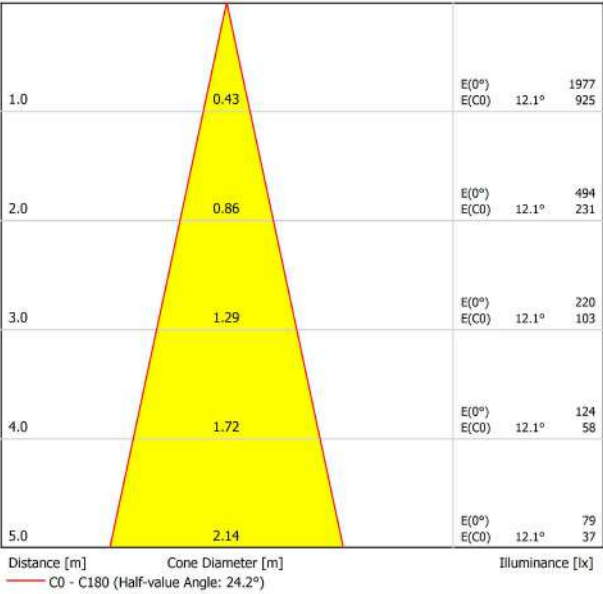



DIMENSIONS

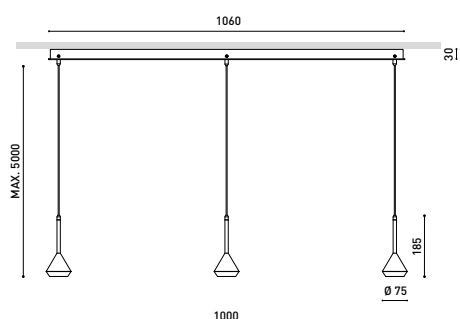

AWARDS



Name	SPIN 3 SURFACE 5M 24° 2700K MG-WT
Reference	A3912100MGWT
Color	Metallized gold
RAL	Electrolytic bath
Category	SUSPENSION

PRODUCT

Light source	LED
Gross luminous flux	3 x 600 Lm
Power	3 x 6,5 W
Power values of the system	21,67 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	24°
Lighting efficiency	86%
Efficacy	92 Lm/W
Current intensity	700 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


OTHER DATA

Ingress Protection	IP20
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Spin Surface is a version that allows it to be installed in places where it is impossible to access the false ceiling. Cement, concrete, vault ... its base, set to apply three luminaires, houses the driver and allows the luminaire to be installed on all types of surfaces.

POLAR DIAGRAM

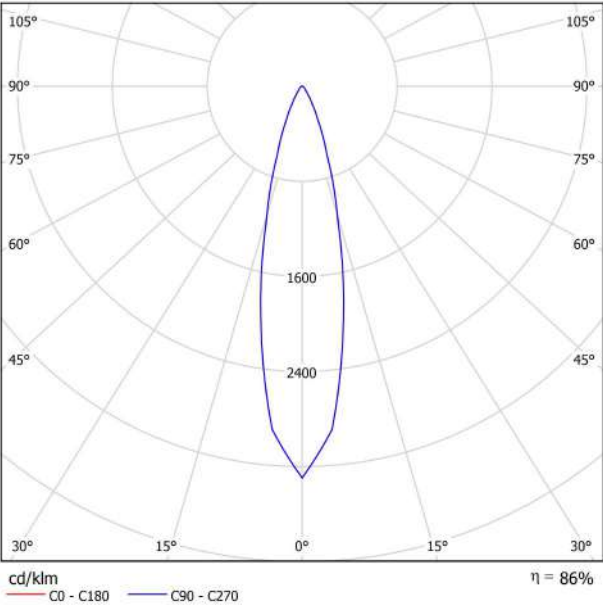


CONICAL DIAGRAM

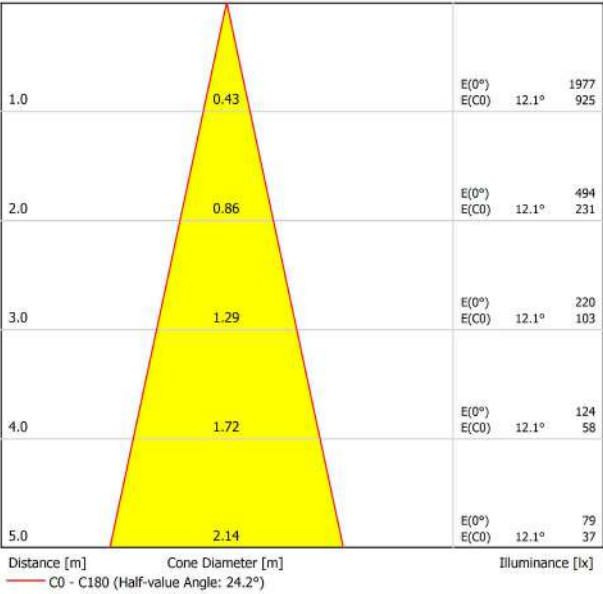



DIMENSIONS

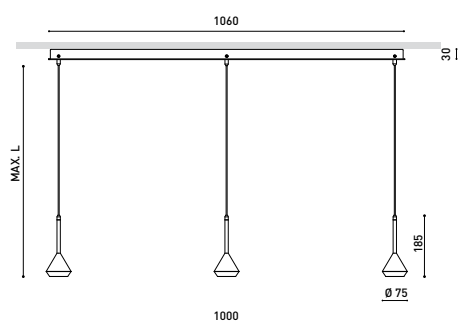

AWARDS



Name	SPIN 3 SURFACE 5M 24° 2700K NT-NT
Reference	A3912100NTNT
Color	Textured black
RAL	9005
Category	SURFACE

PRODUCT

SPIN 3 SURFACE 5M 24° 2700K NT-NT

A3912100NTNT

Textured black

9005

SURFACE

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	3 x 600 Lm
Power	3 x 6,5 W
Power values of the system	21,67 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	24°
Lighting efficiency	86%
Efficacy	92 Lm/W
Current intensity	700 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	□
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Cord length	5 m
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Reduced dimensions, clear lines and a mechanized geometry combined in a pendant luminaire for accent lighting. Its ultra-thin cable gives Spin a sensation of aerial floatability.

POLAR DIAGRAM

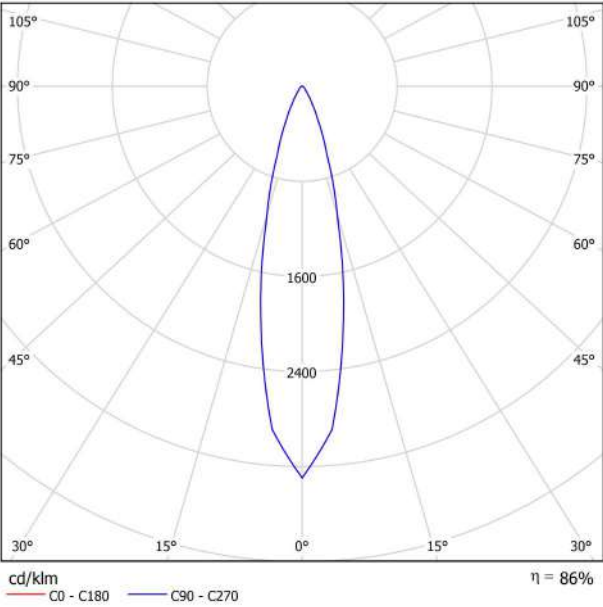


CONICAL DIAGRAM

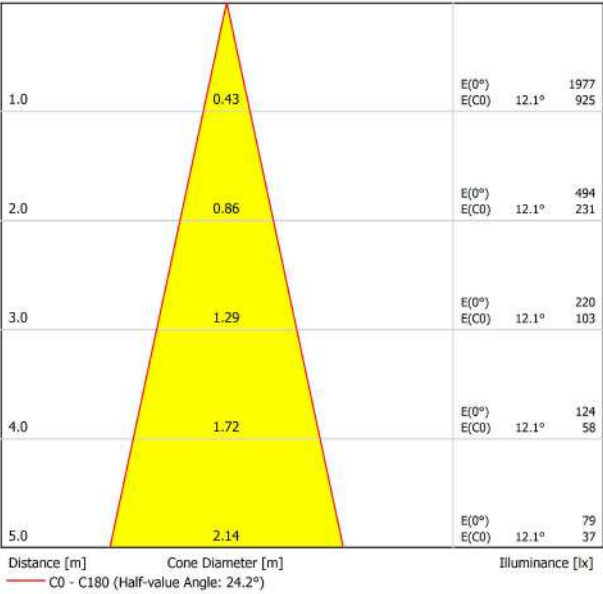



DIMENSIONS

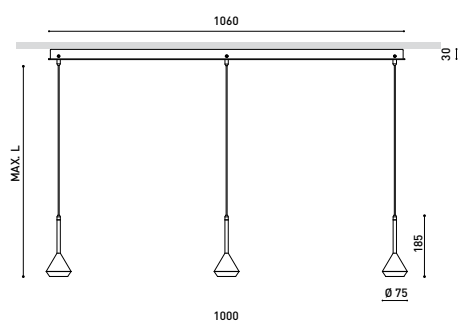

AWARDS



Name	SPIN 3 SURFACE 5M 24° 2700K NT-WT
Reference	A3912100NTWT
Color	Textured black
RAL	9005
Category	SURFACE

PRODUCT

Light source	LED
Gross luminous flux	3 x 600 Lm
Power	3 x 6,5 W
Power values of the system	21,67 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	24°
Lighting efficiency	86%
Efficacy	92 Lm/W
Current intensity	700 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Cord length	5 m
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Reduced dimensions, clear lines and a mechanized geometry combined in a pendant luminaire for accent lighting. Its ultra-thin cable gives Spin a sensation of aerial floatability.

POLAR DIAGRAM

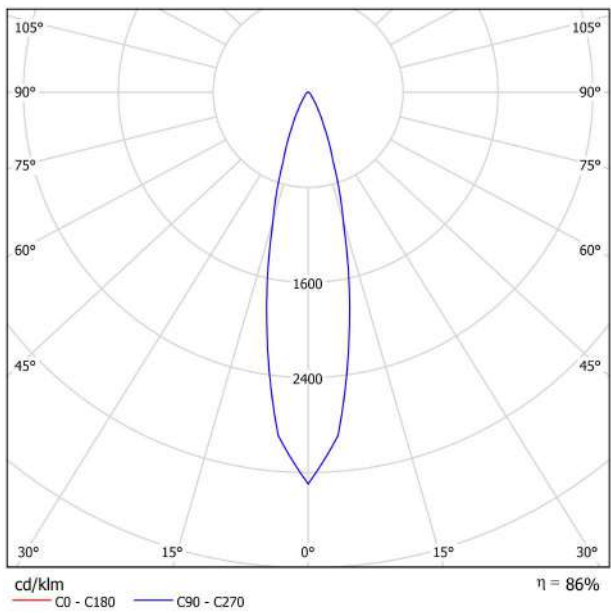


CONICAL DIAGRAM

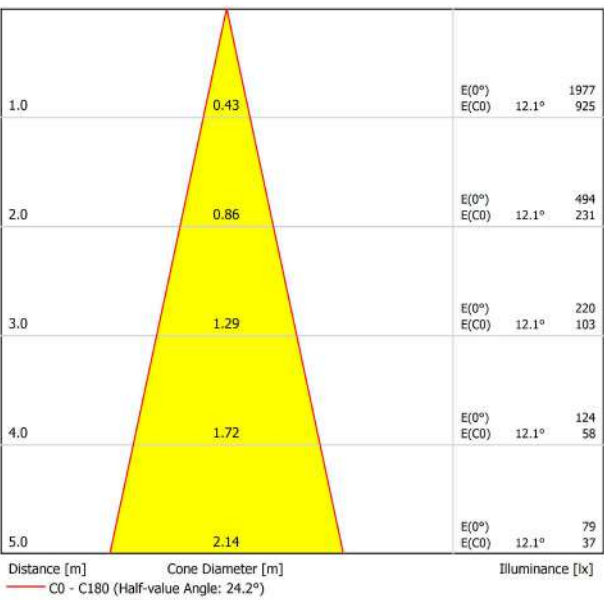



DIMENSIONS

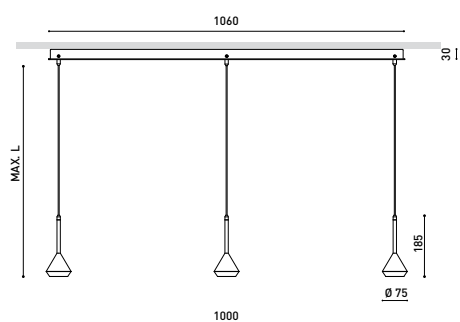

AWARDS



Name	SPIN 3 SURFACE 5M 24° 2700K WT-NT
Reference	A3912100WTNT
Color	Textured white
RAL	9016
Category	SURFACE

PRODUCT

Light source	LED
Gross luminous flux	3 x 600 Lm
Power	3 x 6,5 W
Power values of the system	21,67 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	24°
Lighting efficiency	86%
Efficacy	92 Lm/W
Current intensity	700 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Cord length	5 m
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Reduced dimensions, clear lines and a mechanized geometry combined in a pendant luminaire for accent lighting. Its ultra-thin cable gives Spin a sensation of aerial floatability.

POLAR DIAGRAM

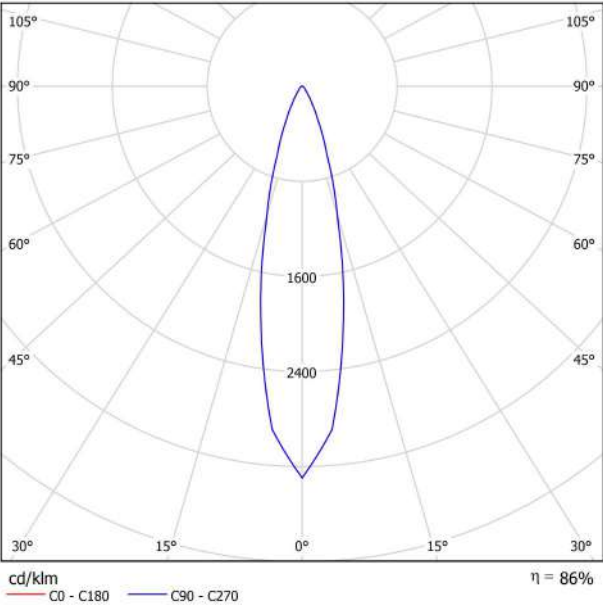


CONICAL DIAGRAM

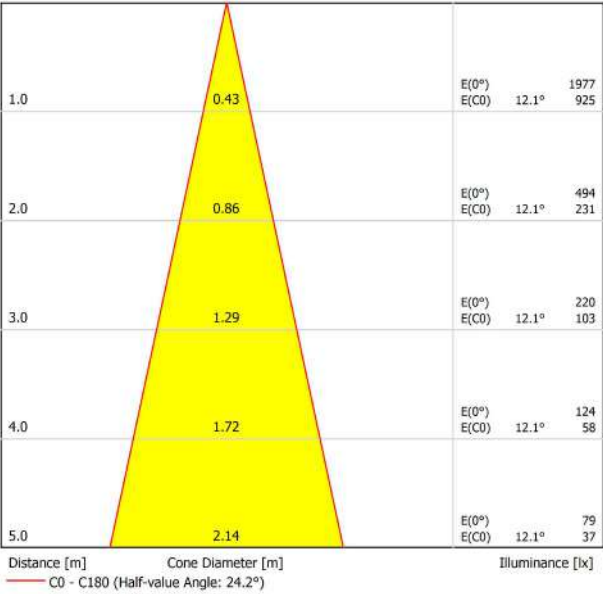



DIMENSIONS

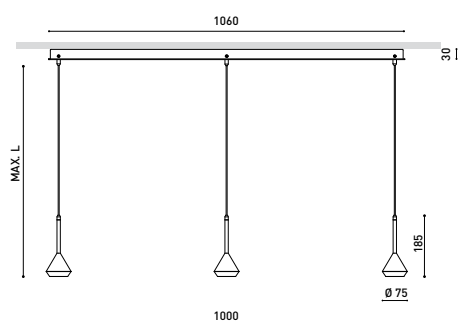

AWARDS



Name	SPIN 3 SURFACE 5M 24° 2700K WT-WT
Reference	A3912100WTWT
Color	Textured white
RAL	9016
Category	SURFACE

PRODUCT

Light source	LED
Gross luminous flux	3 x 600 Lm
Power	3 x 6,5 W
Power values of the system	21,67 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	24°
Lighting efficiency	86%
Efficacy	92 Lm/W
Current intensity	700 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	□
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


OTHER DATA

Ingress Protection	IP20
Cord length	5 m
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Reduced dimensions, clear lines and a mechanized geometry combined in a pendant luminaire for accent lighting. Its ultra-thin cable gives Spin a sensation of aerial floatability.

POLAR DIAGRAM

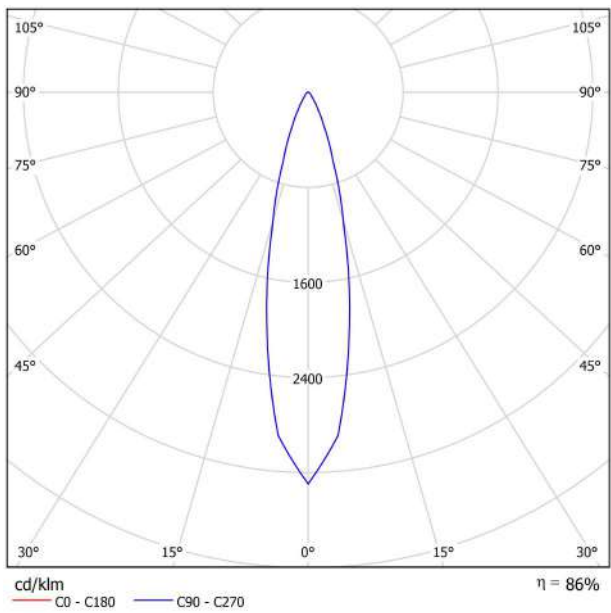


CONICAL DIAGRAM

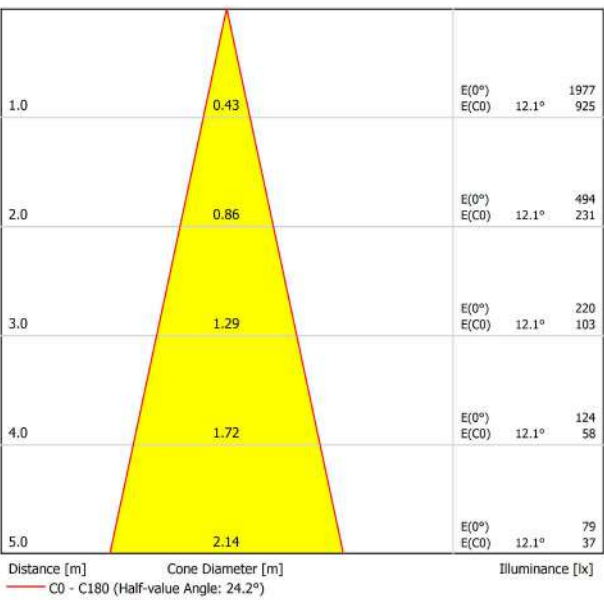



DIMENSIONS

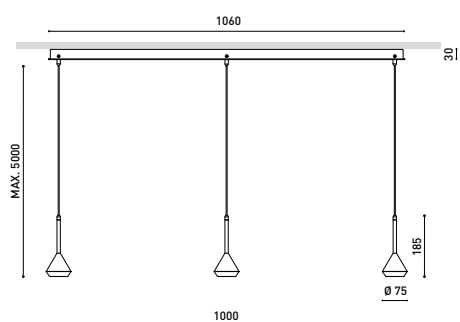

AWARDS



Name	SPIN 3 SURFACE 5M 24° 3000K MC-NT
Reference	A3912101MCNT
Color	Metallized copper
RAL	Electrolytic bath
Category	SUSPENSION

PRODUCT

Light source	LED
Gross luminous flux	3 x 630 Lm
Power	3 x 6,5 W
Power values of the system	21,67 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	24°
Lighting efficiency	86%
Efficacy	97 Lm/W
Current intensity	700 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


OTHER DATA

Ingress Protection	IP20
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Spin Surface is a version that allows it to be installed in places where it is impossible to access the false ceiling. Cement, concrete, vault ... its base, set to apply three luminaires, houses the driver and allows the luminaire to be installed on all types of surfaces.

POLAR DIAGRAM

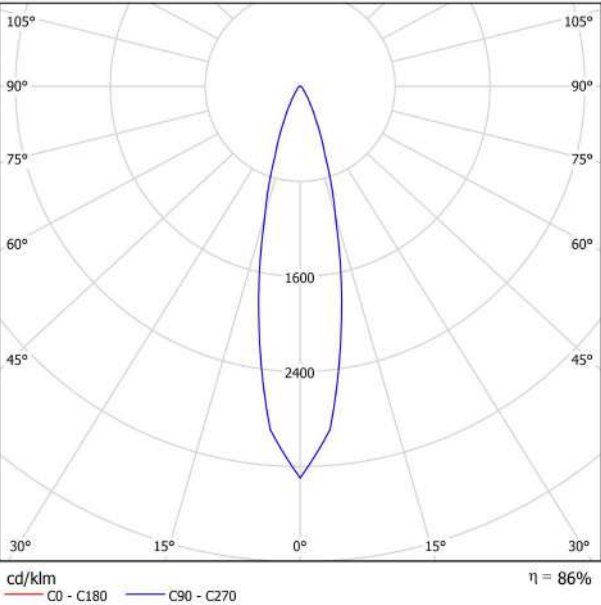


CONICAL DIAGRAM

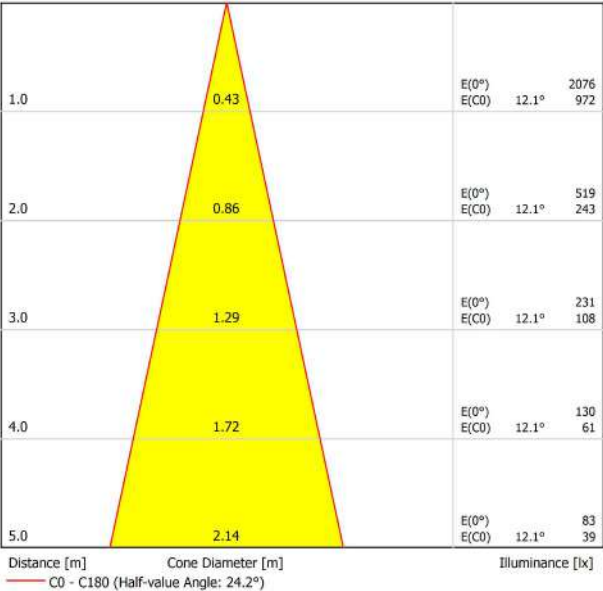



DIMENSIONS

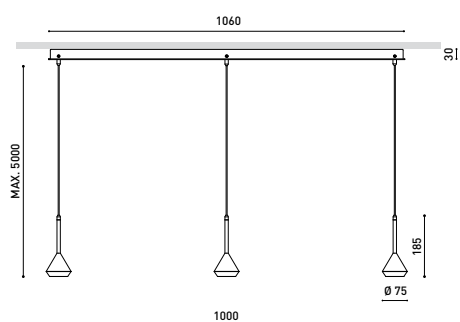

AWARDS



Name	SPIN 3 SURFACE 5M 24° 3000K MC-WT
Reference	A3912101MCWT
Color	Metallized copper
RAL	Electrolytic bath
Category	SUSPENSION

PRODUCT

Light source	LED
Gross luminous flux	3 x 630 Lm
Power	3 x 6,5 W
Power values of the system	21,67 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	24°
Lighting efficiency	86%
Efficacy	97 Lm/W
Current intensity	700 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


OTHER DATA

Ingress Protection	IP20
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Spin Surface is a version that allows it to be installed in places where it is impossible to access the false ceiling. Cement, concrete, vault ... its base, set to apply three luminaires, houses the driver and allows the luminaire to be installed on all types of surfaces.

POLAR DIAGRAM

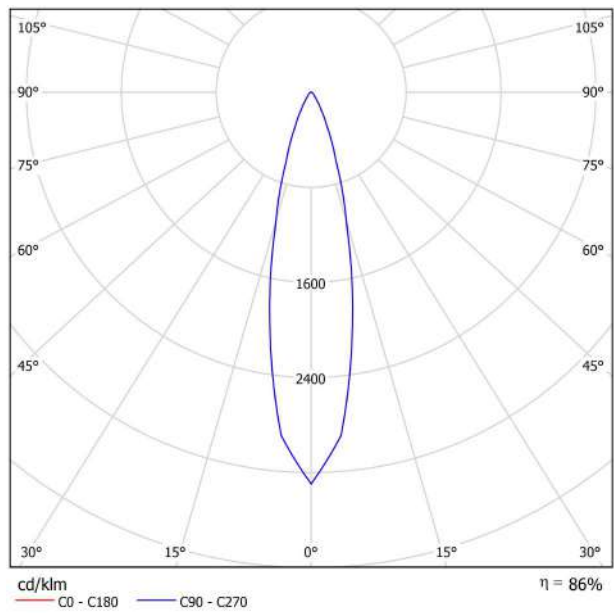


CONICAL DIAGRAM

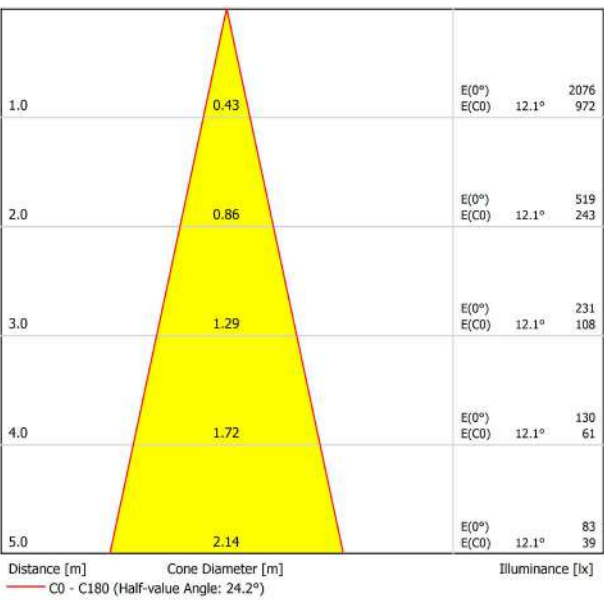



DIMENSIONS

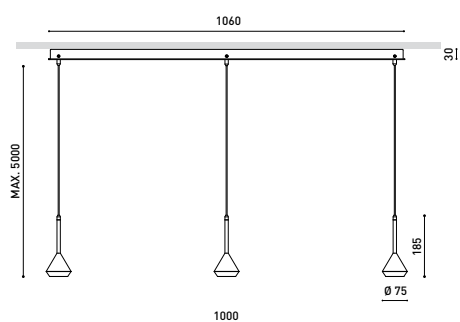

AWARDS



Name	SPIN 3 SURFACE 5M 24° 3000K MG-NT
Reference	A3912101MGNT
Color	Metallized gold
RAL	Electrolytic bath
Category	SUSPENSION

PRODUCT

Light source	LED
Gross luminous flux	3 x 630 Lm
Power	3 x 6,5 W
Power values of the system	21,67 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	24°
Lighting efficiency	86%
Efficacy	97 Lm/W
Current intensity	700 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


OTHER DATA

Ingress Protection	IP20
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Spin Surface is a version that allows it to be installed in places where it is impossible to access the false ceiling. Cement, concrete, vault ... its base, set to apply three luminaires, houses the driver and allows the luminaire to be installed on all types of surfaces.

POLAR DIAGRAM

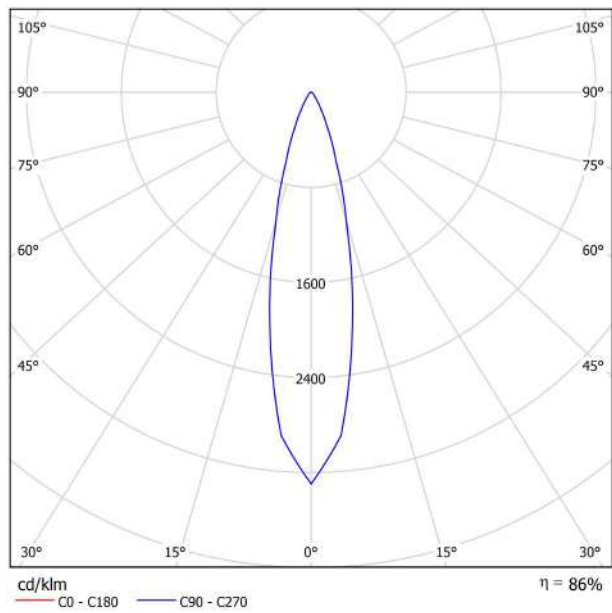


CONICAL DIAGRAM

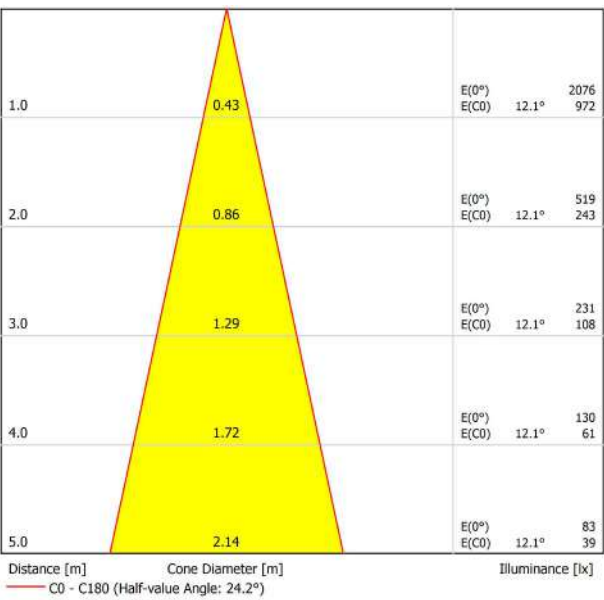



DIMENSIONS

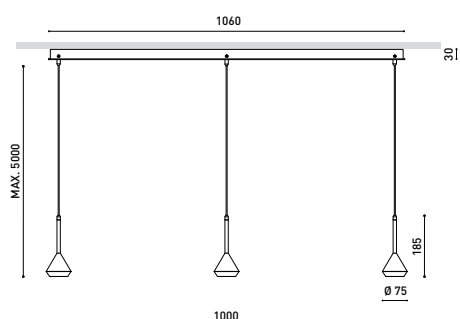

AWARDS



Name	SPIN 3 SURFACE 5M 24° 3000K MG-WT
Reference	A3912101MGWT
Color	Metallized gold
RAL	Electrolytic bath
Category	SUSPENSION

PRODUCT

Light source	LED
Gross luminous flux	3 x 630 Lm
Power	3 x 6,5 W
Power values of the system	21,67 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	24°
Lighting efficiency	86%
Efficacy	97 Lm/W
Current intensity	700 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


OTHER DATA

Ingress Protection	IP20
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Spin Surface is a version that allows it to be installed in places where it is impossible to access the false ceiling. Cement, concrete, vault ... its base, set to apply three luminaires, houses the driver and allows the luminaire to be installed on all types of surfaces.

POLAR DIAGRAM

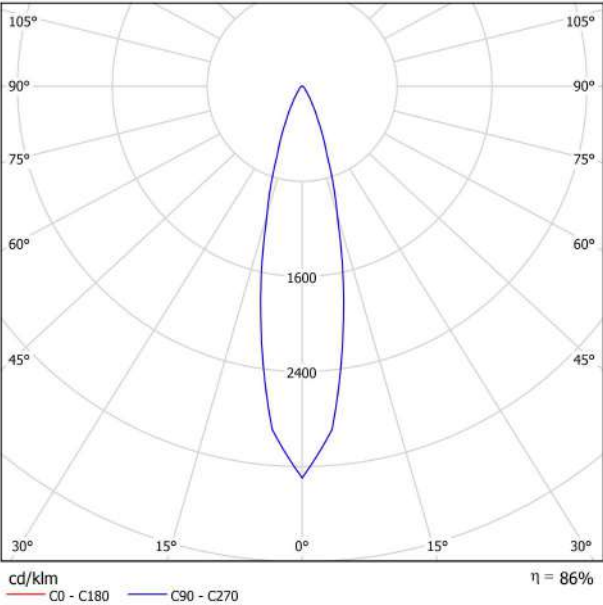


CONICAL DIAGRAM

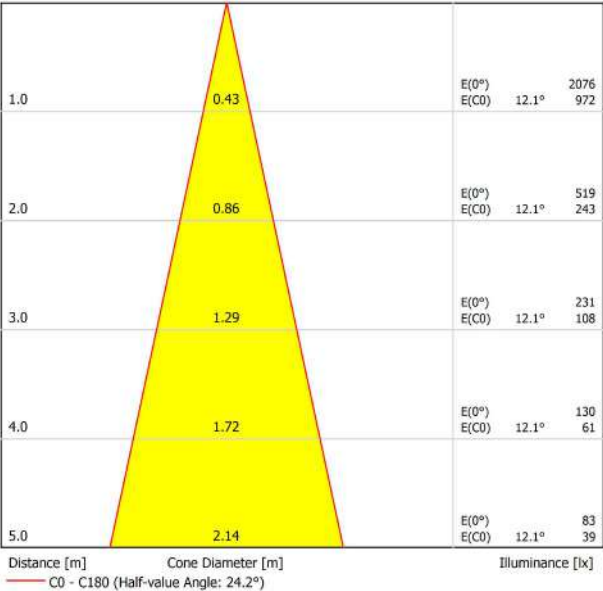



DIMENSIONS

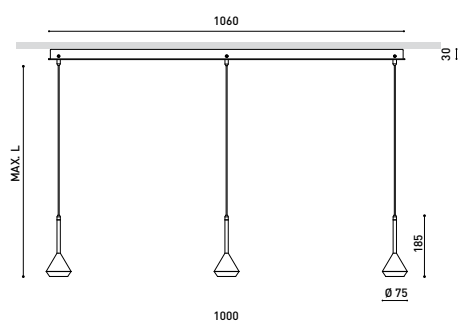

AWARDS



Name	SPIN 3 SURFACE 5M 24° 3000K NT-NT
Reference	A3912101NTNT
Color	Textured black
RAL	9005
Category	SURFACE

PRODUCT

Light source	LED
Gross luminous flux	3 x 630 Lm
Power	3 x 6,5 W
Power values of the system	21,67 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	24°
Lighting efficiency	86%
Efficacy	97 Lm/W
Current intensity	700 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Cord length	5 m
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Reduced dimensions, clear lines and a mechanized geometry combined in a pendant luminaire for accent lighting. Its ultra-thin cable gives Spin a sensation of aerial floatability.

POLAR DIAGRAM

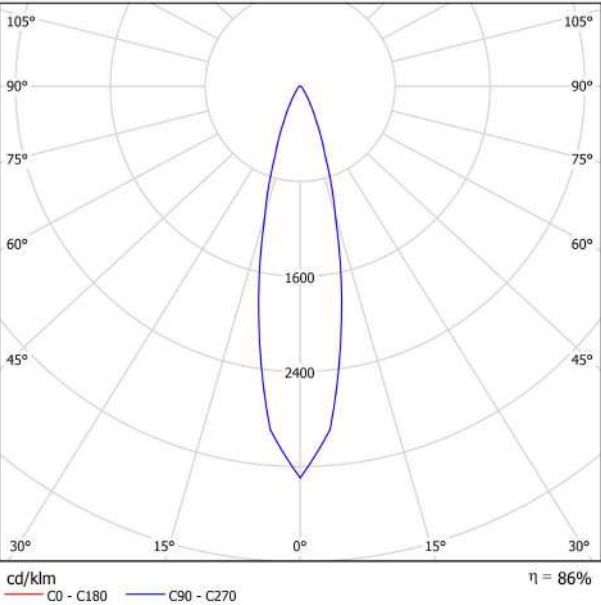


CONICAL DIAGRAM

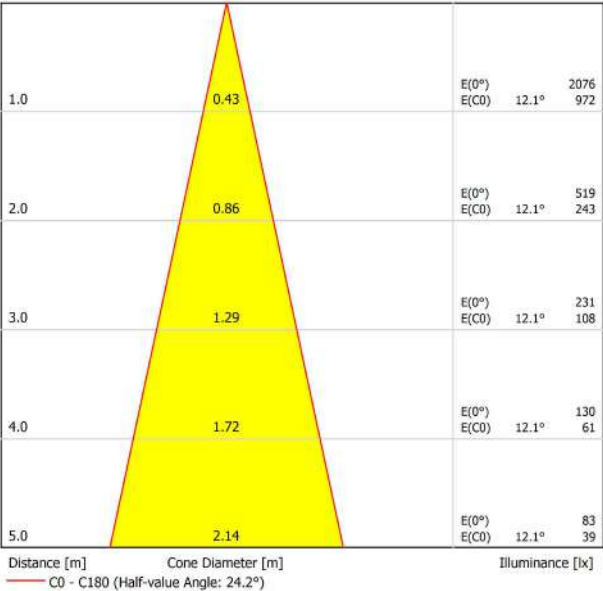



DIMENSIONS

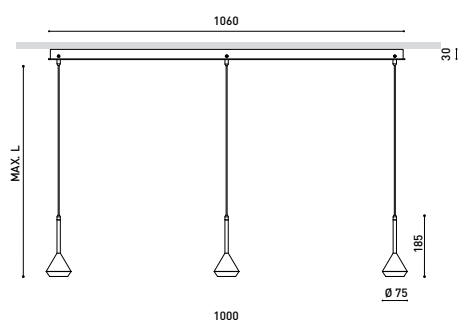

AWARDS



Name	SPIN 3 SURFACE 5M 24° 3000K NT-WT
Reference	A3912101NTWT
Color	Textured black
RAL	9005
Category	SURFACE

PRODUCT

SPIN 3 SURFACE 5M 24° 3000K NT-WT

A3912101NTWT

Textured black

9005

SURFACE

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	3 x 630 Lm
Power	3 x 6,5 W
Power values of the system	21,67 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	24°
Lighting efficiency	86%
Efficacy	97 Lm/W
Current intensity	700 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Cord length	5 m
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Reduced dimensions, clear lines and a mechanized geometry combined in a pendant luminaire for accent lighting. Its ultra-thin cable gives Spin a sensation of aerial floatability.

POLAR DIAGRAM

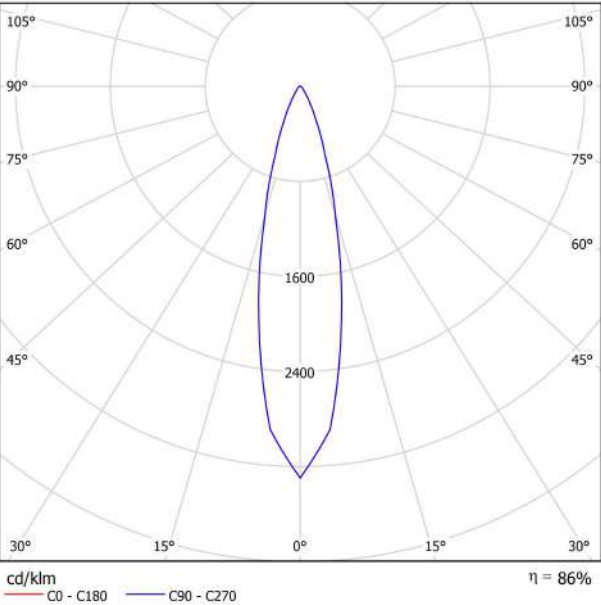


CONICAL DIAGRAM

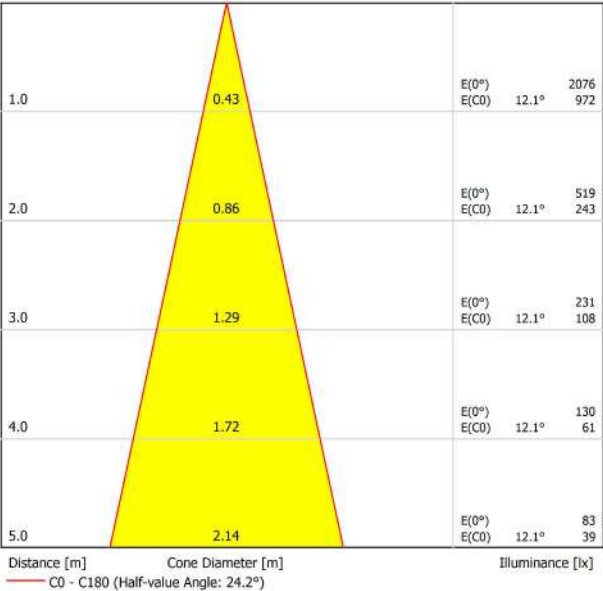



DIMENSIONS

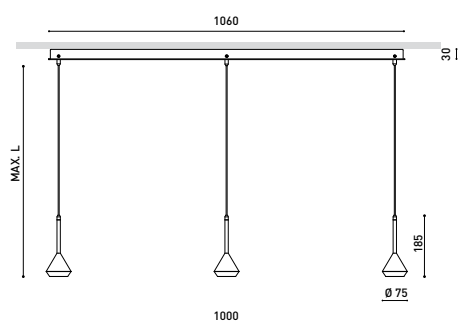

AWARDS



Name	SPIN 3 SURFACE 5M 24° 3000K WT-NT
Reference	A3912101WTNT
Color	Textured white
RAL	9016
Category	SURFACE

PRODUCT

Light source	LED
Gross luminous flux	3 x 630 Lm
Power	3 x 6,5 W
Power values of the system	21,67 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	24°
Lighting efficiency	86%
Efficacy	97 Lm/W
Current intensity	700 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Cord length	5 m
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Reduced dimensions, clear lines and a mechanized geometry combined in a pendant luminaire for accent lighting. Its ultra-thin cable gives Spin a sensation of aerial floatability.

POLAR DIAGRAM

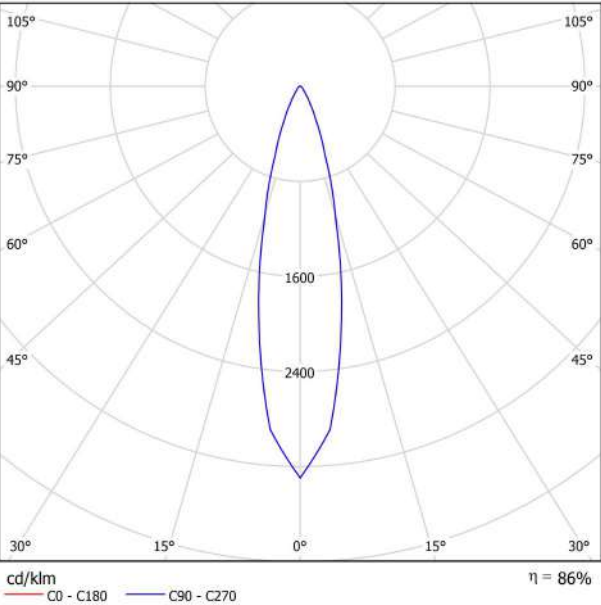


CONICAL DIAGRAM

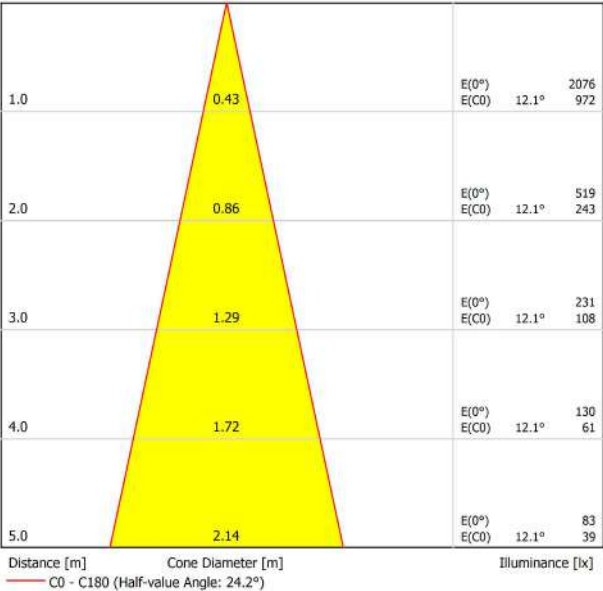



DIMENSIONS

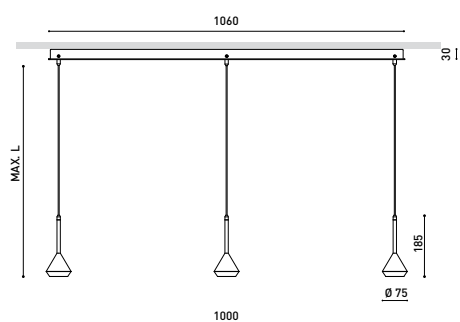

AWARDS



Name	SPIN 3 SURFACE 5M 24° 3000K WT-WT
Reference	A3912101WTWT
Color	Textured white
RAL	9016
Category	SURFACE

PRODUCT

Light source	LED
Gross luminous flux	3 x 630 Lm
Power	3 x 6,5 W
Power values of the system	21,67 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	24°
Lighting efficiency	86%
Efficacy	97 Lm/W
Current intensity	700 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Cord length	5 m
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Reduced dimensions, clear lines and a mechanized geometry combined in a pendant luminaire for accent lighting. Its ultra-thin cable gives Spin a sensation of aerial floatability.

POLAR DIAGRAM

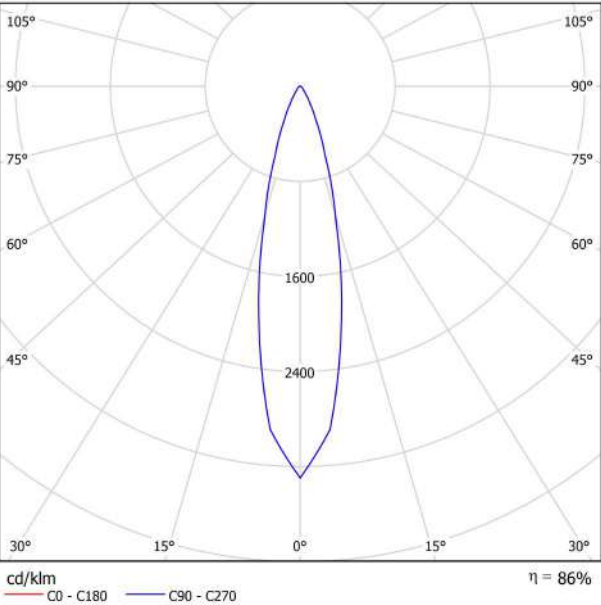


CONICAL DIAGRAM

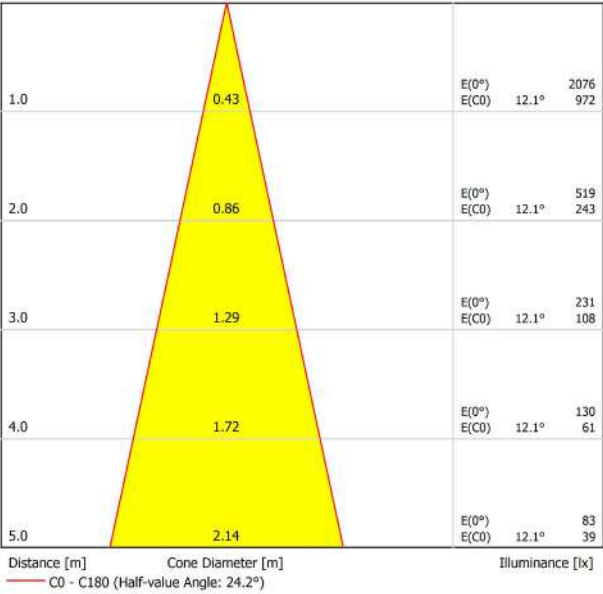



DIMENSIONS

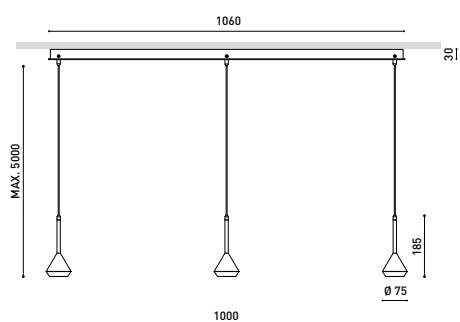

PRODUCT

Name	SPIN 3 SURFACE 5M 24° 4000K MC-NT
Reference	A3912102MCNT
Color	Metallized copper
RAL	Electrolytic bath
Category	SUSPENSION

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	3 x 680 Lm
Power	3 x 6,5 W
Power values of the system	21,67 W
Colour temperature	4000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	24°
Lighting efficiency	86%
Efficacy	105 Lm/W
Current intensity	700 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h

OTHER DATA

Ingress Protection	IP20
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




AWARDS




Spin Surface is a version that allows it to be installed in places where it is impossible to access the false ceiling. Cement, concrete, vault ... its base, set to apply three luminaires, houses the driver and allows the luminaire to be installed on all types of surfaces.

POLAR DIAGRAM

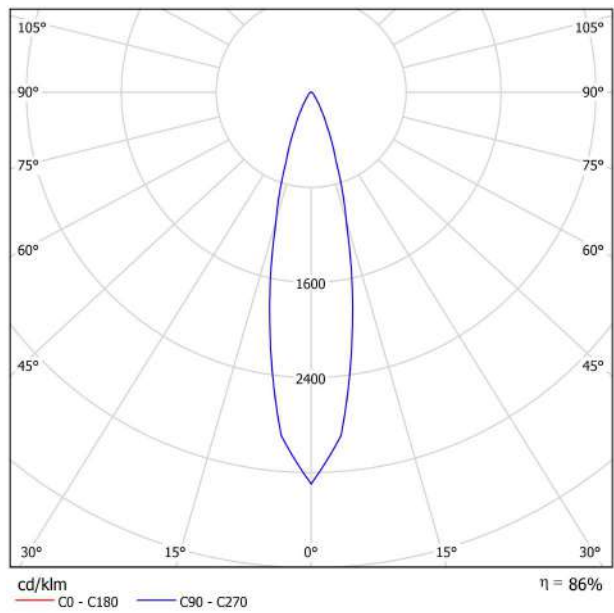


CONICAL DIAGRAM

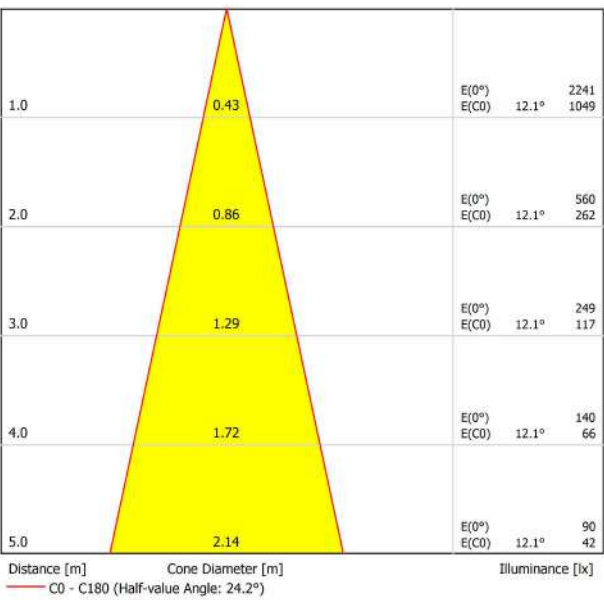



DIMENSIONS

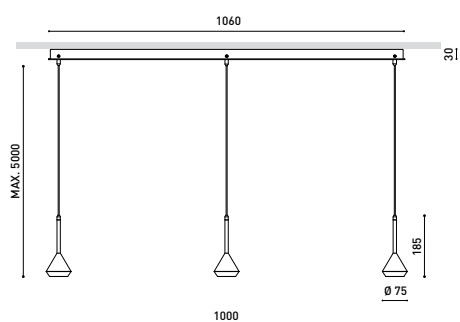

AWARDS



Name	SPIN 3 SURFACE 5M 24° 4000K MC-WT
Reference	A3912102MCWT
Color	Metallized copper
RAL	Electrolytic bath
Category	SUSPENSION

PRODUCT

Light source	LED
Gross luminous flux	3 x 680 Lm
Power	3 x 6,5 W
Power values of the system	21,67 W
Colour temperature	4000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	24°
Lighting efficiency	86%
Efficacy	105 Lm/W
Current intensity	700 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


OTHER DATA

Ingress Protection	IP20
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Spin Surface is a version that allows it to be installed in places where it is impossible to access the false ceiling. Cement, concrete, vault ... its base, set to apply three luminaires, houses the driver and allows the luminaire to be installed on all types of surfaces.

POLAR DIAGRAM

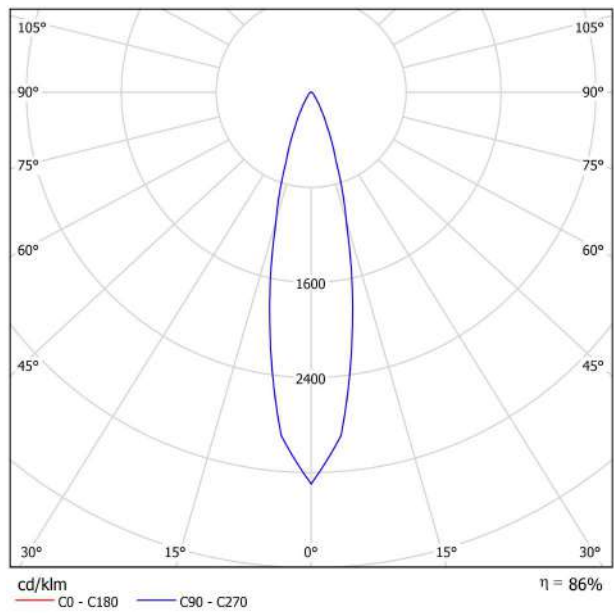


CONICAL DIAGRAM

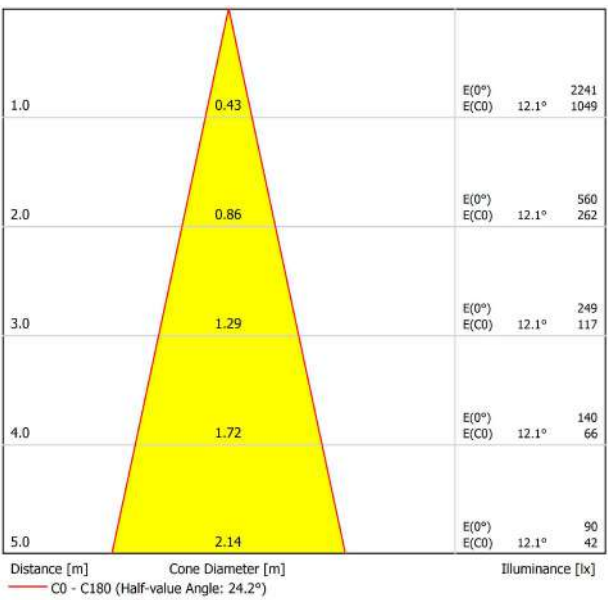



DIMENSIONS

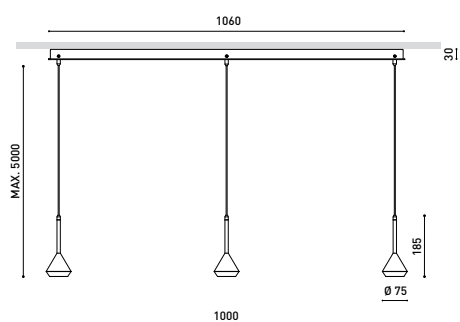

AWARDS



Name	SPIN 3 SURFACE 5M 24° 4000K MG-NT
Reference	A3912102MGNT
Color	Metallized gold
RAL	Electrolytic bath
Category	SUSPENSION

PRODUCT

SPIN 3 SURFACE 5M 24° 4000K MG-NT

A3912102MGNT

Metallized gold

Electrolytic bath

SUSPENSION

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	3 x 680 Lm
Power	3 x 6,5 W
Power values of the system	21,67 W
Colour temperature	4000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	24°
Lighting efficiency	86%
Efficacy	105 Lm/W
Current intensity	700 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Spin Surface is a version that allows it to be installed in places where it is impossible to access the false ceiling. Cement, concrete, vault ... its base, set to apply three luminaires, houses the driver and allows the luminaire to be installed on all types of surfaces.

POLAR DIAGRAM

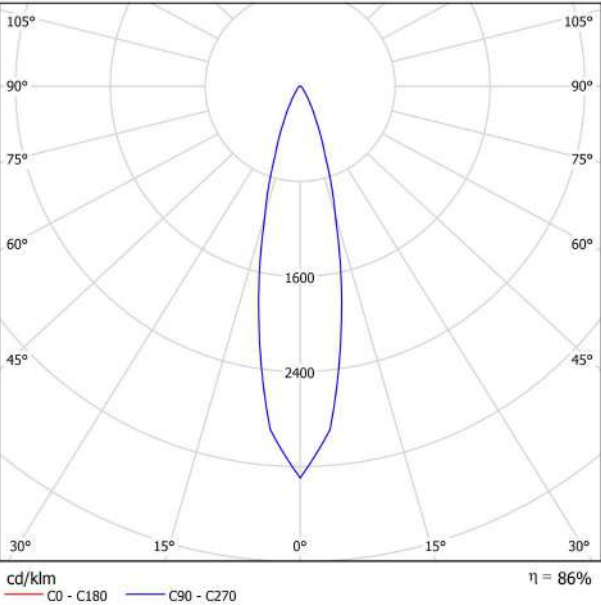


CONICAL DIAGRAM

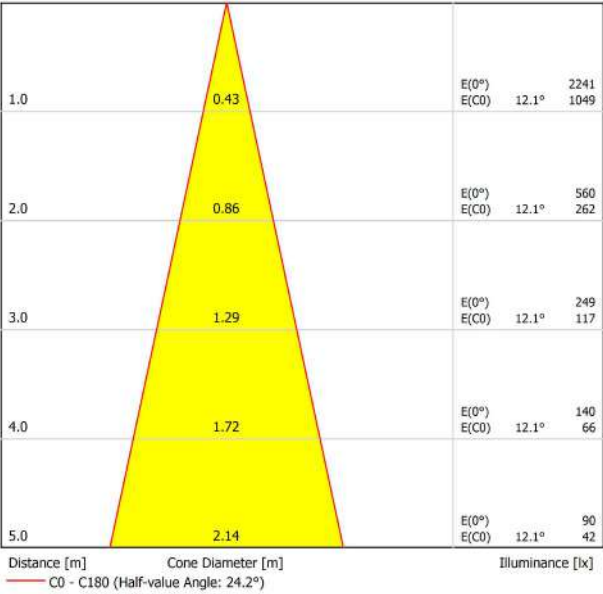



DIMENSIONS

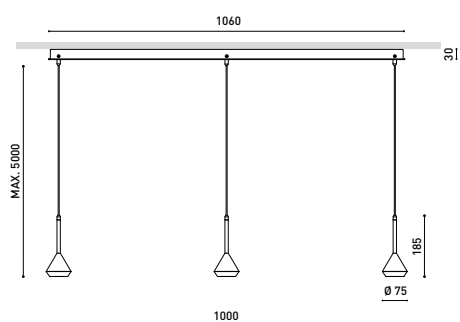

AWARDS



Name	SPIN 3 SURFACE 5M 24° 4000K MG-WT
Reference	A3912102MGWT
Color	Metallized gold
RAL	Electrolytic bath
Category	SUSPENSION

PRODUCT

Light source	LED
Gross luminous flux	3 x 680 Lm
Power	3 x 6,5 W
Power values of the system	21,67 W
Colour temperature	4000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	24°
Lighting efficiency	86%
Efficacy	105 Lm/W
Current intensity	700 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


OTHER DATA

Ingress Protection	IP20
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Spin Surface is a version that allows it to be installed in places where it is impossible to access the false ceiling. Cement, concrete, vault ... its base, set to apply three luminaires, houses the driver and allows the luminaire to be installed on all types of surfaces.

POLAR DIAGRAM

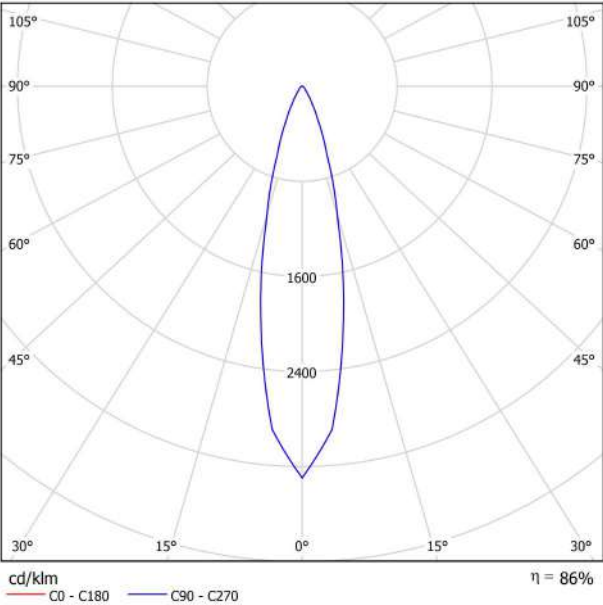


CONICAL DIAGRAM

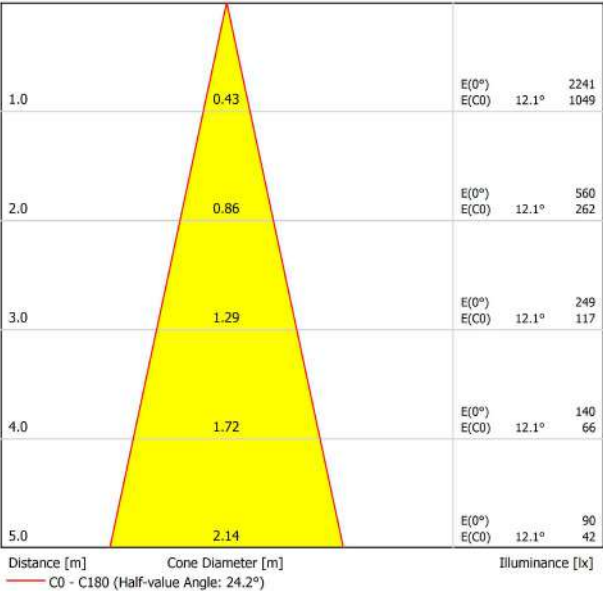



DIMENSIONS

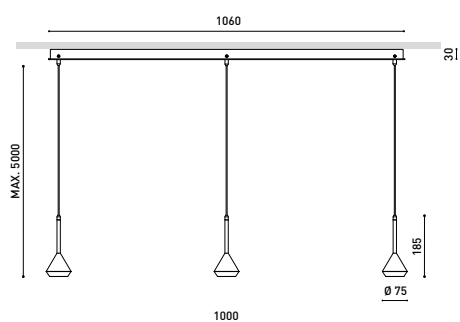

PRODUCT

Name	SPIN 3 SURFACE 5M 40° 4000K MC-WT
Reference	A3912112MCWT
Color	Metallized copper
RAL	Electrolytic bath
Category	SUSPENSION

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	3 x 680 Lm
Power	3 x 6,5 W
Power values of the system	21,67 W
Colour temperature	4000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	40°
Lighting efficiency	84%
Efficacy	105 Lm/W
Current intensity	700 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h

OTHER DATA

Ingress Protection	IP20
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




AWARDS




Spin Surface is a version that allows it to be installed in places where it is impossible to access the false ceiling. Cement, concrete, vault ... its base, set to apply three luminaires, houses the driver and allows the luminaire to be installed on all types of surfaces.

POLAR DIAGRAM

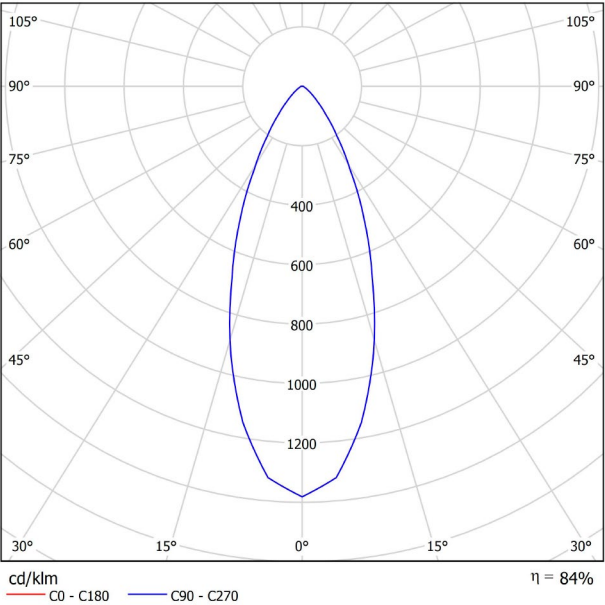


CONICAL DIAGRAM

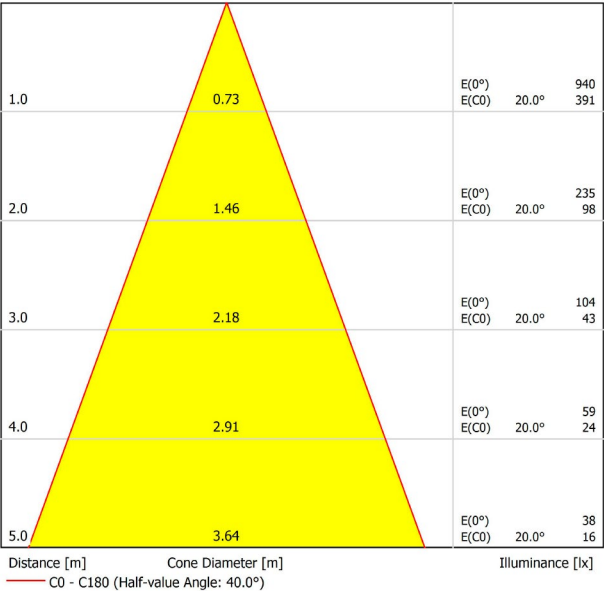



DIMENSIONS

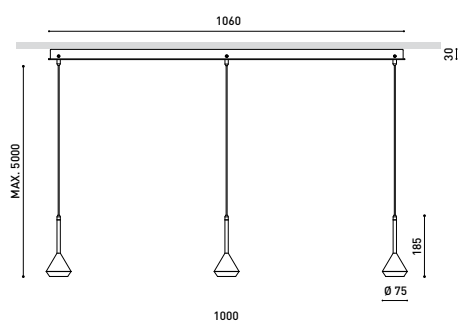

AWARDS



Name	SPIN 3 SURFACE 5M 40° 4000K MG-NT
Reference	A3912112MGNT
Color	Metallized gold
RAL	Electrolytic bath
Category	SUSPENSION

PRODUCT

Light source	LED
Gross luminous flux	3 x 680 Lm
Power	3 x 6,5 W
Power values of the system	21,67 W
Colour temperature	4000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	40°
Lighting efficiency	84%
Efficacy	105 Lm/W
Current intensity	700 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


OTHER DATA

Ingress Protection	IP20
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Spin Surface is a version that allows it to be installed in places where it is impossible to access the false ceiling. Cement, concrete, vault ... its base, set to apply three luminaires, houses the driver and allows the luminaire to be installed on all types of surfaces.

POLAR DIAGRAM

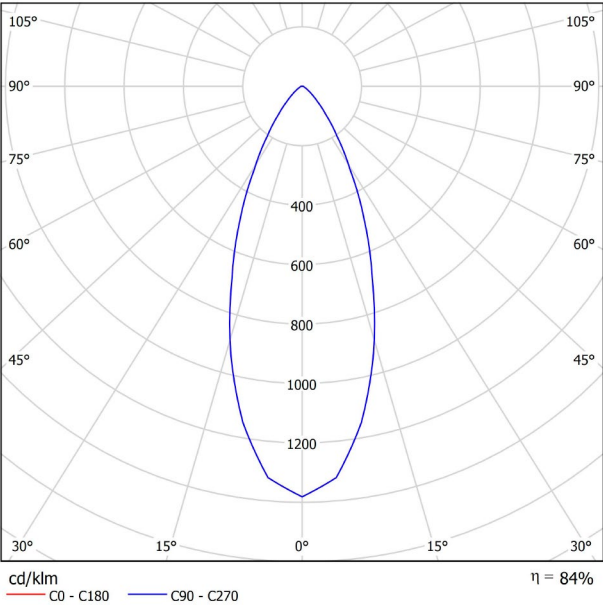


CONICAL DIAGRAM

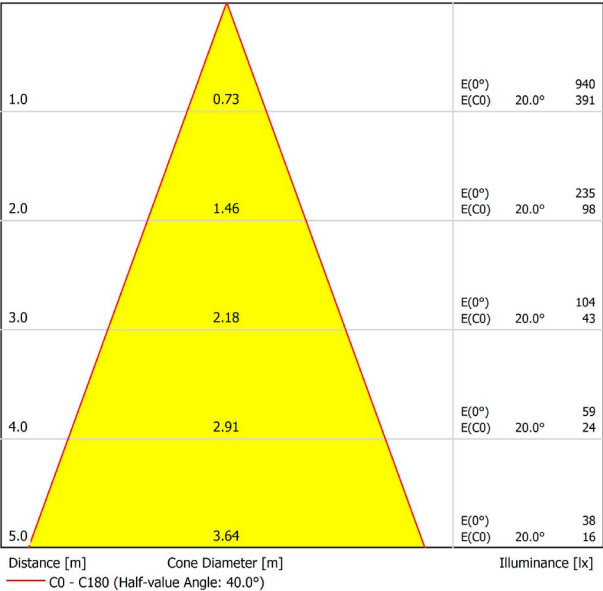



DIMENSIONS

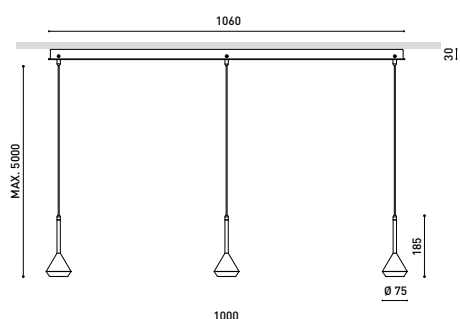

AWARDS



Name	SPIN 3 SURFACE 5M 40° 4000K MG-WT
Reference	A3912112MGWT
Color	Metallized gold
RAL	Electrolytic bath
Category	SUSPENSION

PRODUCT

Light source	LED
Gross luminous flux	3 x 680 Lm
Power	3 x 6,5 W
Power values of the system	21,67 W
Colour temperature	4000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	40°
Lighting efficiency	84%
Efficacy	105 Lm/W
Current intensity	700 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


OTHER DATA

Ingress Protection	IP20
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Spin Surface is a version that allows it to be installed in places where it is impossible to access the false ceiling. Cement, concrete, vault ... its base, set to apply three luminaires, houses the driver and allows the luminaire to be installed on all types of surfaces.

POLAR DIAGRAM

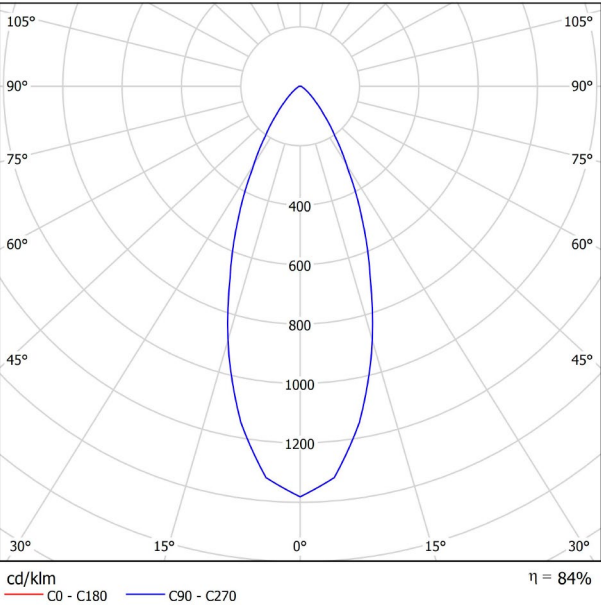


CONICAL DIAGRAM

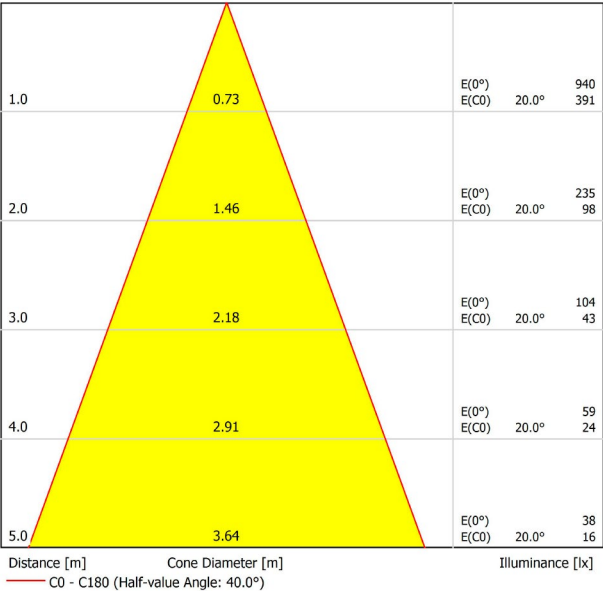



DIMENSIONS

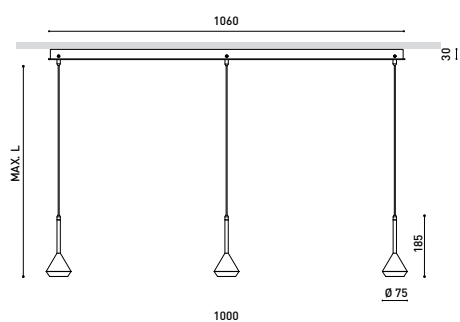

AWARDS



Name	SPIN 3 SURFACE 5M 40° 4000K NT-NT
Reference	A3912112NTNT
Color	Textured black
RAL	9005
Category	SURFACE

PRODUCT

Light source	LED
Gross luminous flux	3 x 680 Lm
Power	3 x 6,5 W
Power values of the system	21,67 W
Colour temperature	4000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	40°
Lighting efficiency	84%
Efficacy	105 Lm/W
Current intensity	700 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Cord length	5 m
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Reduced dimensions, clear lines and a mechanized geometry combined in a pendant luminaire for accent lighting. Its ultra-thin cable gives Spin a sensation of aerial floatability.

POLAR DIAGRAM

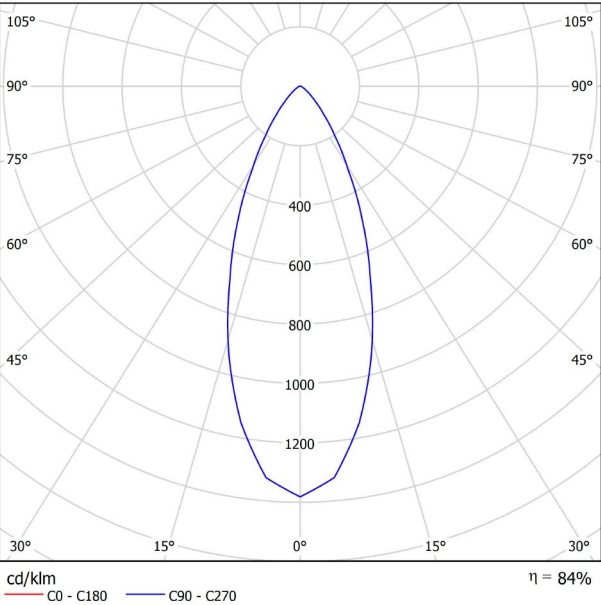


CONICAL DIAGRAM

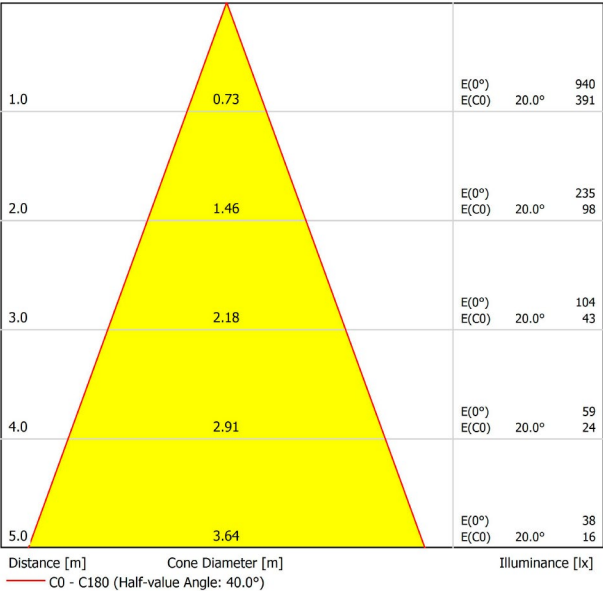



DIMENSIONS

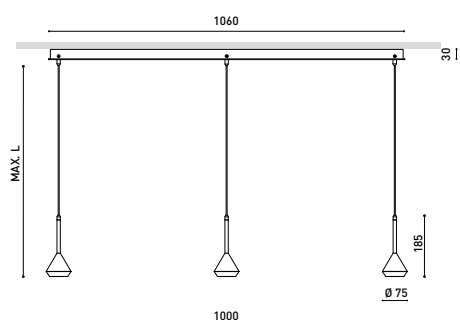

AWARDS



Name	SPIN 3 SURFACE 5M 40° 4000K NT-WT
Reference	A3912112NTWT
Color	Textured black
RAL	9005
Category	SURFACE

PRODUCT

Light source	LED
Gross luminous flux	3 x 680 Lm
Power	3 x 6,5 W
Power values of the system	21,67 W
Colour temperature	4000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	40°
Lighting efficiency	84%
Efficacy	105 Lm/W
Current intensity	700 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


OTHER DATA

Ingress Protection	IP20
Cord length	5 m
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Reduced dimensions, clear lines and a mechanized geometry combined in a pendant luminaire for accent lighting. Its ultra-thin cable gives Spin a sensation of aerial floatability.

POLAR DIAGRAM

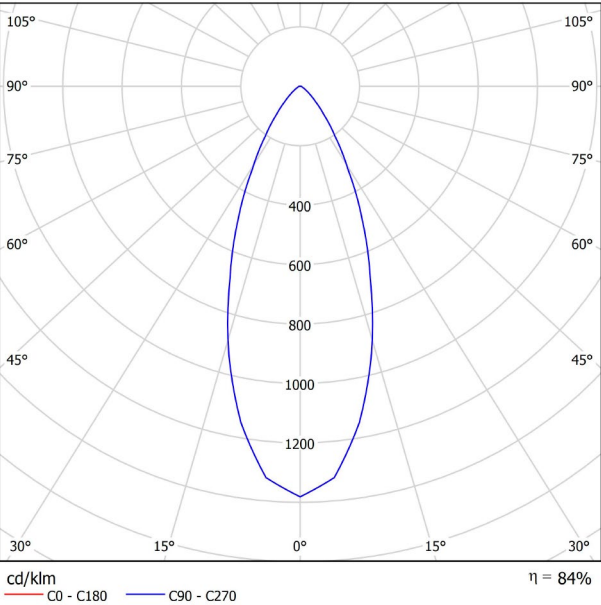


CONICAL DIAGRAM

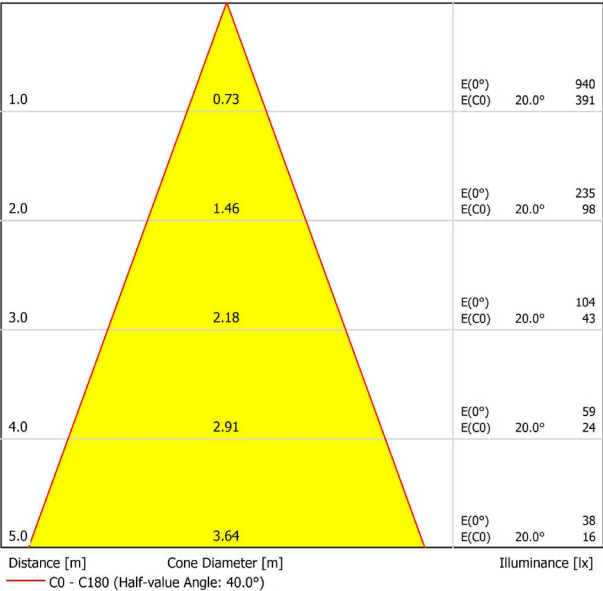



DIMENSIONS

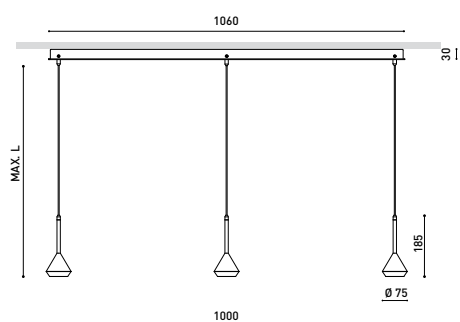

AWARDS



Name	SPIN 3 SURFACE 5M 40° 4000K WT-NT
Reference	A3912112WTNT
Color	Textured white
RAL	9016
Category	SURFACE

PRODUCT

Light source	LED
Gross luminous flux	3 x 680 Lm
Power	3 x 6,5 W
Power values of the system	21,67 W
Colour temperature	4000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	40°
Lighting efficiency	84%
Efficacy	105 Lm/W
Current intensity	700 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Cord length	5 m
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Reduced dimensions, clear lines and a mechanized geometry combined in a pendant luminaire for accent lighting. Its ultra-thin cable gives Spin a sensation of aerial floatability.

POLAR DIAGRAM

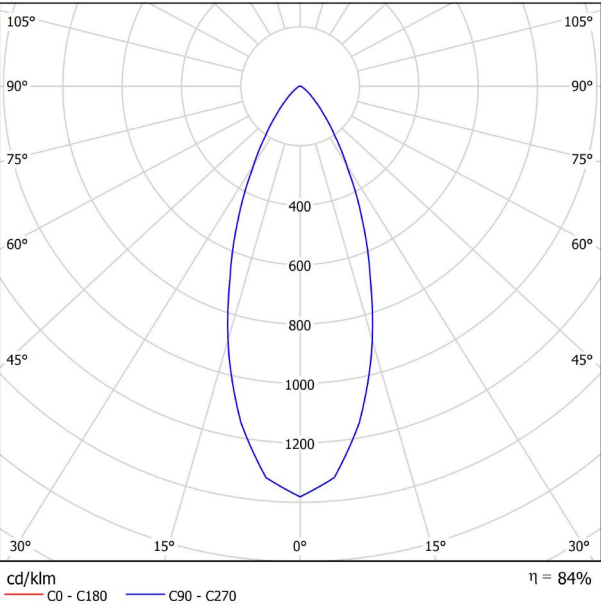


CONICAL DIAGRAM

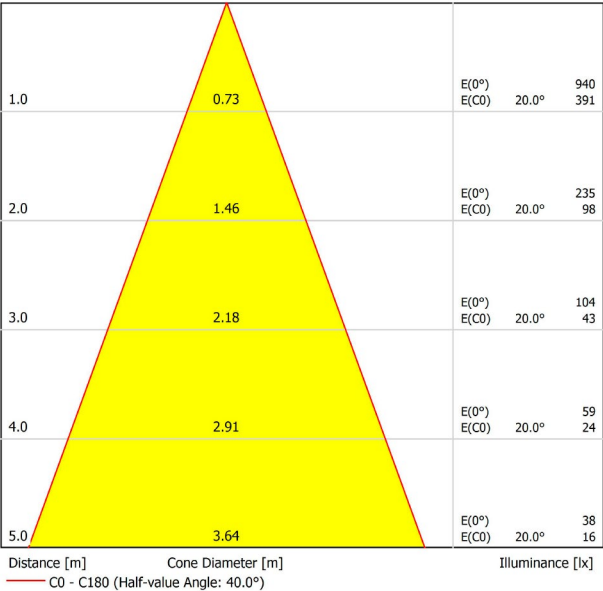



DIMENSIONS

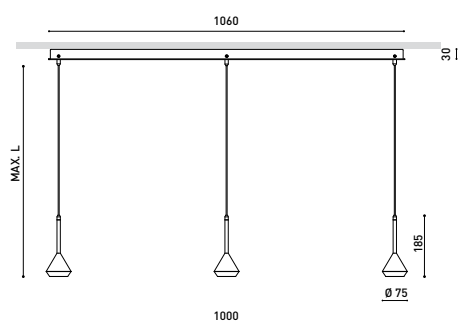

AWARDS



Name	SPIN 3 SURFACE 5M 40° 4000K WT-WT
Reference	A3912112WTWT
Color	Textured white
RAL	9016
Category	SURFACE

PRODUCT

Light source	LED
Gross luminous flux	3 x 680 Lm
Power	3 x 6,5 W
Power values of the system	21,67 W
Colour temperature	4000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	40°
Lighting efficiency	84%
Efficacy	105 Lm/W
Current intensity	700 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Cord length	5 m
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Reduced dimensions, clear lines and a mechanized geometry combined in a pendant luminaire for accent lighting. Its ultra-thin cable gives Spin a sensation of aerial floatability.

POLAR DIAGRAM

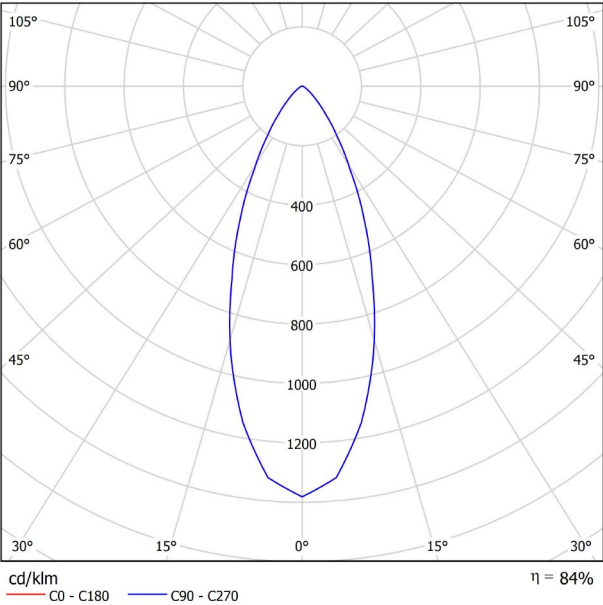


CONICAL DIAGRAM

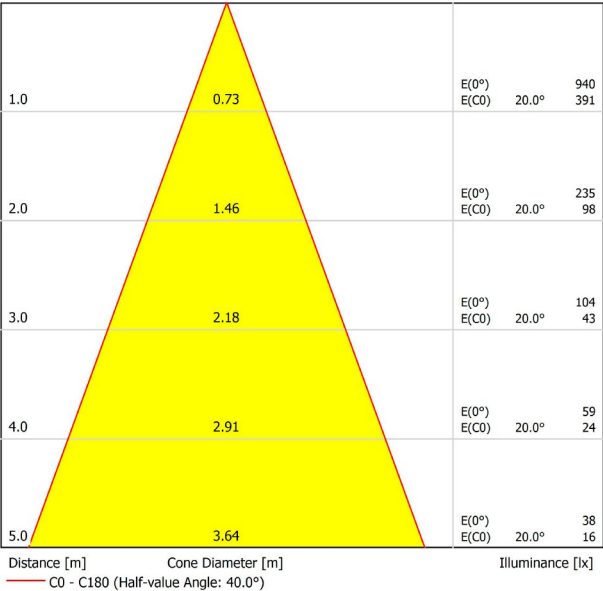



DIMENSIONS

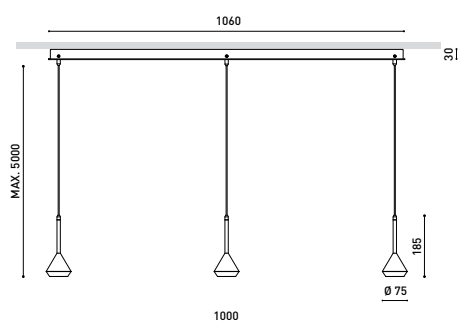

AWARDS



Name	SPIN 3 SURFACE 5M 24° DIM DALI 2700K MC-NT
Reference	A3912200MCNT
Color	Metallized copper
RAL	Electrolytic bath
Category	SUSPENSION

PRODUCT

Light source	LED
Gross luminous flux	3 x 600 Lm
Power	3 x 6,5 W
Power values of the system	23,78 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	24°
Lighting efficiency	86%
Efficacy	92 Lm/W
Current intensity	700 mA
Dimming	DALI - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


OTHER DATA

Ingress Protection	IP20
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Spin Surface is a version that allows it to be installed in places where it is impossible to access the false ceiling. Cement, concrete, vault ... its base, set to apply three luminaires, houses the driver and allows the luminaire to be installed on all types of surfaces.

POLAR DIAGRAM

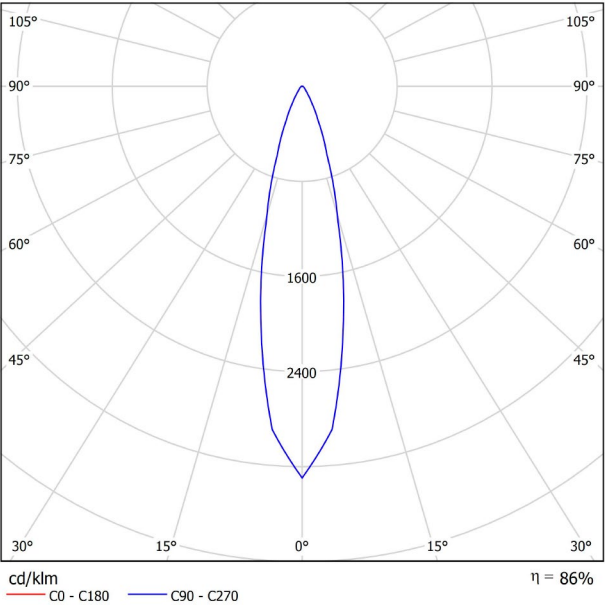


CONICAL DIAGRAM

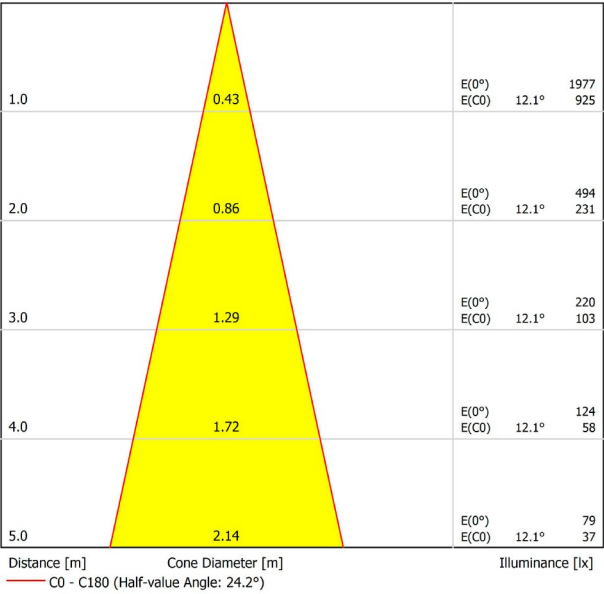



DIMENSIONS

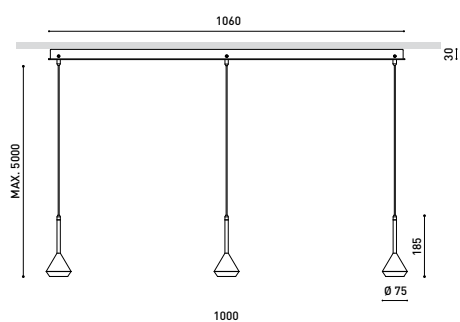

AWARDS



Name	SPIN 3 SURFACE 5M 24° DIM DALI 2700K MC-WT
Reference	A3912200MCWT
Color	Metallized copper
RAL	Electrolytic bath
Category	SUSPENSION

PRODUCT

Light source	LED
Gross luminous flux	3 x 600 Lm
Power	3 x 6,5 W
Power values of the system	23,78 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	24°
Lighting efficiency	86%
Efficacy	92 Lm/W
Current intensity	700 mA
Dimming	DALI - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


OTHER DATA

Ingress Protection	IP20
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Spin Surface is a version that allows it to be installed in places where it is impossible to access the false ceiling. Cement, concrete, vault ... its base, set to apply three luminaires, houses the driver and allows the luminaire to be installed on all types of surfaces.

POLAR DIAGRAM

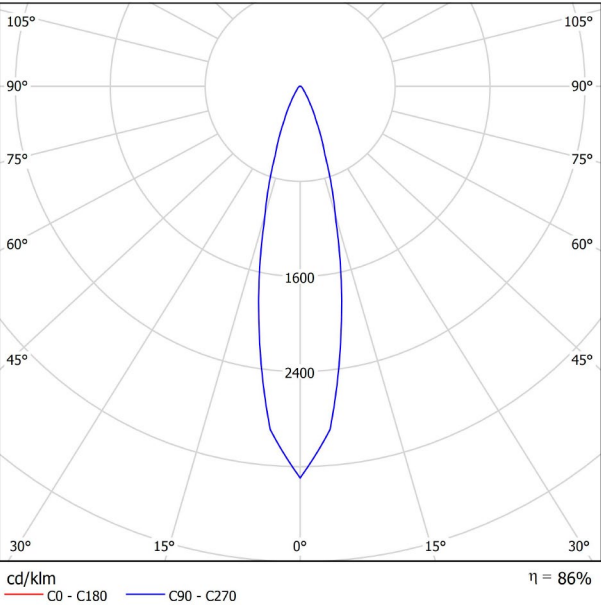


CONICAL DIAGRAM

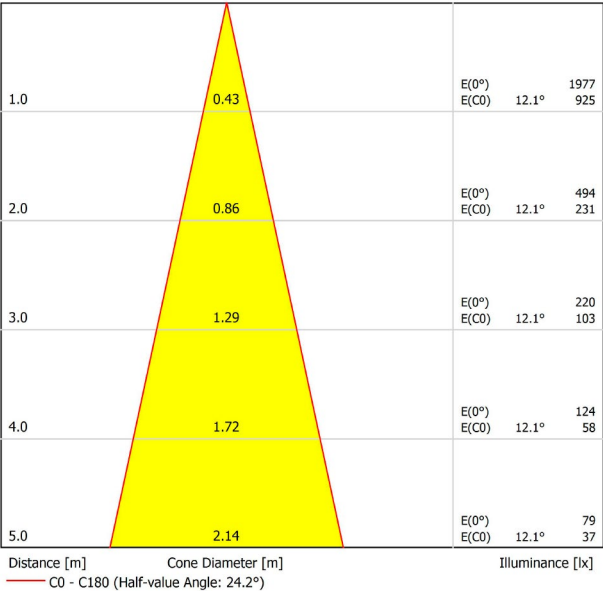



DIMENSIONS

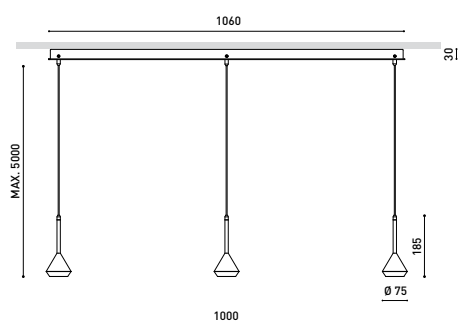

PRODUCT

Name	SPIN 3 SURFACE 5M 40° 2700K MC-WT
Reference	A3912110MCWT
Color	Metallized copper
RAL	Electrolytic bath
Category	SUSPENSION

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	3 x 600 Lm
Power	3 x 6,5 W
Power values of the system	21,67 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	40°
Lighting efficiency	84%
Efficacy	92 Lm/W
Current intensity	700 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h

OTHER DATA

Ingress Protection	IP20
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




AWARDS




Spin Surface is a version that allows it to be installed in places where it is impossible to access the false ceiling. Cement, concrete, vault ... its base, set to apply three luminaires, houses the driver and allows the luminaire to be installed on all types of surfaces.

POLAR DIAGRAM

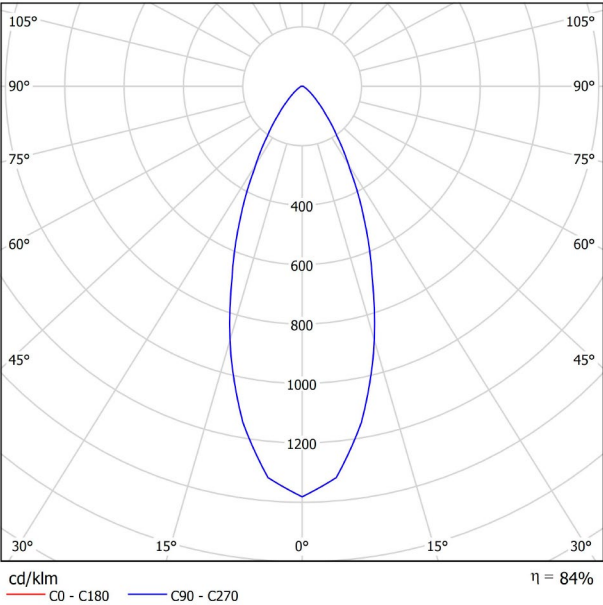


CONICAL DIAGRAM

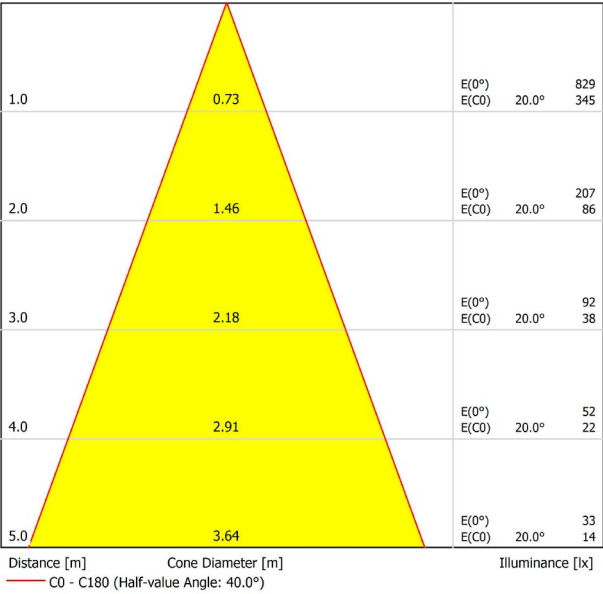



DIMENSIONS

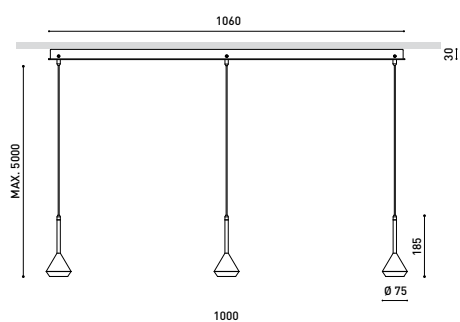

AWARDS



Name	SPIN 3 SURFACE 5M 40° 2700K MG-NT
Reference	A3912110MGNT
Color	Metallized gold
RAL	Electrolytic bath
Category	SUSPENSION

PRODUCT

Light source	LED
Gross luminous flux	3 x 600 Lm
Power	3 x 6,5 W
Power values of the system	21,67 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	40°
Lighting efficiency	84%
Efficacy	92 Lm/W
Current intensity	700 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


OTHER DATA

Ingress Protection	IP20
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Spin Surface is a version that allows it to be installed in places where it is impossible to access the false ceiling. Cement, concrete, vault ... its base, set to apply three luminaires, houses the driver and allows the luminaire to be installed on all types of surfaces.

POLAR DIAGRAM

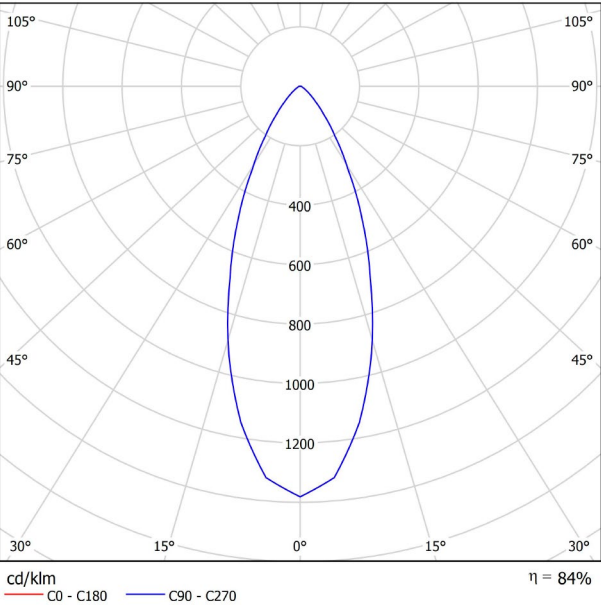


CONICAL DIAGRAM

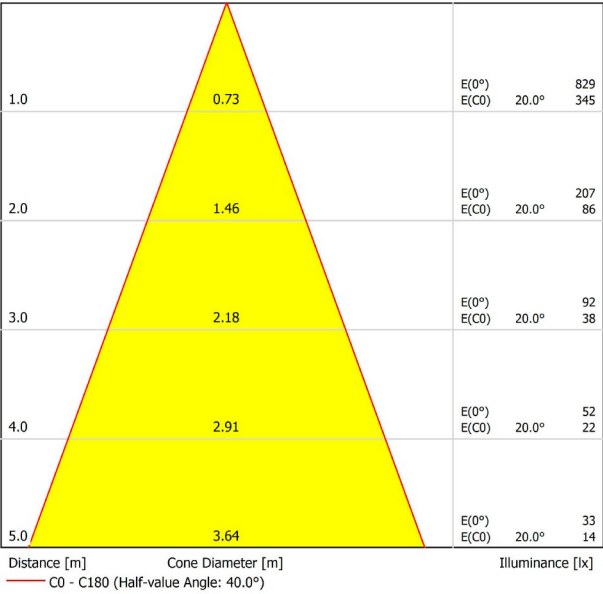



DIMENSIONS

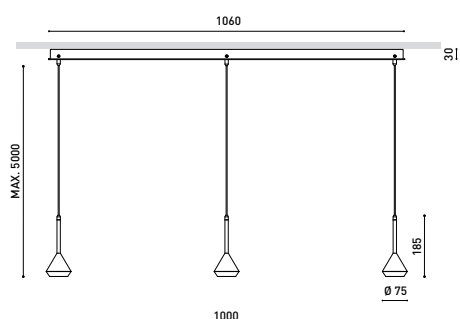

AWARDS



Name	SPIN 3 SURFACE 5M 40° 2700K MG-WT
Reference	A3912110MGWT
Color	Metallized gold
RAL	Electrolytic bath
Category	SUSPENSION

PRODUCT

Light source	LED
Gross luminous flux	3 x 600 Lm
Power	3 x 6,5 W
Power values of the system	21,67 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	40°
Lighting efficiency	84%
Efficacy	92 Lm/W
Current intensity	700 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Spin Surface is a version that allows it to be installed in places where it is impossible to access the false ceiling. Cement, concrete, vault ... its base, set to apply three luminaires, houses the driver and allows the luminaire to be installed on all types of surfaces.

POLAR DIAGRAM

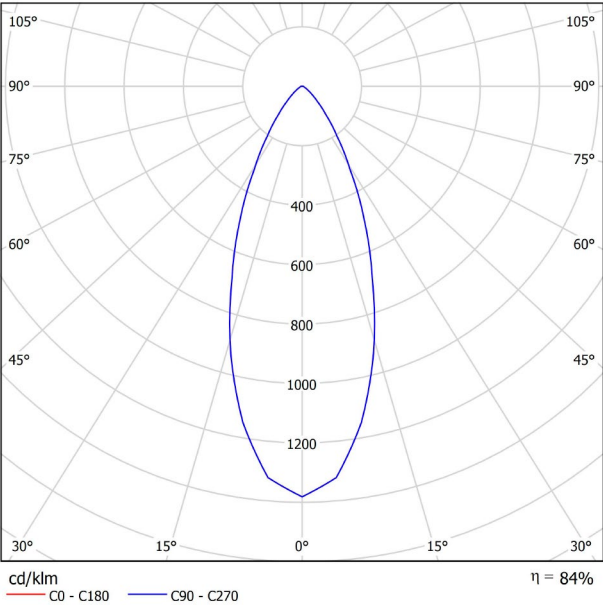


CONICAL DIAGRAM

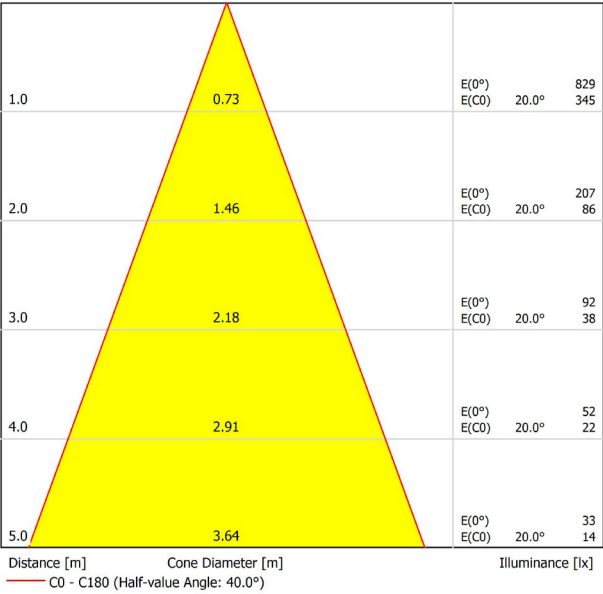



DIMENSIONS

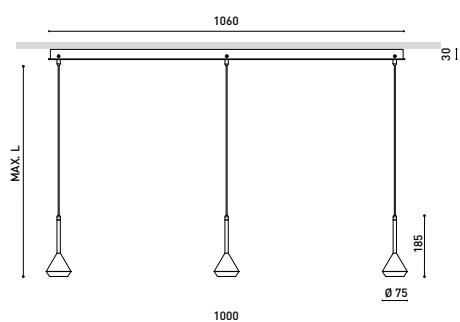

AWARDS



Name	SPIN 3 SURFACE 5M 40° 2700K NT-NT
Reference	A3912110NTNT
Color	Textured black
RAL	9005
Category	SURFACE

PRODUCT

Light source	LED
Gross luminous flux	3 x 600 Lm
Power	3 x 6,5 W
Power values of the system	21,67 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	40°
Lighting efficiency	84%
Efficacy	92 Lm/W
Current intensity	700 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Cord length	5 m
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Reduced dimensions, clear lines and a mechanized geometry combined in a pendant luminaire for accent lighting. Its ultra-thin cable gives Spin a sensation of aerial floatability.

POLAR DIAGRAM

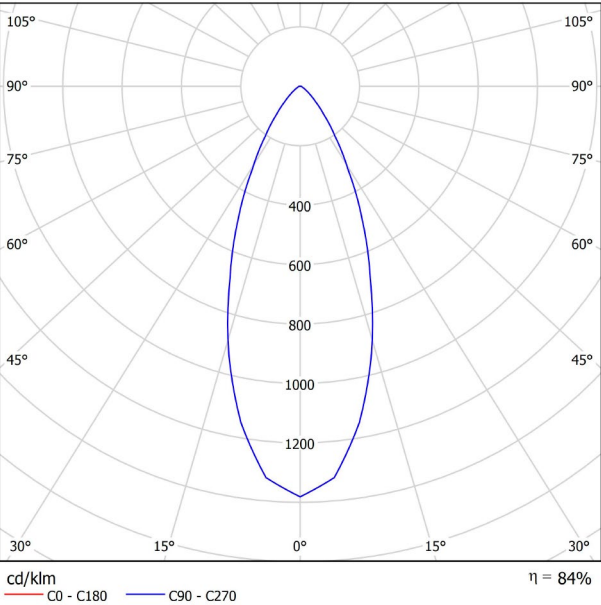


CONICAL DIAGRAM

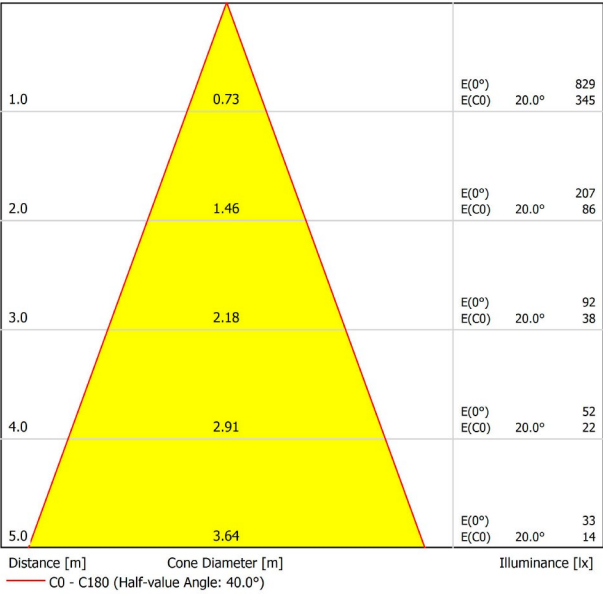



DIMENSIONS

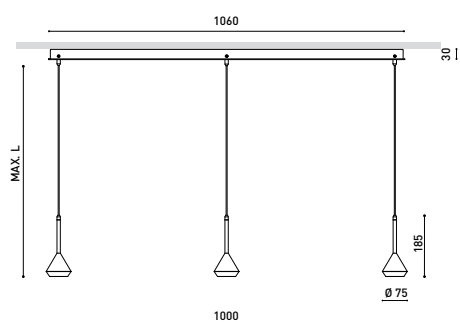

AWARDS



Name	SPIN 3 SURFACE 5M 40° 2700K NT-WT
Reference	A3912110NTWT
Color	Textured black
RAL	9005
Category	SURFACE

PRODUCT

Light source	LED
Gross luminous flux	3 x 600 Lm
Power	3 x 6,5 W
Power values of the system	21,67 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	40°
Lighting efficiency	84%
Efficacy	92 Lm/W
Current intensity	700 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Cord length	5 m
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Reduced dimensions, clear lines and a mechanized geometry combined in a pendant luminaire for accent lighting. Its ultra-thin cable gives Spin a sensation of aerial floatability.

POLAR DIAGRAM

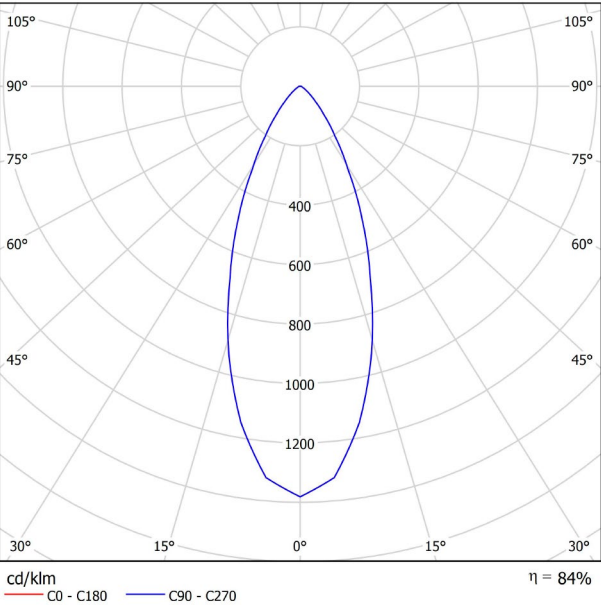


CONICAL DIAGRAM

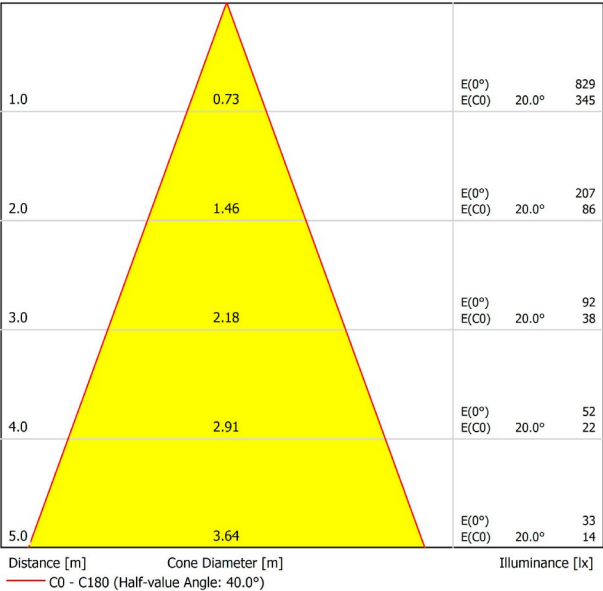



DIMENSIONS

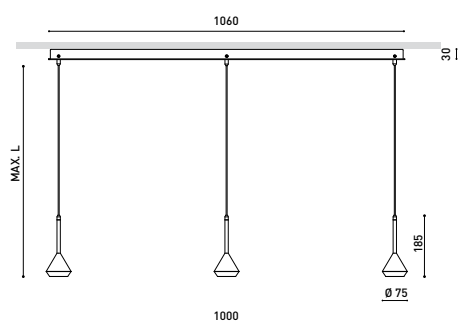

AWARDS



Name	SPIN 3 SURFACE 5M 40° 2700K WT-NT
Reference	A3912110WTNT
Color	Textured white
RAL	9016
Category	SURFACE

PRODUCT

Light source	LED
Gross luminous flux	3 x 600 Lm
Power	3 x 6,5 W
Power values of the system	21,67 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	40°
Lighting efficiency	84%
Efficacy	92 Lm/W
Current intensity	700 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Cord length	5 m
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Reduced dimensions, clear lines and a mechanized geometry combined in a pendant luminaire for accent lighting. Its ultra-thin cable gives Spin a sensation of aerial floatability.

POLAR DIAGRAM

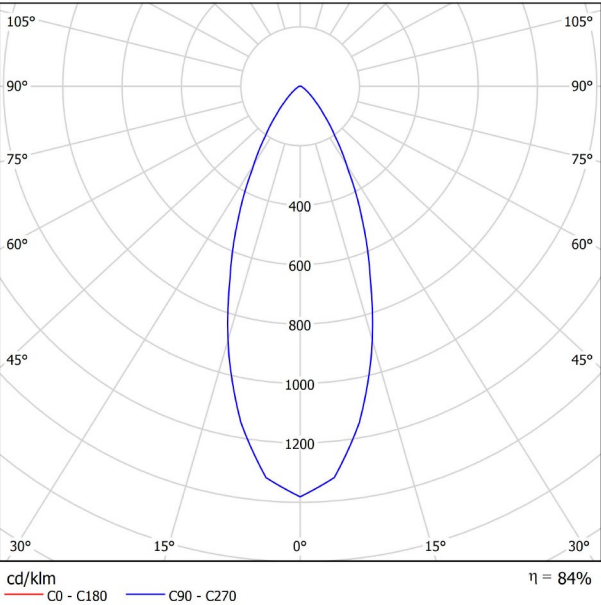


CONICAL DIAGRAM

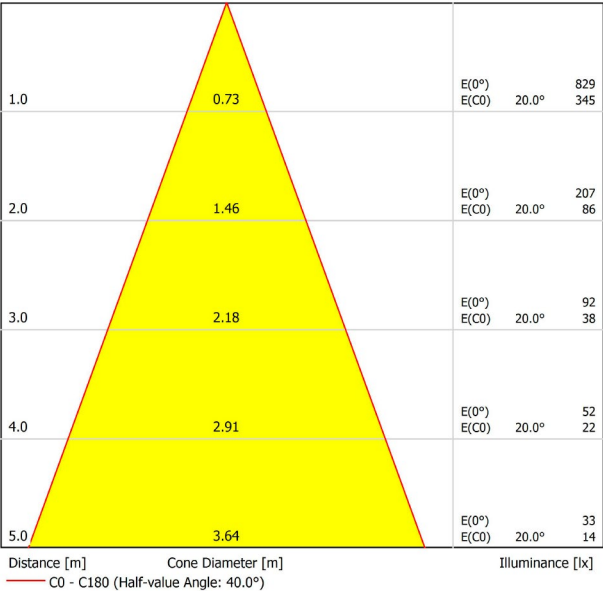



DIMENSIONS

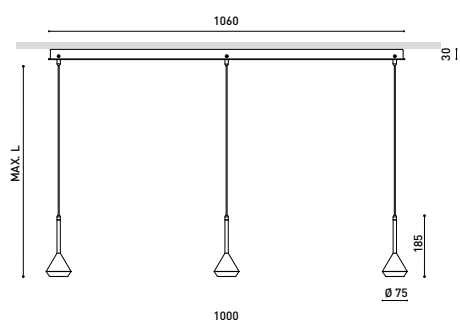

AWARDS



Name	SPIN 3 SURFACE 5M 40° 2700K WT-WT
Reference	A3912110WTWT
Color	Textured white
RAL	9016
Category	SURFACE

PRODUCT

Light source	LED
Gross luminous flux	3 x 600 Lm
Power	3 x 6,5 W
Power values of the system	21,67 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	40°
Lighting efficiency	84%
Efficacy	92 Lm/W
Current intensity	700 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


LIGHTING INFORMATION

OTHER DATA


Ingress Protection	IP20
Cord length	5 m
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate



POLAR DIAGRAM

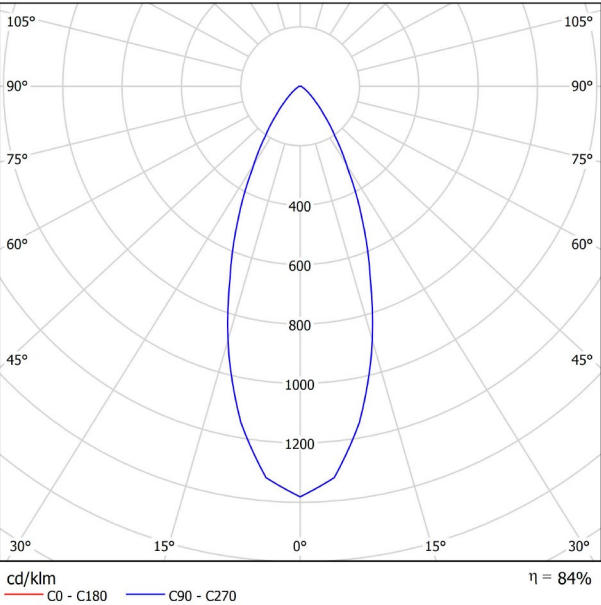


CONICAL DIAGRAM

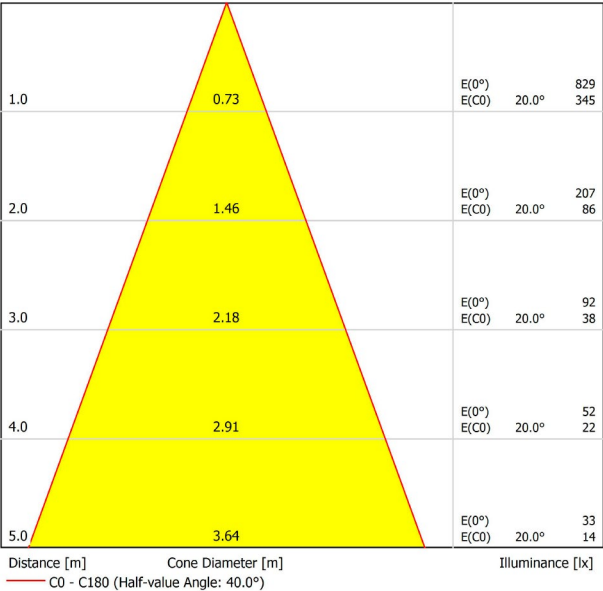



DIMENSIONS

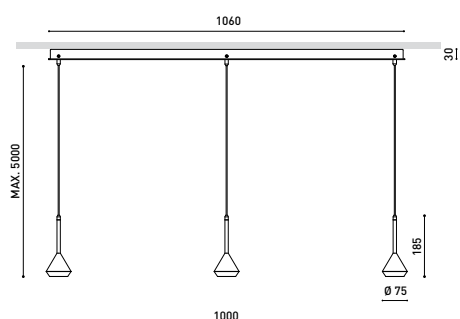

AWARDS



Name	SPIN 3 SURFACE 5M 40° 3000K MC-NT
Reference	A3912111MCNT
Color	Metallized copper
RAL	Electrolytic bath
Category	SUSPENSION

PRODUCT

Light source	LED
Gross luminous flux	3 x 630 Lm
Power	3 x 6,5 W
Power values of the system	21,67 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	40°
Lighting efficiency	84%
Efficacy	97 Lm/W
Current intensity	700 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


OTHER DATA

Ingress Protection	IP20
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Spin Surface is a version that allows it to be installed in places where it is impossible to access the false ceiling. Cement, concrete, vault ... its base, set to apply three luminaires, houses the driver and allows the luminaire to be installed on all types of surfaces.

POLAR DIAGRAM

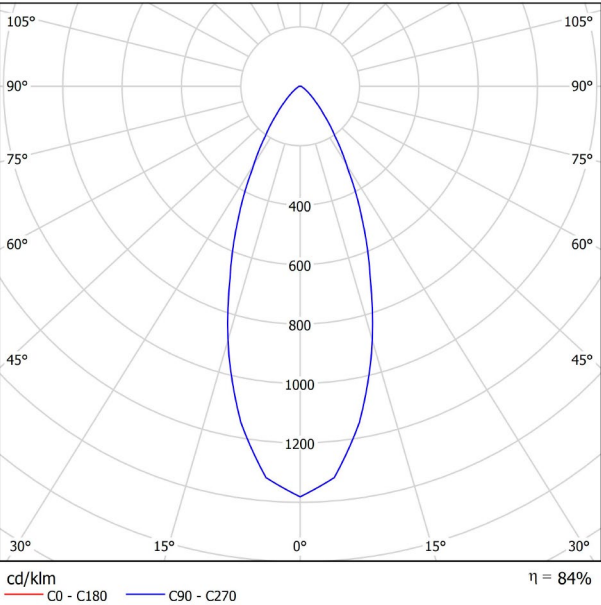


CONICAL DIAGRAM

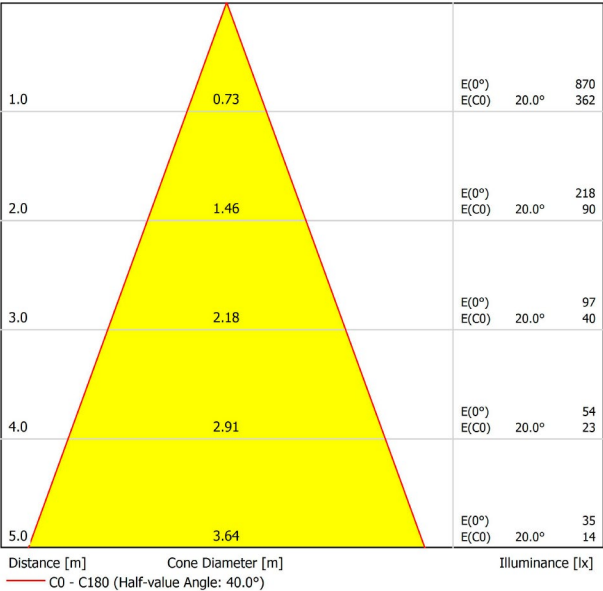



DIMENSIONS

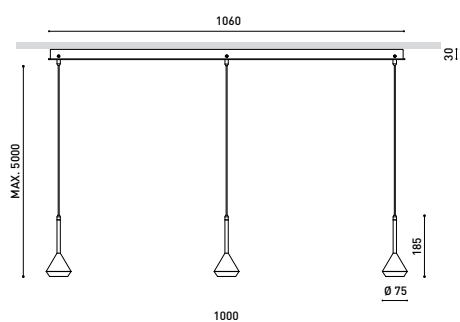

PRODUCT

Name	SPIN 3 SURFACE 5M 40° 3000K MC-WT
Reference	A3912111MCWT
Color	Metallized copper
RAL	Electrolytic bath
Category	SUSPENSION

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	3 x 630 Lm
Power	3 x 6,5 W
Power values of the system	21,67 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	40°
Lighting efficiency	84%
Efficacy	97 Lm/W
Current intensity	700 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h

OTHER DATA

Ingress Protection	IP20
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




AWARDS




Spin Surface is a version that allows it to be installed in places where it is impossible to access the false ceiling. Cement, concrete, vault ... its base, set to apply three luminaires, houses the driver and allows the luminaire to be installed on all types of surfaces.

POLAR DIAGRAM

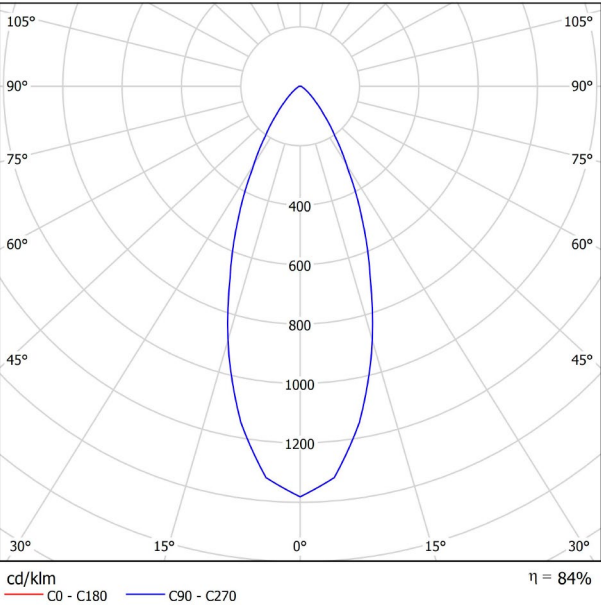


CONICAL DIAGRAM

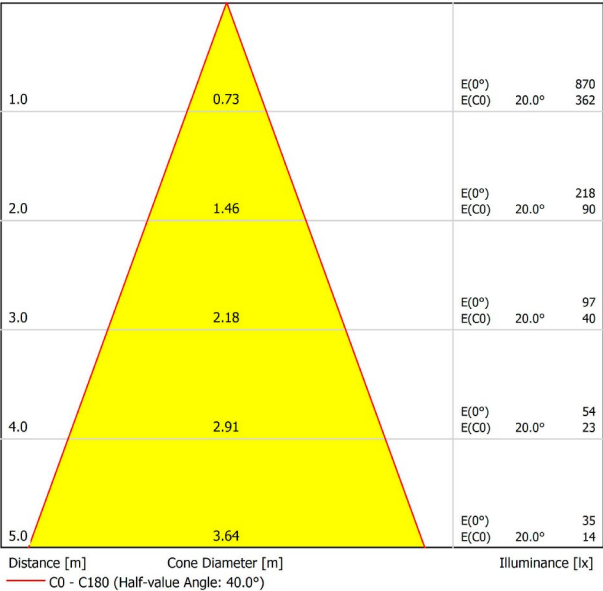



DIMENSIONS

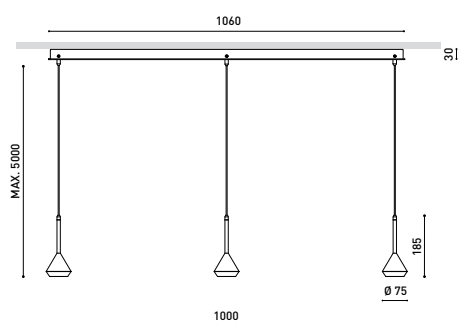

AWARDS



Name	SPIN 3 SURFACE 5M 40° 3000K MG-NT
Reference	A3912111MGNT
Color	Metallized gold
RAL	Electrolytic bath
Category	SUSPENSION

PRODUCT

Light source	LED
Gross luminous flux	3 x 630 Lm
Power	3 x 6,5 W
Power values of the system	21,67 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	40°
Lighting efficiency	84%
Efficacy	97 Lm/W
Current intensity	700 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


OTHER DATA

Ingress Protection	IP20
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Spin Surface is a version that allows it to be installed in places where it is impossible to access the false ceiling. Cement, concrete, vault ... its base, set to apply three luminaires, houses the driver and allows the luminaire to be installed on all types of surfaces.

POLAR DIAGRAM

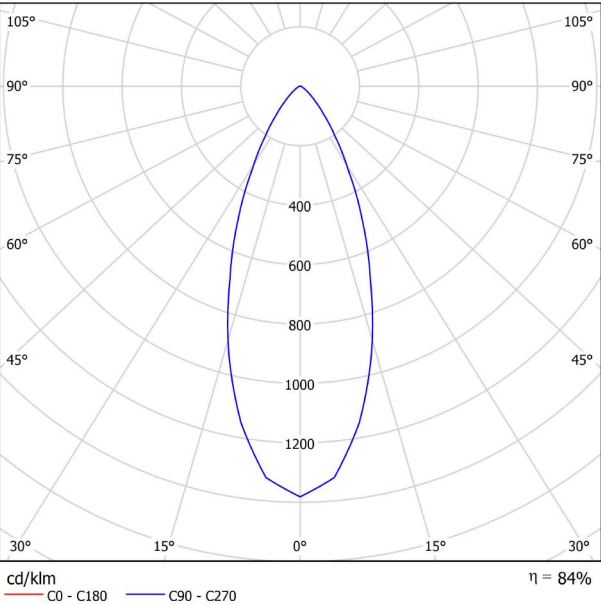


CONICAL DIAGRAM

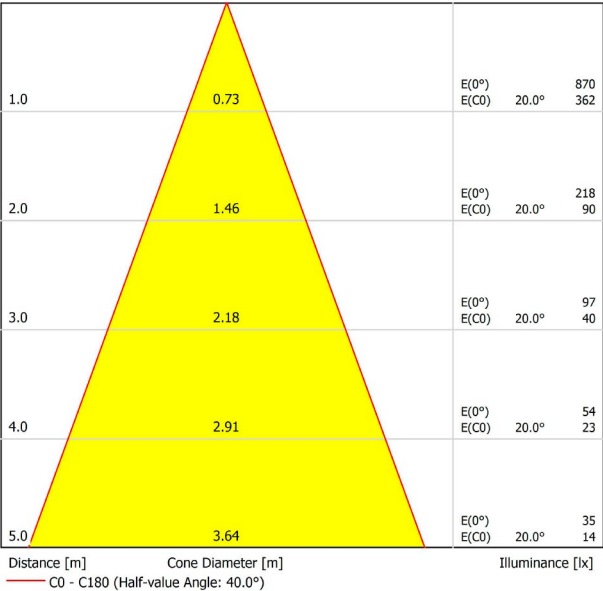



DIMENSIONS

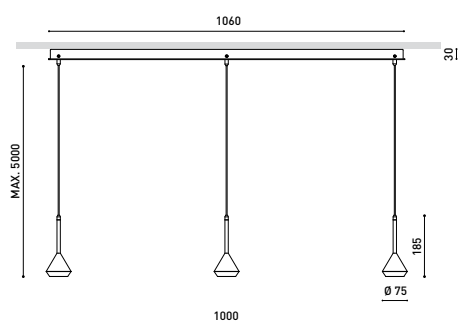

AWARDS



Name	SPIN 3 SURFACE 5M 40° 3000K MG-WT
Reference	A3912111MGWT
Color	Metallized gold
RAL	Electrolytic bath
Category	SUSPENSION

PRODUCT

Light source	LED
Gross luminous flux	3 x 630 Lm
Power	3 x 6,5 W
Power values of the system	21,67 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	40°
Lighting efficiency	84%
Efficacy	97 Lm/W
Current intensity	700 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


OTHER DATA

Ingress Protection	IP20
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Spin Surface is a version that allows it to be installed in places where it is impossible to access the false ceiling. Cement, concrete, vault ... its base, set to apply three luminaires, houses the driver and allows the luminaire to be installed on all types of surfaces.

POLAR DIAGRAM

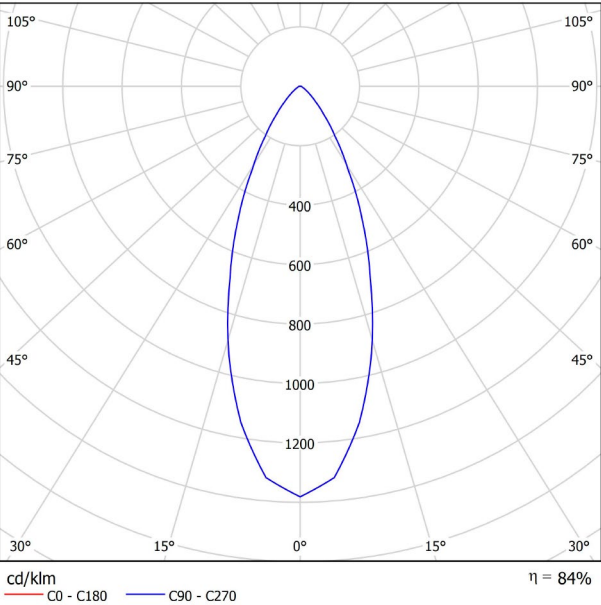


CONICAL DIAGRAM

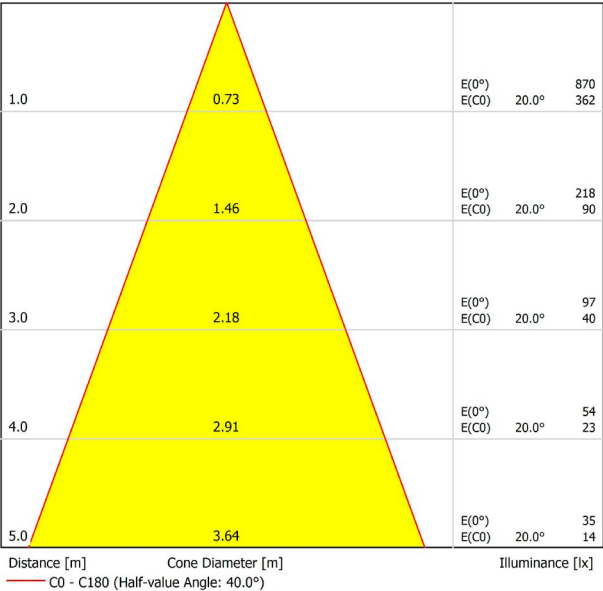



DIMENSIONS

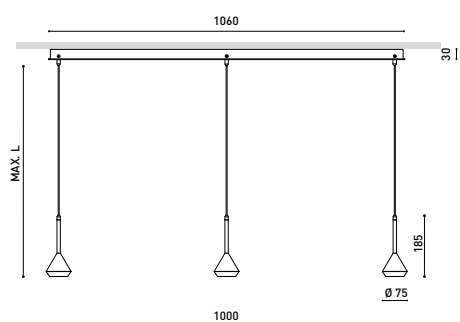

AWARDS



Name	SPIN 3 SURFACE 5M 40° 3000K NT-NT
Reference	A3912111NTNT
Color	Textured black
RAL	9005
Category	SURFACE

PRODUCT

Light source	LED
Gross luminous flux	3 x 630 Lm
Power	3 x 6,5 W
Power values of the system	21,67 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	40°
Lighting efficiency	84%
Efficacy	97 Lm/W
Current intensity	700 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


OTHER DATA

Ingress Protection	IP20
Cord length	5 m
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Reduced dimensions, clear lines and a mechanized geometry combined in a pendant luminaire for accent lighting. Its ultra-thin cable gives Spin a sensation of aerial floatability.

POLAR DIAGRAM

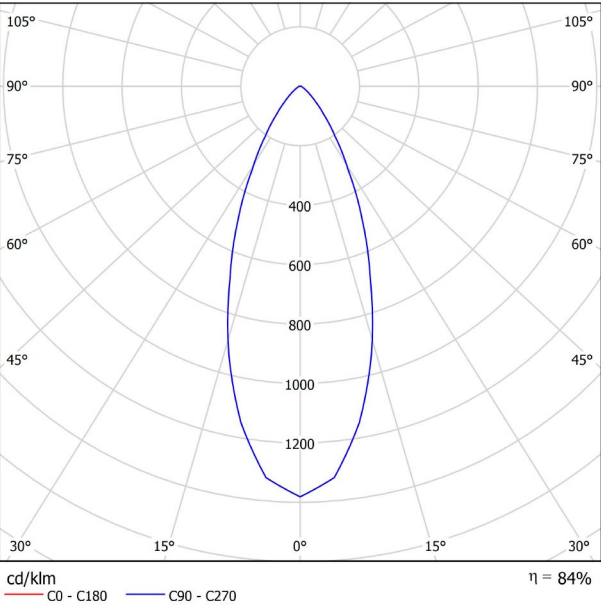


CONICAL DIAGRAM

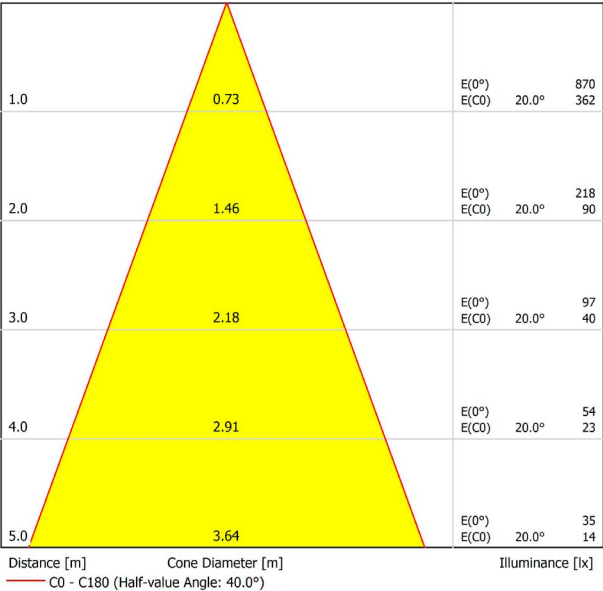



DIMENSIONS

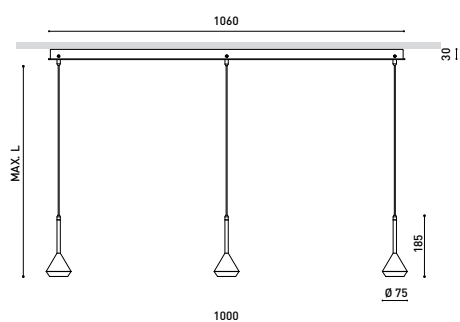

AWARDS



Name	SPIN 3 SURFACE 5M 40° 3000K NT-WT
Reference	A3912111NTWT
Color	Textured black
RAL	9005
Category	SURFACE

PRODUCT

Light source	LED
Gross luminous flux	3 x 630 Lm
Power	3 x 6,5 W
Power values of the system	21,67 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	40°
Lighting efficiency	84%
Efficacy	97 Lm/W
Current intensity	700 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Cord length	5 m
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Reduced dimensions, clear lines and a mechanized geometry combined in a pendant luminaire for accent lighting. Its ultra-thin cable gives Spin a sensation of aerial floatability.

POLAR DIAGRAM

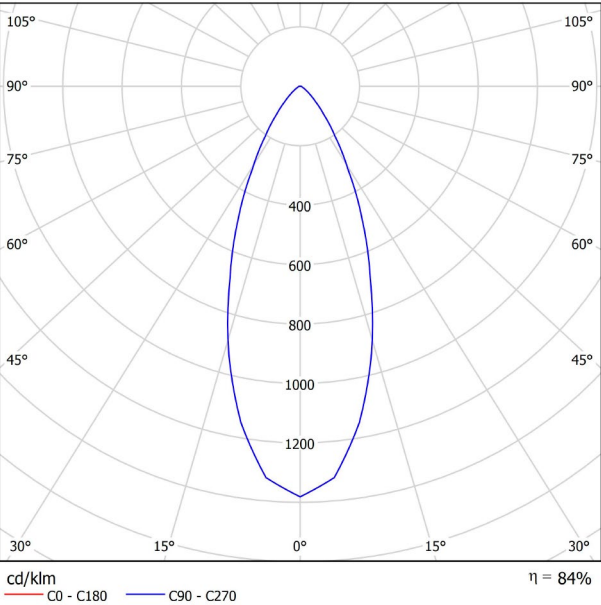


CONICAL DIAGRAM

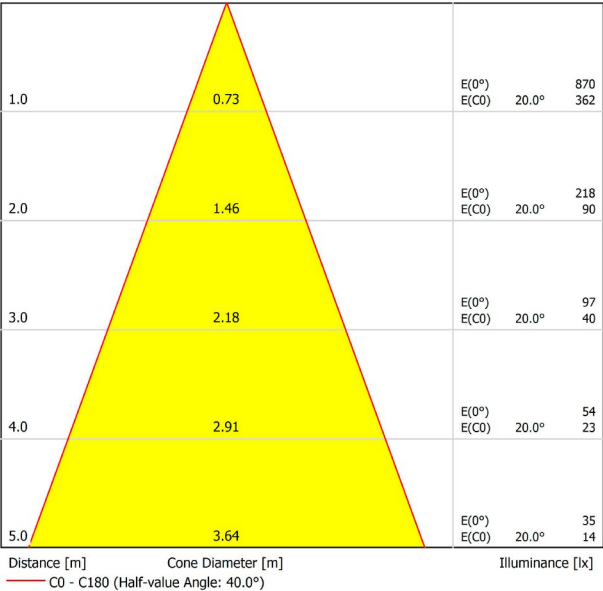



DIMENSIONS

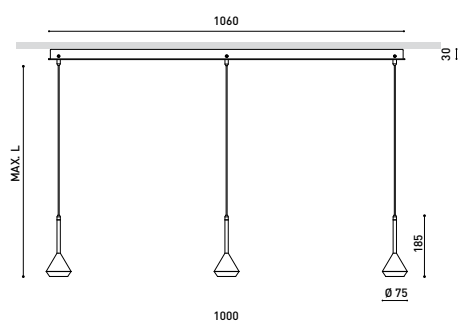

AWARDS



Name	SPIN 3 SURFACE 5M 40° 3000K WT-NT
Reference	A3912111WTNT
Color	Textured white
RAL	9016
Category	SURFACE

PRODUCT

Light source	LED
Gross luminous flux	3 x 630 Lm
Power	3 x 6,5 W
Power values of the system	21,67 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	40°
Lighting efficiency	84%
Efficacy	97 Lm/W
Current intensity	700 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Cord length	5 m
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Reduced dimensions, clear lines and a mechanized geometry combined in a pendant luminaire for accent lighting. Its ultra-thin cable gives Spin a sensation of aerial floatability.

POLAR DIAGRAM

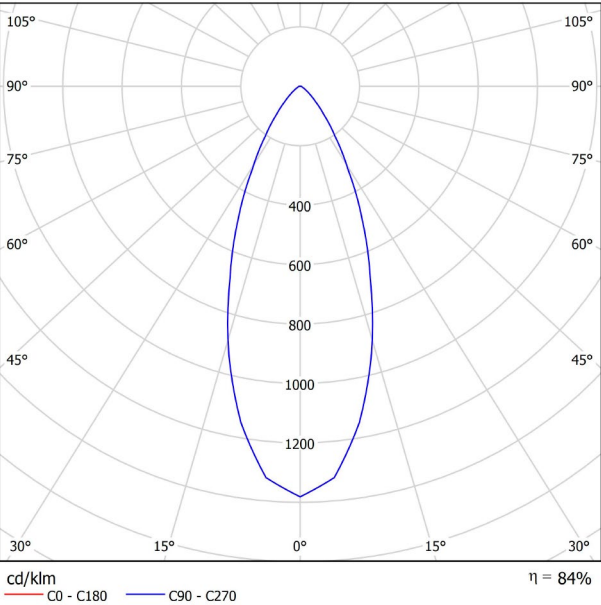


CONICAL DIAGRAM

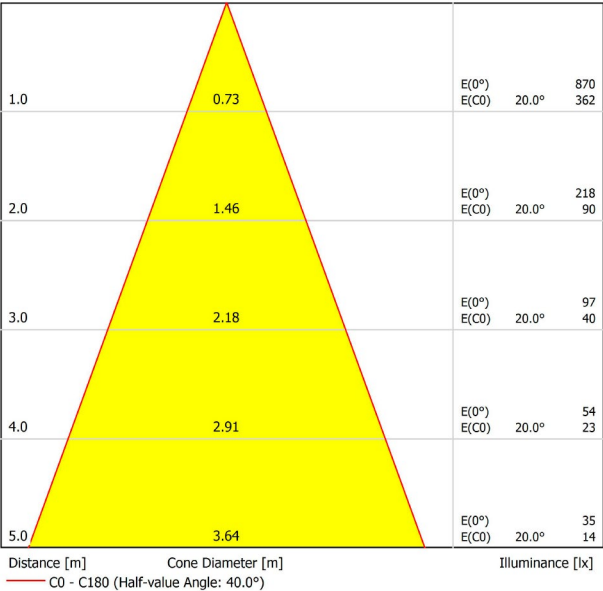



DIMENSIONS

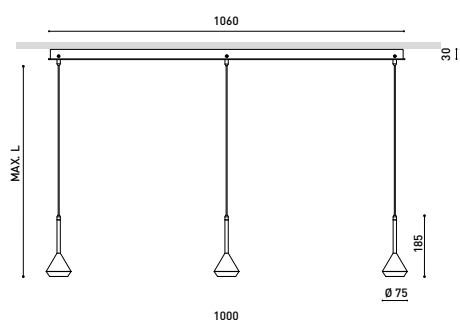

AWARDS



Name	SPIN 3 SURFACE 5M 40° 3000K WT-WT
Reference	A3912111WTWT
Color	Textured white
RAL	9016
Category	SURFACE

PRODUCT

Light source	LED
Gross luminous flux	3 x 630 Lm
Power	3 x 6,5 W
Power values of the system	21,67 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	40°
Lighting efficiency	84%
Efficacy	97 Lm/W
Current intensity	700 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


OTHER DATA

Ingress Protection	IP20
Cord length	5 m
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Reduced dimensions, clear lines and a mechanized geometry combined in a pendant luminaire for accent lighting. Its ultra-thin cable gives Spin a sensation of aerial floatability.

POLAR DIAGRAM

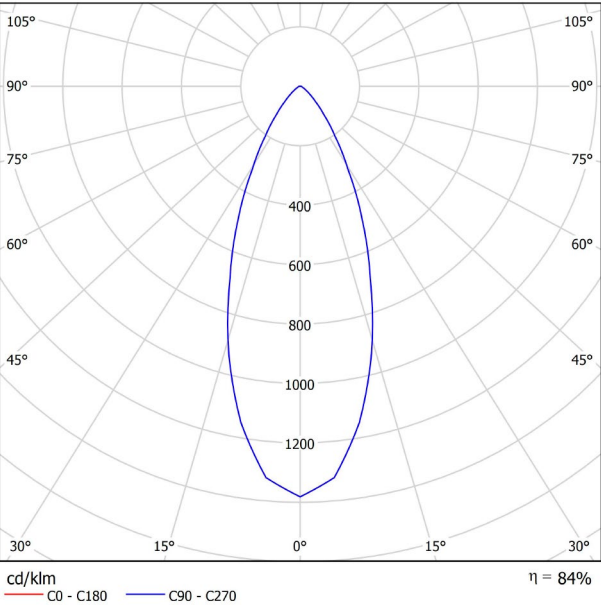


CONICAL DIAGRAM

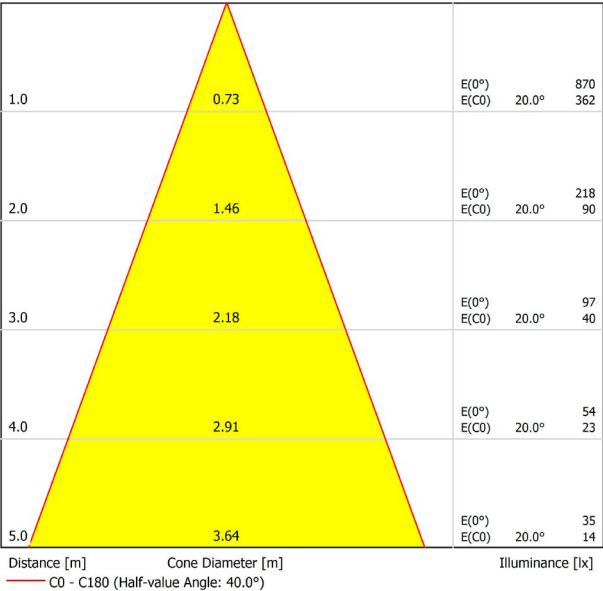



DIMENSIONS

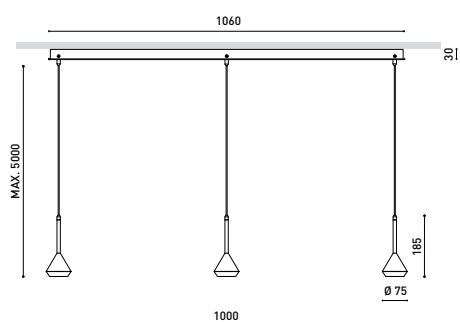

AWARDS



Name	SPIN 3 SURFACE 5M 40° 4000K MC-NT
Reference	A3912112MCNT
Color	Metallized copper
RAL	Electrolytic bath
Category	SUSPENSION

PRODUCT

Light source	LED
Gross luminous flux	3 x 680 Lm
Power	3 x 6,5 W
Power values of the system	21,67 W
Colour temperature	4000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	40°
Lighting efficiency	84%
Efficacy	105 Lm/W
Current intensity	700 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


OTHER DATA

Ingress Protection	IP20
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Spin Surface is a version that allows it to be installed in places where it is impossible to access the false ceiling. Cement, concrete, vault ... its base, set to apply three luminaires, houses the driver and allows the luminaire to be installed on all types of surfaces.

POLAR DIAGRAM

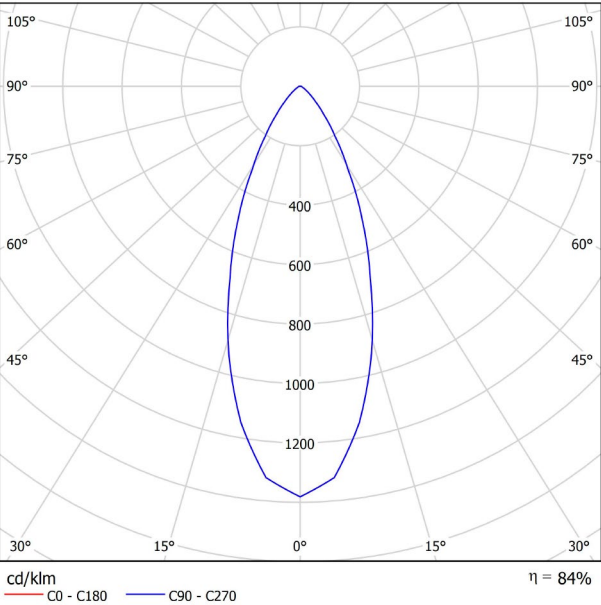


CONICAL DIAGRAM

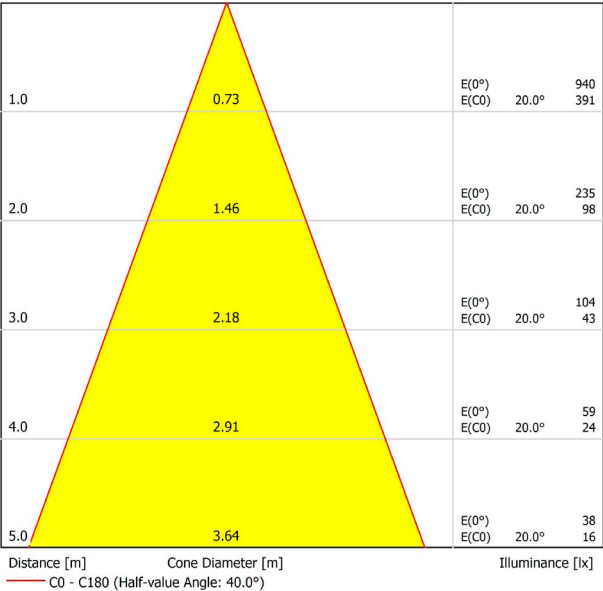



DIMENSIONS

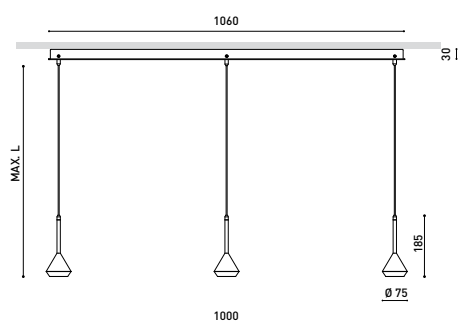

AWARDS



Name	SPIN 3 SURFACE 5M 24° DIM DALI 4000K NT-NT
Reference	A3912202NTNT
Color	Textured black
RAL	9005
Category	SURFACE

PRODUCT

Light source	LED
Gross luminous flux	3 x 680 Lm
Power	3 x 6,5 W
Power values of the system	23,78 W
Colour temperature	4000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	24°
Lighting efficiency	86%
Efficacy	105 Lm/W
Current intensity	700 mA
Dimming	DALI - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Cord length	5 m
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Reduced dimensions, clear lines and a mechanized geometry combined in a pendant luminaire for accent lighting. Its ultra-thin cable gives Spin a sensation of aerial floatability.

POLAR DIAGRAM

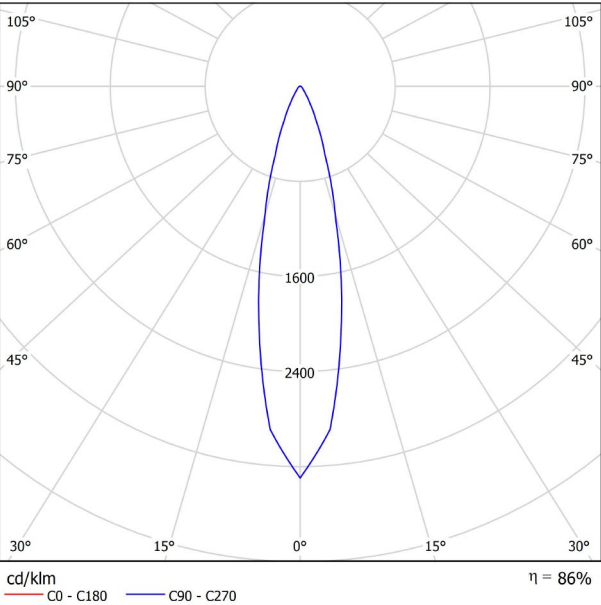


CONICAL DIAGRAM

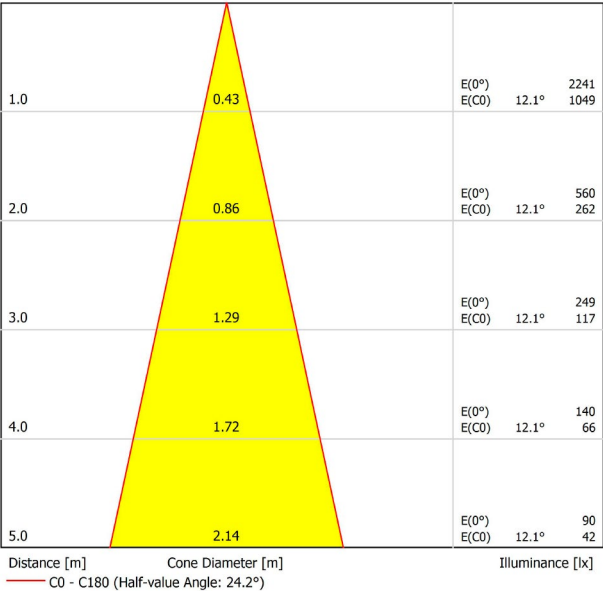



DIMENSIONS

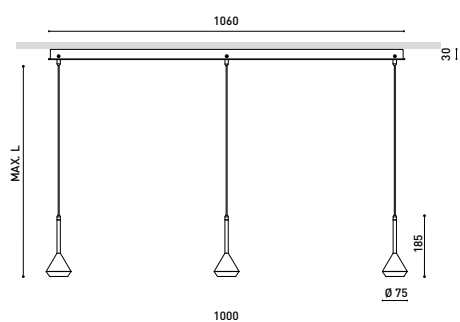

AWARDS



Name	SPIN 3 SURFACE 5M 24° DIM DALI 4000K NT-WT
Reference	A3912202NTWT
Color	Textured black
RAL	9005
Category	SURFACE

PRODUCT

Light source	LED
Gross luminous flux	3 x 680 Lm
Power	3 x 6,5 W
Power values of the system	23,78 W
Colour temperature	4000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	24°
Lighting efficiency	86%
Efficacy	105 Lm/W
Current intensity	700 mA
Dimming	DALI - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


OTHER DATA

Ingress Protection	IP20
Cord length	5 m
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Reduced dimensions, clear lines and a mechanized geometry combined in a pendant luminaire for accent lighting. Its ultra-thin cable gives Spin a sensation of aerial floatability.

POLAR DIAGRAM

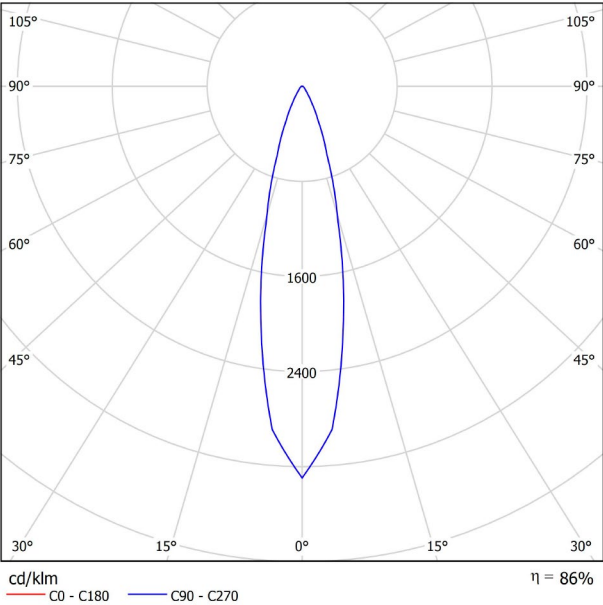


CONICAL DIAGRAM

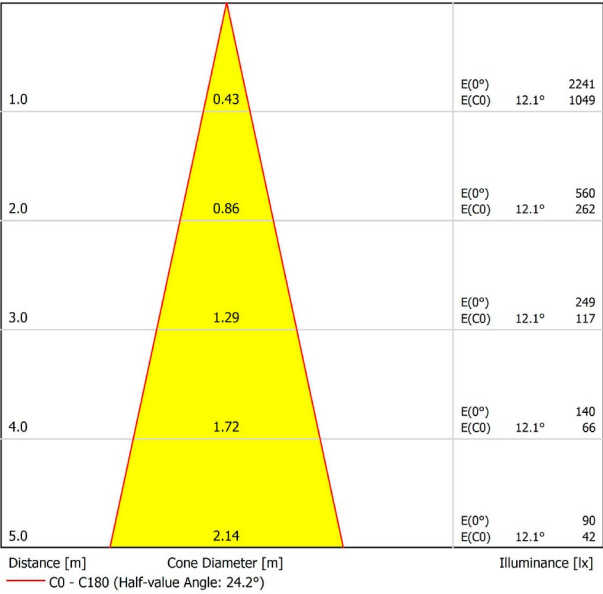



DIMENSIONS

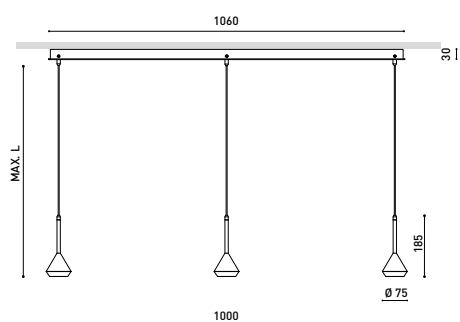

AWARDS



Name	SPIN 3 SURFACE 5M 24° DIM DALI 4000K WT-NT
Reference	A3912202WTNT
Color	Textured white
RAL	9016
Category	SURFACE

PRODUCT

Light source	LED
Gross luminous flux	3 x 680 Lm
Power	3 x 6,5 W
Power values of the system	23,78 W
Colour temperature	4000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	24°
Lighting efficiency	86%
Efficacy	105 Lm/W
Current intensity	700 mA
Dimming	DALI - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


OTHER DATA

Ingress Protection	IP20
Cord length	5 m
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Reduced dimensions, clear lines and a mechanized geometry combined in a pendant luminaire for accent lighting. Its ultra-thin cable gives Spin a sensation of aerial floatability.

POLAR DIAGRAM

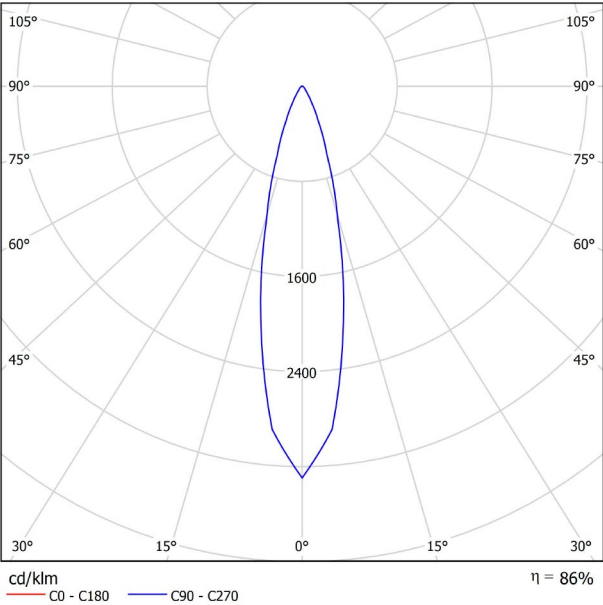


CONICAL DIAGRAM

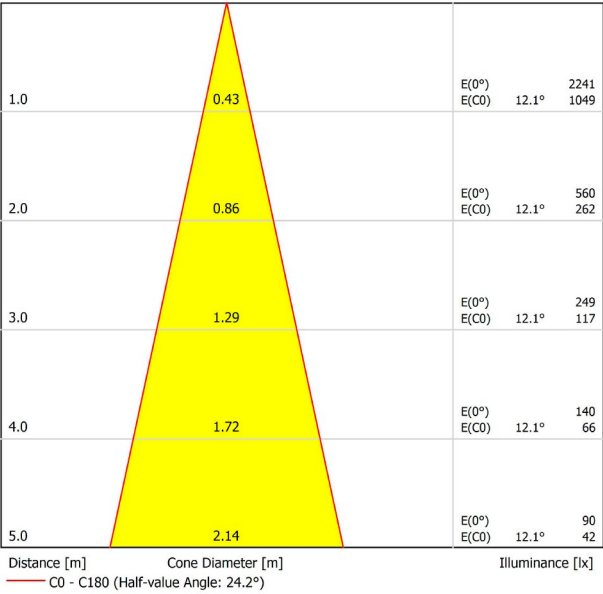



DIMENSIONS

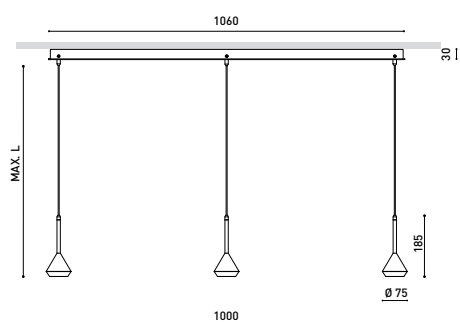

AWARDS



Name	SPIN 3 SURFACE 5M 24° DIM DALI 4000K WT-WT
Reference	A3912202WTWT
Color	Textured white
RAL	9016
Category	SURFACE

PRODUCT

Light source	LED
Gross luminous flux	3 x 680 Lm
Power	3 x 6,5 W
Power values of the system	23,78 W
Colour temperature	4000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	24°
Lighting efficiency	86%
Efficacy	105 Lm/W
Current intensity	700 mA
Dimming	DALI - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


OTHER DATA

Ingress Protection	IP20
Cord length	5 m
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Reduced dimensions, clear lines and a mechanized geometry combined in a pendant luminaire for accent lighting. Its ultra-thin cable gives Spin a sensation of aerial floatability.

POLAR DIAGRAM

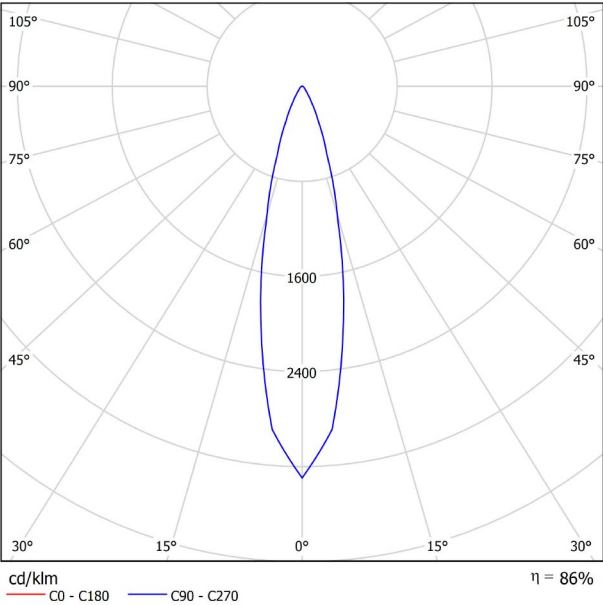


CONICAL DIAGRAM

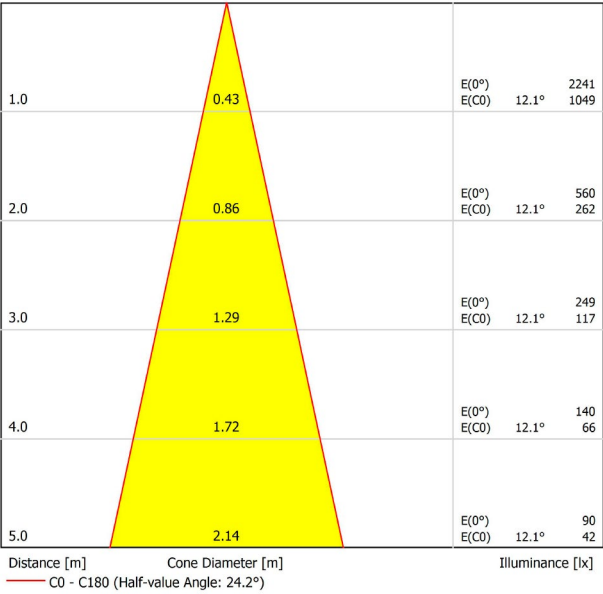



DIMENSIONS

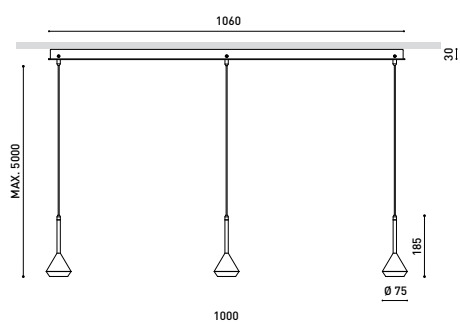

AWARDS



Name	SPIN 3 SURFACE 5M 40° DIM DALI 2700K MC-NT
Reference	A3912210MCNT
Color	Metallized copper
RAL	Electrolytic bath
Category	SUSPENSION

PRODUCT

Light source	LED
Gross luminous flux	3 x 600 Lm
Power	3 x 6,5 W
Power values of the system	23,78 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	40°
Lighting efficiency	84%
Efficacy	92 Lm/W
Current intensity	700 mA
Dimming	DALI - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


OTHER DATA

Ingress Protection	IP20
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Spin Surface is a version that allows it to be installed in places where it is impossible to access the false ceiling. Cement, concrete, vault ... its base, set to apply three luminaires, houses the driver and allows the luminaire to be installed on all types of surfaces.

POLAR DIAGRAM

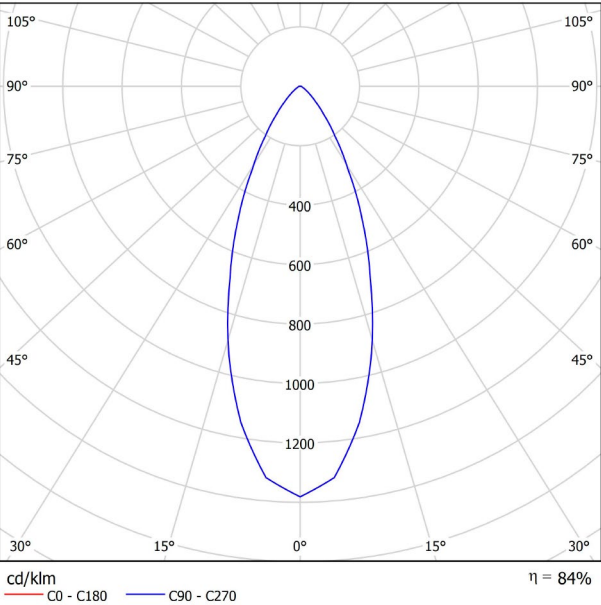


CONICAL DIAGRAM

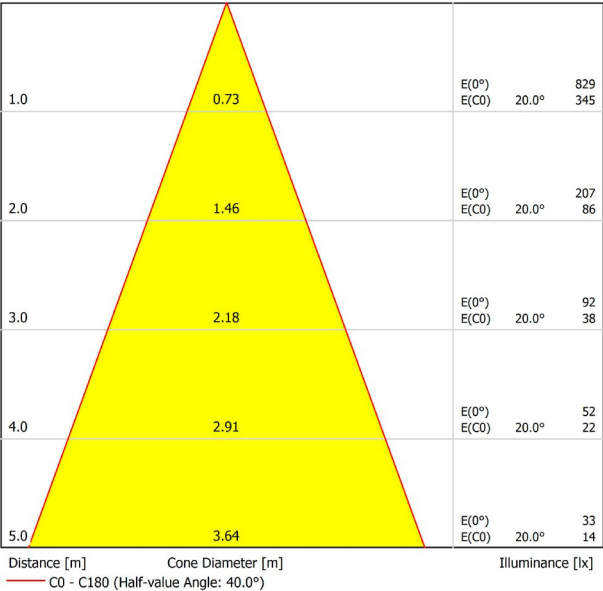



DIMENSIONS

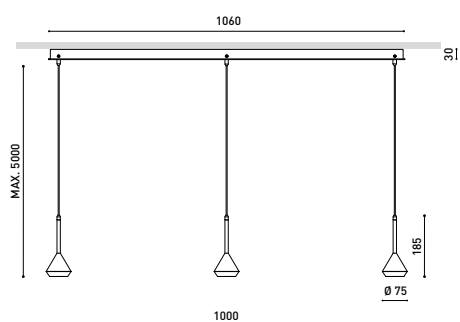

AWARDS



Name	SPIN 3 SURFACE 5M 40° DIM DALI 2700K MC-WT
Reference	A3912210MCWT
Color	Metallized copper
RAL	Electrolytic bath
Category	SUSPENSION

PRODUCT

Light source	LED
Gross luminous flux	3 x 600 Lm
Power	3 x 6,5 W
Power values of the system	23,78 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	40°
Lighting efficiency	84%
Efficacy	92 Lm/W
Current intensity	700 mA
Dimming	DALI - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


OTHER DATA

Ingress Protection	IP20
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Spin Surface is a version that allows it to be installed in places where it is impossible to access the false ceiling. Cement, concrete, vault ... its base, set to apply three luminaires, houses the driver and allows the luminaire to be installed on all types of surfaces.

POLAR DIAGRAM

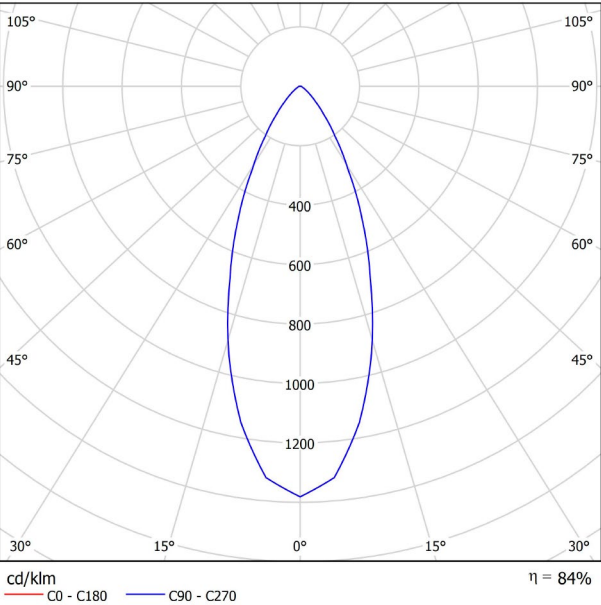


CONICAL DIAGRAM

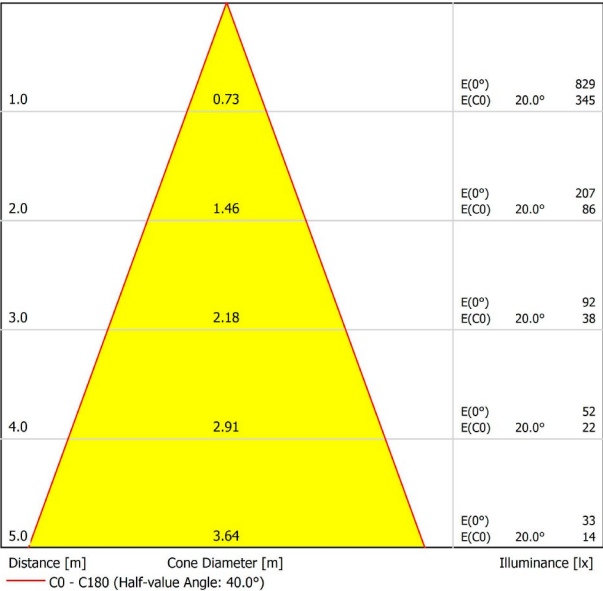



DIMENSIONS

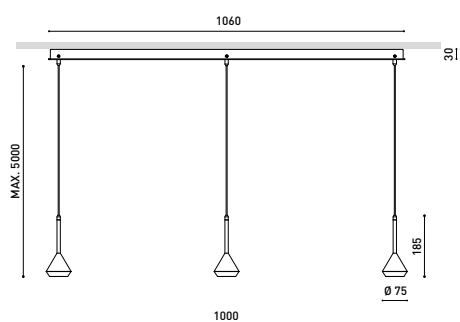

AWARDS



Name	SPIN 3 SURFACE 5M 40° DIM DALI 2700K MG-NT
Reference	A3912210MGNT
Color	Metallized gold
RAL	Electrolytic bath
Category	SUSPENSION

PRODUCT

Light source	LED
Gross luminous flux	3 x 600 Lm
Power	3 x 6,5 W
Power values of the system	23,78 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	40°
Lighting efficiency	84%
Efficacy	92 Lm/W
Current intensity	700 mA
Dimming	DALI - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


LIGHTING INFORMATION

OTHER DATA


Ingress Protection	IP20
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate



POLAR DIAGRAM

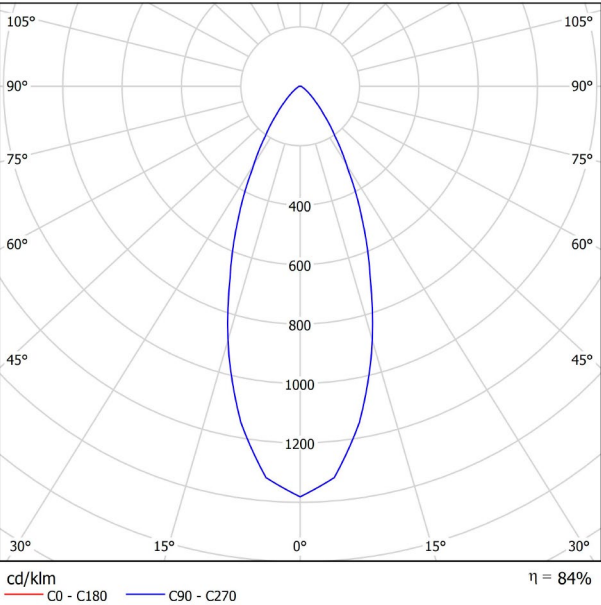


CONICAL DIAGRAM

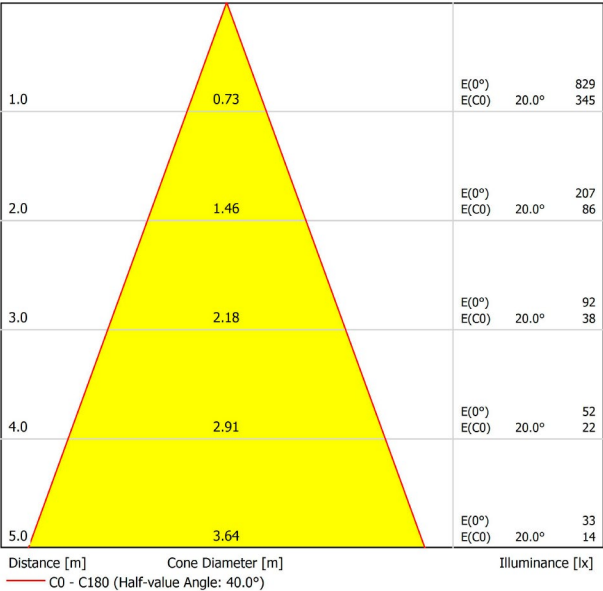



DIMENSIONS

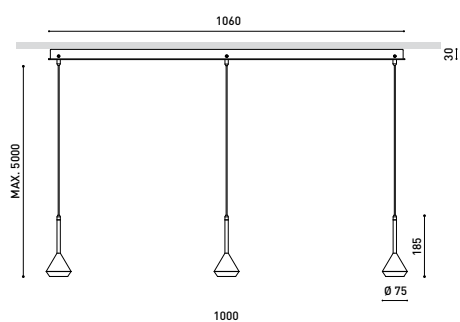

AWARDS



Name	SPIN 3 SURFACE 5M 24° DIM DALI 2700K MG-NT
Reference	A3912200MGNT
Color	Metallized gold
RAL	Electrolytic bath
Category	SUSPENSION

PRODUCT

Light source	LED
Gross luminous flux	3 x 600 Lm
Power	3 x 6,5 W
Power values of the system	23,78 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	24°
Lighting efficiency	86%
Efficacy	92 Lm/W
Current intensity	700 mA
Dimming	DALI - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	□
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


OTHER DATA

Ingress Protection	IP20
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Spin Surface is a version that allows it to be installed in places where it is impossible to access the false ceiling. Cement, concrete, vault ... its base, set to apply three luminaires, houses the driver and allows the luminaire to be installed on all types of surfaces.

POLAR DIAGRAM

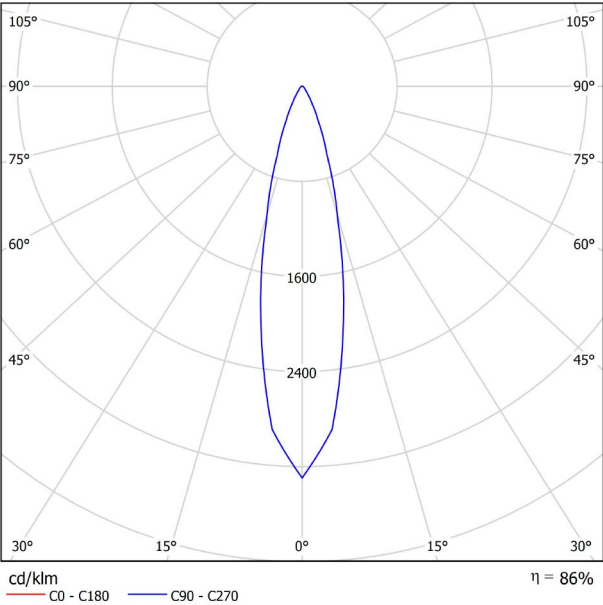


CONICAL DIAGRAM

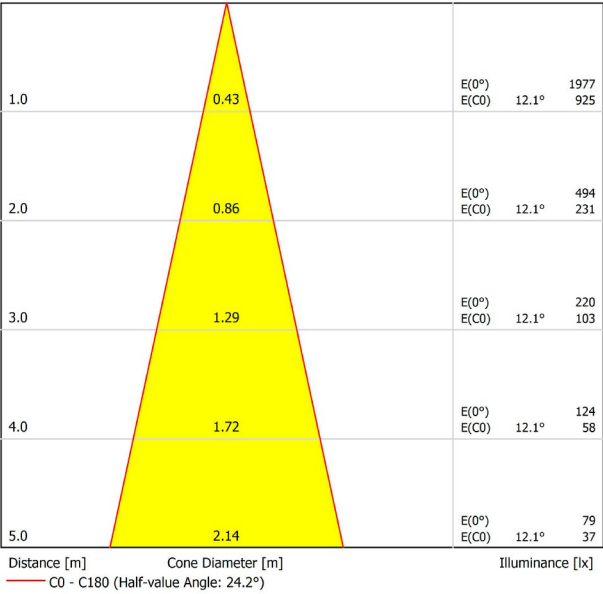



DIMENSIONS

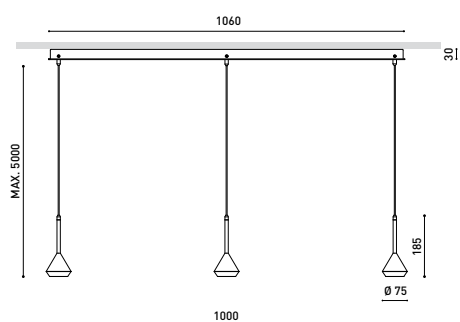

PRODUCT

Name	SPIN 3 SURFACE 5M 24° DIM DALI 2700K MG-WT
Reference	A3912200MGWT
Color	Metallized gold
RAL	Electrolytic bath
Category	SUSPENSION

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	3 x 600 Lm
Power	3 x 6,5 W
Power values of the system	23,78 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	24°
Lighting efficiency	86%
Efficacy	92 Lm/W
Current intensity	700 mA
Dimming	DALI - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h

OTHER DATA

Ingress Protection	IP20
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




AWARDS




Spin Surface is a version that allows it to be installed in places where it is impossible to access the false ceiling. Cement, concrete, vault ... its base, set to apply three luminaires, houses the driver and allows the luminaire to be installed on all types of surfaces.

POLAR DIAGRAM

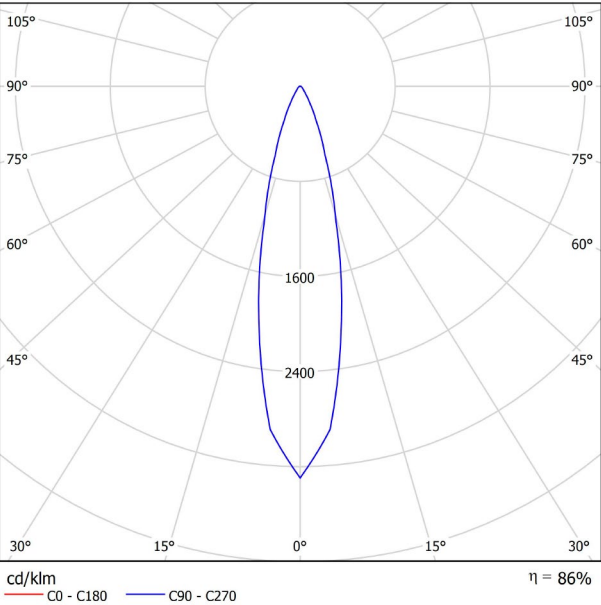


CONICAL DIAGRAM

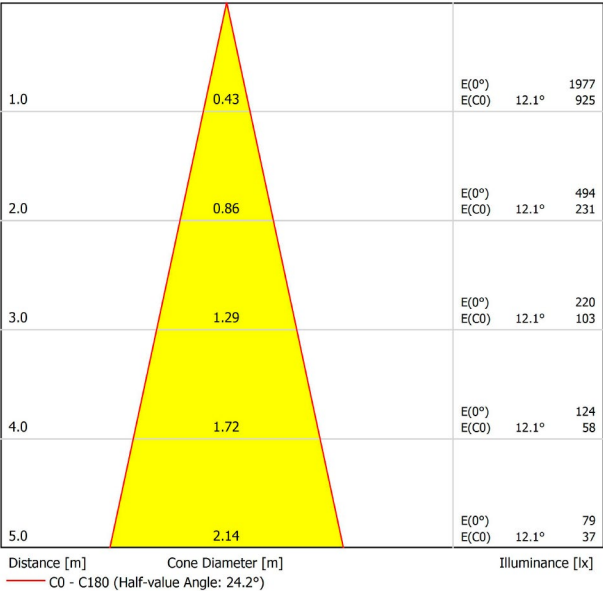



DIMENSIONS

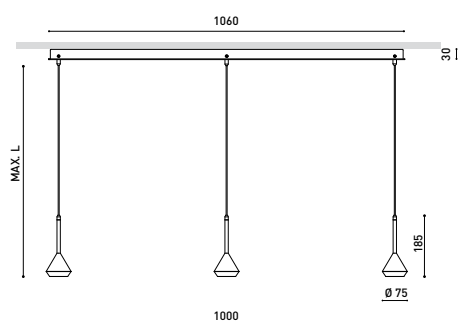

AWARDS



Name	SPIN 3 SURFACE 5M 24° DIM DALI 2700K NT-NT
Reference	A3912200NTNT
Color	Textured black
RAL	9005
Category	SURFACE

PRODUCT

Light source	LED
Gross luminous flux	3 x 600 Lm
Power	3 x 6,5 W
Power values of the system	23,78 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	24°
Lighting efficiency	86%
Efficacy	92 Lm/W
Current intensity	700 mA
Dimming	DALI - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Cord length	5 m
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Reduced dimensions, clear lines and a mechanized geometry combined in a pendant luminaire for accent lighting. Its ultra-thin cable gives Spin a sensation of aerial floatability.

POLAR DIAGRAM

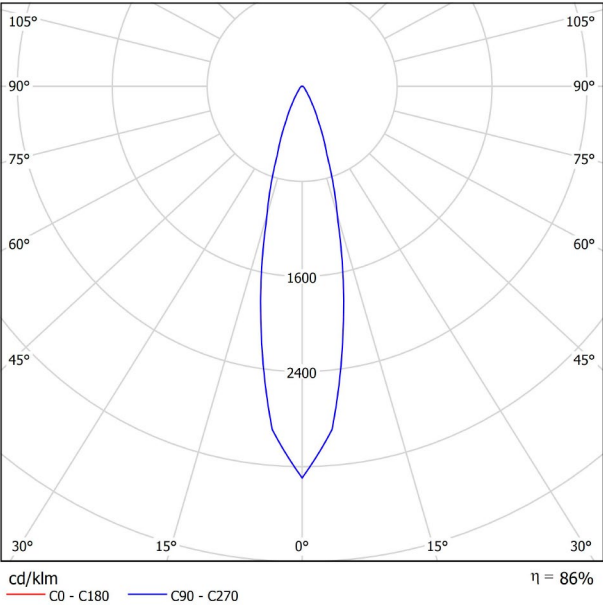


CONICAL DIAGRAM

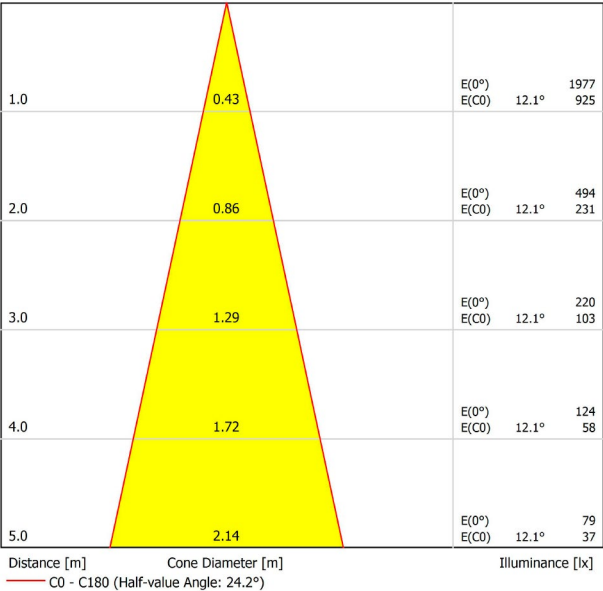



DIMENSIONS

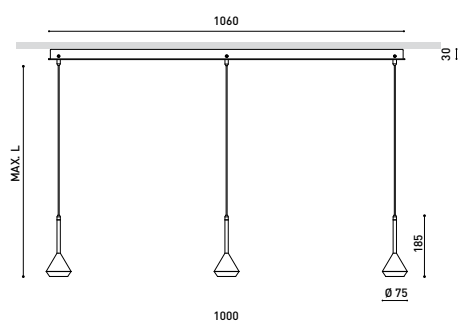

AWARDS



Name	SPIN 3 SURFACE 5M 24° DIM DALI 2700K NT-WT
Reference	A3912200NTWT
Color	Textured black
RAL	9005
Category	SURFACE

PRODUCT

Light source	LED
Gross luminous flux	3 x 600 Lm
Power	3 x 6,5 W
Power values of the system	23,78 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	24°
Lighting efficiency	86%
Efficacy	92 Lm/W
Current intensity	700 mA
Dimming	DALI - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Cord length	5 m
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Reduced dimensions, clear lines and a mechanized geometry combined in a pendant luminaire for accent lighting. Its ultra-thin cable gives Spin a sensation of aerial floatability.

POLAR DIAGRAM

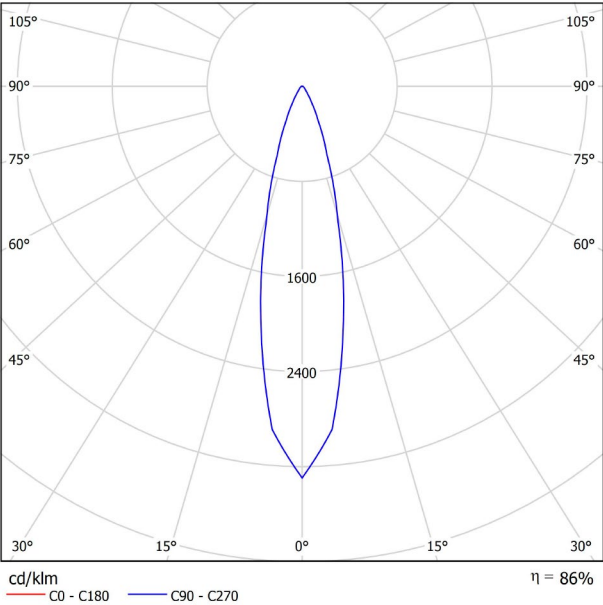


CONICAL DIAGRAM

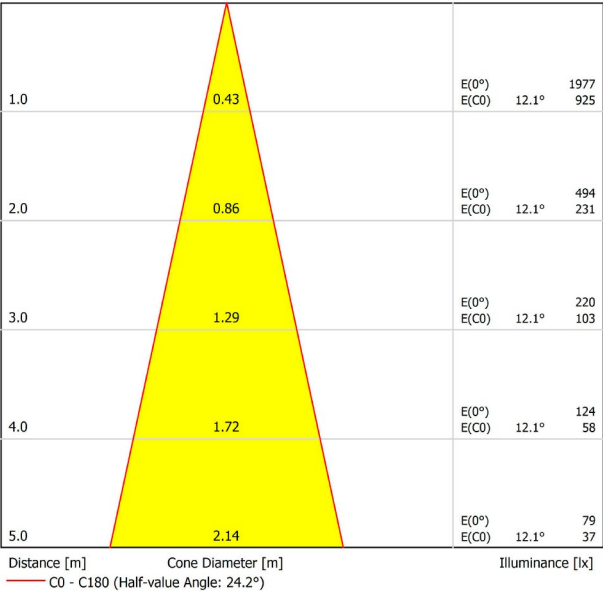



DIMENSIONS

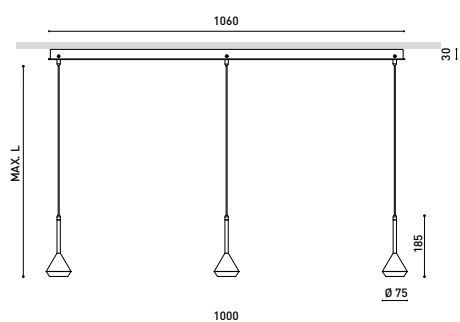

AWARDS



Name	SPIN 3 SURFACE 5M 24° DIM DALI 2700K WT-NT
Reference	A3912200WTNT
Color	Textured white
RAL	9016
Category	SURFACE

PRODUCT

Light source	LED
Gross luminous flux	3 x 600 Lm
Power	3 x 6,5 W
Power values of the system	23,78 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	24°
Lighting efficiency	86%
Efficacy	92 Lm/W
Current intensity	700 mA
Dimming	DALI - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


OTHER DATA

Ingress Protection	IP20
Cord length	5 m
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Reduced dimensions, clear lines and a mechanized geometry combined in a pendant luminaire for accent lighting. Its ultra-thin cable gives Spin a sensation of aerial floatability.

POLAR DIAGRAM

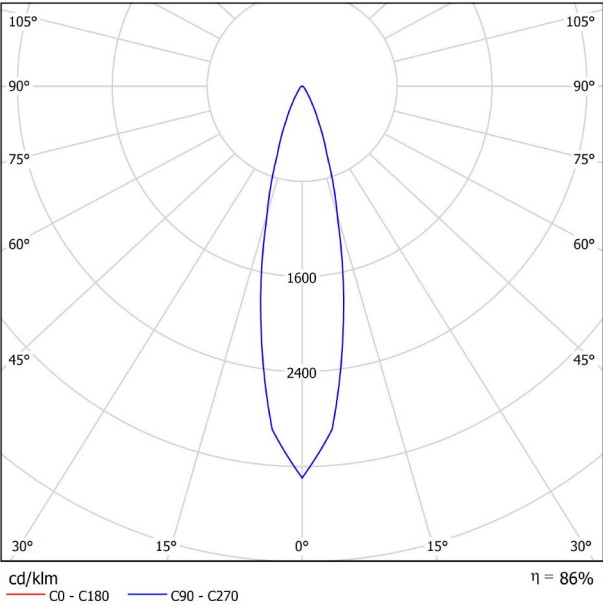


CONICAL DIAGRAM

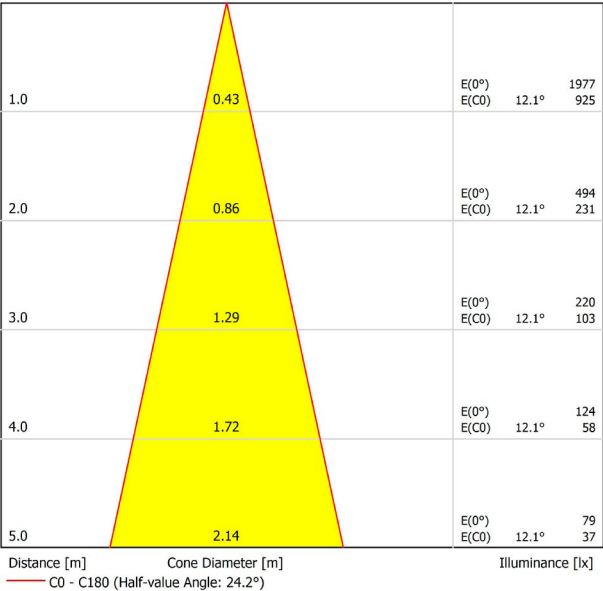



DIMENSIONS

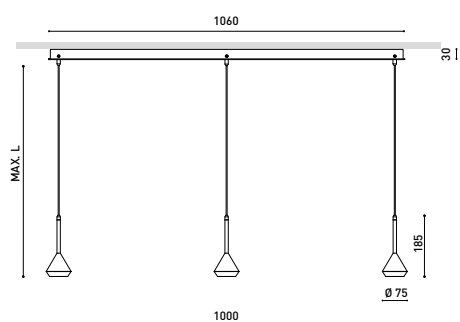

AWARDS



Name	SPIN 3 SURFACE 5M 24° DIM DALI 2700K WT-WT
Reference	A3912200WTWT
Color	Textured white
RAL	9016
Category	SURFACE

PRODUCT

Light source	LED
Gross luminous flux	3 x 600 Lm
Power	3 x 6,5 W
Power values of the system	23,78 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	24°
Lighting efficiency	86%
Efficacy	92 Lm/W
Current intensity	700 mA
Dimming	DALI - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


OTHER DATA

Ingress Protection	IP20
Cord length	5 m
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Reduced dimensions, clear lines and a mechanized geometry combined in a pendant luminaire for accent lighting. Its ultra-thin cable gives Spin a sensation of aerial floatability.

POLAR DIAGRAM

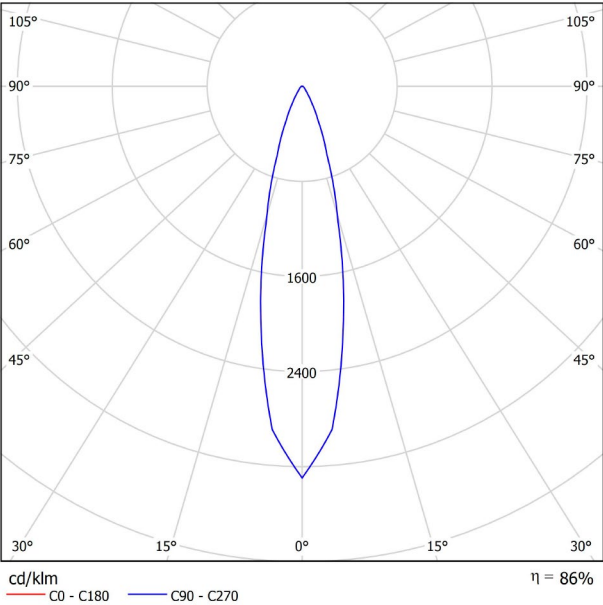


CONICAL DIAGRAM

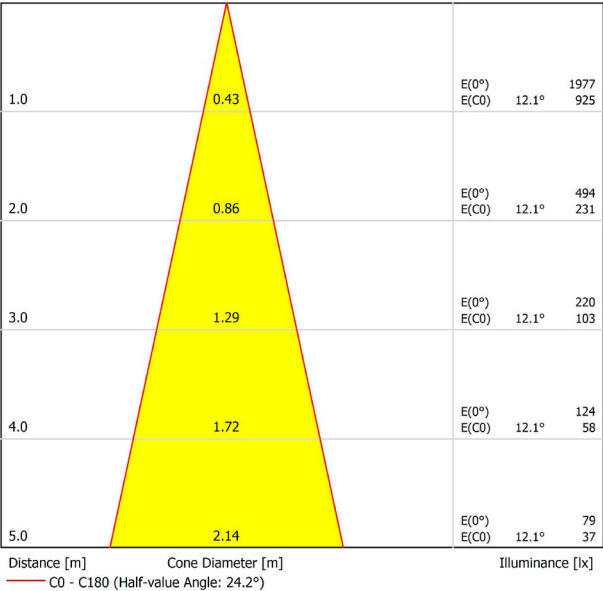



DIMENSIONS

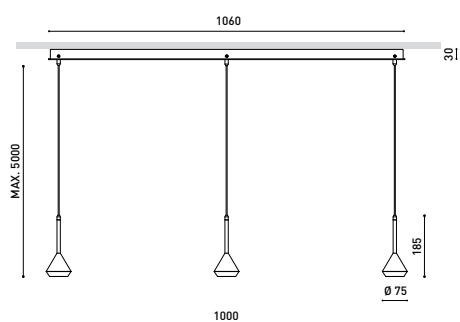

AWARDS



Name	SPIN 3 SURFACE 5M 24° DIM DALI 3000K MC-NT
Reference	A3912201MCNT
Color	Metallized copper
RAL	Electrolytic bath
Category	SUSPENSION

PRODUCT

LIGHTING INFORMATION

LED

3 x 630 Lm

3 x 6,5 W

23,78 W

3000 K

CRI>90

MacAdam Step 2

24°

86%

97 Lm/W

700 mA

DALI - Other DIM, please consult

Please Consult

Included

☐

220 V/240 V

50/60 Hz

A+

L80B10 (Tc=85°C) >60.000h

OTHER DATA

IP20

No

4150 g.

4577 g.

1078 x 139 x 89 mm


1

Aluminium / Polymethyl Methacrylate




Spin Surface is a version that allows it to be installed in places where it is impossible to access the false ceiling. Cement, concrete, vault ... its base, set to apply three luminaires, houses the driver and allows the luminaire to be installed on all types of surfaces.

POLAR DIAGRAM

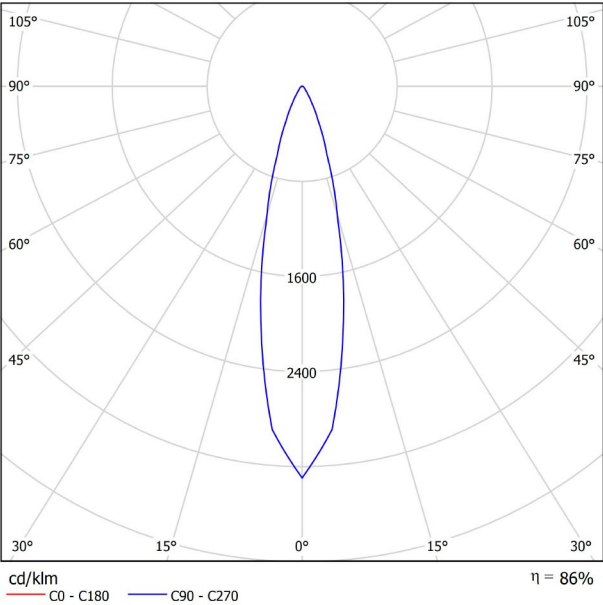


CONICAL DIAGRAM

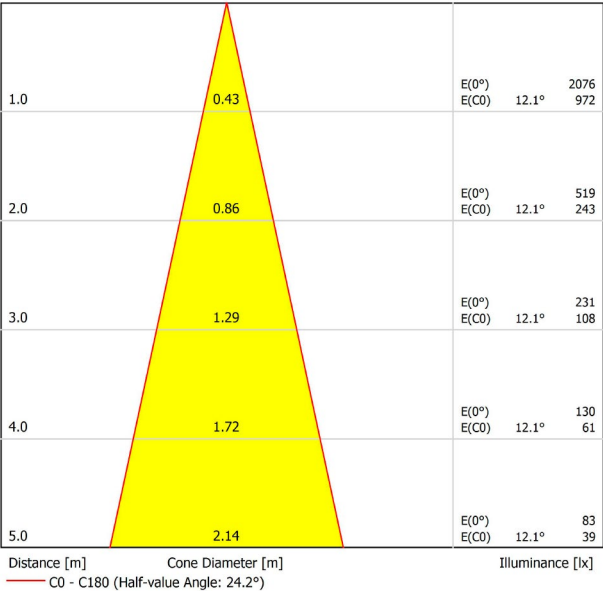



DIMENSIONS

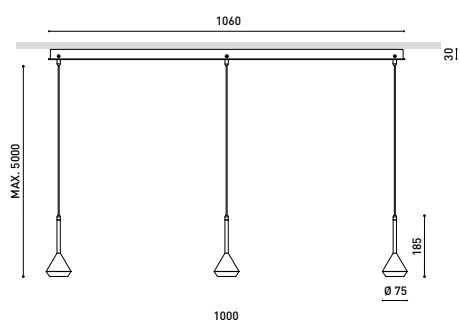

AWARDS



Name	SPIN 3 SURFACE 5M 24° DIM DALI 3000K MC-WT
Reference	A3912201MCWT
Color	Metallized copper
RAL	Electrolytic bath
Category	SUSPENSION

PRODUCT

Light source	LED
Gross luminous flux	3 x 630 Lm
Power	3 x 6,5 W
Power values of the system	23,78 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	24°
Lighting efficiency	86%
Efficacy	97 Lm/W
Current intensity	700 mA
Dimming	DALI - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


OTHER DATA

Ingress Protection	IP20
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Spin Surface is a version that allows it to be installed in places where it is impossible to access the false ceiling. Cement, concrete, vault ... its base, set to apply three luminaires, houses the driver and allows the luminaire to be installed on all types of surfaces.

POLAR DIAGRAM

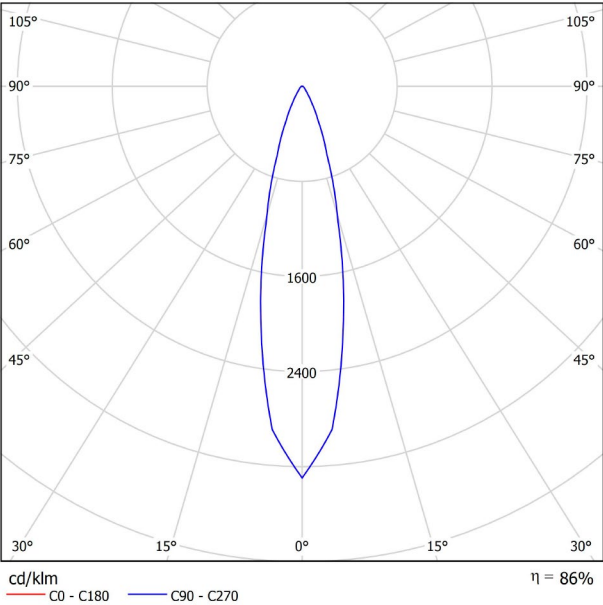


CONICAL DIAGRAM

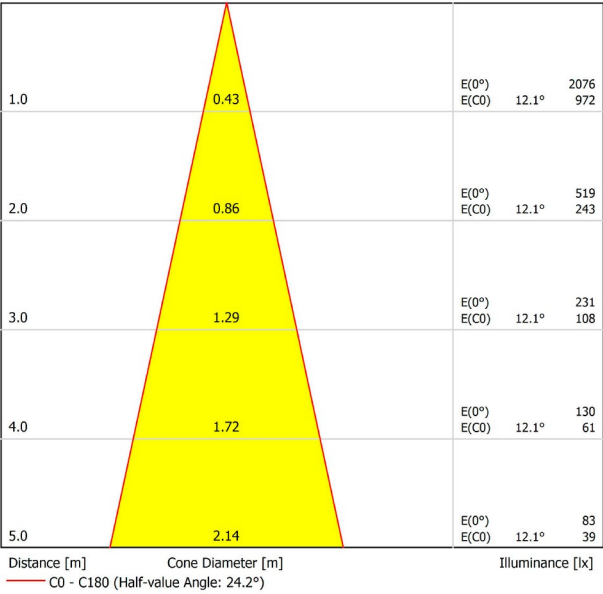



DIMENSIONS

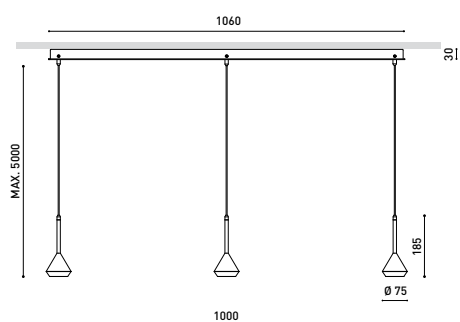

AWARDS



Name	SPIN 3 SURFACE 5M 24° DIM DALI 3000K MG-NT
Reference	A3912201MGNT
Color	Metallized gold
RAL	Electrolytic bath
Category	SUSPENSION

PRODUCT

Light source	LED
Gross luminous flux	3 x 630 Lm
Power	3 x 6,5 W
Power values of the system	23,78 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	24°
Lighting efficiency	86%
Efficacy	97 Lm/W
Current intensity	700 mA
Dimming	DALI - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


LIGHTING INFORMATION

Ingress Protection	IP20
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate


OTHER DATA



POLAR DIAGRAM

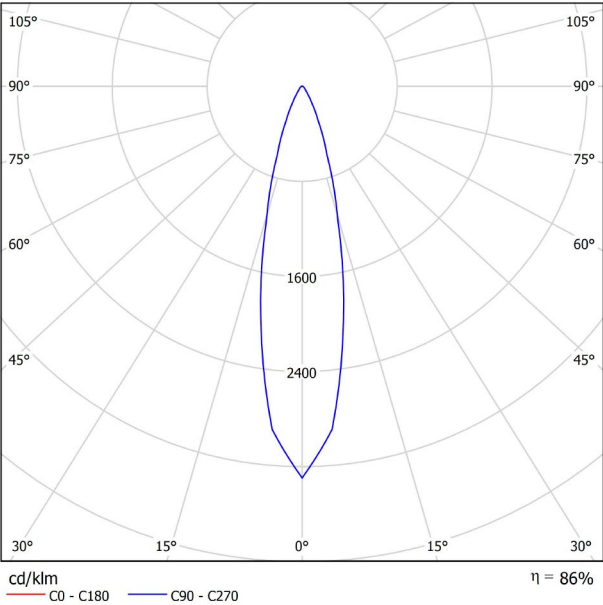


CONICAL DIAGRAM

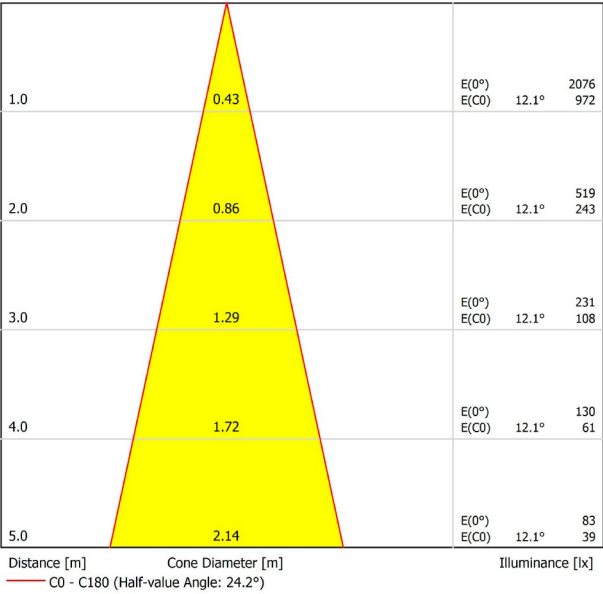



DIMENSIONS

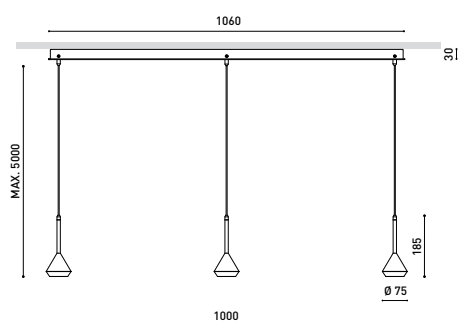

AWARDS



Name	SPIN 3 SURFACE 5M 24° DIM DALI 3000K MG-WT
Reference	A3912201MGWT
Color	Metallized gold
RAL	Electrolytic bath
Category	SUSPENSION

PRODUCT

Light source	LED
Gross luminous flux	3 x 630 Lm
Power	3 x 6,5 W
Power values of the system	23,78 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	24°
Lighting efficiency	86%
Efficacy	97 Lm/W
Current intensity	700 mA
Dimming	DALI - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


OTHER DATA

Ingress Protection	IP20
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Spin Surface is a version that allows it to be installed in places where it is impossible to access the false ceiling. Cement, concrete, vault ... its base, set to apply three luminaires, houses the driver and allows the luminaire to be installed on all types of surfaces.

POLAR DIAGRAM

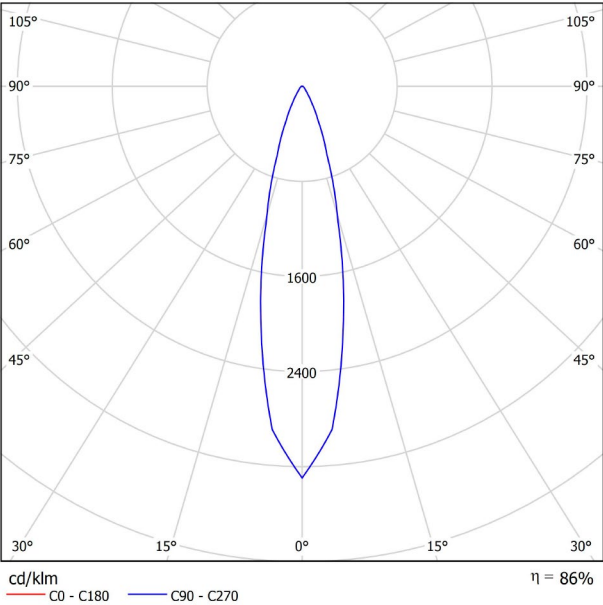


CONICAL DIAGRAM

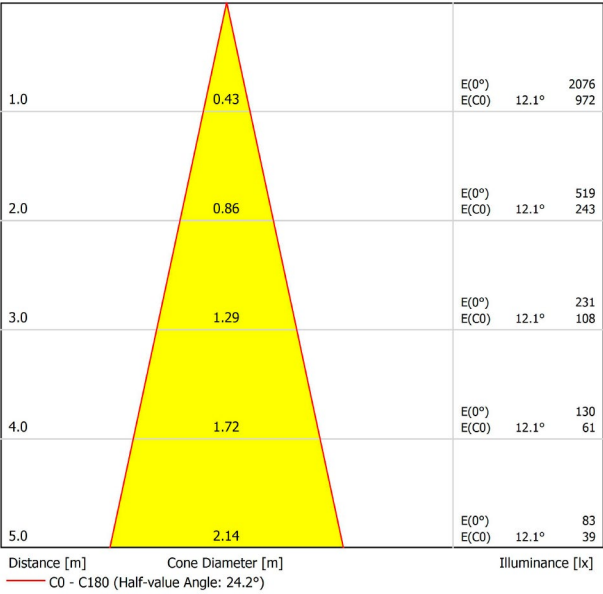



DIMENSIONS

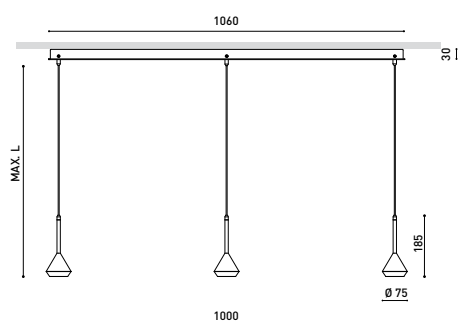

AWARDS



Name	SPIN 3 SURFACE 5M 24° DIM DALI 3000K NT-NT
Reference	A3912201NTNT
Color	Textured black
RAL	9005
Category	SURFACE

PRODUCT

SPIN 3 SURFACE 5M 24° DIM DALI 3000K NT-NT

A3912201NTNT

Textured black

9005

SURFACE

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	3 x 630 Lm
Power	3 x 6,5 W
Power values of the system	23,78 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	24°
Lighting efficiency	86%
Efficacy	97 Lm/W
Current intensity	700 mA
Dimming	DALI - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Cord length	5 m
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Reduced dimensions, clear lines and a mechanized geometry combined in a pendant luminaire for accent lighting. Its ultra-thin cable gives Spin a sensation of aerial floatability.

POLAR DIAGRAM

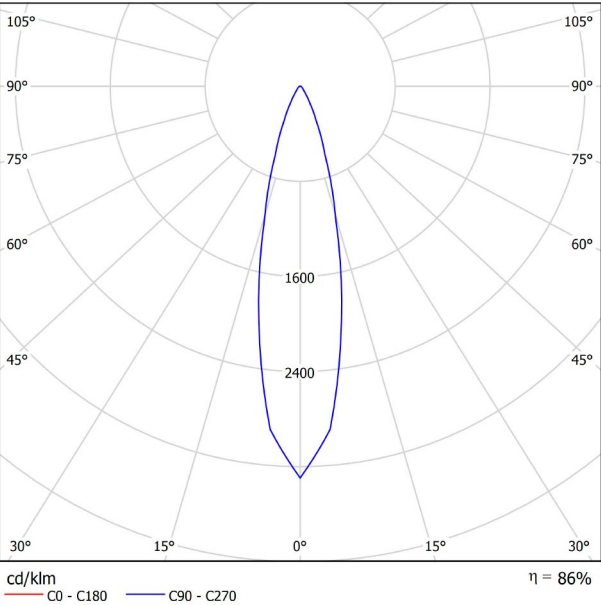


CONICAL DIAGRAM

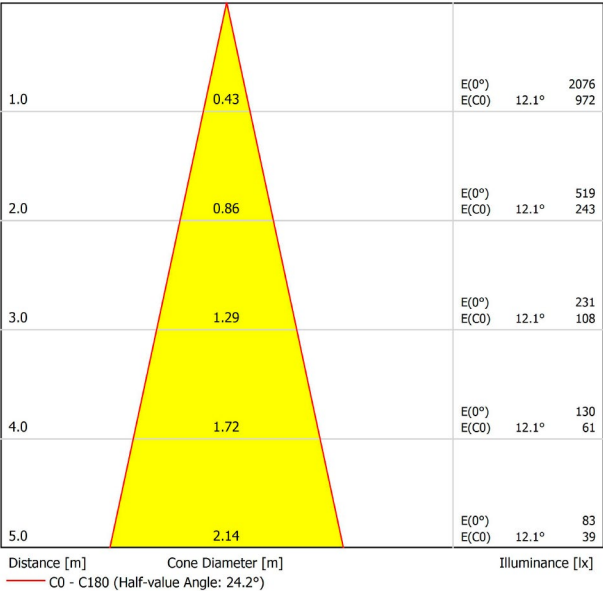



DIMENSIONS

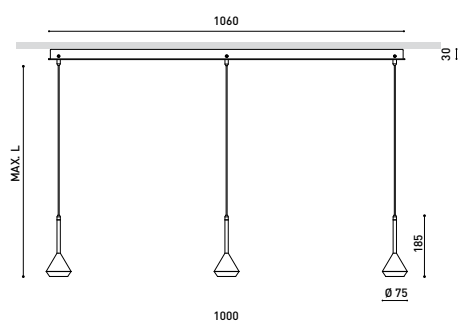

AWARDS



Name	SPIN 3 SURFACE 5M 24° DIM DALI 3000K NT-WT
Reference	A3912201NTWT
Color	Textured black
RAL	9005
Category	SURFACE

PRODUCT

Light source	LED
Gross luminous flux	3 x 630 Lm
Power	3 x 6,5 W
Power values of the system	23,78 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	24°
Lighting efficiency	86%
Efficacy	97 Lm/W
Current intensity	700 mA
Dimming	DALI - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


LIGHTING INFORMATION

OTHER DATA


Ingress Protection	IP20
Cord length	5 m
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate



POLAR DIAGRAM

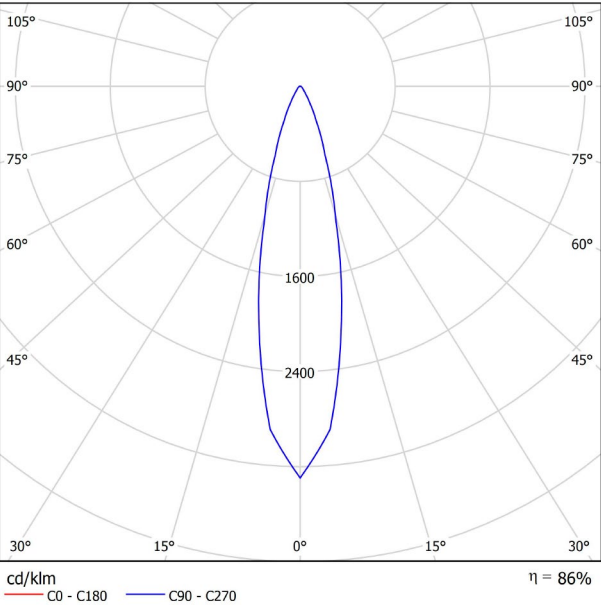


CONICAL DIAGRAM

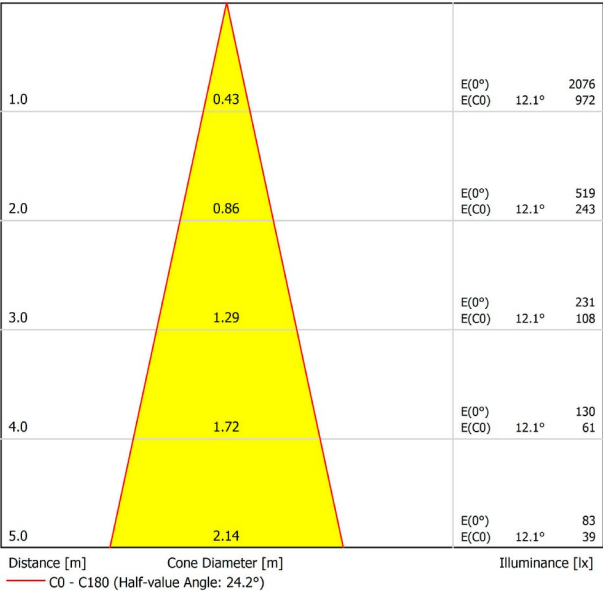



DIMENSIONS

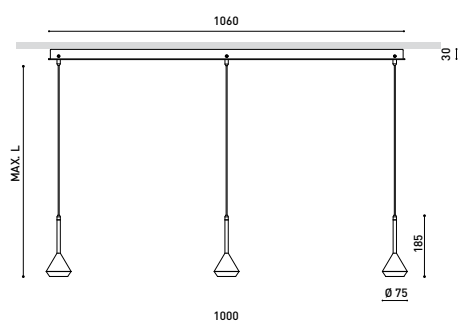

AWARDS



Name	SPIN 3 SURFACE 5M 24° DIM DALI 3000K WT-NT
Reference	A3912201WTNT
Color	Textured white
RAL	9016
Category	SURFACE

PRODUCT

Light source	LED
Gross luminous flux	3 x 630 Lm
Power	3 x 6,5 W
Power values of the system	23,78 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	24°
Lighting efficiency	86%
Efficacy	97 Lm/W
Current intensity	700 mA
Dimming	DALI - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


OTHER DATA

Ingress Protection	IP20
Cord length	5 m
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Reduced dimensions, clear lines and a mechanized geometry combined in a pendant luminaire for accent lighting. Its ultra-thin cable gives Spin a sensation of aerial floatability.

POLAR DIAGRAM

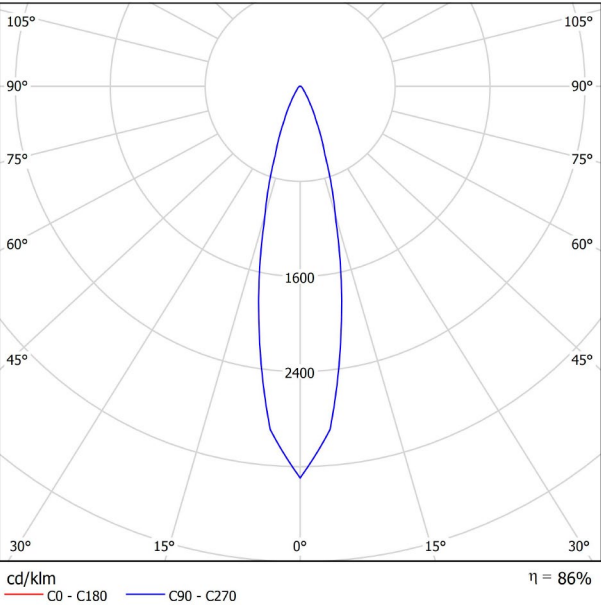


CONICAL DIAGRAM

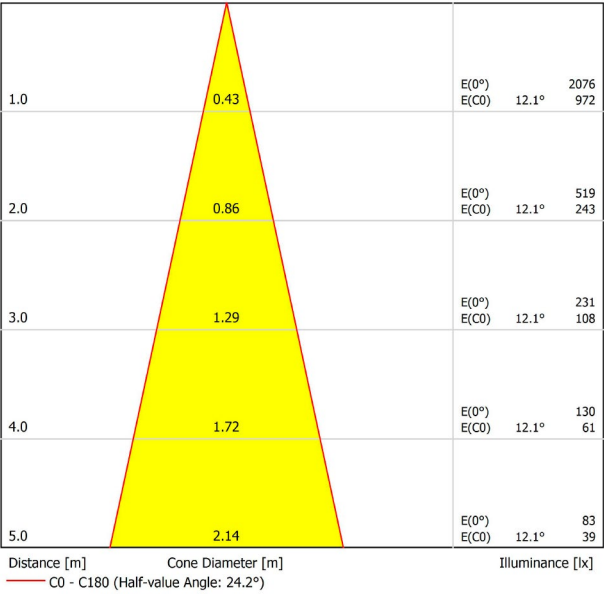



DIMENSIONS

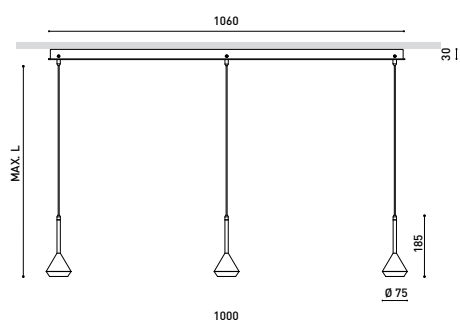

AWARDS



Name	SPIN 3 SURFACE 5M 24° DIM DALI 3000K WT-WT
Reference	A3912201WTWT
Color	Textured white
RAL	9016
Category	SURFACE

PRODUCT

Light source	LED
Gross luminous flux	3 x 630 Lm
Power	3 x 6,5 W
Power values of the system	23,78 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	24°
Lighting efficiency	86%
Efficacy	97 Lm/W
Current intensity	700 mA
Dimming	DALI - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Cord length	5 m
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Reduced dimensions, clear lines and a mechanized geometry combined in a pendant luminaire for accent lighting. Its ultra-thin cable gives Spin a sensation of aerial floatability.

POLAR DIAGRAM

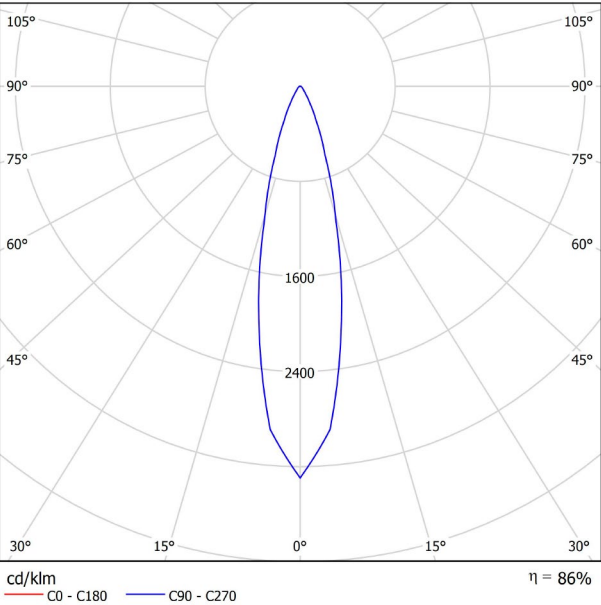


CONICAL DIAGRAM

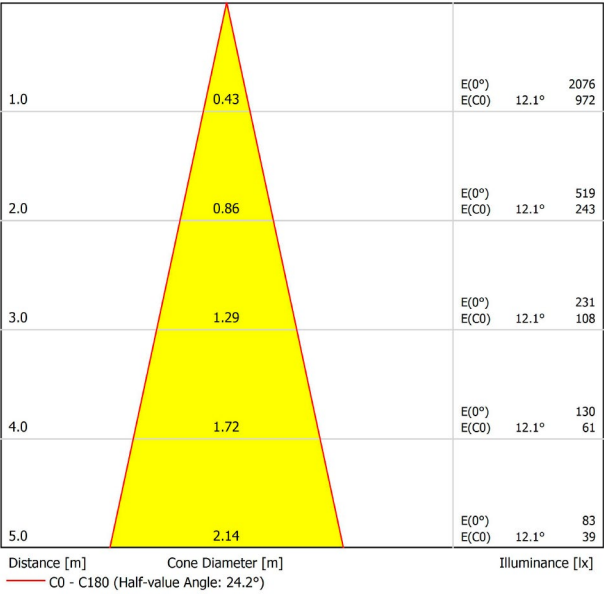



DIMENSIONS

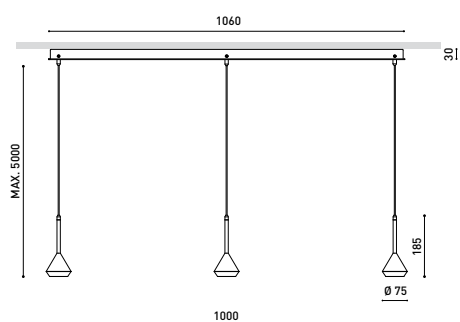

AWARDS



Name	SPIN 3 SURFACE 5M 24° DIM DALI 4000K MC-NT
Reference	A3912202MCNT
Color	Metallized copper
RAL	Electrolytic bath
Category	SUSPENSION

PRODUCT

Light source	LED
Gross luminous flux	3 x 680 Lm
Power	3 x 6,5 W
Power values of the system	23,78 W
Colour temperature	4000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	24°
Lighting efficiency	86%
Efficacy	105 Lm/W
Current intensity	700 mA
Dimming	DALI - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


OTHER DATA

Ingress Protection	IP20
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Spin Surface is a version that allows it to be installed in places where it is impossible to access the false ceiling. Cement, concrete, vault ... its base, set to apply three luminaires, houses the driver and allows the luminaire to be installed on all types of surfaces.

POLAR DIAGRAM

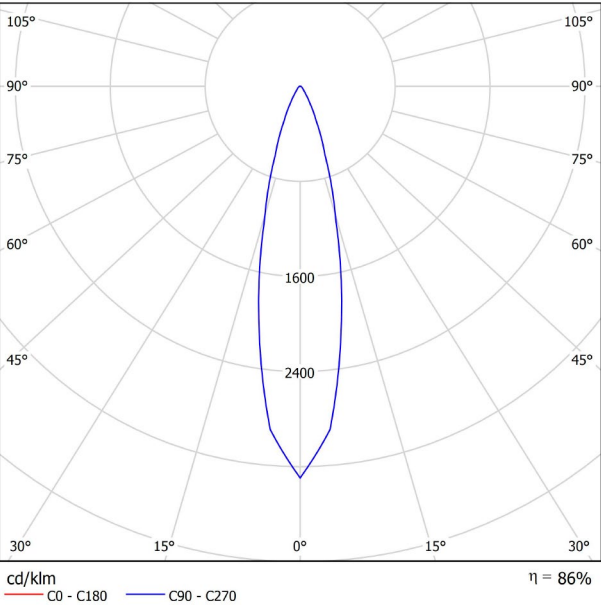


CONICAL DIAGRAM

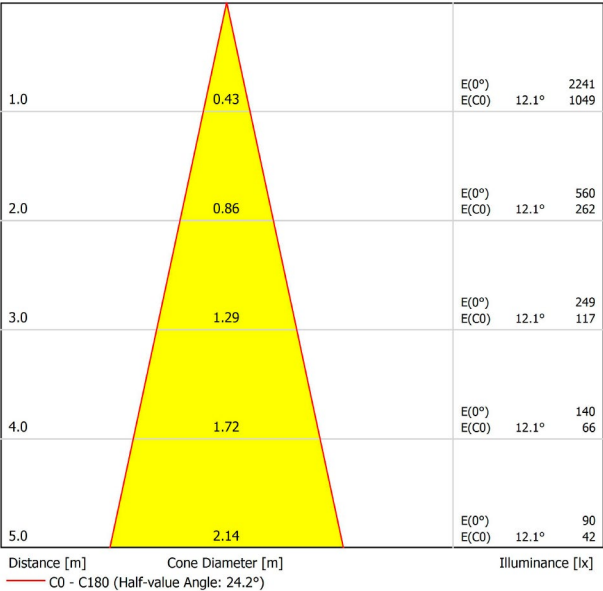



DIMENSIONS

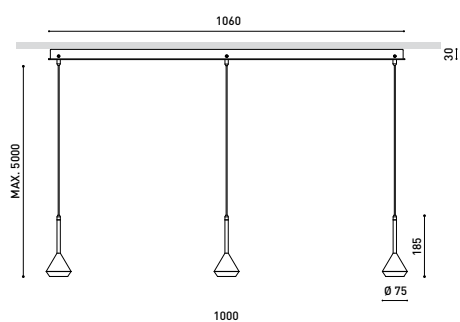

AWARDS



Name	SPIN 3 SURFACE 5M 24° DIM DALI 4000K MC-WT
Reference	A3912202MCWT
Color	Metallized copper
RAL	Electrolytic bath
Category	SUSPENSION

PRODUCT

Light source	LED
Gross luminous flux	3 x 680 Lm
Power	3 x 6,5 W
Power values of the system	23,78 W
Colour temperature	4000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	24°
Lighting efficiency	86%
Efficacy	105 Lm/W
Current intensity	700 mA
Dimming	DALI - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


OTHER DATA

Ingress Protection	IP20
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Spin Surface is a version that allows it to be installed in places where it is impossible to access the false ceiling. Cement, concrete, vault ... its base, set to apply three luminaires, houses the driver and allows the luminaire to be installed on all types of surfaces.

POLAR DIAGRAM

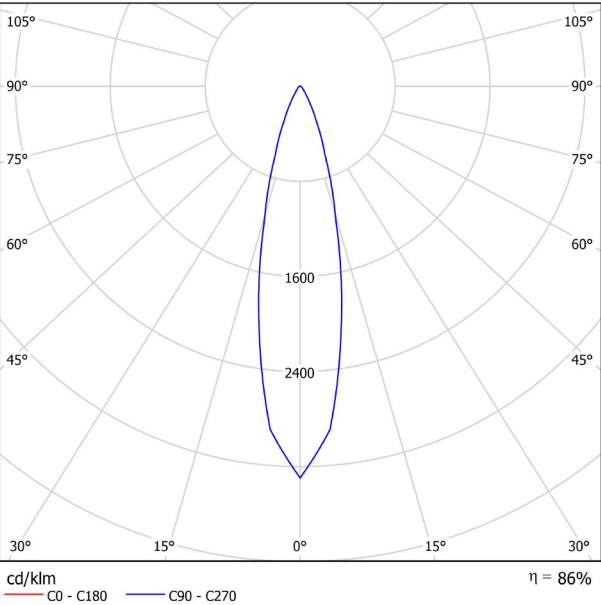


CONICAL DIAGRAM

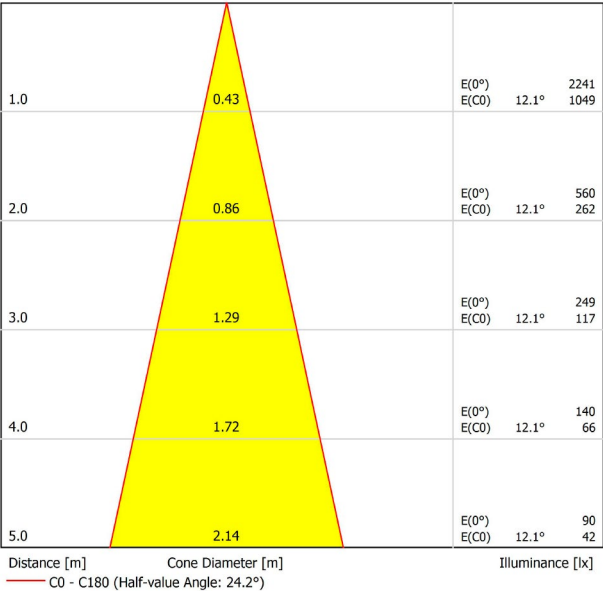



DIMENSIONS

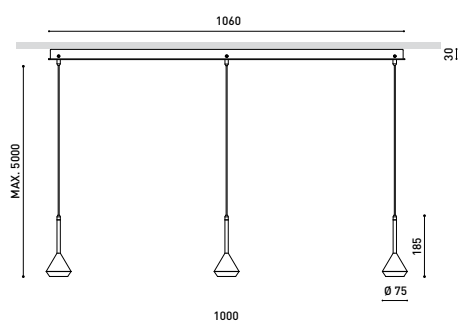

AWARDS



Name	SPIN 3 SURFACE 5M 24° DIM DALI 4000K MG-NT
Reference	A3912202MGNT
Color	Metallized gold
RAL	Electrolytic bath
Category	SUSPENSION

PRODUCT

Light source	LED
Gross luminous flux	3 x 680 Lm
Power	3 x 6,5 W
Power values of the system	23,78 W
Colour temperature	4000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	24°
Lighting efficiency	86%
Efficacy	105 Lm/W
Current intensity	700 mA
Dimming	DALI - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


OTHER DATA

Ingress Protection	IP20
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Spin Surface is a version that allows it to be installed in places where it is impossible to access the false ceiling. Cement, concrete, vault ... its base, set to apply three luminaires, houses the driver and allows the luminaire to be installed on all types of surfaces.

POLAR DIAGRAM

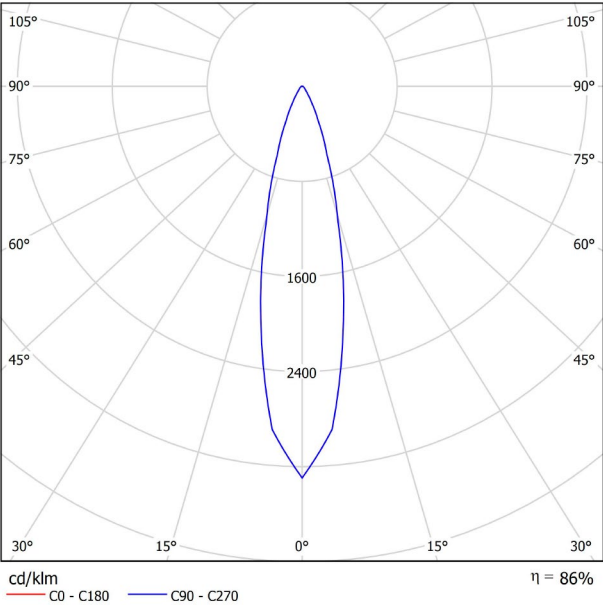


CONICAL DIAGRAM

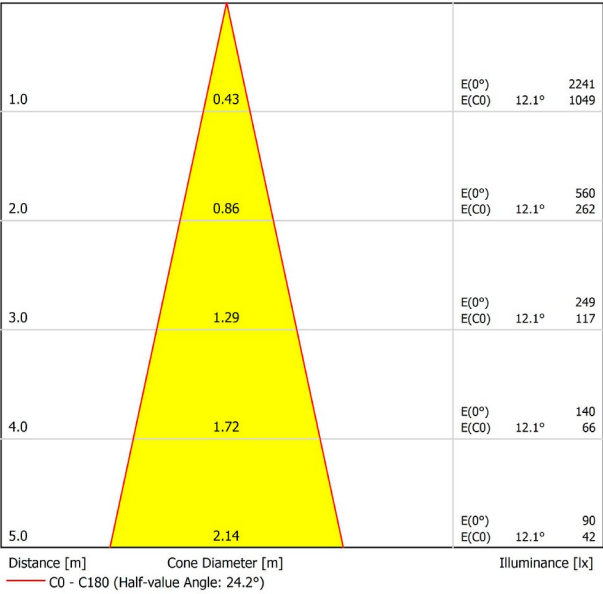



DIMENSIONS

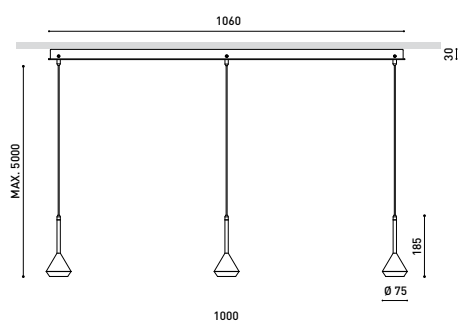

AWARDS



Name	SPIN 3 SURFACE 5M 24° DIM DALI 4000K MG-WT
Reference	A3912202MGWT
Color	Metallized gold
RAL	Electrolytic bath
Category	SUSPENSION

PRODUCT

Light source	LED
Gross luminous flux	3 x 680 Lm
Power	3 x 6,5 W
Power values of the system	23,78 W
Colour temperature	4000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	24°
Lighting efficiency	86%
Efficacy	105 Lm/W
Current intensity	700 mA
Dimming	DALI - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


OTHER DATA

Ingress Protection	IP20
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Spin Surface is a version that allows it to be installed in places where it is impossible to access the false ceiling. Cement, concrete, vault ... its base, set to apply three luminaires, houses the driver and allows the luminaire to be installed on all types of surfaces.

POLAR DIAGRAM

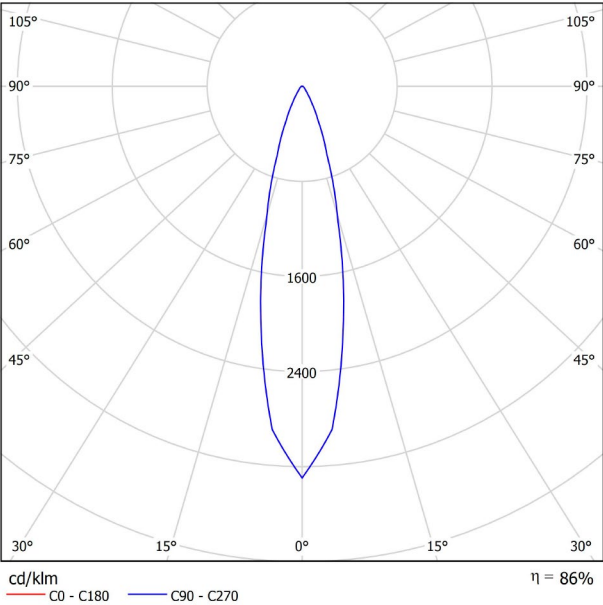


CONICAL DIAGRAM

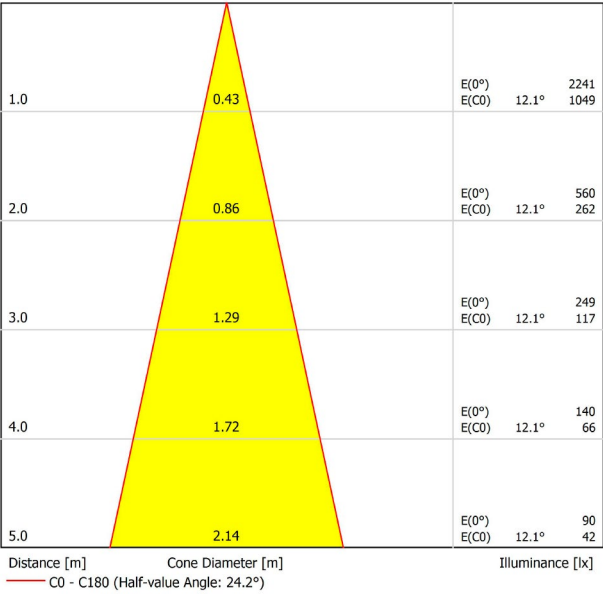



DIMENSIONS

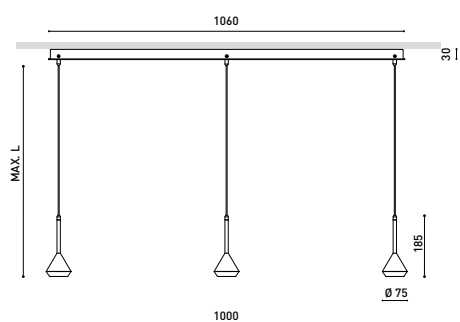

AWARDS



Name	SPIN 3 SURFACE 5M 40° DIM DALI 3000K WT-NT
Reference	A3912211WTNT
Color	Textured white
RAL	9016
Category	SURFACE

PRODUCT

Light source	LED
Gross luminous flux	3 x 630 Lm
Power	3 x 6,5 W
Power values of the system	23,78 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	40°
Lighting efficiency	84%
Efficacy	97 Lm/W
Current intensity	700 mA
Dimming	DALI - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


OTHER DATA

Ingress Protection	IP20
Cord length	5 m
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Reduced dimensions, clear lines and a mechanized geometry combined in a pendant luminaire for accent lighting. Its ultra-thin cable gives Spin a sensation of aerial floatability.

POLAR DIAGRAM

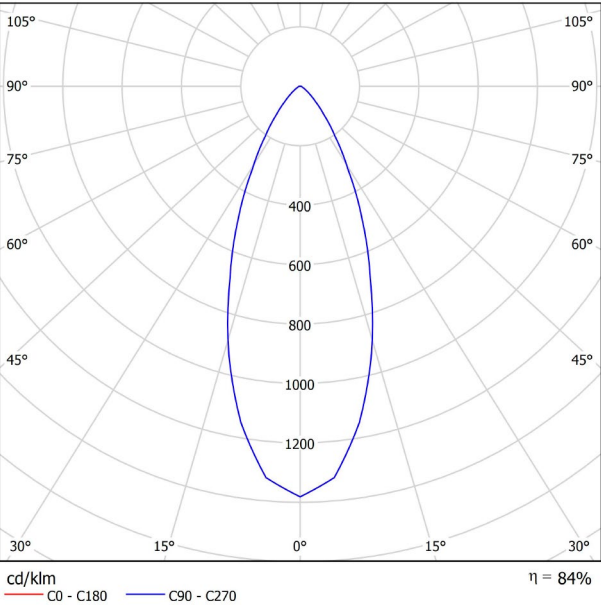


CONICAL DIAGRAM

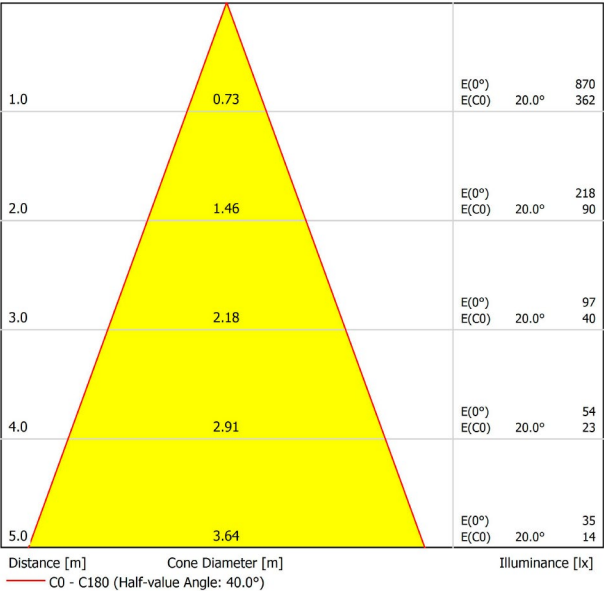



DIMENSIONS

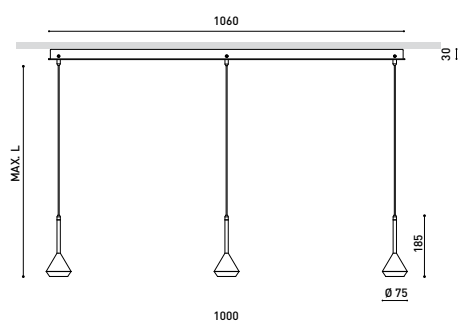

AWARDS



Name	SPIN 3 SURFACE 5M 40° DIM DALI 3000K WT-WT
Reference	A3912211WTWT
Color	Textured white
RAL	9016
Category	SURFACE

PRODUCT

Light source	LED
Gross luminous flux	3 x 630 Lm
Power	3 x 6,5 W
Power values of the system	23,78 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	40°
Lighting efficiency	84%
Efficacy	97 Lm/W
Current intensity	700 mA
Dimming	DALI - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Cord length	5 m
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Reduced dimensions, clear lines and a mechanized geometry combined in a pendant luminaire for accent lighting. Its ultra-thin cable gives Spin a sensation of aerial floatability.

POLAR DIAGRAM

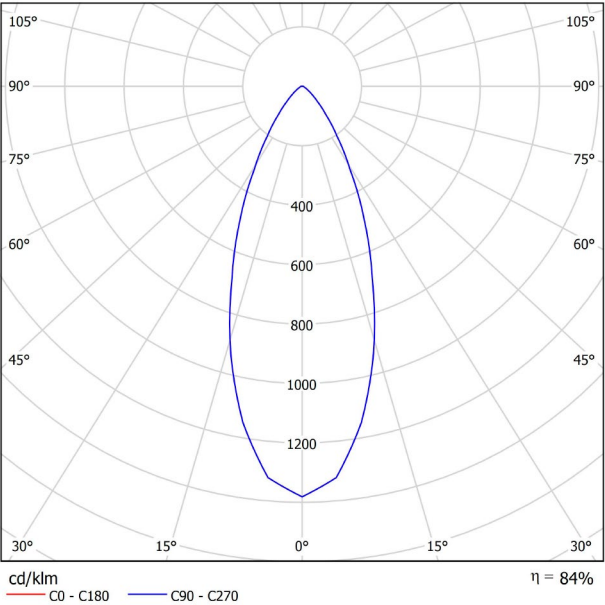


CONICAL DIAGRAM

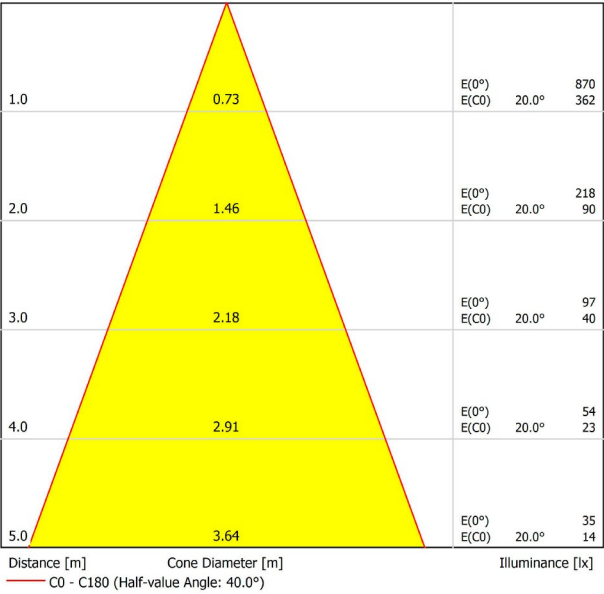



DIMENSIONS

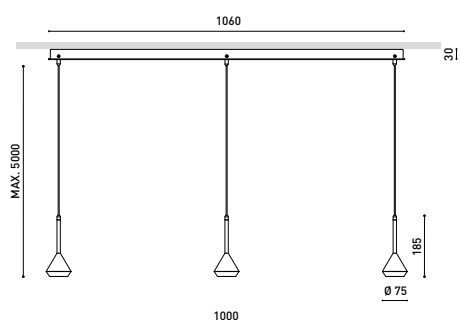

Name	SPIN 3 SURFACE 5M 40° DIM DALI 4000K MC-NT
Reference	A3912212MCNT
Color	Metallized copper
RAL	Electrolytic bath
Category	SUSPENSION

PRODUCT

LIGHTING INFORMATION

LED

3 x 680 Lm

3 x 6,5 W

23,78 W

4000 K

CRI>90

MacAdam Step 2

40°

84%

105 Lm/W

700 mA

DALI - Other DIM, please consult

Please Consult

Included

☐

220 V/240 V

50/60 Hz

A+

L80B10 (Tc=85°C) >60.000h

OTHER DATA

IP20

No

4150 g.

4577 g.

1078 x 139 x 89 mm

1

Aluminium / Polymethyl Methacrylate




AWARDS




Spin Surface is a version that allows it to be installed in places where it is impossible to access the false ceiling. Cement, concrete, vault ... its base, set to apply three luminaires, houses the driver and allows the luminaire to be installed on all types of surfaces.

POLAR DIAGRAM

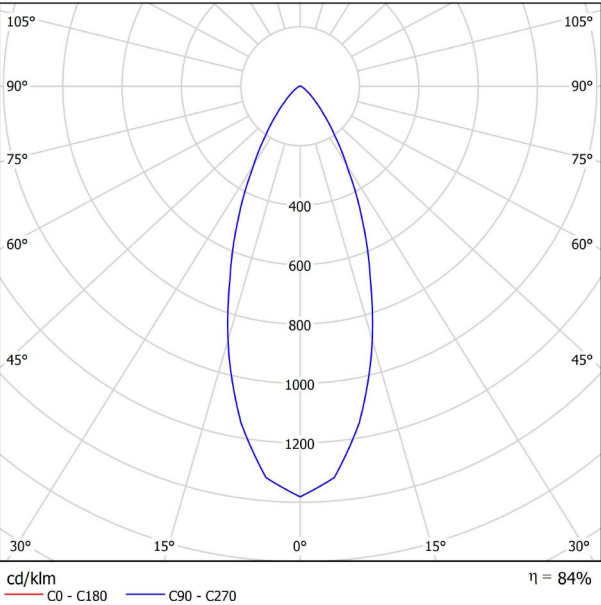


CONICAL DIAGRAM

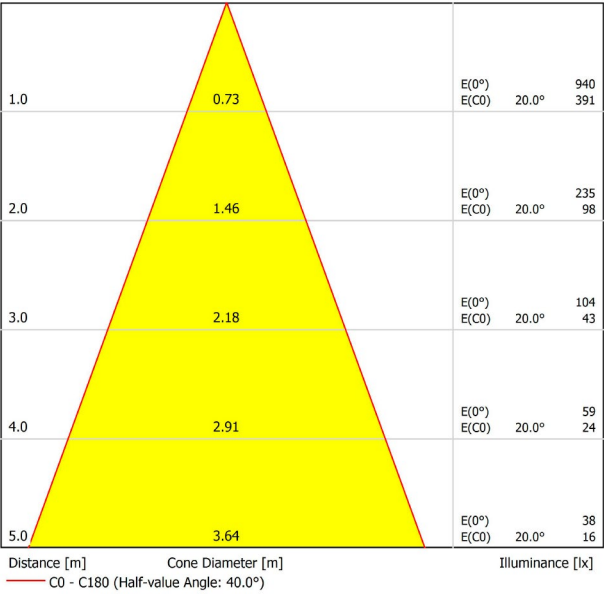



DIMENSIONS

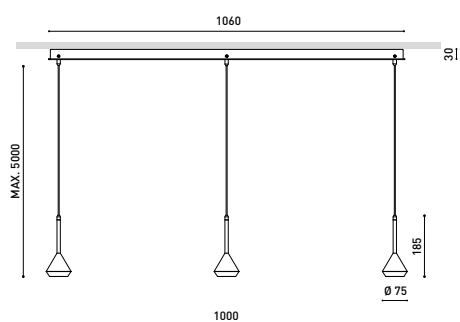

AWARDS



Name	SPIN 3 SURFACE 5M 40° DIM DALI 4000K MC-WT
Reference	A3912212MCWT
Color	Metallized copper
RAL	Electrolytic bath
Category	SUSPENSION

PRODUCT

Light source	LED
Gross luminous flux	3 x 680 Lm
Power	3 x 6,5 W
Power values of the system	23,78 W
Colour temperature	4000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	40°
Lighting efficiency	84%
Efficacy	105 Lm/W
Current intensity	700 mA
Dimming	DALI - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


OTHER DATA

Ingress Protection	IP20
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Spin Surface is a version that allows it to be installed in places where it is impossible to access the false ceiling. Cement, concrete, vault ... its base, set to apply three luminaires, houses the driver and allows the luminaire to be installed on all types of surfaces.

POLAR DIAGRAM

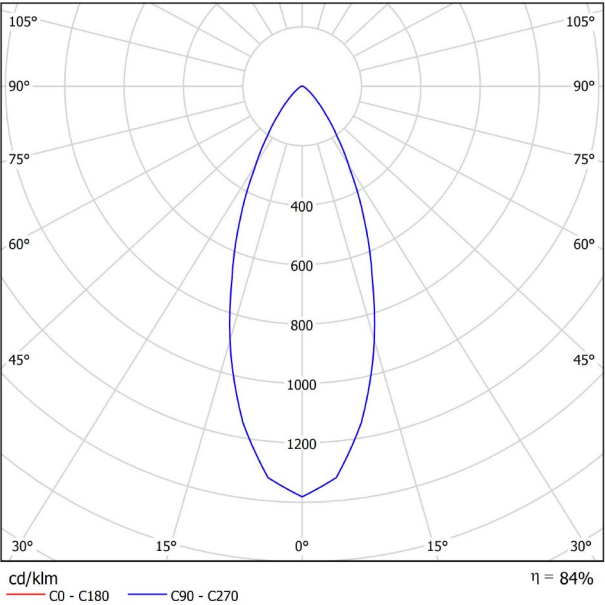


CONICAL DIAGRAM

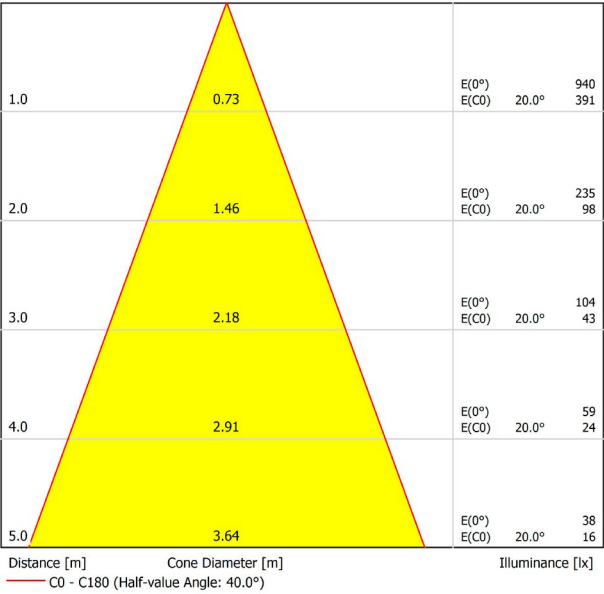



DIMENSIONS

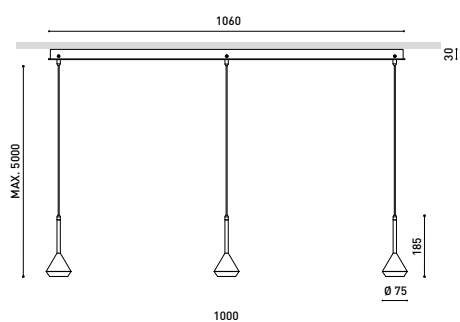

AWARDS



Name	SPIN 3 SURFACE 5M 40° DIM DALI 4000K MG-NT
Reference	A3912212MGNT
Color	Metallized gold
RAL	Electrolytic bath
Category	SUSPENSION

PRODUCT

Light source	LED
Gross luminous flux	3 x 680 Lm
Power	3 x 6,5 W
Power values of the system	23,78 W
Colour temperature	4000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	40°
Lighting efficiency	84%
Efficacy	105 Lm/W
Current intensity	700 mA
Dimming	DALI - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


OTHER DATA

Ingress Protection	IP20
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Spin Surface is a version that allows it to be installed in places where it is impossible to access the false ceiling. Cement, concrete, vault ... its base, set to apply three luminaires, houses the driver and allows the luminaire to be installed on all types of surfaces.

POLAR DIAGRAM

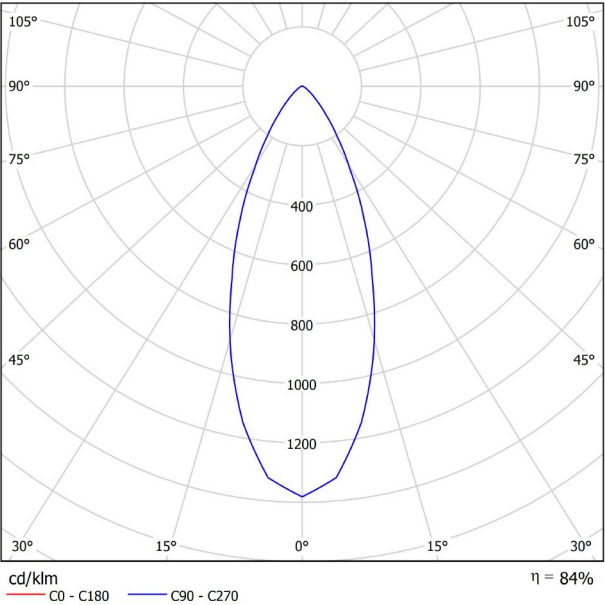


CONICAL DIAGRAM

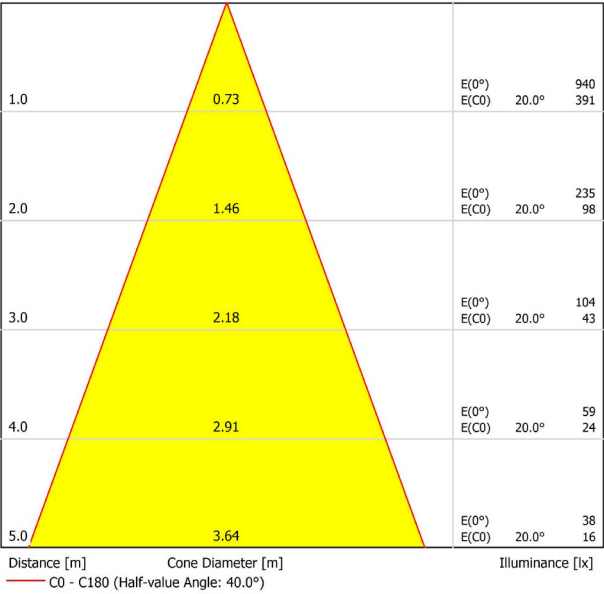



DIMENSIONS

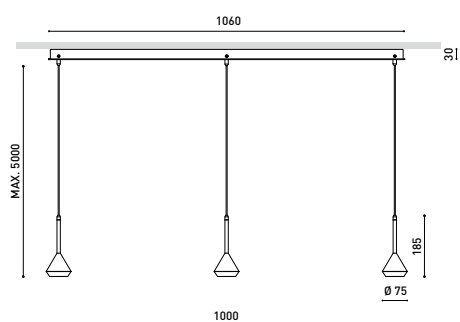

AWARDS



Name	SPIN 3 SURFACE 5M 40° DIM DALI 4000K MG-WT
Reference	A3912212MGWT
Color	Metallized gold
RAL	Electrolytic bath
Category	SUSPENSION

PRODUCT

Light source	LED
Gross luminous flux	3 x 680 Lm
Power	3 x 6,5 W
Power values of the system	23,78 W
Colour temperature	4000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	40°
Lighting efficiency	84%
Efficacy	105 Lm/W
Current intensity	700 mA
Dimming	DALI - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


OTHER DATA

Ingress Protection	IP20
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Spin Surface is a version that allows it to be installed in places where it is impossible to access the false ceiling. Cement, concrete, vault ... its base, set to apply three luminaires, houses the driver and allows the luminaire to be installed on all types of surfaces.

POLAR DIAGRAM

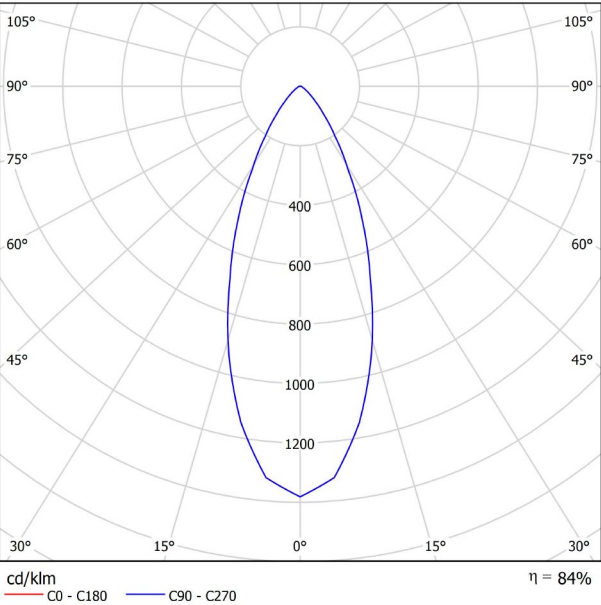


CONICAL DIAGRAM

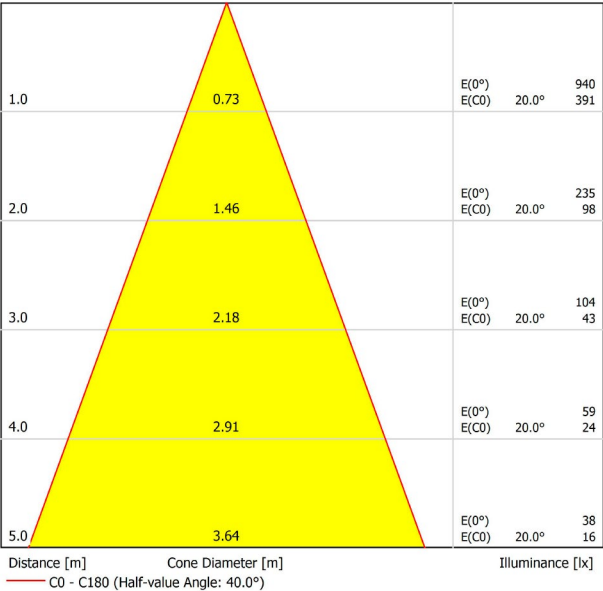



DIMENSIONS

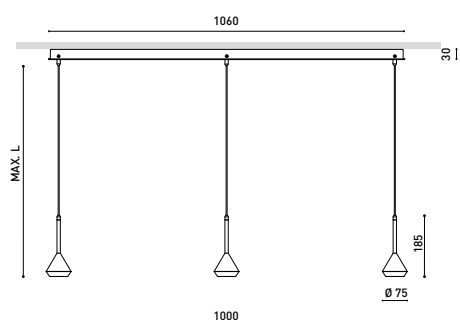

AWARDS



Name	SPIN 3 SURFACE 5M 40° DIM DALI 4000K NT-NT
Reference	A3912212NTNT
Color	Textured black
RAL	9005
Category	SURFACE

PRODUCT

Light source	LED
Gross luminous flux	3 x 680 Lm
Power	3 x 6,5 W
Power values of the system	23,78 W
Colour temperature	4000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	40°
Lighting efficiency	84%
Efficacy	105 Lm/W
Current intensity	700 mA
Dimming	DALI - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Cord length	5 m
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Reduced dimensions, clear lines and a mechanized geometry combined in a pendant luminaire for accent lighting. Its ultra-thin cable gives Spin a sensation of aerial floatability.

POLAR DIAGRAM

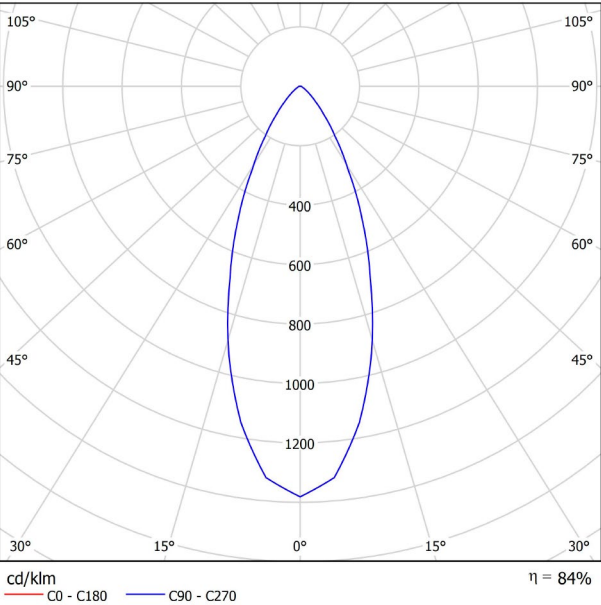


CONICAL DIAGRAM

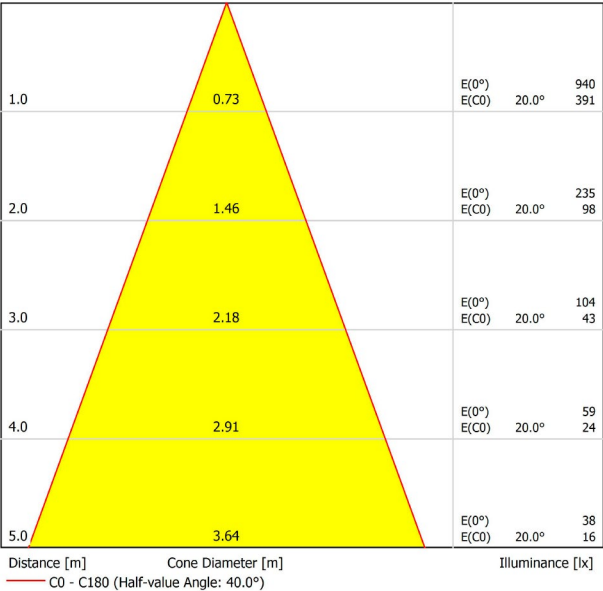



DIMENSIONS

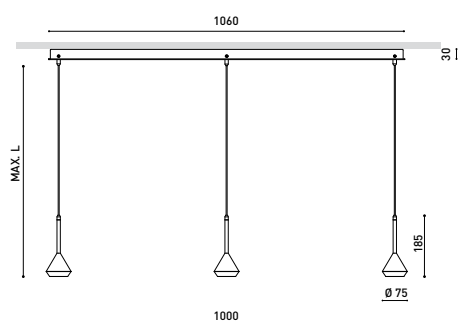

AWARDS



Name	SPIN 3 SURFACE 5M 40° DIM DALI 4000K NT-WT
Reference	A3912212NTWT
Color	Textured black
RAL	9005
Category	SURFACE

PRODUCT

Light source	LED
Gross luminous flux	3 x 680 Lm
Power	3 x 6,5 W
Power values of the system	23,78 W
Colour temperature	4000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	40°
Lighting efficiency	84%
Efficacy	105 Lm/W
Current intensity	700 mA
Dimming	DALI - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


OTHER DATA

Ingress Protection	IP20
Cord length	5 m
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Reduced dimensions, clear lines and a mechanized geometry combined in a pendant luminaire for accent lighting. Its ultra-thin cable gives Spin a sensation of aerial floatability.

POLAR DIAGRAM

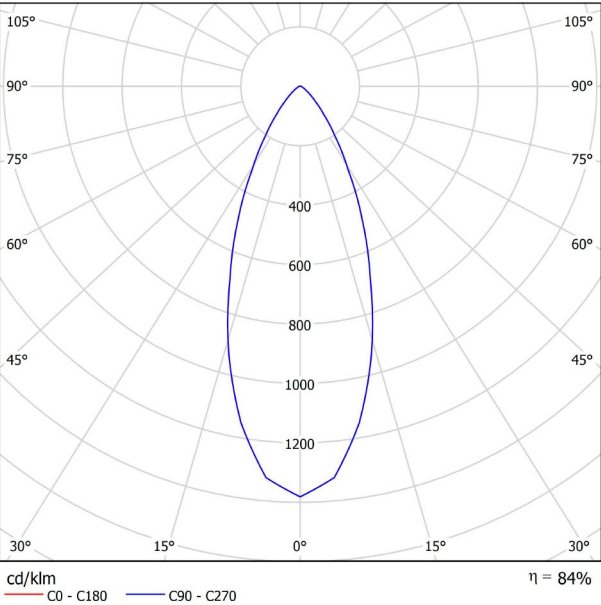


CONICAL DIAGRAM

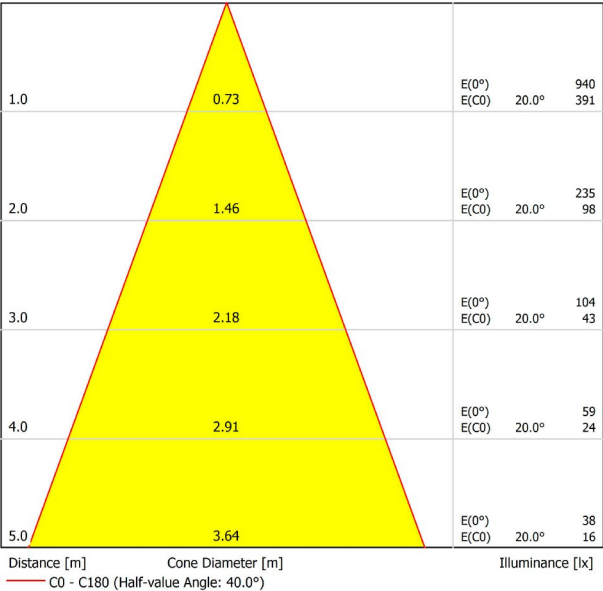



DIMENSIONS

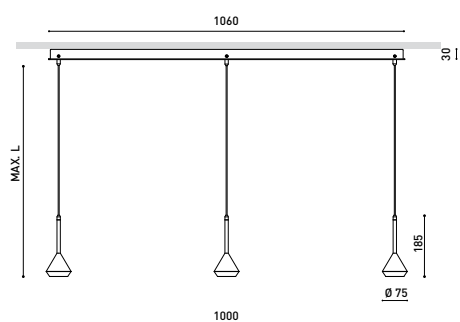

AWARDS



Name	SPIN 3 SURFACE 5M 40° DIM DALI 4000K WT-NT
Reference	A3912212WTNT
Color	Textured white
RAL	9016
Category	SURFACE

PRODUCT

Light source	LED
Gross luminous flux	3 x 680 Lm
Power	3 x 6,5 W
Power values of the system	23,78 W
Colour temperature	4000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	40°
Lighting efficiency	84%
Efficacy	105 Lm/W
Current intensity	700 mA
Dimming	DALI - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


OTHER DATA

Ingress Protection	IP20
Cord length	5 m
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Reduced dimensions, clear lines and a mechanized geometry combined in a pendant luminaire for accent lighting. Its ultra-thin cable gives Spin a sensation of aerial floatability.

POLAR DIAGRAM

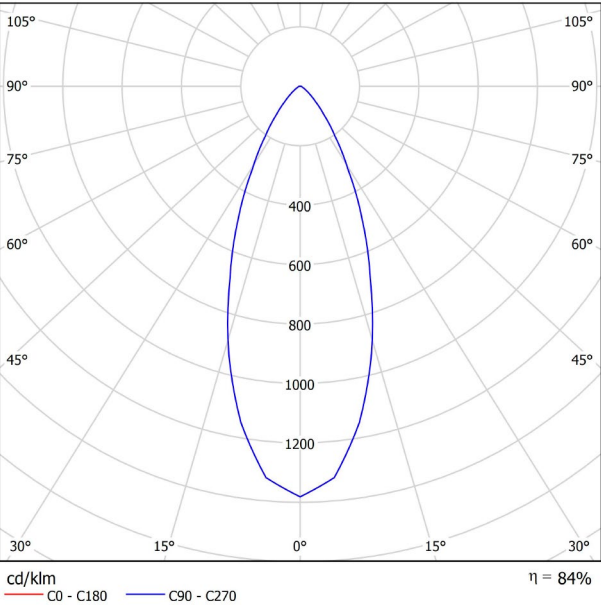


CONICAL DIAGRAM

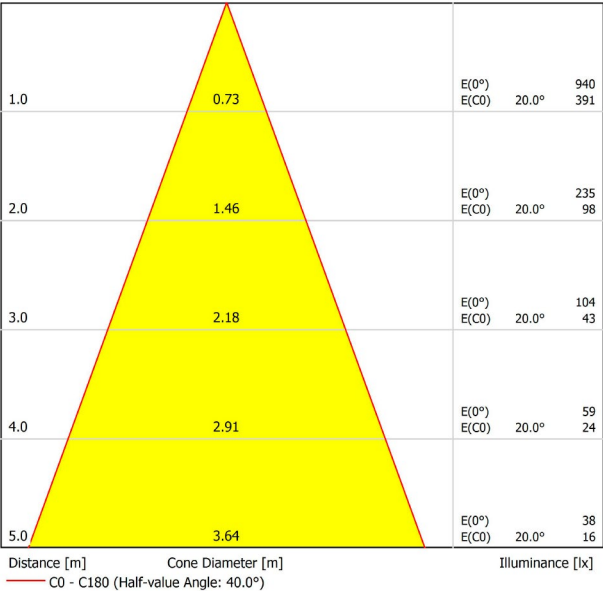



DIMENSIONS

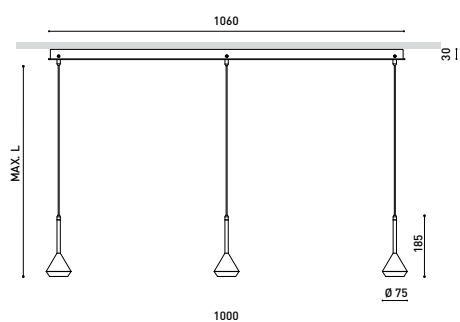

AWARDS



Name	SPIN 3 SURFACE 5M 40° DIM DALI 4000K WT-WT
Reference	A3912212WTWT
Color	Textured white
RAL	9016
Category	SURFACE

PRODUCT

Light source	LED
Gross luminous flux	3 x 680 Lm
Power	3 x 6,5 W
Power values of the system	23,78 W
Colour temperature	4000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	40°
Lighting efficiency	84%
Efficacy	105 Lm/W
Current intensity	700 mA
Dimming	DALI - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Cord length	5 m
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Reduced dimensions, clear lines and a mechanized geometry combined in a pendant luminaire for accent lighting. Its ultra-thin cable gives Spin a sensation of aerial floatability.

POLAR DIAGRAM

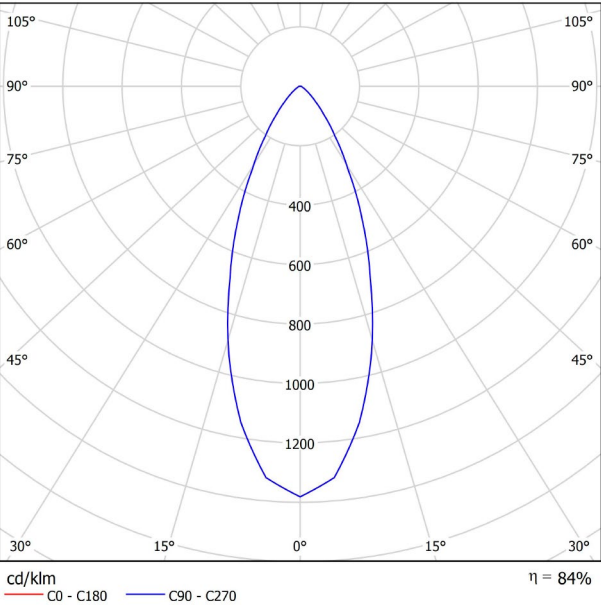


CONICAL DIAGRAM

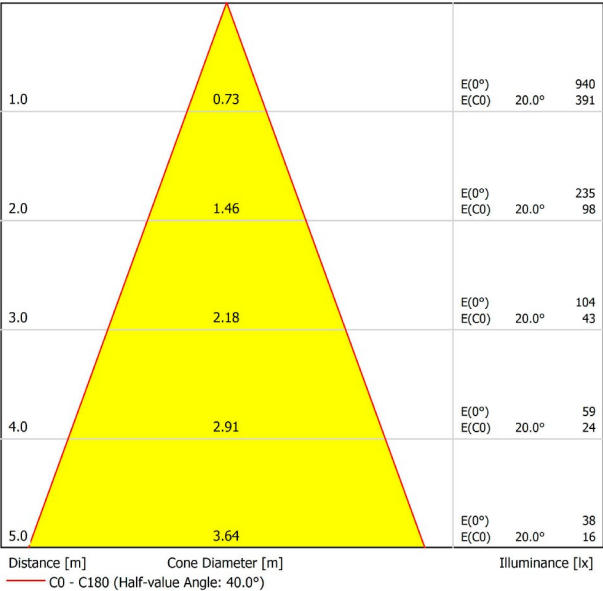



DIMENSIONS

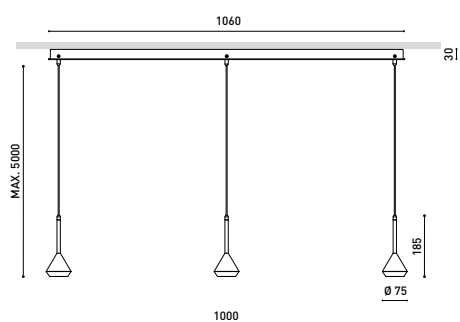

AWARDS



Name	SPIN 3 SURFACE 5M 40° DIM DALI 2700K MG-WT
Reference	A3912210MGWT
Color	Metallized gold
RAL	Electrolytic bath
Category	SUSPENSION

PRODUCT

Light source	LED
Gross luminous flux	3 x 600 Lm
Power	3 x 6,5 W
Power values of the system	23,78 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	40°
Lighting efficiency	84%
Efficacy	92 Lm/W
Current intensity	700 mA
Dimming	DALI - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


OTHER DATA

Ingress Protection	IP20
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Spin Surface is a version that allows it to be installed in places where it is impossible to access the false ceiling. Cement, concrete, vault ... its base, set to apply three luminaires, houses the driver and allows the luminaire to be installed on all types of surfaces.

POLAR DIAGRAM

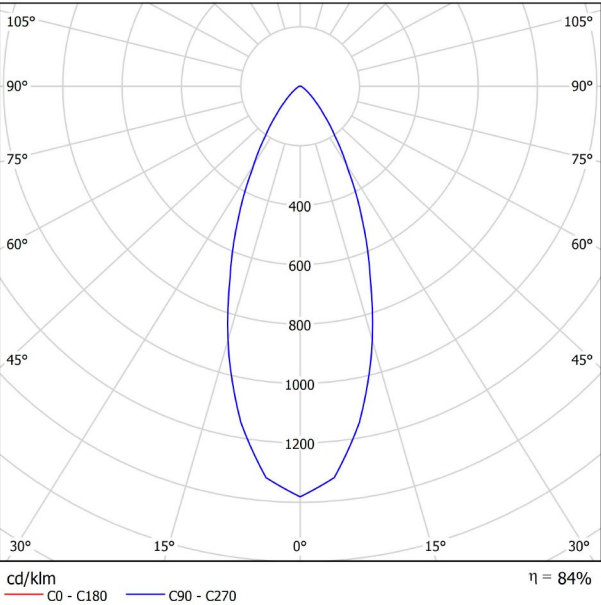


CONICAL DIAGRAM

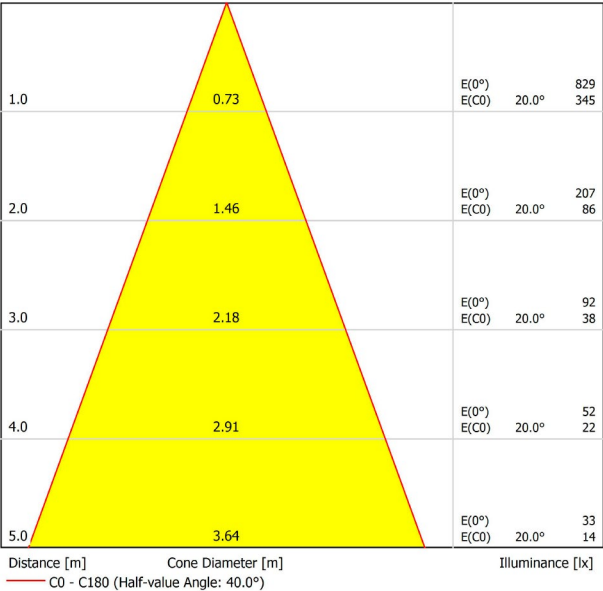



DIMENSIONS

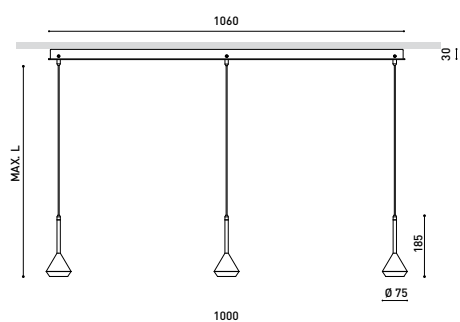

AWARDS



Name	SPIN 3 SURFACE 5M 40° DIM DALI 2700K NT-NT
Reference	A3912210NTNT
Color	Textured black
RAL	9005
Category	SURFACE

PRODUCT

Light source	LED
Gross luminous flux	3 x 600 Lm
Power	3 x 6,5 W
Power values of the system	23,78 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	40°
Lighting efficiency	84%
Efficacy	92 Lm/W
Current intensity	700 mA
Dimming	DALI - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Cord length	5 m
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Reduced dimensions, clear lines and a mechanized geometry combined in a pendant luminaire for accent lighting. Its ultra-thin cable gives Spin a sensation of aerial floatability.

POLAR DIAGRAM

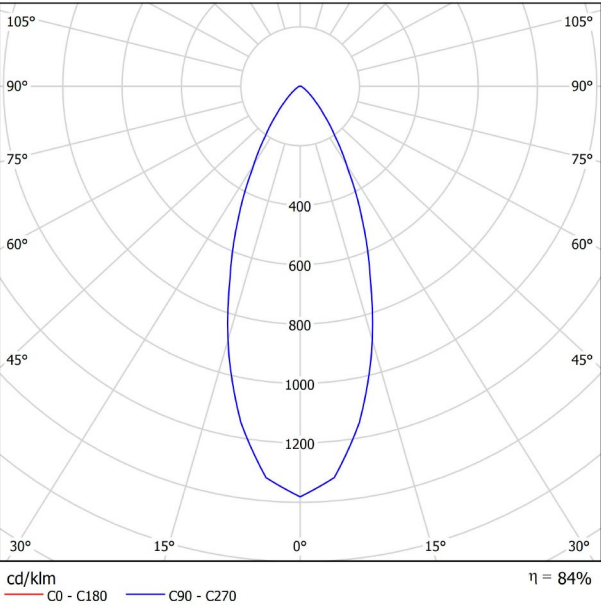


CONICAL DIAGRAM

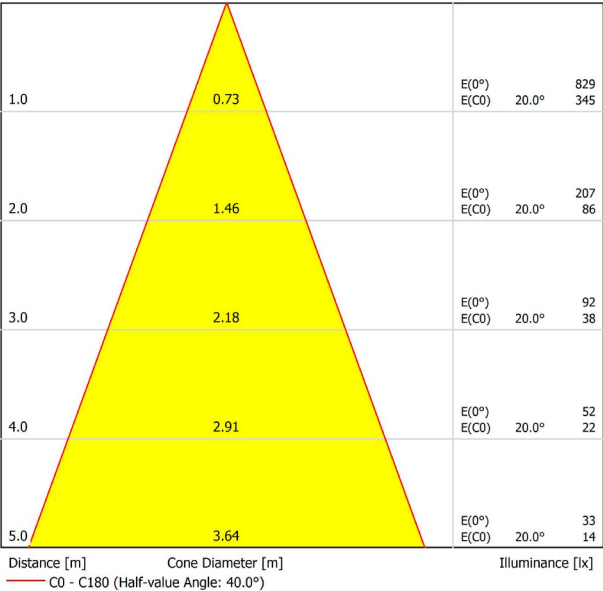



DIMENSIONS

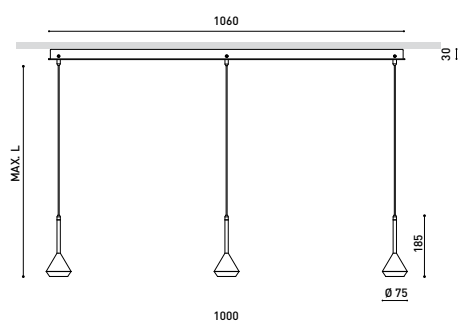

AWARDS



Name	SPIN 3 SURFACE 5M 40° DIM DALI 2700K NT-WT
Reference	A3912210NTWT
Color	Textured black
RAL	9005
Category	SURFACE

PRODUCT

Light source	LED
Gross luminous flux	3 x 600 Lm
Power	3 x 6,5 W
Power values of the system	23,78 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	40°
Lighting efficiency	84%
Efficacy	92 Lm/W
Current intensity	700 mA
Dimming	DALI - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Cord length	5 m
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Reduced dimensions, clear lines and a mechanized geometry combined in a pendant luminaire for accent lighting. Its ultra-thin cable gives Spin a sensation of aerial floatability.

POLAR DIAGRAM

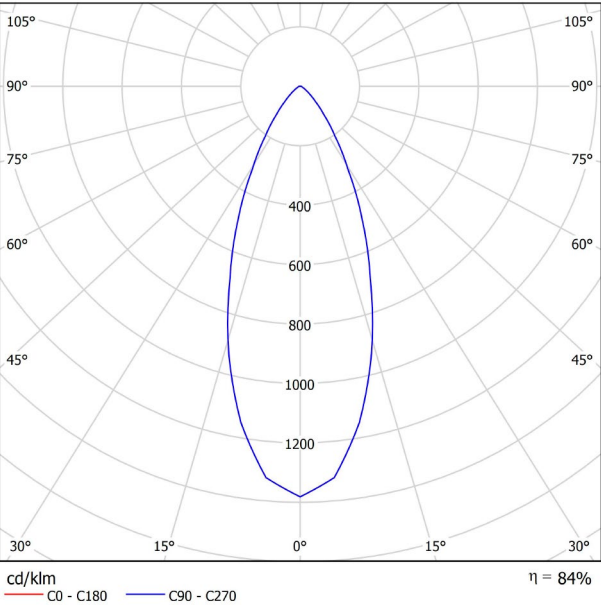


CONICAL DIAGRAM

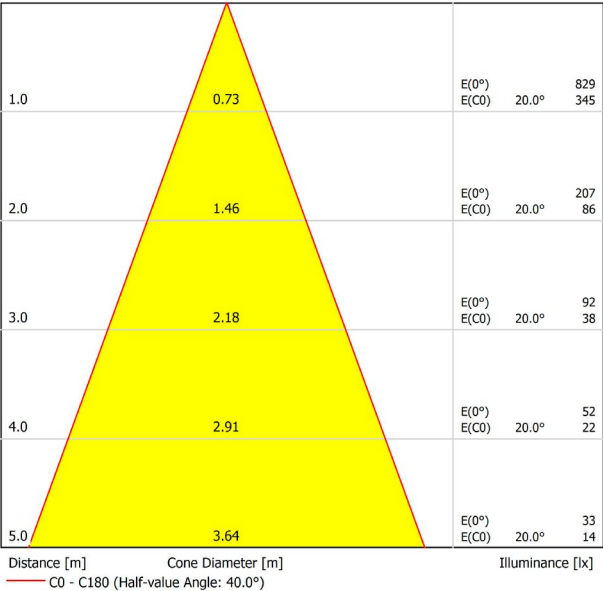



DIMENSIONS

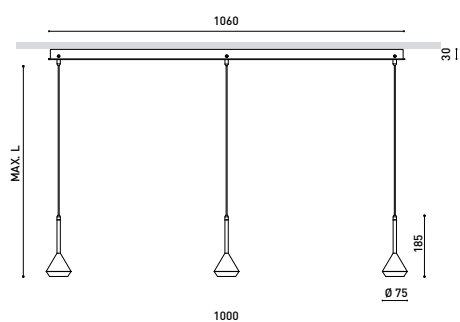

AWARDS



Name	SPIN 3 SURFACE 5M 40° DIM DALI 2700K WT-NT
Reference	A3912210WTNT
Color	Textured white
RAL	9016
Category	SURFACE

PRODUCT

Light source	LED
Gross luminous flux	3 x 600 Lm
Power	3 x 6,5 W
Power values of the system	23,78 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	40°
Lighting efficiency	84%
Efficacy	92 Lm/W
Current intensity	700 mA
Dimming	DALI - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Cord length	5 m
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Reduced dimensions, clear lines and a mechanized geometry combined in a pendant luminaire for accent lighting. Its ultra-thin cable gives Spin a sensation of aerial floatability.

POLAR DIAGRAM

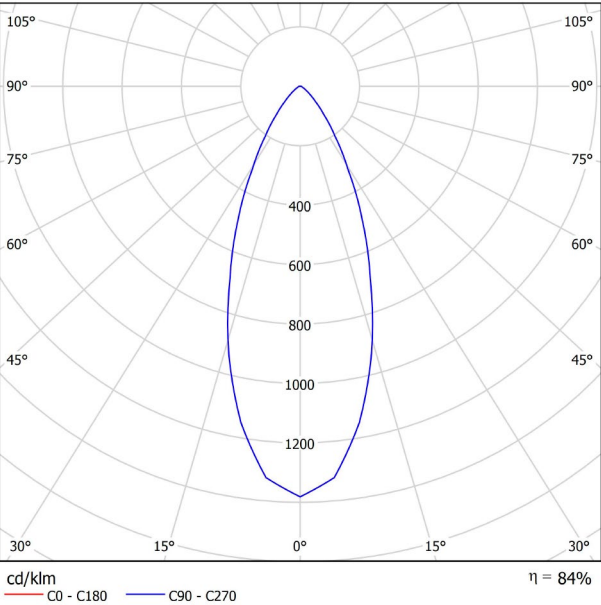


CONICAL DIAGRAM

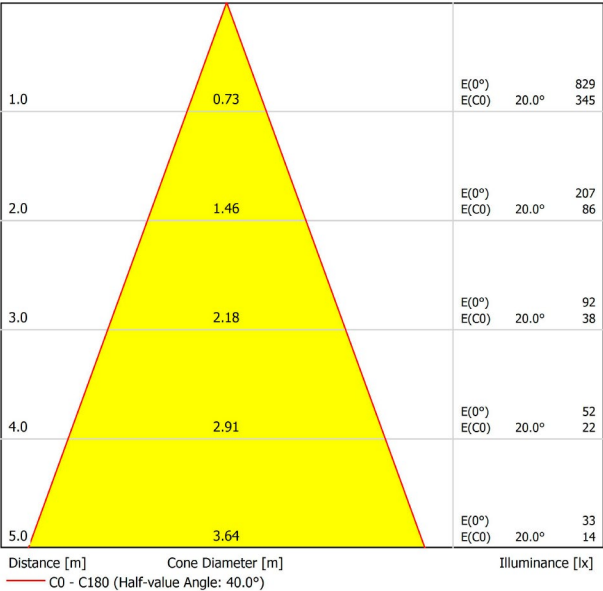



DIMENSIONS

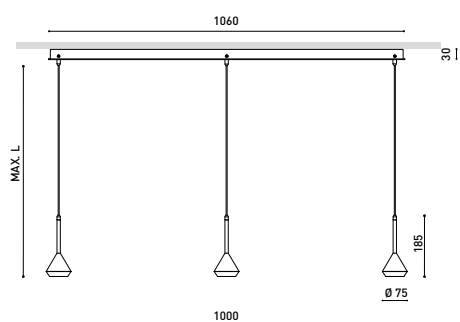

AWARDS



Name	SPIN 3 SURFACE 5M 40° DIM DALI 2700K WT-WT
Reference	A3912210WTWT
Color	Textured white
RAL	9016
Category	SURFACE

PRODUCT

Light source	LED
Gross luminous flux	3 x 600 Lm
Power	3 x 6,5 W
Power values of the system	23,78 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	40°
Lighting efficiency	84%
Efficacy	92 Lm/W
Current intensity	700 mA
Dimming	DALI - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Cord length	5 m
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Reduced dimensions, clear lines and a mechanized geometry combined in a pendant luminaire for accent lighting. Its ultra-thin cable gives Spin a sensation of aerial floatability.

POLAR DIAGRAM

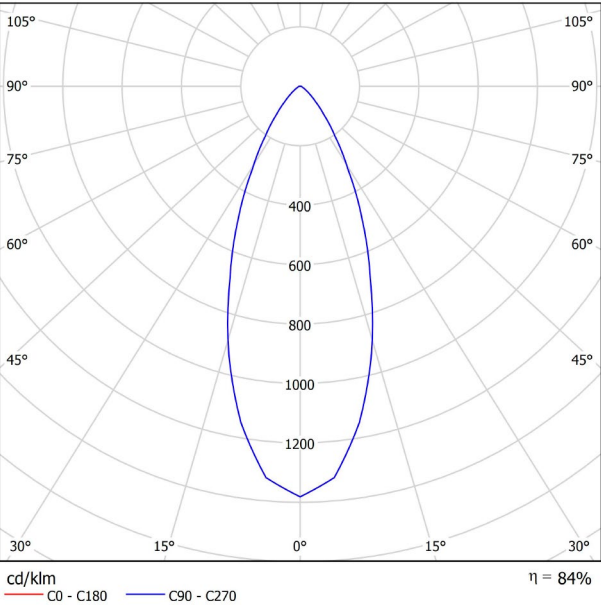


CONICAL DIAGRAM

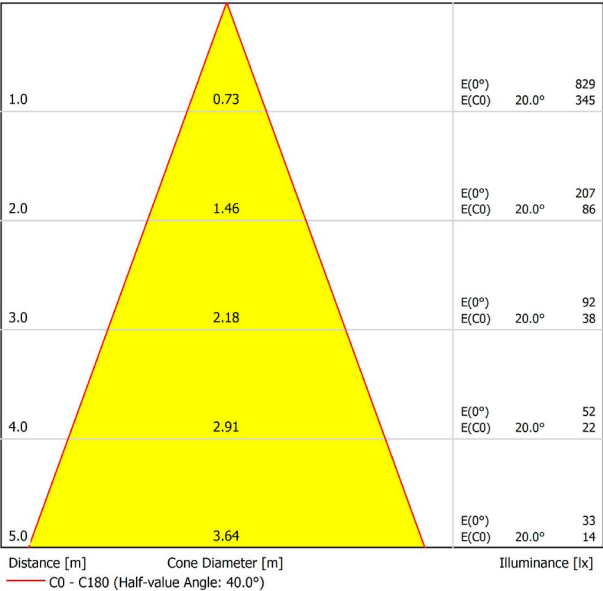



DIMENSIONS

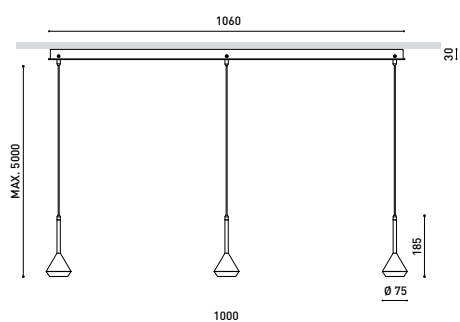

AWARDS



Name	SPIN 3 SURFACE 5M 40° DIM DALI 3000K MC-NT
Reference	A3912211MCNT
Color	Metallized copper
RAL	Electrolytic bath
Category	SUSPENSION

PRODUCT

Light source	LED
Gross luminous flux	3 x 630 Lm
Power	3 x 6,5 W
Power values of the system	23,78 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	40°
Lighting efficiency	84%
Efficacy	97 Lm/W
Current intensity	700 mA
Dimming	DALI - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


OTHER DATA

Ingress Protection	IP20
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Spin Surface is a version that allows it to be installed in places where it is impossible to access the false ceiling. Cement, concrete, vault ... its base, set to apply three luminaires, houses the driver and allows the luminaire to be installed on all types of surfaces.

POLAR DIAGRAM

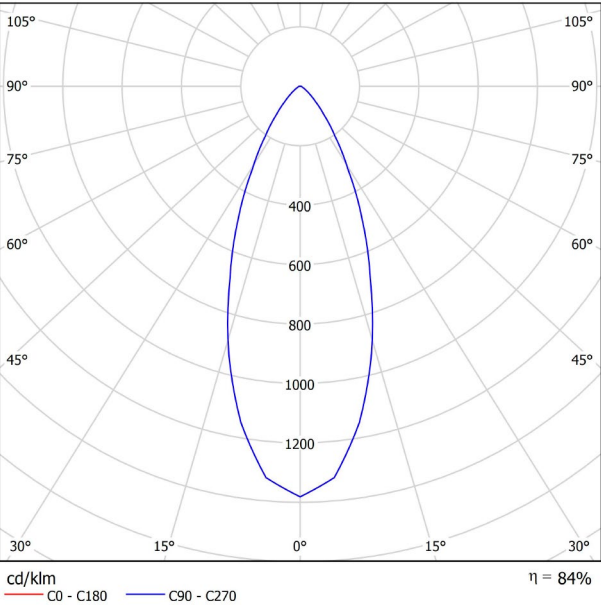


CONICAL DIAGRAM

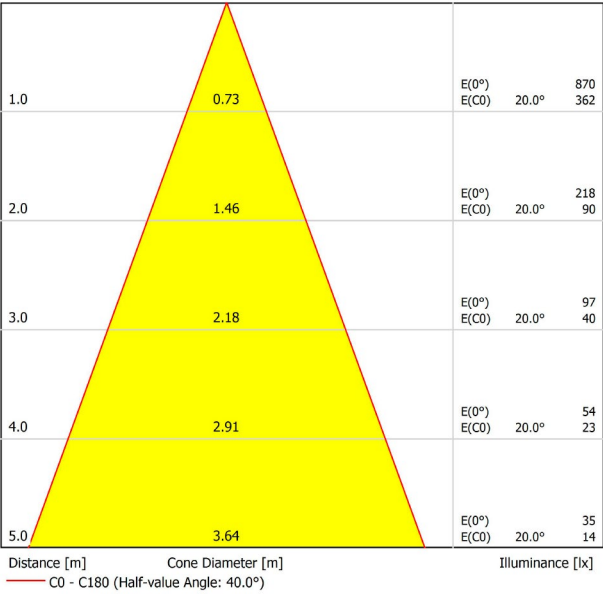



DIMENSIONS

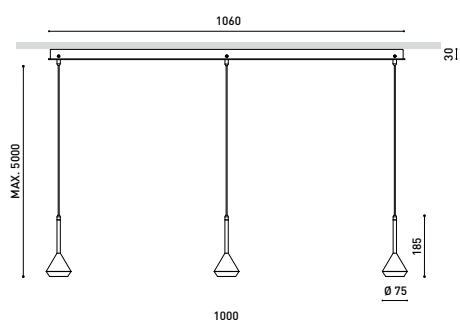

AWARDS



Name	SPIN 3 SURFACE 5M 40° DIM DALI 3000K MC-WT
Reference	A3912211MCWT
Color	Metallized copper
RAL	Electrolytic bath
Category	SUSPENSION

PRODUCT

Light source	LED
Gross luminous flux	3 x 630 Lm
Power	3 x 6,5 W
Power values of the system	23,78 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	40°
Lighting efficiency	84%
Efficacy	97 Lm/W
Current intensity	700 mA
Dimming	DALI - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


OTHER DATA

Ingress Protection	IP20
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Spin Surface is a version that allows it to be installed in places where it is impossible to access the false ceiling. Cement, concrete, vault ... its base, set to apply three luminaires, houses the driver and allows the luminaire to be installed on all types of surfaces.

POLAR DIAGRAM

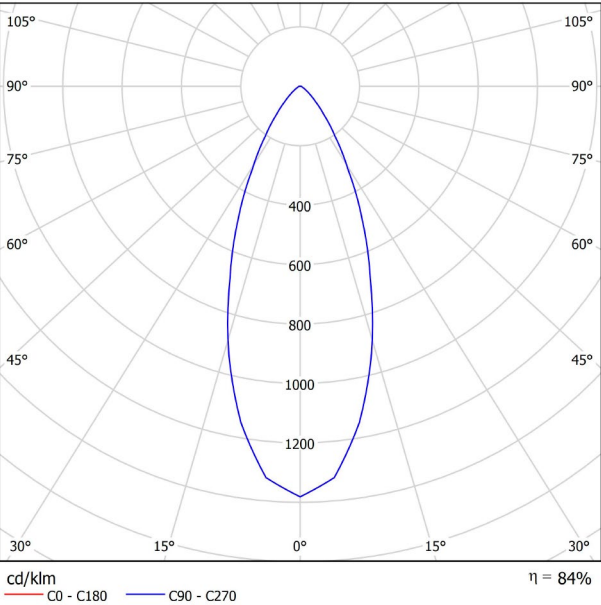


CONICAL DIAGRAM

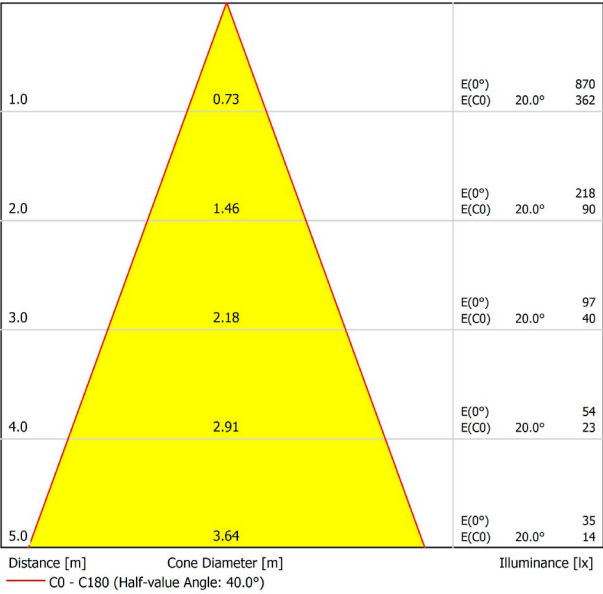



DIMENSIONS

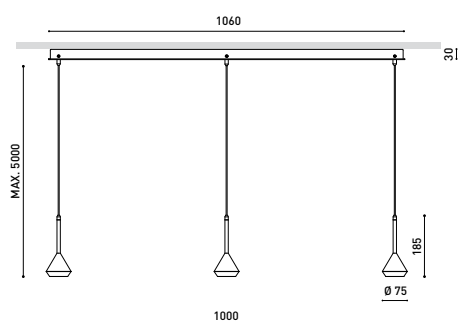

AWARDS



Name	SPIN 3 SURFACE 5M 40° DIM DALI 3000K MG-NT
Reference	A3912211MGNT
Color	Metallized gold
RAL	Electrolytic bath
Category	SUSPENSION

PRODUCT

Light source	LED
Gross luminous flux	3 x 630 Lm
Power	3 x 6,5 W
Power values of the system	23,78 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	40°
Lighting efficiency	84%
Efficacy	97 Lm/W
Current intensity	700 mA
Dimming	DALI - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


OTHER DATA

Ingress Protection	IP20
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Spin Surface is a version that allows it to be installed in places where it is impossible to access the false ceiling. Cement, concrete, vault ... its base, set to apply three luminaires, houses the driver and allows the luminaire to be installed on all types of surfaces.

POLAR DIAGRAM

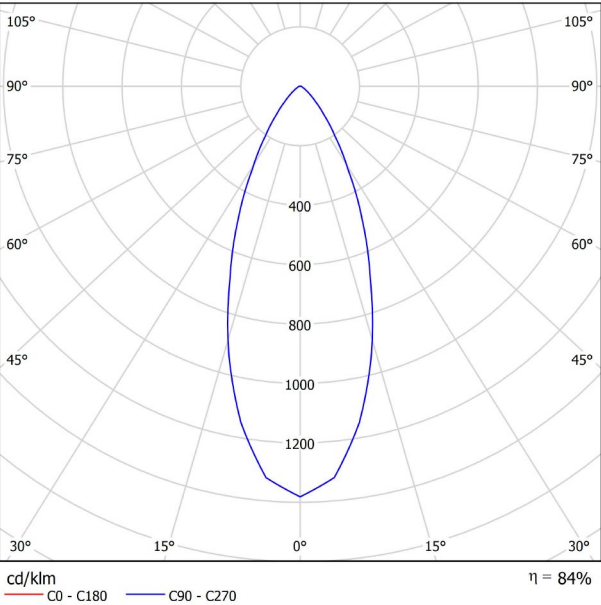


CONICAL DIAGRAM

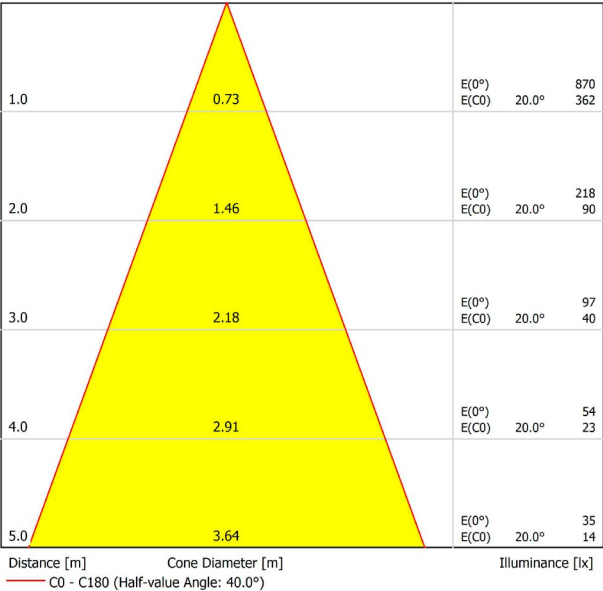



DIMENSIONS

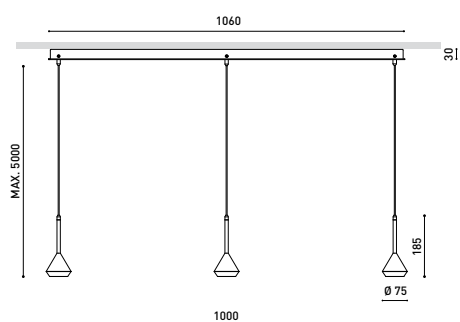

AWARDS



Name	SPIN 3 SURFACE 5M 40° DIM DALI 3000K MG-WT
Reference	A3912211MGWT
Color	Metallized gold
RAL	Electrolytic bath
Category	SUSPENSION

PRODUCT

Light source	LED
Gross luminous flux	3 x 630 Lm
Power	3 x 6,5 W
Power values of the system	23,78 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	40°
Lighting efficiency	84%
Efficacy	97 Lm/W
Current intensity	700 mA
Dimming	DALI - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


OTHER DATA

Ingress Protection	IP20
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Spin Surface is a version that allows it to be installed in places where it is impossible to access the false ceiling. Cement, concrete, vault ... its base, set to apply three luminaires, houses the driver and allows the luminaire to be installed on all types of surfaces.

POLAR DIAGRAM

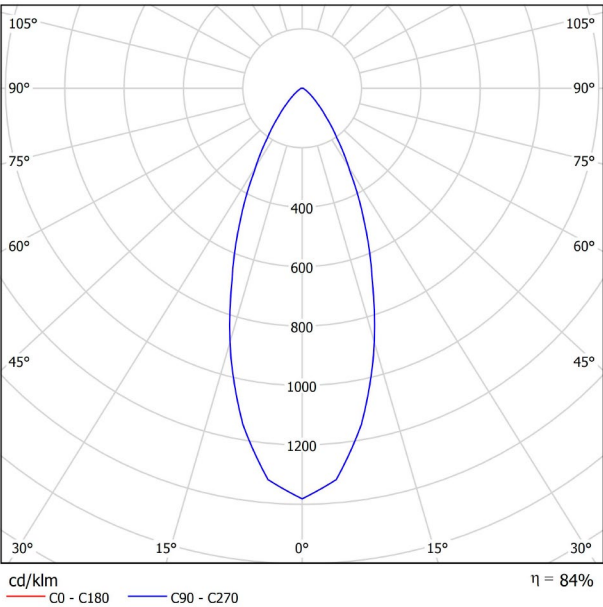


CONICAL DIAGRAM

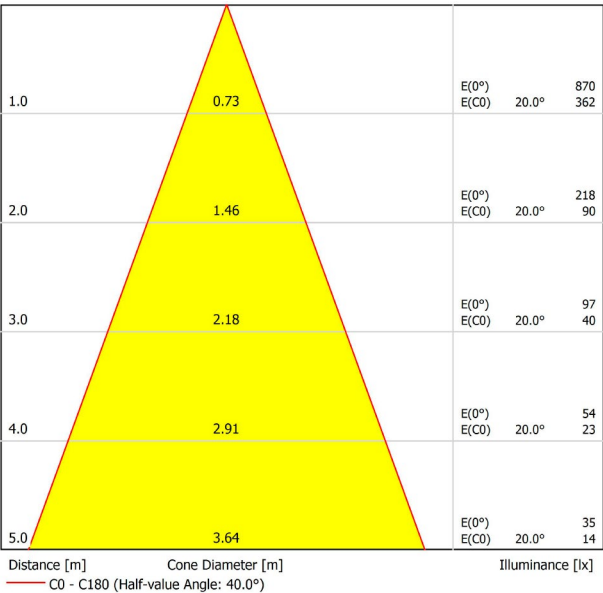



DIMENSIONS

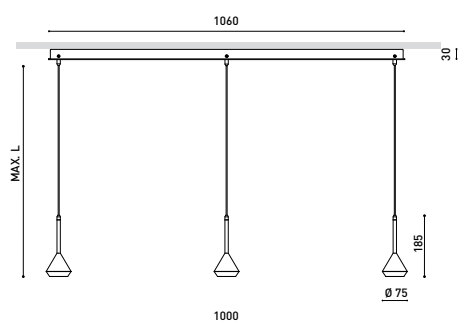

AWARDS



Name	SPIN 3 SURFACE 5M 40° DIM DALI 3000K NT-NT
Reference	A3912211NTNT
Color	Textured black
RAL	9005
Category	SURFACE

PRODUCT

Light source	LED
Gross luminous flux	3 x 630 Lm
Power	3 x 6,5 W
Power values of the system	23,78 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	40°
Lighting efficiency	84%
Efficacy	97 Lm/W
Current intensity	700 mA
Dimming	DALI - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


OTHER DATA

Ingress Protection	IP20
Cord length	5 m
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Reduced dimensions, clear lines and a mechanized geometry combined in a pendant luminaire for accent lighting. Its ultra-thin cable gives Spin a sensation of aerial floatability.

POLAR DIAGRAM

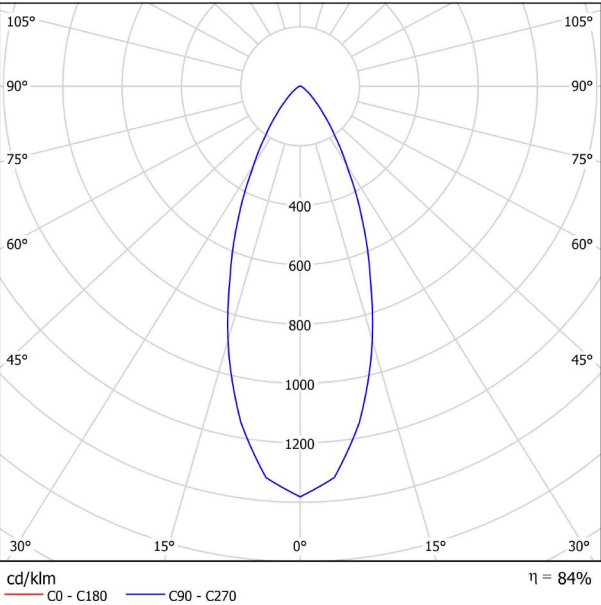


CONICAL DIAGRAM

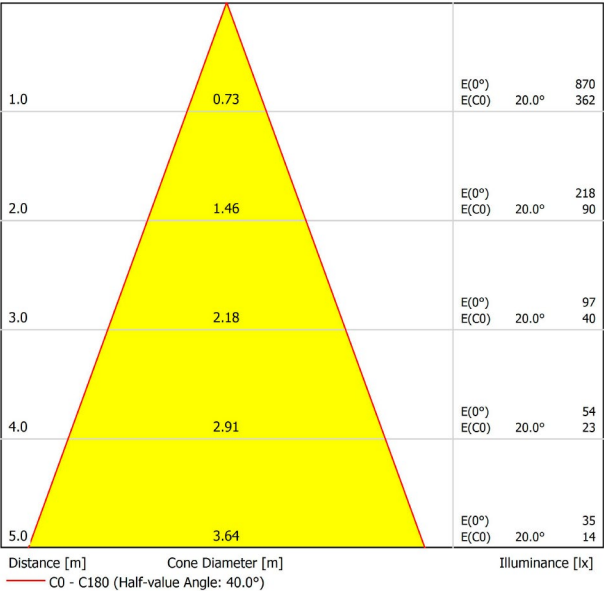



DIMENSIONS

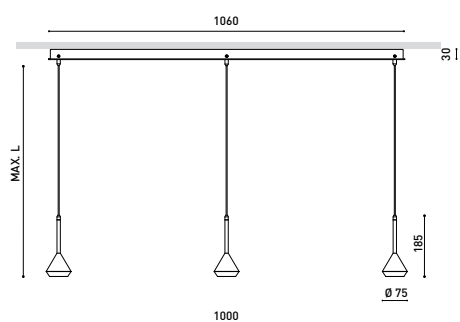

AWARDS



Name	SPIN 3 SURFACE 5M 40° DIM DALI 3000K NT-WT
Reference	A3912211NTWT
Color	Textured black
RAL	9005
Category	SURFACE

PRODUCT

Light source	LED
Gross luminous flux	3 x 630 Lm
Power	3 x 6,5 W
Power values of the system	23,78 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	40°
Lighting efficiency	84%
Efficacy	97 Lm/W
Current intensity	700 mA
Dimming	DALI - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Cord length	5 m
Fast adjustment tensioner	No
Weight	4150 g.
Packaged weight	4577 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate



Reduced dimensions, clear lines and a mechanized geometry combined in a pendant luminaire for accent lighting. Its ultra-thin cable gives Spin a sensation of aerial floatability.

POLAR DIAGRAM

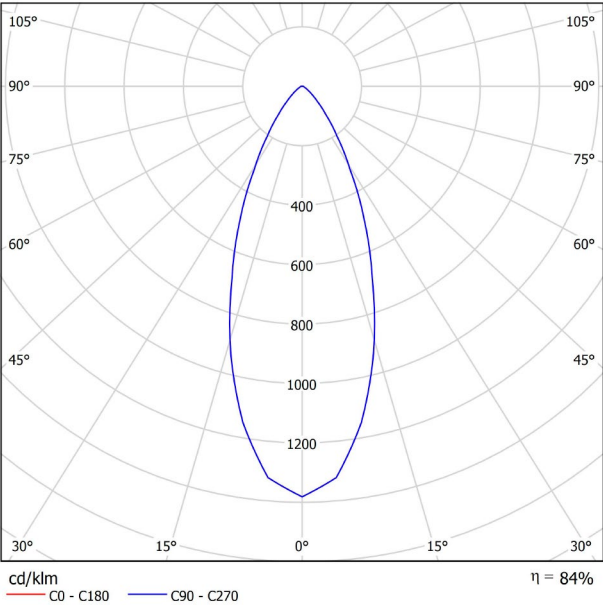

CONICAL DIAGRAM

