




DIMENSIONS



ACCESSORIES



DRIVER OPTIONS

TRIMLESS ACCESSORY
(MANDATORY)

PRODUCT

Name	ALASKA TRIMLESS 3000K N
Reference	A4010001N
Color	Matt black
RAL	Anodised, bath colour, looks alike RAL 9005
Category	CEILING RECESSED

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	500 Lm
Power	4,5 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	21°
Lighting efficiency	30%
Efficacy	111 Lm/W
Current intensity	500 mA
Dimming	No Dim / DALI
Control through bluetooth	Please Consult
Driver	Excluded: Must be placed on remote
Electrical insulation class	III
Energy efficiency	A
LED lifespan	L80B10 (Tj=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Recess measurements	Ø38 mm.
Weight	240 g.
Packaged weight	280 g.
Packaging dimensions	129 x 79 x 64 mm
Units per package	1
Materials	Aluminium / Optical Glass




Alaska is the contemporary reinterpretation of the technology and design of the classical incandescent filament light bulb. Alaska is composed of a solid optical glass sphere that symbolically represents the glass bulb of a traditional light bulb. Its compact body is one single piece that is manually lathed and polished like a piece of jewellery. Each one of the luminaires is traditionally produced, thus acquiring the value of an unrepeatable decorative work.

POLAR DIAGRAM

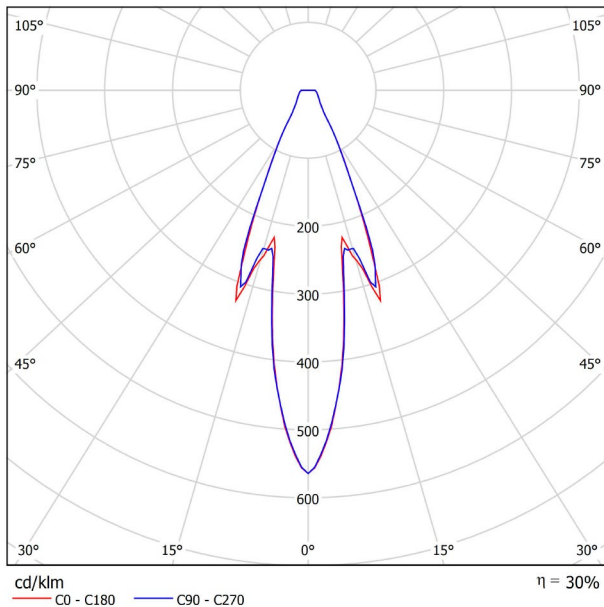


CONICAL DIAGRAM

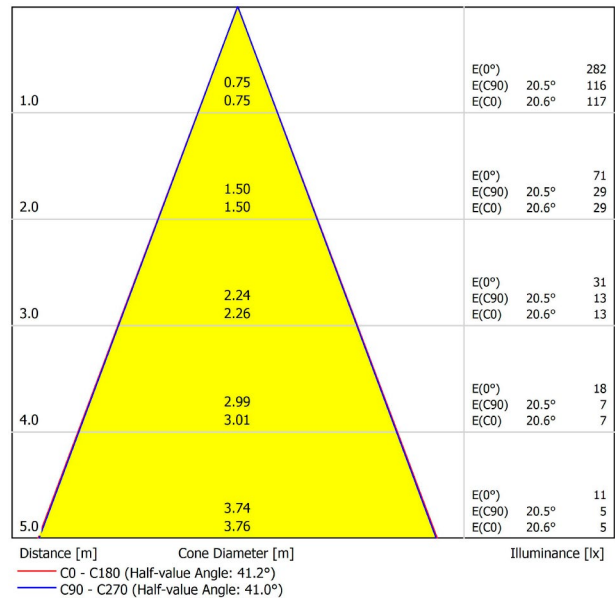

UGR

Glare Evaluation According to UGR												
ρ Ceiling		70	70	50	50	30	70	70	50	50	30	
ρ Walls		50	30	50	30	30	50	30	50	30	30	
ρ Floor		20	20	20	20	20	20	20	20	20	20	
Room Size X Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis					
2H	2H	16.4	17.4	16.7	17.6	17.8	16.4	17.4	16.7	17.6	17.8	
	3H	19.2	20.1	19.5	20.3	20.6	19.1	20.0	19.4	20.3	20.5	
	4H	20.7	21.5	21.0	21.8	22.1	20.6	21.5	20.9	21.7	22.0	
	6H	22.3	23.1	22.6	23.4	23.7	22.2	23.0	22.6	23.3	23.6	
	8H	23.2	23.9	23.5	24.2	24.6	23.1	23.9	23.5	24.2	24.5	
	12H	24.1	24.9	24.5	25.2	25.5	24.1	24.8	24.4	25.1	25.5	
4H	2H	17.3	18.1	17.6	18.4	18.7	17.3	18.1	17.6	18.4	18.7	
	3H	20.3	21.1	20.7	21.4	21.7	20.3	21.0	20.6	21.3	21.6	
	4H	22.0	22.7	22.4	23.0	23.4	22.0	22.6	22.3	23.0	23.3	
	6H	23.9	24.4	24.3	24.8	25.2	23.8	24.4	24.2	24.7	25.1	
	8H	24.8	25.4	25.3	25.7	26.2	24.8	25.3	25.2	25.7	26.1	
	12H	25.9	26.4	26.4	26.8	27.2	25.9	26.3	26.3	26.8	27.2	
8H	4H	22.7	23.3	23.2	23.7	24.1	22.7	23.2	23.1	23.6	24.0	
	6H	24.8	25.3	25.3	25.7	26.2	24.8	25.2	25.2	25.6	26.1	
	8H	26.0	26.4	26.5	26.8	27.3	26.0	26.3	26.4	26.8	27.3	
	12H	27.3	27.6	27.8	28.1	28.6	27.3	27.6	27.8	28.1	28.6	
12H	4H	22.9	23.4	23.4	23.8	24.2	22.9	23.4	23.3	23.8	24.2	
	6H	25.1	25.5	25.6	26.0	26.4	25.1	25.5	25.6	25.9	26.4	
	8H	26.4	26.7	26.9	27.2	27.7	26.4	26.7	26.9	27.2	27.7	
Variation of the observer position for the luminaire distances S												
S = 1.0H		+0.1 / -0.1					+0.1 / -0.1					
S = 1.5H		+0.3 / -0.3					+0.3 / -0.3					
S = 2.0H		+0.4 / -0.5					+0.4 / -0.5					
Standard table		BK12					BK12					
Correction Summand		8.3					8.3					
Corrected Glare Indices referring to 500lm Total Luminous Flux												



DRIVER OPTIONS*


		P	I	
	0434-00-42	4,5W	500mA	1 to 4 ALASKA
	0434-00-44	4,5W	500mA	1 to 4 ALASKA

220
240 V~

50/60 Hz



Driver must be placed on remote



PRODUCT	
Model	Alaska Trimless accessory
Reference	A4011000
Category	Accessories




INSTALLATION OPTIONS





DIMENSIONS



ACCESSORIES



DRIVER OPTIONS

TRIMLESS ACCESSORY
(MANDATORY)

PRODUCT

Name	ALASKA TRIMLESS 4000K N
Reference	A4010002N
Color	Matt black
RAL	Anodised, bath colour, looks alike RAL 9005
Category	CEILING RECESSED

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	530 Lm
Power	4,5 W
Colour temperature	4000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	21°
Lighting efficiency	30%
Efficacy	118 Lm/W
Current intensity	500 mA
Dimming	No Dim / DALI
Control through bluetooth	Please Consult
Driver	Excluded: Must be placed on remote
Electrical insulation class	III
Energy efficiency	A
LED lifespan	L80B10 (Tj=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Recess measurements	Ø38 mm.
Weight	240 g.
Packaged weight	280 g.
Packaging dimensions	129 x 79 x 64 mm
Units per package	1
Materials	Aluminium / Optical Glass




Alaska is the contemporary reinterpretation of the technology and design of the classical incandescent filament light bulb. Alaska is composed of a solid optical glass sphere that symbolically represents the glass bulb of a traditional light bulb. Its compact body is one single piece that is manually lathed and polished like a piece of jewellery. Each one of the luminaires is traditionally produced, thus acquiring the value of an unrepeatable decorative work.

POLAR DIAGRAM

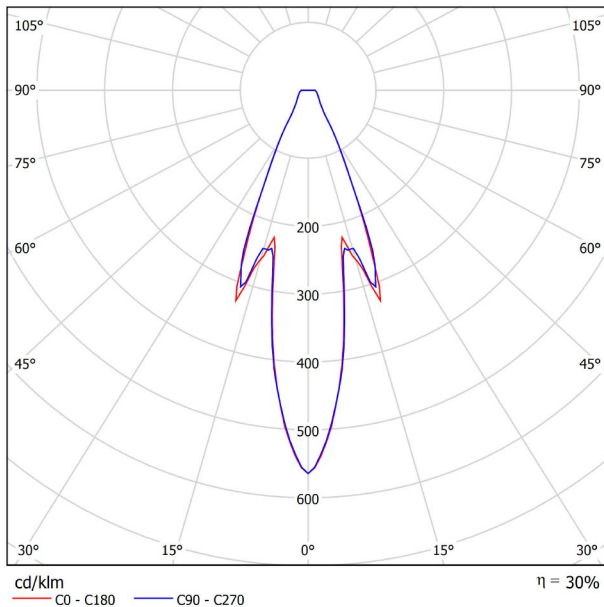


CONICAL DIAGRAM

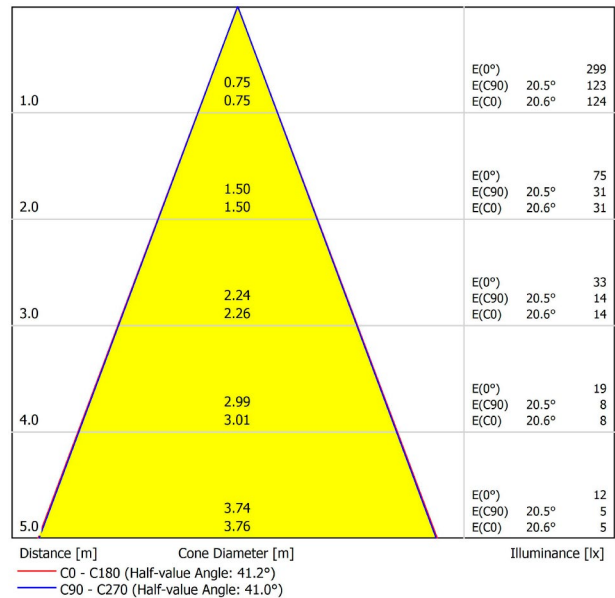

UGR

Glare Evaluation According to UGR												
ρ Ceiling		70	70	50	50	30	70	70	50	50	30	
ρ Walls		50	30	50	30	30	50	30	50	30	30	
ρ Floor		20	20	20	20	20	20	20	20	20	20	
Room Size X Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis					
2H	2H	16.6	17.6	16.9	17.8	18.0	16.6	17.6	16.9	17.8	18.0	
	3H	19.4	20.3	19.7	20.5	20.8	19.3	20.2	19.6	20.5	20.7	
	4H	20.9	21.7	21.2	22.0	22.3	20.8	21.7	21.1	21.9	22.2	
	6H	22.5	23.3	22.8	23.6	23.9	22.4	23.2	22.8	23.5	23.8	
	8H	23.4	24.1	23.7	24.4	24.8	23.3	24.1	23.7	24.4	24.7	
4H	12H	24.3	25.1	24.7	25.4	25.7	24.3	25.0	24.6	25.3	25.7	
	2H	17.5	18.3	17.8	18.6	18.9	17.5	18.3	17.8	18.6	18.9	
	3H	20.5	21.3	20.9	21.6	21.9	20.5	21.2	20.8	21.5	21.8	
	4H	22.2	22.9	22.6	23.2	23.6	22.2	22.8	22.5	23.2	23.5	
	6H	24.1	24.6	24.5	25.0	25.4	24.0	24.6	24.4	24.9	25.3	
8H	8H	25.0	25.6	25.5	25.9	26.4	25.0	25.5	25.4	25.9	26.3	
	12H	26.1	26.6	26.6	27.0	27.4	26.1	26.5	26.5	27.0	27.4	
	4H	22.9	23.5	23.4	23.9	24.3	22.9	23.4	23.3	23.8	24.2	
	6H	25.0	25.5	25.5	25.9	26.4	25.0	25.4	25.4	25.8	26.3	
	8H	26.2	26.6	26.7	27.0	27.5	26.2	26.5	26.6	27.0	27.5	
12H	12H	27.5	27.8	28.0	28.3	28.8	27.5	27.8	28.0	28.3	28.8	
	4H	23.1	23.6	23.6	24.0	24.4	23.1	23.6	23.5	24.0	24.4	
	6H	25.3	25.7	25.8	26.2	26.6	25.3	25.7	25.8	26.1	26.6	
	8H	26.6	26.9	27.1	27.4	27.9	26.6	26.9	27.1	27.4	27.9	
Variation of the observer position for the luminaire distances S												
S = 1.0H		+0.1 / -0.1					+0.1 / -0.1					
S = 1.5H		+0.3 / -0.3					+0.3 / -0.3					
S = 2.0H		+0.4 / -0.5					+0.4 / -0.5					
Standard table		BK12					BK12					
Correction Summand		8.3					8.3					
Corrected Glare Indices referring to 530lm Total Luminous Flux												



DRIVER OPTIONS*


		P	I	
	0434-00-42	4,5W	500mA	1 to 4 ALASKA
	0434-00-44	4,5W	500mA	1 to 4 ALASKA

220
240 V~

50/60 Hz



Driver must be placed on remote



PRODUCT	
Model	Alaska Trimless accessory
Reference	A4011000
Category	Accessories




INSTALLATION OPTIONS





DIMENSIONS



ACCESSORIES



DRIVER OPTIONS

TRIMLESS ACCESSORY
(MANDATORY)

PRODUCT

Name	ALASKA TRIMLESS 2700K N
Reference	A4010000N
Color	Matt black
RAL	Anodised, bath colour, looks alike RAL 9005
Category	CEILING RECESSED

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	475 Lm
Power	4,5 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	21°
Lighting efficiency	30%
Efficacy	106 Lm/W
Current intensity	500 mA
Dimming	No Dim / DALI
Control through bluetooth	Please Consult
Driver	Excluded: Must be placed on remote
Electrical insulation class	III
Energy efficiency	A
LED lifespan	L80B10 (Tj=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Recess measurements	Ø38 mm.
Weight	240 g.
Packaged weight	280 g.
Packaging dimensions	129 x 79 x 64 mm
Units per package	1
Materials	Aluminium / Optical Glass




Alaska is the contemporary reinterpretation of the technology and design of the classical incandescent filament light bulb. Alaska is composed of a solid optical glass sphere that symbolically represents the glass bulb of a traditional light bulb. Its compact body is one single piece that is manually lathed and polished like a piece of jewellery. Each one of the luminaires is traditionally produced, thus acquiring the value of an unrepeatable decorative work.

POLAR DIAGRAM

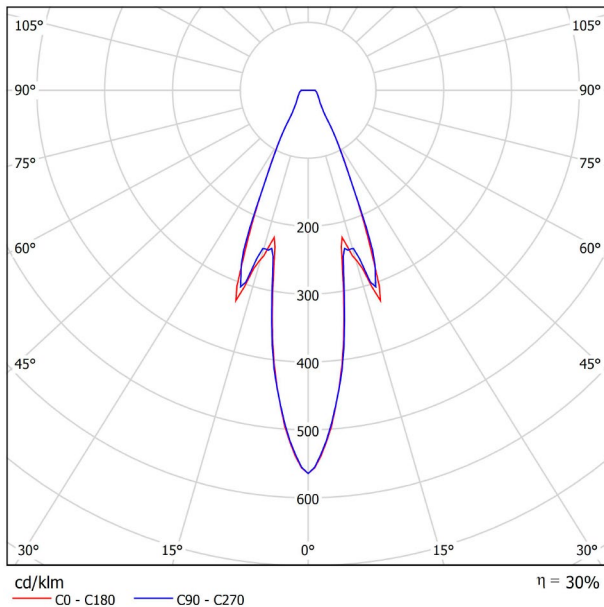


CONICAL DIAGRAM

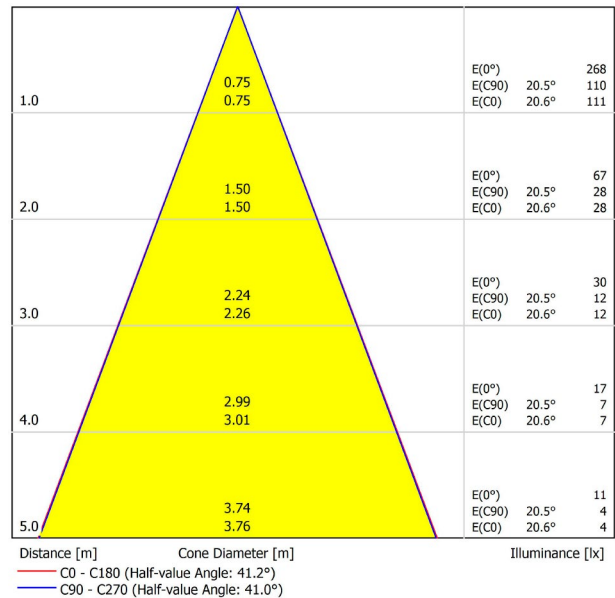

UGR

Glare Evaluation According to UGR												
p Ceiling		70	70	50	50	30	70	70	50	50	30	
p Walls		50	30	50	30	30	50	30	50	30	30	
p Floor		20	20	20	20	20	20	20	20	20	20	
Room Size X Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis					
2H	2H	16.3	17.2	16.5	17.4	17.7	16.2	17.2	16.5	17.4	17.6	
	3H	19.0	19.9	19.3	20.1	20.4	18.9	19.8	19.2	20.1	20.3	
	4H	20.5	21.3	20.8	21.6	21.9	20.4	21.3	20.7	21.5	21.8	
	6H	22.1	22.9	22.5	23.2	23.5	22.0	22.8	22.4	23.1	23.4	
	8H	23.0	23.8	23.3	24.1	24.4	22.9	23.7	23.3	24.0	24.3	
12H	24.0	24.7	24.3	25.0	25.3	23.9	24.6	24.3	25.0	25.3		
4H	2H	17.1	18.0	17.4	18.2	18.5	17.1	17.9	17.4	18.2	18.5	
	3H	20.1	20.9	20.5	21.2	21.5	20.1	20.8	20.5	21.1	21.5	
	4H	21.8	22.5	22.2	22.8	23.2	21.8	22.4	22.2	22.8	23.1	
	6H	23.7	24.2	24.1	24.6	25.0	23.6	24.2	24.0	24.6	24.9	
	8H	24.7	25.2	25.1	25.6	26.0	24.6	25.1	25.0	25.5	25.9	
12H	25.7	26.2	26.2	26.6	27.1	25.7	26.2	26.1	26.6	27.0		
8H	4H	22.6	23.1	23.0	23.5	23.9	22.5	23.0	22.9	23.4	23.8	
	6H	24.7	25.1	25.1	25.5	26.0	24.6	25.0	25.1	25.5	25.9	
	8H	25.8	26.2	26.3	26.7	27.1	25.8	26.2	26.3	26.6	27.1	
	12H	27.1	27.5	27.6	27.9	28.4	27.1	27.4	27.6	27.9	28.4	
12H	4H	22.7	23.2	23.2	23.6	24.1	22.7	23.2	23.1	23.6	24.0	
	6H	25.0	25.3	25.4	25.8	26.3	24.9	25.3	25.4	25.7	26.2	
	8H	26.2	26.6	26.7	27.0	27.5	26.2	26.5	26.7	27.0	27.5	
Variation of the observer position for the luminaire distances S												
S = 1.0H		+0.1 / -0.1					+0.1 / -0.1					
S = 1.5H		+0.3 / -0.3					+0.3 / -0.3					
S = 2.0H		+0.4 / -0.5					+0.4 / -0.5					
Standard table		BK12					BK12					
Correction Summand		8.3					8.3					
Corrected Glare Indices referring to 475lm Total Luminous Flux												



DRIVER OPTIONS*


		P	I	
	0434-00-42	4,5W	500mA	1 to 4 ALASKA
	0434-00-44	4,5W	500mA	1 to 4 ALASKA

220
240 V~

50/60 Hz



Driver must be placed on remote



PRODUCT	
Model	Alaska Trimless accessory
Reference	A4011000
Category	Accessories



INSTALLATION OPTIONS

