




DIMENSIONS



AWARDS

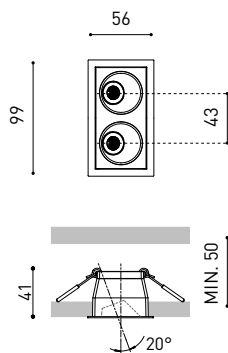

Name	BLACK FOSTER ASYM REC 2 2700K N
Reference	A3742010N
Color	Matt black
RAL	9005
Category	CEILING RECESSED

PRODUCT

Light source	LED
Gross luminous flux	380 Lm
Power	4,2 W
Power values of the system	4,2 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 3
Light beam angle	38°
Lighting efficiency	90%
Efficacy	90 Lm/W
Current intensity	700 mA
Control through bluetooth	Please Consult
Driver	Included - Connected
Emergency power supply	Please Consult
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


Ingress Protection	IP20
Recess measurements	50 × 93 mm.
Weight	178 g.
Packaged weight	248 g.
Packaging dimensions	158 × 98 × 50 mm
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene

OTHER DATA




Black Foster is the product that transfers the claimed effect "The Invisible Black" to a recessed-isolated lineal luminary; also available in trimless version. If we take a closer view to the recessed model, its bezel is so thin than when lighted up, it is unperceived; offering an aesthetic of "visual trimless". Black Foster stands out for its refinement, its visual comfort and for almost completely hide the source of light from the human eye range.

POLAR DIAGRAM

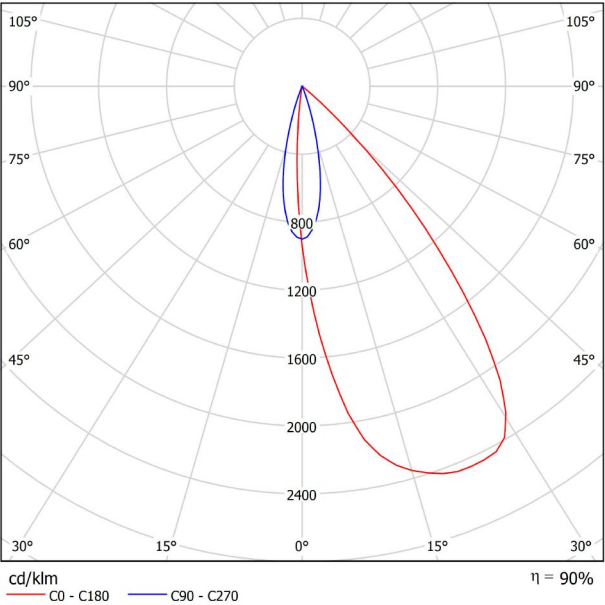


CONICAL DIAGRAM

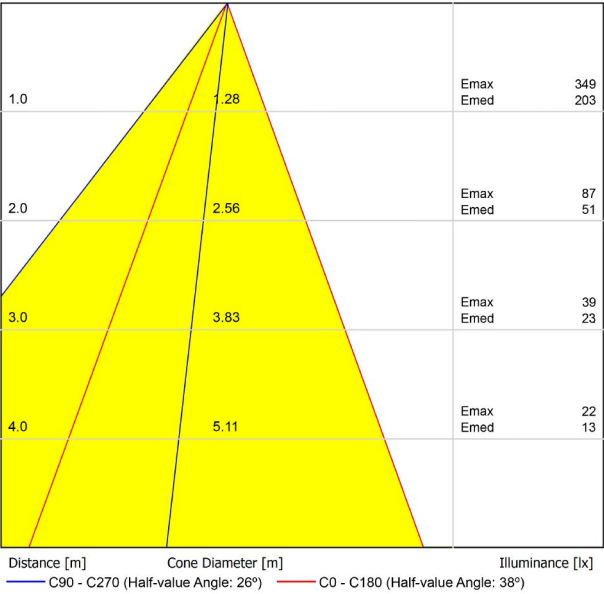



DIMENSIONS

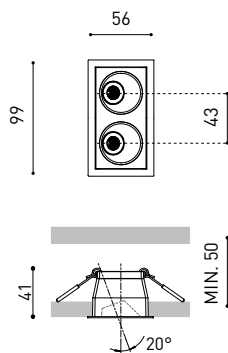

AWARDS



PRODUCT

Name	BLACK FOSTER ASYM REC 2 3000K N
Reference	A3742011N
Color	Matt black
RAL	9005
Category	CEILING RECESSED

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	420 Lm
Power	4,2 W
Power values of the system	4,2 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 3
Light beam angle	38°
Lighting efficiency	90%
Efficacy	100 Lm/W
Current intensity	700 mA
Control through bluetooth	Please Consult
Driver	Included - Connected
Emergency power supply	Please Consult
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Recess measurements	50 × 93 mm.
Weight	178 g.
Packaged weight	248 g.
Packaging dimensions	158 × 98 × 50 mm
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene




Black Foster is the product that transfers the claimed effect "The Invisible Black" to a recessed-isolated lineal luminary; also available in trimless version. If we take a closer view to the recessed model, its bezel is so thin than when lighted up, it is unperceived; offering an aesthetic of "visual trimless". Black Foster stands out for its refinement, its visual comfort and for almost completely hide the source of light from the human eye range.

POLAR DIAGRAM

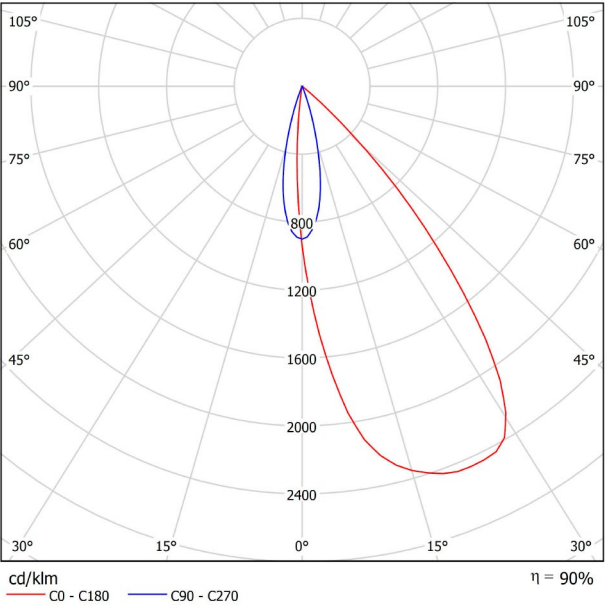


CONICAL DIAGRAM

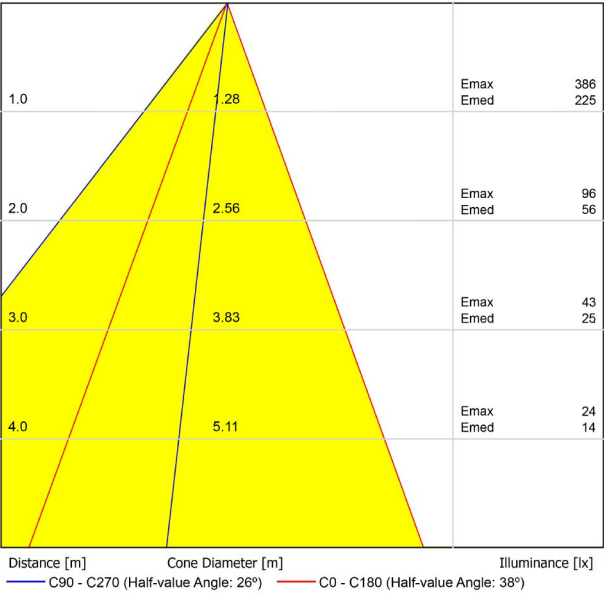



DIMENSIONS

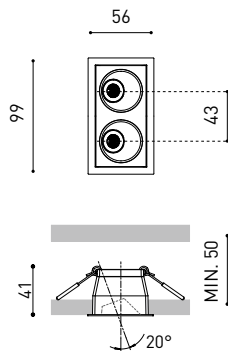

AWARDS



Name	BLACK FOSTER ASYM REC 2 4000K N
Reference	A3742012N
Color	Matt black
RAL	9005
Category	CEILING RECESSED

PRODUCT

Light source	LED
Gross luminous flux	500 Lm
Power	4,2 W
Power values of the system	4,2 W
Colour temperature	4000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 3
Light beam angle	38°
Lighting efficiency	90%
Efficacy	119 Lm/W
Current intensity	700 mA
Control through bluetooth	Please Consult
Driver	Included - Connected
Emergency power supply	Please Consult
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A++
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


Ingress Protection	IP20
Recess measurements	50 × 93 mm.
Weight	178 g.
Packaged weight	248 g.
Packaging dimensions	158 × 98 × 50 mm
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene

OTHER DATA




Black Foster is the product that transfers the claimed effect "The Invisible Black" to a recessed-isolated lineal luminary; also available in trimless version. If we take a closer view to the recessed model, its bezel is so thin than when lighted up, it is unperceived; offering an aesthetic of "visual trimless". Black Foster stands out for its refinement, its visual comfort and for almost completely hide the source of light from the human eye range.

POLAR DIAGRAM

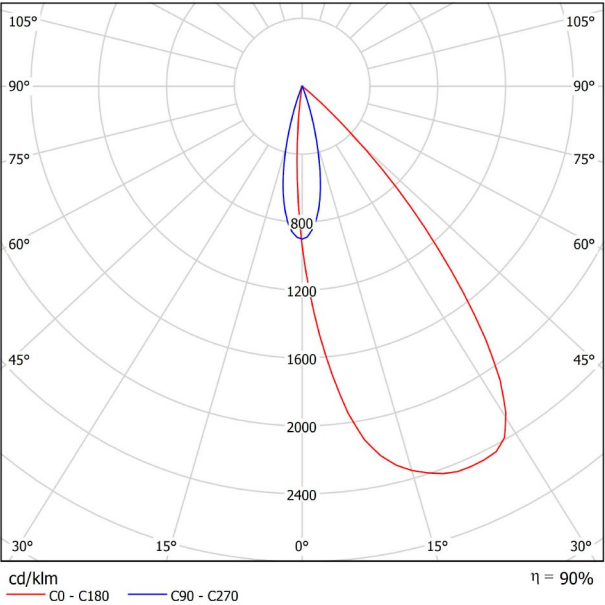


CONICAL DIAGRAM

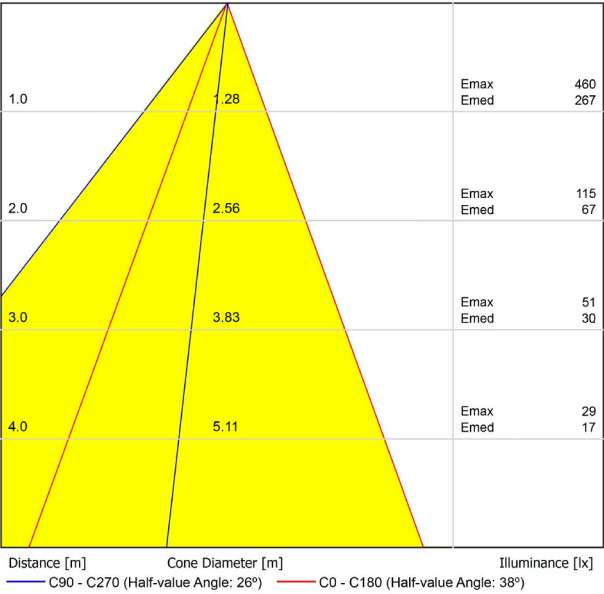



DIMENSIONS

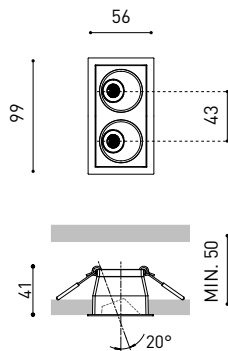

AWARDS



Name	BLACK FOSTER ASYM REC 2 DIM PUSH 2700K N
Reference	A3742020N
Color	Matt black
RAL	9005
Category	CEILING RECESSED

PRODUCT

Light source	LED
Gross luminous flux	380 Lm
Power	4,2 W
Power values of the system	4,2 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 3
Light beam angle	38°
Lighting efficiency	90%
Efficacy	90 Lm/W
Current intensity	700 mA
Dimming	Push
Control through bluetooth	Please Consult
Driver	Included - Connected
Emergency power supply	Please Consult
Electrical insulation class	
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Recess measurements	50 × 93 mm.
Weight	253 g.
Packaged weight	348 g.
Packaging dimensions	168 × 98 × 74 mm
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene




Black Foster is the product that transfers the claimed effect "The Invisible Black" to a recessed-isolated lineal luminary; also available in trimless version. If we take a closer view to the recessed model, its bezel is so thin than when lighted up, it is unperceived; offering an aesthetic of "visual trimless". Black Foster stands out for its refinement, its visual comfort and for almost completely hide the source of light from the human eye range.

POLAR DIAGRAM

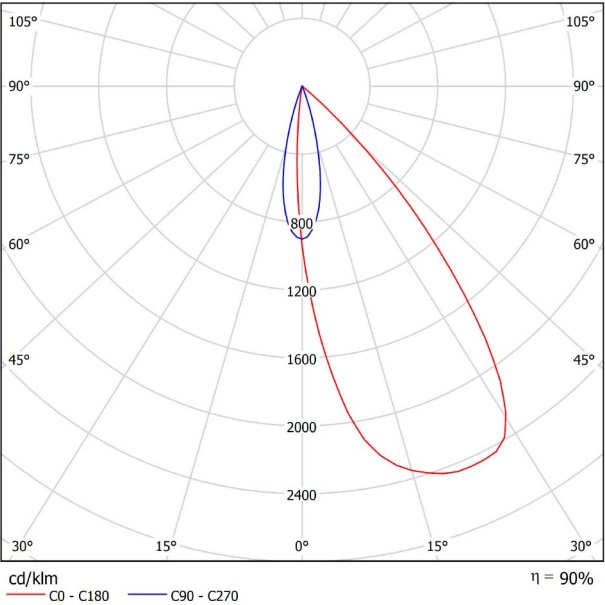


CONICAL DIAGRAM

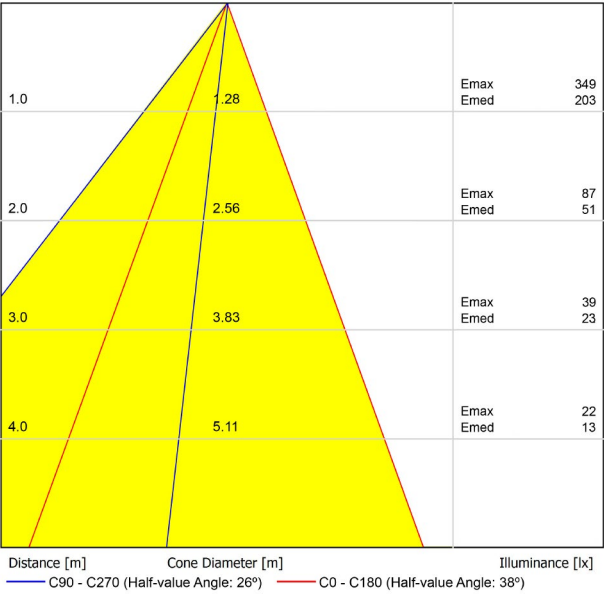



DIMENSIONS



AWARDS



Name	BLACK FOSTER ASYM REC 2 DIM PUSH 3000K N
Reference	A3742021N
Color	Matt black
RAL	9005
Category	CEILING RECESSED

PRODUCT

Light source	LED
Gross luminous flux	420 Lm
Power	4,2 W
Power values of the system	4,2 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 3
Light beam angle	38°
Lighting efficiency	90%
Efficacy	100 Lm/W
Current intensity	700 mA
Dimming	Push
Control through bluetooth	Please Consult
Driver	Included - Connected
Emergency power supply	Please Consult
Electrical insulation class	□
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


Ingress Protection	IP20
Recess measurements	50 × 93 mm.
Weight	253 g.
Packaged weight	348 g.
Packaging dimensions	168 × 98 × 74 mm
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene

OTHER DATA




Black Foster is the product that transfers the claimed effect "The Invisible Black" to a recessed-isolated lineal luminary; also available in trimless version. If we take a closer view to the recessed model, its bezel is so thin than when lighted up, it is unperceived; offering an aesthetic of "visual trimless". Black Foster stands out for its refinement, its visual comfort and for almost completely hide the source of light from the human eye range.

POLAR DIAGRAM

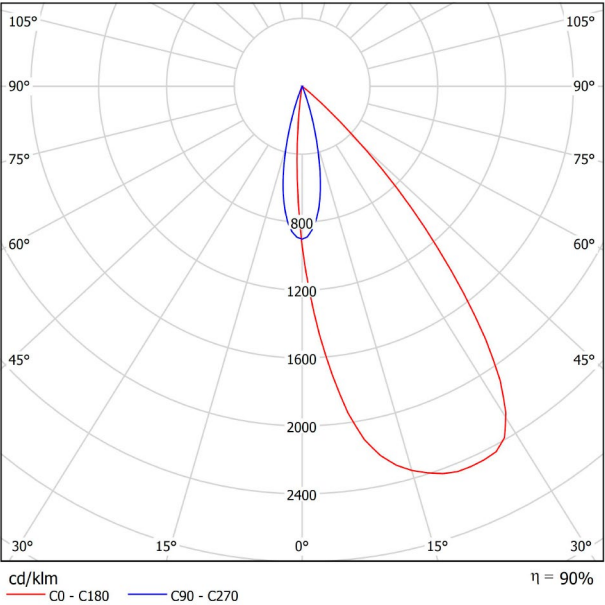


CONICAL DIAGRAM

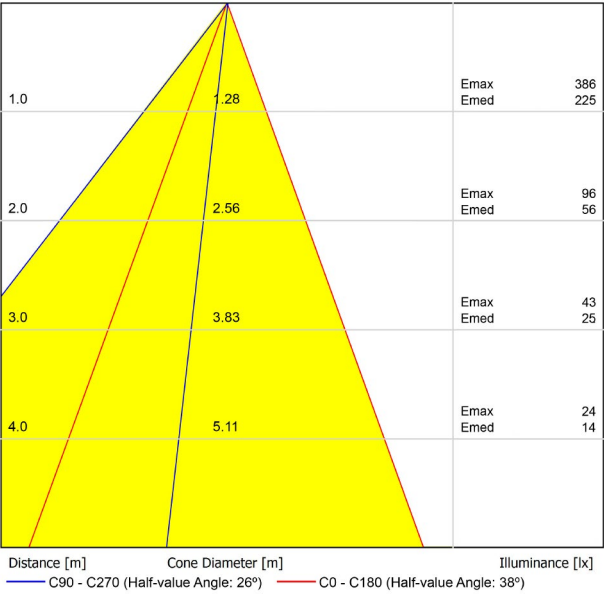



DIMENSIONS

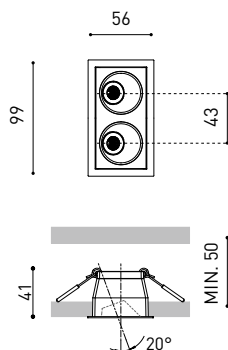

AWARDS



Name	BLACK FOSTER ASYM REC 2 DIM PUSH 4000K N
Reference	A3742022N
Color	Matt black
RAL	9005
Category	CEILING RECESSED

PRODUCT

Light source	LED
Gross luminous flux	500 Lm
Power	4,2 W
Power values of the system	4,2 W
Colour temperature	4000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 3
Light beam angle	38°
Lighting efficiency	90%
Efficacy	119 Lm/W
Current intensity	700 mA
Dimming	Push
Control through bluetooth	Please Consult
Driver	Included - Connected
Emergency power supply	Please Consult
Electrical insulation class	□
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A++
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


Ingress Protection	IP20
Recess measurements	50 × 93 mm.
Weight	253 g.
Packaged weight	348 g.
Packaging dimensions	168 × 98 × 74 mm
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene

OTHER DATA




Black Foster is the product that transfers the claimed effect "The Invisible Black" to a recessed-isolated lineal luminary; also available in trimless version. If we take a closer view to the recessed model, its bezel is so thin than when lighted up, it is unperceived; offering an aesthetic of "visual trimless". Black Foster stands out for its refinement, its visual comfort and for almost completely hide the source of light from the human eye range.

POLAR DIAGRAM

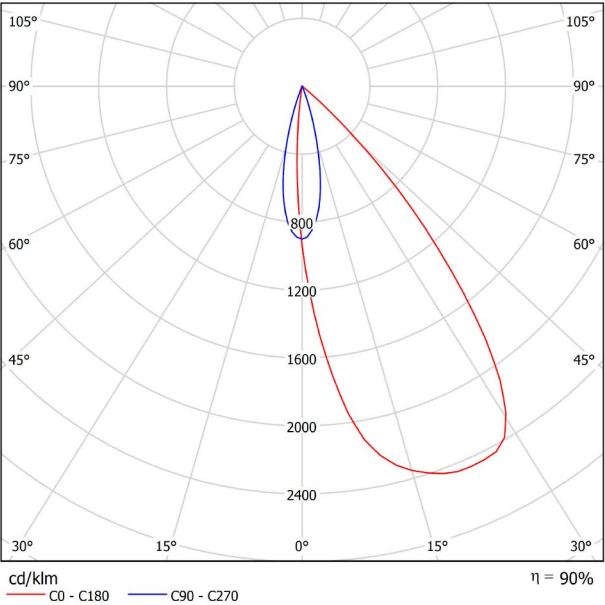


CONICAL DIAGRAM

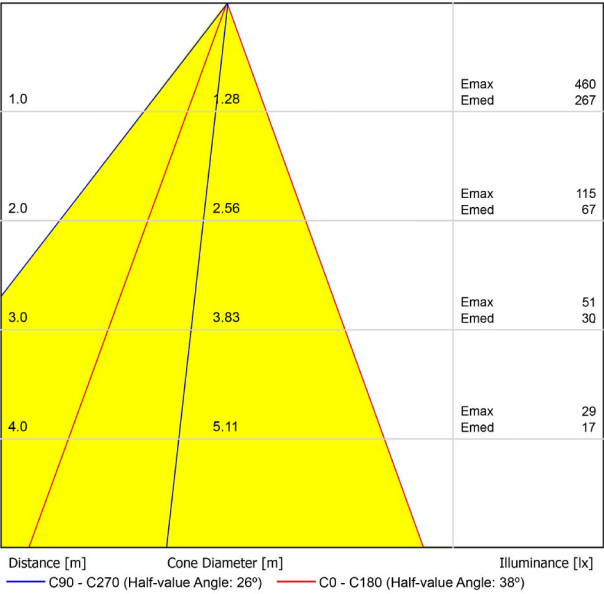



DIMENSIONS

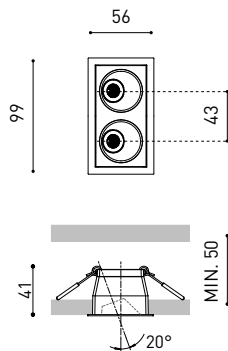

AWARDS



Name	BLACK FOSTER ASYM REC 2 DIM 1/10V 2700K N
Reference	A3742030N
Color	Matt black
RAL	9005
Category	CEILING RECESSED

PRODUCT

Light source	LED
Gross luminous flux	380 Lm
Power	4,2 W
Power values of the system	4,2 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 3
Light beam angle	38°
Lighting efficiency	90%
Efficacy	90 Lm/W
Current intensity	700 mA
Dimming	1-10V
Control through bluetooth	Please Consult
Driver	Included - Connected
Emergency power supply	Please Consult
Electrical insulation class	□
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


Ingress Protection	IP20
Recess measurements	50 × 93 mm.
Weight	253 g.
Packaged weight	348 g.
Packaging dimensions	168 × 98 × 74 mm
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene

OTHER DATA




Black Foster is the product that transfers the claimed effect "The Invisible Black" to a recessed-isolated lineal luminary; also available in trimless version. If we take a closer view to the recessed model, its bezel is so thin than when lighted up, it is unperceived; offering an aesthetic of "visual trimless". Black Foster stands out for its refinement, its visual comfort and for almost completely hide the source of light from the human eye range.

POLAR DIAGRAM

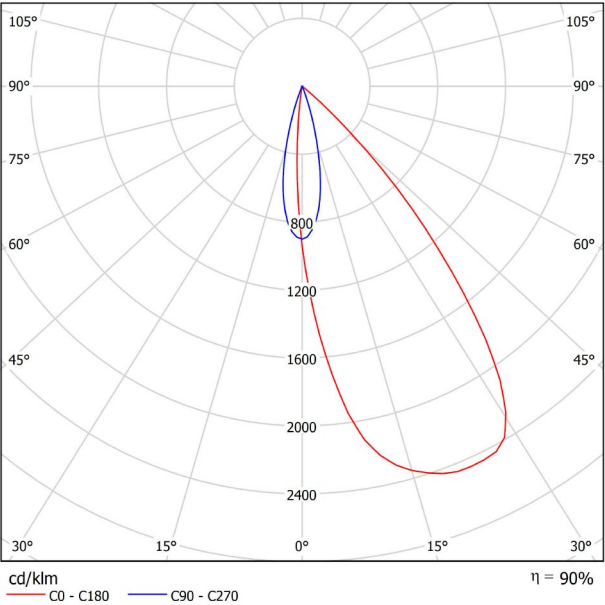


CONICAL DIAGRAM

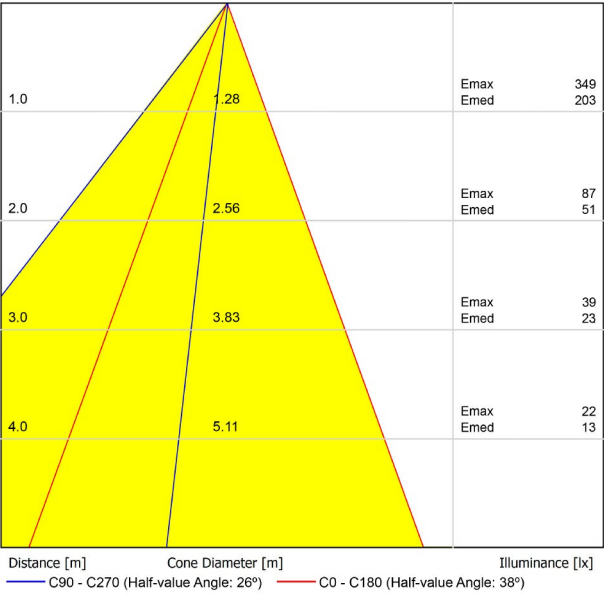



DIMENSIONS

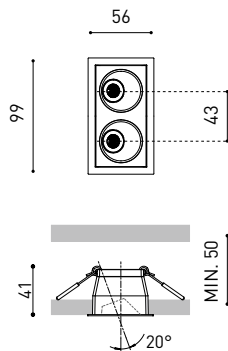

AWARDS



Name	BLACK FOSTER ASYM REC 2 DIM 1/10V 3000K N
Reference	A3742031N
Color	Matt black
RAL	9005
Category	CEILING RECESSED

PRODUCT

Light source	LED
Gross luminous flux	420 Lm
Power	4,2 W
Power values of the system	4,2 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 3
Light beam angle	38°
Lighting efficiency	90%
Efficacy	100 Lm/W
Current intensity	700 mA
Dimming	1-10V
Control through bluetooth	Please Consult
Driver	Included - Connected
Emergency power supply	Please Consult
Electrical insulation class	□
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


Ingress Protection	IP20
Recess measurements	50 × 93 mm.
Weight	253 g.
Packaged weight	348 g.
Packaging dimensions	168 × 98 × 74 mm
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene

OTHER DATA




Black Foster is the product that transfers the claimed effect "The Invisible Black" to a recessed-isolated lineal luminary; also available in trimless version. If we take a closer view to the recessed model, its bezel is so thin than when lighted up, it is unperceived; offering an aesthetic of "visual trimless". Black Foster stands out for its refinement, its visual comfort and for almost completely hide the source of light from the human eye range.

POLAR DIAGRAM

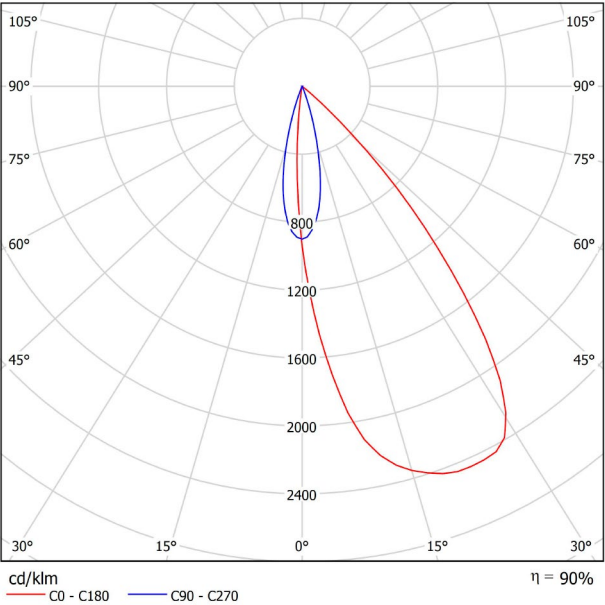


CONICAL DIAGRAM

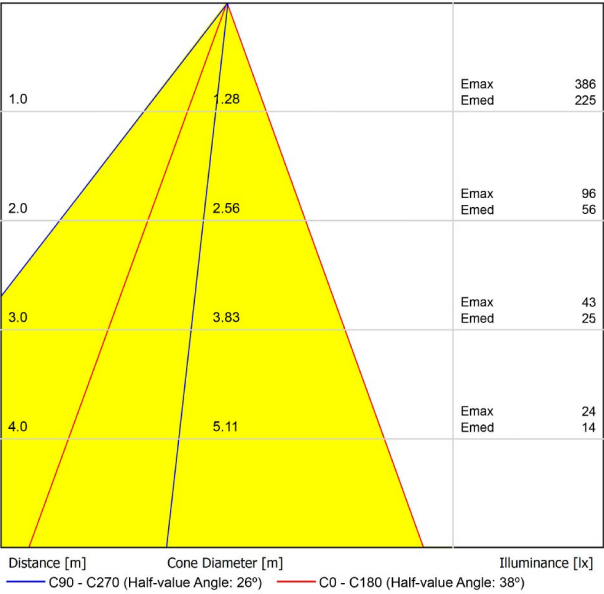



DIMENSIONS

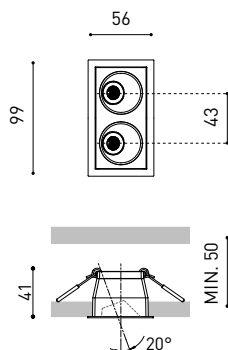

AWARDS



Name	BLACK FOSTER ASYM REC 2 DIM 1/10V 4000K N
Reference	A3742032N
Color	Matt black
RAL	9005
Category	CEILING RECESSED

PRODUCT

Light source	LED
Gross luminous flux	500 Lm
Power	4,2 W
Power values of the system	4,2 W
Colour temperature	4000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 3
Light beam angle	38°
Lighting efficiency	90%
Efficacy	119 Lm/W
Current intensity	700 mA
Dimming	1-10V
Control through bluetooth	Please Consult
Driver	Included - Connected
Emergency power supply	Please Consult
Electrical insulation class	□
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A++
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


Ingress Protection	IP20
Recess measurements	50 × 93 mm.
Weight	253 g.
Packaged weight	348 g.
Packaging dimensions	168 × 98 × 74 mm
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene

OTHER DATA




Black Foster is the product that transfers the claimed effect "The Invisible Black" to a recessed-isolated lineal luminary; also available in trimless version. If we take a closer view to the recessed model, its bezel is so thin than when lighted up, it is unperceived; offering an aesthetic of "visual trimless". Black Foster stands out for its refinement, its visual comfort and for almost completely hide the source of light from the human eye range.

POLAR DIAGRAM

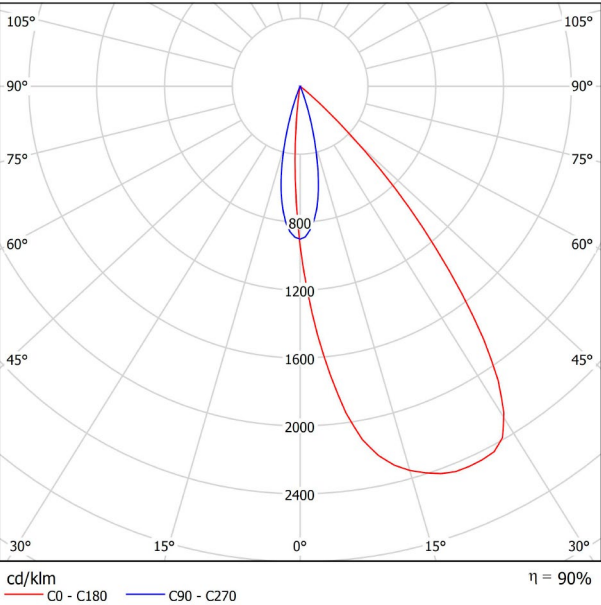


CONICAL DIAGRAM

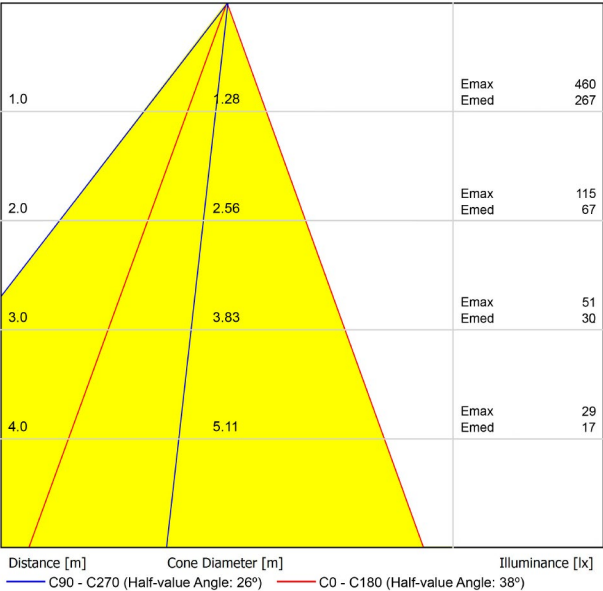



DIMENSIONS

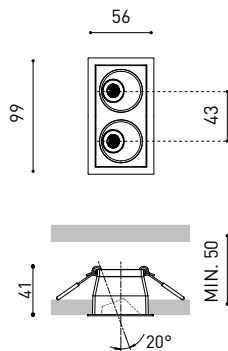

AWARDS



Name	BLACK FOSTER ASYM REC 2 DIM DALI 2700K N
Reference	A3742040N
Color	Matt black
RAL	9005
Category	CEILING RECESSED

PRODUCT

Light source	LED
Gross luminous flux	380 Lm
Power	4,2 W
Power values of the system	4,2 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 3
Light beam angle	38°
Lighting efficiency	90%
Efficacy	90 Lm/W
Current intensity	700 mA
Dimming	DALI
Control through bluetooth	Please Consult
Driver	Included - Connected
Emergency power supply	Please Consult
Electrical insulation class	□
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


Ingress Protection	IP20
Recess measurements	50 × 93 mm.
Weight	253 g.
Packaged weight	348 g.
Packaging dimensions	168 × 98 × 74 mm
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene

OTHER DATA




Black Foster is the product that transfers the claimed effect "The Invisible Black" to a recessed-isolated lineal luminary; also available in trimless version. If we take a closer view to the recessed model, its bezel is so thin than when lighted up, it is unperceived; offering an aesthetic of "visual trimless". Black Foster stands out for its refinement, its visual comfort and for almost completely hide the source of light from the human eye range.

POLAR DIAGRAM

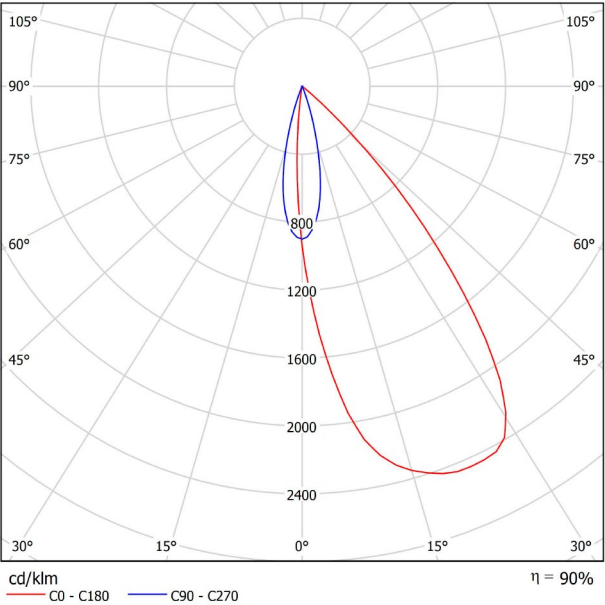


CONICAL DIAGRAM

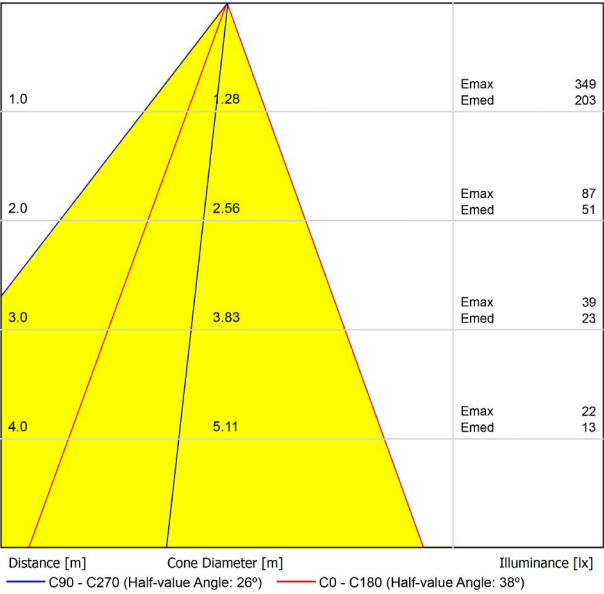



DIMENSIONS

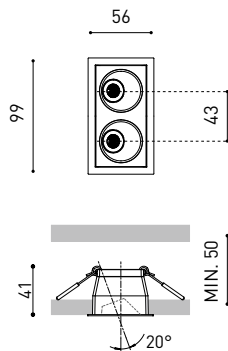

AWARDS



PRODUCT

Name	BLACK FOSTER ASYM REC 2 DIM DALI 3000K N
Reference	A3742041N
Color	Matt black
RAL	9005
Category	CEILING RECESSED

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	420 Lm
Power	4,2 W
Power values of the system	4,2 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 3
Light beam angle	38°
Lighting efficiency	90%
Efficacy	100 Lm/W
Current intensity	700 mA
Dimming	DALI
Control through bluetooth	Please Consult
Driver	Included - Connected
Emergency power supply	Please Consult
Electrical insulation class	□
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Recess measurements	50 × 93 mm.
Weight	253 g.
Packaged weight	348 g.
Packaging dimensions	168 × 98 × 74 mm
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene




Black Foster is the product that transfers the claimed effect "The Invisible Black" to a recessed-isolated lineal luminary; also available in trimless version. If we take a closer view to the recessed model, its bezel is so thin than when lighted up, it is unperceived; offering an aesthetic of "visual trimless". Black Foster stands out for its refinement, its visual comfort and for almost completely hide the source of light from the human eye range.

POLAR DIAGRAM

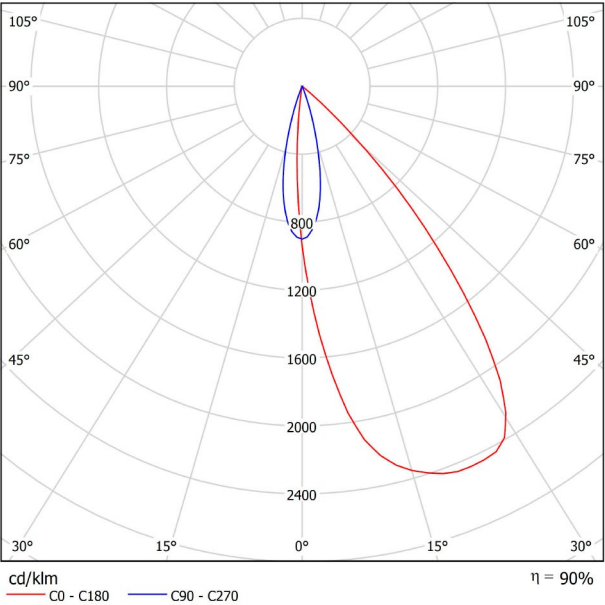


CONICAL DIAGRAM

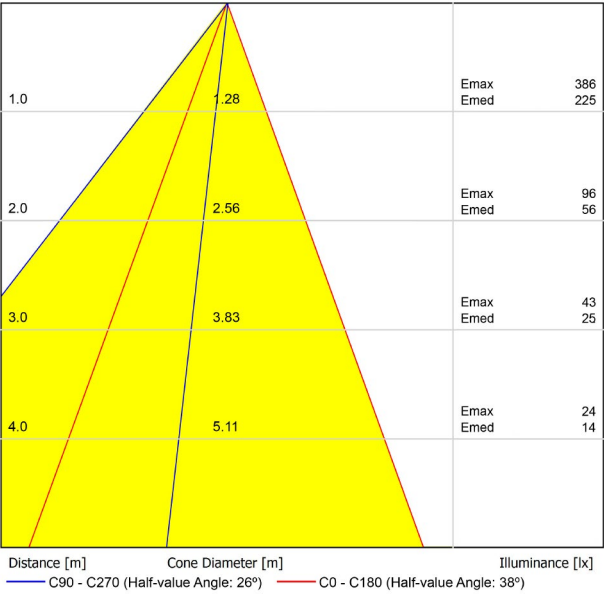



DIMENSIONS

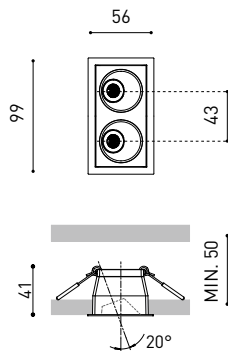

AWARDS



Name	BLACK FOSTER ASYM REC 2 DIM DALI 4000K N
Reference	A3742042N
Color	Matt black
RAL	9005
Category	CEILING RECESSED

PRODUCT

Light source	LED
Gross luminous flux	500 Lm
Power	4,2 W
Power values of the system	4,2 W
Colour temperature	4000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 3
Light beam angle	38°
Lighting efficiency	90%
Efficacy	119 Lm/W
Current intensity	700 mA
Dimming	DALI
Control through bluetooth	Please Consult
Driver	Included - Connected
Emergency power supply	Please Consult
Electrical insulation class	□
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A++
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


Ingress Protection	IP20
Recess measurements	50 × 93 mm.
Weight	253 g.
Packaged weight	348 g.
Packaging dimensions	168 × 98 × 74 mm
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene

OTHER DATA



Black Foster is the product that transfers the claimed effect "The Invisible Black" to a recessed-isolated lineal luminary; also available in trimless version. If we take a closer view to the recessed model, its bezel is so thin than when lighted up, it is unperceived; offering an aesthetic of "visual trimless". Black Foster stands out for its refinement, its visual comfort and for almost completely hide the source of light from the human eye range.

POLAR DIAGRAM

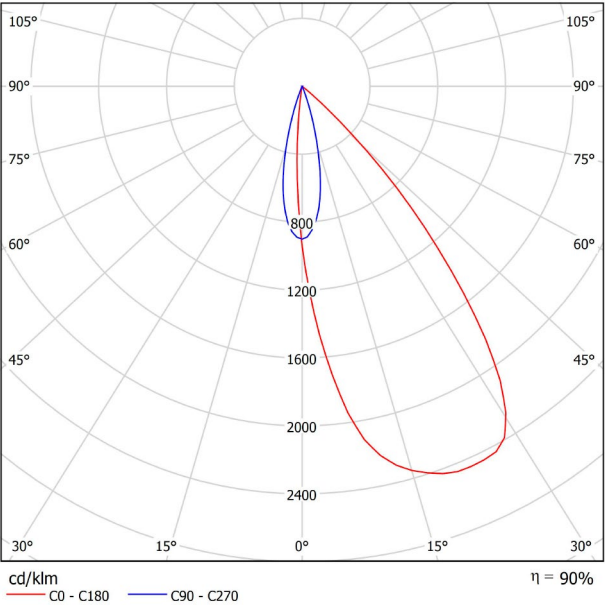

CONICAL DIAGRAM

