




DIMENSIONS



ACCESSORIES



CORD ACCESSORY

AWARDS



Name	SPIN 2M DIM TR.EDGE 24° 2700K MC
Reference	A2220200MC
Color	Metallized copper
RAL	Paint of metallic nanoparticles
Category	SUSPENSION

PRODUCT

Light source	LED
Gross luminous flux	600 Lm
Power	6,5 W
Power values of the system	8,67 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	24°
Lighting efficiency	86%
Efficacy	92 Lm/W
Current intensity	700 mA
Dimming	Phase Cut - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


OTHER DATA

Ingress Protection	IP20
Recess measurements	Ø50 mm.
Cord length	2 m
Fast adjustment tensioner	No
Weight	560 g.
Packaged weight	730,3 g.
Packaging dimensions	250 x 150 x 105 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Reduced dimensions, clear lines and a mechanized geometry combined in a pendant luminaire for accent lighting. Its ultra-thin cable gives Spin a sensation of aerial floatability. Can be fitted individually or configured in a group.

POLAR DIAGRAM

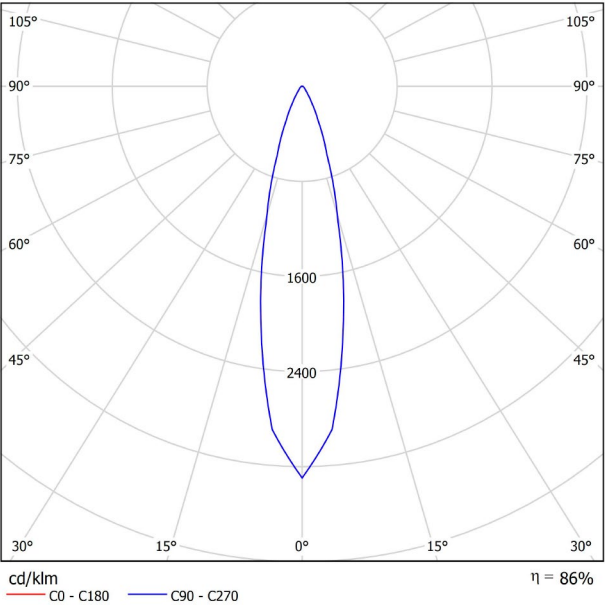



CONICAL DIAGRAM

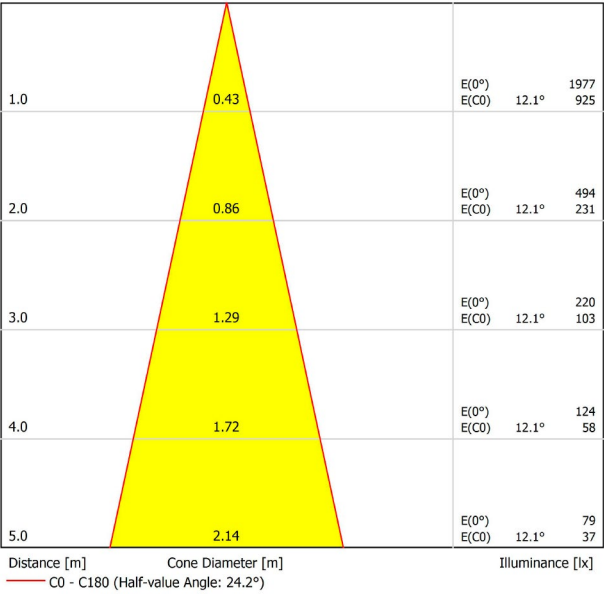




PRODUCT	
Model	Cord Accessory
Reference	02230000 WT NT
Colour	WT ☐ RAL 9016 NT ☒ RAL9005
Category	Accessories

DIMENSIONAL DRAWING

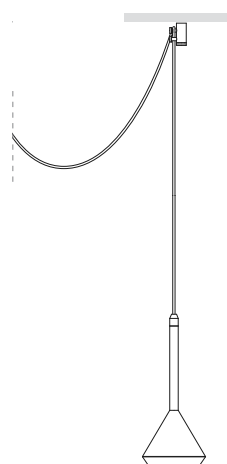



DIMENSIONS



ACCESSORIES



CORD ACCESSORY

AWARDS



PRODUCT

Name	SPIN 2M DIM TR.EDGE 24° 2700K MG
Reference	A2220200MG
Color	Metallized gold
RAL	Paint of metallic nanoparticles
Category	SUSPENSION

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	600 Lm
Power	6,5 W
Power values of the system	8,67 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	24°
Lighting efficiency	86%
Efficacy	92 Lm/W
Current intensity	700 mA
Dimming	Phase Cut - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Recess measurements	Ø50 mm.
Cord length	2 m
Fast adjustment tensioner	No
Weight	560 g.
Packaged weight	730,3 g.
Packaging dimensions	250 x 150 x 105 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Reduced dimensions, clear lines and a mechanized geometry combined in a pendant luminaire for accent lighting. Its ultra-thin cable gives Spin a sensation of aerial floatability. Can be fitted individually or configured in a group.

POLAR DIAGRAM

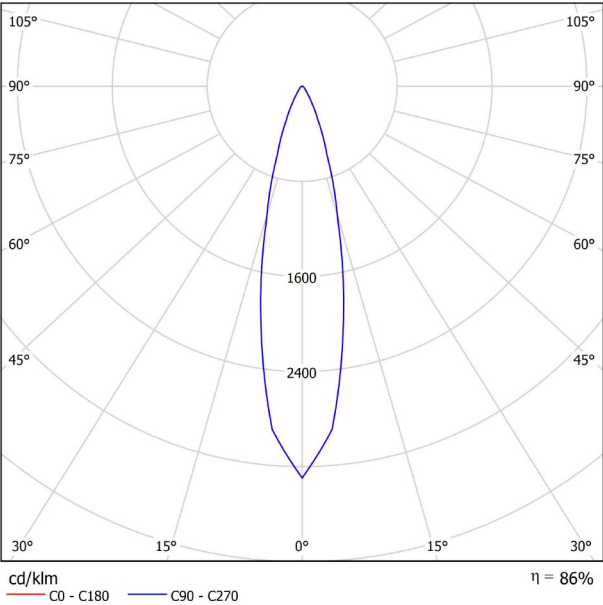



CONICAL DIAGRAM

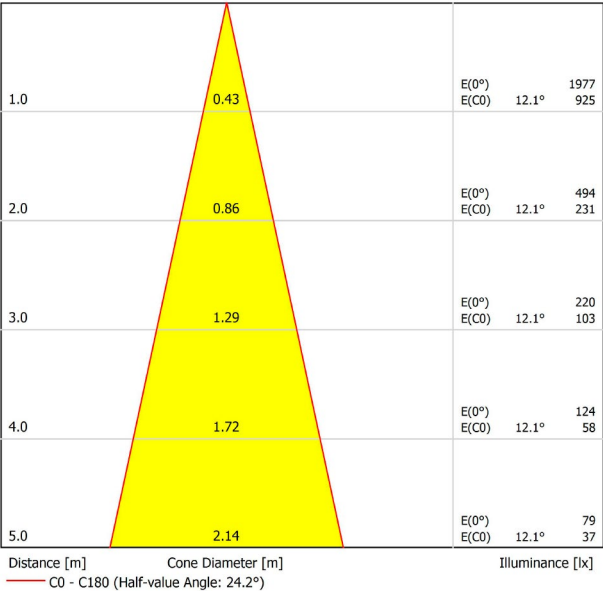




PRODUCT	
Model	Cord Accessory
Reference	02230000 WT NT
Colour	WT ☐ RAL 9016 NT ☒ RAL9005
Category	Accessories

DIMENSIONAL DRAWING

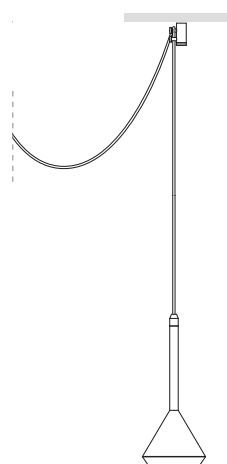



DIMENSIONS



ACCESSORIES



CORD ACCESSORY

AWARDS



PRODUCT

Name	SPIN 2M DIM TR.EDGE 24° 2700K NT
Reference	A2220200NT
Color	Textured black
RAL	9005
Category	SUSPENSION

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	600 Lm
Power	6,5 W
Power values of the system	8,67 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	24°
Lighting efficiency	86%
Efficacy	92 Lm/W
Current intensity	700 mA
Dimming	Phase Cut - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Recess measurements	Ø50 mm.
Cord length	2 m
Fast adjustment tensioner	No
Weight	560 g.
Packaged weight	730,3 g.
Packaging dimensions	250 x 150 x 105 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Reduced dimensions, clear lines and a mechanized geometry combined in a pendant luminaire for accent lighting. Its ultra-thin cable gives Spin a sensation of aerial floatability. Can be fitted individually or configured in a group.

POLAR DIAGRAM

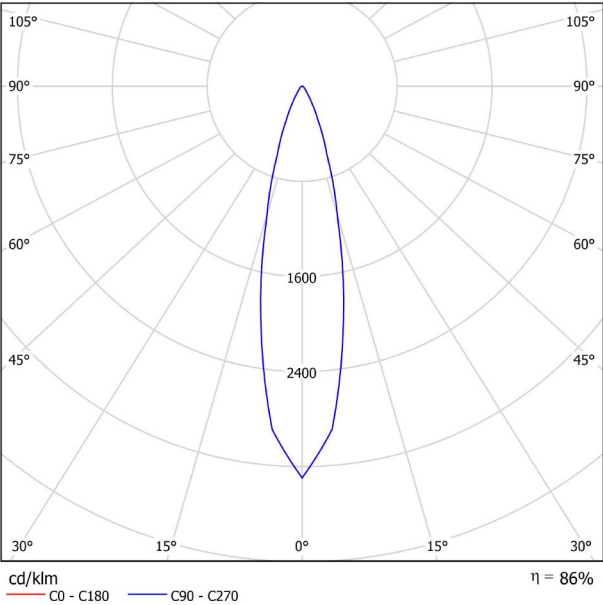



CONICAL DIAGRAM

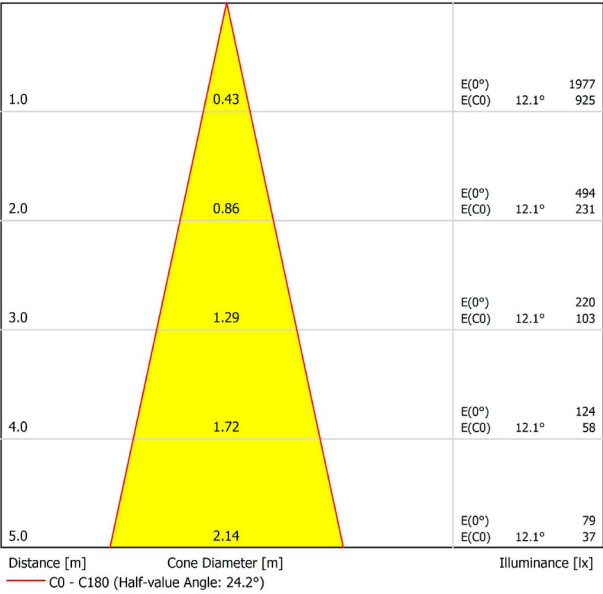




PRODUCT	
Model	Cord Accessory
Reference	02230000 WT NT
Colour	WT ☐ RAL 9016 NT ☒ RAL9005
Category	Accessories

DIMENSIONAL DRAWING

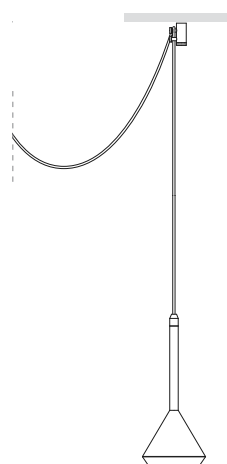



DIMENSIONS



ACCESSORIES



CORD ACCESSORY

AWARDS



PRODUCT

Name	SPIN 2M DIM TR.EDGE 24° 2700K WT
Reference	A2220200WT
Color	Textured white
RAL	9016
Category	SUSPENSION

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	600 Lm
Power	6,5 W
Power values of the system	8,67 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	24°
Lighting efficiency	86%
Efficacy	92 Lm/W
Current intensity	700 mA
Dimming	Phase Cut - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Recess measurements	Ø50 mm.
Cord length	2 m
Fast adjustment tensioner	No
Weight	560 g.
Packaged weight	730,3 g.
Packaging dimensions	250 x 150 x 105 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Reduced dimensions, clear lines and a mechanized geometry combined in a pendant luminaire for accent lighting. Its ultra-thin cable gives Spin a sensation of aerial floatability. Can be fitted individually or configured in a group.

POLAR DIAGRAM

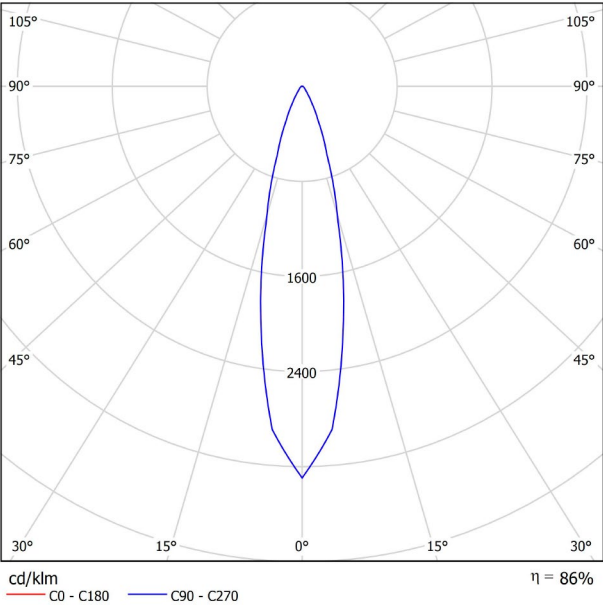



CONICAL DIAGRAM

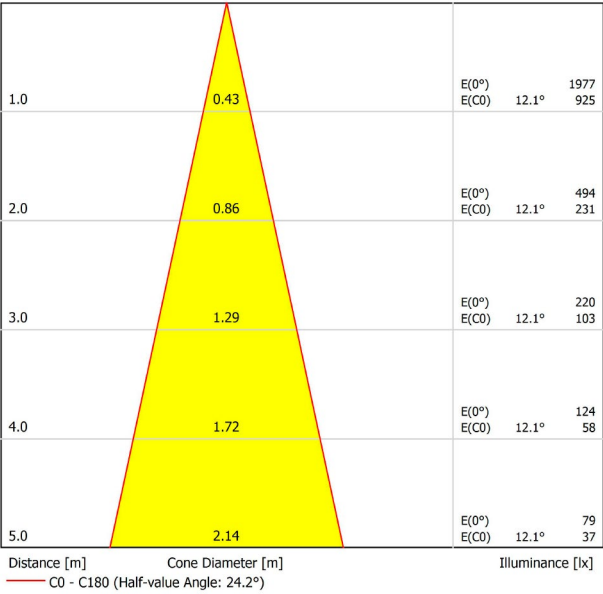




PRODUCT	
Model	Cord Accessory
Reference	02230000 WT NT
Colour	WT ☐ RAL 9016 NT ☒ RAL9005
Category	Accessories

DIMENSIONAL DRAWING

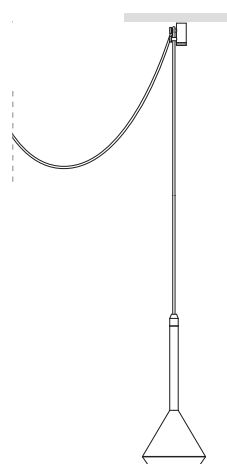



DIMENSIONS



ACCESSORIES



CORD ACCESSORY

AWARDS



Name	SPIN 2M DIM TR.EDGE 24° 3000K MC
Reference	A2220201MC
Color	Metallized copper
RAL	Paint of metallic nanoparticles
Category	SUSPENSION

PRODUCT

Light source	LED
Gross luminous flux	630 Lm
Power	6,5 W
Power values of the system	8,67 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	24°
Lighting efficiency	86%
Efficacy	97 Lm/W
Current intensity	700 mA
Dimming	Phase Cut - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


OTHER DATA

Ingress Protection	IP20
Recess measurements	Ø50 mm.
Cord length	2 m
Fast adjustment tensioner	No
Weight	560 g.
Packaged weight	730,3 g.
Packaging dimensions	250 x 150 x 105 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Reduced dimensions, clear lines and a mechanized geometry combined in a pendant luminaire for accent lighting. Its ultra-thin cable gives Spin a sensation of aerial floatability. Can be fitted individually or configured in a group.

POLAR DIAGRAM

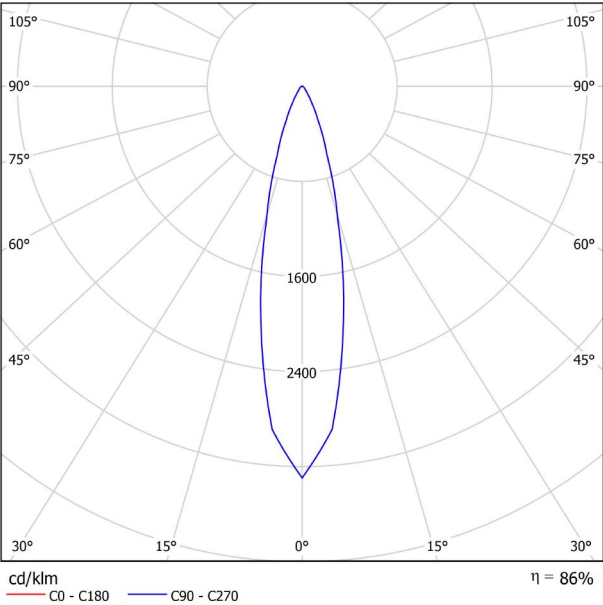



CONICAL DIAGRAM

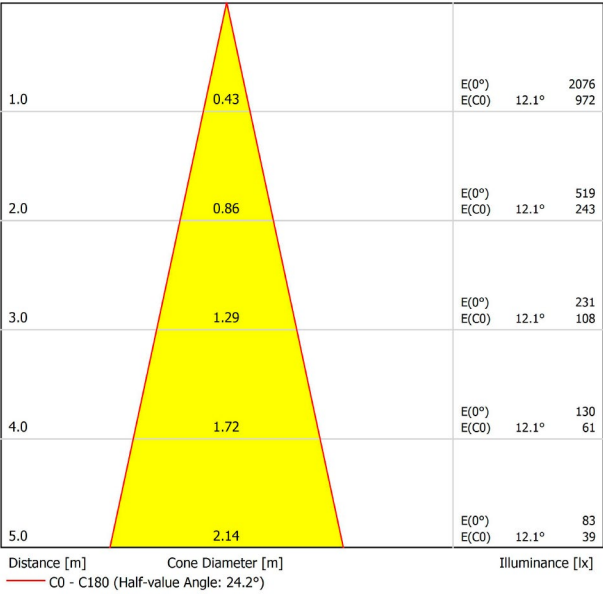




PRODUCT	
Model	Cord Accessory
Reference	02230000 WT NT
Colour	WT ☐ RAL 9016 NT ☒ RAL9005
Category	Accessories

DIMENSIONAL DRAWING

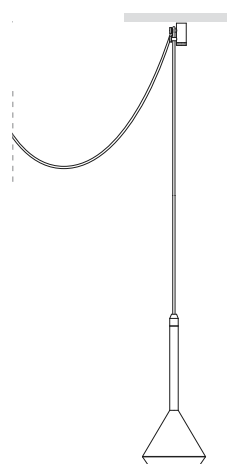



DIMENSIONS



ACCESSORIES



CORD ACCESSORY

AWARDS



Name	SPIN 2M DIM TR.EDGE 24° 3000K MG
Reference	A2220201MG
Color	Metallized gold
RAL	Paint of metallic nanoparticles
Category	SUSPENSION

PRODUCT

Light source	LED
Gross luminous flux	630 Lm
Power	6,5 W
Power values of the system	8,67 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	24°
Lighting efficiency	86%
Efficacy	97 Lm/W
Current intensity	700 mA
Dimming	Phase Cut - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


Ingress Protection	IP20
Recess measurements	Ø50 mm.
Cord length	2 m
Fast adjustment tensioner	No
Weight	560 g.
Packaged weight	730,3 g.
Packaging dimensions	250 x 150 x 105 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate

OTHER DATA




Reduced dimensions, clear lines and a mechanized geometry combined in a pendant luminaire for accent lighting. Its ultra-thin cable gives Spin a sensation of aerial floatability. Can be fitted individually or configured in a group.

POLAR DIAGRAM

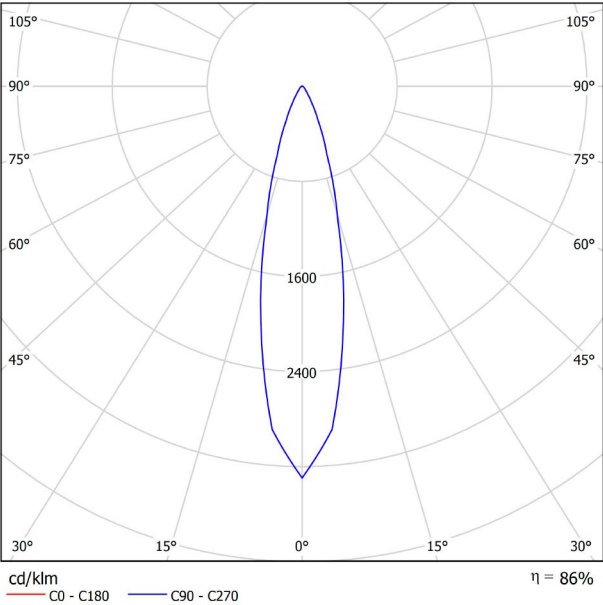



CONICAL DIAGRAM

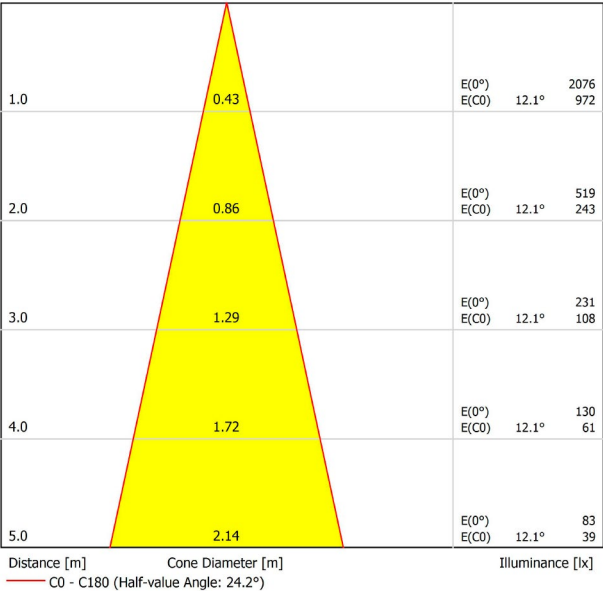




PRODUCT	
Model	Cord Accessory
Reference	02230000 WT NT
Colour	WT ☐ RAL 9016 NT ☒ RAL9005
Category	Accessories

DIMENSIONAL DRAWING

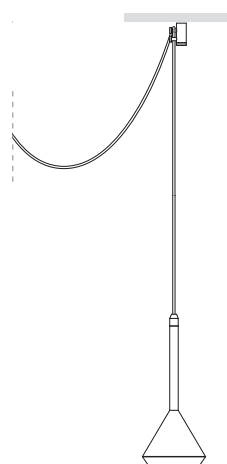



DIMENSIONS



ACCESSORIES



CORD ACCESSORY

AWARDS



PRODUCT

Name	SPIN 2M DIM TR.EDGE 24° 3000K NT
Reference	A2220201NT
Color	Textured black
RAL	9005
Category	SUSPENSION

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	630 Lm
Power	6,5 W
Power values of the system	8,67 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	24°
Lighting efficiency	86%
Efficacy	97 Lm/W
Current intensity	700 mA
Dimming	Phase Cut - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Recess measurements	Ø50 mm.
Cord length	2 m
Fast adjustment tensioner	No
Weight	560 g.
Packaged weight	730,3 g.
Packaging dimensions	250 x 150 x 105 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Reduced dimensions, clear lines and a mechanized geometry combined in a pendant luminaire for accent lighting. Its ultra-thin cable gives Spin a sensation of aerial floatability. Can be fitted individually or configured in a group.

POLAR DIAGRAM

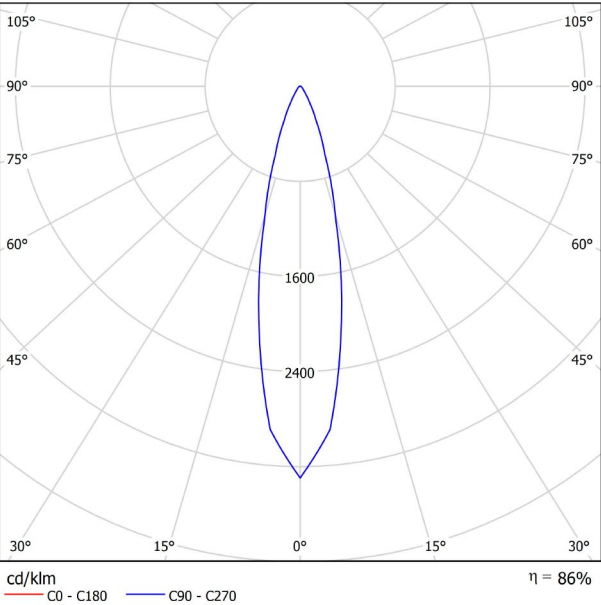



CONICAL DIAGRAM

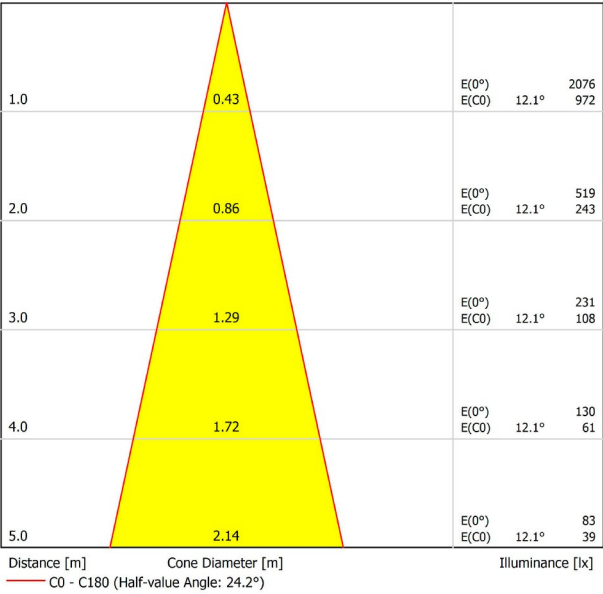




PRODUCT	
Model	Cord Accessory
Reference	02230000 WT NT
Colour	WT ☐ RAL 9016 NT ☒ RAL9005
Category	Accessories

DIMENSIONAL DRAWING

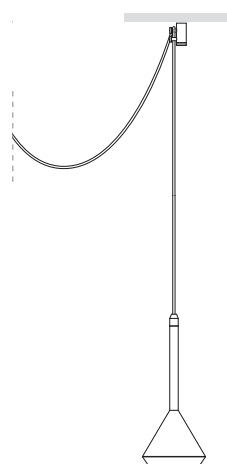



DIMENSIONS



ACCESSORIES



CORD ACCESSORY

AWARDS



PRODUCT

Name	SPIN 2M DIM TR.EDGE 24° 3000K WT
Reference	A2220201WT
Color	Textured white
RAL	9016
Category	SUSPENSION

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	630 Lm
Power	6,5 W
Power values of the system	8,67 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	24°
Lighting efficiency	86%
Efficacy	97 Lm/W
Current intensity	700 mA
Dimming	Phase Cut - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Recess measurements	Ø50 mm.
Cord length	2 m
Fast adjustment tensioner	No
Weight	560 g.
Packaged weight	730,3 g.
Packaging dimensions	250 x 150 x 105 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Reduced dimensions, clear lines and a mechanized geometry combined in a pendant luminaire for accent lighting. Its ultra-thin cable gives Spin a sensation of aerial floatability. Can be fitted individually or configured in a group.

POLAR DIAGRAM

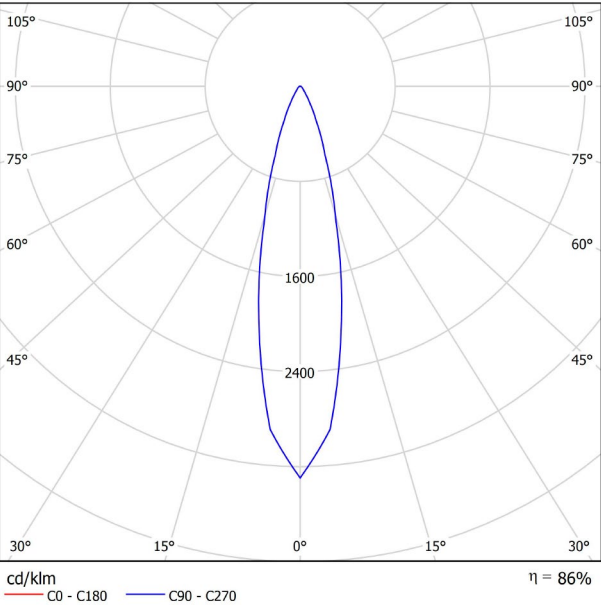



CONICAL DIAGRAM

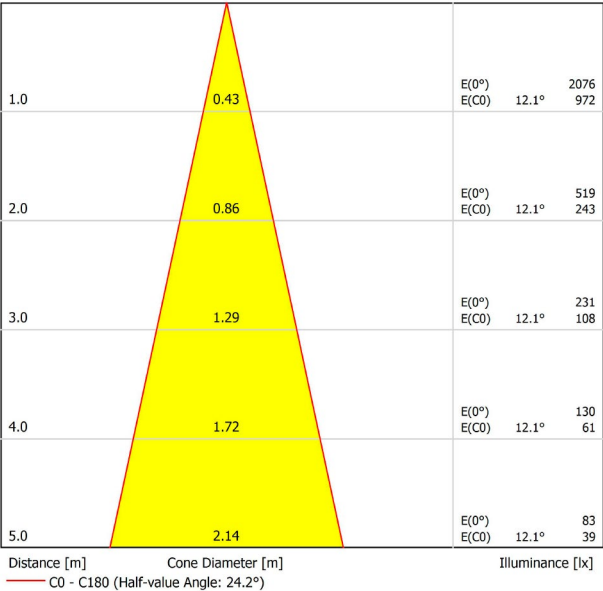




PRODUCT	
Model	Cord Accessory
Reference	02230000 WT NT
Colour	WT ☐ RAL 9016 NT ☒ RAL9005
Category	Accessories

DIMENSIONAL DRAWING

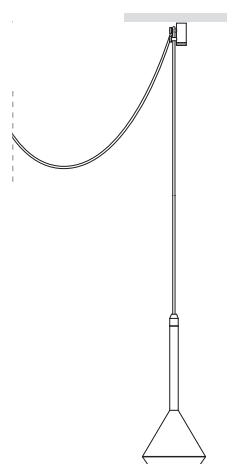



DIMENSIONS



ACCESSORIES



CORD ACCESSORY

AWARDS



Name	SPIN 2M DIM TR.EDGE 24° 4000K MC
Reference	A2220202MC
Color	Metallized copper
RAL	Paint of metallic nanoparticles
Category	SUSPENSION

PRODUCT

Light source	LED
Gross luminous flux	680 Lm
Power	6,5 W
Power values of the system	8,67 W
Colour temperature	4000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	24°
Lighting efficiency	86%
Efficacy	105 Lm/W
Current intensity	700 mA
Dimming	Phase Cut - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


OTHER DATA

Ingress Protection	IP20
Recess measurements	Ø50 mm.
Cord length	2 m
Fast adjustment tensioner	No
Weight	560 g.
Packaged weight	730,3 g.
Packaging dimensions	250 x 150 x 105 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Reduced dimensions, clear lines and a mechanized geometry combined in a pendant luminaire for accent lighting. Its ultra-thin cable gives Spin a sensation of aerial floatability. Can be fitted individually or configured in a group.

POLAR DIAGRAM

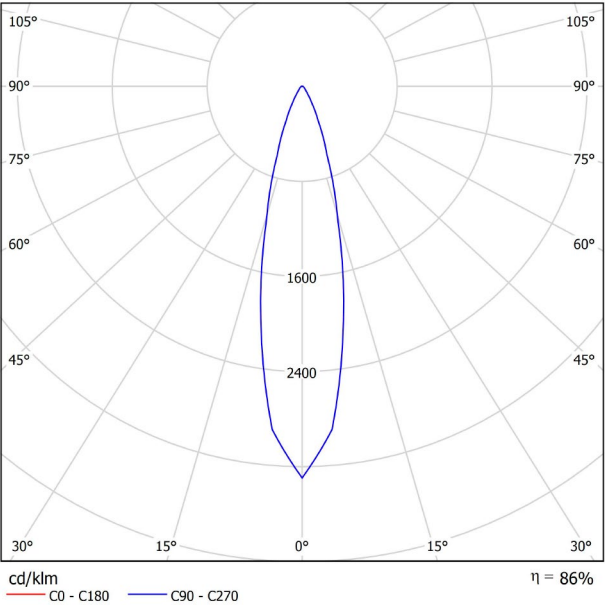



CONICAL DIAGRAM

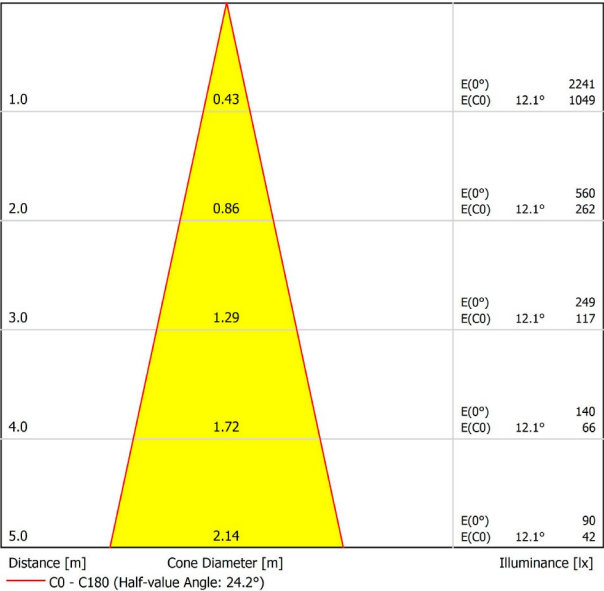




PRODUCT	
Model	Cord Accessory
Reference	02230000 WT NT
Colour	WT ☐ RAL 9016 NT ☒ RAL9005
Category	Accessories

DIMENSIONAL DRAWING

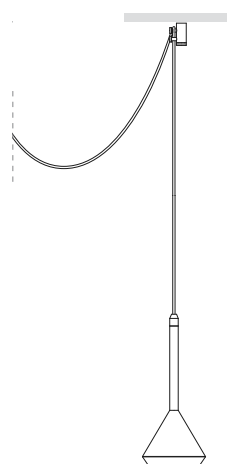



DIMENSIONS



ACCESSORIES



CORD ACCESSORY

AWARDS



PRODUCT

Name	SPIN 2M DIM TR.EDGE 24° 4000K MG
Reference	A2220202MG
Color	Metallized gold
RAL	Paint of metallic nanoparticles
Category	SUSPENSION

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	680 Lm
Power	6,5 W
Power values of the system	8,67 W
Colour temperature	4000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	24°
Lighting efficiency	86%
Efficacy	105 Lm/W
Current intensity	700 mA
Dimming	Phase Cut - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Recess measurements	Ø50 mm.
Cord length	2 m
Fast adjustment tensioner	No
Weight	560 g.
Packaged weight	730,3 g.
Packaging dimensions	250 x 150 x 105 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Reduced dimensions, clear lines and a mechanized geometry combined in a pendant luminaire for accent lighting. Its ultra-thin cable gives Spin a sensation of aerial floatability. Can be fitted individually or configured in a group.

POLAR DIAGRAM

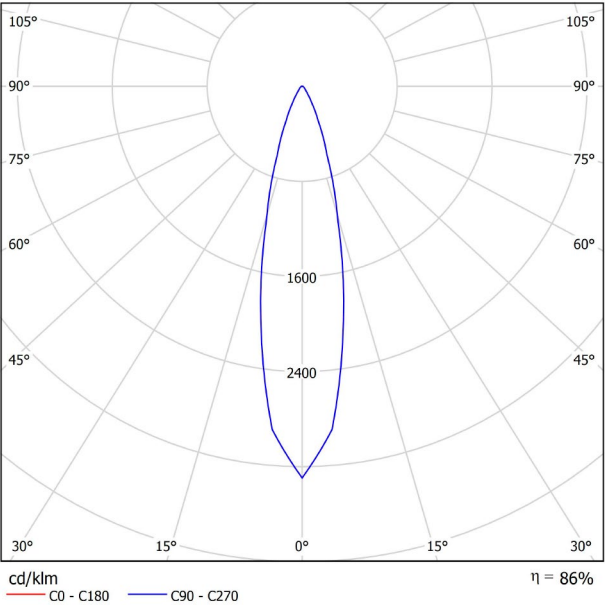



CONICAL DIAGRAM

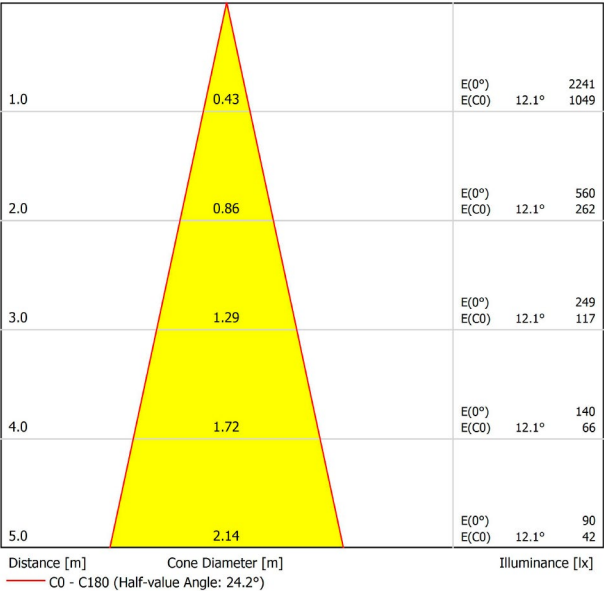




PRODUCT	
Model	Cord Accessory
Reference	02230000 WT NT
Colour	WT ☐ RAL 9016 NT ☒ RAL9005
Category	Accessories

DIMENSIONAL DRAWING

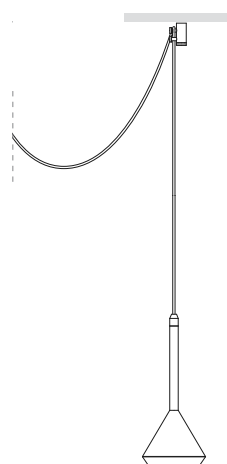



DIMENSIONS



ACCESSORIES



CORD ACCESSORY

AWARDS



Name	SPIN 2M DIM TR.EDGE 24° 4000K NT
Reference	A2220202NT
Color	Textured black
RAL	9005
Category	SUSPENSION

PRODUCT

Light source	LED
Gross luminous flux	680 Lm
Power	6,5 W
Power values of the system	8,67 W
Colour temperature	4000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	24°
Lighting efficiency	86%
Efficacy	105 Lm/W
Current intensity	700 mA
Dimming	Phase Cut - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


OTHER DATA

Ingress Protection	IP20
Recess measurements	Ø50 mm.
Cord length	2 m
Fast adjustment tensioner	No
Weight	560 g.
Packaged weight	730,3 g.
Packaging dimensions	250 x 150 x 105 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Reduced dimensions, clear lines and a mechanized geometry combined in a pendant luminaire for accent lighting. Its ultra-thin cable gives Spin a sensation of aerial floatability. Can be fitted individually or configured in a group.

POLAR DIAGRAM

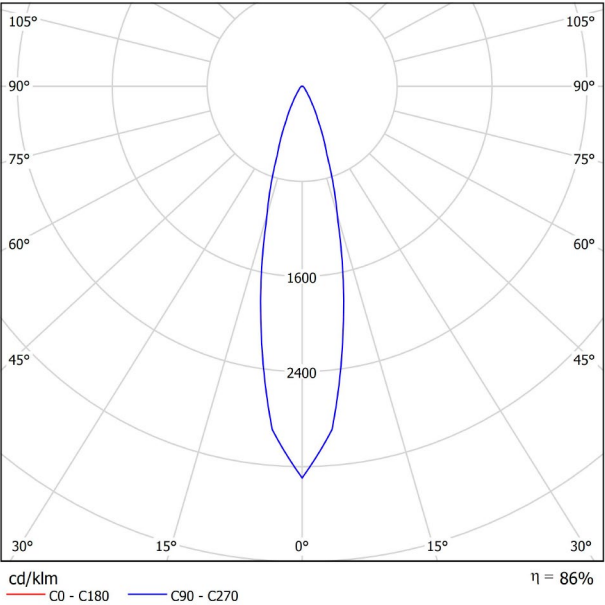



CONICAL DIAGRAM

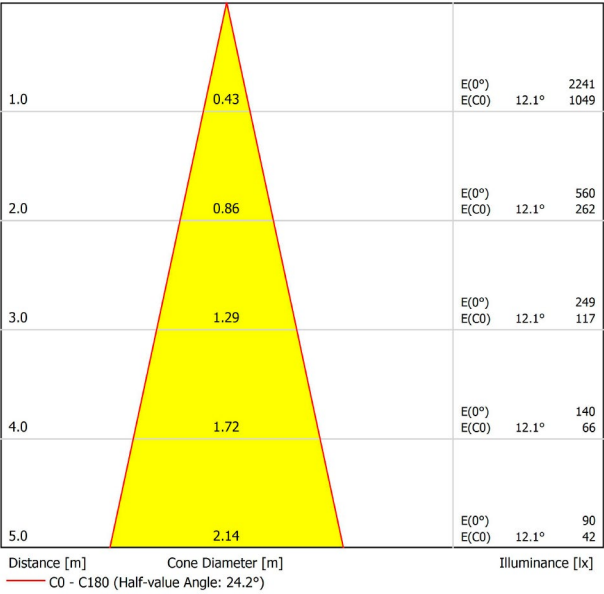




PRODUCT	
Model	Cord Accessory
Reference	02230000 WT NT
Colour	WT ☐ RAL 9016 NT ☒ RAL9005
Category	Accessories

DIMENSIONAL DRAWING

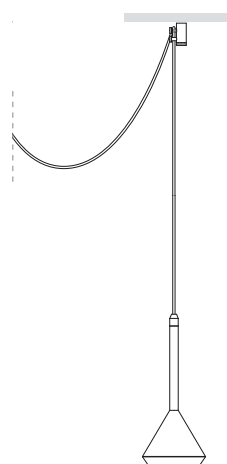



DIMENSIONS



ACCESSORIES



CORD ACCESSORY

AWARDS



PRODUCT

Name	SPIN 2M DIM TR.EDGE 24° 4000K WT
Reference	A2220202WT
Color	Textured white
RAL	9016
Category	SUSPENSION

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	680 Lm
Power	6,5 W
Power values of the system	8,67 W
Colour temperature	4000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	24°
Lighting efficiency	86%
Efficacy	105 Lm/W
Current intensity	700 mA
Dimming	Phase Cut - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Recess measurements	Ø50 mm.
Cord length	2 m
Fast adjustment tensioner	No
Weight	560 g.
Packaged weight	730,3 g.
Packaging dimensions	250 x 150 x 105 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Reduced dimensions, clear lines and a mechanized geometry combined in a pendant luminaire for accent lighting. Its ultra-thin cable gives Spin a sensation of aerial floatability. Can be fitted individually or configured in a group.

POLAR DIAGRAM

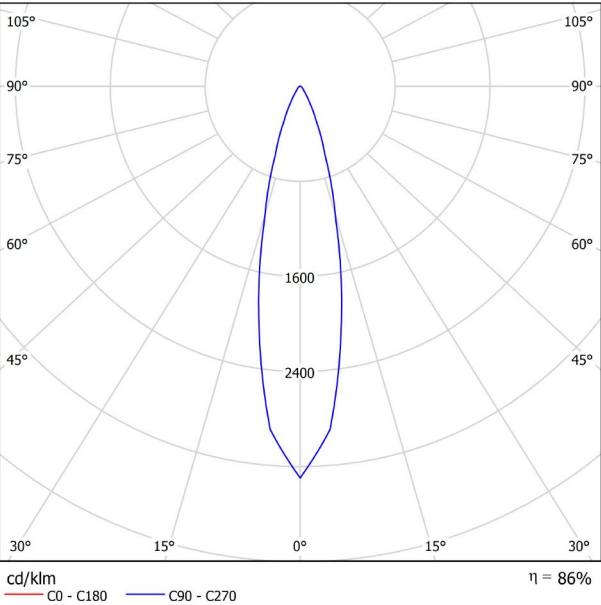



CONICAL DIAGRAM

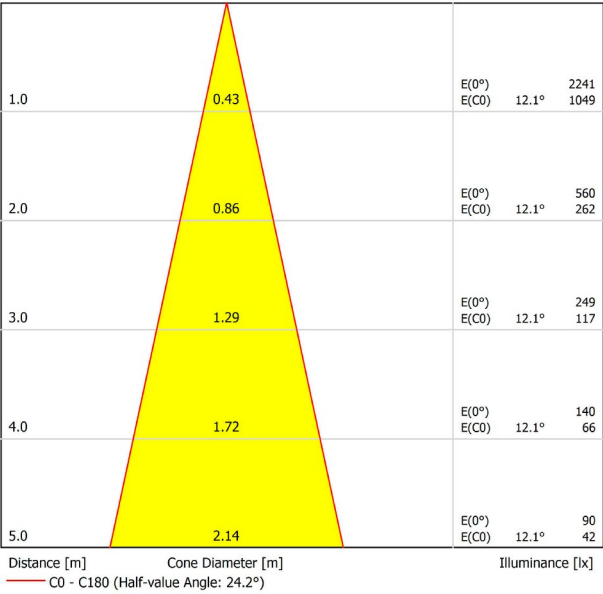




PRODUCT	
Model	Cord Accessory
Reference	02230000 WT NT
Colour	WT ☐ RAL 9016 NT ☒ RAL9005
Category	Accessories

DIMENSIONAL DRAWING

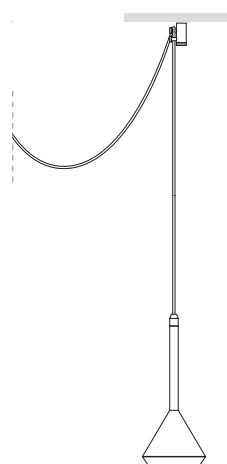



DIMENSIONS



ACCESSORIES



CORD ACCESSORY

AWARDS



Name	SPIN 2M DIM TR.EDGE 40° 2700K MC
Reference	A2220210MC
Color	Metallized copper
RAL	Paint of metallic nanoparticles
Category	SUSPENSION

PRODUCT

Light source	LED
Gross luminous flux	600 Lm
Power	6,5 W
Power values of the system	8,67 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	40°
Lighting efficiency	84%
Efficacy	92 Lm/W
Current intensity	700 mA
Dimming	Phase Cut - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


OTHER DATA

Ingress Protection	IP20
Recess measurements	Ø50 mm.
Cord length	2 m
Fast adjustment tensioner	No
Weight	560 g.
Packaged weight	730,3 g.
Packaging dimensions	250 x 150 x 105 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Reduced dimensions, clear lines and a mechanized geometry combined in a pendant luminaire for accent lighting. Its ultra-thin cable gives Spin a sensation of aerial floatability. Can be fitted individually or configured in a group.

POLAR DIAGRAM

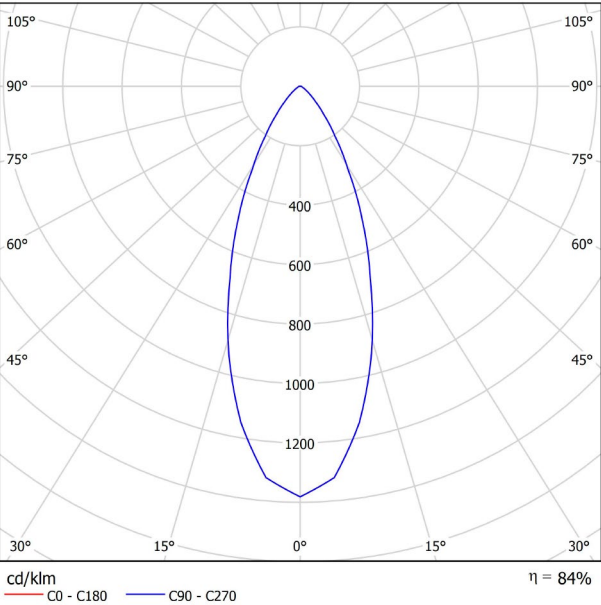



CONICAL DIAGRAM

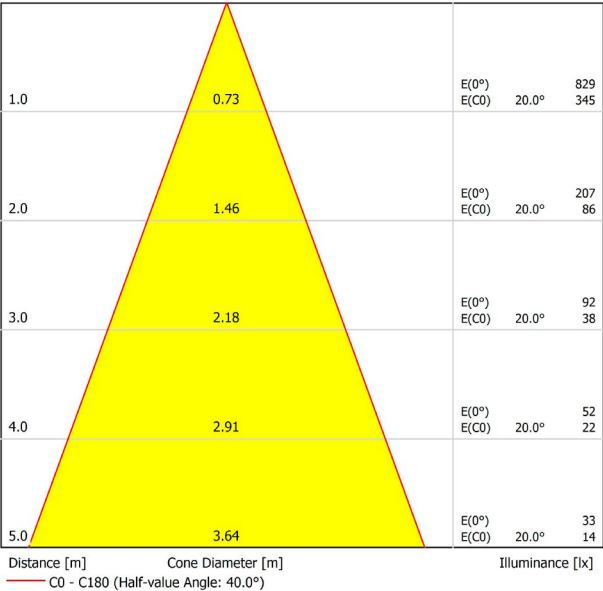




PRODUCT	
Model	Cord Accessory
Reference	02230000 WT NT
Colour	WT ☐ RAL 9016 NT ☒ RAL9005
Category	Accessories

DIMENSIONAL DRAWING

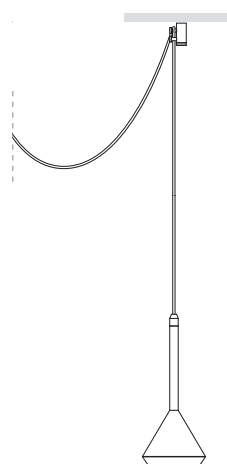



DIMENSIONS



ACCESSORIES



CORD ACCESSORY

AWARDS



PRODUCT

Name	SPIN 2M DIM TR.EDGE 40° 2700K MG
Reference	A2220210MG
Color	Metallized gold
RAL	Paint of metallic nanoparticles
Category	SUSPENSION

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	600 Lm
Power	6,5 W
Power values of the system	8,67 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	40°
Lighting efficiency	84%
Efficacy	92 Lm/W
Current intensity	700 mA
Dimming	Phase Cut - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Recess measurements	Ø50 mm.
Cord length	2 m
Fast adjustment tensioner	No
Weight	560 g.
Packaged weight	730,3 g.
Packaging dimensions	250 x 150 x 105 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Reduced dimensions, clear lines and a mechanized geometry combined in a pendant luminaire for accent lighting. Its ultra-thin cable gives Spin a sensation of aerial floatability. Can be fitted individually or configured in a group.

POLAR DIAGRAM

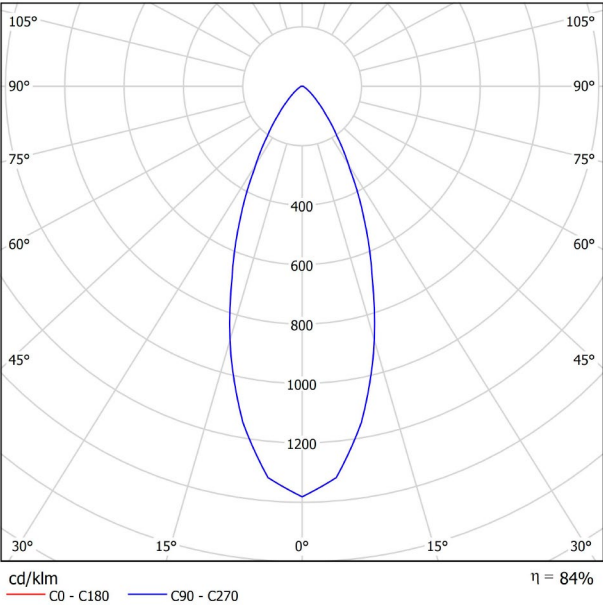



CONICAL DIAGRAM

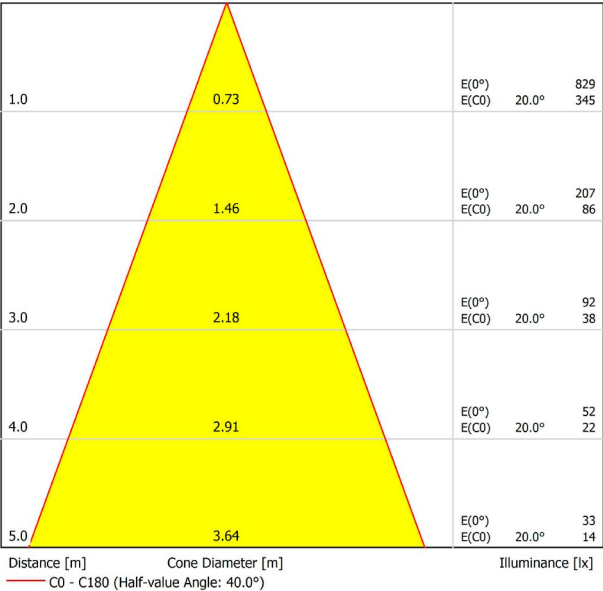




PRODUCT	
Model	Cord Accessory
Reference	02230000 WT NT
Colour	WT ☐ RAL 9016 NT ☒ RAL9005
Category	Accessories

DIMENSIONAL DRAWING

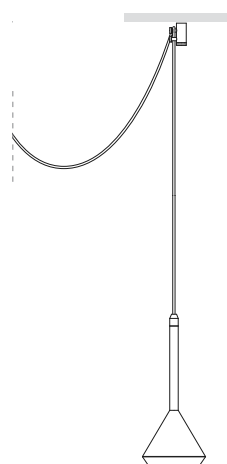



DIMENSIONS



ACCESSORIES



CORD ACCESSORY

AWARDS



PRODUCT

Name	SPIN 2M DIM TR.EDGE 40° 2700K NT
Reference	A2220210NT
Color	Textured black
RAL	9005
Category	SUSPENSION

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	600 Lm
Power	6,5 W
Power values of the system	8,67 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	40°
Lighting efficiency	84%
Efficacy	92 Lm/W
Current intensity	700 mA
Dimming	Phase Cut - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Recess measurements	Ø50 mm.
Cord length	2 m
Fast adjustment tensioner	No
Weight	560 g.
Packaged weight	730,3 g.
Packaging dimensions	250 x 150 x 105 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Reduced dimensions, clear lines and a mechanized geometry combined in a pendant luminaire for accent lighting. Its ultra-thin cable gives Spin a sensation of aerial floatability. Can be fitted individually or configured in a group.

POLAR DIAGRAM

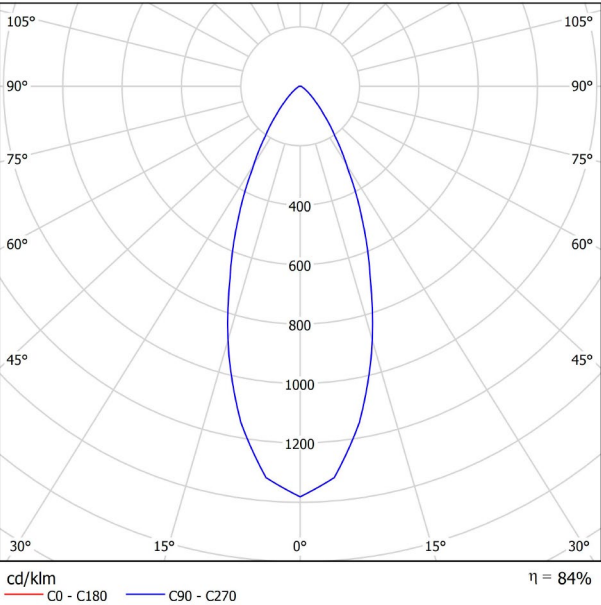



CONICAL DIAGRAM

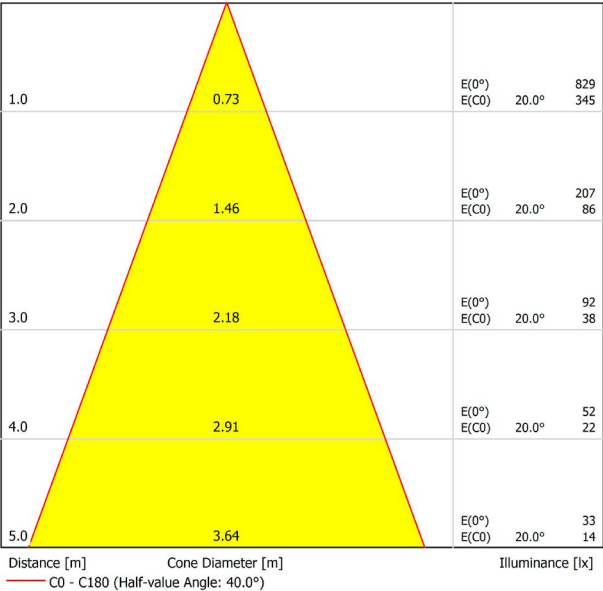




PRODUCT	
Model	Cord Accessory
Reference	02230000 WT NT
Colour	WT ☐ RAL 9016 NT ☒ RAL9005
Category	Accessories

DIMENSIONAL DRAWING

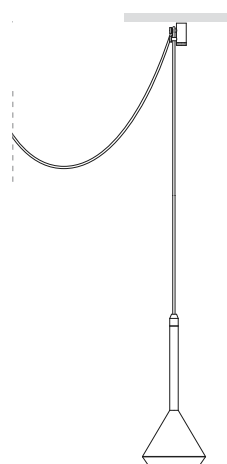



DIMENSIONS



ACCESSORIES



CORD ACCESSORY

AWARDS



PRODUCT

Name	SPIN 2M DIM TR.EDGE 40° 2700K WT
Reference	A2220210WT
Color	Textured white
RAL	9016
Category	SUSPENSION

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	600 Lm
Power	6,5 W
Power values of the system	8,67 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	40°
Lighting efficiency	84%
Efficacy	92 Lm/W
Current intensity	700 mA
Dimming	Phase Cut - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Recess measurements	Ø50 mm.
Cord length	2 m
Fast adjustment tensioner	No
Weight	560 g.
Packaged weight	730,3 g.
Packaging dimensions	250 x 150 x 105 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Reduced dimensions, clear lines and a mechanized geometry combined in a pendant luminaire for accent lighting. Its ultra-thin cable gives Spin a sensation of aerial floatability. Can be fitted individually or configured in a group.

POLAR DIAGRAM

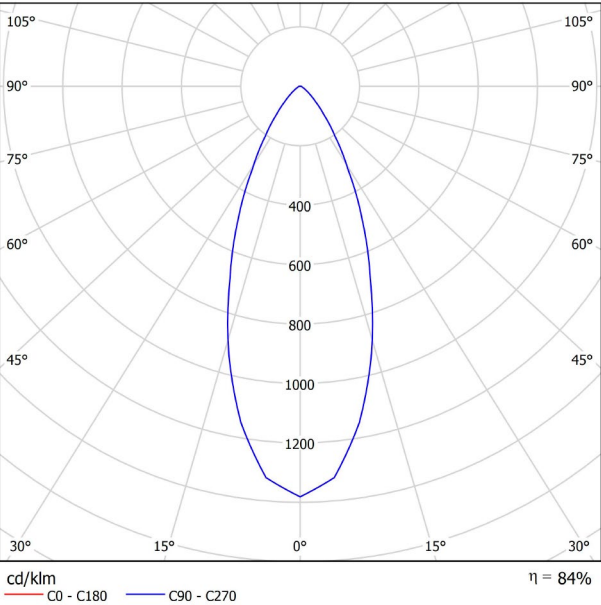



CONICAL DIAGRAM

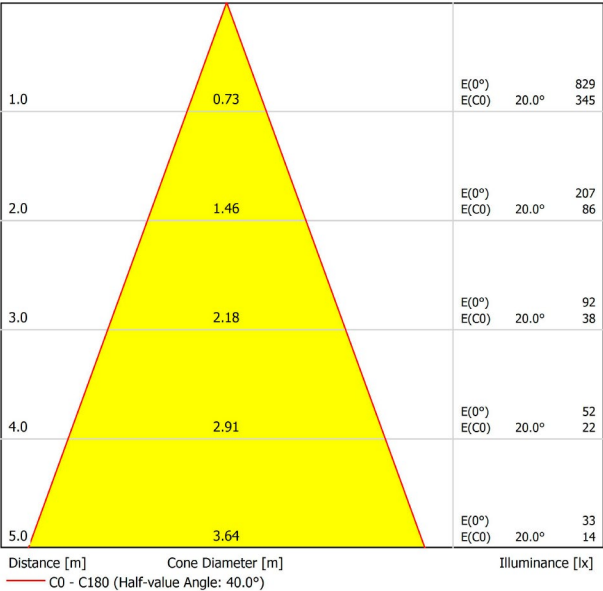




PRODUCT	
Model	Cord Accessory
Reference	02230000 WT NT
Colour	WT ☐ RAL 9016 NT ☒ RAL9005
Category	Accessories

DIMENSIONAL DRAWING

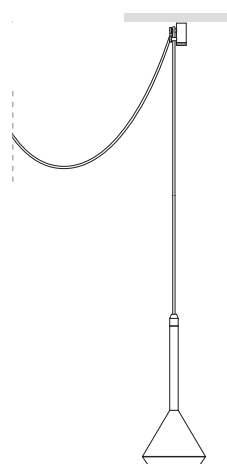



DIMENSIONS



ACCESSORIES



CORD ACCESSORY

AWARDS



Name	SPIN 2M DIM TR.EDGE 40° 3000K MC
Reference	A2220211MC
Color	Metallized copper
RAL	Paint of metallic nanoparticles
Category	SUSPENSION

PRODUCT

Light source	LED
Gross luminous flux	630 Lm
Power	6,5 W
Power values of the system	8,67 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	40°
Lighting efficiency	84%
Efficacy	97 Lm/W
Current intensity	700 mA
Dimming	Phase Cut - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


OTHER DATA

Ingress Protection	IP20
Recess measurements	Ø50 mm.
Cord length	2 m
Fast adjustment tensioner	No
Weight	560 g.
Packaged weight	730,3 g.
Packaging dimensions	250 x 150 x 105 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Reduced dimensions, clear lines and a mechanized geometry combined in a pendant luminaire for accent lighting. Its ultra-thin cable gives Spin a sensation of aerial floatability. Can be fitted individually or configured in a group.

POLAR DIAGRAM

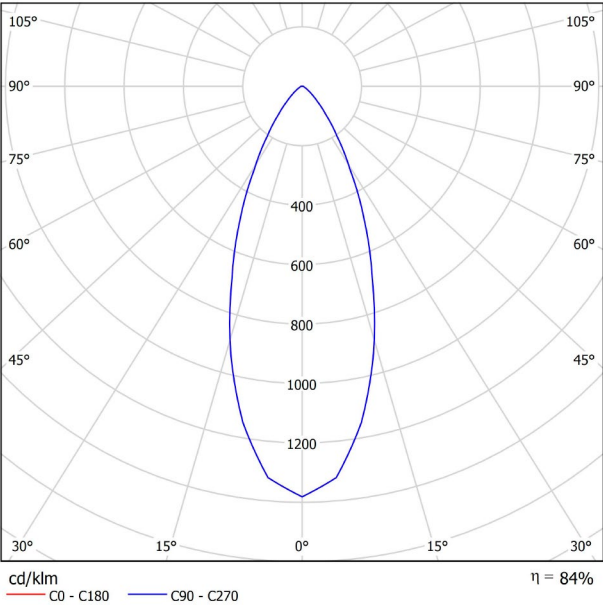



CONICAL DIAGRAM

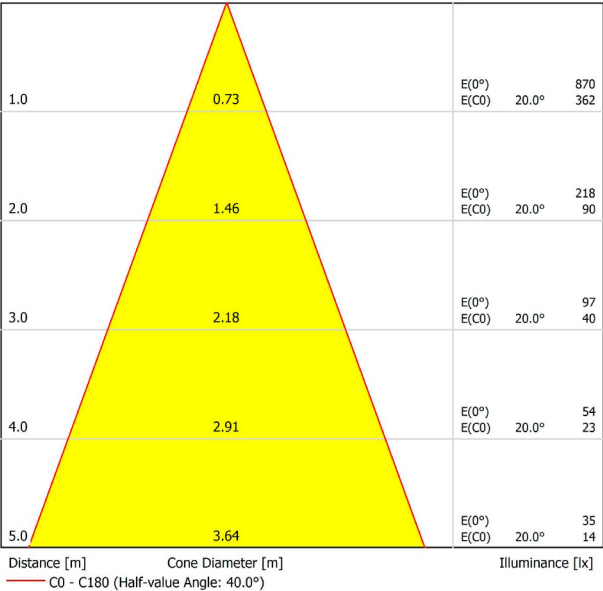




PRODUCT	
Model	Cord Accessory
Reference	02230000 WT NT
Colour	WT ☐ RAL 9016 NT ☒ RAL9005
Category	Accessories

DIMENSIONAL DRAWING

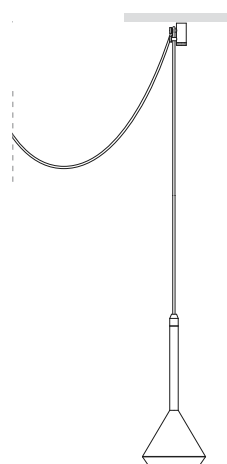



DIMENSIONS



ACCESSORIES



CORD ACCESSORY

AWARDS



Name	SPIN 2M DIM TR.EDGE 40° 3000K MG
Reference	A2220211MG
Color	Metallized gold
RAL	Paint of metallic nanoparticles
Category	SUSPENSION

PRODUCT

Light source	LED
Gross luminous flux	630 Lm
Power	6,5 W
Power values of the system	8,67 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	40°
Lighting efficiency	84%
Efficacy	97 Lm/W
Current intensity	700 mA
Dimming	Phase Cut - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


OTHER DATA

Ingress Protection	IP20
Recess measurements	Ø50 mm.
Cord length	2 m
Fast adjustment tensioner	No
Weight	560 g.
Packaged weight	730,3 g.
Packaging dimensions	250 x 150 x 105 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Reduced dimensions, clear lines and a mechanized geometry combined in a pendant luminaire for accent lighting. Its ultra-thin cable gives Spin a sensation of aerial floatability. Can be fitted individually or configured in a group.

POLAR DIAGRAM

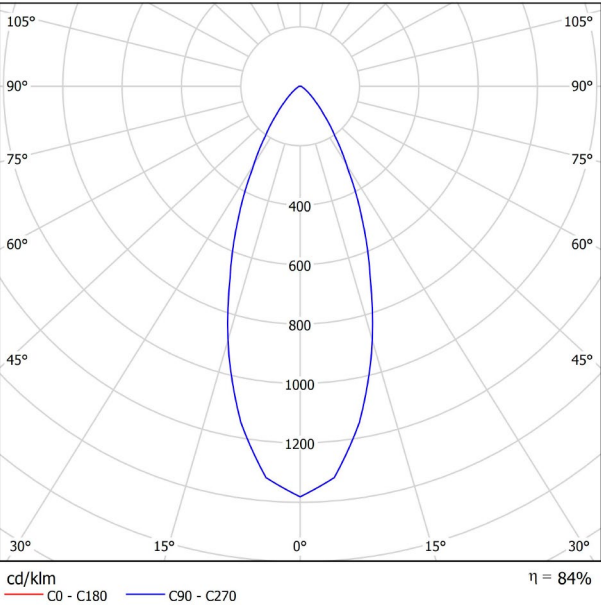



CONICAL DIAGRAM

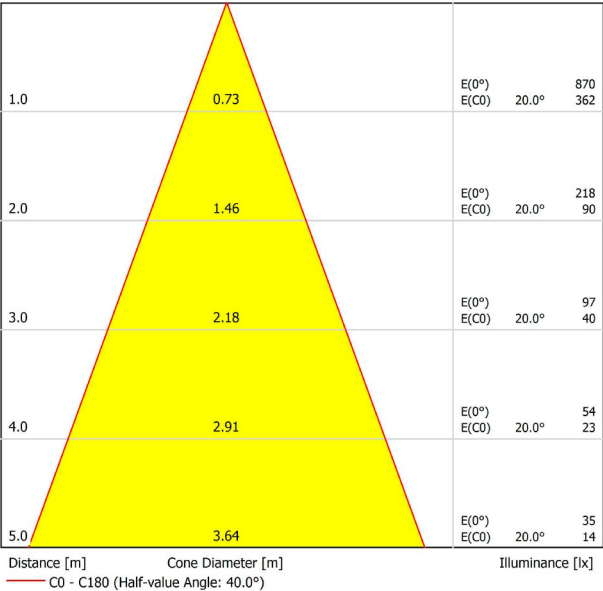




PRODUCT	
Model	Cord Accessory
Reference	02230000 WT NT
Colour	WT ☐ RAL 9016 NT ☒ RAL9005
Category	Accessories

DIMENSIONAL DRAWING

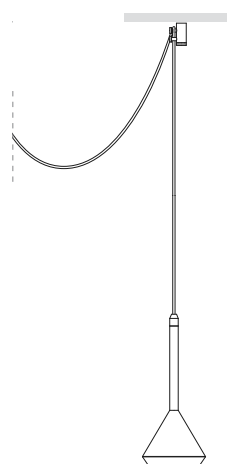



DIMENSIONS



ACCESSORIES



CORD ACCESSORY

AWARDS



PRODUCT

Name	SPIN 2M DIM TR.EDGE 40° 3000K NT
Reference	A2220211NT
Color	Textured black
RAL	9005
Category	SUSPENSION

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	630 Lm
Power	6,5 W
Power values of the system	8,67 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	40°
Lighting efficiency	84%
Efficacy	97 Lm/W
Current intensity	700 mA
Dimming	Phase Cut - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Recess measurements	Ø50 mm.
Cord length	2 m
Fast adjustment tensioner	No
Weight	560 g.
Packaged weight	730,3 g.
Packaging dimensions	250 x 150 x 105 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Reduced dimensions, clear lines and a mechanized geometry combined in a pendant luminaire for accent lighting. Its ultra-thin cable gives Spin a sensation of aerial floatability. Can be fitted individually or configured in a group.

POLAR DIAGRAM

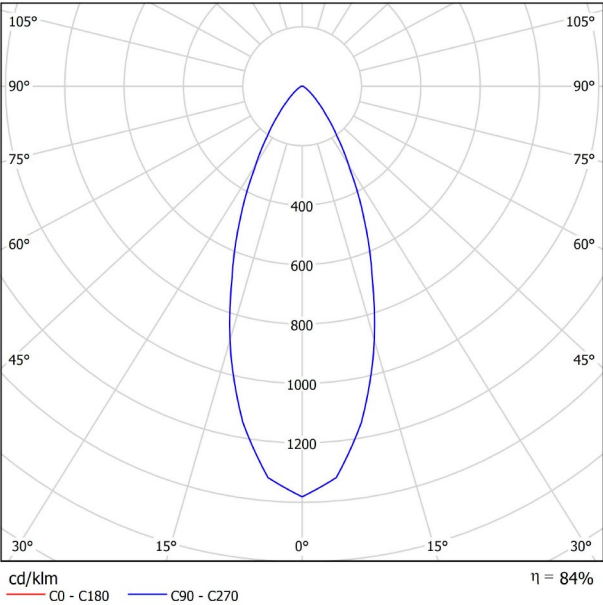



CONICAL DIAGRAM

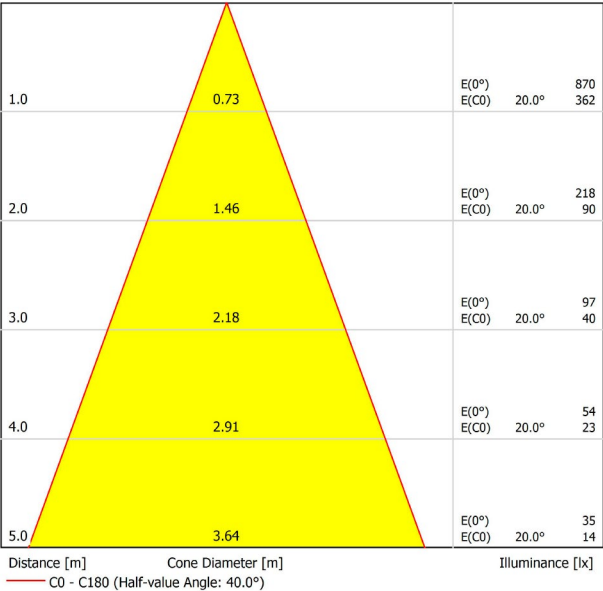




PRODUCT	
Model	Cord Accessory
Reference	02230000 WT NT
Colour	WT ☐ RAL 9016 NT ☒ RAL9005
Category	Accessories

DIMENSIONAL DRAWING

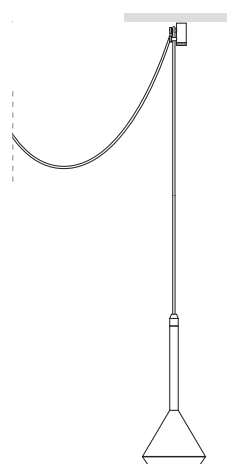



DIMENSIONS



ACCESSORIES



CORD ACCESSORY

AWARDS



PRODUCT

Name	SPIN 2M DIM TR.EDGE 40° 3000K WT
Reference	A2220211WT
Color	Textured white
RAL	9016
Category	SUSPENSION

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	630 Lm
Power	6,5 W
Power values of the system	8,67 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	40°
Lighting efficiency	84%
Efficacy	97 Lm/W
Current intensity	700 mA
Dimming	Phase Cut - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Recess measurements	Ø50 mm.
Cord length	2 m
Fast adjustment tensioner	No
Weight	560 g.
Packaged weight	730,3 g.
Packaging dimensions	250 x 150 x 105 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Reduced dimensions, clear lines and a mechanized geometry combined in a pendant luminaire for accent lighting. Its ultra-thin cable gives Spin a sensation of aerial floatability. Can be fitted individually or configured in a group.

POLAR DIAGRAM

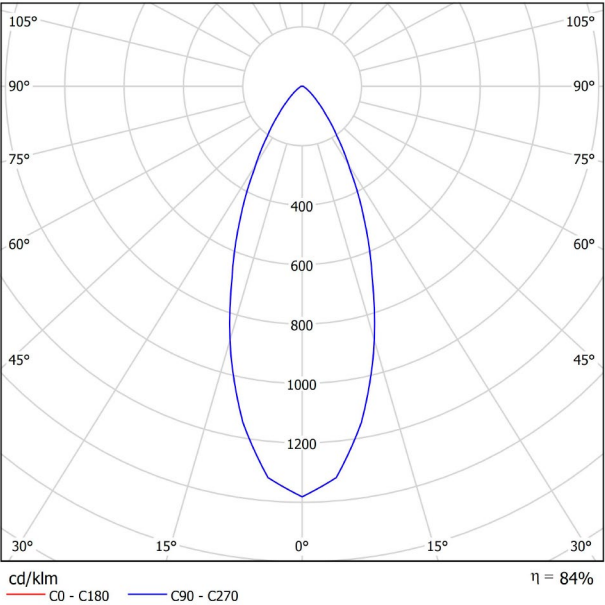

CONICAL DIAGRAM

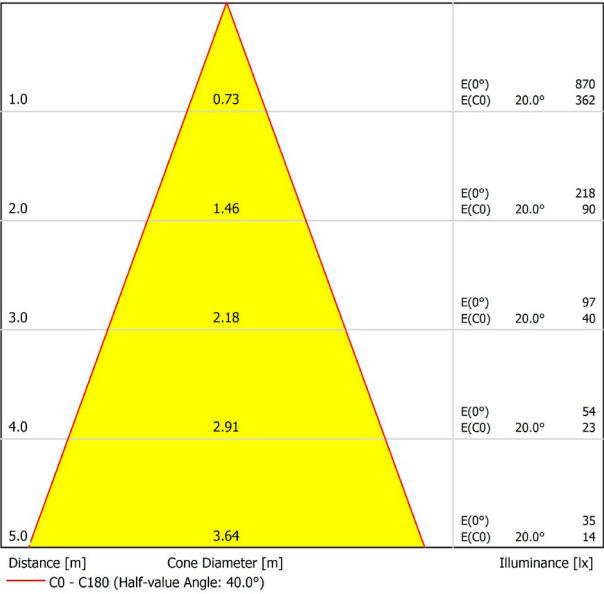



PRODUCT	
Model	Cord Accessory
Reference	02230000 WT NT
Colour	WT ☐ RAL 9016 NT ☒ RAL9005
Category	Accessories

DIMENSIONAL DRAWING

