




## DIMENSIONS



## ACCESSORIES

ANTI-GLARE HONEYCOMB  
LOUVER

## PRODUCT

Name	WELLIT S 1 19° 3000K NT
Reference	A3801111NT
Color	Textured black
RAL	9005
Category	CEILING RECESSED

## LIGHTING INFORMATION

Light source	LED
Gross luminous flux	700 Lm
Power	5 W
Power values of the system	5 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	19°
Lighting efficiency	80%
Efficacy	140 Lm/W
Current intensity	150 mA
Control through bluetooth	Please Consult
Driver	Included
Emergency power supply	Please Consult
Electrical insulation class	□
Voltage	230 V
Frequency	50/60 Hz
Energy efficiency	A++
LED lifespan	L80B10 (Tj=85°C) >60.000h


## OTHER DATA

Ingress Protection	IP20
Recess measurements	Ø73 mm.
Swivel angle	25°
Rotation angle	355°
Weight	230 g.
Packaged weight	300 g.
Packaging dimensions	156 x 130 x 186 mm
Units per package	1
Materials	Aluminium / Polycarbonate





Wellit is a family of recessed luminaires, that comes in 3 sizes and can be adjusted with a rotation and tilting system. Wellit offers outstanding technical features. It is a compact product: its 3 sizes are consistent with a luminous flux level that is commensurate with its dimensions. It is also noteworthy for its efficient thermal management thanks to an excellently designed dissipation system. With Wellit, the interior designer will have great versatility in terms of applications, for general, retail and contract lighting.

POLAR DIAGRAM

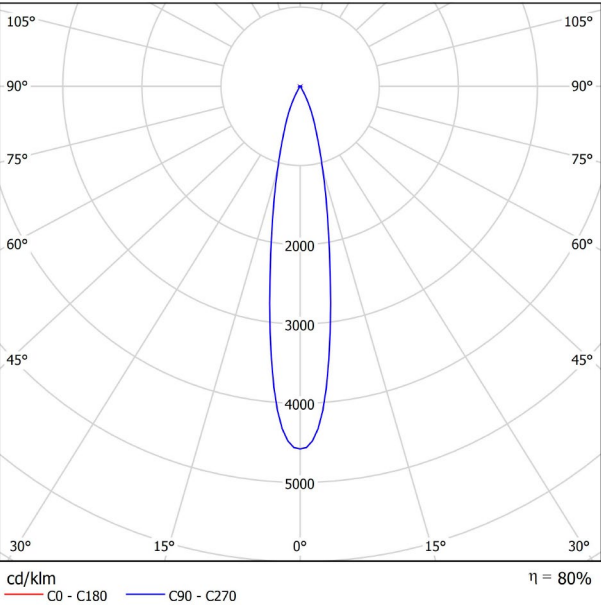

CONICAL DIAGRAM

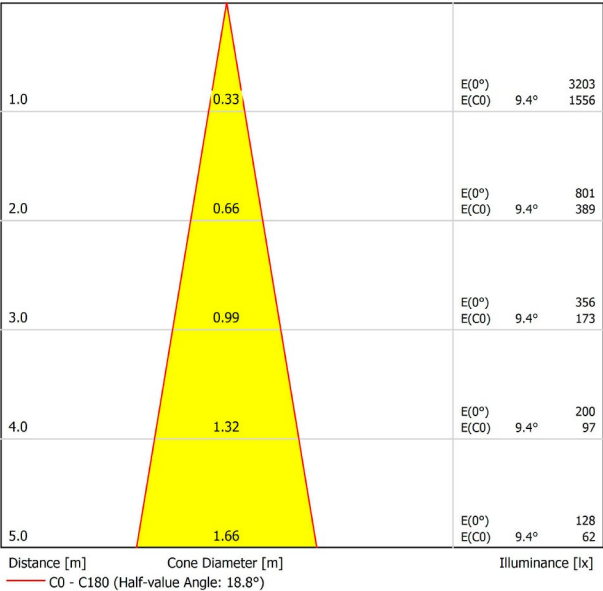




PRODUCT	
Model	Anti-glare Honeycomb Louver
Reference	A380-00-00
Category	Accessories
NOT SOLD SEPARATELY.	



Accessory made up of louver in the shape of a honeycomb panel to reduce glare and the effects of direct rays of vision.



## DIMENSIONS



## ACCESSORIES

ANTI-GLARE HONEYCOMB  
LOUVER

## PRODUCT

Name	WELLIT S 1 19° 3000K WT
Reference	A3801111WT
Color	Textured white
RAL	9016
Category	CEILING RECESSED

## LIGHTING INFORMATION

Light source	LED
Gross luminous flux	700 Lm
Power	5 W
Power values of the system	5 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	19°
Lighting efficiency	80%
Efficacy	140 Lm/W
Current intensity	150 mA
Control through bluetooth	Please Consult
Driver	Included
Emergency power supply	Please Consult
Electrical insulation class	<input type="checkbox"/>
Voltage	230 V
Frequency	50/60 Hz
Energy efficiency	A++
LED lifespan	L80B10 (Tj=85°C) >60.000h

## OTHER DATA


Ingress Protection	IP20
Recess measurements	Ø73 mm.
Swivel angle	25°
Rotation angle	355°
Weight	230 g.
Packaged weight	300 g.
Packaging dimensions	156 x 130 x 186 mm
Units per package	1
Materials	Aluminium / Polycarbonate




Wellit is a family of recessed luminaires, that comes in 3 sizes and can be adjusted with a rotation and tilting system. Wellit offers outstanding technical features. It is a compact product: its 3 sizes are consistent with a luminous flux level that is commensurate with its dimensions. It is also noteworthy for its efficient thermal management thanks to an excellently designed dissipation system. With Wellit, the interior designer will have great versatility in terms of applications, for general, retail and contract lighting.




POLAR DIAGRAM

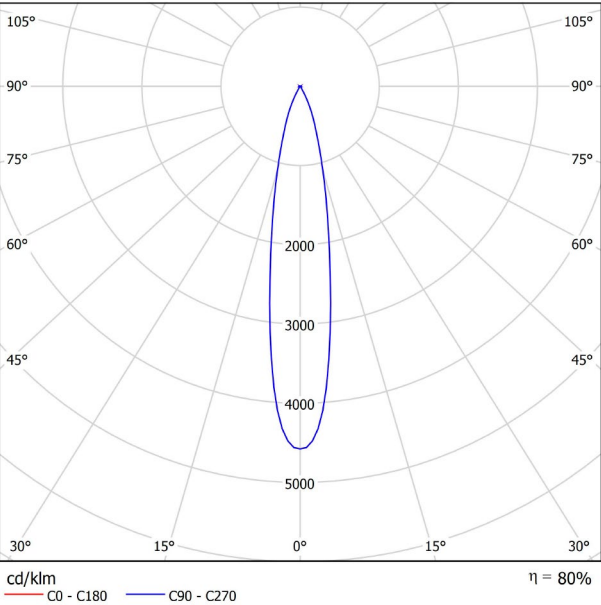

CONICAL DIAGRAM

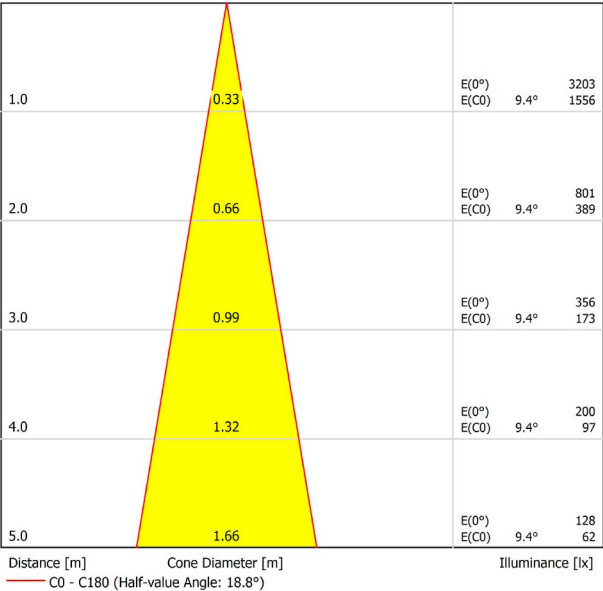




PRODUCT	
Model	Anti-glare Honeycomb Louver
Reference	A380-00-00
Category	Accessories
NOT SOLD SEPARATELY.	



Accessory made up of louver in the shape of a honeycomb panel to reduce glare and the effects of direct rays of vision.



## DIMENSIONS



## ACCESSORIES

ANTI-GLARE HONEYCOMB  
LOUVER

## PRODUCT

Name	WELLIT S 1 19° 4000K NT
Reference	A3801112NT
Color	Textured black
RAL	9005
Category	CEILING RECESSED

## LIGHTING INFORMATION

Light source	LED
Gross luminous flux	710 Lm
Power	5 W
Power values of the system	5 W
Colour temperature	4000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	19°
Lighting efficiency	80%
Efficacy	142 Lm/W
Current intensity	150 mA
Control through bluetooth	Please Consult
Driver	Included
Emergency power supply	Please Consult
Electrical insulation class	□
Voltage	230 V
Frequency	50/60 Hz
Energy efficiency	A++
LED lifespan	L80B10 (Tj=85°C) >60.000h


## OTHER DATA

Ingress Protection	IP20
Recess measurements	Ø73 mm.
Swivel angle	25°
Rotation angle	355°
Weight	230 g.
Packaged weight	300 g.
Packaging dimensions	156 x 130 x 186 mm
Units per package	1
Materials	Aluminium / Polycarbonate





Wellit is a family of recessed luminaires, that comes in 3 sizes and can be adjusted with a rotation and tilting system. Wellit offers outstanding technical features. It is a compact product: its 3 sizes are consistent with a luminous flux level that is commensurate with its dimensions. It is also noteworthy for its efficient thermal management thanks to an excellently designed dissipation system. With Wellit, the interior designer will have great versatility in terms of applications, for general, retail and contract lighting.

POLAR DIAGRAM

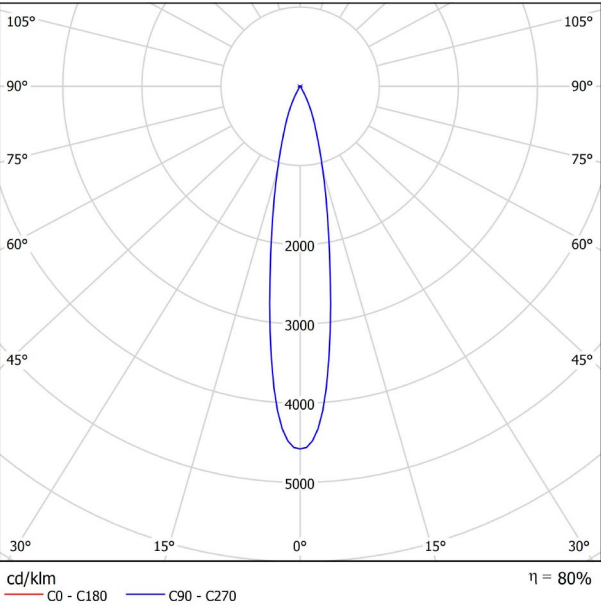

CONICAL DIAGRAM

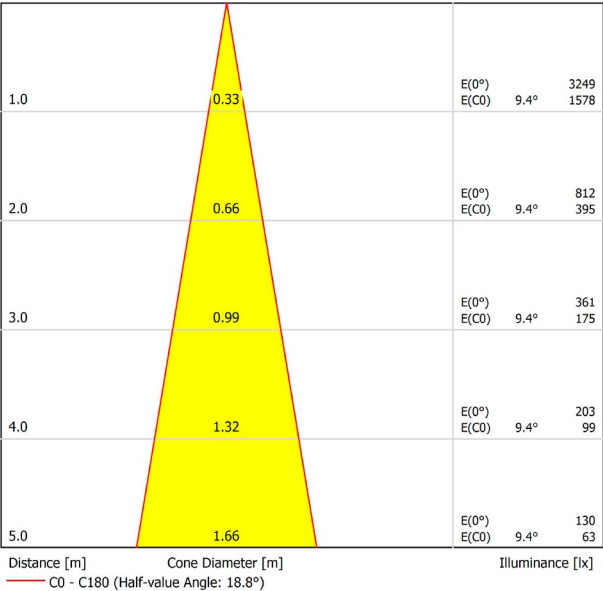




PRODUCT	
Model	Anti-glare Honeycomb Louver
Reference	A380-00-00
Category	Accessories
NOT SOLD SEPARATELY.	



Accessory made up of louver in the shape of a honeycomb panel to reduce glare and the effects of direct rays of vision.



## DIMENSIONS



## ACCESSORIES

ANTI-GLARE HONEYCOMB  
LOUVER

## PRODUCT

Name	WELLIT S 1 19° 4000K WT
Reference	A3801112WT
Color	Textured white
RAL	9016
Category	CEILING RECESSED

## LIGHTING INFORMATION

Light source	LED
Gross luminous flux	710 Lm
Power	5 W
Power values of the system	5 W
Colour temperature	4000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	19°
Lighting efficiency	80%
Efficacy	142 Lm/W
Current intensity	150 mA
Control through bluetooth	Please Consult
Driver	Included
Emergency power supply	Please Consult
Electrical insulation class	□
Voltage	230 V
Frequency	50/60 Hz
Energy efficiency	A++
LED lifespan	L80B10 (Tj=85°C) >60.000h


## OTHER DATA

Ingress Protection	IP20
Recess measurements	Ø73 mm.
Swivel angle	25°
Rotation angle	355°
Weight	230 g.
Packaged weight	300 g.
Packaging dimensions	156 x 130 x 186 mm
Units per package	1
Materials	Aluminium / Polycarbonate





Wellit is a family of recessed luminaires, that comes in 3 sizes and can be adjusted with a rotation and tilting system. Wellit offers outstanding technical features. It is a compact product: its 3 sizes are consistent with a luminous flux level that is commensurate with its dimensions. It is also noteworthy for its efficient thermal management thanks to an excellently designed dissipation system. With Wellit, the interior designer will have great versatility in terms of applications, for general, retail and contract lighting.

POLAR DIAGRAM

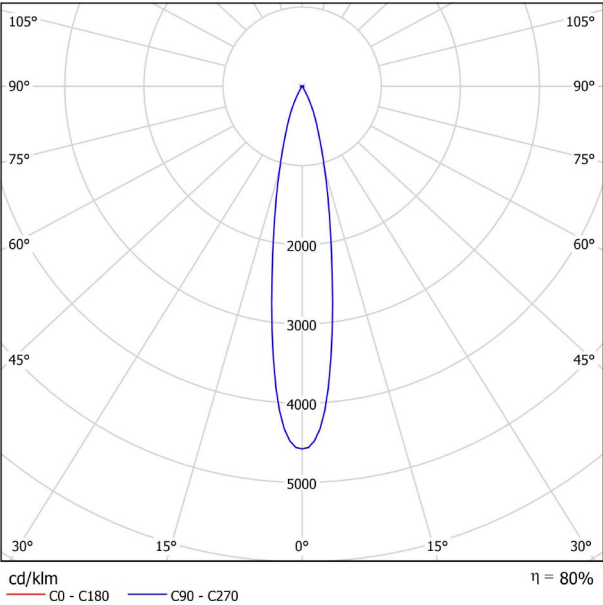

CONICAL DIAGRAM

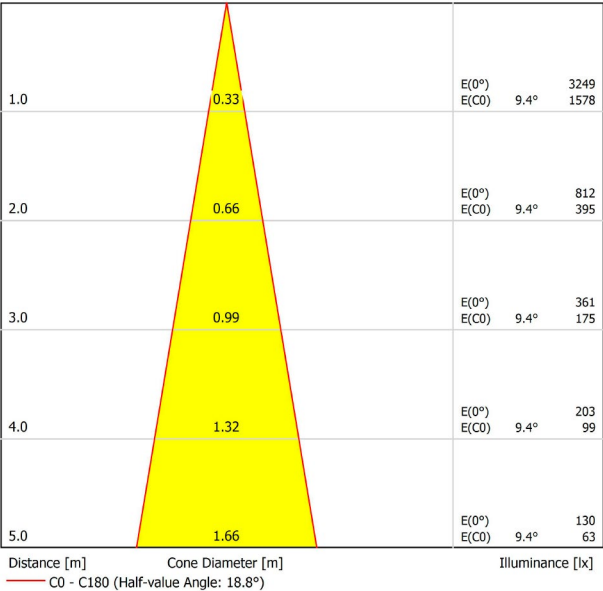



PRODUCT	
Model	Anti-glare Honeycomb Louver
Reference	A380-00-00
Category	Accessories
NOT SOLD SEPARATELY.	




Accessory made up of louver in the shape of a honeycomb panel to reduce glare and the effects of direct rays of vision.





## DIMENSIONS



## ACCESSORIES

ANTI-GLARE HONEYCOMB  
LOUVER

## PRODUCT

Name	WELLIT S 1 26° 3000K NT
Reference	A3801121NT
Color	Textured black
RAL	9005
Category	CEILING RECESSED

## LIGHTING INFORMATION

Light source	LED
Gross luminous flux	700 Lm
Power	5 W
Power values of the system	5 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	26°
Lighting efficiency	89%
Efficacy	140 Lm/W
Current intensity	150 mA
Control through bluetooth	Please Consult
Driver	Included
Emergency power supply	Please Consult
Electrical insulation class	□
Voltage	230 V
Frequency	50/60 Hz
Energy efficiency	A++
LED lifespan	L80B10 (Tj=85°C) >60.000h


## OTHER DATA

Ingress Protection	IP20
Recess measurements	Ø73 mm.
Swivel angle	25°
Rotation angle	355°
Weight	230 g.
Packaged weight	300 g.
Packaging dimensions	156 x 130 x 186 mm
Units per package	1
Materials	Aluminium / Polycarbonate





Wellit is a family of recessed luminaires, that comes in 3 sizes and can be adjusted with a rotation and tilting system. Wellit offers outstanding technical features. It is a compact product: its 3 sizes are consistent with a luminous flux level that is commensurate with its dimensions. It is also noteworthy for its efficient thermal management thanks to an excellently designed dissipation system. With Wellit, the interior designer will have great versatility in terms of applications, for general, retail and contract lighting.

POLAR DIAGRAM

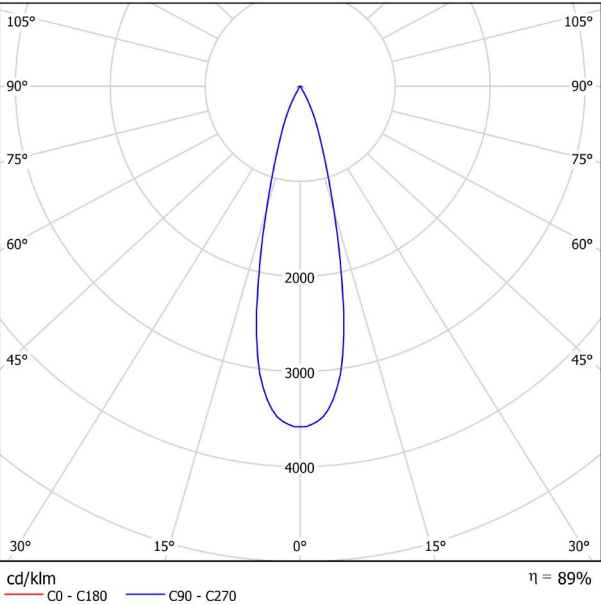

CONICAL DIAGRAM

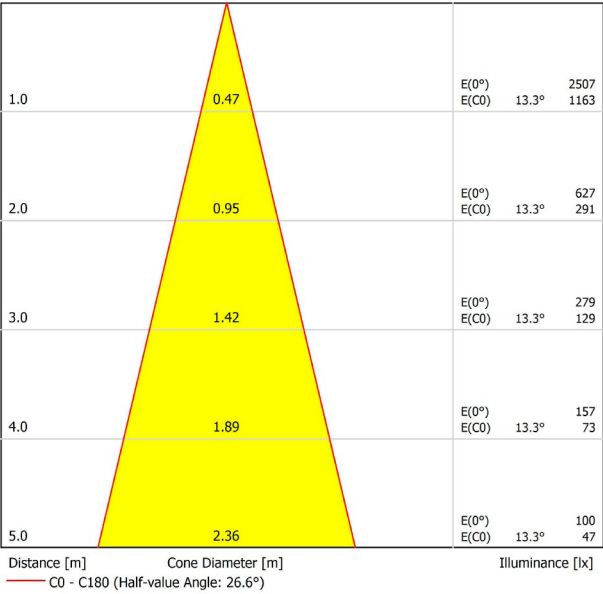




PRODUCT	
Model	Anti-glare Honeycomb Louver
Reference	A380-00-00
Category	Accessories
NOT SOLD SEPARATELY.	



Accessory made up of louver in the shape of a honeycomb panel to reduce glare and the effects of direct rays of vision.



## DIMENSIONS



## ACCESSORIES

ANTI-GLARE HONEYCOMB  
LOUVER

## PRODUCT

Name	WELLIT S 1 26° 3000K WT
Reference	A3801121WT
Color	Textured white
RAL	9016
Category	CEILING RECESSED

## LIGHTING INFORMATION

Light source	LED
Gross luminous flux	700 Lm
Power	5 W
Power values of the system	5 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	26°
Lighting efficiency	89%
Efficacy	140 Lm/W
Current intensity	150 mA
Control through bluetooth	Please Consult
Driver	Included
Emergency power supply	Please Consult
Electrical insulation class	□
Voltage	230 V
Frequency	50/60 Hz
Energy efficiency	A++
LED lifespan	L80B10 (Tj=85°C) >60.000h


## OTHER DATA

Ingress Protection	IP20
Recess measurements	Ø73 mm.
Swivel angle	25°
Rotation angle	355°
Weight	230 g.
Packaged weight	300 g.
Packaging dimensions	156 x 130 x 186 mm
Units per package	1
Materials	Aluminium / Polycarbonate





Wellit is a family of recessed luminaires, that comes in 3 sizes and can be adjusted with a rotation and tilting system. Wellit offers outstanding technical features. It is a compact product: its 3 sizes are consistent with a luminous flux level that is commensurate with its dimensions. It is also noteworthy for its efficient thermal management thanks to an excellently designed dissipation system. With Wellit, the interior designer will have great versatility in terms of applications, for general, retail and contract lighting.

POLAR DIAGRAM

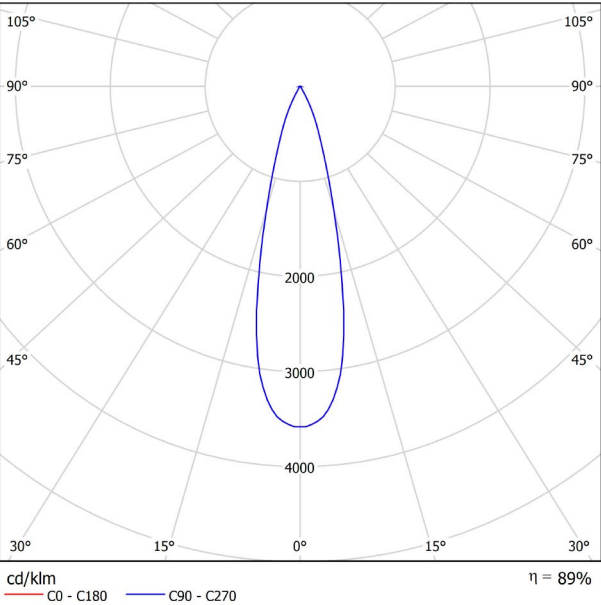

CONICAL DIAGRAM

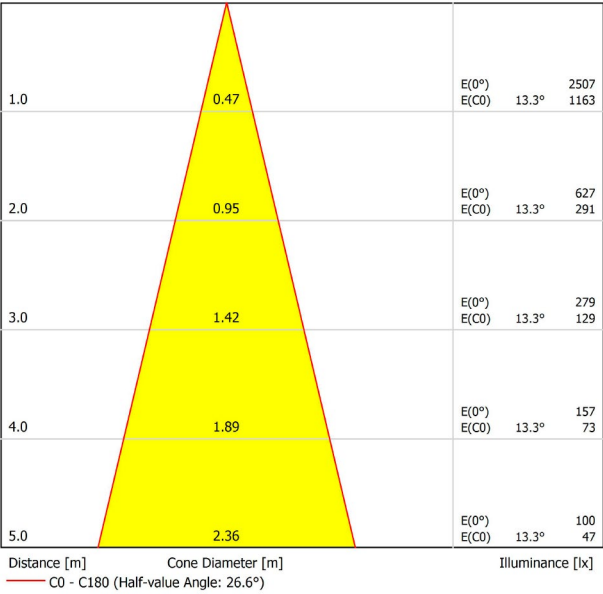




PRODUCT	
Model	Anti-glare Honeycomb Louver
Reference	A380-00-00
Category	Accessories
NOT SOLD SEPARATELY.	



Accessory made up of louver in the shape of a honeycomb panel to reduce glare and the effects of direct rays of vision.



## DIMENSIONS



## ACCESSORIES

ANTI-GLARE HONEYCOMB  
LOUVER

## PRODUCT

Name	WELLIT S 1 26° 4000K NT
Reference	A3801122NT
Color	Textured black
RAL	9005
Category	CEILING RECESSED

## LIGHTING INFORMATION

Light source	LED
Gross luminous flux	710 Lm
Power	5 W
Power values of the system	5 W
Colour temperature	4000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	26°
Lighting efficiency	89%
Efficacy	142 Lm/W
Current intensity	150 mA
Control through bluetooth	Please Consult
Driver	Included
Emergency power supply	Please Consult
Electrical insulation class	□
Voltage	230 V
Frequency	50/60 Hz
Energy efficiency	A++
LED lifespan	L80B10 (Tj=85°C) >60.000h


## OTHER DATA

Ingress Protection	IP20
Recess measurements	Ø73 mm.
Swivel angle	25°
Rotation angle	355°
Weight	230 g.
Packaged weight	300 g.
Packaging dimensions	156 x 130 x 186 mm
Units per package	1
Materials	Aluminium / Polycarbonate




Wellit is a family of recessed luminaires, that comes in 3 sizes and can be adjusted with a rotation and tilting system. Wellit offers outstanding technical features. It is a compact product: its 3 sizes are consistent with a luminous flux level that is commensurate with its dimensions. It is also noteworthy for its efficient thermal management thanks to an excellently designed dissipation system. With Wellit, the interior designer will have great versatility in terms of applications, for general, retail and contract lighting.


POLAR DIAGRAM

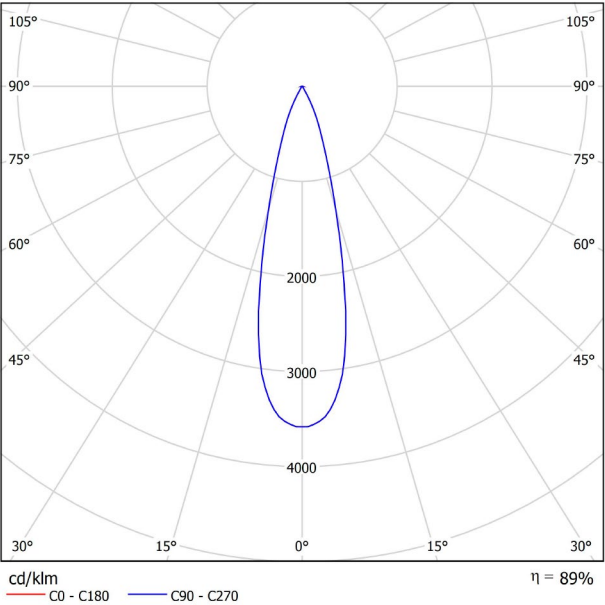

CONICAL DIAGRAM

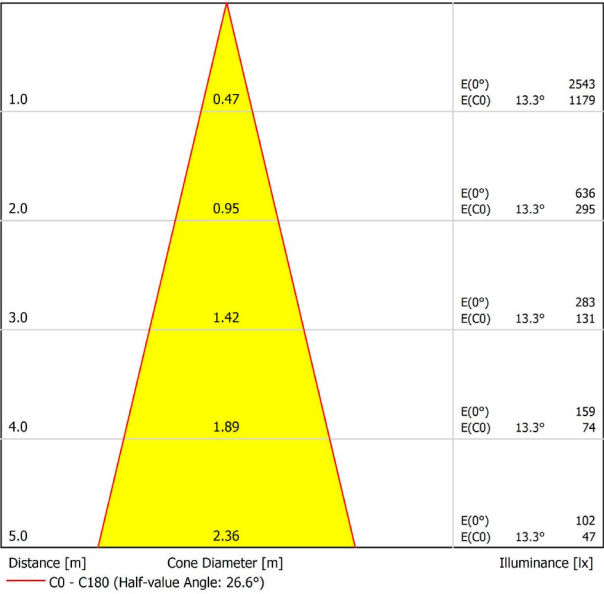






PRODUCT	
Model	Anti-glare Honeycomb Louver
Reference	A380-00-00
Category	Accessories
NOT SOLD SEPARATELY.	



Accessory made up of louver in the shape of a honeycomb panel to reduce glare and the effects of direct rays of vision.



## DIMENSIONS



## ACCESSORIES

ANTI-GLARE HONEYCOMB  
LOUVER

## PRODUCT

Name	WELLIT S 1 26° 4000K WT
Reference	A3801122WT
Color	Textured white
RAL	9016
Category	CEILING RECESSED

## LIGHTING INFORMATION

Light source	LED
Gross luminous flux	710 Lm
Power	5 W
Power values of the system	5 W
Colour temperature	4000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	26°
Lighting efficiency	89%
Efficacy	142 Lm/W
Current intensity	150 mA
Control through bluetooth	Please Consult
Driver	Included
Emergency power supply	Please Consult
Electrical insulation class	□
Voltage	230 V
Frequency	50/60 Hz
Energy efficiency	A++
LED lifespan	L80B10 (Tj=85°C) >60.000h


## OTHER DATA

Ingress Protection	IP20
Recess measurements	Ø73 mm.
Swivel angle	25°
Rotation angle	355°
Weight	230 g.
Packaged weight	300 g.
Packaging dimensions	156 x 130 x 186 mm
Units per package	1
Materials	Aluminium / Polycarbonate





Wellit is a family of recessed luminaires, that comes in 3 sizes and can be adjusted with a rotation and tilting system. Wellit offers outstanding technical features. It is a compact product: its 3 sizes are consistent with a luminous flux level that is commensurate with its dimensions. It is also noteworthy for its efficient thermal management thanks to an excellently designed dissipation system. With Wellit, the interior designer will have great versatility in terms of applications, for general, retail and contract lighting.

POLAR DIAGRAM

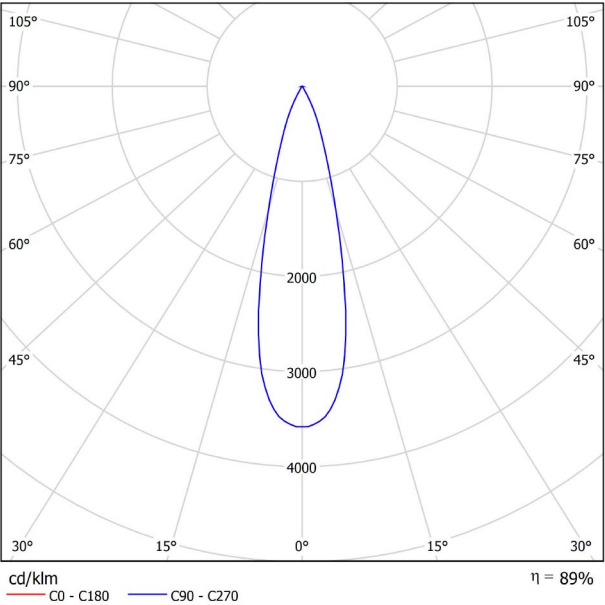

CONICAL DIAGRAM

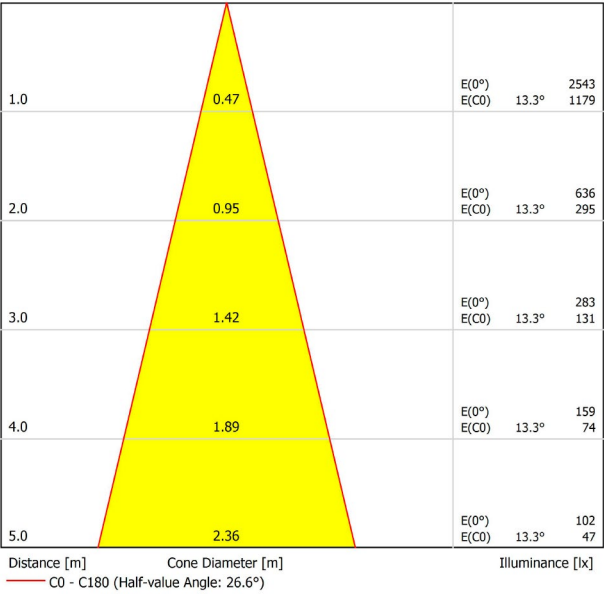




PRODUCT	
Model	Anti-glare Honeycomb Louver
Reference	A380-00-00
Category	Accessories
NOT SOLD SEPARATELY.	



Accessory made up of louver in the shape of a honeycomb panel to reduce glare and the effects of direct rays of vision.



## DIMENSIONS



## ACCESSORIES

ANTI-GLARE HONEYCOMB  
LOUVER

## PRODUCT

Name	WELLIT S 1 41° 3000K NT
Reference	A3801131NT
Color	Textured black
RAL	9005
Category	CEILING RECESSED

## LIGHTING INFORMATION

Light source	LED
Gross luminous flux	700 Lm
Power	5 W
Power values of the system	5 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	41°
Lighting efficiency	84%
Efficacy	140 Lm/W
Current intensity	150 mA
Control through bluetooth	Please Consult
Driver	Included
Emergency power supply	Please Consult
Electrical insulation class	□
Voltage	230 V
Frequency	50/60 Hz
Energy efficiency	A++
LED lifespan	L80B10 (Tj=85°C) >60.000h


## OTHER DATA

Ingress Protection	IP20
Recess measurements	Ø73 mm.
Swivel angle	25°
Rotation angle	355°
Weight	230 g.
Packaged weight	300 g.
Packaging dimensions	156 x 130 x 186 mm
Units per package	1
Materials	Aluminium / Polycarbonate





Wellit is a family of recessed luminaires, that comes in 3 sizes and can be adjusted with a rotation and tilting system. Wellit offers outstanding technical features. It is a compact product: its 3 sizes are consistent with a luminous flux level that is commensurate with its dimensions. It is also noteworthy for its efficient thermal management thanks to an excellently designed dissipation system. With Wellit, the interior designer will have great versatility in terms of applications, for general, retail and contract lighting.

POLAR DIAGRAM

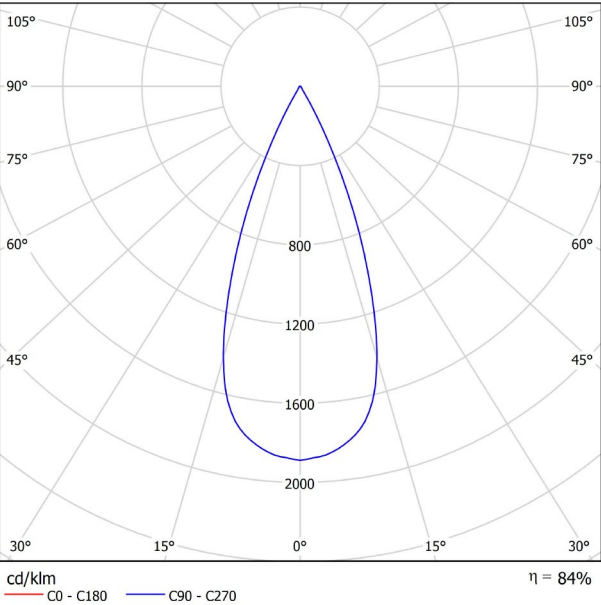

CONICAL DIAGRAM

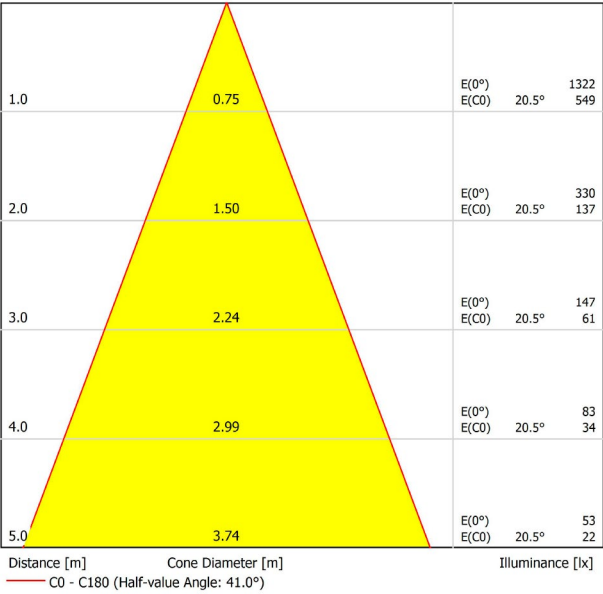




PRODUCT	
Model	Anti-glare Honeycomb Louver
Reference	A380-00-00
Category	Accessories
NOT SOLD SEPARATELY.	



Accessory made up of louver in the shape of a honeycomb panel to reduce glare and the effects of direct rays of vision.



## DIMENSIONS



## ACCESSORIES

ANTI-GLARE HONEYCOMB  
LOUVER

## PRODUCT

Name	WELLIT S 1 41° 3000K WT
Reference	A3801131WT
Color	Textured white
RAL	9016
Category	CEILING RECESSED

## LIGHTING INFORMATION

Light source	LED
Gross luminous flux	700 Lm
Power	5 W
Power values of the system	5 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	41°
Lighting efficiency	84%
Efficacy	140 Lm/W
Current intensity	150 mA
Control through bluetooth	Please Consult
Driver	Included
Emergency power supply	Please Consult
Electrical insulation class	□
Voltage	230 V
Frequency	50/60 Hz
Energy efficiency	A++
LED lifespan	L80B10 (Tj=85°C) >60.000h

## OTHER DATA


Ingress Protection	IP20
Recess measurements	Ø73 mm.
Swivel angle	25°
Rotation angle	355°
Weight	230 g.
Packaged weight	300 g.
Packaging dimensions	156 x 130 x 186 mm
Units per package	1
Materials	Aluminium / Polycarbonate




Wellit is a family of recessed luminaires, that comes in 3 sizes and can be adjusted with a rotation and tilting system. Wellit offers outstanding technical features. It is a compact product: its 3 sizes are consistent with a luminous flux level that is commensurate with its dimensions. It is also noteworthy for its efficient thermal management thanks to an excellently designed dissipation system. With Wellit, the interior designer will have great versatility in terms of applications, for general, retail and contract lighting.




POLAR DIAGRAM

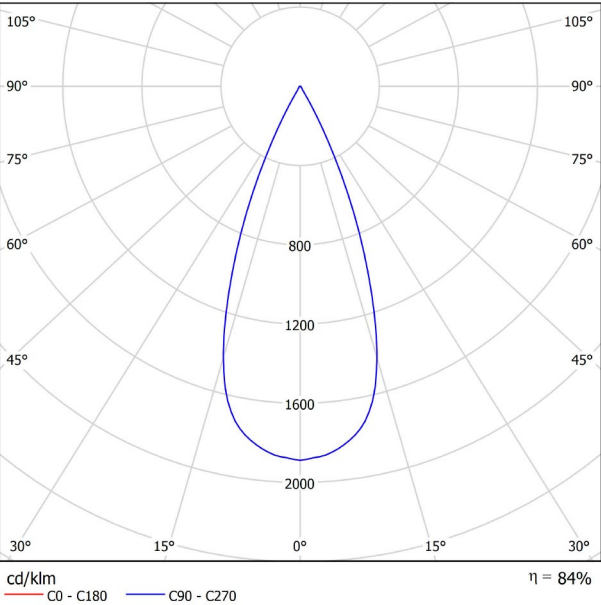

CONICAL DIAGRAM

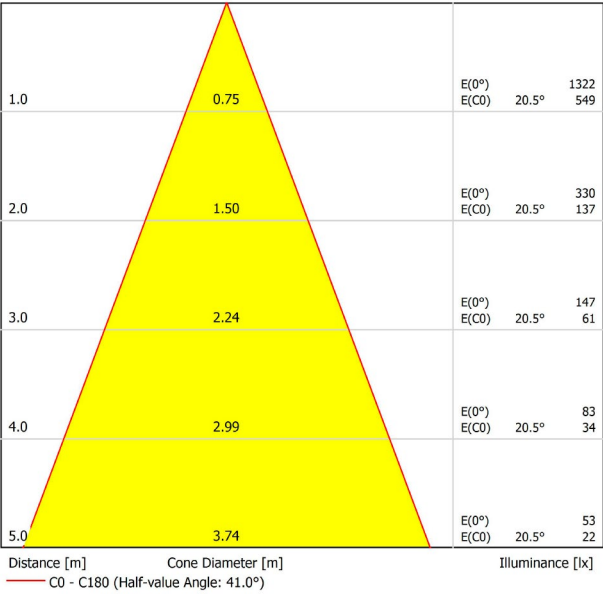




PRODUCT	
Model	Anti-glare Honeycomb Louver
Reference	A380-00-00
Category	Accessories
NOT SOLD SEPARATELY.	



Accessory made up of louver in the shape of a honeycomb panel to reduce glare and the effects of direct rays of vision.



## DIMENSIONS



## ACCESSORIES

ANTI-GLARE HONEYCOMB  
LOUVER

## PRODUCT

Name	WELLIT S 1 41° 4000K NT
Reference	A3801132NT
Color	Textured black
RAL	9005
Category	CEILING RECESSED

## LIGHTING INFORMATION

Light source	LED
Gross luminous flux	710 Lm
Power	5 W
Power values of the system	5 W
Colour temperature	4000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	41°
Lighting efficiency	84%
Efficacy	142 Lm/W
Current intensity	150 mA
Control through bluetooth	Please Consult
Driver	Included
Emergency power supply	Please Consult
Electrical insulation class	□
Voltage	230 V
Frequency	50/60 Hz
Energy efficiency	A++
LED lifespan	L80B10 (Tj=85°C) >60.000h


## OTHER DATA

Ingress Protection	IP20
Recess measurements	Ø73 mm.
Swivel angle	25°
Rotation angle	355°
Weight	230 g.
Packaged weight	300 g.
Packaging dimensions	156 x 130 x 186 mm
Units per package	1
Materials	Aluminium / Polycarbonate





Wellit is a family of recessed luminaires, that comes in 3 sizes and can be adjusted with a rotation and tilting system. Wellit offers outstanding technical features. It is a compact product: its 3 sizes are consistent with a luminous flux level that is commensurate with its dimensions. It is also noteworthy for its efficient thermal management thanks to an excellently designed dissipation system. With Wellit, the interior designer will have great versatility in terms of applications, for general, retail and contract lighting.

POLAR DIAGRAM

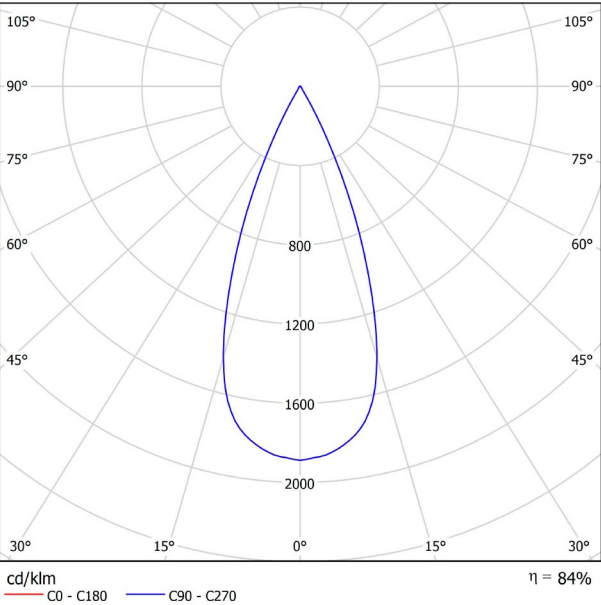

CONICAL DIAGRAM

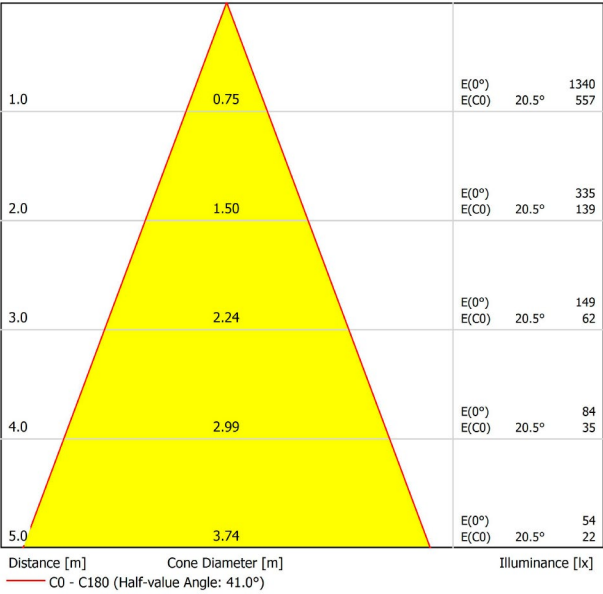




PRODUCT	
Model	Anti-glare Honeycomb Louver
Reference	A380-00-00
Category	Accessories
NOT SOLD SEPARATELY.	



Accessory made up of louver in the shape of a honeycomb panel to reduce glare and the effects of direct rays of vision.



## DIMENSIONS



## ACCESSORIES

ANTI-GLARE HONEYCOMB  
LOUVER

## PRODUCT

Name	WELLIT S 1 41° 4000K WT
Reference	A3801132WT
Color	Textured white
RAL	9016
Category	CEILING RECESSED

## LIGHTING INFORMATION

Light source	LED
Gross luminous flux	710 Lm
Power	5 W
Power values of the system	5 W
Colour temperature	4000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	41°
Lighting efficiency	84%
Efficacy	142 Lm/W
Current intensity	150 mA
Control through bluetooth	Please Consult
Driver	Included
Emergency power supply	Please Consult
Electrical insulation class	<input type="checkbox"/>
Voltage	230 V
Frequency	50/60 Hz
Energy efficiency	A++
LED lifespan	L80B10 (Tj=85°C) >60.000h


## OTHER DATA

Ingress Protection	IP20
Recess measurements	Ø73 mm.
Swivel angle	25°
Rotation angle	355°
Weight	230 g.
Packaged weight	300 g.
Packaging dimensions	156 x 130 x 186 mm
Units per package	1
Materials	Aluminium / Polycarbonate





Wellit is a family of recessed luminaires, that comes in 3 sizes and can be adjusted with a rotation and tilting system. Wellit offers outstanding technical features. It is a compact product: its 3 sizes are consistent with a luminous flux level that is commensurate with its dimensions. It is also noteworthy for its efficient thermal management thanks to an excellently designed dissipation system. With Wellit, the interior designer will have great versatility in terms of applications, for general, retail and contract lighting.

POLAR DIAGRAM

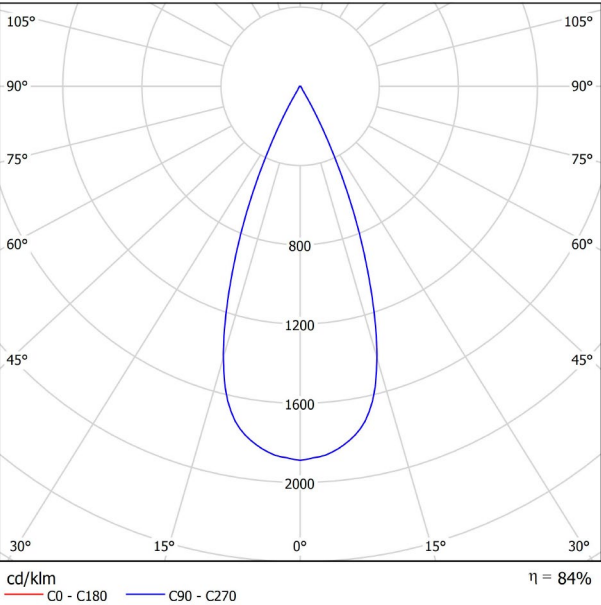

CONICAL DIAGRAM

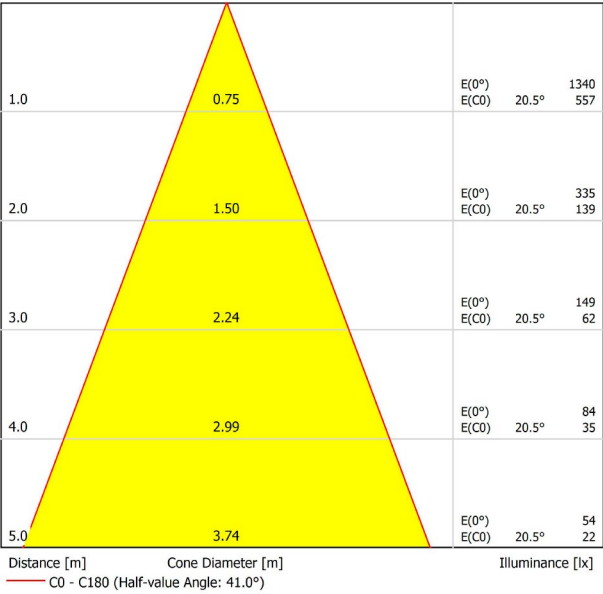



PRODUCT	
Model	Anti-glare Honeycomb Louver
Reference	A380-00-00
Category	Accessories
NOT SOLD SEPARATELY.	




Accessory made up of louver in the shape of a honeycomb panel to reduce glare and the effects of direct rays of vision.





## DIMENSIONS



## ACCESSORIES

ANTI-GLARE HONEYCOMB  
LOUVER

## PRODUCT

Name	WELLIT S 2 19° 3000K NT
Reference	A3802111NT
Color	Textured black
RAL	9005
Category	CEILING RECESSED

## LIGHTING INFORMATION

Light source	LED
Gross luminous flux	940 Lm
Power	7 W
Power values of the system	7 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	19°
Lighting efficiency	80%
Efficacy	134 Lm/W
Current intensity	200 mA
Control through bluetooth	Please Consult
Driver	Included
Emergency power supply	Please Consult
Electrical insulation class	□
Voltage	230 V
Frequency	50/60 Hz
Energy efficiency	A++
LED lifespan	L80B10 (Tj=85°C) >60.000h


## OTHER DATA

Ingress Protection	IP20
Recess measurements	Ø73 mm.
Swivel angle	25°
Rotation angle	355°
Weight	230 g.
Packaged weight	300 g.
Packaging dimensions	156 x 130 x 186 mm
Units per package	1
Materials	Aluminium / Polycarbonate





Wellit is a family of recessed luminaires, that comes in 3 sizes and can be adjusted with a rotation and tilting system. Wellit offers outstanding technical features. It is a compact product: its 3 sizes are consistent with a luminous flux level that is commensurate with its dimensions. It is also noteworthy for its efficient thermal management thanks to an excellently designed dissipation system. With Wellit, the interior designer will have great versatility in terms of applications, for general, retail and contract lighting.

POLAR DIAGRAM

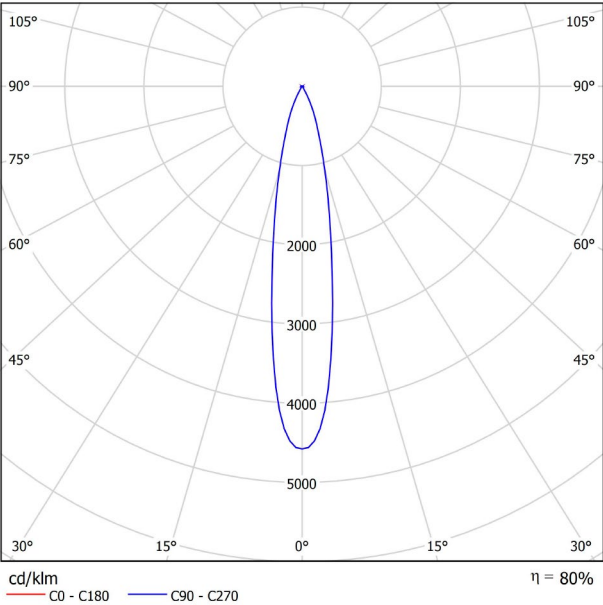

CONICAL DIAGRAM

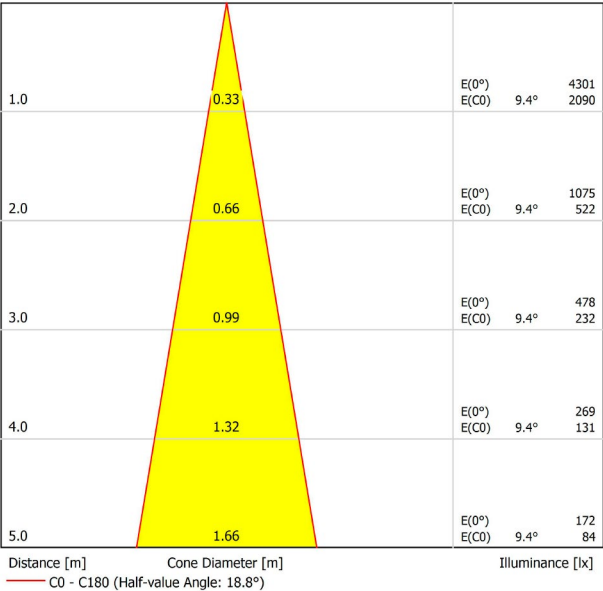




	PRODUCT
Model	Anti-glare Honeycomb Louver
Reference	A380-00-00
Category	Accessories
	NOT SOLD SEPARATELY.



Accessory made up of louver in the shape of a honeycomb panel to reduce glare and the effects of direct rays of vision.



## DIMENSIONS



## ACCESSORIES

ANTI-GLARE HONEYCOMB  
LOUVER

## PRODUCT

Name	WELLIT S 2 19° 3000K WT
Reference	A3802111WT
Color	Textured white
RAL	9016
Category	CEILING RECESSED

## LIGHTING INFORMATION

Light source	LED
Gross luminous flux	940 Lm
Power	7 W
Power values of the system	7 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	19°
Lighting efficiency	80%
Efficacy	134 Lm/W
Current intensity	200 mA
Control through bluetooth	Please Consult
Driver	Included
Emergency power supply	Please Consult
Electrical insulation class	□
Voltage	230 V
Frequency	50/60 Hz
Energy efficiency	A++
LED lifespan	L80B10 (Tj=85°C) >60.000h


## OTHER DATA

Ingress Protection	IP20
Recess measurements	Ø73 mm.
Swivel angle	25°
Rotation angle	355°
Weight	230 g.
Packaged weight	300 g.
Packaging dimensions	156 x 130 x 186 mm
Units per package	1
Materials	Aluminium / Polycarbonate





Wellit is a family of recessed luminaires, that comes in 3 sizes and can be adjusted with a rotation and tilting system. Wellit offers outstanding technical features. It is a compact product: its 3 sizes are consistent with a luminous flux level that is commensurate with its dimensions. It is also noteworthy for its efficient thermal management thanks to an excellently designed dissipation system. With Wellit, the interior designer will have great versatility in terms of applications, for general, retail and contract lighting.

POLAR DIAGRAM

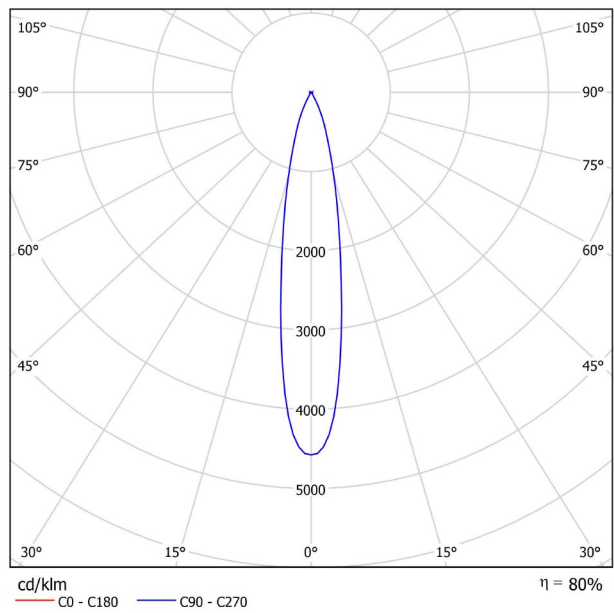

CONICAL DIAGRAM

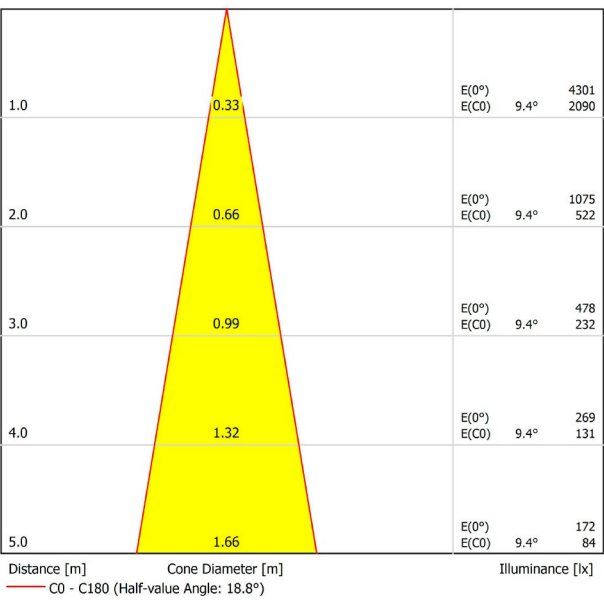




PRODUCT	
Model	Anti-glare Honeycomb Louver
Reference	A380-00-00
Category	Accessories
NOT SOLD SEPARATELY.	



Accessory made up of louver in the shape of a honeycomb panel to reduce glare and the effects of direct rays of vision.



## DIMENSIONS



## ACCESSORIES

ANTI-GLARE HONEYCOMB  
LOUVER

## PRODUCT

Name	WELLIT S 2 19° 4000K NT
Reference	A3802112NT
Color	Textured black
RAL	9005
Category	CEILING RECESSED

## LIGHTING INFORMATION

Light source	LED
Gross luminous flux	960 Lm
Power	7 W
Power values of the system	7 W
Colour temperature	4000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	19°
Lighting efficiency	80%
Efficacy	137 Lm/W
Current intensity	200 mA
Control through bluetooth	Please Consult
Driver	Included
Emergency power supply	Please Consult
Electrical insulation class	□
Voltage	230 V
Frequency	50/60 Hz
Energy efficiency	A++
LED lifespan	L80B10 (Tj=85°C) >60.000h


## OTHER DATA

Ingress Protection	IP20
Recess measurements	Ø73 mm.
Swivel angle	25°
Rotation angle	355°
Weight	230 g.
Packaged weight	300 g.
Packaging dimensions	156 x 130 x 186 mm
Units per package	1
Materials	Aluminium / Polycarbonate




Wellit is a family of recessed luminaires, that comes in 3 sizes and can be adjusted with a rotation and tilting system. Wellit offers outstanding technical features. It is a compact product: its 3 sizes are consistent with a luminous flux level that is commensurate with its dimensions. It is also noteworthy for its efficient thermal management thanks to an excellently designed dissipation system. With Wellit, the interior designer will have great versatility in terms of applications, for general, retail and contract lighting.


POLAR DIAGRAM

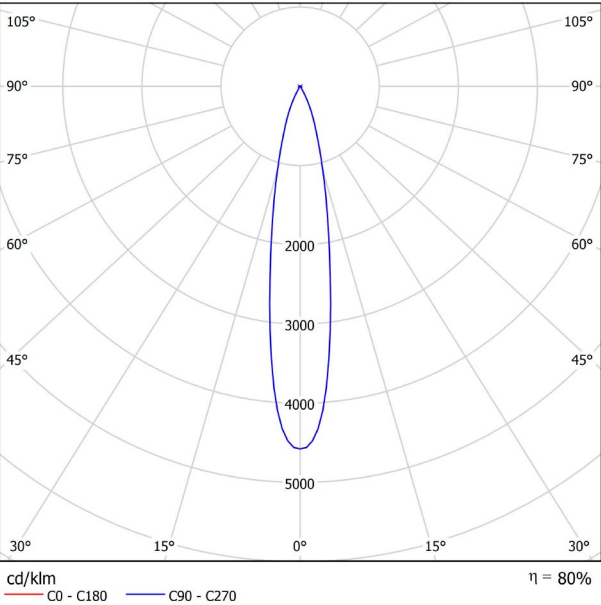

CONICAL DIAGRAM

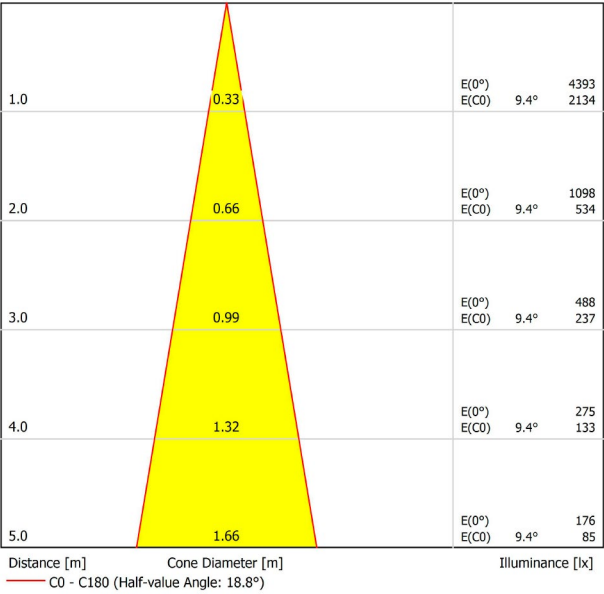






PRODUCT	
Model	Anti-glare Honeycomb Louver
Reference	A380-00-00
Category	Accessories
NOT SOLD SEPARATELY.	



Accessory made up of louver in the shape of a honeycomb panel to reduce glare and the effects of direct rays of vision.



## DIMENSIONS



## ACCESSORIES

ANTI-GLARE HONEYCOMB  
LOUVER

## PRODUCT

Name	WELLIT S 2 19° 4000K WT
Reference	A3802112WT
Color	Textured white
RAL	9016
Category	CEILING RECESSED

## LIGHTING INFORMATION

Light source	LED
Gross luminous flux	960 Lm
Power	7 W
Power values of the system	7 W
Colour temperature	4000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	19°
Lighting efficiency	80%
Efficacy	137 Lm/W
Current intensity	200 mA
Control through bluetooth	Please Consult
Driver	Included
Emergency power supply	Please Consult
Electrical insulation class	□
Voltage	230 V
Frequency	50/60 Hz
Energy efficiency	A++
LED lifespan	L80B10 (Tj=85°C) >60.000h


## OTHER DATA

Ingress Protection	IP20
Recess measurements	Ø73 mm.
Swivel angle	25°
Rotation angle	355°
Weight	230 g.
Packaged weight	300 g.
Packaging dimensions	156 x 130 x 186 mm
Units per package	1
Materials	Aluminium / Polycarbonate





Wellit is a family of recessed luminaires, that comes in 3 sizes and can be adjusted with a rotation and tilting system. Wellit offers outstanding technical features. It is a compact product: its 3 sizes are consistent with a luminous flux level that is commensurate with its dimensions. It is also noteworthy for its efficient thermal management thanks to an excellently designed dissipation system. With Wellit, the interior designer will have great versatility in terms of applications, for general, retail and contract lighting.

POLAR DIAGRAM

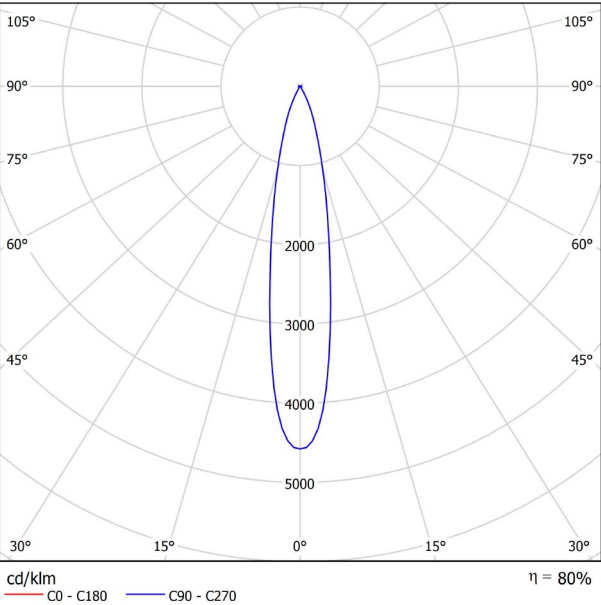

CONICAL DIAGRAM

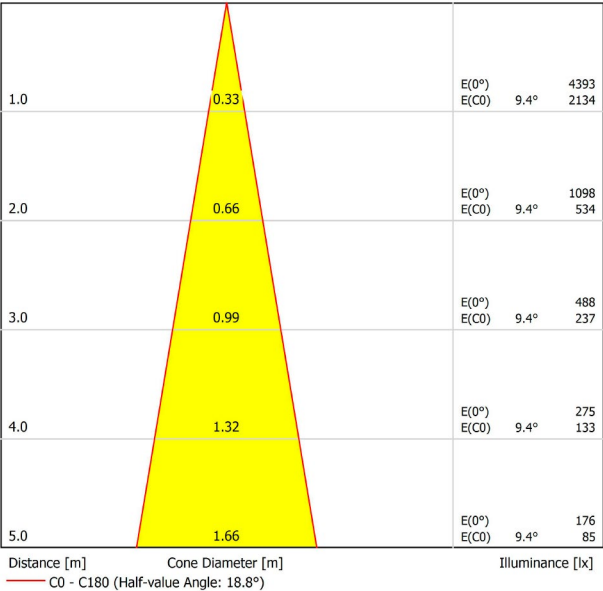




PRODUCT	
Model	Anti-glare Honeycomb Louver
Reference	A380-00-00
Category	Accessories
NOT SOLD SEPARATELY.	



Accessory made up of louver in the shape of a honeycomb panel to reduce glare and the effects of direct rays of vision.



## DIMENSIONS



## ACCESSORIES

ANTI-GLARE HONEYCOMB  
LOUVER

## PRODUCT

Name	WELLIT S 2 26° 3000K NT
Reference	A3802121NT
Color	Textured black
RAL	9005
Category	CEILING RECESSED

## LIGHTING INFORMATION

Light source	LED
Gross luminous flux	940 Lm
Power	7 W
Power values of the system	7 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	26°
Lighting efficiency	89%
Efficacy	134 Lm/W
Current intensity	200 mA
Control through bluetooth	Please Consult
Driver	Included
Emergency power supply	Please Consult
Electrical insulation class	□
Voltage	230 V
Frequency	50/60 Hz
Energy efficiency	A++
LED lifespan	L80B10 (Tj=85°C) >60.000h


## OTHER DATA

Ingress Protection	IP20
Recess measurements	Ø73 mm.
Swivel angle	25°
Rotation angle	355°
Weight	230 g.
Packaged weight	300 g.
Packaging dimensions	156 x 130 x 186 mm
Units per package	1
Materials	Aluminium / Polycarbonate





Wellit is a family of recessed luminaires, that comes in 3 sizes and can be adjusted with a rotation and tilting system. Wellit offers outstanding technical features. It is a compact product: its 3 sizes are consistent with a luminous flux level that is commensurate with its dimensions. It is also noteworthy for its efficient thermal management thanks to an excellently designed dissipation system. With Wellit, the interior designer will have great versatility in terms of applications, for general, retail and contract lighting.

POLAR DIAGRAM

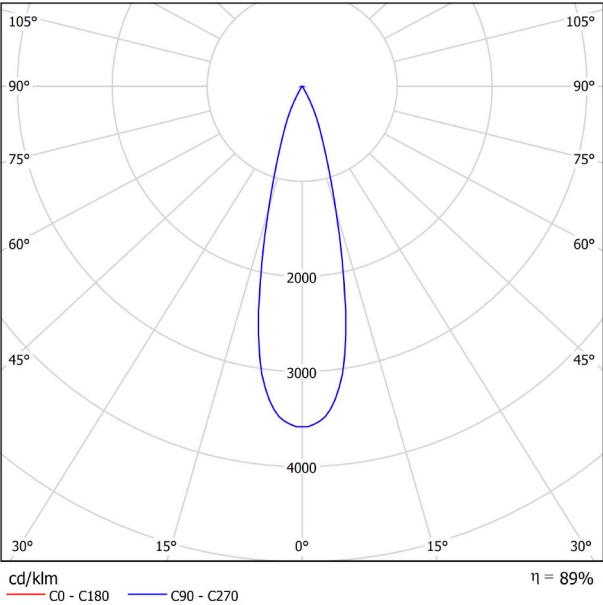

CONICAL DIAGRAM

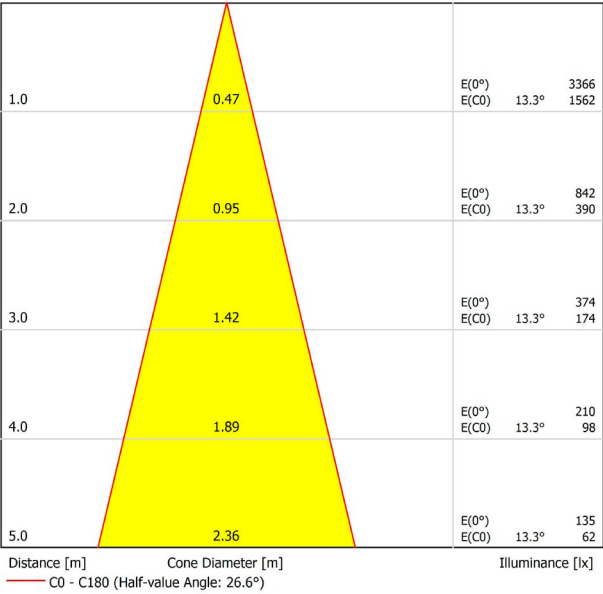




PRODUCT	
Model	Anti-glare Honeycomb Louver
Reference	A380-00-00
Category	Accessories
NOT SOLD SEPARATELY.	



Accessory made up of louver in the shape of a honeycomb panel to reduce glare and the effects of direct rays of vision.



## DIMENSIONS



## ACCESSORIES

ANTI-GLARE HONEYCOMB  
LOUVER

## PRODUCT

Name	WELLIT S 2 26° 3000K WT
Reference	A3802121WT
Color	Textured white
RAL	9016
Category	CEILING RECESSED

## LIGHTING INFORMATION

Light source	LED
Gross luminous flux	940 Lm
Power	7 W
Power values of the system	7 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	26°
Lighting efficiency	89%
Efficacy	134 Lm/W
Current intensity	200 mA
Control through bluetooth	Please Consult
Driver	Included
Emergency power supply	Please Consult
Electrical insulation class	□
Voltage	230 V
Frequency	50/60 Hz
Energy efficiency	A++
LED lifespan	L80B10 (Tj=85°C) >60.000h

## OTHER DATA


Ingress Protection	IP20
Recess measurements	Ø73 mm.
Swivel angle	25°
Rotation angle	355°
Weight	230 g.
Packaged weight	300 g.
Packaging dimensions	156 x 130 x 186 mm
Units per package	1
Materials	Aluminium / Polycarbonate




Wellit is a family of recessed luminaires, that comes in 3 sizes and can be adjusted with a rotation and tilting system. Wellit offers outstanding technical features. It is a compact product: its 3 sizes are consistent with a luminous flux level that is commensurate with its dimensions. It is also noteworthy for its efficient thermal management thanks to an excellently designed dissipation system. With Wellit, the interior designer will have great versatility in terms of applications, for general, retail and contract lighting.




POLAR DIAGRAM

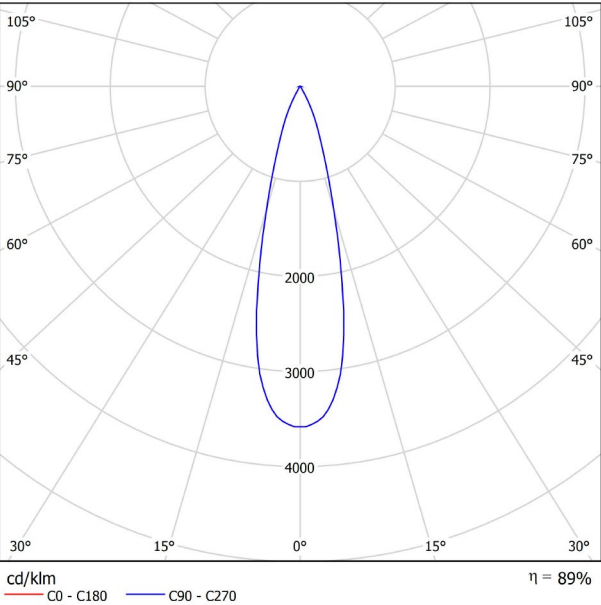

CONICAL DIAGRAM

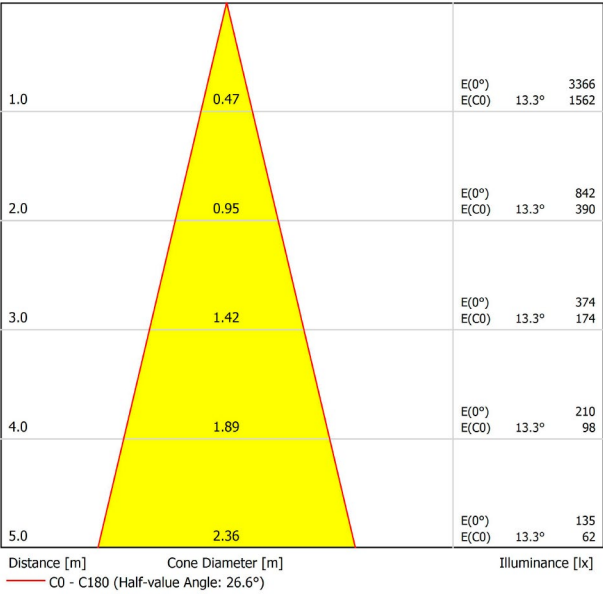




PRODUCT	
Model	Anti-glare Honeycomb Louver
Reference	A380-00-00
Category	Accessories
NOT SOLD SEPARATELY.	



Accessory made up of louver in the shape of a honeycomb panel to reduce glare and the effects of direct rays of vision.



## DIMENSIONS



## ACCESSORIES

ANTI-GLARE HONEYCOMB  
LOUVER

## PRODUCT

Name	WELLIT S 2 26° 4000K NT
Reference	A3802122NT
Color	Textured black
RAL	9005
Category	CEILING RECESSED

## LIGHTING INFORMATION

Light source	LED
Gross luminous flux	960 Lm
Power	7 W
Power values of the system	7 W
Colour temperature	4000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	26°
Lighting efficiency	89%
Efficacy	137 Lm/W
Current intensity	200 mA
Control through bluetooth	Please Consult
Driver	Included
Emergency power supply	Please Consult
Electrical insulation class	□
Voltage	230 V
Frequency	50/60 Hz
Energy efficiency	A++
LED lifespan	L80B10 (Tj=85°C) >60.000h


## OTHER DATA

Ingress Protection	IP20
Recess measurements	Ø73 mm.
Swivel angle	25°
Rotation angle	355°
Weight	230 g.
Packaged weight	300 g.
Packaging dimensions	156 x 130 x 186 mm
Units per package	1
Materials	Aluminium / Polycarbonate





Wellit is a family of recessed luminaires, that comes in 3 sizes and can be adjusted with a rotation and tilting system. Wellit offers outstanding technical features. It is a compact product: its 3 sizes are consistent with a luminous flux level that is commensurate with its dimensions. It is also noteworthy for its efficient thermal management thanks to an excellently designed dissipation system. With Wellit, the interior designer will have great versatility in terms of applications, for general, retail and contract lighting.

POLAR DIAGRAM

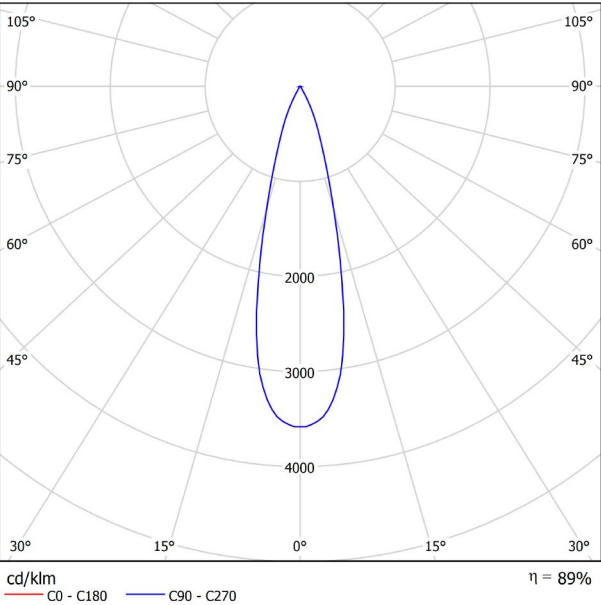

CONICAL DIAGRAM

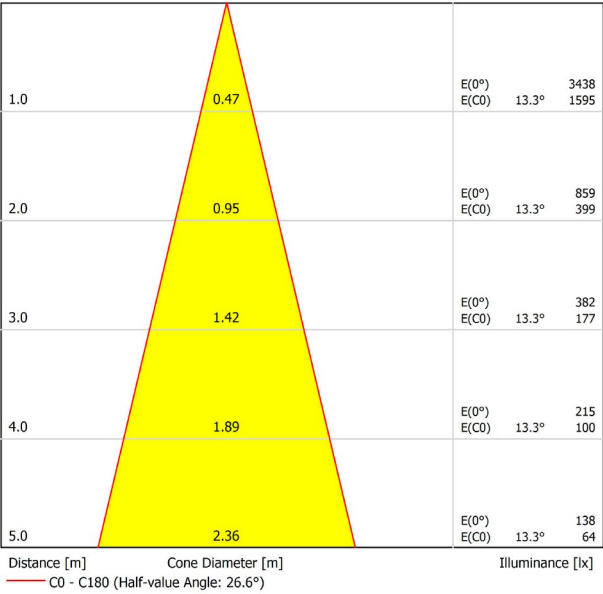




	PRODUCT
Model	Anti-glare Honeycomb Louver
Reference	A380-00-00
Category	Accessories
	NOT SOLD SEPARATELY.



Accessory made up of louver in the shape of a honeycomb panel to reduce glare and the effects of direct rays of vision.



## DIMENSIONS



## ACCESSORIES

ANTI-GLARE HONEYCOMB  
LOUVER

## PRODUCT

Name	WELLIT S 2 26° 4000K WT
Reference	A3802122WT
Color	Textured white
RAL	9016
Category	CEILING RECESSED

## LIGHTING INFORMATION

Light source	LED
Gross luminous flux	960 Lm
Power	7 W
Power values of the system	7 W
Colour temperature	4000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	26°
Lighting efficiency	89%
Efficacy	137 Lm/W
Current intensity	200 mA
Control through bluetooth	Please Consult
Driver	Included
Emergency power supply	Please Consult
Electrical insulation class	□
Voltage	230 V
Frequency	50/60 Hz
Energy efficiency	A++
LED lifespan	L80B10 (Tj=85°C) >60.000h


## OTHER DATA

Ingress Protection	IP20
Recess measurements	Ø73 mm.
Swivel angle	25°
Rotation angle	355°
Weight	230 g.
Packaged weight	300 g.
Packaging dimensions	156 x 130 x 186 mm
Units per package	1
Materials	Aluminium / Polycarbonate





Wellit is a family of recessed luminaires, that comes in 3 sizes and can be adjusted with a rotation and tilting system. Wellit offers outstanding technical features. It is a compact product: its 3 sizes are consistent with a luminous flux level that is commensurate with its dimensions. It is also noteworthy for its efficient thermal management thanks to an excellently designed dissipation system. With Wellit, the interior designer will have great versatility in terms of applications, for general, retail and contract lighting.

POLAR DIAGRAM

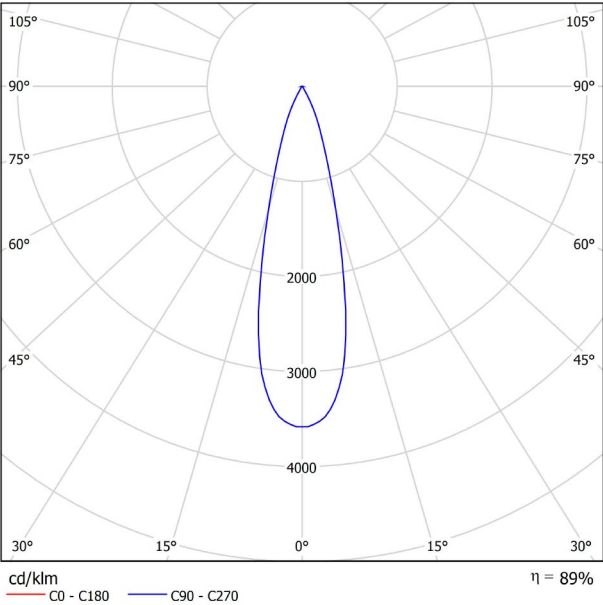

CONICAL DIAGRAM

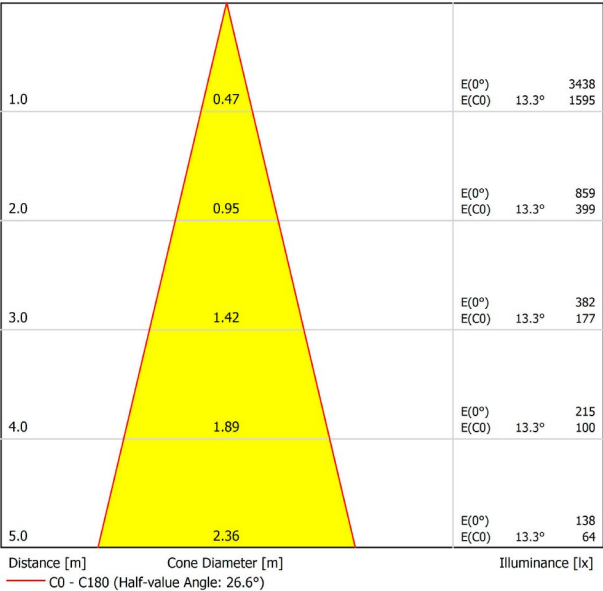



PRODUCT	
Model	Anti-glare Honeycomb Louver
Reference	A380-00-00
Category	Accessories

NOT SOLD SEPARATELY.



Accessory made up of louver in the shape of a honeycomb panel to reduce glare and the effects of direct rays of vision.