




DIMENSIONS



AWARDS



Name	BLACK FOSTER TRI 2 SPOT DIM PUSH 2700K N
Reference	A3182120N
Color	Matt black
RAL	9005
Category	CEILING RECESSED

PRODUCT

Light source	LED
Gross luminous flux	380 Lm
Power	4,2 W
Power values of the system	4,77 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 3
Light beam angle	19°
Lighting efficiency	90%
Efficacy	90 Lm/W
Current intensity	700 mA
Dimming	Push
Control through bluetooth	Please Consult
Driver	Included - Connected
Emergency power supply	Please Consult
Electrical insulation class	□
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


Ingress Protection	IP20
Recess measurements	50 × 93 mm.
Weight	255 g.
Packaged weight	350 g.
Packaging dimensions	212 × 155 × 73 mm
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene / Polycarbonate

OTHER DATA




Black Foster is the product that transfers the claimed effect "The Invisible Black" to a recessed-isolated lineal luminary; also available in trimless version. If we take a closer view to the recessed model, its bezel is so thin than when lighted up, it is unperceived; offering an aesthetic of "visual trimless". Black Foster stands out for its refinement, its visual comfort and for almost completely hide the source of light from the human eye range.

POLAR DIAGRAM

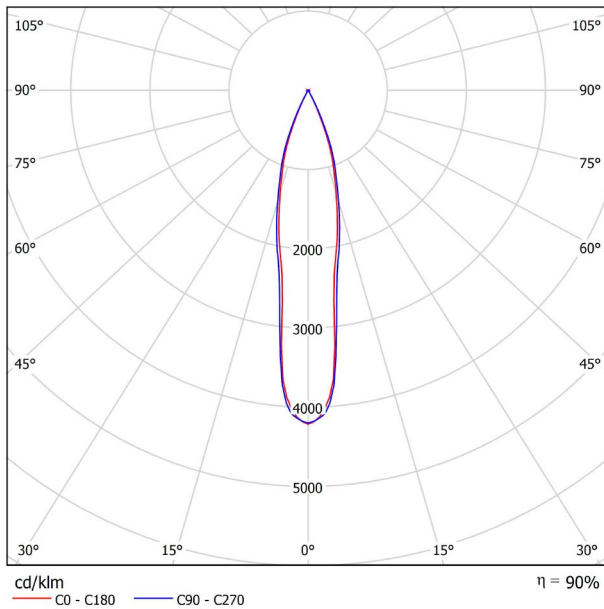

CONICAL DIAGRAM

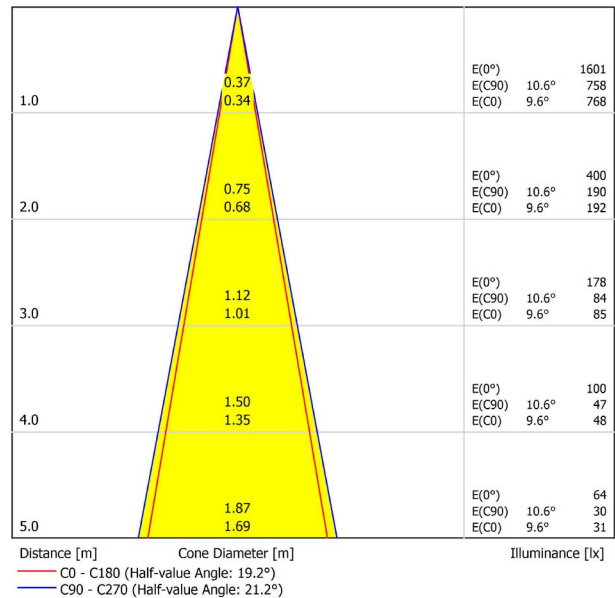


UGR

Glare Evaluation According to UGR												
ρ Ceiling		70	70	50	50	30	70	70	50	50	30	
ρ Walls		50	30	50	30	30	50	30	50	30	30	
ρ Floor		20	20	20	20	20	20	20	20	20	20	
Room Size X Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis					
2H	2H	4.3	4.9	4.5	5.1	5.3	4.0	4.6	4.2	4.8	5.0	
	3H	8.0	8.6	8.3	8.9	9.1	7.5	8.1	7.8	8.4	8.6	
	4H	9.9	10.5	10.2	10.8	11.0	9.5	10.1	9.8	10.4	10.6	
	6H	11.9	12.5	12.3	12.8	13.1	11.6	12.1	11.9	12.4	12.7	
	8H	13.1	13.6	13.4	13.9	14.2	12.9	13.4	13.2	13.7	14.0	
4H	12H	14.4	14.9	14.7	15.2	15.5	14.2	14.7	14.5	15.0	15.3	
	2H	5.3	5.9	5.6	6.2	6.4	5.1	5.7	5.4	6.0	6.2	
	3H	9.2	9.7	9.6	10.0	10.4	8.9	9.4	9.3	9.7	10.0	
	4H	11.3	11.7	11.6	12.0	12.4	11.1	11.5	11.4	11.8	12.2	
	6H	13.5	13.9	13.9	14.3	14.6	13.3	13.6	13.7	14.0	14.4	
8H	8H	14.8	15.1	15.2	15.5	15.9	14.7	15.0	15.1	15.4	15.8	
	12H	16.2	16.5	16.6	16.9	17.3	16.1	16.4	16.5	16.8	17.2	
	4H	12.1	12.4	12.5	12.8	13.2	11.9	12.3	12.3	12.6	13.0	
	6H	14.7	14.9	15.1	15.3	15.8	14.5	14.7	14.9	15.1	15.6	
	8H	16.1	16.3	16.5	16.7	17.2	16.0	16.2	16.5	16.6	17.1	
12H	12H	17.7	17.9	18.2	18.3	18.8	17.6	17.8	18.1	18.2	18.7	
	4H	12.4	12.6	12.8	13.0	13.5	12.2	12.5	12.6	12.9	13.3	
	6H	15.0	15.2	15.5	15.7	16.1	14.9	15.1	15.3	15.5	16.0	
8H		16.5	16.7	17.0	17.1	17.6	16.5	16.6	17.0	17.1	17.6	
Variation of the observer position for the luminaire distances S												
S = 1.0H		+0.2 / -0.1					+0.2 / -0.2					
S = 1.5H		+0.3 / -0.3					+0.3 / -0.3					
S = 2.0H		+0.5 / -0.5					+0.5 / -0.5					
Standard table		---					---					
Correction		---					---					
Summand		---					---					
Corrected Glare Indices referring to 380lm Total Luminous Flux												



DIMENSIONS



AWARDS



PRODUCT

Name	BLACK FOSTER TRI 2 SPOT DIM PUSH 2700K NMG
Reference	A3182120NMG
Color	Matt black-Metallized gold
RAL	Metalllic finish
Category	CEILING RECESSED

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	380 Lm
Power	4,2 W
Power values of the system	4,83 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 3
Light beam angle	19°
Lighting efficiency	90%
Efficacy	90 Lm/W
Current intensity	700 mA
Dimming	Push
Control through bluetooth	Please Consult
Driver	Included - Connected
Emergency power supply	Please Consult
Electrical insulation class	□
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Recess measurements	50 × 93 mm.
Weight	255 g.
Packaged weight	350 g.
Packaging dimensions	212 × 155 × 73 mm
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene / Polycarbonate




Black Foster is the product that transfers the claimed effect "The Invisible Black" to a recessed-isolated lineal luminary; also available in trimless version. If we take a closer view to the recessed model, its bezel is so thin than when lighted up, it is unperceived; offering an aesthetic of "visual trimless". Black Foster stands out for its refinement, its visual comfort and for almost completely hide the source of light from the human eye range.

POLAR DIAGRAM

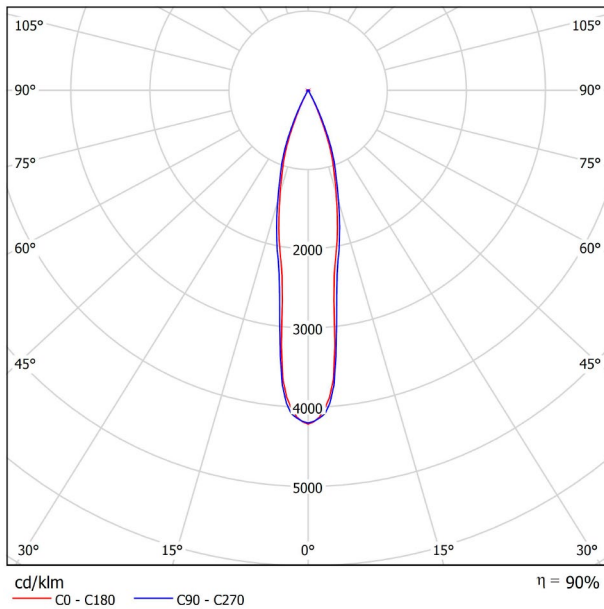

CONICAL DIAGRAM

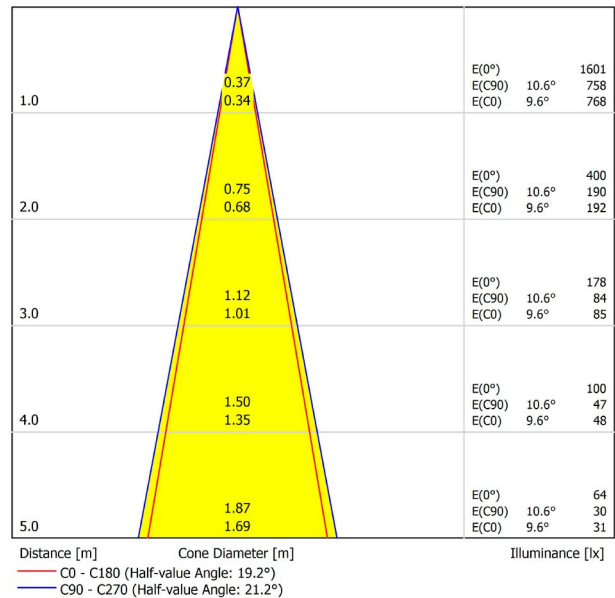


UGR

Glare Evaluation According to UGR												
ρ Ceiling		70	70	50	50	30	70	70	50	50	30	
ρ Walls		50	30	50	30	30	50	30	50	30	30	
ρ Floor		20	20	20	20	20	20	20	20	20	20	
Room Size X Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis					
2H	2H	4.3	4.9	4.5	5.1	5.3	4.0	4.6	4.2	4.8	5.0	
	3H	8.0	8.6	8.3	8.9	9.1	7.5	8.1	7.8	8.4	8.6	
	4H	9.9	10.5	10.2	10.8	11.0	9.5	10.1	9.8	10.4	10.6	
	6H	11.9	12.5	12.3	12.8	13.1	11.6	12.1	11.9	12.4	12.7	
	8H	13.1	13.6	13.4	13.9	14.2	12.9	13.4	13.2	13.7	14.0	
4H	12H	14.4	14.9	14.7	15.2	15.5	14.2	14.7	14.5	15.0	15.3	
	2H	5.3	5.9	5.6	6.2	6.4	5.1	5.7	5.4	6.0	6.2	
	3H	9.2	9.7	9.6	10.0	10.4	8.9	9.4	9.3	9.7	10.0	
	4H	11.3	11.7	11.6	12.0	12.4	11.1	11.5	11.4	11.8	12.2	
	6H	13.5	13.9	13.9	14.3	14.6	13.3	13.6	13.7	14.0	14.4	
8H	8H	14.8	15.1	15.2	15.5	15.9	14.7	15.0	15.1	15.4	15.8	
	12H	16.2	16.5	16.6	16.9	17.3	16.1	16.4	16.5	16.8	17.2	
	4H	12.1	12.4	12.5	12.8	13.2	11.9	12.3	12.3	12.6	13.0	
	6H	14.7	14.9	15.1	15.3	15.8	14.5	14.7	14.9	15.1	15.6	
	8H	16.1	16.3	16.5	16.7	17.2	16.0	16.2	16.5	16.6	17.1	
12H	12H	17.7	17.9	18.2	18.3	18.8	17.6	17.8	18.1	18.2	18.7	
	4H	12.4	12.6	12.8	13.0	13.5	12.2	12.5	12.6	12.9	13.3	
	6H	15.0	15.2	15.5	15.7	16.1	14.9	15.1	15.3	15.5	16.0	
8H		16.5	16.7	17.0	17.1	17.6	16.5	16.6	17.0	17.1	17.6	
Variation of the observer position for the luminaire distances S												
S = 1.0H		+0.2 / -0.1					+0.2 / -0.2					
S = 1.5H		+0.3 / -0.3					+0.3 / -0.3					
S = 2.0H		+0.5 / -0.5					+0.5 / -0.5					
Standard table		---					---					
Correction		---					---					
Summand		---					---					
Corrected Glare Indices referring to 380lm Total Luminous Flux												



DIMENSIONS



AWARDS



Name	BLACK FOSTER TRI 2 SPOT DIM PUSH 3000K N
Reference	A3182121N
Color	Matt black
RAL	9005
Category	CEILING RECESSED

PRODUCT

LIGHTING INFORMATION

LED

420 Lm

4,2 W

4,77 W

3000 K

CRI>90

MacAdam Step 3

19°

90%

100 Lm/W

700 mA

Push

Please Consult

Included - Connected

Please Consult



220 V/240 V

50/60 Hz

A+

L80B10 (Tc=85°C) >60.000h

OTHER DATA

IP20

50 × 93 mm.

255 g.

350 g.

212 × 155 × 73 mm

1

Aluminium / Acrylonitrile Butadiene Styrene / Polycarbonate




Light source	LED
Gross luminous flux	420 Lm
Power	4,2 W
Power values of the system	4,77 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 3
Light beam angle	19°
Lighting efficiency	90%
Efficacy	100 Lm/W
Current intensity	700 mA
Dimming	Push
Control through bluetooth	Please Consult
Driver	Included - Connected
Emergency power supply	Please Consult
Electrical insulation class	
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


Ingress Protection	IP20
Recess measurements	50 × 93 mm.
Weight	255 g.
Packaged weight	350 g.
Packaging dimensions	212 × 155 × 73 mm
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene / Polycarbonate

Black Foster is the product that transfers the claimed effect "The Invisible Black" to a recessed-isolated lineal luminary; also available in trimless version. If we take a closer view to the recessed model, its bezel is so thin than when lighted up, it is unperceived; offering an aesthetic of "visual trimless". Black Foster stands out for its refinement, its visual comfort and for almost completely hide the source of light from the human eye range.

POLAR DIAGRAM

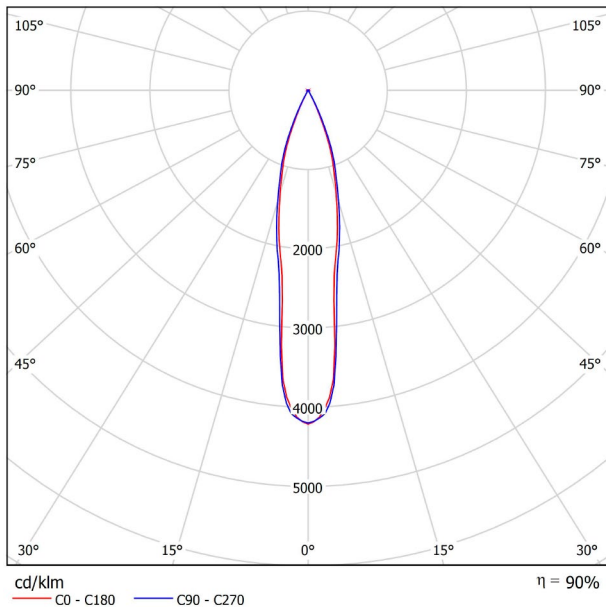

CONICAL DIAGRAM

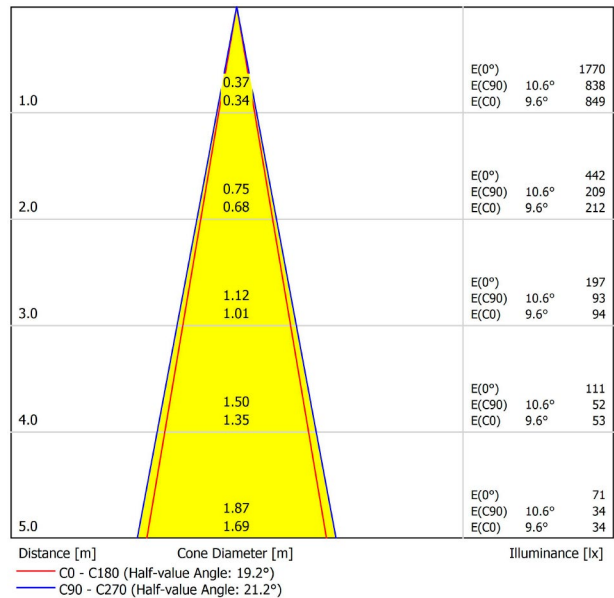


UGR

Glare Evaluation According to UGR												
ρ Ceiling		70	70	50	50	30	70	70	50	50	30	30
ρ Walls		50	30	50	30	30	50	30	50	30	30	30
ρ Floor		20	20	20	20	20	20	20	20	20	20	20
Room Size X Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis					
2H	2H	4.6	5.3	4.9	5.5	5.7	4.3	5.0	4.6	5.2	5.4	
	3H	8.4	9.0	8.6	9.2	9.4	7.9	8.5	8.1	8.7	8.9	
	4H	10.3	10.8	10.6	11.1	11.4	9.9	10.5	10.2	10.7	11.0	
	6H	12.3	12.8	12.6	13.1	13.4	11.9	12.5	12.3	12.7	13.0	
	8H	13.4	13.9	13.7	14.2	14.5	13.2	13.7	13.6	14.0	14.3	
4H	12H	14.7	15.2	15.1	15.5	15.8	14.5	15.0	14.9	15.3	15.7	
	2H	5.7	6.3	6.0	6.5	6.8	5.5	6.1	5.8	6.3	6.6	
	3H	9.6	10.1	9.9	10.4	10.7	9.3	9.8	9.6	10.1	10.4	
	4H	11.6	12.1	12.0	12.4	12.7	11.4	11.8	11.8	12.2	12.5	
	6H	13.9	14.2	14.3	14.6	15.0	13.6	14.0	14.0	14.4	14.7	
8H	8H	15.1	15.4	15.5	15.8	16.2	15.0	15.3	15.4	15.7	16.1	
	12H	16.6	16.8	17.0	17.2	17.6	16.4	16.7	16.9	17.1	17.5	
	4H	12.4	12.8	12.9	13.1	13.5	12.3	12.6	12.7	13.0	13.4	
	6H	15.0	15.2	15.5	15.7	16.1	14.8	15.1	15.3	15.5	15.9	
	8H	16.4	16.6	16.9	17.0	17.5	16.3	16.5	16.8	17.0	17.5	
12H	12H	18.0	18.2	18.5	18.7	19.2	18.0	18.1	18.4	18.6	19.1	
	4H	12.7	13.0	13.1	13.4	13.8	12.6	12.8	13.0	13.2	13.7	
	6H	15.4	15.6	15.8	16.0	16.5	15.2	15.4	15.7	15.9	16.3	
	8H	16.9	17.0	17.4	17.5	18.0	16.8	17.0	17.3	17.4	17.9	
Variation of the observer position for the luminaire distances S												
S = 1.0H		+0.2 / -0.1					+0.2 / -0.2					
S = 1.5H		+0.3 / -0.3					+0.3 / -0.3					
S = 2.0H		+0.5 / -0.5					+0.5 / -0.5					
Standard table		---					---					
Correction		---					---					
Summand		---					---					
Corrected Glare Indices referring to 420lm Total Luminous Flux												



DIMENSIONS



AWARDS



PRODUCT

Name	BLACK FOSTER TRI 2 SPOT DIM PUSH 3000K NMG
Reference	A3182121NMG
Color	Matt black-Metallized gold
RAL	Metallic finish
Category	CEILING RECESSED

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	420 Lm
Power	4,2 W
Power values of the system	4,83 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 3
Light beam angle	19°
Lighting efficiency	90%
Efficacy	100 Lm/W
Current intensity	700 mA
Dimming	Push
Control through bluetooth	Please Consult
Driver	Included - Connected
Emergency power supply	Please Consult
Electrical insulation class	□
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Recess measurements	50 × 93 mm.
Weight	255 g.
Packaged weight	350 g.
Packaging dimensions	212 × 155 × 73 mm
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene / Polycarbonate




Black Foster is the product that transfers the claimed effect "The Invisible Black" to a recessed-isolated lineal luminary; also available in trimless version. If we take a closer view to the recessed model, its bezel is so thin than when lighted up, it is unperceived; offering an aesthetic of "visual trimless". Black Foster stands out for its refinement, its visual comfort and for almost completely hide the source of light from the human eye range.

POLAR DIAGRAM

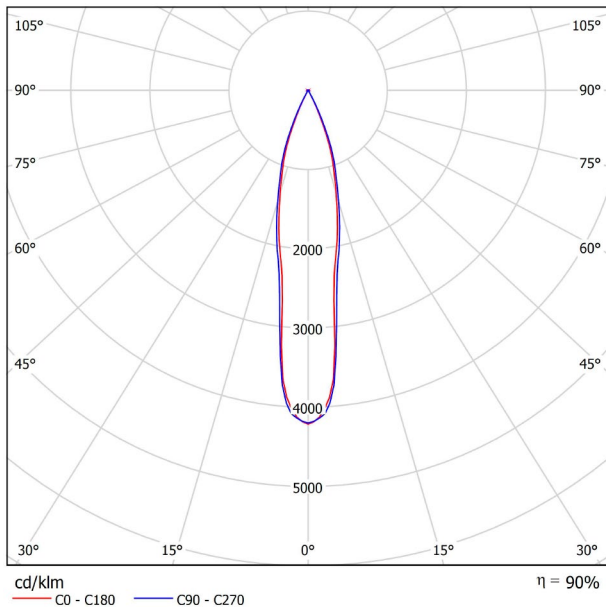

CONICAL DIAGRAM

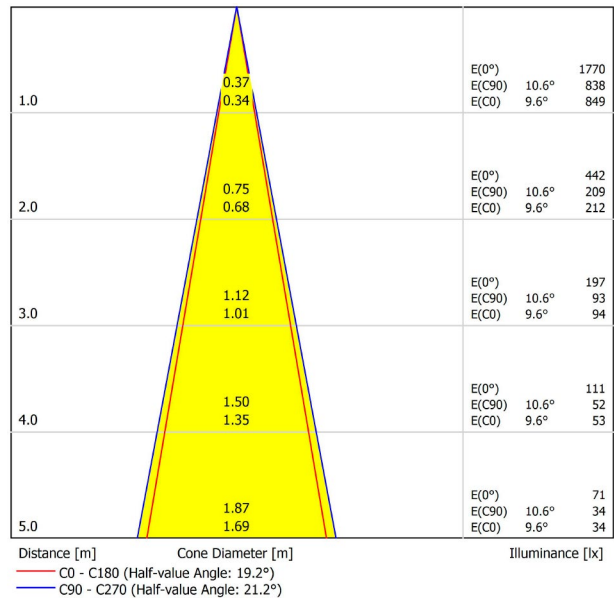


UGR

Glare Evaluation According to UGR												
ρ Ceiling		70	70	50	50	30	70	70	50	50	30	30
ρ Walls		50	30	50	30	30	50	30	50	30	30	30
ρ Floor		20	20	20	20	20	20	20	20	20	20	20
Room Size X Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis					
2H	2H	4.6	5.3	4.9	5.5	5.7	4.3	5.0	4.6	5.2	5.4	
	3H	8.4	9.0	8.6	9.2	9.4	7.9	8.5	8.1	8.7	8.9	
	4H	10.3	10.8	10.6	11.1	11.4	9.9	10.5	10.2	10.7	11.0	
	6H	12.3	12.8	12.6	13.1	13.4	11.9	12.5	12.3	12.7	13.0	
	8H	13.4	13.9	13.7	14.2	14.5	13.2	13.7	13.6	14.0	14.3	
4H	12H	14.7	15.2	15.1	15.5	15.8	14.5	15.0	14.9	15.3	15.7	
	2H	5.7	6.3	6.0	6.5	6.8	5.5	6.1	5.8	6.3	6.6	
	3H	9.6	10.1	9.9	10.4	10.7	9.3	9.8	9.6	10.1	10.4	
	4H	11.6	12.1	12.0	12.4	12.7	11.4	11.8	11.8	12.2	12.5	
	6H	13.9	14.2	14.3	14.6	15.0	13.6	14.0	14.0	14.4	14.7	
8H	8H	15.1	15.4	15.5	15.8	16.2	15.0	15.3	15.4	15.7	16.1	
	12H	16.6	16.8	17.0	17.2	17.6	16.4	16.7	16.9	17.1	17.5	
	4H	12.4	12.8	12.9	13.1	13.5	12.3	12.6	12.7	13.0	13.4	
	6H	15.0	15.2	15.5	15.7	16.1	14.8	15.1	15.3	15.5	15.9	
	8H	16.4	16.6	16.9	17.0	17.5	16.3	16.5	16.8	17.0	17.5	
12H	12H	18.0	18.2	18.5	18.7	19.2	18.0	18.1	18.4	18.6	19.1	
	4H	12.7	13.0	13.1	13.4	13.8	12.6	12.8	13.0	13.2	13.7	
	6H	15.4	15.6	15.8	16.0	16.5	15.2	15.4	15.7	15.9	16.3	
	8H	16.9	17.0	17.4	17.5	18.0	16.8	17.0	17.3	17.4	17.9	
Variation of the observer position for the luminaire distances S												
S = 1.0H		+0.2 / -0.1					+0.2 / -0.2					
S = 1.5H		+0.3 / -0.3					+0.3 / -0.3					
S = 2.0H		+0.5 / -0.5					+0.5 / -0.5					
Standard table		---					---					
Correction		---					---					
Summand		---					---					
Corrected Glare Indices referring to 420lm Total Luminous Flux												



DIMENSIONS



AWARDS



Name	BLACK FOSTER TRI 2 SPOT DIM PUSH 4000K N
Reference	A3182122N
Color	Matt black
RAL	9005
Category	CEILING RECESSED

PRODUCT

Light source	LED
Gross luminous flux	500 Lm
Power	4,2 W
Power values of the system	4,77 W
Colour temperature	4000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 3
Light beam angle	19°
Lighting efficiency	90%
Efficacy	119 Lm/W
Current intensity	700 mA
Dimming	Push
Control through bluetooth	Please Consult
Driver	Included - Connected
Emergency power supply	Please Consult
Electrical insulation class	□
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A++
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


Ingress Protection	IP20
Recess measurements	50 × 93 mm.
Weight	255 g.
Packaged weight	350 g.
Packaging dimensions	212 × 155 × 73 mm
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene / Polycarbonate

OTHER DATA




Black Foster is the product that transfers the claimed effect "The Invisible Black" to a recessed-isolated lineal luminary; also available in trimless version. If we take a closer view to the recessed model, its bezel is so thin than when lighted up, it is unperceived; offering an aesthetic of "visual trimless". Black Foster stands out for its refinement, its visual comfort and for almost completely hide the source of light from the human eye range.

POLAR DIAGRAM

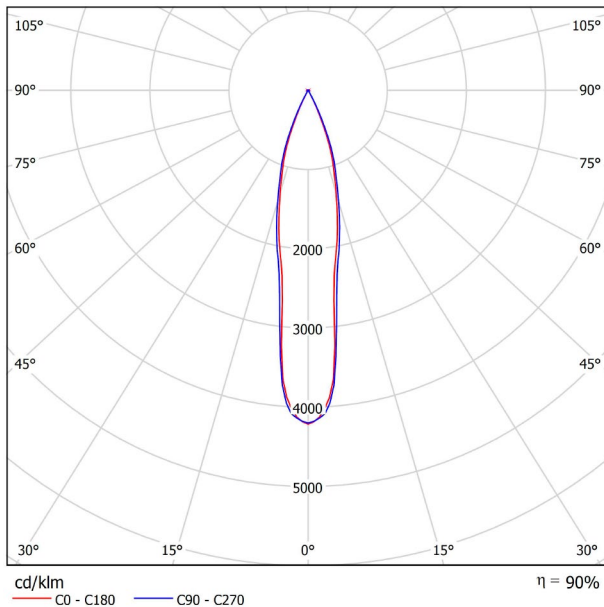

CONICAL DIAGRAM

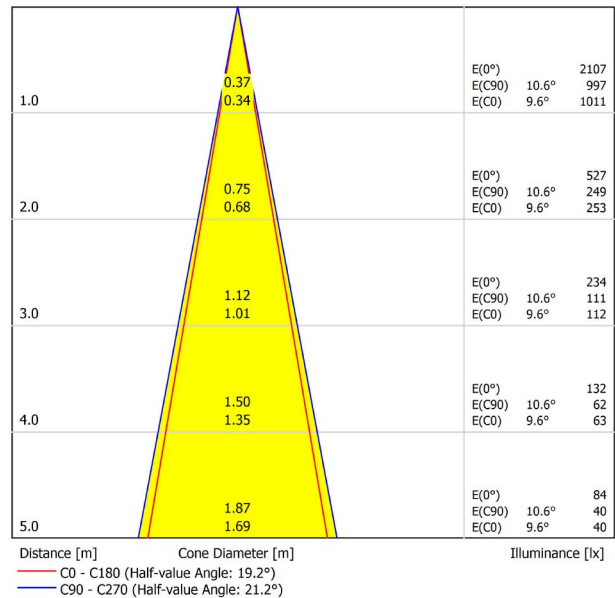


UGR

Glare Evaluation According to UGR												
ρ Ceiling		70	70	50	50	30		70	70	50	50	30
ρ Walls		50	30	50	50	30		50	30	50	30	30
ρ Floor		20	20	20	20	20		20	20	20	20	20
Room Size X Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis					
2H	2H	5.2	5.9	5.5	6.1	6.3	4.9	5.6	5.2	5.8	6.0	
	3H	9.0	9.6	9.2	9.8	10.0	8.5	9.1	8.7	9.3	9.5	
	4H	10.9	11.5	11.2	11.7	12.0	10.5	11.1	10.8	11.3	11.6	
	6H	12.9	13.4	13.2	13.7	14.0	12.5	13.1	12.9	13.4	13.6	
	8H	14.0	14.5	14.3	14.8	15.1	13.8	14.3	14.2	14.6	14.9	
12H	15.3	15.8	15.7	16.1	16.4	15.2	15.6	15.5	15.9	16.3		
4H	2H	6.3	6.9	6.6	7.1	7.4	6.1	6.7	6.4	6.9	7.2	
	3H	10.2	10.7	10.5	11.0	11.3	9.9	10.4	10.2	10.7	11.0	
	4H	12.2	12.7	12.6	13.0	13.3	12.0	12.5	12.4	12.8	13.1	
	6H	14.5	14.8	14.9	15.2	15.6	14.2	14.6	14.6	15.0	15.3	
	8H	15.7	16.0	16.1	16.4	16.8	15.6	15.9	16.0	16.3	16.7	
12H	17.2	17.4	17.6	17.8	18.3	17.0	17.3	17.5	17.7	18.1		
8H	4H	13.0	13.4	13.5	13.7	14.1	12.9	13.2	13.3	13.6	14.0	
	6H	15.6	15.9	16.1	16.3	16.7	15.4	15.7	15.9	16.1	16.5	
	8H	17.0	17.2	17.5	17.6	18.1	16.9	17.2	17.4	17.6	18.1	
	12H	18.6	18.8	19.1	19.3	19.8	18.6	18.7	19.0	19.2	19.7	
12H	4H	13.3	13.6	13.7	14.0	14.4	13.2	13.4	13.6	13.8	14.3	
	6H	16.0	16.2	16.4	16.6	17.1	15.8	16.0	16.3	16.5	16.9	
	8H	17.5	17.6	18.0	18.1	18.6	17.4	17.6	17.9	18.1	18.5	
Variation of the observer position for the luminaire distances S												
S = 1.0H		+0.2 / -0.1					+0.2 / -0.2					
S = 1.5H		+0.3 / -0.3					+0.3 / -0.3					
S = 2.0H		+0.5 / -0.5					+0.5 / -0.5					
Standard table		---					---					
Correction Summand		---					---					
Corrected Glare Indices referring to 500lm Total Luminous Flux												



DIMENSIONS



AWARDS



Name	BLACK FOSTER TRI 2 SPOT DIM PUSH 4000K NMG
Reference	A3182122NMG
Color	Matt black-Metallized gold
RAL	Metalllic finish
Category	CEILING RECESSED

PRODUCT

Light source	LED
Gross luminous flux	500 Lm
Power	4,2 W
Power values of the system	4,83 W
Colour temperature	4000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 3
Light beam angle	19°
Lighting efficiency	90%
Efficacy	119 Lm/W
Current intensity	700 mA
Dimming	Push
Control through bluetooth	Please Consult
Driver	Included - Connected
Emergency power supply	Please Consult
Electrical insulation class	□
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A++
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


Ingress Protection	IP20
Recess measurements	50 × 93 mm.
Weight	255 g.
Packaged weight	350 g.
Packaging dimensions	212 × 155 × 73 mm
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene / Polycarbonate

OTHER DATA




Black Foster is the product that transfers the claimed effect "The Invisible Black" to a recessed-isolated lineal luminary; also available in trimless version. If we take a closer view to the recessed model, its bezel is so thin than when lighted up, it is unperceived; offering an aesthetic of "visual trimless". Black Foster stands out for its refinement, its visual comfort and for almost completely hide the source of light from the human eye range.

POLAR DIAGRAM

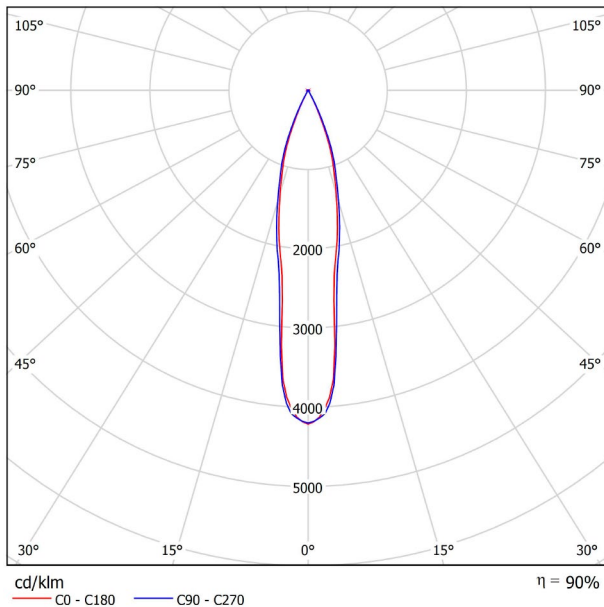

CONICAL DIAGRAM

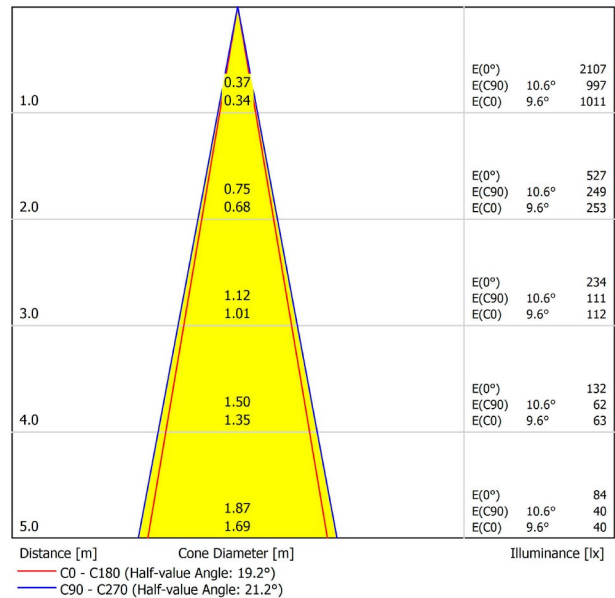


UGR

Glare Evaluation According to UGR											
ρ Ceiling		70	70	50	50	30	70	70	50	50	30
ρ Walls		50	30	50	30	30	50	30	50	30	30
ρ Floor		20	20	20	20	20	20	20	20	20	20
Room Size X Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis				
2H	2H	5.2	5.9	5.5	6.1	6.3	4.9	5.6	5.2	5.8	6.0
	3H	9.0	9.6	9.2	9.8	10.0	8.5	9.1	8.7	9.3	9.5
	4H	10.9	11.5	11.2	11.7	12.0	10.5	11.1	10.8	11.3	11.6
	6H	12.9	13.4	13.2	13.7	14.0	12.5	13.1	12.9	13.4	13.6
	8H	14.0	14.5	14.3	14.8	15.1	13.8	14.3	14.2	14.6	14.9
4H	12H	15.3	15.8	15.7	16.1	16.4	15.2	15.6	15.5	15.9	16.3
	2H	6.3	6.9	6.6	7.1	7.4	6.1	6.7	6.4	6.9	7.2
	3H	10.2	10.7	10.5	11.0	11.3	9.9	10.4	10.2	10.7	11.0
	4H	12.2	12.7	12.6	13.0	13.3	12.0	12.5	12.4	12.8	13.1
	6H	14.5	14.8	14.9	15.2	15.6	14.2	14.6	14.6	15.0	15.3
8H	8H	15.7	16.0	16.1	16.4	16.8	15.6	15.9	16.0	16.3	16.7
	12H	17.2	17.4	17.6	17.8	18.3	17.0	17.3	17.5	17.7	18.1
	4H	13.0	13.4	13.5	13.7	14.1	12.9	13.2	13.3	13.6	14.0
	6H	15.6	15.9	16.1	16.3	16.7	15.4	15.7	15.9	16.1	16.5
	8H	17.0	17.2	17.5	17.6	18.1	16.9	17.2	17.4	17.6	18.1
12H	12H	18.6	18.8	19.1	19.3	19.8	18.6	18.7	19.0	19.2	19.7
	4H	13.3	13.6	13.7	14.0	14.4	13.2	13.4	13.6	13.8	14.3
	6H	16.0	16.2	16.4	16.6	17.1	15.8	16.0	16.3	16.5	16.9
	8H	17.5	17.6	18.0	18.1	18.6	17.4	17.6	17.9	18.1	18.5
Variation of the observer position for the luminaire distances S											
S = 1.0H		+0.2 / -0.1					+0.2 / -0.2				
S = 1.5H		+0.3 / -0.3					+0.3 / -0.3				
S = 2.0H		+0.5 / -0.5					+0.5 / -0.5				
Standard table		---					---				
Correction Summand		---					---				
Corrected Glare Indices referring to 500lm Total Luminous Flux											



DIMENSIONS



AWARDS



Name	BLACK FOSTER TRI 2 SPOT DIM DALI 2700K N
Reference	A3182140N
Color	Matt black
RAL	9005
Category	CEILING RECESSED

PRODUCT

Light source	LED
Gross luminous flux	380 Lm
Power	4,2 W
Power values of the system	4,83 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 3
Light beam angle	19°
Lighting efficiency	90%
Efficacy	90 Lm/W
Current intensity	700 mA
Dimming	DALI
Control through bluetooth	Please Consult
Driver	Included - Connected
Emergency power supply	Please Consult
Electrical insulation class	□
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


Ingress Protection	IP20
Recess measurements	50 × 93 mm.
Weight	255 g.
Packaged weight	350 g.
Packaging dimensions	212 × 155 × 73 mm
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene / Polycarbonate

OTHER DATA




Black Foster is the product that transfers the claimed effect "The Invisible Black" to a recessed-isolated lineal luminary; also available in trimless version. If we take a closer view to the recessed model, its bezel is so thin than when lighted up, it is unperceived; offering an aesthetic of "visual trimless". Black Foster stands out for its refinement, its visual comfort and for almost completely hide the source of light from the human eye range.

POLAR DIAGRAM

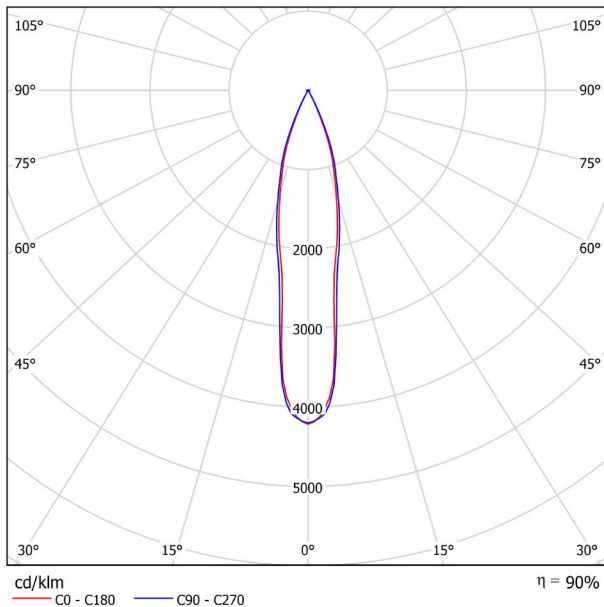

CONICAL DIAGRAM

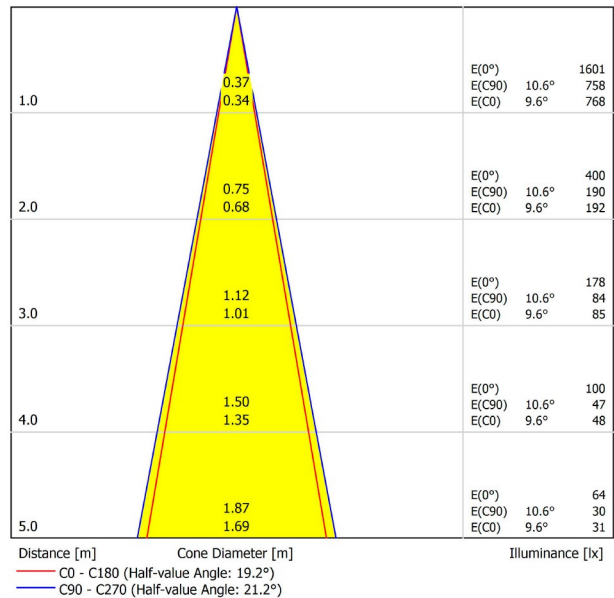


UGR

Glare Evaluation According to UGR												
ρ Ceiling		70	70	50	50	30	70	70	50	50	30	
ρ Walls		50	30	50	30	30	50	30	50	30	30	
ρ Floor		20	20	20	20	20	20	20	20	20	20	
Room Size X Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis					
2H	2H	4.3	4.9	4.5	5.1	5.3	4.0	4.6	4.2	4.8	5.0	
	3H	8.0	8.6	8.3	8.9	9.1	7.5	8.1	7.8	8.4	8.6	
	4H	9.9	10.5	10.2	10.8	11.0	9.5	10.1	9.8	10.4	10.6	
	6H	11.9	12.5	12.3	12.8	13.1	11.6	12.1	11.9	12.4	12.7	
	8H	13.1	13.6	13.4	13.9	14.2	12.9	13.4	13.2	13.7	14.0	
4H	12H	14.4	14.9	14.7	15.2	15.5	14.2	14.7	14.5	15.0	15.3	
	2H	5.3	5.9	5.6	6.2	6.4	5.1	5.7	5.4	6.0	6.2	
	3H	9.2	9.7	9.6	10.0	10.4	8.9	9.4	9.3	9.7	10.0	
	4H	11.3	11.7	11.6	12.0	12.4	11.1	11.5	11.4	11.8	12.2	
	6H	13.5	13.9	13.9	14.3	14.6	13.3	13.6	13.7	14.0	14.4	
8H	8H	14.8	15.1	15.2	15.5	15.9	14.7	15.0	15.1	15.4	15.8	
	12H	16.2	16.5	16.6	16.9	17.3	16.1	16.4	16.5	16.8	17.2	
	4H	12.1	12.4	12.5	12.8	13.2	11.9	12.3	12.3	12.6	13.0	
	6H	14.7	14.9	15.1	15.3	15.8	14.5	14.7	14.9	15.1	15.6	
	8H	16.1	16.3	16.5	16.7	17.2	16.0	16.2	16.5	16.6	17.1	
12H	12H	17.7	17.9	18.2	18.3	18.8	17.6	17.8	18.1	18.2	18.7	
	4H	12.4	12.6	12.8	13.0	13.5	12.2	12.5	12.6	12.9	13.3	
	6H	15.0	15.2	15.5	15.7	16.1	14.9	15.1	15.3	15.5	16.0	
8H		16.5	16.7	17.0	17.1	17.6	16.5	16.6	17.0	17.1	17.6	
Variation of the observer position for the luminaire distances S												
S = 1.0H		+0.2 / -0.1					+0.2 / -0.2					
S = 1.5H		+0.3 / -0.3					+0.3 / -0.3					
S = 2.0H		+0.5 / -0.5					+0.5 / -0.5					
Standard table		---					---					
Correction		---					---					
Summand		---					---					
Corrected Glare Indices referring to 380lm Total Luminous Flux												



DIMENSIONS



AWARDS



Name	BLACK FOSTER TRI 2 SPOT DIM DALI 2700K NMG
Reference	A3182140NMG
Color	Matt black-Metallized gold
RAL	Metalllic finish
Category	CEILING RECESSED

PRODUCT

BLACK FOSTER TRI 2 SPOT DIM DALI 2700K NMG

A3182140NMG

Matt black-Metallized gold

Metalllic finish

CEILING RECESSED

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	380 Lm
Power	4,2 W
Power values of the system	4,83 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 3
Light beam angle	19°
Lighting efficiency	90%
Efficacy	90 Lm/W
Current intensity	700 mA
Dimming	DALI
Control through bluetooth	Please Consult
Driver	Included - Connected
Emergency power supply	Please Consult
Electrical insulation class	□
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Recess measurements	50 × 93 mm.
Weight	255 g.
Packaged weight	350 g.
Packaging dimensions	212 × 155 × 73 mm
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene / Polycarbonate




Black Foster is the product that transfers the claimed effect "The Invisible Black" to a recessed-isolated lineal luminary; also available in trimless version. If we take a closer view to the recessed model, its bezel is so thin than when lighted up, it is unperceived; offering an aesthetic of "visual trimless". Black Foster stands out for its refinement, its visual comfort and for almost completely hide the source of light from the human eye range.

POLAR DIAGRAM

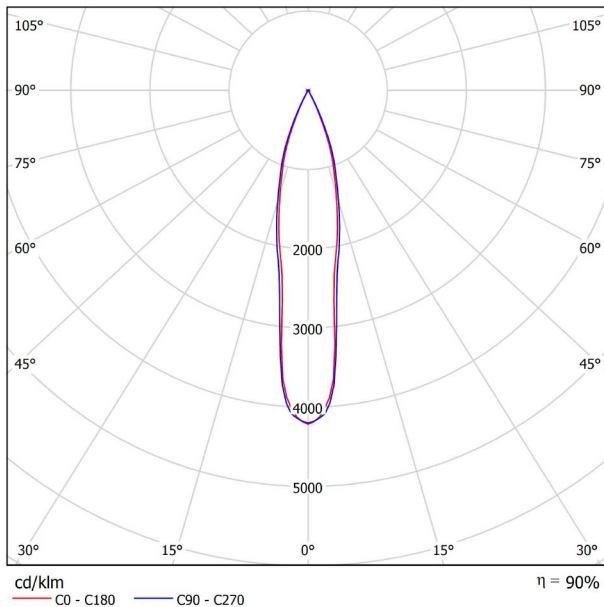

CONICAL DIAGRAM

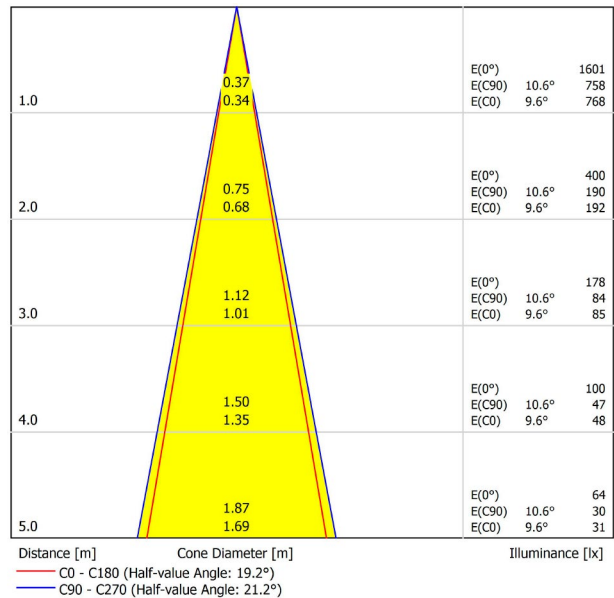


UGR

Glare Evaluation According to UGR												
ρ Ceiling		70	70	50	50	30	70	70	50	50	30	
ρ Walls		50	30	50	30	30	50	30	50	30	30	
ρ Floor		20	20	20	20	20	20	20	20	20	20	
Room Size X Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis					
2H	2H	4.3	4.9	4.5	5.1	5.3	4.0	4.6	4.2	4.8	5.0	
	3H	8.0	8.6	8.3	8.9	9.1	7.5	8.1	7.8	8.4	8.6	
	4H	9.9	10.5	10.2	10.8	11.0	9.5	10.1	9.8	10.4	10.6	
	6H	11.9	12.5	12.3	12.8	13.1	11.6	12.1	11.9	12.4	12.7	
	8H	13.1	13.6	13.4	13.9	14.2	12.9	13.4	13.2	13.7	14.0	
4H	12H	14.4	14.9	14.7	15.2	15.5	14.2	14.7	14.5	15.0	15.3	
	2H	5.3	5.9	5.6	6.2	6.4	5.1	5.7	5.4	6.0	6.2	
	3H	9.2	9.7	9.6	10.0	10.4	8.9	9.4	9.3	9.7	10.0	
	4H	11.3	11.7	11.6	12.0	12.4	11.1	11.5	11.4	11.8	12.2	
	6H	13.5	13.9	13.9	14.3	14.6	13.3	13.6	13.7	14.0	14.4	
8H	8H	14.8	15.1	15.2	15.5	15.9	14.7	15.0	15.1	15.4	15.8	
	12H	16.2	16.5	16.6	16.9	17.3	16.1	16.4	16.5	16.8	17.2	
	4H	12.1	12.4	12.5	12.8	13.2	11.9	12.3	12.3	12.6	13.0	
	6H	14.7	14.9	15.1	15.3	15.8	14.5	14.7	14.9	15.1	15.6	
	8H	16.1	16.3	16.5	16.7	17.2	16.0	16.2	16.5	16.6	17.1	
12H	12H	17.7	17.9	18.2	18.3	18.8	17.6	17.8	18.1	18.2	18.7	
	4H	12.4	12.6	12.8	13.0	13.5	12.2	12.5	12.6	12.9	13.3	
	6H	15.0	15.2	15.5	15.7	16.1	14.9	15.1	15.3	15.5	16.0	
8H		16.5	16.7	17.0	17.1	17.6	16.5	16.6	17.0	17.1	17.6	
Variation of the observer position for the luminaire distances S												
S = 1.0H		+0.2 / -0.1					+0.2 / -0.2					
S = 1.5H		+0.3 / -0.3					+0.3 / -0.3					
S = 2.0H		+0.5 / -0.5					+0.5 / -0.5					
Standard table		---					---					
Correction		---					---					
Summand		---					---					
Corrected Glare Indices referring to 380lm Total Luminous Flux												



DIMENSIONS



AWARDS



Name	BLACK FOSTER TRI 2 SPOT DIM DALI 3000K N
Reference	A3182141N
Color	Matt black
RAL	9005
Category	CEILING RECESSED

PRODUCT

BLACK FOSTER TRI 2 SPOT DIM DALI 3000K N

A3182141N

Matt black

9005

CEILING RECESSED

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	420 Lm
Power	4,2 W
Power values of the system	4,83 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 3
Light beam angle	19°
Lighting efficiency	90%
Efficacy	100 Lm/W
Current intensity	700 mA
Dimming	DALI
Control through bluetooth	Please Consult
Driver	Included - Connected
Emergency power supply	Please Consult
Electrical insulation class	□
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Recess measurements	50 × 93 mm.
Weight	255 g.
Packaged weight	350 g.
Packaging dimensions	212 × 155 × 73 mm
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene / Polycarbonate




Black Foster is the product that transfers the claimed effect "The Invisible Black" to a recessed-isolated lineal luminary; also available in trimless version. If we take a closer view to the recessed model, its bezel is so thin than when lighted up, it is unperceived; offering an aesthetic of "visual trimless". Black Foster stands out for its refinement, its visual comfort and for almost completely hide the source of light from the human eye range.

POLAR DIAGRAM

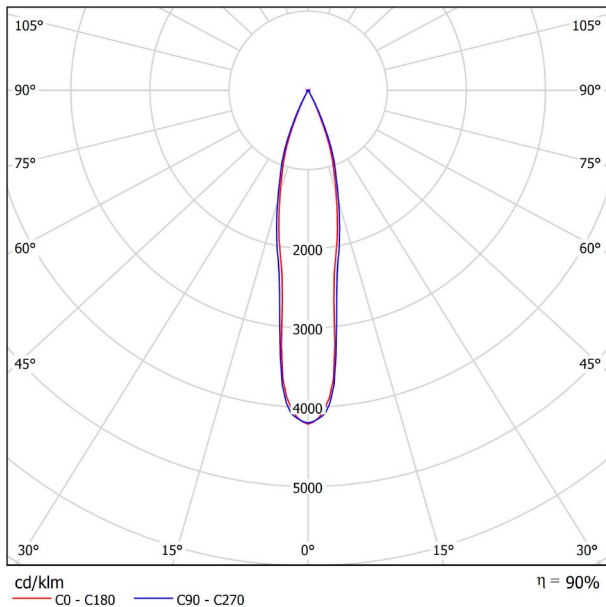

CONICAL DIAGRAM

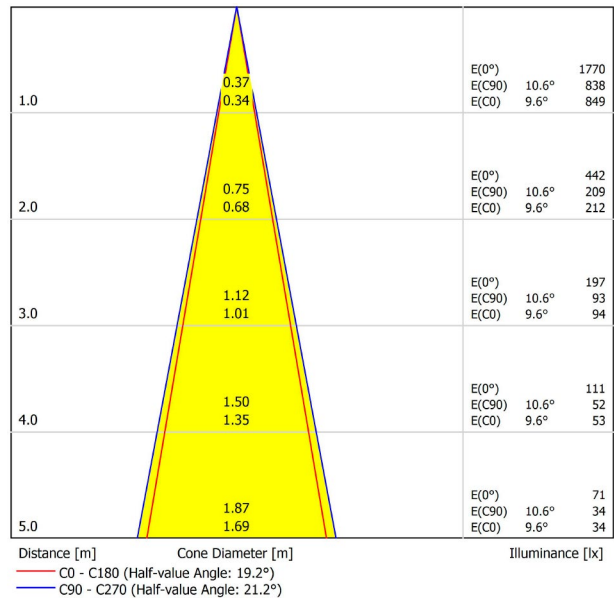


UGR

Glare Evaluation According to UGR												
ρ Ceiling		70	70	50	50	30	70	70	50	50	30	30
ρ Walls		50	30	50	30	30	50	30	50	30	30	30
ρ Floor		20	20	20	20	20	20	20	20	20	20	20
Room Size X Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis					
2H	2H	4.6	5.3	4.9	5.5	5.7	4.3	5.0	4.6	5.2	5.4	
	3H	8.4	9.0	8.6	9.2	9.4	7.9	8.5	8.1	8.7	8.9	
	4H	10.3	10.8	10.6	11.1	11.4	9.9	10.5	10.2	10.7	11.0	
	6H	12.3	12.8	12.6	13.1	13.4	11.9	12.5	12.3	12.7	13.0	
	8H	13.4	13.9	13.7	14.2	14.5	13.2	13.7	13.6	14.0	14.3	
4H	12H	14.7	15.2	15.1	15.5	15.8	14.5	15.0	14.9	15.3	15.7	
	2H	5.7	6.3	6.0	6.5	6.8	5.5	6.1	5.8	6.3	6.6	
	3H	9.6	10.1	9.9	10.4	10.7	9.3	9.8	9.6	10.1	10.4	
	4H	11.6	12.1	12.0	12.4	12.7	11.4	11.8	11.8	12.2	12.5	
	6H	13.9	14.2	14.3	14.6	15.0	13.6	14.0	14.0	14.4	14.7	
8H	8H	15.1	15.4	15.5	15.8	16.2	15.0	15.3	15.4	15.7	16.1	
	12H	16.6	16.8	17.0	17.2	17.6	16.4	16.7	16.9	17.1	17.5	
	4H	12.4	12.8	12.9	13.1	13.5	12.3	12.6	12.7	13.0	13.4	
	6H	15.0	15.2	15.5	15.7	16.1	14.8	15.1	15.3	15.5	15.9	
	8H	16.4	16.6	16.9	17.0	17.5	16.3	16.5	16.8	17.0	17.5	
12H	12H	18.0	18.2	18.5	18.7	19.2	18.0	18.1	18.4	18.6	19.1	
	4H	12.7	13.0	13.1	13.4	13.8	12.6	12.8	13.0	13.2	13.7	
	6H	15.4	15.6	15.8	16.0	16.5	15.2	15.4	15.7	15.9	16.3	
	8H	16.9	17.0	17.4	17.5	18.0	16.8	17.0	17.3	17.4	17.9	
Variation of the observer position for the luminaire distances S												
S = 1.0H		+0.2 / -0.1					+0.2 / -0.2					
S = 1.5H		+0.3 / -0.3					+0.3 / -0.3					
S = 2.0H		+0.5 / -0.5					+0.5 / -0.5					
Standard table		---					---					
Correction		---					---					
Summand		---					---					
Corrected Glare Indices referring to 420lm Total Luminous Flux												



DIMENSIONS



AWARDS



Name	BLACK FOSTER TRI 2 SPOT DIM DALI 3000K NMG
Reference	A3182141NMG
Color	Matt black-Metallized gold
RAL	Metalllic finish
Category	CEILING RECESSED

PRODUCT

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	420 Lm
Power	4,2 W
Power values of the system	4,83 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 3
Light beam angle	19°
Lighting efficiency	90%
Efficacy	100 Lm/W
Current intensity	700 mA
Dimming	DALI
Control through bluetooth	Please Consult
Driver	Included - Connected
Emergency power supply	Please Consult
Electrical insulation class	□
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Recess measurements	50 × 93 mm.
Weight	255 g.
Packaged weight	350 g.
Packaging dimensions	212 × 155 × 73 mm
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene / Polycarbonate




Black Foster is the product that transfers the claimed effect "The Invisible Black" to a recessed-isolated lineal luminary; also available in trimless version. If we take a closer view to the recessed model, its bezel is so thin than when lighted up, it is unperceived; offering an aesthetic of "visual trimless". Black Foster stands out for its refinement, its visual comfort and for almost completely hide the source of light from the human eye range.

POLAR DIAGRAM

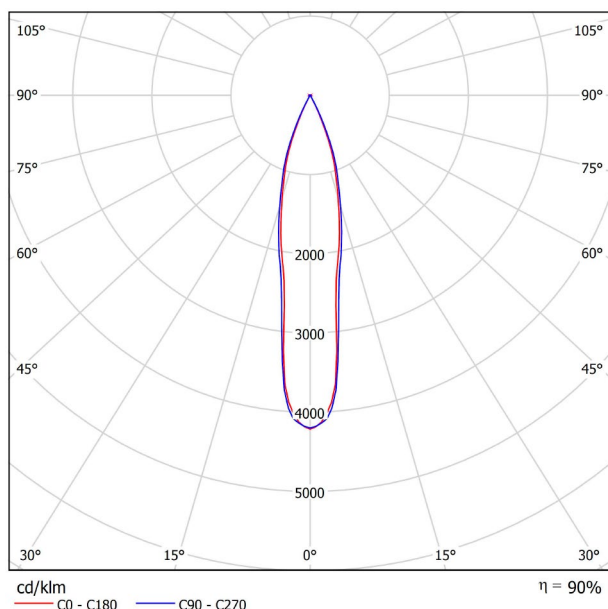

CONICAL DIAGRAM

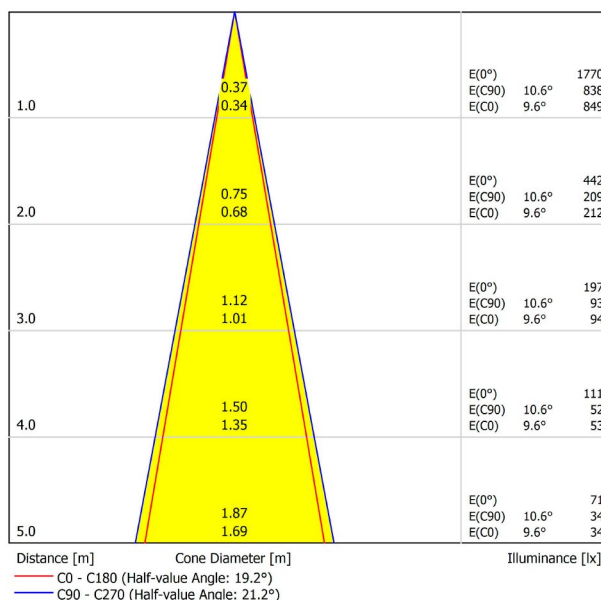


UGR

Glare Evaluation According to UGR												
p Ceiling		70	70	50	50	30	70	70	50	50	30	
p Walls		50	30	50	30	30	50	30	50	30	30	
p Floor		20	20	20	20	20	20	20	20	20	20	
Room Size X Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis					
2H	2H	4.6	5.3	4.9	5.5	5.7	4.3	5.0	4.6	5.2	5.4	
	3H	8.4	9.0	8.6	9.2	9.4	7.9	8.5	8.1	8.7	8.9	
	4H	10.3	10.8	10.6	11.1	11.4	9.9	10.5	10.2	10.7	11.0	
	6H	12.3	12.8	12.6	13.1	13.4	11.9	12.5	12.3	12.7	13.0	
	8H	13.4	13.9	13.7	14.2	14.5	13.2	13.7	13.6	14.0	14.3	
	12H	14.7	15.2	15.1	15.5	15.8	14.5	15.0	14.9	15.3	15.7	
4H	2H	5.7	6.3	6.0	6.5	6.8	5.5	6.1	5.8	6.3	6.6	
	3H	9.6	10.1	9.9	10.4	10.7	9.3	9.8	9.6	10.1	10.4	
	4H	11.6	12.1	12.0	12.4	12.7	11.4	11.8	11.8	12.2	12.5	
	6H	13.9	14.2	14.3	14.6	15.0	13.6	14.0	14.0	14.4	14.7	
	8H	15.1	15.4	15.5	15.8	16.2	15.0	15.3	15.4	15.7	16.1	
	12H	16.6	16.8	17.0	17.2	17.6	16.4	16.7	16.9	17.1	17.5	
8H	4H	12.4	12.8	12.9	13.1	13.5	12.3	12.6	12.7	13.0	13.4	
	6H	15.0	15.2	15.5	15.7	16.1	14.8	15.1	15.3	15.5	15.9	
	8H	16.4	16.6	16.9	17.0	17.5	16.3	16.5	16.8	17.0	17.5	
	12H	18.0	18.2	18.5	18.7	19.2	18.0	18.1	18.4	18.6	19.1	
12H	4H	12.7	13.0	13.1	13.4	13.8	12.6	12.8	13.0	13.2	13.7	
	6H	15.4	15.6	15.8	16.0	16.5	15.2	15.4	15.7	15.9	16.3	
	8H	16.9	17.0	17.4	17.5	18.0	16.8	17.0	17.3	17.4	17.9	
Variation of the observer position for the luminaire distances S												
S = 1.0H		+0.2 / -0.1					+0.2 / -0.2					
S = 1.5H		+0.3 / -0.3					+0.3 / -0.3					
S = 2.0H		+0.5 / -0.5					+0.5 / -0.5					
Standard table		---					---					
Correction		---					---					
Summand		---					---					
Corrected Glare Indices referring to 420lm Total Luminous Flux												



DIMENSIONS



AWARDS



Name	BLACK FOSTER TRI 2 SPOT DIM DALI 4000K N
Reference	A3182142N
Color	Matt black
RAL	9005
Category	CEILING RECESSED

PRODUCT

Light source	LED
Gross luminous flux	500 Lm
Power	4,2 W
Power values of the system	4,83 W
Colour temperature	4000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 3
Light beam angle	19°
Lighting efficiency	90%
Efficacy	119 Lm/W
Current intensity	700 mA
Dimming	DALI
Control through bluetooth	Please Consult
Driver	Included - Connected
Emergency power supply	Please Consult
Electrical insulation class	□
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A++
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


Ingress Protection	IP20
Recess measurements	50 × 93 mm.
Weight	255 g.
Packaged weight	350 g.
Packaging dimensions	212 × 155 × 73 mm
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene / Polycarbonate

OTHER DATA




Black Foster is the product that transfers the claimed effect "The Invisible Black" to a recessed-isolated lineal luminary; also available in trimless version. If we take a closer view to the recessed model, its bezel is so thin than when lighted up, it is unperceived; offering an aesthetic of "visual trimless". Black Foster stands out for its refinement, its visual comfort and for almost completely hide the source of light from the human eye range.

POLAR DIAGRAM

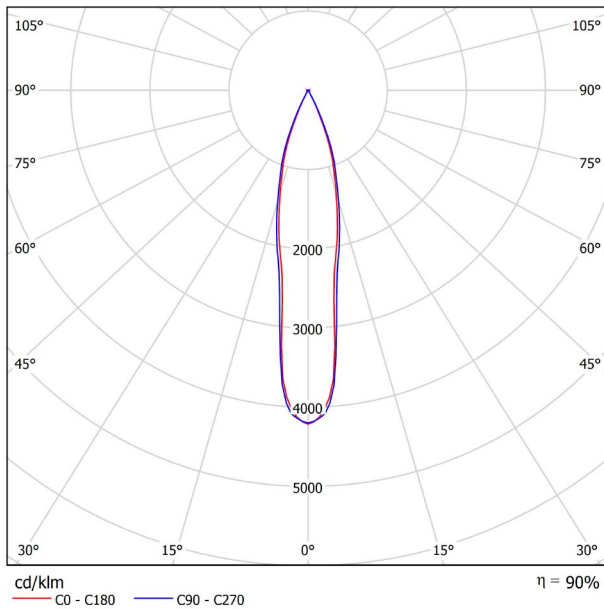

CONICAL DIAGRAM

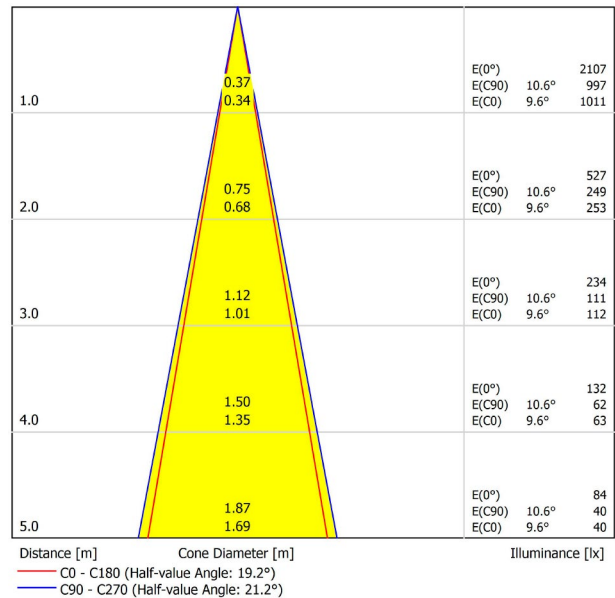


UGR

Glare Evaluation According to UGR												
ρ Ceiling		70	70	50	50	30	70	70	50	50	30	
ρ Walls		50	30	50	30	30	50	30	50	30	30	
ρ Floor		20	20	20	20	20	20	20	20	20	20	
Room Size X Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis					
2H	2H	5.2	5.9	5.5	6.1	6.3	4.9	5.6	5.2	5.8	6.0	
	3H	9.0	9.6	9.2	9.8	10.0	8.5	9.1	8.7	9.3	9.5	
	4H	10.9	11.5	11.2	11.7	12.0	10.5	11.1	10.8	11.3	11.6	
	6H	12.9	13.4	13.2	13.7	14.0	12.5	13.1	12.9	13.4	13.6	
	8H	14.0	14.5	14.3	14.8	15.1	13.8	14.3	14.2	14.6	14.9	
4H	12H	15.3	15.8	15.7	16.1	16.4	15.2	15.6	15.5	15.9	16.3	
	2H	6.3	6.9	6.6	7.1	7.4	6.1	6.7	6.4	6.9	7.2	
	3H	10.2	10.7	10.5	11.0	11.3	9.9	10.4	10.2	10.7	11.0	
	4H	12.2	12.7	12.6	13.0	13.3	12.0	12.5	12.4	12.8	13.1	
	6H	14.5	14.8	14.9	15.2	15.6	14.2	14.6	14.6	15.0	15.3	
8H	8H	15.7	16.0	16.1	16.4	16.8	15.6	15.9	16.0	16.3	16.7	
	12H	17.2	17.4	17.6	17.8	18.3	17.0	17.3	17.5	17.7	18.1	
	4H	13.0	13.4	13.5	13.7	14.1	12.9	13.2	13.3	13.6	14.0	
	6H	15.6	15.9	16.1	16.3	16.7	15.4	15.7	15.9	16.1	16.5	
	8H	17.0	17.2	17.5	17.6	18.1	16.9	17.2	17.4	17.6	18.1	
12H	12H	18.6	18.8	19.1	19.3	19.8	18.6	18.7	19.0	19.2	19.7	
	4H	13.3	13.6	13.7	14.0	14.4	13.2	13.4	13.6	13.8	14.3	
	6H	16.0	16.2	16.4	16.6	17.1	15.8	16.0	16.3	16.5	16.9	
	8H	17.5	17.6	18.0	18.1	18.6	17.4	17.6	17.9	18.1	18.5	
Variation of the observer position for the luminaire distances S												
S = 1.0H		+0.2 / -0.1					+0.2 / -0.2					
S = 1.5H		+0.3 / -0.3					+0.3 / -0.3					
S = 2.0H		+0.5 / -0.5					+0.5 / -0.5					
Standard table		---					---					
Correction		---					---					
Summand		---					---					
Corrected Glare Indices referring to 500lm Total Luminous Flux												



DIMENSIONS



AWARDS



Name	BLACK FOSTER TRI 2 SPOT DIM DALI 4000K NMG
Reference	A3182142NMG
Color	Matt black-Metallized gold
RAL	Metalllic finish
Category	CEILING RECESSED

PRODUCT

LIGHTING INFORMATION

LED

500 Lm

4,2 W

4,83 W

4000 K

CRI>90

MacAdam Step 3

19°

90%

119 Lm/W

700 mA

DALI

Please Consult

Included - Connected

Please Consult



220 V/240 V

50/60 Hz

A++

L80B10 (Tc=85°C) >60.000h

OTHER DATA

IP20

50 × 93 mm.

255 g.

350 g.

212 × 155 × 73 mm

1

Aluminium / Acrylonitrile Butadiene Styrene /
Polycarbonate




Light source	LED
Gross luminous flux	500 Lm
Power	4,2 W
Power values of the system	4,83 W
Colour temperature	4000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 3
Light beam angle	19°
Lighting efficiency	90%
Efficacy	119 Lm/W
Current intensity	700 mA
Dimming	DALI
Control through bluetooth	Please Consult
Driver	Included - Connected
Emergency power supply	Please Consult
Electrical insulation class	
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A++
LED lifespan	L80B10 (Tc=85°C) >60.000h


Ingress Protection	IP20
Recess measurements	50 × 93 mm.
Weight	255 g.
Packaged weight	350 g.
Packaging dimensions	212 × 155 × 73 mm
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene / Polycarbonate

Black Foster is the product that transfers the claimed effect "The Invisible Black" to a recessed-isolated lineal luminary; also available in trimless version. If we take a closer view to the recessed model, its bezel is so thin than when lighted up, it is unperceived; offering an aesthetic of "visual trimless". Black Foster stands out for its refinement, its visual comfort and for almost completely hide the source of light from the human eye range.

POLAR DIAGRAM

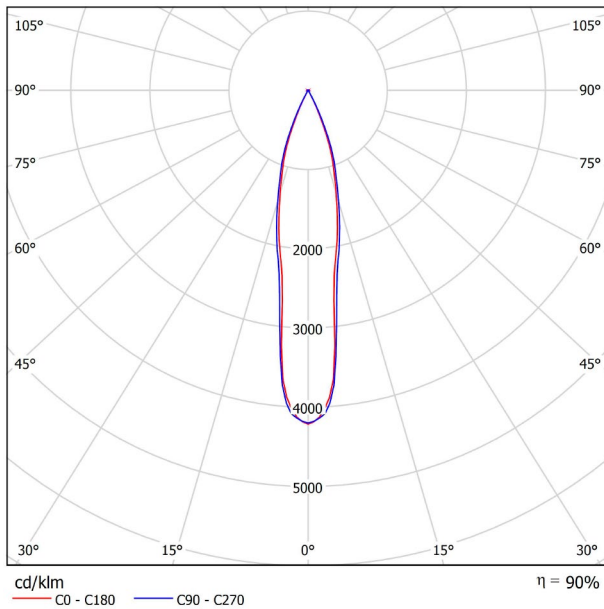

CONICAL DIAGRAM

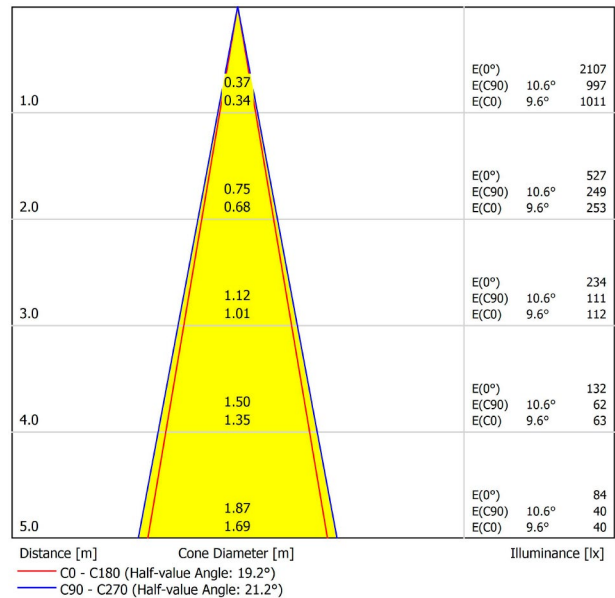


UGR

Glare Evaluation According to UGR												
ρ Ceiling		70	70	50	50	30	70	70	50	50	30	
ρ Walls		50	30	50	30	30	50	30	50	30	30	
ρ Floor		20	20	20	20	20	20	20	20	20	20	
Room Size X Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis					
2H	2H	5.2	5.9	5.5	6.1	6.3	4.9	5.6	5.2	5.8	6.0	
	3H	9.0	9.6	9.2	9.8	10.0	8.5	9.1	8.7	9.3	9.5	
	4H	10.9	11.5	11.2	11.7	12.0	10.5	11.1	10.8	11.3	11.6	
	6H	12.9	13.4	13.2	13.7	14.0	12.5	13.1	12.9	13.4	13.6	
	8H	14.0	14.5	14.3	14.8	15.1	13.8	14.3	14.2	14.6	14.9	
4H	12H	15.3	15.8	15.7	16.1	16.4	15.2	15.6	15.5	15.9	16.3	
	2H	6.3	6.9	6.6	7.1	7.4	6.1	6.7	6.4	6.9	7.2	
	3H	10.2	10.7	10.5	11.0	11.3	9.9	10.4	10.2	10.7	11.0	
	4H	12.2	12.7	12.6	13.0	13.3	12.0	12.5	12.4	12.8	13.1	
	6H	14.5	14.8	14.9	15.2	15.6	14.2	14.6	14.6	15.0	15.3	
8H	8H	15.7	16.0	16.1	16.4	16.8	15.6	15.9	16.0	16.3	16.7	
	12H	17.2	17.4	17.6	17.8	18.3	17.0	17.3	17.5	17.7	18.1	
	4H	13.0	13.4	13.5	13.7	14.1	12.9	13.2	13.3	13.6	14.0	
	6H	15.6	15.9	16.1	16.3	16.7	15.4	15.7	15.9	16.1	16.5	
	8H	17.0	17.2	17.5	17.6	18.1	16.9	17.2	17.4	17.6	18.1	
12H	12H	18.6	18.8	19.1	19.3	19.8	18.6	18.7	19.0	19.2	19.7	
	4H	13.3	13.6	13.7	14.0	14.4	13.2	13.4	13.6	13.8	14.3	
	6H	16.0	16.2	16.4	16.6	17.1	15.8	16.0	16.3	16.5	16.9	
	8H	17.5	17.6	18.0	18.1	18.6	17.4	17.6	17.9	18.1	18.5	
Variation of the observer position for the luminaire distances S												
S = 1.0H		+0.2 / -0.1					+0.2 / -0.2					
S = 1.5H		+0.3 / -0.3					+0.3 / -0.3					
S = 2.0H		+0.5 / -0.5					+0.5 / -0.5					
Standard table		---					---					
Correction		---					---					
Summand		---					---					
Corrected Glare Indices referring to 500lm Total Luminous Flux												



DIMENSIONS



AWARDS



Name	BLACK FOSTER TRI 2 SPOT 2700K N
Reference	A3182110N
Color	Matt black
RAL	9005
Category	CEILING RECESSED

PRODUCT

Light source	LED
Gross luminous flux	380 Lm
Power	4,2 W
Power values of the system	4,67 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 3
Light beam angle	19°
Lighting efficiency	90%
Efficacy	90 Lm/W
Current intensity	700 mA
Control through bluetooth	Please Consult
Driver	Included - Connected
Emergency power supply	Please Consult
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


Ingress Protection	IP20
Recess measurements	50 × 93 mm.
Weight	180 g.
Packaged weight	275 g.
Packaging dimensions	212 × 155 × 73 mm
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene / Polycarbonate

OTHER DATA




Black Foster is the product that transfers the claimed effect "The Invisible Black" to a recessed-isolated lineal luminary; also available in trimless version. If we take a closer view to the recessed model, its bezel is so thin than when lighted up, it is unperceived; offering an aesthetic of "visual trimless". Black Foster stands out for its refinement, its visual comfort and for almost completely hide the source of light from the human eye range.

POLAR DIAGRAM

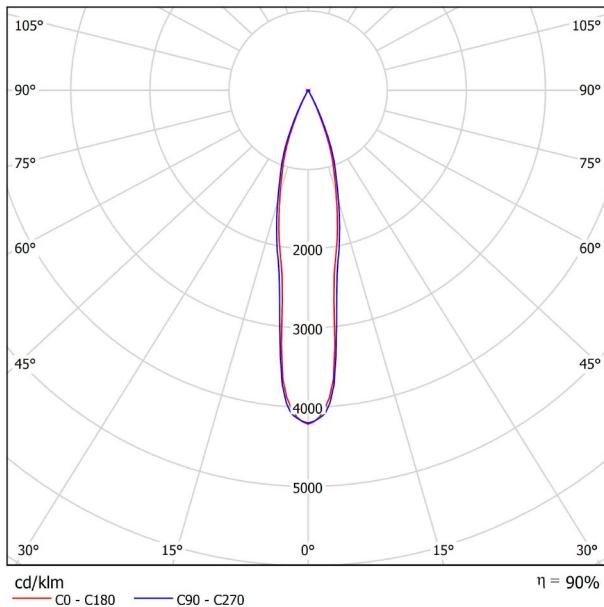

CONICAL DIAGRAM

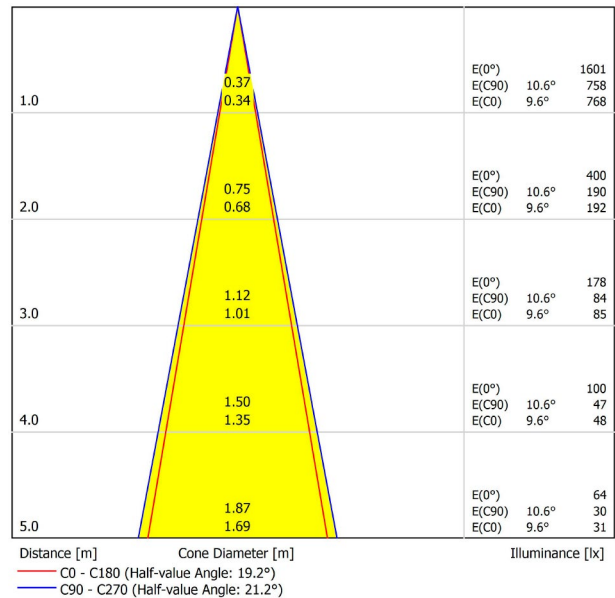


UGR

Glare Evaluation According to UGR												
ρ Ceiling		70	70	50	50	30	70	70	50	50	30	
ρ Walls		50	30	50	30	30	50	30	50	30	30	
ρ Floor		20	20	20	20	20	20	20	20	20	20	
Room Size X Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis					
2H	2H	4.3	4.9	4.5	5.1	5.3	4.0	4.6	4.2	4.8	5.0	
	3H	8.0	8.6	8.3	8.9	9.1	7.5	8.1	7.8	8.4	8.6	
	4H	9.9	10.5	10.2	10.8	11.0	9.5	10.1	9.8	10.4	10.6	
	6H	11.9	12.5	12.3	12.8	13.1	11.6	12.1	11.9	12.4	12.7	
	8H	13.1	13.6	13.4	13.9	14.2	12.9	13.4	13.2	13.7	14.0	
4H	12H	14.4	14.9	14.7	15.2	15.5	14.2	14.7	14.5	15.0	15.3	
	2H	5.3	5.9	5.6	6.2	6.4	5.1	5.7	5.4	6.0	6.2	
	3H	9.2	9.7	9.6	10.0	10.4	8.9	9.4	9.3	9.7	10.0	
	4H	11.3	11.7	11.6	12.0	12.4	11.1	11.5	11.4	11.8	12.2	
	6H	13.5	13.9	13.9	14.3	14.6	13.3	13.6	13.7	14.0	14.4	
8H	8H	14.8	15.1	15.2	15.5	15.9	14.7	15.0	15.1	15.4	15.8	
	12H	16.2	16.5	16.6	16.9	17.3	16.1	16.4	16.5	16.8	17.2	
	4H	12.1	12.4	12.5	12.8	13.2	11.9	12.3	12.3	12.6	13.0	
	6H	14.7	14.9	15.1	15.3	15.8	14.5	14.7	14.9	15.1	15.6	
	8H	16.1	16.3	16.5	16.7	17.2	16.0	16.2	16.5	16.6	17.1	
12H	12H	17.7	17.9	18.2	18.3	18.8	17.6	17.8	18.1	18.2	18.7	
	4H	12.4	12.6	12.8	13.0	13.5	12.2	12.5	12.6	12.9	13.3	
	6H	15.0	15.2	15.5	15.7	16.1	14.9	15.1	15.3	15.5	16.0	
8H		16.5	16.7	17.0	17.1	17.6	16.5	16.6	17.0	17.1	17.6	
Variation of the observer position for the luminaire distances S												
S = 1.0H		+0.2 / -0.1					+0.2 / -0.2					
S = 1.5H		+0.3 / -0.3					+0.3 / -0.3					
S = 2.0H		+0.5 / -0.5					+0.5 / -0.5					
Standard table		---					---					
Correction		---					---					
Summand		---					---					
Corrected Glare Indices referring to 380lm Total Luminous Flux												



DIMENSIONS



AWARDS



Name	BLACK FOSTER TRI 2 SPOT 2700K NMG
Reference	A3182110NMG
Color	Matt black-Metallized gold
RAL	Metallic finish
Category	CEILING RECESSED

PRODUCT

BLACK FOSTER TRI 2 SPOT 2700K NMG

A3182110NMG

Matt black-Metallized gold

Metallic finish

CEILING RECESSED

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	380 Lm
Power	4,2 W
Power values of the system	4,83 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 3
Light beam angle	19°
Lighting efficiency	90%
Efficacy	90 Lm/W
Current intensity	700 mA
Control through bluetooth	Please Consult
Driver	Included - Connected
Emergency power supply	Please Consult
Electrical insulation class	□
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Recess measurements	50 × 93 mm.
Weight	180 g.
Packaged weight	275 g.
Packaging dimensions	212 × 155 × 73 mm
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene / Polycarbonate




Black Foster is the product that transfers the claimed effect "The Invisible Black" to a recessed-isolated lineal luminary; also available in trimless version. If we take a closer view to the recessed model, its bezel is so thin than when lighted up, it is unperceived; offering an aesthetic of "visual trimless". Black Foster stands out for its refinement, its visual comfort and for almost completely hide the source of light from the human eye range.

POLAR DIAGRAM

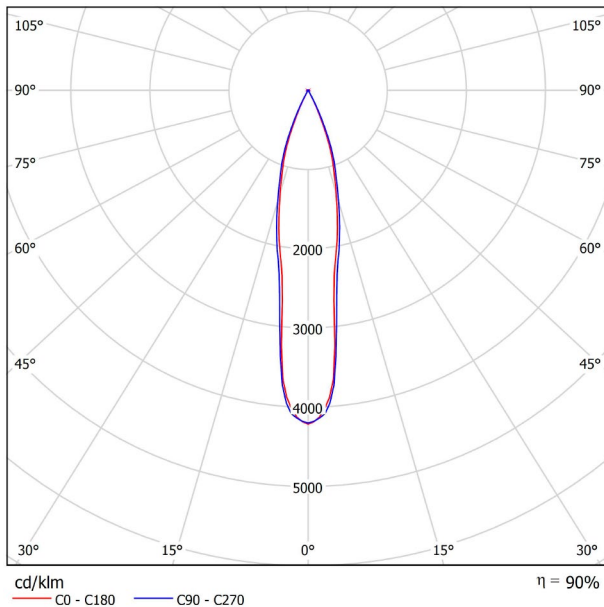

CONICAL DIAGRAM

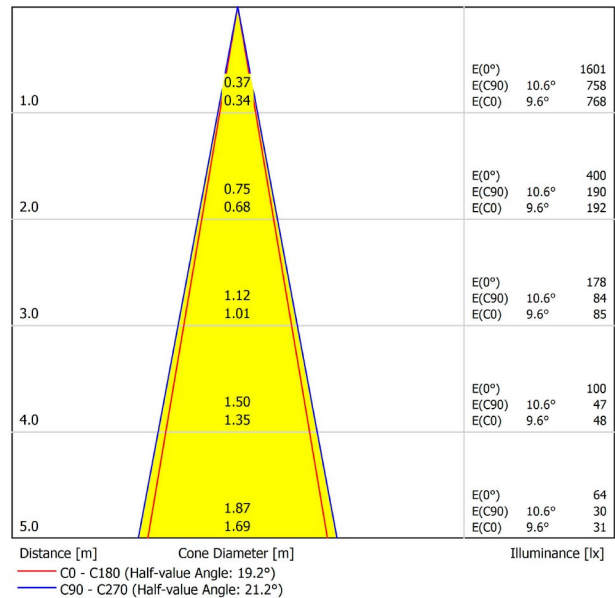


UGR

Glare Evaluation According to UGR												
ρ Ceiling		70	70	50	50	30	70	70	50	50	30	
ρ Walls		50	30	50	30	30	50	30	50	30	30	
ρ Floor		20	20	20	20	20	20	20	20	20	20	
Room Size X Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis					
2H	2H	4.3	4.9	4.5	5.1	5.3	4.0	4.6	4.2	4.8	5.0	
	3H	8.0	8.6	8.3	8.9	9.1	7.5	8.1	7.8	8.4	8.6	
	4H	9.9	10.5	10.2	10.8	11.0	9.5	10.1	9.8	10.4	10.6	
	6H	11.9	12.5	12.3	12.8	13.1	11.6	12.1	11.9	12.4	12.7	
	8H	13.1	13.6	13.4	13.9	14.2	12.9	13.4	13.2	13.7	14.0	
4H	12H	14.4	14.9	14.7	15.2	15.5	14.2	14.7	14.5	15.0	15.3	
	2H	5.3	5.9	5.6	6.2	6.4	5.1	5.7	5.4	6.0	6.2	
	3H	9.2	9.7	9.6	10.0	10.4	8.9	9.4	9.3	9.7	10.0	
	4H	11.3	11.7	11.6	12.0	12.4	11.1	11.5	11.4	11.8	12.2	
	6H	13.5	13.9	13.9	14.3	14.6	13.3	13.6	13.7	14.0	14.4	
8H	8H	14.8	15.1	15.2	15.5	15.9	14.7	15.0	15.1	15.4	15.8	
	12H	16.2	16.5	16.6	16.9	17.3	16.1	16.4	16.5	16.8	17.2	
	4H	12.1	12.4	12.5	12.8	13.2	11.9	12.3	12.3	12.6	13.0	
	6H	14.7	14.9	15.1	15.3	15.8	14.5	14.7	14.9	15.1	15.6	
	8H	16.1	16.3	16.5	16.7	17.2	16.0	16.2	16.5	16.6	17.1	
12H	12H	17.7	17.9	18.2	18.3	18.8	17.6	17.8	18.1	18.2	18.7	
	4H	12.4	12.6	12.8	13.0	13.5	12.2	12.5	12.6	12.9	13.3	
	6H	15.0	15.2	15.5	15.7	16.1	14.9	15.1	15.3	15.5	16.0	
8H		16.5	16.7	17.0	17.1	17.6	16.5	16.6	17.0	17.1	17.6	
Variation of the observer position for the luminaire distances S												
S = 1.0H		+0.2 / -0.1					+0.2 / -0.2					
S = 1.5H		+0.3 / -0.3					+0.3 / -0.3					
S = 2.0H		+0.5 / -0.5					+0.5 / -0.5					
Standard table		---					---					
Correction		---					---					
Summand		---					---					
Corrected Glare Indices referring to 380lm Total Luminous Flux												



DIMENSIONS



AWARDS



Name	BLACK FOSTER TRI 2 SPOT 3000K N
Reference	A3182111N
Color	Matt black
RAL	9005
Category	CEILING RECESSED

PRODUCT

Light source	LED
Gross luminous flux	420 Lm
Power	4,2 W
Power values of the system	4,67 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 3
Light beam angle	19°
Lighting efficiency	90%
Efficacy	100 Lm/W
Current intensity	700 mA
Control through bluetooth	Please Consult
Driver	Included - Connected
Emergency power supply	Please Consult
Electrical insulation class	□
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


Ingress Protection	IP20
Recess measurements	50 × 93 mm.
Weight	180 g.
Packaged weight	275 g.
Packaging dimensions	212 × 155 × 73 mm
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene / Polycarbonate

OTHER DATA




Black Foster is the product that transfers the claimed effect "The Invisible Black" to a recessed-isolated lineal luminary; also available in trimless version. If we take a closer view to the recessed model, its bezel is so thin than when lighted up, it is unperceived; offering an aesthetic of "visual trimless". Black Foster stands out for its refinement, its visual comfort and for almost completely hide the source of light from the human eye range.

POLAR DIAGRAM

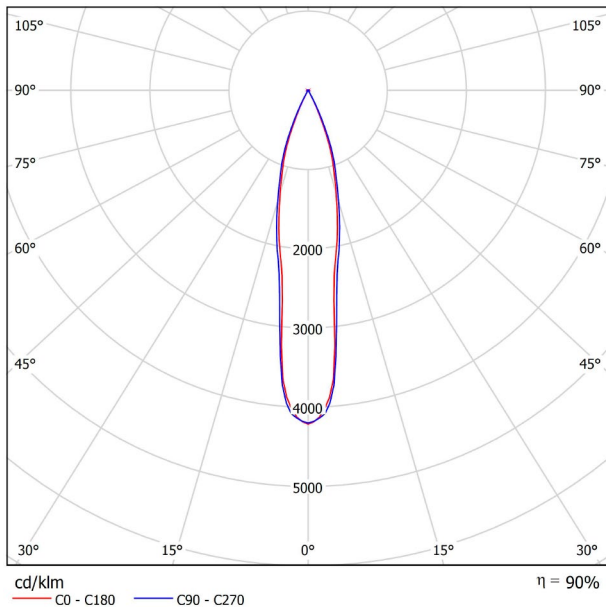

CONICAL DIAGRAM

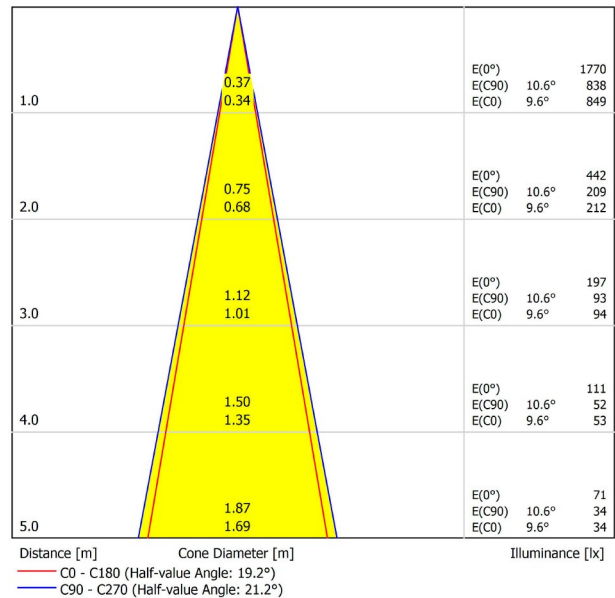


UGR

Glare Evaluation According to UGR												
ρ Ceiling		70	70	50	50	30	70	70	50	50	30	
ρ Walls		50	30	50	30	30	50	30	50	30	30	
ρ Floor		20	20	20	20	20	20	20	20	20	20	
Room Size X Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis					
2H	2H	4.6	5.3	4.9	5.5	5.7	4.3	5.0	4.6	5.2	5.4	
	3H	8.4	9.0	8.6	9.2	9.4	7.9	8.5	8.1	8.7	8.9	
	4H	10.3	10.8	10.6	11.1	11.4	9.9	10.5	10.2	10.7	11.0	
	6H	12.3	12.8	12.6	13.1	13.4	11.9	12.5	12.3	12.7	13.0	
	8H	13.4	13.9	13.7	14.2	14.5	13.2	13.7	13.6	14.0	14.3	
	12H	14.7	15.2	15.1	15.5	15.8	14.5	15.0	14.9	15.3	15.7	
4H	2H	5.7	6.3	6.0	6.5	6.8	5.5	6.1	5.8	6.3	6.6	
	3H	9.6	10.1	9.9	10.4	10.7	9.3	9.8	9.6	10.1	10.4	
	4H	11.6	12.1	12.0	12.4	12.7	11.4	11.8	11.8	12.2	12.5	
	6H	13.9	14.2	14.3	14.6	15.0	13.6	14.0	14.0	14.4	14.7	
	8H	15.1	15.4	15.5	15.8	16.2	15.0	15.3	15.4	15.7	16.1	
	12H	16.6	16.8	17.0	17.2	17.6	16.4	16.7	16.9	17.1	17.5	
8H	4H	12.4	12.8	12.9	13.1	13.5	12.3	12.6	12.7	13.0	13.4	
	6H	15.0	15.2	15.5	15.7	16.1	14.8	15.1	15.3	15.5	15.9	
	8H	16.4	16.6	16.9	17.0	17.5	16.3	16.5	16.8	17.0	17.5	
	12H	18.0	18.2	18.5	18.7	19.2	18.0	18.1	18.4	18.6	19.1	
12H	4H	12.7	13.0	13.1	13.4	13.8	12.6	12.8	13.0	13.2	13.7	
	6H	15.4	15.6	15.8	16.0	16.5	15.2	15.4	15.7	15.9	16.3	
	8H	16.9	17.0	17.4	17.5	18.0	16.8	17.0	17.3	17.4	17.9	
Variation of the observer position for the luminaire distances S												
S = 1.0H		+0.2 / -0.1					+0.2 / -0.2					
S = 1.5H		+0.3 / -0.3					+0.3 / -0.3					
S = 2.0H		+0.5 / -0.5					+0.5 / -0.5					
Standard table		---					---					
Correction		---					---					
Summand		---					---					
Corrected Glare Indices referring to 420lm Total Luminous Flux												



DIMENSIONS



AWARDS



Name	BLACK FOSTER TRI 2 SPOT 3000K NMG
Reference	A3182111NMG
Color	Matt black-Metallized gold
RAL	Metalllic finish
Category	CEILING RECESSED

PRODUCT

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	420 Lm
Power	4,2 W
Power values of the system	4,83 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 3
Light beam angle	19°
Lighting efficiency	90%
Efficacy	100 Lm/W
Current intensity	700 mA
Control through bluetooth	Please Consult
Driver	Included - Connected
Emergency power supply	Please Consult
Electrical insulation class	□
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Recess measurements	50 × 93 mm.
Weight	180 g.
Packaged weight	275 g.
Packaging dimensions	212 × 155 × 73 mm
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene / Polycarbonate




Black Foster is the product that transfers the claimed effect "The Invisible Black" to a recessed-isolated lineal luminary; also available in trimless version. If we take a closer view to the recessed model, its bezel is so thin than when lighted up, it is unperceived; offering an aesthetic of "visual trimless". Black Foster stands out for its refinement, its visual comfort and for almost completely hide the source of light from the human eye range.

POLAR DIAGRAM

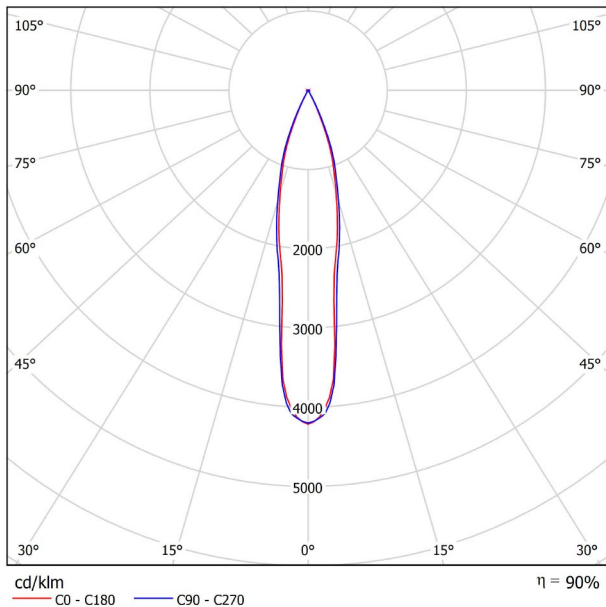

CONICAL DIAGRAM

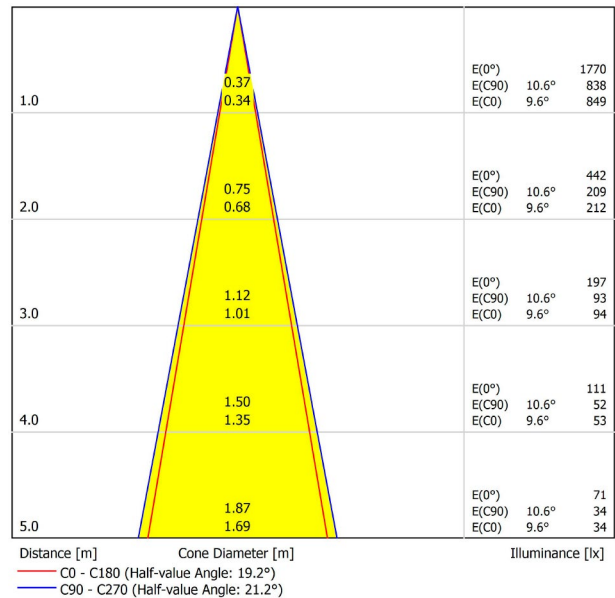


UGR

Glare Evaluation According to UGR												
ρ Ceiling		70	70	50	50	30	70	70	50	50	30	
ρ Walls		50	30	50	30	30	50	30	50	30	30	
ρ Floor		20	20	20	20	20	20	20	20	20	20	
Room Size X Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis					
2H	2H	4.6	5.3	4.9	5.5	5.7	4.3	5.0	4.6	5.2	5.4	
	3H	8.4	9.0	8.6	9.2	9.4	7.9	8.5	8.1	8.7	8.9	
	4H	10.3	10.8	10.6	11.1	11.4	9.9	10.5	10.2	10.7	11.0	
	6H	12.3	12.8	12.6	13.1	13.4	11.9	12.5	12.3	12.7	13.0	
	8H	13.4	13.9	13.7	14.2	14.5	13.2	13.7	13.6	14.0	14.3	
	12H	14.7	15.2	15.1	15.5	15.8	14.5	15.0	14.9	15.3	15.7	
4H	2H	5.7	6.3	6.0	6.5	6.8	5.5	6.1	5.8	6.3	6.6	
	3H	9.6	10.1	9.9	10.4	10.7	9.3	9.8	9.6	10.1	10.4	
	4H	11.6	12.1	12.0	12.4	12.7	11.4	11.8	11.8	12.2	12.5	
	6H	13.9	14.2	14.3	14.6	15.0	13.6	14.0	14.0	14.4	14.7	
	8H	15.1	15.4	15.5	15.8	16.2	15.0	15.3	15.4	15.7	16.1	
	12H	16.6	16.8	17.0	17.2	17.6	16.4	16.7	16.9	17.1	17.5	
8H	4H	12.4	12.8	12.9	13.1	13.5	12.3	12.6	12.7	13.0	13.4	
	6H	15.0	15.2	15.5	15.7	16.1	14.8	15.1	15.3	15.5	15.9	
	8H	16.4	16.6	16.9	17.0	17.5	16.3	16.5	16.8	17.0	17.5	
	12H	18.0	18.2	18.5	18.7	19.2	18.0	18.1	18.4	18.6	19.1	
12H	4H	12.7	13.0	13.1	13.4	13.8	12.6	12.8	13.0	13.2	13.7	
	6H	15.4	15.6	15.8	16.0	16.5	15.2	15.4	15.7	15.9	16.3	
	8H	16.9	17.0	17.4	17.5	18.0	16.8	17.0	17.3	17.4	17.9	
Variation of the observer position for the luminaire distances S												
S = 1.0H		+0.2 / -0.1					+0.2 / -0.2					
S = 1.5H		+0.3 / -0.3					+0.3 / -0.3					
S = 2.0H		+0.5 / -0.5					+0.5 / -0.5					
Standard table		---					---					
Correction		---					---					
Summand		---					---					
Corrected Glare Indices referring to 420lm Total Luminous Flux												



DIMENSIONS



AWARDS



Name	BLACK FOSTER TRI 2 SPOT 4000K N
Reference	A3182112N
Color	Matt black
RAL	9005
Category	CEILING RECESSED

PRODUCT

BLACK FOSTER TRI 2 SPOT 4000K N

A3182112N

Matt black

9005

CEILING RECESSED

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	500 Lm
Power	4,2 W
Power values of the system	4,67 W
Colour temperature	4000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 3
Light beam angle	19°
Lighting efficiency	90%
Efficacy	119 Lm/W
Current intensity	700 mA
Control through bluetooth	Please Consult
Driver	Included - Connected
Emergency power supply	Please Consult
Electrical insulation class	□
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A++
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Recess measurements	50 × 93 mm.
Weight	180 g.
Packaged weight	275 g.
Packaging dimensions	212 × 155 × 73 mm
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene / Polycarbonate




Black Foster is the product that transfers the claimed effect "The Invisible Black" to a recessed-isolated lineal luminary; also available in trimless version. If we take a closer view to the recessed model, its bezel is so thin than when lighted up, it is unperceived; offering an aesthetic of "visual trimless". Black Foster stands out for its refinement, its visual comfort and for almost completely hide the source of light from the human eye range.

POLAR DIAGRAM

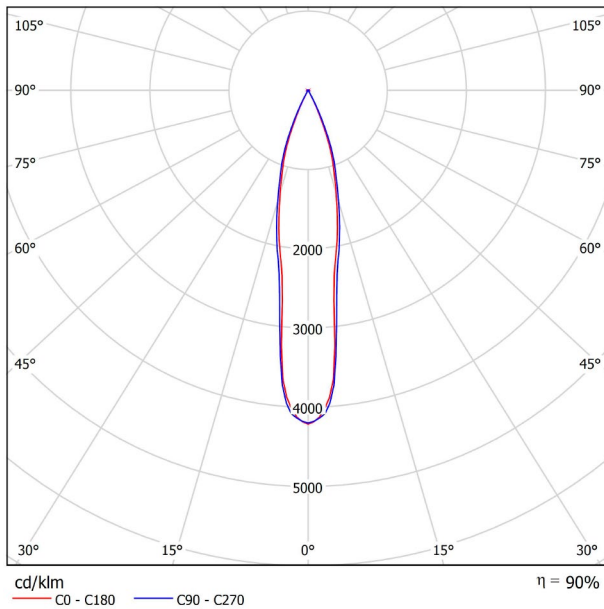

CONICAL DIAGRAM

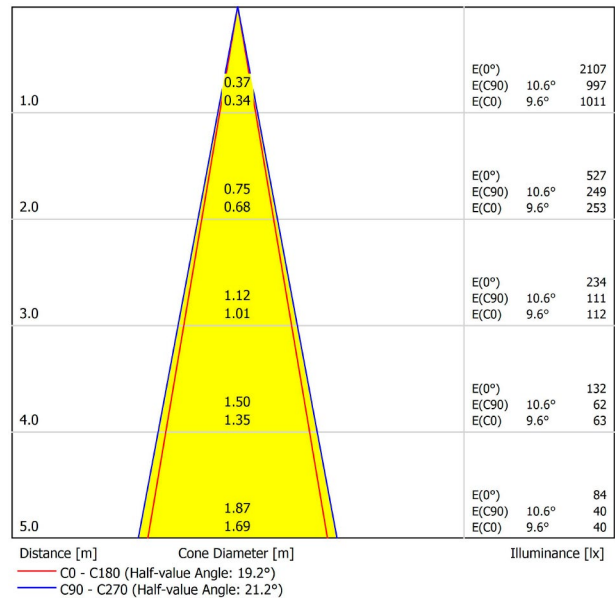


UGR

Glare Evaluation According to UGR												
ρ Ceiling		70	70	50	50	30	70	70	50	50	30	
ρ Walls		50	30	50	30	30	50	30	50	30	30	
ρ Floor		20	20	20	20	20	20	20	20	20	20	
Room Size X Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis					
2H	2H	5.2	5.9	5.5	6.1	6.3	4.9	5.6	5.2	5.8	6.0	
	3H	9.0	9.6	9.2	9.8	10.0	8.5	9.1	8.7	9.3	9.5	
	4H	10.9	11.5	11.2	11.7	12.0	10.5	11.1	10.8	11.3	11.6	
	6H	12.9	13.4	13.2	13.7	14.0	12.5	13.1	12.9	13.4	13.6	
	8H	14.0	14.5	14.3	14.8	15.1	13.8	14.3	14.2	14.6	14.9	
4H	12H	15.3	15.8	15.7	16.1	16.4	15.2	15.6	15.5	15.9	16.3	
	2H	6.3	6.9	6.6	7.1	7.4	6.1	6.7	6.4	6.9	7.2	
	3H	10.2	10.7	10.5	11.0	11.3	9.9	10.4	10.2	10.7	11.0	
	4H	12.2	12.7	12.6	13.0	13.3	12.0	12.5	12.4	12.8	13.1	
	6H	14.5	14.8	14.9	15.2	15.6	14.2	14.6	14.6	15.0	15.3	
8H	8H	15.7	16.0	16.1	16.4	16.8	15.6	15.9	16.0	16.3	16.7	
	12H	17.2	17.4	17.6	17.8	18.3	17.0	17.3	17.5	17.7	18.1	
	4H	13.0	13.4	13.5	13.7	14.1	12.9	13.2	13.3	13.6	14.0	
	6H	15.6	15.9	16.1	16.3	16.7	15.4	15.7	15.9	16.1	16.5	
	8H	17.0	17.2	17.5	17.6	18.1	16.9	17.2	17.4	17.6	18.1	
12H	12H	18.6	18.8	19.1	19.3	19.8	18.6	18.7	19.0	19.2	19.7	
	4H	13.3	13.6	13.7	14.0	14.4	13.2	13.4	13.6	13.8	14.3	
	6H	16.0	16.2	16.4	16.6	17.1	15.8	16.0	16.3	16.5	16.9	
	8H	17.5	17.6	18.0	18.1	18.6	17.4	17.6	17.9	18.1	18.5	
	Variation of the observer position for the luminaire distances S											
S = 1.0H		+0.2 / -0.1					+0.2 / -0.2					
S = 1.5H		+0.3 / -0.3					+0.3 / -0.3					
S = 2.0H		+0.5 / -0.5					+0.5 / -0.5					
Standard table		---					---					
Correction		---					---					
Summand		---					---					
Corrected Glare Indices referring to 500lm Total Luminous Flux												



DIMENSIONS



AWARDS



Name	BLACK FOSTER TRI 2 SPOT 4000K NMG
Reference	A3182112NMG
Color	Matt black-Metallized gold
RAL	Metalllic finish
Category	CEILING RECESSED

PRODUCT

Light source	LED
Gross luminous flux	500 Lm
Power	4,2 W
Power values of the system	4,83 W
Colour temperature	4000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 3
Light beam angle	19°
Lighting efficiency	90%
Efficacy	119 Lm/W
Current intensity	700 mA
Control through bluetooth	Please Consult
Driver	Included - Connected
Emergency power supply	Please Consult
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A++
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


Ingress Protection	IP20
Recess measurements	50 × 93 mm.
Weight	180 g.
Packaged weight	275 g.
Packaging dimensions	212 × 155 × 73 mm
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene / Polycarbonate

OTHER DATA




Black Foster is the product that transfers the claimed effect "The Invisible Black" to a recessed-isolated lineal luminary; also available in trimless version. If we take a closer view to the recessed model, its bezel is so thin than when lighted up, it is unperceived; offering an aesthetic of "visual trimless". Black Foster stands out for its refinement, its visual comfort and for almost completely hide the source of light from the human eye range.

POLAR DIAGRAM

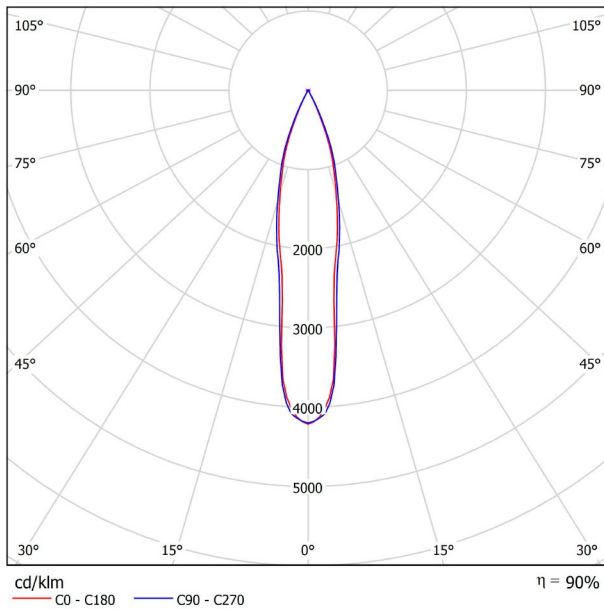

CONICAL DIAGRAM

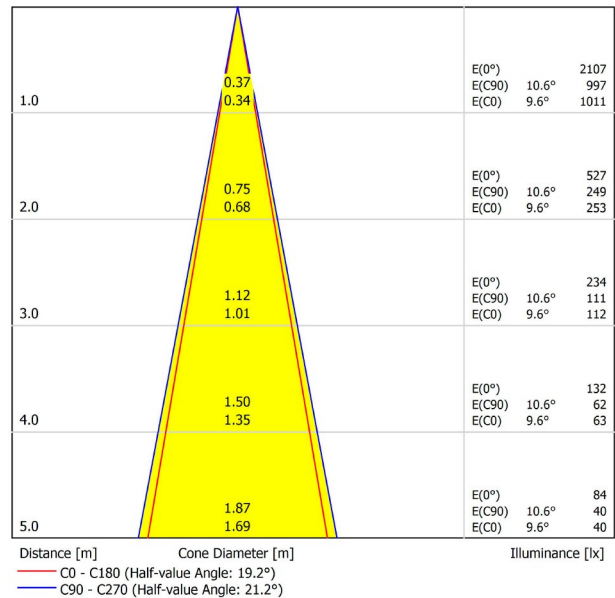

UGR

Glare Evaluation According to UGR												
ρ Ceiling		70	70	50	50	30	70	70	50	50	30	
ρ Walls		50	30	50	30	30	50	30	50	30	30	
ρ Floor		20	20	20	20	20	20	20	20	20	20	
Room Size X Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis					
2H	2H	5.2	5.9	5.5	6.1	6.3	4.9	5.6	5.2	5.8	6.0	
	3H	9.0	9.6	9.2	9.8	10.0	8.5	9.1	8.7	9.3	9.5	
	4H	10.9	11.5	11.2	11.7	12.0	10.5	11.1	10.8	11.3	11.6	
	6H	12.9	13.4	13.2	13.7	14.0	12.5	13.1	12.9	13.4	13.6	
	8H	14.0	14.5	14.3	14.8	15.1	13.8	14.3	14.2	14.6	14.9	
4H	12H	15.3	15.8	15.7	16.1	16.4	15.2	15.6	15.5	15.9	16.3	
	2H	6.3	6.9	6.6	7.1	7.4	6.1	6.7	6.4	6.9	7.2	
	3H	10.2	10.7	10.5	11.0	11.3	9.9	10.4	10.2	10.7	11.0	
	4H	12.2	12.7	12.6	13.0	13.3	12.0	12.5	12.4	12.8	13.1	
	6H	14.5	14.8	14.9	15.2	15.6	14.2	14.6	14.6	15.0	15.3	
8H	8H	15.7	16.0	16.1	16.4	16.8	15.6	15.9	16.0	16.3	16.7	
	12H	17.2	17.4	17.6	17.8	18.3	17.0	17.3	17.5	17.7	18.1	
	4H	13.0	13.4	13.5	13.7	14.1	12.9	13.2	13.3	13.6	14.0	
	6H	15.6	15.9	16.1	16.3	16.7	15.4	15.7	15.9	16.1	16.5	
	8H	17.0	17.2	17.5	17.6	18.1	16.9	17.2	17.4	17.6	18.1	
12H	12H	18.6	18.8	19.1	19.3	19.8	18.6	18.7	19.0	19.2	19.7	
	4H	13.3	13.6	13.7	14.0	14.4	13.2	13.4	13.6	13.8	14.3	
	6H	16.0	16.2	16.4	16.6	17.1	15.8	16.0	16.3	16.5	16.9	
	8H	17.5	17.6	18.0	18.1	18.6	17.4	17.6	17.9	18.1	18.5	
	Variation of the observer position for the luminaire distances S											
S = 1.0H S = 1.5H S = 2.0H		+0.2 / -0.1 +0.3 / -0.3 +0.5 / -0.5					+0.2 / -0.2 +0.3 / -0.3 +0.5 / -0.5					
Standard table		---					---					
Correction		---					---					
Summand		---					---					
Corrected Glare Indices referring to 500lm Total Luminous Flux												