




DIMENSIONS



AWARDS



Name	PUCK L 2700K MC
Reference	A2512000MC
Color	Metallized copper
RAL	Paint of metallic nanoparticles
Category	SURFACE

PRODUCT

Light source	LED
Gross luminous flux	1500 Lm
Power	20 W
Power values of the system	20,00 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 3
Light beam angle	45°
Lighting efficiency	80%
Efficacy	75 Lm/W
Driver	Included
Electrical insulation class	⚡
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A
LED lifespan	L70B50 (Tc=85°C) >36.000h

LIGHTING INFORMATION


Ingress Protection	IP20
Weight	510 g.
Packaged weight	570 g.
Packaging dimensions	134 × 119 × 73,5 mm
Units per package	1
Materials	Aluminium / Optical Glass

OTHER DATA




Puck is a luminaire that –for its function, opening angle and luminous flux- manages to embody, in a surface piece, the performance of the classic recessed luminaires with dichroic lamps. Puck is designed to undertake general lighting functions and, moreover, given its ultra-compact format, aims to conserve discretion in those places where it is impossible to recess the appliances in the ceiling.

POLAR DIAGRAM

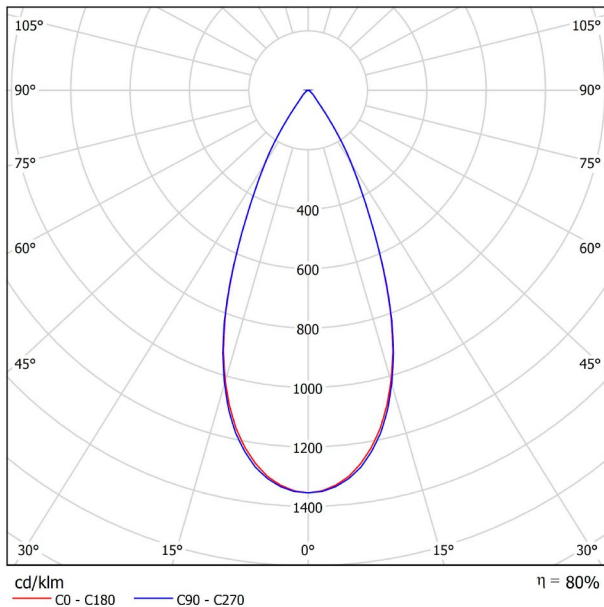

CONICAL DIAGRAM

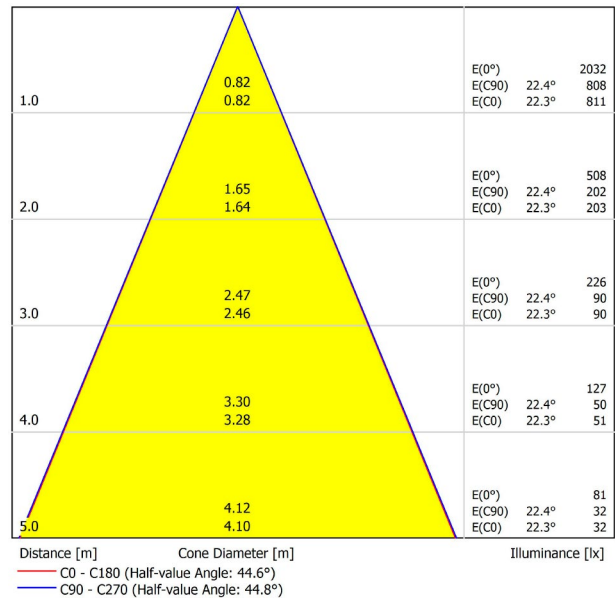


UGR

Glare Evaluation According to UGR												
ρ Ceiling		70	70	50	50	30	70	70	50	50	30	
ρ Walls		50	30	50	30	30	50	30	50	30	30	
ρ Floor		20	20	20	20	20	20	20	20	20	20	
Room Size X Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis					
2H	2H	7.5	8.2	7.8	8.4	8.6	7.5	8.2	7.7	8.4	8.6	
	3H	9.3	9.9	9.6	10.1	10.4	9.5	10.2	9.8	10.4	10.6	
	4H	10.4	11.0	10.7	11.2	11.5	10.5	11.1	10.8	11.3	11.6	
	6H	11.0	11.5	11.3	11.8	12.1	11.1	11.6	11.4	11.9	12.2	
	8H	11.2	11.7	11.5	12.0	12.3	11.4	11.9	11.7	12.2	12.5	
	12H	11.4	11.9	11.7	12.2	12.5	11.6	12.1	12.0	12.4	12.7	
4H	2H	7.8	8.4	8.1	8.7	8.9	7.8	8.4	8.1	8.6	8.9	
	3H	10.1	10.6	10.5	10.9	11.2	10.3	10.8	10.7	11.1	11.4	
	4H	11.4	11.8	11.7	12.1	12.5	11.5	11.9	11.8	12.2	12.6	
	6H	12.1	12.4	12.5	12.8	13.2	12.2	12.5	12.6	12.9	13.3	
	8H	12.4	12.7	12.8	13.0	13.4	12.6	12.9	13.0	13.3	13.7	
	12H	12.6	12.9	13.1	13.3	13.7	12.9	13.1	13.3	13.5	14.0	
8H	4H	11.8	12.1	12.2	12.4	12.8	11.8	12.2	12.3	12.5	12.9	
	6H	12.6	12.9	13.1	13.3	13.7	12.7	13.0	13.2	13.4	13.8	
	8H	13.0	13.2	13.4	13.6	14.1	13.2	13.4	13.7	13.8	14.3	
	12H	13.4	13.6	13.9	14.0	14.5	13.6	13.8	14.1	14.2	14.7	
12H	4H	11.8	12.1	12.2	12.5	12.9	11.9	12.1	12.3	12.5	13.0	
	6H	12.7	12.9	13.2	13.4	13.8	12.8	13.0	13.3	13.4	13.9	
	8H	13.1	13.3	13.6	13.7	14.2	13.3	13.5	13.8	14.0	14.5	
Variation of the observer position for the luminaire distances S												
S = 1.0H		+3.9 / -2.4					+3.8 / -2.3					
S = 1.5H		+6.4 / -3.0					+6.3 / -2.9					
S = 2.0H		+8.3 / -3.5					+8.2 / -3.3					
Standard table		BK02					BK02					
Correction Summand		-4.4					-4.5					
Corrected Glare Indices referring to 1500lm Total Luminous Flux												



DIMENSIONS



AWARDS



Name	PUCK L 2700K MG
Reference	A2512000MG
Color	Metallized gold
RAL	Paint of metallic nanoparticles
Category	SURFACE

PRODUCT

Light source	LED
Gross luminous flux	1500 Lm
Power	20 W
Power values of the system	20,00 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 3
Light beam angle	45°
Lighting efficiency	80%
Efficacy	75 Lm/W
Driver	Included
Electrical insulation class	⚡
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A
LED lifespan	L70B50 (Tc=85°C) >36.000h

LIGHTING INFORMATION


Ingress Protection	IP20
Weight	510 g.
Packaged weight	570 g.
Packaging dimensions	134 × 119 × 73,5 mm
Units per package	1
Materials	Aluminium / Optical Glass

OTHER DATA




Puck is a luminary that –for its function, opening angle and luminous flux- manages to embody, in a surface piece, the performance of the classic recessed luminaries with dichroic lamps. Puck is designed to undertake general lighting functions and, moreover, given its ultra-compact format, aims to conserve discretion in those places where it is impossible to recess the appliances in the ceiling.

POLAR DIAGRAM

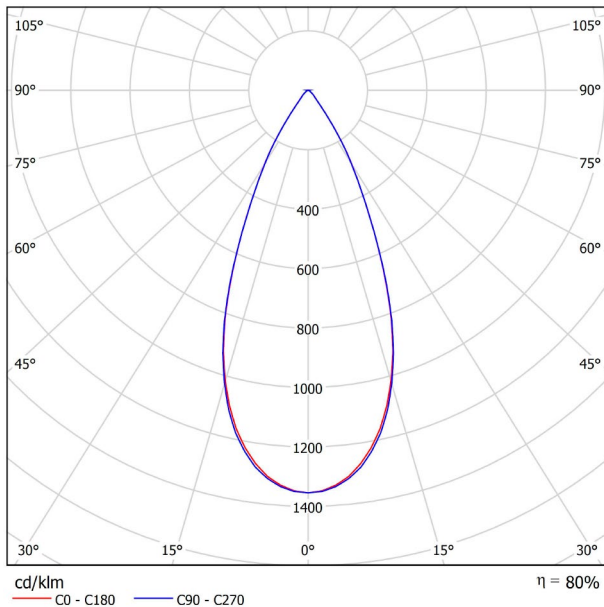

CONICAL DIAGRAM

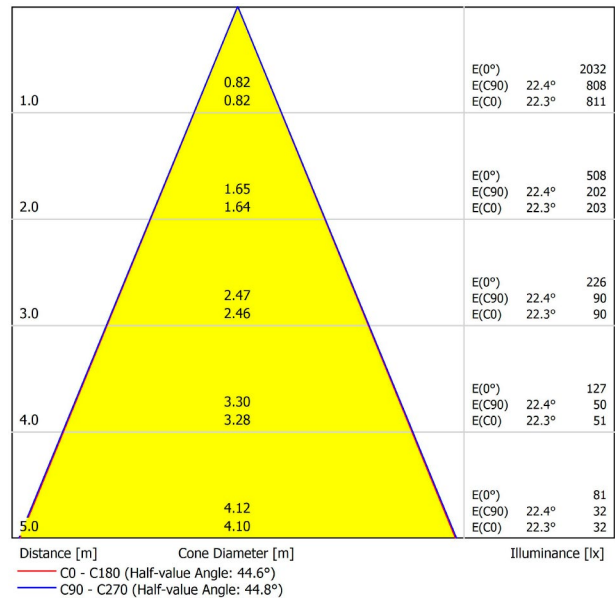


UGR

Glare Evaluation According to UGR												
ρ Ceiling		70	70	50	50	30	70	70	50	50	30	
ρ Walls		50	30	50	30	30	50	30	50	30	30	
ρ Floor		20	20	20	20	20	20	20	20	20	20	
Room Size X Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis					
2H	2H	7.5	8.2	7.8	8.4	8.6	7.5	8.2	7.7	8.4	8.6	
	3H	9.3	9.9	9.6	10.1	10.4	9.5	10.2	9.8	10.4	10.6	
	4H	10.4	11.0	10.7	11.2	11.5	10.5	11.1	10.8	11.3	11.6	
	6H	11.0	11.5	11.3	11.8	12.1	11.1	11.6	11.4	11.9	12.2	
	8H	11.2	11.7	11.5	12.0	12.3	11.4	11.9	11.7	12.2	12.5	
	12H	11.4	11.9	11.7	12.2	12.5	11.6	12.1	12.0	12.4	12.7	
4H	2H	7.8	8.4	8.1	8.7	8.9	7.8	8.4	8.1	8.6	8.9	
	3H	10.1	10.6	10.5	10.9	11.2	10.3	10.8	10.7	11.1	11.4	
	4H	11.4	11.8	11.7	12.1	12.5	11.5	11.9	11.8	12.2	12.6	
	6H	12.1	12.4	12.5	12.8	13.2	12.2	12.5	12.6	12.9	13.3	
	8H	12.4	12.7	12.8	13.0	13.4	12.6	12.9	13.0	13.3	13.7	
	12H	12.6	12.9	13.1	13.3	13.7	12.9	13.1	13.3	13.5	14.0	
8H	4H	11.8	12.1	12.2	12.4	12.8	11.8	12.2	12.3	12.5	12.9	
	6H	12.6	12.9	13.1	13.3	13.7	12.7	13.0	13.2	13.4	13.8	
	8H	13.0	13.2	13.4	13.6	14.1	13.2	13.4	13.7	13.8	14.3	
	12H	13.4	13.6	13.9	14.0	14.5	13.6	13.8	14.1	14.2	14.7	
12H	4H	11.8	12.1	12.2	12.5	12.9	11.9	12.1	12.3	12.5	13.0	
	6H	12.7	12.9	13.2	13.4	13.8	12.8	13.0	13.3	13.4	13.9	
	8H	13.1	13.3	13.6	13.7	14.2	13.3	13.5	13.8	14.0	14.5	
Variation of the observer position for the luminaire distances S												
S = 1.0H S = 1.5H S = 2.0H		+3.9 / -2.4 +6.4 / -3.0 +8.3 / -3.5					+3.8 / -2.3 +6.3 / -2.9 +8.2 / -3.3					
Standard table		BK02					BK02					
Correction Summand		-4.4					-4.5					
Corrected Glare Indices referring to 1500lm Total Luminous Flux												



DIMENSIONS



AWARDS



Name	PUCK L 2700K NT
Reference	A2512000NT
Color	Textured black
RAL	9005
Category	SURFACE

PRODUCT

Light source	LED
Gross luminous flux	1500 Lm
Power	20 W
Power values of the system	20,00 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 3
Light beam angle	45°
Lighting efficiency	80%
Efficacy	75 Lm/W
Driver	Included
Electrical insulation class	⚡
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A
LED lifespan	L70B50 (Tc=85°C) >36.000h

LIGHTING INFORMATION


Ingress Protection	IP20
Weight	510 g.
Packaged weight	570 g.
Packaging dimensions	134 × 119 × 73,5 mm
Units per package	1
Materials	Aluminium / Optical Glass

OTHER DATA




Puck is a luminaire that –for its function, opening angle and luminous flux- manages to embody, in a surface piece, the performance of the classic recessed luminaires with dichroic lamps. Puck is designed to undertake general lighting functions and, moreover, given its ultra-compact format, aims to conserve discretion in those places where it is impossible to recess the appliances in the ceiling.

POLAR DIAGRAM

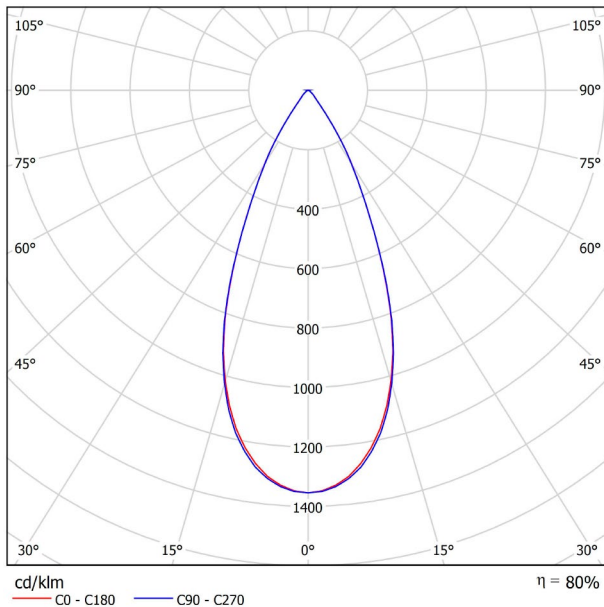

CONICAL DIAGRAM

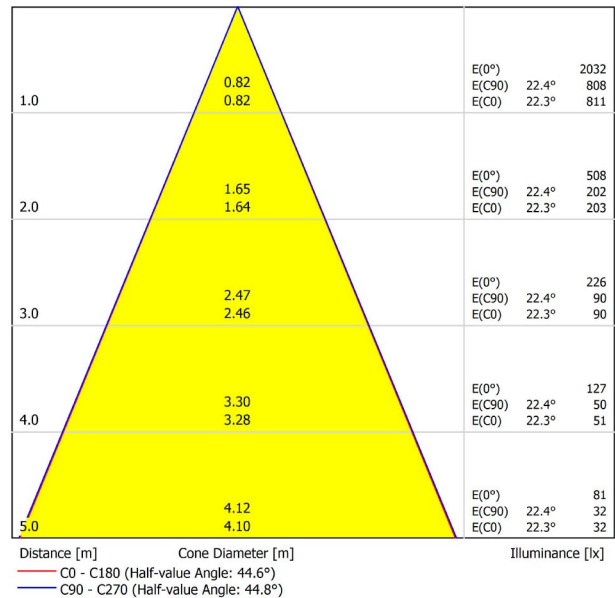


UGR

Glare Evaluation According to UGR												
ρ Ceiling		70	70	50	50	30	70	70	50	50	30	
ρ Walls		50	30	50	30	30	50	30	50	30	30	
ρ Floor		20	20	20	20	20	20	20	20	20	20	
Room Size X Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis					
2H	2H	7.5	8.2	7.8	8.4	8.6	7.5	8.2	7.7	8.4	8.6	
	3H	9.3	9.9	9.6	10.1	10.4	9.5	10.2	9.8	10.4	10.6	
	4H	10.4	11.0	10.7	11.2	11.5	10.5	11.1	10.8	11.3	11.6	
	6H	11.0	11.5	11.3	11.8	12.1	11.1	11.6	11.4	11.9	12.2	
	8H	11.2	11.7	11.5	12.0	12.3	11.4	11.9	11.7	12.2	12.5	
	12H	11.4	11.9	11.7	12.2	12.5	11.6	12.1	12.0	12.4	12.7	
4H	2H	7.8	8.4	8.1	8.7	8.9	7.8	8.4	8.1	8.6	8.9	
	3H	10.1	10.6	10.5	10.9	11.2	10.3	10.8	10.7	11.1	11.4	
	4H	11.4	11.8	11.7	12.1	12.5	11.5	11.9	11.8	12.2	12.6	
	6H	12.1	12.4	12.5	12.8	13.2	12.2	12.5	12.6	12.9	13.3	
	8H	12.4	12.7	12.8	13.0	13.4	12.6	12.9	13.0	13.3	13.7	
	12H	12.6	12.9	13.1	13.3	13.7	12.9	13.1	13.3	13.5	14.0	
8H	4H	11.8	12.1	12.2	12.4	12.8	11.8	12.2	12.3	12.5	12.9	
	6H	12.6	12.9	13.1	13.3	13.7	12.7	13.0	13.2	13.4	13.8	
	8H	13.0	13.2	13.4	13.6	14.1	13.2	13.4	13.7	13.8	14.3	
	12H	13.4	13.6	13.9	14.0	14.5	13.6	13.8	14.1	14.2	14.7	
12H	4H	11.8	12.1	12.2	12.5	12.9	11.9	12.1	12.3	12.5	13.0	
	6H	12.7	12.9	13.2	13.4	13.8	12.8	13.0	13.3	13.4	13.9	
	8H	13.1	13.3	13.6	13.7	14.2	13.3	13.5	13.8	14.0	14.5	
Variation of the observer position for the luminaire distances S												
S = 1.0H		+3.9 / -2.4					+3.8 / -2.3					
S = 1.5H		+6.4 / -3.0					+6.3 / -2.9					
S = 2.0H		+8.3 / -3.5					+8.2 / -3.3					
Standard table		BK02					BK02					
Correction Summand		-4.4					-4.5					
Corrected Glare Indices referring to 1500lm Total Luminous Flux												



DIMENSIONS



AWARDS



Name	PUCK L 2700K WT
Reference	A2512000WT
Color	Textured white
RAL	9016
Category	SURFACE

PRODUCT

Light source	LED
Gross luminous flux	1500 Lm
Power	20 W
Power values of the system	20,00 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 3
Light beam angle	45°
Lighting efficiency	80%
Efficacy	75 Lm/W
Driver	Included
Electrical insulation class	⚡
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A
LED lifespan	L70B50 (Tc=85°C) >36.000h

LIGHTING INFORMATION


Ingress Protection	IP20
Weight	510 g.
Packaged weight	570 g.
Packaging dimensions	134 × 119 × 73,5 mm
Units per package	1
Materials	Aluminium / Optical Glass

OTHER DATA




Puck is a luminaire that –for its function, opening angle and luminous flux- manages to embody, in a surface piece, the performance of the classic recessed luminaires with dichroic lamps. Puck is designed to undertake general lighting functions and, moreover, given its ultra-compact format, aims to conserve discretion in those places where it is impossible to recess the appliances in the ceiling.

POLAR DIAGRAM

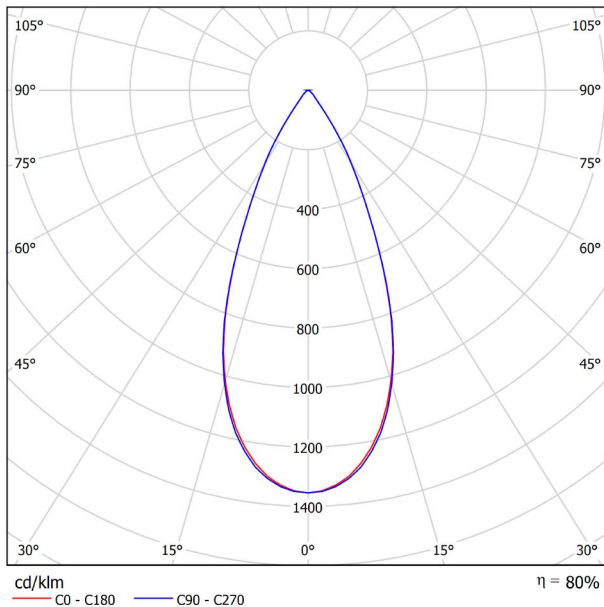

CONICAL DIAGRAM

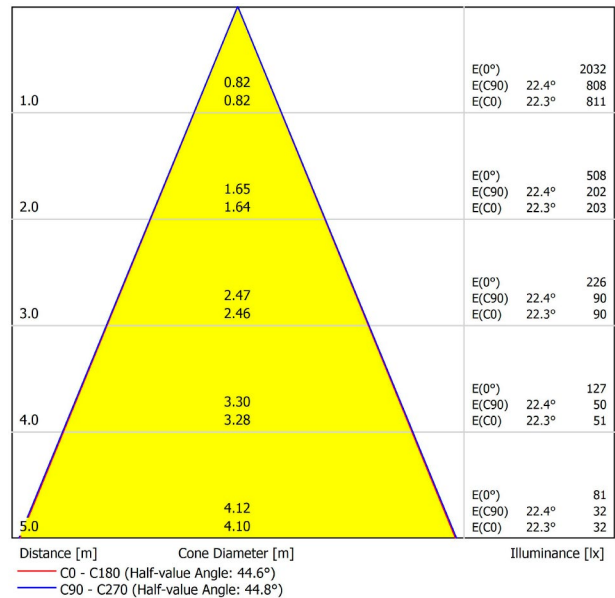


UGR

Glare Evaluation According to UGR												
ρ Ceiling		70	70	50	50	30	70	70	50	50	30	
ρ Walls		50	30	50	30	30	50	30	50	30	30	
ρ Floor		20	20	20	20	20	20	20	20	20	20	
Room Size X Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis					
2H	2H	7.5	8.2	7.8	8.4	8.6	7.5	8.2	7.7	8.4	8.6	
	3H	9.3	9.9	9.6	10.1	10.4	9.5	10.2	9.8	10.4	10.6	
	4H	10.4	11.0	10.7	11.2	11.5	10.5	11.1	10.8	11.3	11.6	
	6H	11.0	11.5	11.3	11.8	12.1	11.1	11.6	11.4	11.9	12.2	
	8H	11.2	11.7	11.5	12.0	12.3	11.4	11.9	11.7	12.2	12.5	
	12H	11.4	11.9	11.7	12.2	12.5	11.6	12.1	12.0	12.4	12.7	
4H	2H	7.8	8.4	8.1	8.7	8.9	7.8	8.4	8.1	8.6	8.9	
	3H	10.1	10.6	10.5	10.9	11.2	10.3	10.8	10.7	11.1	11.4	
	4H	11.4	11.8	11.7	12.1	12.5	11.5	11.9	11.8	12.2	12.6	
	6H	12.1	12.4	12.5	12.8	13.2	12.2	12.5	12.6	12.9	13.3	
	8H	12.4	12.7	12.8	13.0	13.4	12.6	12.9	13.0	13.3	13.7	
	12H	12.6	12.9	13.1	13.3	13.7	12.9	13.1	13.3	13.5	14.0	
8H	4H	11.8	12.1	12.2	12.4	12.8	11.8	12.2	12.3	12.5	12.9	
	6H	12.6	12.9	13.1	13.3	13.7	12.7	13.0	13.2	13.4	13.8	
	8H	13.0	13.2	13.4	13.6	14.1	13.2	13.4	13.7	13.8	14.3	
	12H	13.4	13.6	13.9	14.0	14.5	13.6	13.8	14.1	14.2	14.7	
12H	4H	11.8	12.1	12.2	12.5	12.9	11.9	12.1	12.3	12.5	13.0	
	6H	12.7	12.9	13.2	13.4	13.8	12.8	13.0	13.3	13.4	13.9	
	8H	13.1	13.3	13.6	13.7	14.2	13.3	13.5	13.8	14.0	14.5	
Variation of the observer position for the luminaire distances S												
S = 1.0H		+3.9 / -2.4					+3.8 / -2.3					
S = 1.5H		+6.4 / -3.0					+6.3 / -2.9					
S = 2.0H		+8.3 / -3.5					+8.2 / -3.3					
Standard table		BK02					BK02					
Correction Summand		-4.4					-4.5					
Corrected Glare Indices referring to 1500lm Total Luminous Flux												



DIMENSIONS



AWARDS



Name	PUCK L 3000K MC
Reference	A2512001MC
Color	Metallized copper
RAL	Paint of metallic nanoparticles
Category	SURFACE

PRODUCT

Light source	LED
Gross luminous flux	1600 Lm
Power	20 W
Power values of the system	20,00 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 3
Light beam angle	45°
Lighting efficiency	80%
Efficacy	80 Lm/W
Driver	Included
Electrical insulation class	
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A
LED lifespan	L70B50 (Tc=85°C) >36.000h

LIGHTING INFORMATION


Ingress Protection	IP20
Weight	510 g.
Packaged weight	570 g.
Packaging dimensions	134 × 119 × 73,5 mm
Units per package	1
Materials	Aluminium / Optical Glass

OTHER DATA




Puck is a luminaire that –for its function, opening angle and luminous flux- manages to embody, in a surface piece, the performance of the classic recessed luminaires with dichroic lamps. Puck is designed to undertake general lighting functions and, moreover, given its ultra-compact format, aims to conserve discretion in those places where it is impossible to recess the appliances in the ceiling.

POLAR DIAGRAM

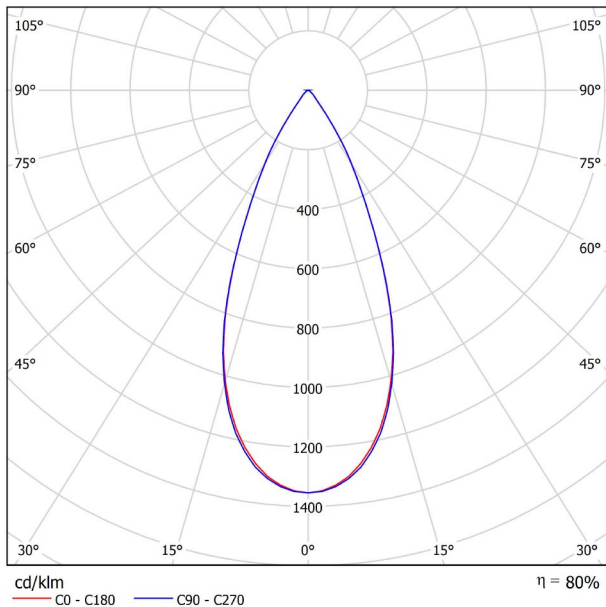

CONICAL DIAGRAM

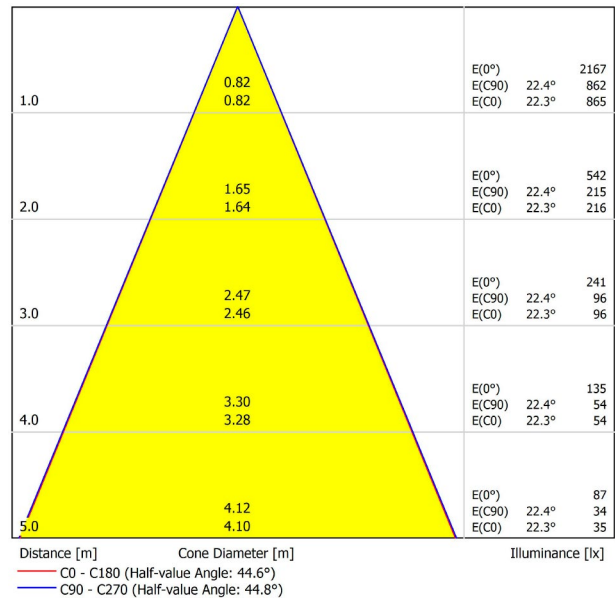


UGR

Glare Evaluation According to UGR												
ρ Ceiling		70	70	50	50	30	70	70	50	50	30	
ρ Walls		50	30	50	30	30	50	30	50	30	30	
ρ Floor		20	20	20	20	20	20	20	20	20	20	
Room Size X Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis					
2H	2H	7.8	8.5	8.0	8.6	8.8	7.7	8.4	8.0	8.6	8.8	
	3H	9.5	10.1	9.8	10.4	10.6	9.8	10.4	10.0	10.6	10.9	
	4H	10.6	11.2	10.9	11.4	11.7	10.7	11.3	11.0	11.6	11.8	
	6H	11.2	11.7	11.5	12.0	12.3	11.3	11.9	11.6	12.1	12.4	
	8H	11.4	11.9	11.7	12.2	12.5	11.6	12.1	11.9	12.4	12.7	
	12H	11.6	12.1	12.0	12.4	12.7	11.8	12.3	12.2	12.6	12.9	
4H	2H	8.1	8.7	8.4	8.9	9.2	8.0	8.6	8.3	8.9	9.1	
	3H	10.4	10.8	10.7	11.2	11.5	10.5	11.0	10.9	11.3	11.6	
	4H	11.6	12.0	12.0	12.3	12.7	11.7	12.1	12.1	12.4	12.8	
	6H	12.3	12.7	12.7	13.0	13.4	12.4	12.8	12.8	13.1	13.5	
	8H	12.6	12.9	13.0	13.3	13.7	12.8	13.1	13.2	13.5	13.9	
	12H	12.9	13.1	13.3	13.5	14.0	13.1	13.4	13.5	13.8	14.2	
8H	4H	12.0	12.3	12.4	12.7	13.1	12.1	12.4	12.5	12.8	13.2	
	6H	12.8	13.1	13.3	13.5	13.9	12.9	13.2	13.4	13.6	14.0	
	8H	13.2	13.4	13.7	13.8	14.3	13.4	13.6	13.9	14.1	14.5	
	12H	13.6	13.8	14.1	14.2	14.7	13.8	14.0	14.3	14.5	15.0	
12H	4H	12.0	12.3	12.4	12.7	13.1	12.1	12.4	12.5	12.8	13.2	
	6H	12.9	13.1	13.4	13.6	14.0	13.0	13.2	13.5	13.7	14.1	
	8H	13.3	13.5	13.8	14.0	14.5	13.6	13.7	14.0	14.2	14.7	
Variation of the observer position for the luminaire distances S												
S = 1.0H		+3.9 / -2.4					+3.8 / -2.3					
S = 1.5H		+6.4 / -3.0					+6.3 / -2.9					
S = 2.0H		+8.3 / -3.5					+8.2 / -3.3					
Standard table		BK02					BK02					
Correction Summand		-4.4					-4.5					
Corrected Glare Indices referring to 1600lm Total Luminous Flux												



DIMENSIONS



AWARDS



Name	PUCK L 3000K MG
Reference	A2512001MG
Color	Metallized gold
RAL	Paint of metallic nanoparticles
Category	SURFACE

PRODUCT

Light source	LED
Gross luminous flux	1600 Lm
Power	20 W
Power values of the system	20,00 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 3
Light beam angle	45°
Lighting efficiency	80%
Efficacy	80 Lm/W
Driver	Included
Electrical insulation class	
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A
LED lifespan	L70B50 (Tc=85°C) >36.000h

LIGHTING INFORMATION


Ingress Protection	IP20
Weight	510 g.
Packaged weight	570 g.
Packaging dimensions	134 × 119 × 73,5 mm
Units per package	1
Materials	Aluminium / Optical Glass

OTHER DATA




Puck is a luminary that –for its function, opening angle and luminous flux- manages to embody, in a surface piece, the performance of the classic recessed luminaries with dichroic lamps. Puck is designed to undertake general lighting functions and, moreover, given its ultra-compact format, aims to conserve discretion in those places where it is impossible to recess the appliances in the ceiling.

POLAR DIAGRAM

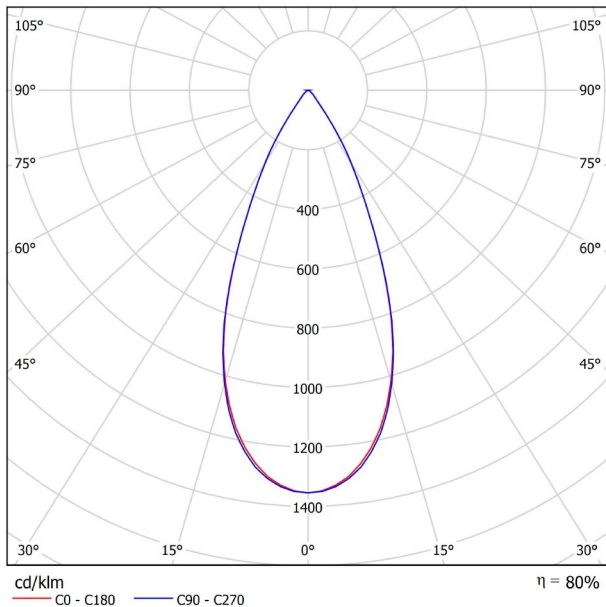

CONICAL DIAGRAM

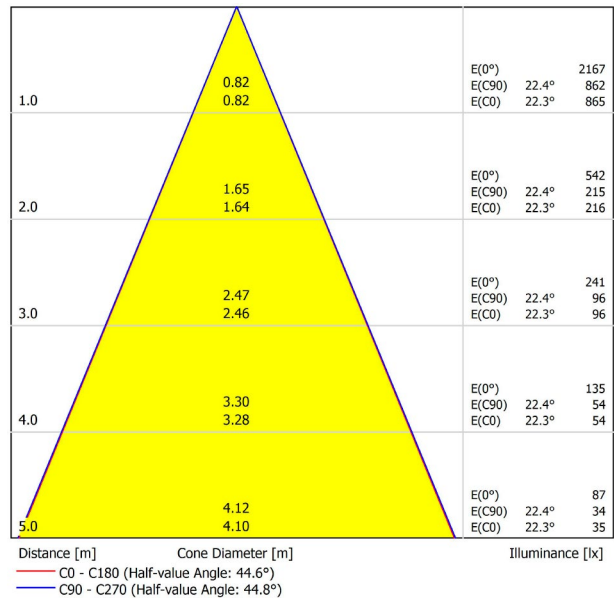


UGR

Glare Evaluation According to UGR												
ρ Ceiling		70	70	50	50	30	70	70	50	50	30	30
ρ Walls		50	30	50	30	30	50	30	50	30	30	30
ρ Floor		20	20	20	20	20	20	20	20	20	20	20
Room Size X Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis					
2H	2H	7.8	8.5	8.0	8.6	8.8	7.7	8.4	8.0	8.6	8.8	
	3H	9.5	10.1	9.8	10.4	10.6	9.8	10.4	10.0	10.6	10.9	
	4H	10.6	11.2	10.9	11.4	11.7	10.7	11.3	11.0	11.6	11.8	
	6H	11.2	11.7	11.5	12.0	12.3	11.3	11.9	11.6	12.1	12.4	
	8H	11.4	11.9	11.7	12.2	12.5	11.6	12.1	11.9	12.4	12.7	
4H	12H	11.6	12.1	12.0	12.4	12.7	11.8	12.3	12.2	12.6	12.9	
	2H	8.1	8.7	8.4	8.9	9.2	8.0	8.6	8.3	8.9	9.1	
	3H	10.4	10.8	10.7	11.2	11.5	10.5	11.0	10.9	11.3	11.6	
	4H	11.6	12.0	12.0	12.3	12.7	11.7	12.1	12.1	12.4	12.8	
	6H	12.3	12.7	12.7	13.0	13.4	12.4	12.8	12.8	13.1	13.5	
8H	8H	12.6	12.9	13.0	13.3	13.7	12.8	13.1	13.2	13.5	13.9	
	12H	12.9	13.1	13.3	13.5	14.0	13.1	13.4	13.5	13.8	14.2	
	4H	12.0	12.3	12.4	12.7	13.1	12.1	12.4	12.5	12.8	13.2	
	6H	12.8	13.1	13.3	13.5	13.9	12.9	13.2	13.4	13.6	14.0	
	8H	13.2	13.4	13.7	13.8	14.3	13.4	13.6	13.9	14.1	14.5	
12H	12H	13.6	13.8	14.1	14.2	14.7	13.8	14.0	14.3	14.5	15.0	
	4H	12.0	12.3	12.4	12.7	13.1	12.1	12.4	12.5	12.8	13.2	
	6H	12.9	13.1	13.4	13.6	14.0	13.0	13.2	13.5	13.7	14.1	
8H		13.3	13.5	13.8	14.0	14.5	13.6	13.7	14.0	14.2	14.7	
Variation of the observer position for the luminaire distances S												
S = 1.0H		+3.9 / -2.4					+3.8 / -2.3					
S = 1.5H		+6.4 / -3.0					+6.3 / -2.9					
S = 2.0H		+8.3 / -3.5					+8.2 / -3.3					
Standard table		BK02					BK02					
Correction Summand		-4.4					-4.5					
Corrected Glare Indices referring to 1600lm Total Luminous Flux												



DIMENSIONS



AWARDS



PRODUCT

Name	PUCK L 3000K NT
Reference	A2512001NT
Color	Textured black
RAL	9005
Category	SURFACE

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	1600 Lm
Power	20 W
Power values of the system	20,00 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 3
Light beam angle	45°
Lighting efficiency	80%
Efficacy	80 Lm/W
Driver	Included
Electrical insulation class	⚡
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A
LED lifespan	L70B50 (Tc=85°C) >36.000h


OTHER DATA

Ingress Protection	IP20
Weight	510 g.
Packaged weight	570 g.
Packaging dimensions	134 × 119 × 73,5 mm
Units per package	1
Materials	Aluminium / Optical Glass




Puck is a luminaire that –for its function, opening angle and luminous flux- manages to embody, in a surface piece, the performance of the classic recessed luminaires with dichroic lamps. Puck is designed to undertake general lighting functions and, moreover, given its ultra-compact format, aims to conserve discretion in those places where it is impossible to recess the appliances in the ceiling.

POLAR DIAGRAM

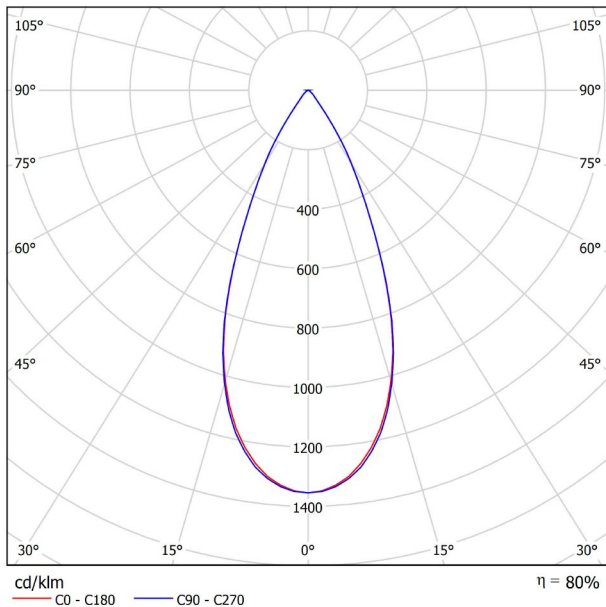

CONICAL DIAGRAM

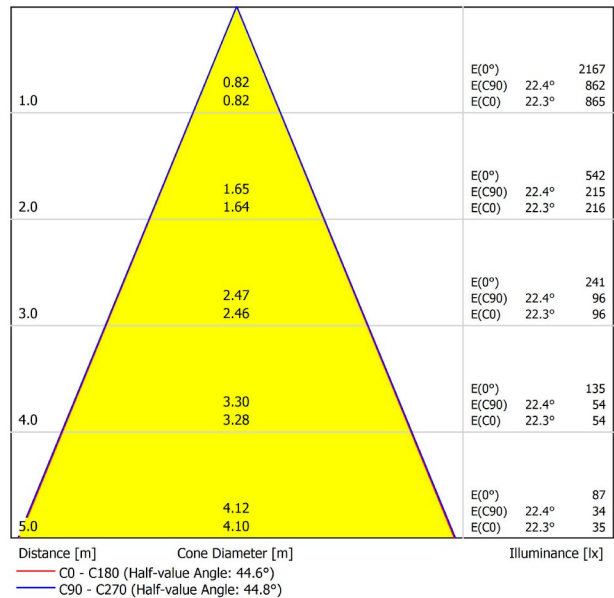


UGR

Glare Evaluation According to UGR												
ρ Ceiling		70	70	50	50	30	70	70	50	50	30	
ρ Walls		50	30	50	30	30	50	30	50	30	30	
ρ Floor		20	20	20	20	20	20	20	20	20	20	
Room Size X Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis					
2H	2H	7.8	8.5	8.0	8.6	8.8	7.7	8.4	8.0	8.6	8.8	
	3H	9.5	10.1	9.8	10.4	10.6	9.8	10.4	10.0	10.6	10.9	
	4H	10.6	11.2	10.9	11.4	11.7	10.7	11.3	11.0	11.6	11.8	
	6H	11.2	11.7	11.5	12.0	12.3	11.3	11.9	11.6	12.1	12.4	
	8H	11.4	11.9	11.7	12.2	12.5	11.6	12.1	11.9	12.4	12.7	
	12H	11.6	12.1	12.0	12.4	12.7	11.8	12.3	12.2	12.6	12.9	
4H	2H	8.1	8.7	8.4	8.9	9.2	8.0	8.6	8.3	8.9	9.1	
	3H	10.4	10.8	10.7	11.2	11.5	10.5	11.0	10.9	11.3	11.6	
	4H	11.6	12.0	12.0	12.3	12.7	11.7	12.1	12.1	12.4	12.8	
	6H	12.3	12.7	12.7	13.0	13.4	12.4	12.8	12.8	13.1	13.5	
	8H	12.6	12.9	13.0	13.3	13.7	12.8	13.1	13.2	13.5	13.9	
	12H	12.9	13.1	13.3	13.5	14.0	13.1	13.4	13.5	13.8	14.2	
8H	4H	12.0	12.3	12.4	12.7	13.1	12.1	12.4	12.5	12.8	13.2	
	6H	12.8	13.1	13.3	13.5	13.9	12.9	13.2	13.4	13.6	14.0	
	8H	13.2	13.4	13.7	13.8	14.3	13.4	13.6	13.9	14.1	14.5	
	12H	13.6	13.8	14.1	14.2	14.7	13.8	14.0	14.3	14.5	15.0	
12H	4H	12.0	12.3	12.4	12.7	13.1	12.1	12.4	12.5	12.8	13.2	
	6H	12.9	13.1	13.4	13.6	14.0	13.0	13.2	13.5	13.7	14.1	
	8H	13.3	13.5	13.8	14.0	14.5	13.6	13.7	14.0	14.2	14.7	
Variation of the observer position for the luminaire distances S												
S = 1.0H		+3.9 / -2.4					+3.8 / -2.3					
S = 1.5H		+6.4 / -3.0					+6.3 / -2.9					
S = 2.0H		+8.3 / -3.5					+8.2 / -3.3					
Standard table		BK02					BK02					
Correction Summand		-4.4					-4.5					
Corrected Glare Indices referring to 1600lm Total Luminous Flux												



DIMENSIONS



AWARDS



Name	PUCK L 3000K WT
Reference	A2512001WT
Color	Textured white
RAL	9016
Category	SURFACE

PRODUCT

Light source	LED
Gross luminous flux	1600 Lm
Power	20 W
Power values of the system	20,00 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 3
Light beam angle	45°
Lighting efficiency	80%
Efficacy	80 Lm/W
Driver	Included
Electrical insulation class	⚡
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A
LED lifespan	L70B50 (Tc=85°C) >36.000h

LIGHTING INFORMATION


Ingress Protection	IP20
Weight	510 g.
Packaged weight	570 g.
Packaging dimensions	134 × 119 × 73,5 mm
Units per package	1
Materials	Aluminium / Optical Glass

OTHER DATA




Puck is a luminaire that –for its function, opening angle and luminous flux- manages to embody, in a surface piece, the performance of the classic recessed luminaires with dichroic lamps. Puck is designed to undertake general lighting functions and, moreover, given its ultra-compact format, aims to conserve discretion in those places where it is impossible to recess the appliances in the ceiling.

POLAR DIAGRAM

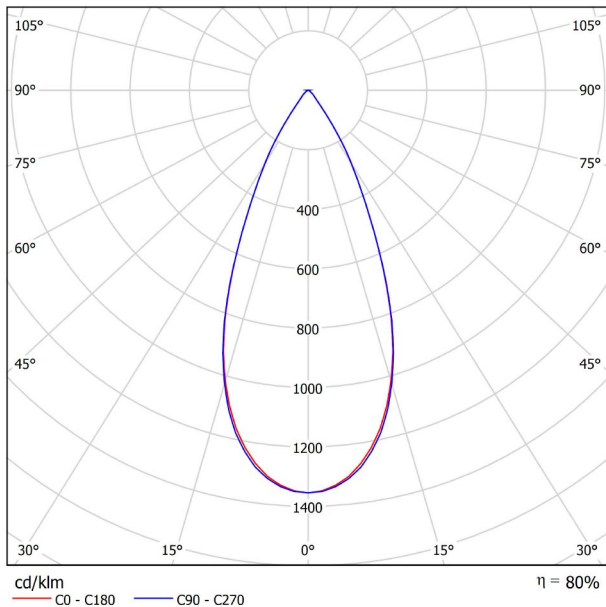

CONICAL DIAGRAM

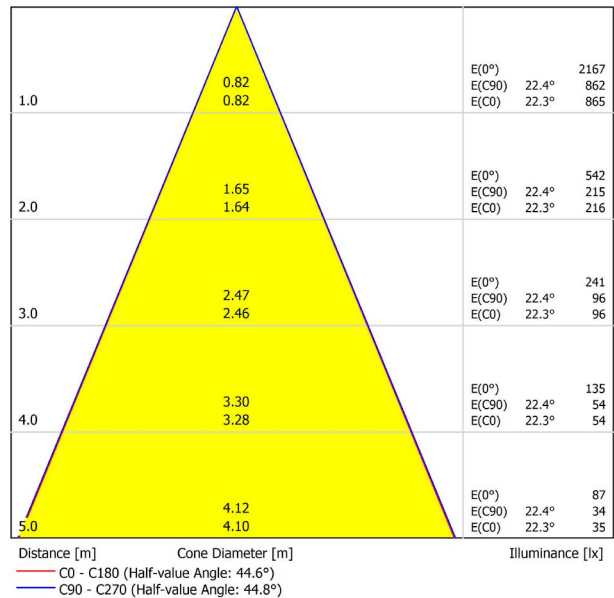


UGR

Glare Evaluation According to UGR												
ρ Ceiling		70	70	50	50	30	70	70	50	50	30	
ρ Walls		50	30	50	30	30	50	30	50	30	30	
ρ Floor		20	20	20	20	20	20	20	20	20	20	
Room Size X Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis					
2H	2H	7.8	8.5	8.0	8.6	8.8	7.7	8.4	8.0	8.6	8.8	
	3H	9.5	10.1	9.8	10.4	10.6	9.8	10.4	10.0	10.6	10.9	
	4H	10.6	11.2	10.9	11.4	11.7	10.7	11.3	11.0	11.6	11.8	
	6H	11.2	11.7	11.5	12.0	12.3	11.3	11.9	11.6	12.1	12.4	
	8H	11.4	11.9	11.7	12.2	12.5	11.6	12.1	11.9	12.4	12.7	
	12H	11.6	12.1	12.0	12.4	12.7	11.8	12.3	12.2	12.6	12.9	
4H	2H	8.1	8.7	8.4	8.9	9.2	8.0	8.6	8.3	8.9	9.1	
	3H	10.4	10.8	10.7	11.2	11.5	10.5	11.0	10.9	11.3	11.6	
	4H	11.6	12.0	12.0	12.3	12.7	11.7	12.1	12.1	12.4	12.8	
	6H	12.3	12.7	12.7	13.0	13.4	12.4	12.8	12.8	13.1	13.5	
	8H	12.6	12.9	13.0	13.3	13.7	12.8	13.1	13.2	13.5	13.9	
	12H	12.9	13.1	13.3	13.5	14.0	13.1	13.4	13.5	13.8	14.2	
8H	4H	12.0	12.3	12.4	12.7	13.1	12.1	12.4	12.5	12.8	13.2	
	6H	12.8	13.1	13.3	13.5	13.9	12.9	13.2	13.4	13.6	14.0	
	8H	13.2	13.4	13.7	13.8	14.3	13.4	13.6	13.9	14.1	14.5	
	12H	13.6	13.8	14.1	14.2	14.7	13.8	14.0	14.3	14.5	15.0	
12H	4H	12.0	12.3	12.4	12.7	13.1	12.1	12.4	12.5	12.8	13.2	
	6H	12.9	13.1	13.4	13.6	14.0	13.0	13.2	13.5	13.7	14.1	
	8H	13.3	13.5	13.8	14.0	14.5	13.6	13.7	14.0	14.2	14.7	
Variation of the observer position for the luminaire distances S												
S = 1.0H		+3.9 / -2.4					+3.8 / -2.3					
S = 1.5H		+6.4 / -3.0					+6.3 / -2.9					
S = 2.0H		+8.3 / -3.5					+8.2 / -3.3					
Standard table		BK02					BK02					
Correction Summand		-4.4					-4.5					
Corrected Glare Indices referring to 1600lm Total Luminous Flux												



DIMENSIONS



AWARDS



Name	PUCK L 4000K MC
Reference	A2512002MC
Color	Metallized copper
RAL	Paint of metallic nanoparticles
Category	SURFACE

PRODUCT

Light source	LED
Gross luminous flux	1660 Lm
Power	20 W
Power values of the system	20,00 W
Colour temperature	4000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 3
Light beam angle	45°
Lighting efficiency	80%
Efficacy	83 Lm/W
Driver	Included
Electrical insulation class	⚡
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A
LED lifespan	L70B50 (Tc=85°C) >36.000h

LIGHTING INFORMATION


Ingress Protection	IP20
Weight	510 g.
Packaged weight	570 g.
Packaging dimensions	134 × 119 × 73,5 mm
Units per package	1
Materials	Aluminium / Optical Glass

OTHER DATA




Puck is a luminaire that –for its function, opening angle and luminous flux- manages to embody, in a surface piece, the performance of the classic recessed luminaires with dichroic lamps. Puck is designed to undertake general lighting functions and, moreover, given its ultra-compact format, aims to conserve discretion in those places where it is impossible to recess the appliances in the ceiling.

POLAR DIAGRAM

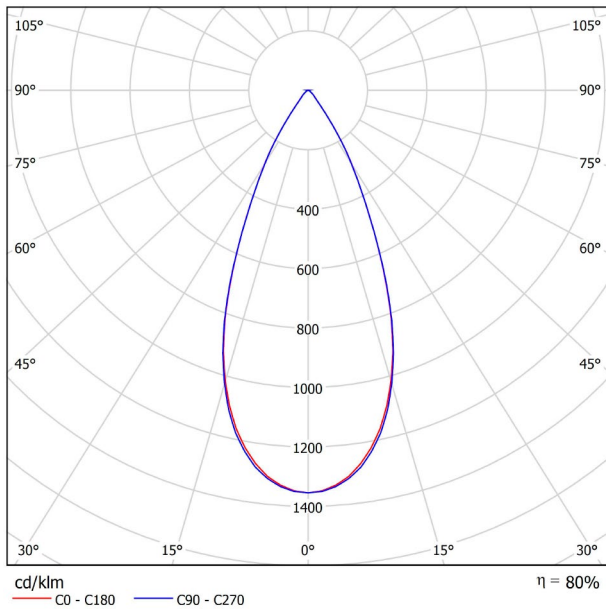

CONICAL DIAGRAM

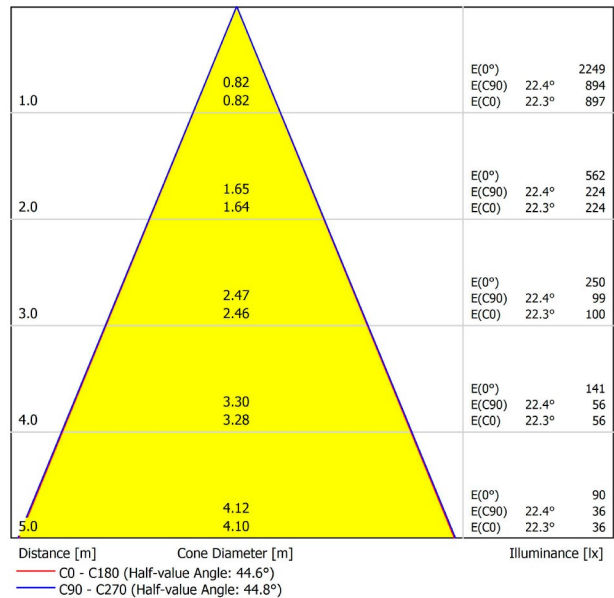


UGR

Glare Evaluation According to UGR												
ρ Ceiling		70	70	50	50	30	70	70	50	50	30	30
ρ Walls		50	30	50	30	30	50	30	50	30	30	30
ρ Floor		20	20	20	20	20	20	20	20	20	20	20
Room Size X Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis					
2H	2H	7.9	8.6	8.1	8.8	9.0	7.8	8.5	8.1	8.7	8.9	
	3H	9.6	10.3	9.9	10.5	10.7	9.9	10.5	10.2	10.8	11.0	
	4H	10.7	11.3	11.0	11.6	11.8	10.8	11.4	11.1	11.7	11.9	
	6H	11.3	11.9	11.6	12.1	12.4	11.4	12.0	11.8	12.3	12.5	
	8H	11.5	12.0	11.8	12.3	12.6	11.7	12.3	12.1	12.5	12.8	
	12H	11.7	12.2	12.1	12.5	12.8	12.0	12.5	12.3	12.8	13.1	
4H	2H	8.2	8.8	8.5	9.0	9.3	8.1	8.7	8.4	9.0	9.2	
	3H	10.5	11.0	10.8	11.3	11.6	10.7	11.2	11.0	11.5	11.8	
	4H	11.7	12.1	12.1	12.5	12.8	11.8	12.2	12.2	12.6	12.9	
	6H	12.4	12.8	12.8	13.2	13.5	12.5	12.9	12.9	13.3	13.6	
	8H	12.7	13.0	13.1	13.4	13.8	12.9	13.2	13.3	13.6	14.0	
	12H	13.0	13.3	13.4	13.7	14.1	13.2	13.5	13.6	13.9	14.3	
8H	4H	12.1	12.4	12.5	12.8	13.2	12.2	12.5	12.6	12.9	13.3	
	6H	13.0	13.2	13.4	13.6	14.1	13.1	13.3	13.5	13.7	14.2	
	8H	13.3	13.5	13.8	14.0	14.4	13.5	13.7	14.0	14.2	14.7	
	12H	13.8	13.9	14.2	14.4	14.9	14.0	14.1	14.4	14.6	15.1	
12H	4H	12.1	12.4	12.6	12.8	13.2	12.2	12.5	12.7	12.9	13.3	
	6H	13.1	13.3	13.5	13.7	14.2	13.2	13.4	13.6	13.8	14.3	
	8H	13.5	13.6	14.0	14.1	14.6	13.7	13.8	14.2	14.3	14.8	
Variation of the observer position for the luminaire distances S												
S = 1.0H		+3.9 / -2.4					+3.8 / -2.3					
S = 1.5H		+6.4 / -3.0					+6.3 / -2.9					
S = 2.0H		+8.3 / -3.5					+8.2 / -3.3					
Standard table		BK02					BK02					
Correction Summand		-4.4					-4.5					
Corrected Glare Indices referring to 1660lm Total Luminous Flux												



DIMENSIONS



AWARDS




PRODUCT	
Name	PUCK L 4000K MG
Reference	A2512002MG
Color	Metallized gold
RAL	Paint of metallic nanoparticles
Category	SURFACE
LIGHTING INFORMATION	
Light source	LED
Gross luminous flux	1660 Lm
Power	20 W
Power values of the system	20,00 W
Colour temperature	4000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 3
Light beam angle	45°
Lighting efficiency	80%
Efficacy	83 Lm/W
Driver	Included
Electrical insulation class	⚡
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A
LED lifespan	L70B50 (Tc=85°C) >36.000h
OTHER DATA	
Ingress Protection	IP20
Weight	510 g.
Packaged weight	570 g.
Packaging dimensions	134 × 119 × 73,5 mm
Units per package	1
Materials	Aluminium / Optical Glass




Puck is a luminary that –for its function, opening angle and luminous flux- manages to embody, in a surface piece, the performance of the classic recessed luminaries with dichroic lamps. Puck is designed to undertake general lighting functions and, moreover, given its ultra-compact format, aims to conserve discretion in those places where it is impossible to recess the appliances in the ceiling.

POLAR DIAGRAM

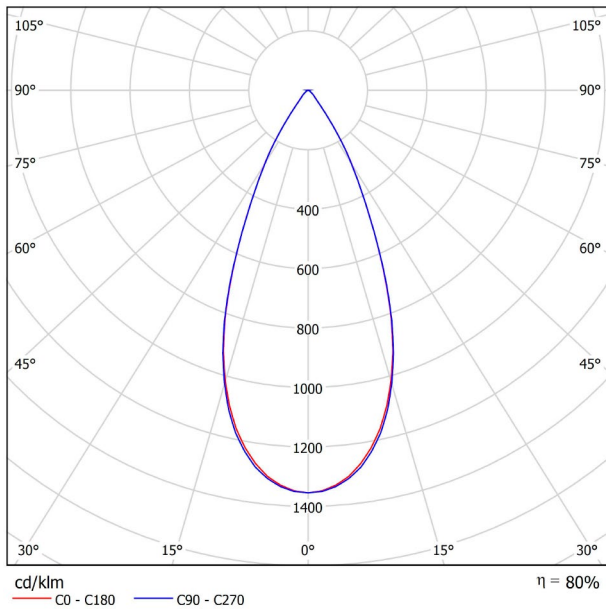

CONICAL DIAGRAM

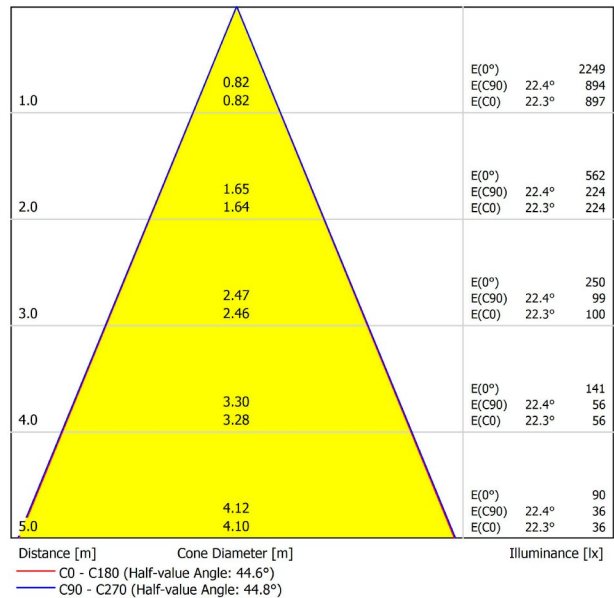


UGR

Glare Evaluation According to UGR												
p Ceiling		70	70	50	50	30	70	70	50	50	30	30
p Walls		50	30	50	30	30	50	30	50	30	30	30
p Floor		20	20	20	20	20	20	20	20	20	20	20
Room Size X Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis					
2H	2H	7.9	8.6	8.1	8.8	9.0	7.8	8.5	8.1	8.7	8.9	
	3H	9.6	10.3	9.9	10.5	10.7	9.9	10.5	10.2	10.8	11.0	
	4H	10.7	11.3	11.0	11.6	11.8	10.8	11.4	11.1	11.7	11.9	
	6H	11.3	11.9	11.6	12.1	12.4	11.4	12.0	11.8	12.3	12.5	
	8H	11.5	12.0	11.8	12.3	12.6	11.7	12.3	12.1	12.5	12.8	
	12H	11.7	12.2	12.1	12.5	12.8	12.0	12.5	12.3	12.8	13.1	
4H	2H	8.2	8.8	8.5	9.0	9.3	8.1	8.7	8.4	9.0	9.2	
	3H	10.5	11.0	10.8	11.3	11.6	10.7	11.2	11.0	11.5	11.8	
	4H	11.7	12.1	12.1	12.5	12.8	11.8	12.2	12.2	12.6	12.9	
	6H	12.4	12.8	12.8	13.2	13.5	12.5	12.9	12.9	13.3	13.6	
	8H	12.7	13.0	13.1	13.4	13.8	12.9	13.2	13.3	13.6	14.0	
	12H	13.0	13.3	13.4	13.7	14.1	13.2	13.5	13.6	13.9	14.3	
8H	4H	12.1	12.4	12.5	12.8	13.2	12.2	12.5	12.6	12.9	13.3	
	6H	13.0	13.2	13.4	13.6	14.1	13.1	13.3	13.5	13.7	14.2	
	8H	13.3	13.5	13.8	14.0	14.4	13.5	13.7	14.0	14.2	14.7	
	12H	13.8	13.9	14.2	14.4	14.9	14.0	14.1	14.4	14.6	15.1	
12H	4H	12.1	12.4	12.6	12.8	13.2	12.2	12.5	12.7	12.9	13.3	
	6H	13.1	13.3	13.5	13.7	14.2	13.2	13.4	13.6	13.8	14.3	
	8H	13.5	13.6	14.0	14.1	14.6	13.7	13.8	14.2	14.3	14.8	
Variation of the observer position for the luminaire distances S												
S = 1.0H		+3.9 / -2.4					+3.8 / -2.3					
S = 1.5H		+6.4 / -3.0					+6.3 / -2.9					
S = 2.0H		+8.3 / -3.5					+8.2 / -3.3					
Standard table		BK02					BK02					
Correction Summand		-4.4					-4.5					
Corrected Glare Indices referring to 1660lm Total Luminous Flux												



DIMENSIONS



AWARDS



PRODUCT

Name	PUCK L 4000K NT
Reference	A2512002NT
Color	Textured black
RAL	9005
Category	SURFACE

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	1660 Lm
Power	20 W
Power values of the system	20,00 W
Colour temperature	4000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 3
Light beam angle	45°
Lighting efficiency	80%
Efficacy	83 Lm/W
Driver	Included
Electrical insulation class	⚡
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A
LED lifespan	L70B50 (Tc=85°C) >36.000h


OTHER DATA

Ingress Protection	IP20
Weight	510 g.
Packaged weight	570 g.
Packaging dimensions	134 × 119 × 73,5 mm
Units per package	1
Materials	Aluminium / Optical Glass




Puck is a luminaire that –for its function, opening angle and luminous flux- manages to embody, in a surface piece, the performance of the classic recessed luminaires with dichroic lamps. Puck is designed to undertake general lighting functions and, moreover, given its ultra-compact format, aims to conserve discretion in those places where it is impossible to recess the appliances in the ceiling.

POLAR DIAGRAM

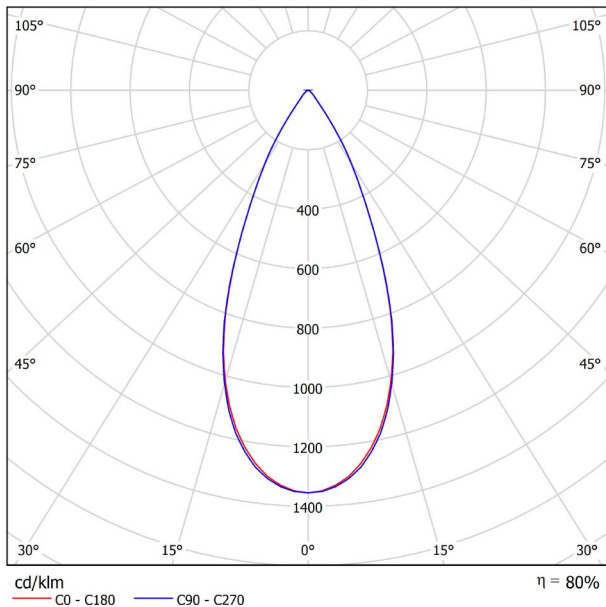

CONICAL DIAGRAM

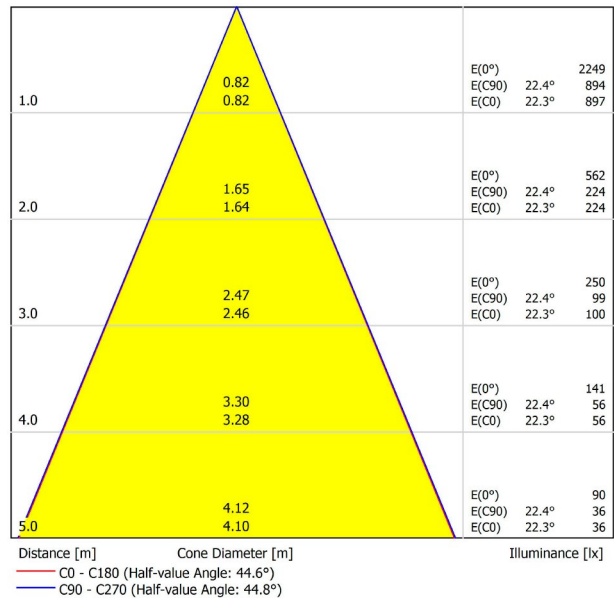


UGR

Glare Evaluation According to UGR												
ρ Ceiling		70	70	50	50	30	70	70	50	50	30	30
ρ Walls		50	30	50	30	30	50	30	50	30	30	30
ρ Floor		20	20	20	20	20	20	20	20	20	20	20
Room Size X Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis					
2H	2H	7.9	8.6	8.1	8.8	9.0	7.8	8.5	8.1	8.7	8.9	
	3H	9.6	10.3	9.9	10.5	10.7	9.9	10.5	10.2	10.8	11.0	
	4H	10.7	11.3	11.0	11.6	11.8	10.8	11.4	11.1	11.7	11.9	
	6H	11.3	11.9	11.6	12.1	12.4	11.4	12.0	11.8	12.3	12.5	
	8H	11.5	12.0	11.8	12.3	12.6	11.7	12.3	12.1	12.5	12.8	
	12H	11.7	12.2	12.1	12.5	12.8	12.0	12.5	12.3	12.8	13.1	
4H	2H	8.2	8.8	8.5	9.0	9.3	8.1	8.7	8.4	9.0	9.2	
	3H	10.5	11.0	10.8	11.3	11.6	10.7	11.2	11.0	11.5	11.8	
	4H	11.7	12.1	12.1	12.5	12.8	11.8	12.2	12.2	12.6	12.9	
	6H	12.4	12.8	12.8	13.2	13.5	12.5	12.9	12.9	13.3	13.6	
	8H	12.7	13.0	13.1	13.4	13.8	12.9	13.2	13.3	13.6	14.0	
	12H	13.0	13.3	13.4	13.7	14.1	13.2	13.5	13.6	13.9	14.3	
8H	4H	12.1	12.4	12.5	12.8	13.2	12.2	12.5	12.6	12.9	13.3	
	6H	13.0	13.2	13.4	13.6	14.1	13.1	13.3	13.5	13.7	14.2	
	8H	13.3	13.5	13.8	14.0	14.4	13.5	13.7	14.0	14.2	14.7	
	12H	13.8	13.9	14.2	14.4	14.9	14.0	14.1	14.4	14.6	15.1	
12H	4H	12.1	12.4	12.6	12.8	13.2	12.2	12.5	12.7	12.9	13.3	
	6H	13.1	13.3	13.5	13.7	14.2	13.2	13.4	13.6	13.8	14.3	
	8H	13.5	13.6	14.0	14.1	14.6	13.7	13.8	14.2	14.3	14.8	
Variation of the observer position for the luminaire distances S												
S = 1.0H		+3.9 / -2.4					+3.8 / -2.3					
S = 1.5H		+6.4 / -3.0					+6.3 / -2.9					
S = 2.0H		+8.3 / -3.5					+8.2 / -3.3					
Standard table		BK02					BK02					
Correction Summand		-4.4					-4.5					
Corrected Glare Indices referring to 1660lm Total Luminous Flux												



DIMENSIONS



AWARDS



Name	PUCK L 4000K WT
Reference	A2512002WT
Color	Textured white
RAL	9016
Category	SURFACE

PRODUCT

Light source	LED
Gross luminous flux	1660 Lm
Power	20 W
Power values of the system	20,00 W
Colour temperature	4000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 3
Light beam angle	45°
Lighting efficiency	80%
Efficacy	83 Lm/W
Driver	Included
Electrical insulation class	⚡
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A
LED lifespan	L70B50 (Tc=85°C) >36.000h

LIGHTING INFORMATION


Ingress Protection	IP20
Weight	510 g.
Packaged weight	570 g.
Packaging dimensions	134 × 119 × 73,5 mm
Units per package	1
Materials	Aluminium / Optical Glass

OTHER DATA




Puck is a luminaire that –for its function, opening angle and luminous flux- manages to embody, in a surface piece, the performance of the classic recessed luminaires with dichroic lamps. Puck is designed to undertake general lighting functions and, moreover, given its ultra-compact format, aims to conserve discretion in those places where it is impossible to recess the appliances in the ceiling.

POLAR DIAGRAM

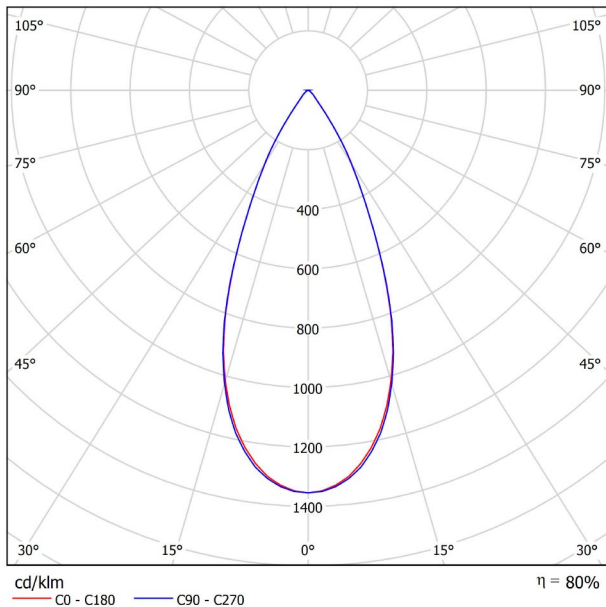

CONICAL DIAGRAM

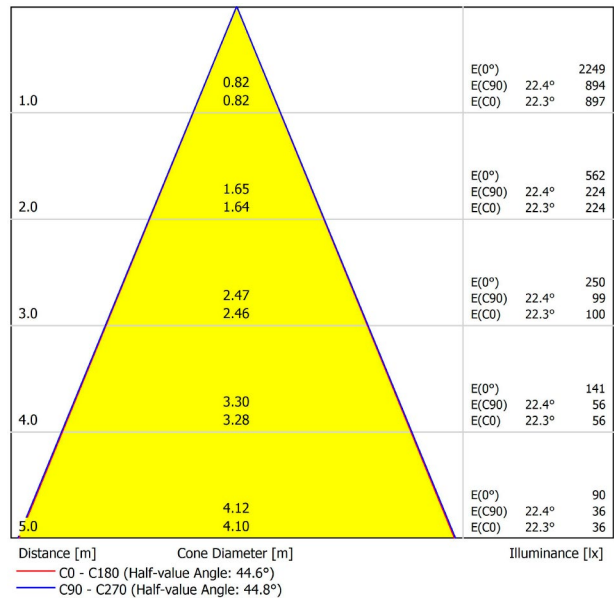

UGR

Glare Evaluation According to UGR												
ρ Ceiling		70	70	50	50	30	70	70	50	50	30	30
ρ Walls		50	30	50	30	30	50	30	50	30	30	30
ρ Floor		20	20	20	20	20	20	20	20	20	20	20
Room Size X Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis					
2H	2H	7.9	8.6	8.1	8.8	9.0	7.8	8.5	8.1	8.7	8.9	
	3H	9.6	10.3	9.9	10.5	10.7	9.9	10.5	10.2	10.8	11.0	
	4H	10.7	11.3	11.0	11.6	11.8	10.8	11.4	11.1	11.7	11.9	
	6H	11.3	11.9	11.6	12.1	12.4	11.4	12.0	11.8	12.3	12.5	
	8H	11.5	12.0	11.8	12.3	12.6	11.7	12.3	12.1	12.5	12.8	
	12H	11.7	12.2	12.1	12.5	12.8	12.0	12.5	12.3	12.8	13.1	
4H	2H	8.2	8.8	8.5	9.0	9.3	8.1	8.7	8.4	9.0	9.2	
	3H	10.5	11.0	10.8	11.3	11.6	10.7	11.2	11.0	11.5	11.8	
	4H	11.7	12.1	12.1	12.5	12.8	11.8	12.2	12.2	12.6	12.9	
	6H	12.4	12.8	12.8	13.2	13.5	12.5	12.9	12.9	13.3	13.6	
	8H	12.7	13.0	13.1	13.4	13.8	12.9	13.2	13.3	13.6	14.0	
	12H	13.0	13.3	13.4	13.7	14.1	13.2	13.5	13.6	13.9	14.3	
8H	4H	12.1	12.4	12.5	12.8	13.2	12.2	12.5	12.6	12.9	13.3	
	6H	13.0	13.2	13.4	13.6	14.1	13.1	13.3	13.5	13.7	14.2	
	8H	13.3	13.5	13.8	14.0	14.4	13.5	13.7	14.0	14.2	14.7	
	12H	13.8	13.9	14.2	14.4	14.9	14.0	14.1	14.4	14.6	15.1	
12H	4H	12.1	12.4	12.6	12.8	13.2	12.2	12.5	12.7	12.9	13.3	
	6H	13.1	13.3	13.5	13.7	14.2	13.2	13.4	13.6	13.8	14.3	
	8H	13.5	13.6	14.0	14.1	14.6	13.7	13.8	14.2	14.3	14.8	
Variation of the observer position for the luminaire distances S												
S = 1.0H		+3.9 / -2.4					+3.8 / -2.3					
S = 1.5H		+6.4 / -3.0					+6.3 / -2.9					
S = 2.0H		+8.3 / -3.5					+8.2 / -3.3					
Standard table		BK02					BK02					
Correction Summand		-4.4					-4.5					
Corrected Glare Indices referring to 1660lm Total Luminous Flux												