




DIMENSIONS



AWARDS

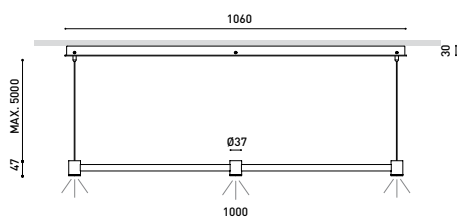

PRODUCT

Name	ART SURF DIM DALI 2700K WTWT
Reference	A3421020WTWT
Color	Textured white
RAL	9016
Category	SUSPENSION

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	570 Lm
Power	6,3 W
Power values of the system	7,68 W
Colour temperature	2700 K - Other K, please consult
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 3
Light beam angle	38°
Lighting efficiency	92%
Efficacy	92 Lm/W
Current intensity	700 mA
Dimming	DALI - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Cord length	5 m
Fast adjustment tensioner	No
Weight	4024 g.
Packaged weight	4451 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Brass / Acrylonitrile Butadiene Styrene + Polycarbonate




Art Surface is a version that allows it to be installed in places where it is impossible to access the false ceiling. Cement, concrete, vault ... its base, in which the driver locates, allows the luminaire to be installed on all types of surfaces.

POLAR DIAGRAM

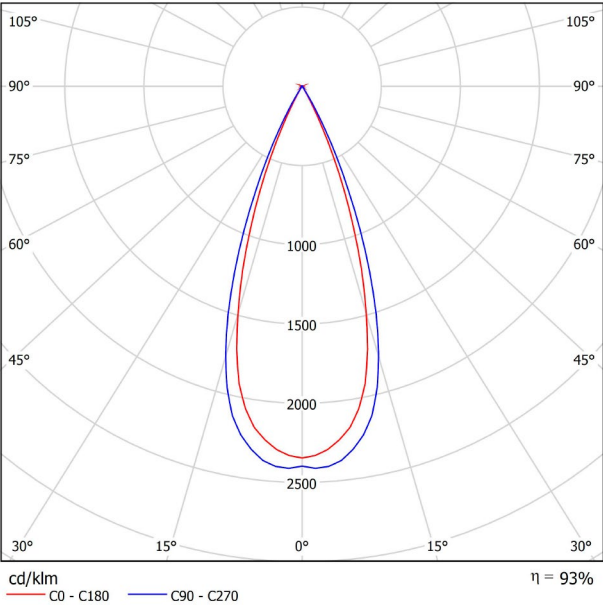


CONICAL DIAGRAM

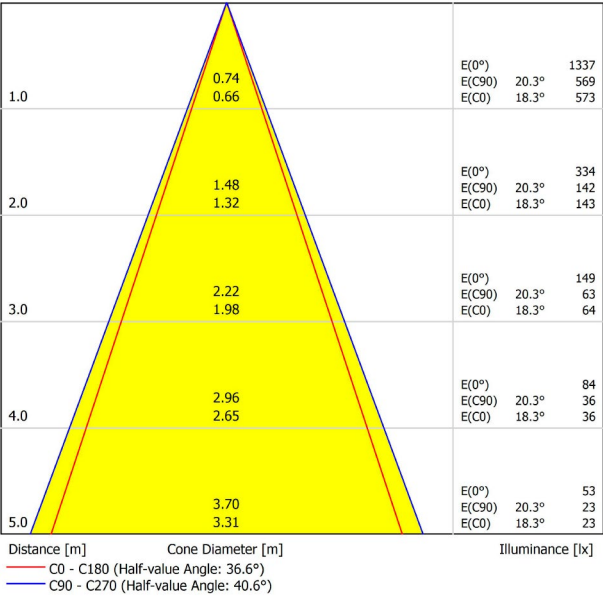



DIMENSIONS

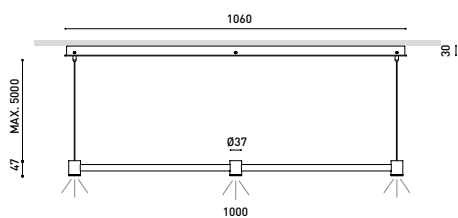

AWARDS



PRODUCT

Name	ART SURF DIM DALI 2700K WTNT
Reference	A3421020WTNT
Color	Textured white
RAL	9016
Category	SUSPENSION

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	570 Lm
Power	6,3 W
Power values of the system	7,68 W
Colour temperature	2700 K - Other K, please consult
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 3
Light beam angle	38°
Lighting efficiency	92%
Efficacy	92 Lm/W
Current intensity	700 mA
Dimming	DALI - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Cord length	5 m
Fast adjustment tensioner	No
Weight	4024 g.
Packaged weight	4451 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Brass / Acrylonitrile Butadiene Styrene + Polycarbonate




Art Surface is a version that allows it to be installed in places where it is impossible to access the false ceiling. Cement, concrete, vault ... its base, in which the driver locates, allows the luminaire to be installed on all types of surfaces.

POLAR DIAGRAM

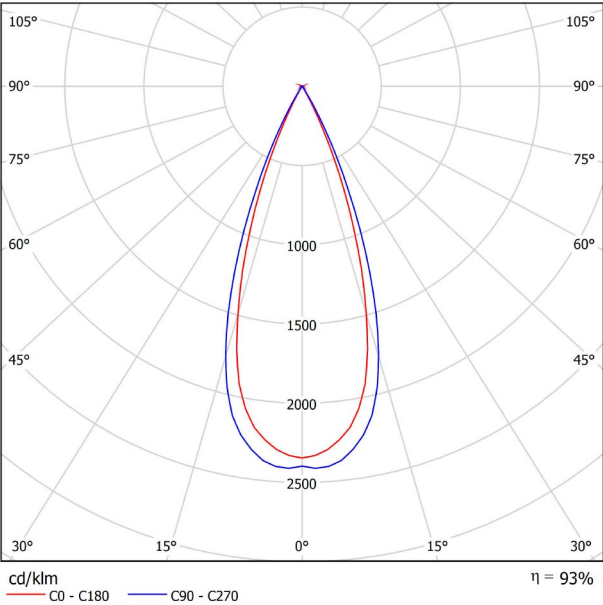


CONICAL DIAGRAM

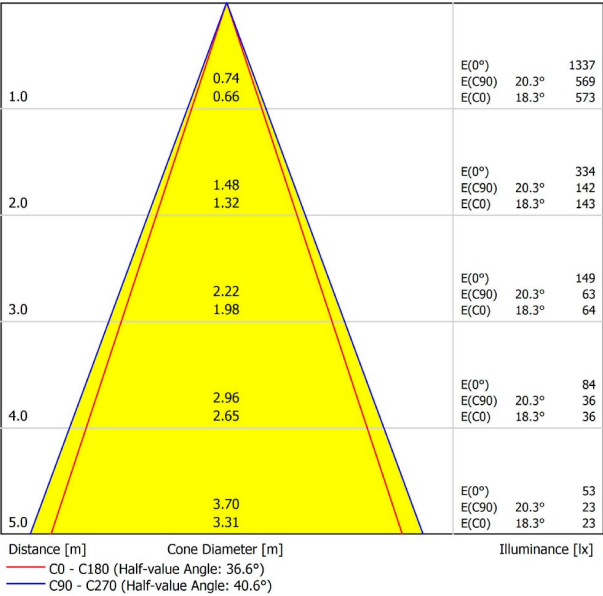



DIMENSIONS

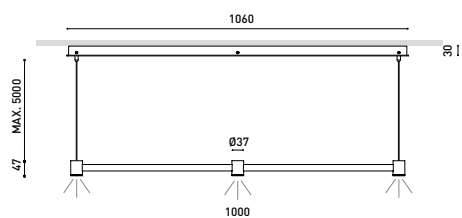

AWARDS



Name	ART SURF DIM DALI 2700K NTWT
Reference	A3421020NTWT
Color	Textured black
RAL	9005
Category	SUSPENSION

PRODUCT

ART SURF DIM DALI 2700K NTWT

A3421020NTWT

Textured black

9005

SUSPENSION

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	570 Lm
Power	6,3 W
Power values of the system	7,68 W
Colour temperature	2700 K - Other K, please consult
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 3
Light beam angle	38°
Lighting efficiency	92%
Efficacy	105 Lm/W
Current intensity	700 mA
Dimming	DALI - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	□
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Cord length	5 m
Fast adjustment tensioner	No
Weight	4024 g.
Packaged weight	4451 g.
Packaging dimensions	1078 × 139 × 89 mm
Units per package	1
Materials	Brass / Acrylonitrile Butadiene Styrene + Polycarbonate




Art Surface is a version that allows it to be installed in places where it is impossible to access the false ceiling. Cement, concrete, vault ... its base, in which the driver locates, allows the luminaire to be installed on all types of surfaces.

POLAR DIAGRAM

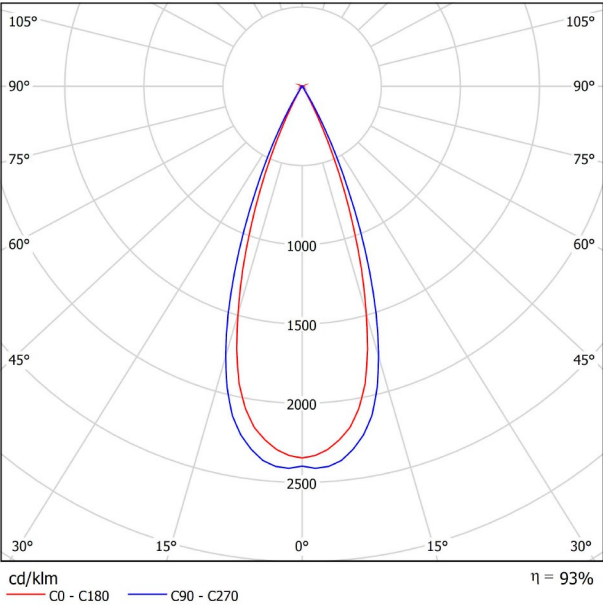


CONICAL DIAGRAM

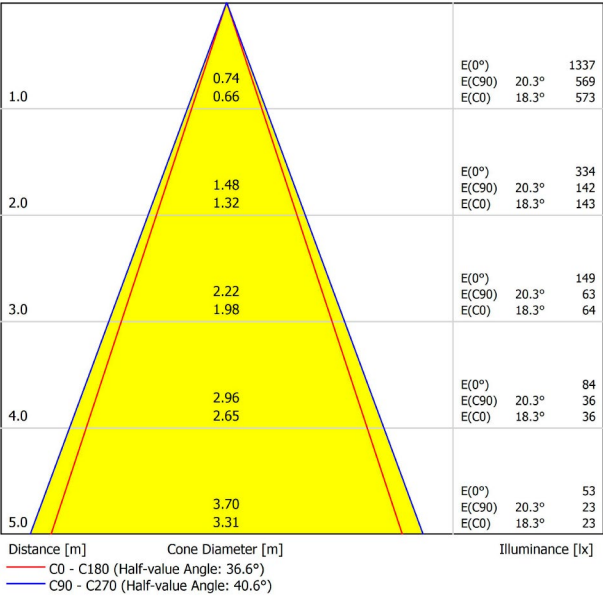



DIMENSIONS

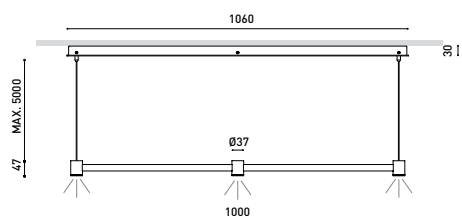

AWARDS



Name	ART SURF DIM DALI 2700K NTNT
Reference	A3421020NTNT
Color	Textured black
RAL	9005
Category	SUSPENSION

PRODUCT

ART SURF DIM DALI 2700K NTNT

A3421020NTNT

Textured black

9005

SUSPENSION

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	570 Lm
Power	6,3 W
Power values of the system	7,68 W
Colour temperature	2700 K - Other K, please consult
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 3
Light beam angle	38°
Lighting efficiency	92%
Efficacy	105 Lm/W
Current intensity	700 mA
Dimming	DALI - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Cord length	5 m
Fast adjustment tensioner	No
Weight	4024 g.
Packaged weight	4451 g.
Packaging dimensions	1078 × 139 × 89 mm
Units per package	1
Materials	Brass / Acrylonitrile Butadiene Styrene + Polycarbonate




Art Surface is a version that allows it to be installed in places where it is impossible to access the false ceiling. Cement, concrete, vault ... its base, in which the driver locates, allows the luminaire to be installed on all types of surfaces.

POLAR DIAGRAM

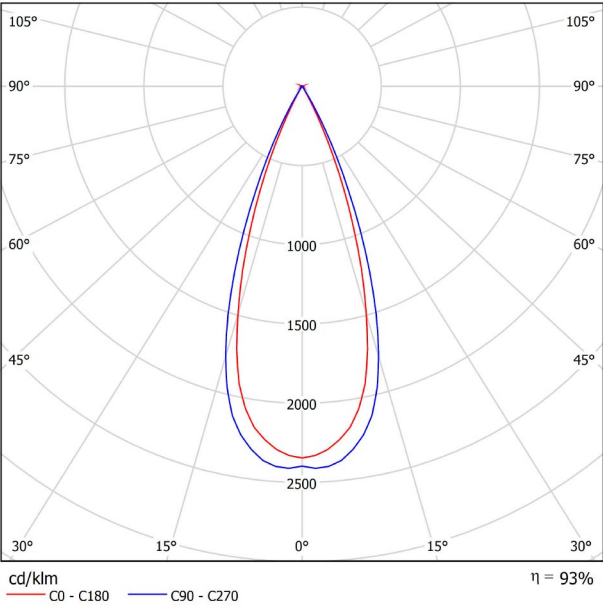


CONICAL DIAGRAM

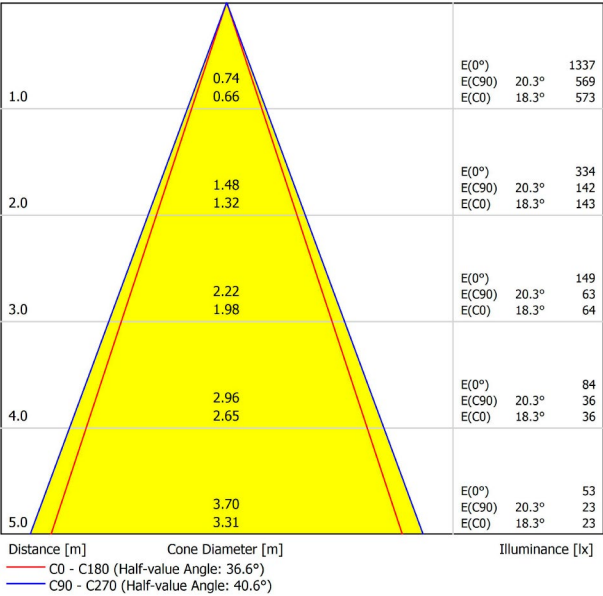



DIMENSIONS

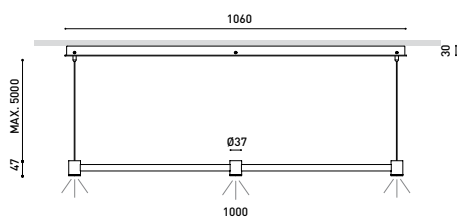

AWARDS



PRODUCT

Name	ART SURF DIM DALI 2700K BGWT
Reference	A3421020BGWT
Color	Brushed Gold
RAL	Paint of metallic nanoparticles
Category	SUSPENSION

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	570 Lm
Power	6,3 W
Power values of the system	7,68 W
Colour temperature	2700 K - Other K, please consult
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 3
Light beam angle	38°
Lighting efficiency	92%
Efficacy	105 Lm/W
Current intensity	700 mA
Dimming	DALI - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Cord length	5 m
Fast adjustment tensioner	No
Weight	4024 g.
Packaged weight	4451 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Brass / Acrylonitrile Butadiene Styrene + Polycarbonate




Art Surface is a version that allows it to be installed in places where it is impossible to access the false ceiling. Cement, concrete, vault ... its base, in which the driver locates, allows the luminaire to be installed on all types of surfaces.

POLAR DIAGRAM

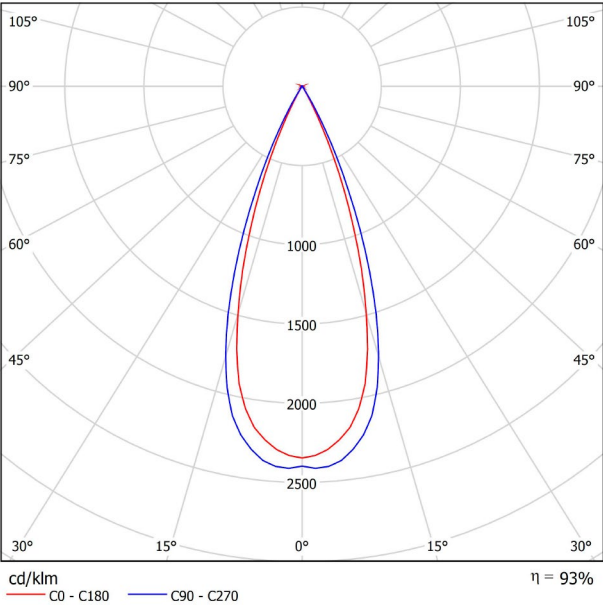


CONICAL DIAGRAM

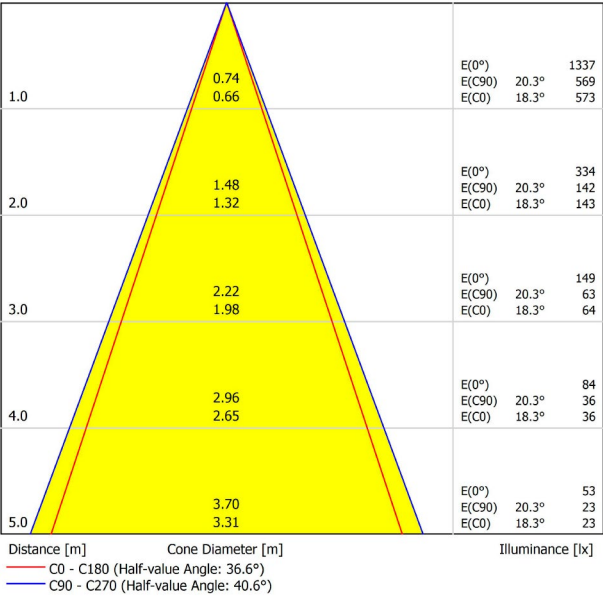



DIMENSIONS

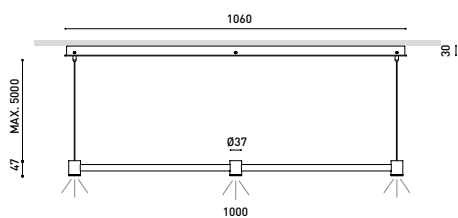

AWARDS



Name	ART SURF DIM DALI 2700K BGNT
Reference	A3421020BGNT
Color	Brushed Gold
RAL	Paint of metallic nanoparticles
Category	SUSPENSION

PRODUCT

ART SURF DIM DALI 2700K BGNT

A3421020BGNT

Brushed Gold

Paint of metallic nanoparticles

SUSPENSION

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	570 Lm
Power	6,3 W
Power values of the system	7,68 W
Colour temperature	2700 K - Other K, please consult
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 3
Light beam angle	38°
Lighting efficiency	92%
Efficacy	105 Lm/W
Current intensity	700 mA
Dimming	DALI - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	□
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Cord length	5 m
Fast adjustment tensioner	No
Weight	4024 g.
Packaged weight	4451 g.
Packaging dimensions	1078 × 139 × 89 mm
Units per package	1
Materials	Brass / Acrylonitrile Butadiene Styrene + Polycarbonate




Art Surface is a version that allows it to be installed in places where it is impossible to access the false ceiling. Cement, concrete, vault ... its base, in which the driver locates, allows the luminaire to be installed on all types of surfaces.

POLAR DIAGRAM

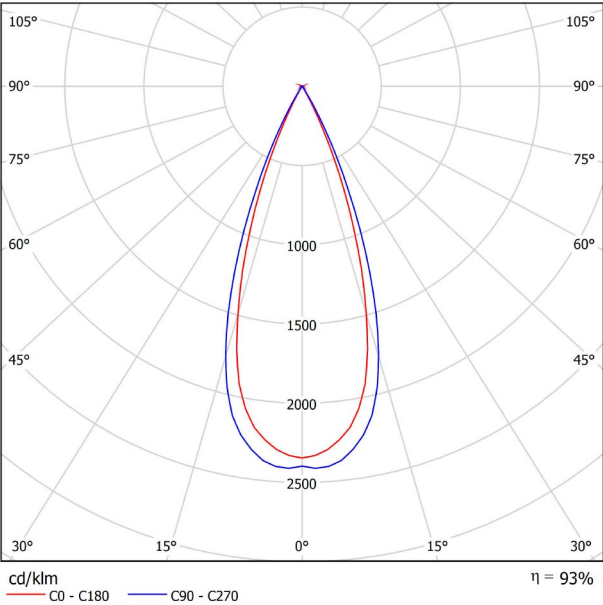


CONICAL DIAGRAM

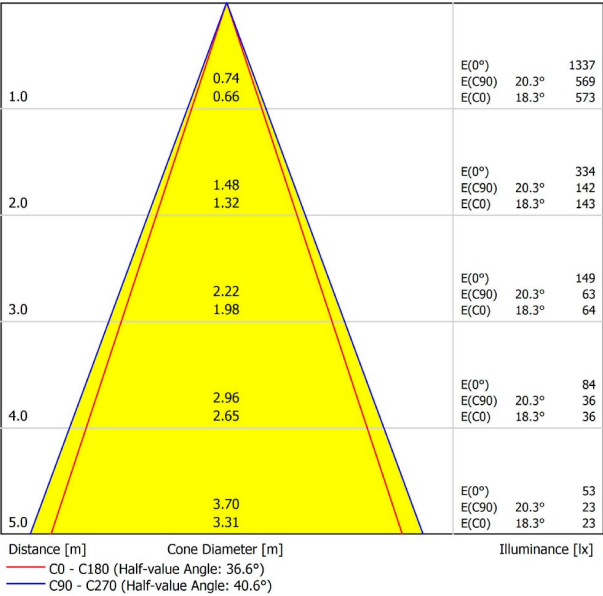



DIMENSIONS

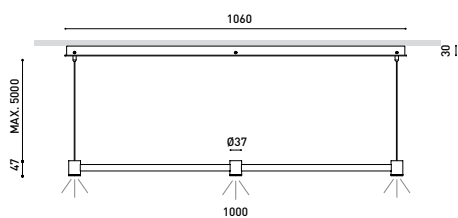

AWARDS



PRODUCT

Name	ART SURF DIM DALI 2700K BCWT
Reference	A3421020BCWT
Color	Brushed Copper
RAL	Paint of metallic nanoparticles
Category	SUSPENSION

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	570 Lm
Power	6,3 W
Power values of the system	7,68 W
Colour temperature	2700 K - Other K, please consult
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 3
Light beam angle	38°
Lighting efficiency	92%
Efficacy	105 Lm/W
Current intensity	700 mA
Dimming	DALI - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Cord length	5 m
Fast adjustment tensioner	No
Weight	4024 g.
Packaged weight	4451 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Brass / Acrylonitrile Butadiene Styrene + Polycarbonate




Art Surface is a version that allows it to be installed in places where it is impossible to access the false ceiling. Cement, concrete, vault ... its base, in which the driver locates, allows the luminaire to be installed on all types of surfaces.

POLAR DIAGRAM

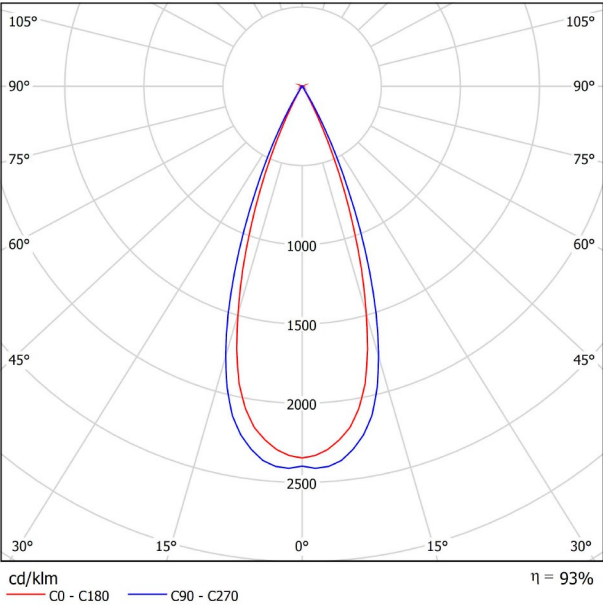


CONICAL DIAGRAM

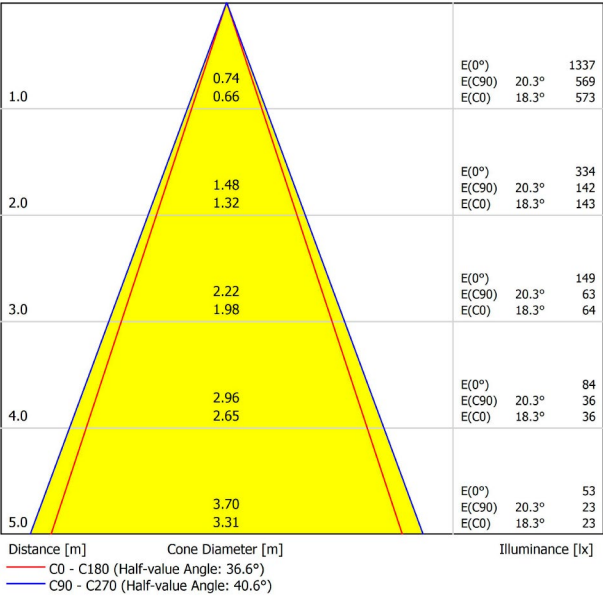



DIMENSIONS

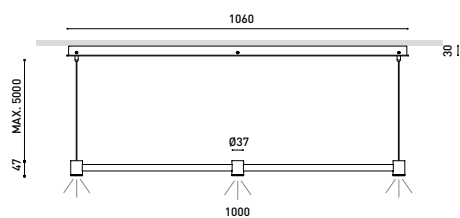

AWARDS



PRODUCT

Name	ART SURF DIM DALI 2700K BCNT
Reference	A3421020BCNT
Color	Brushed Copper
RAL	Paint of metallic nanoparticles
Category	SUSPENSION

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	570 Lm
Power	6,3 W
Power values of the system	7,68 W
Colour temperature	2700 K - Other K, please consult
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 3
Light beam angle	38°
Lighting efficiency	92%
Efficacy	105 Lm/W
Current intensity	700 mA
Dimming	DALI - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Cord length	5 m
Fast adjustment tensioner	No
Weight	4024 g.
Packaged weight	4451 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Brass / Acrylonitrile Butadiene Styrene + Polycarbonate




Art Surface is a version that allows it to be installed in places where it is impossible to access the false ceiling. Cement, concrete, vault ... its base, in which the driver locates, allows the luminaire to be installed on all types of surfaces.

POLAR DIAGRAM

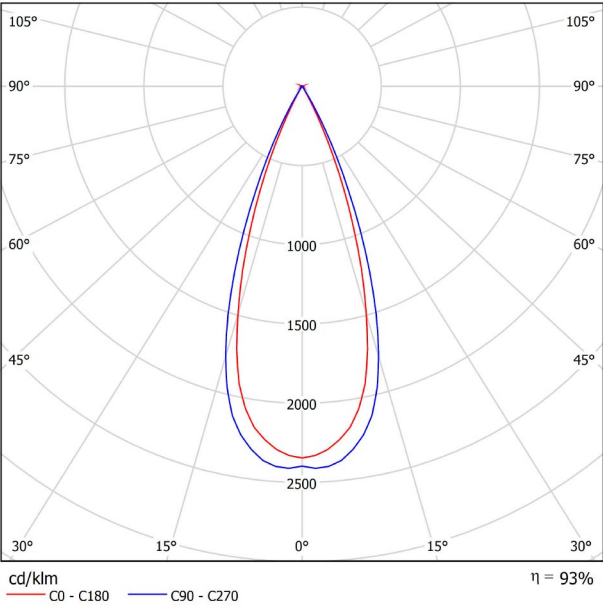


CONICAL DIAGRAM

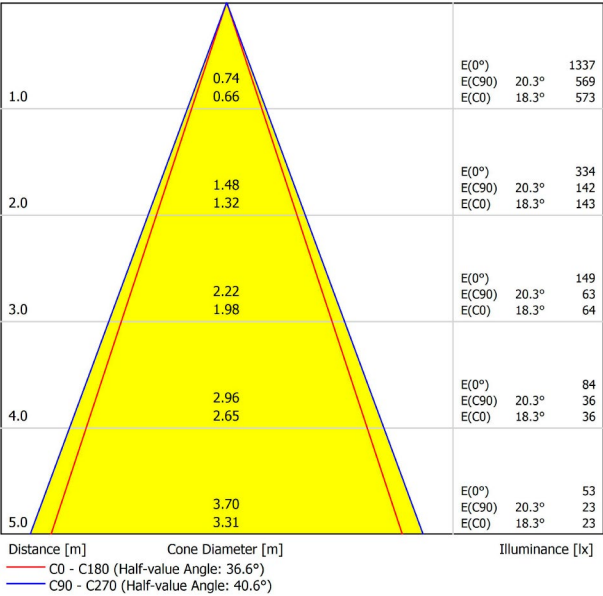



DIMENSIONS

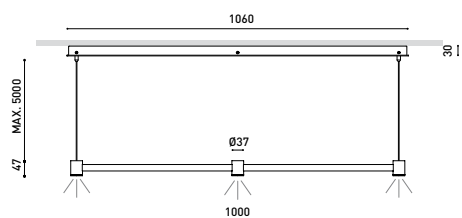

AWARDS



Name	ART SURF DIM DALI 3000K WTWT
Reference	A3421021WTWT
Color	Textured white
RAL	9016
Category	SUSPENSION

PRODUCT

ART SURF DIM DALI 3000K WTWT

A3421021WTWT

Textured white

9016

SUSPENSION

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	630 Lm
Power	6,3 W
Power values of the system	7,68 W
Colour temperature	3000 K - Other K, please consult
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 3
Light beam angle	38°
Lighting efficiency	92%
Efficacy	97 Lm/W
Current intensity	700 mA
Dimming	DALI - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	□
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Cord length	5 m
Fast adjustment tensioner	No
Weight	4024 g.
Packaged weight	4451 g.
Packaging dimensions	1078 × 139 × 89 mm
Units per package	1
Materials	Brass / Acrylonitrile Butadiene Styrene + Polycarbonate




Art Surface is a version that allows it to be installed in places where it is impossible to access the false ceiling. Cement, concrete, vault ... its base, in which the driver locates, allows the luminaire to be installed on all types of surfaces.

POLAR DIAGRAM

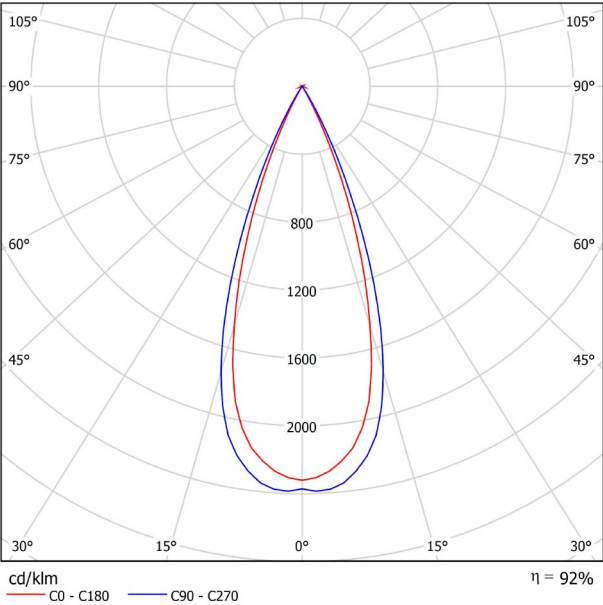


CONICAL DIAGRAM

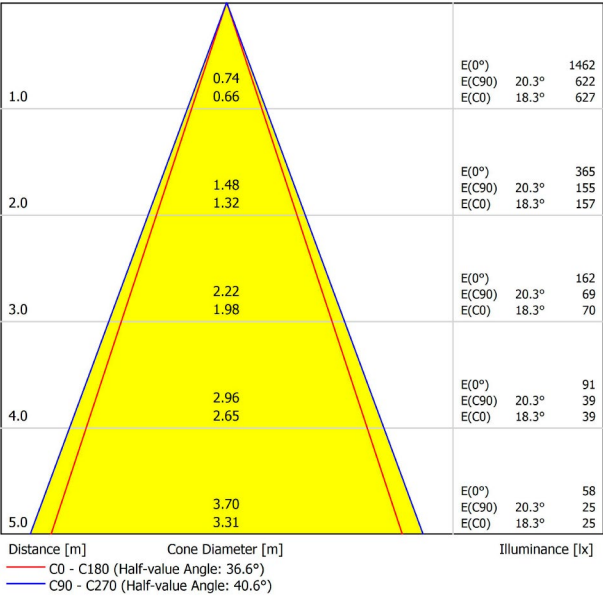



DIMENSIONS

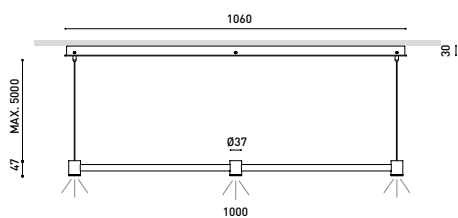

AWARDS



PRODUCT

Name	ART SURF DIM DALI 3000K WTNT
Reference	A3421021WTNT
Color	Textured white
RAL	9016
Category	SUSPENSION

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	630 Lm
Power	6,3 W
Power values of the system	7,68 W
Colour temperature	3000 K - Other K, please consult
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 3
Light beam angle	38°
Lighting efficiency	92%
Efficacy	97 Lm/W
Current intensity	700 mA
Dimming	DALI - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Cord length	5 m
Fast adjustment tensioner	No
Weight	4024 g.
Packaged weight	4451 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Brass / Acrylonitrile Butadiene Styrene + Polycarbonate




Art Surface is a version that allows it to be installed in places where it is impossible to access the false ceiling. Cement, concrete, vault ... its base, in which the driver locates, allows the luminaire to be installed on all types of surfaces.

POLAR DIAGRAM

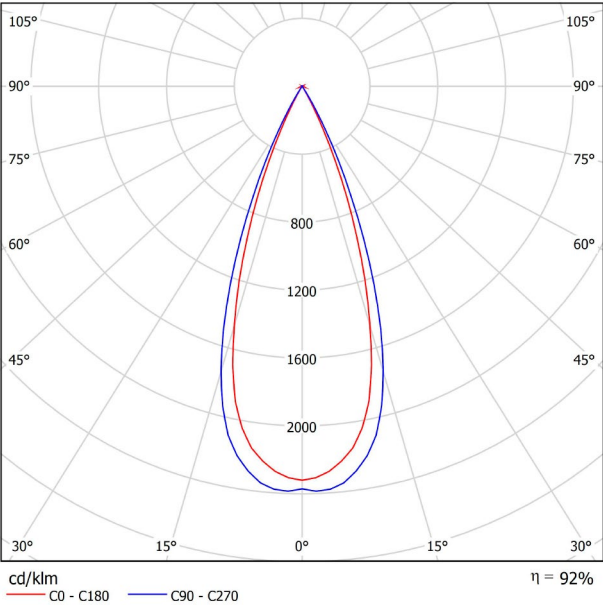


CONICAL DIAGRAM

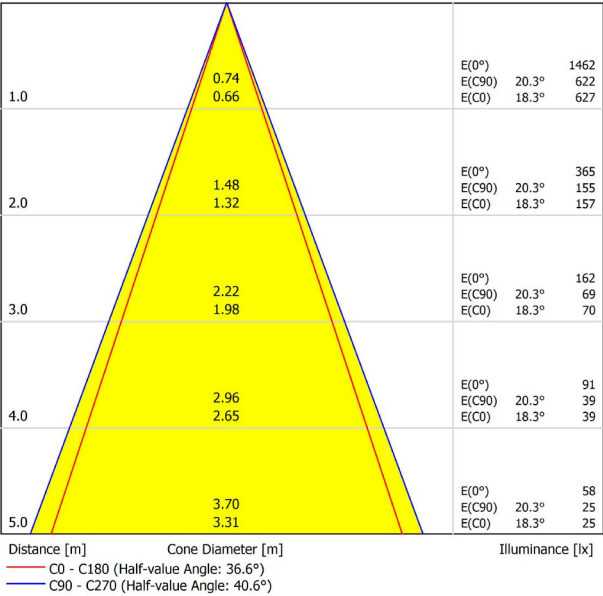



DIMENSIONS

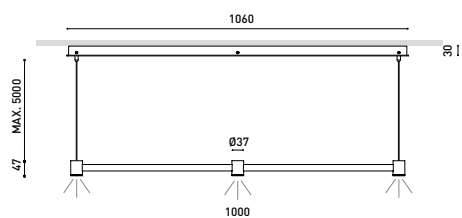

AWARDS



Name	ART SURF DIM DALI 3000K NTWT
Reference	A3421021NTWT
Color	Textured black
RAL	9005
Category	SUSPENSION

PRODUCT

ART SURF DIM DALI 3000K NTWT

A3421021NTWT

Textured black

9005

SUSPENSION

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	630 Lm
Power	6,3 W
Power values of the system	7,68 W
Colour temperature	3000 K - Other K, please consult
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 3
Light beam angle	38°
Lighting efficiency	92%
Efficacy	92 Lm/W
Current intensity	700 mA
Dimming	DALI - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Cord length	5 m
Fast adjustment tensioner	No
Weight	4024 g.
Packaged weight	4451 g.
Packaging dimensions	1078 × 139 × 89 mm
Units per package	1
Materials	Brass / Acrylonitrile Butadiene Styrene + Polycarbonate




Art Surface is a version that allows it to be installed in places where it is impossible to access the false ceiling. Cement, concrete, vault ... its base, in which the driver locates, allows the luminaire to be installed on all types of surfaces.

POLAR DIAGRAM

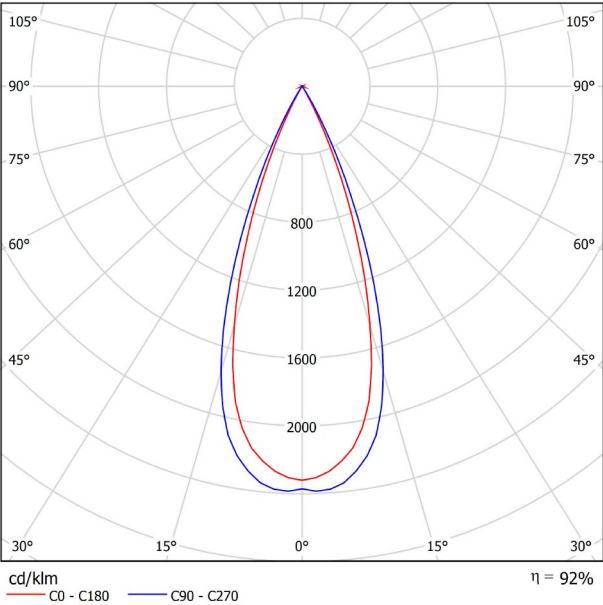


CONICAL DIAGRAM

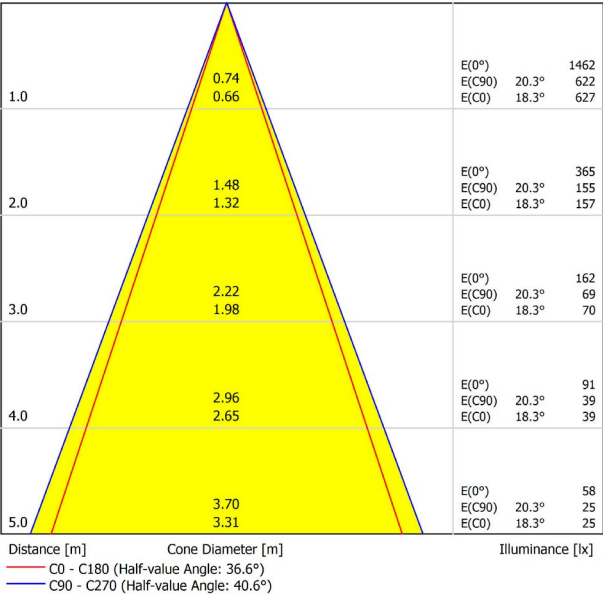



DIMENSIONS

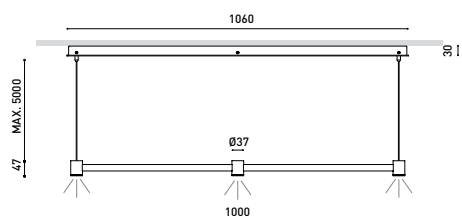

AWARDS



Name	ART SURF DIM DALI 3000K NTNT
Reference	A3421021NTNT
Color	Textured black
RAL	9005
Category	SUSPENSION

PRODUCT

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	630 Lm
Power	6,3 W
Power values of the system	7,68 W
Colour temperature	3000 K - Other K, please consult
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 3
Light beam angle	38°
Lighting efficiency	92%
Efficacy	92 Lm/W
Current intensity	700 mA
Dimming	DALI - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Cord length	5 m
Fast adjustment tensioner	No
Weight	4024 g.
Packaged weight	4451 g.
Packaging dimensions	1078 × 139 × 89 mm
Units per package	1
Materials	Brass / Acrylonitrile Butadiene Styrene + Polycarbonate




Art Surface is a version that allows it to be installed in places where it is impossible to access the false ceiling. Cement, concrete, vault ... its base, in which the driver locates, allows the luminaire to be installed on all types of surfaces.

POLAR DIAGRAM

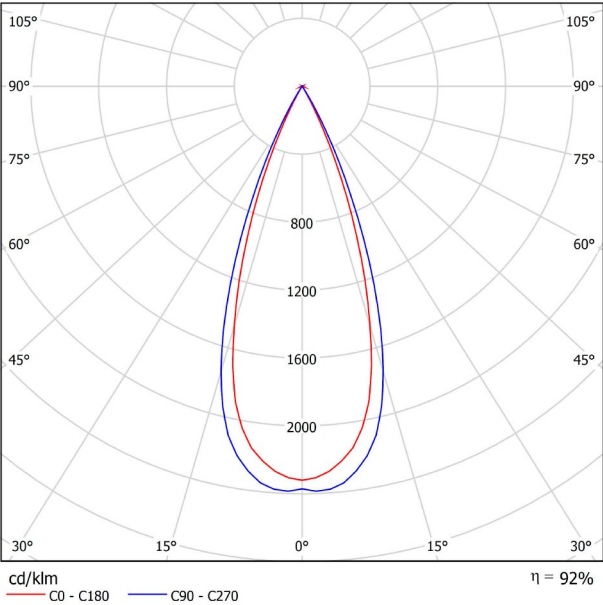


CONICAL DIAGRAM

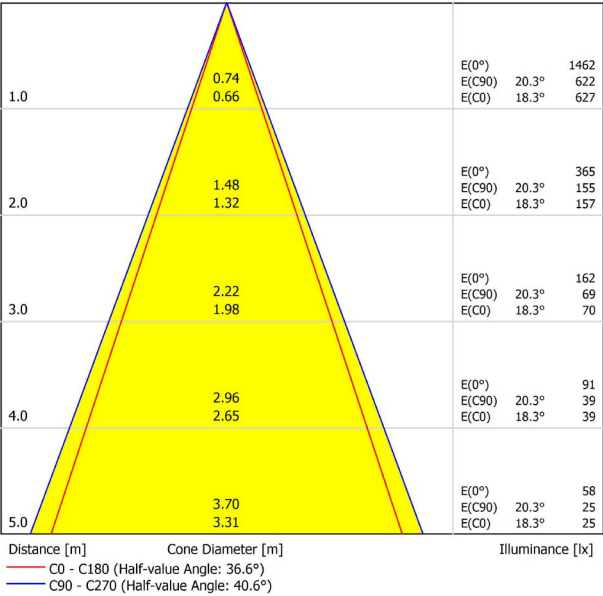



DIMENSIONS

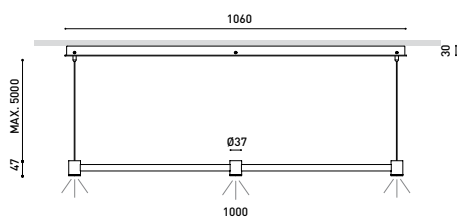

AWARDS



PRODUCT

Name	ART SURF DIM DALI 3000K BGWT
Reference	A3421021BGWT
Color	Brushed Gold
RAL	Paint of metallic nanoparticles
Category	SUSPENSION

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	630 Lm
Power	6,3 W
Power values of the system	7,68 W
Colour temperature	3000 K - Other K, please consult
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 3
Light beam angle	38°
Lighting efficiency	92%
Efficacy	92 Lm/W
Current intensity	700 mA
Dimming	DALI - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Cord length	5 m
Fast adjustment tensioner	No
Weight	4024 g.
Packaged weight	4451 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Brass / Acrylonitrile Butadiene Styrene + Polycarbonate




Art Surface is a version that allows it to be installed in places where it is impossible to access the false ceiling. Cement, concrete, vault ... its base, in which the driver locates, allows the luminaire to be installed on all types of surfaces.

POLAR DIAGRAM

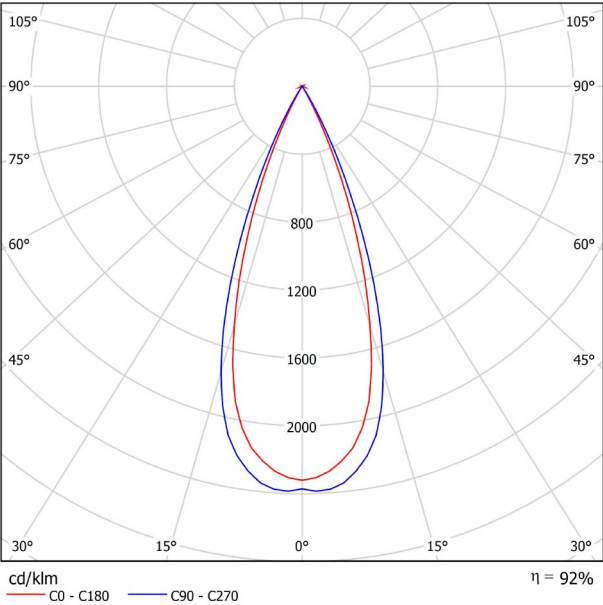


CONICAL DIAGRAM

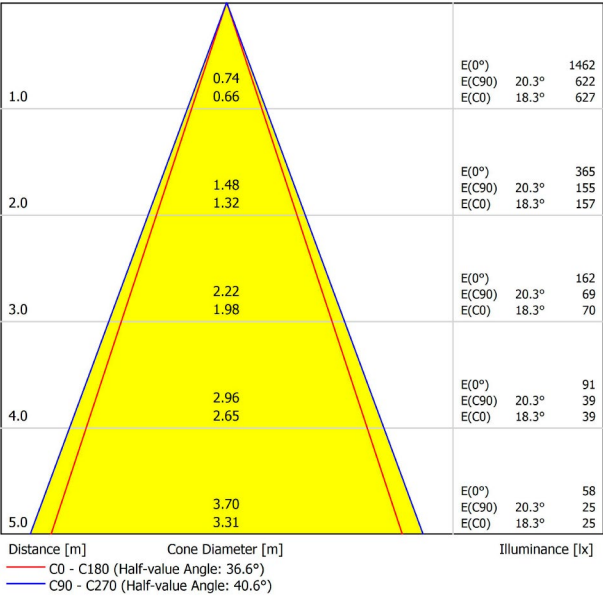



DIMENSIONS

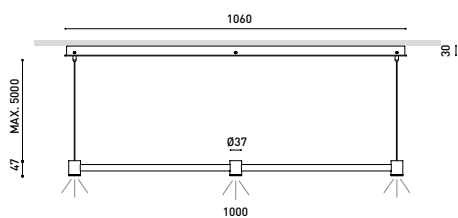

AWARDS



PRODUCT

Name	ART SURF DIM DALI 3000K BGNT
Reference	A3421021BGNT
Color	Brushed Gold
RAL	Paint of metallic nanoparticles
Category	SUSPENSION

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	630 Lm
Power	6,3 W
Power values of the system	7,68 W
Colour temperature	3000 K - Other K, please consult
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 3
Light beam angle	38°
Lighting efficiency	92%
Efficacy	92 Lm/W
Current intensity	700 mA
Dimming	DALI - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Cord length	5 m
Fast adjustment tensioner	No
Weight	4024 g.
Packaged weight	4451 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Brass / Acrylonitrile Butadiene Styrene + Polycarbonate




Art Surface is a version that allows it to be installed in places where it is impossible to access the false ceiling. Cement, concrete, vault ... its base, in which the driver locates, allows the luminaire to be installed on all types of surfaces.

POLAR DIAGRAM

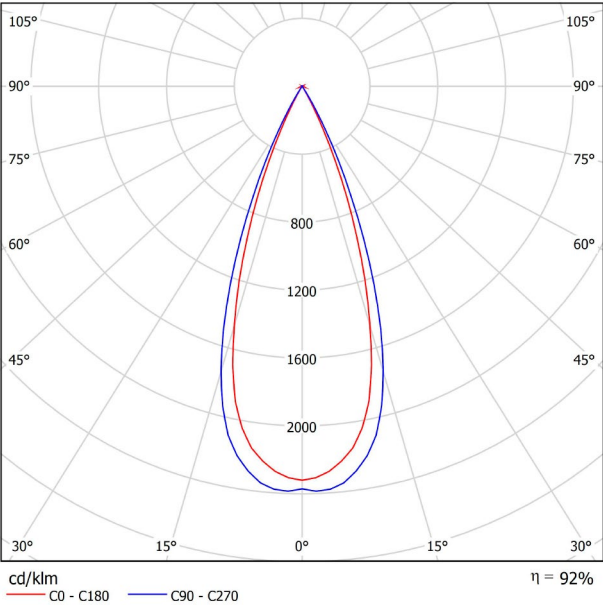


CONICAL DIAGRAM

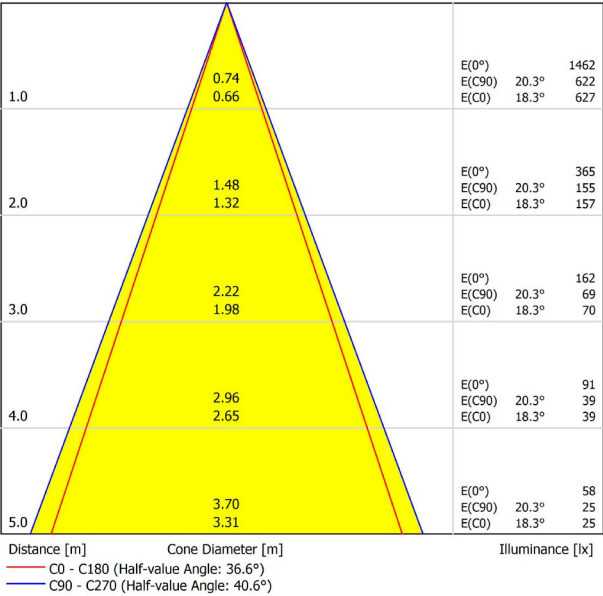



DIMENSIONS

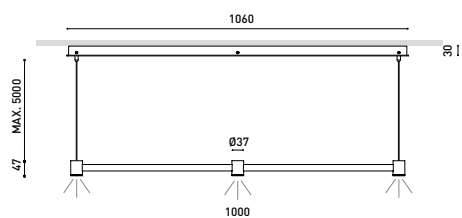

AWARDS



Name	ART SURF DIM DALI 3000K BCWT
Reference	A3421021BCWT
Color	Brushed Copper
RAL	Paint of metallic nanoparticles
Category	SUSPENSION

PRODUCT

ART SURF DIM DALI 3000K BCWT

A3421021BCWT

Brushed Copper

Paint of metallic nanoparticles

SUSPENSION

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	630 Lm
Power	6,3 W
Power values of the system	7,68 W
Colour temperature	3000 K - Other K, please consult
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 3
Light beam angle	38°
Lighting efficiency	92%
Efficacy	92 Lm/W
Current intensity	700 mA
Dimming	DALI - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Cord length	5 m
Fast adjustment tensioner	No
Weight	4024 g.
Packaged weight	4451 g.
Packaging dimensions	1078 × 139 × 89 mm
Units per package	1
Materials	Brass / Acrylonitrile Butadiene Styrene + Polycarbonate




Art Surface is a version that allows it to be installed in places where it is impossible to access the false ceiling. Cement, concrete, vault ... its base, in which the driver locates, allows the luminaire to be installed on all types of surfaces.

POLAR DIAGRAM

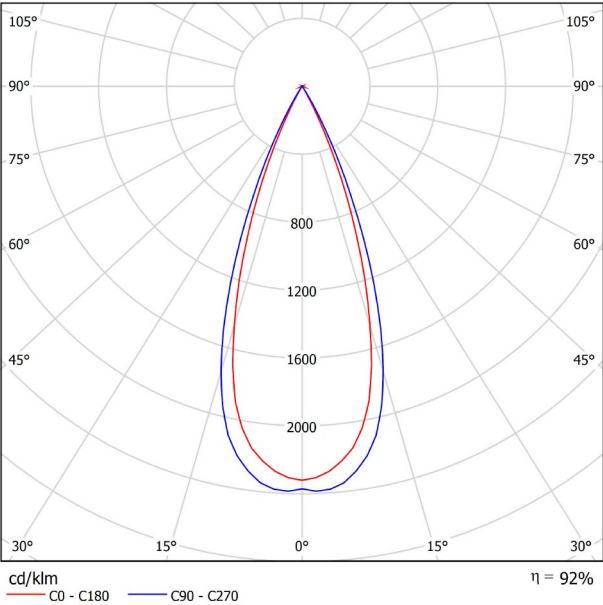


CONICAL DIAGRAM

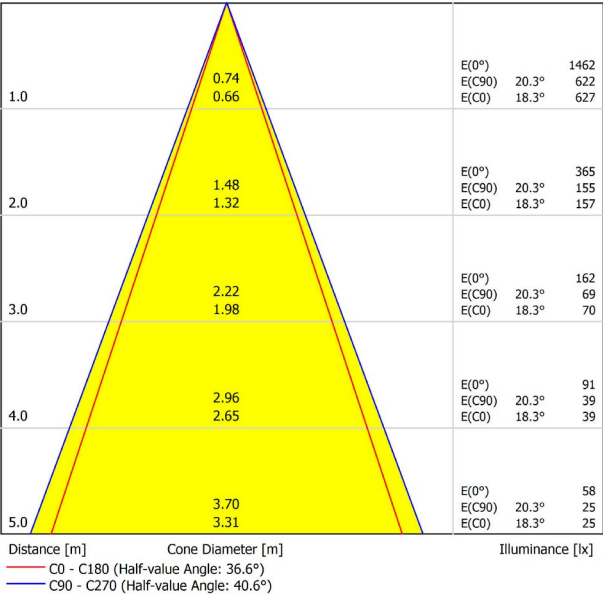



DIMENSIONS

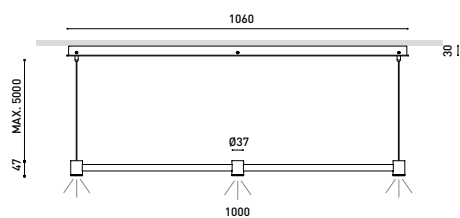

AWARDS



PRODUCT

Name	ART SURF DIM DALI 3000K BCNT
Reference	A3421021BCNT
Color	Brushed Copper
RAL	Paint of metallic nanoparticles
Category	SUSPENSION

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	630 Lm
Power	6,3 W
Power values of the system	7,68 W
Colour temperature	3000 K - Other K, please consult
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 3
Light beam angle	38°
Lighting efficiency	92%
Efficacy	92 Lm/W
Current intensity	700 mA
Dimming	DALI - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Cord length	5 m
Fast adjustment tensioner	No
Weight	4024 g.
Packaged weight	4451 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Brass / Acrylonitrile Butadiene Styrene + Polycarbonate




Art Surface is a version that allows it to be installed in places where it is impossible to access the false ceiling. Cement, concrete, vault ... its base, in which the driver locates, allows the luminaire to be installed on all types of surfaces.

POLAR DIAGRAM

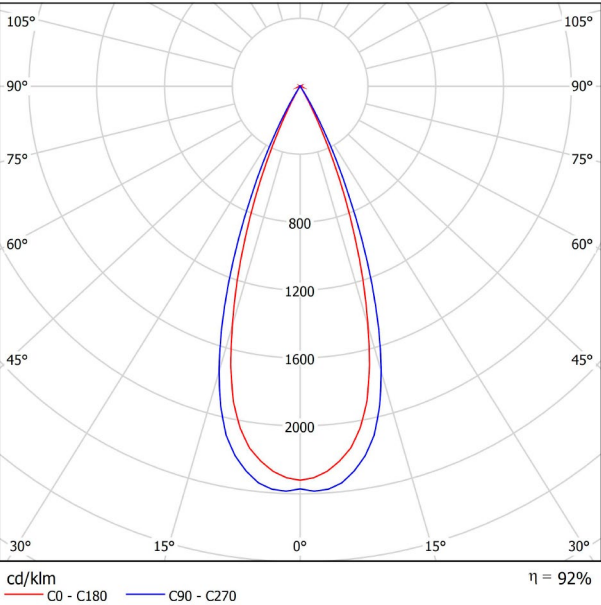


CONICAL DIAGRAM

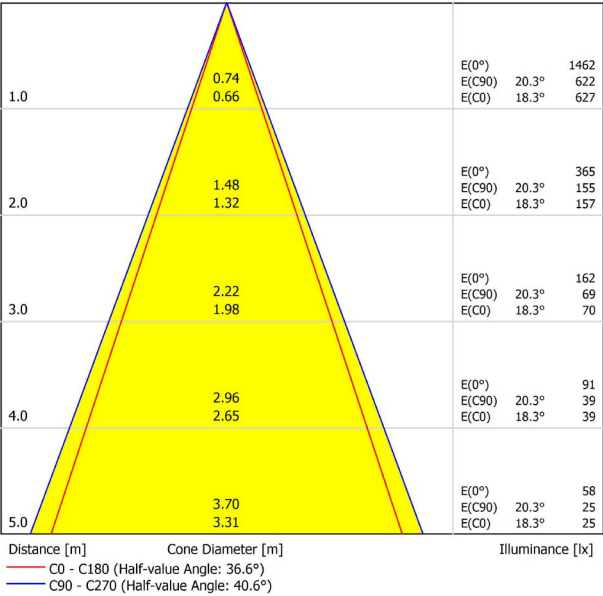



DIMENSIONS

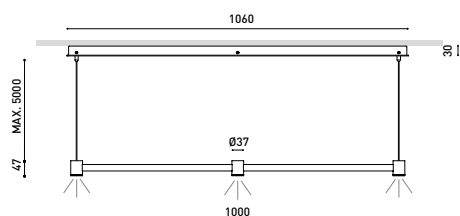

AWARDS



PRODUCT

Name	ART SURF 3000K BCNT
Reference	A3421011BCNT
Color	Brushed Copper
RAL	Paint of metallic nanoparticles
Category	SUSPENSION

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	630 Lm
Power	6,3 W
Power values of the system	7,00 W
Colour temperature	3000 K - Other K, please consult
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 3
Light beam angle	38°
Lighting efficiency	92%
Efficacy	97 Lm/W
Current intensity	700 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Cord length	5 m
Fast adjustment tensioner	No
Weight	4024 g.
Packaged weight	4451 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Brass / Acrylonitrile Butadiene Styrene + Polycarbonate




Art Surface is a version that allows it to be installed in places where it is impossible to access the false ceiling. Cement, concrete, vault ... its base, in which the driver locates, allows the luminaire to be installed on all types of surfaces.

POLAR DIAGRAM

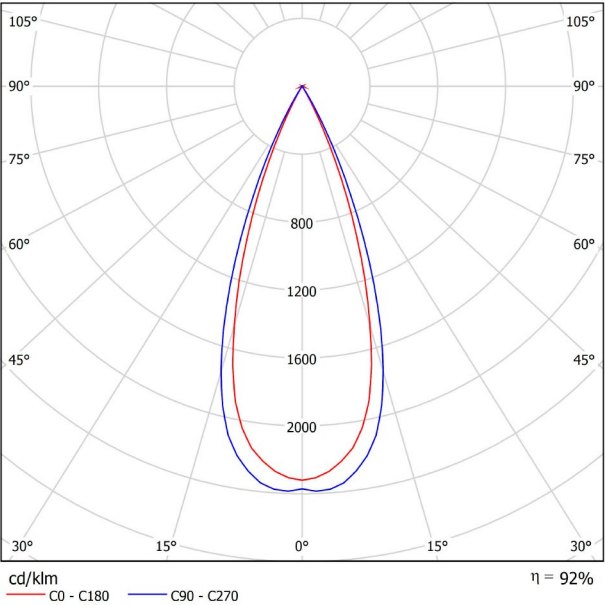


CONICAL DIAGRAM

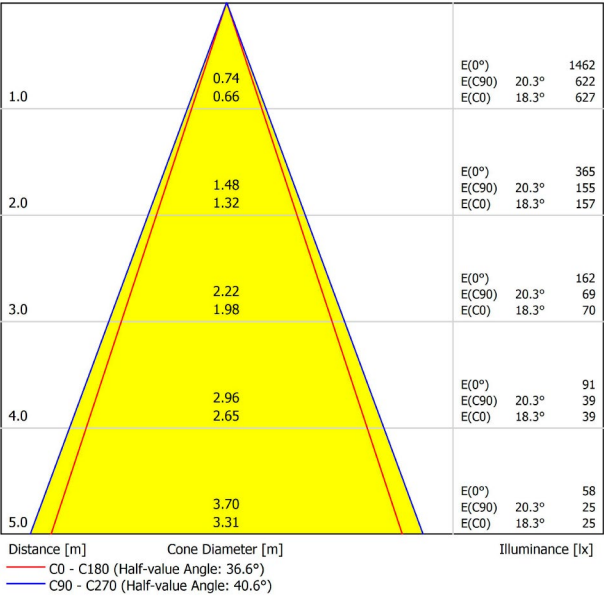



DIMENSIONS

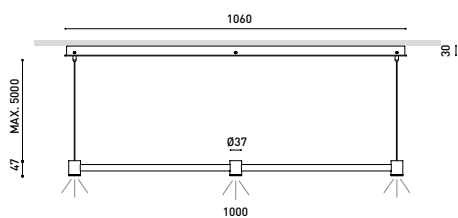

AWARDS



PRODUCT

Name	ART SURF 2700K WTWT
Reference	A3421010WTWT
Color	Textured white
RAL	9016
Category	SUSPENSION

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	570 Lm
Power	6,3 W
Power values of the system	7,00 W
Colour temperature	2700 K - Other K, please consult
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 3
Light beam angle	38°
Lighting efficiency	92%
Efficacy	97 Lm/W
Current intensity	700 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Cord length	5 m
Fast adjustment tensioner	No
Weight	4024 g.
Packaged weight	4451 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Brass / Acrylonitrile Butadiene Styrene + Polycarbonate




Art Surface is a version that allows it to be installed in places where it is impossible to access the false ceiling. Cement, concrete, vault ... its base, in which the driver locates, allows the luminaire to be installed on all types of surfaces.

POLAR DIAGRAM

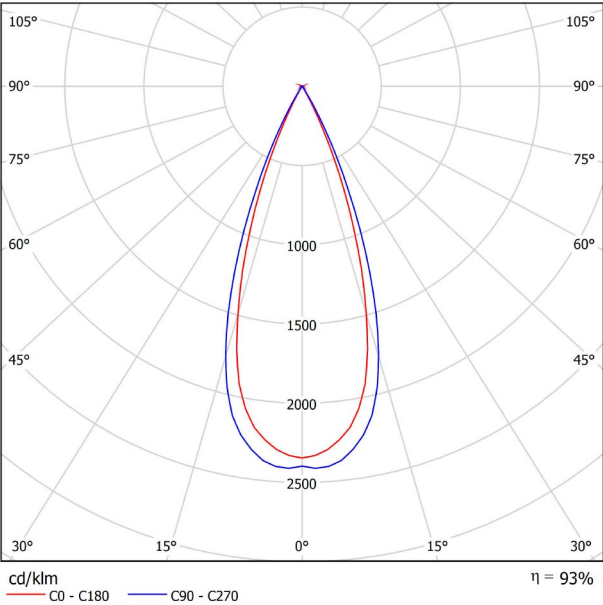


CONICAL DIAGRAM

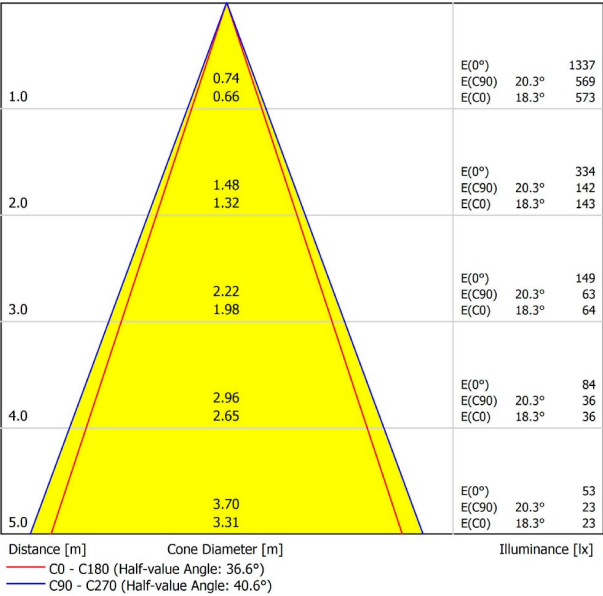



DIMENSIONS

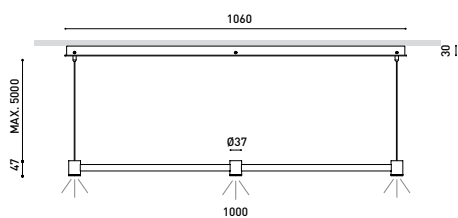

AWARDS



PRODUCT

Name	ART SURF 2700K WTNT
Reference	A3421010WTNT
Color	Textured white
RAL	9016
Category	SUSPENSION

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	570 Lm
Power	6,3 W
Power values of the system	7,00 W
Colour temperature	2700 K - Other K, please consult
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 3
Light beam angle	38°
Lighting efficiency	92%
Efficacy	97 Lm/W
Current intensity	700 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Cord length	5 m
Fast adjustment tensioner	No
Weight	4024 g.
Packaged weight	4451 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Brass / Acrylonitrile Butadiene Styrene + Polycarbonate




Art Surface is a version that allows it to be installed in places where it is impossible to access the false ceiling. Cement, concrete, vault ... its base, in which the driver locates, allows the luminaire to be installed on all types of surfaces.

POLAR DIAGRAM

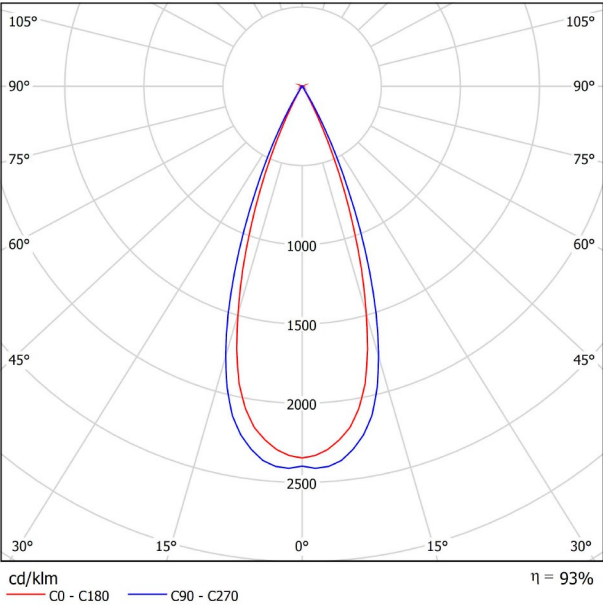


CONICAL DIAGRAM

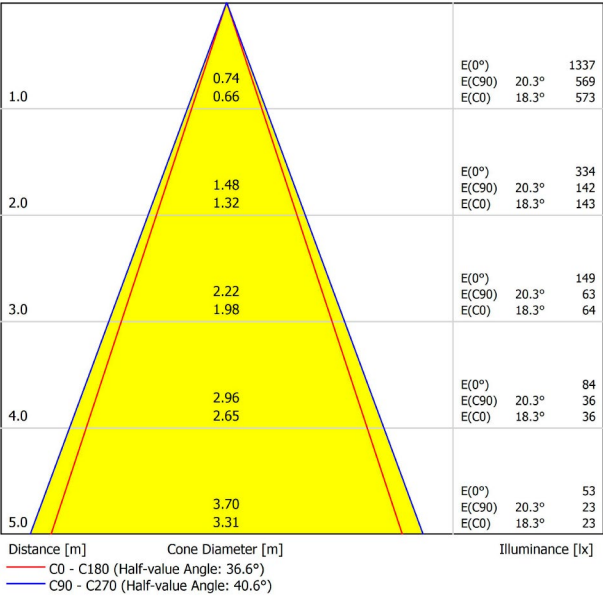



DIMENSIONS

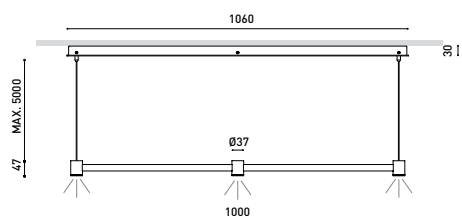

AWARDS



Name	ART SURF 2700K NTWT
Reference	A3421010NTWT
Color	Textured black
RAL	9005
Category	SUSPENSION

PRODUCT

ART SURF 2700K NTWT

A3421010NTWT

Textured black

9005

SUSPENSION

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	570 Lm
Power	6,3 W
Power values of the system	7,00 W
Colour temperature	2700 K - Other K, please consult
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 3
Light beam angle	38°
Lighting efficiency	92%
Efficacy	92 Lm/W
Current intensity	700 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Cord length	5 m
Fast adjustment tensioner	No
Weight	4024 g.
Packaged weight	4451 g.
Packaging dimensions	1078 × 139 × 89 mm
Units per package	1
Materials	Brass / Acrylonitrile Butadiene Styrene + Polycarbonate




Art Surface is a version that allows it to be installed in places where it is impossible to access the false ceiling. Cement, concrete, vault ... its base, in which the driver locates, allows the luminaire to be installed on all types of surfaces.

POLAR DIAGRAM

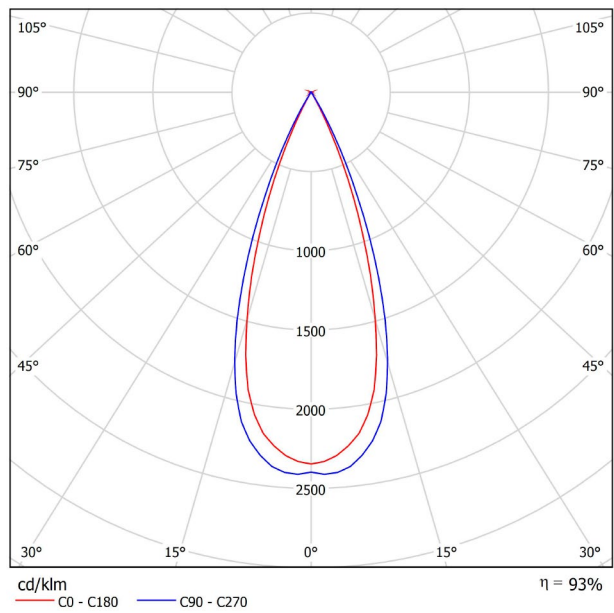


CONICAL DIAGRAM

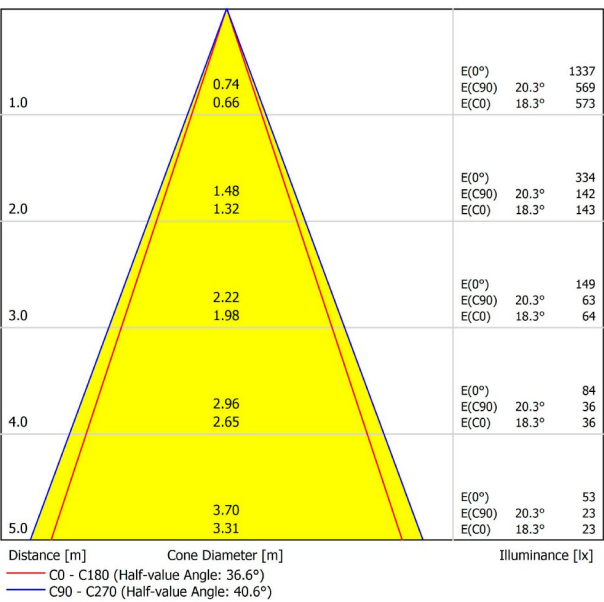



DIMENSIONS

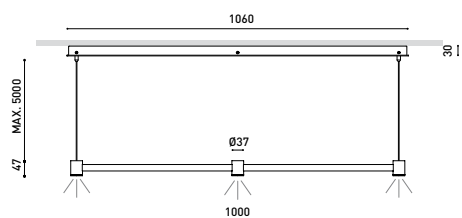

AWARDS



Name	ART SURF 2700K NTNT
Reference	A3421010NTNT
Color	Textured black
RAL	9005
Category	SUSPENSION

PRODUCT

ART SURF 2700K NTNT

A3421010NTNT

Textured black

9005

SUSPENSION

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	570 Lm
Power	6,3 W
Power values of the system	7,00 W
Colour temperature	2700 K - Other K, please consult
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 3
Light beam angle	38°
Lighting efficiency	92%
Efficacy	92 Lm/W
Current intensity	700 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Cord length	5 m
Fast adjustment tensioner	No
Weight	4024 g.
Packaged weight	4451 g.
Packaging dimensions	1078 × 139 × 89 mm
Units per package	1
Materials	Brass / Acrylonitrile Butadiene Styrene + Polycarbonate




Art Surface is a version that allows it to be installed in places where it is impossible to access the false ceiling. Cement, concrete, vault ... its base, in which the driver locates, allows the luminaire to be installed on all types of surfaces.

POLAR DIAGRAM

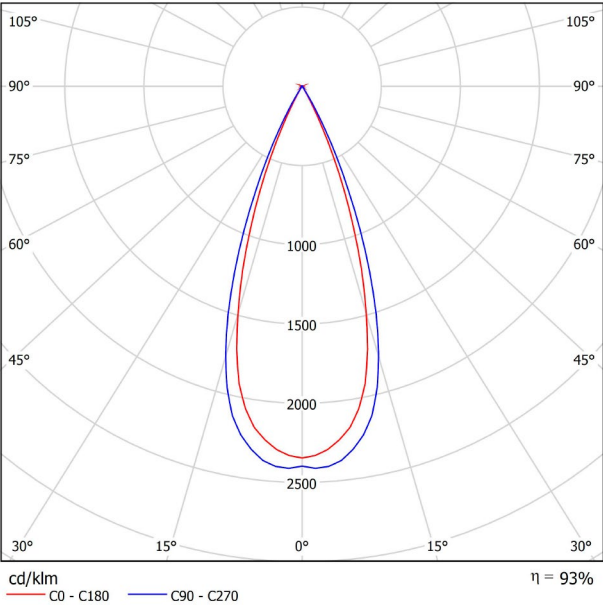


CONICAL DIAGRAM

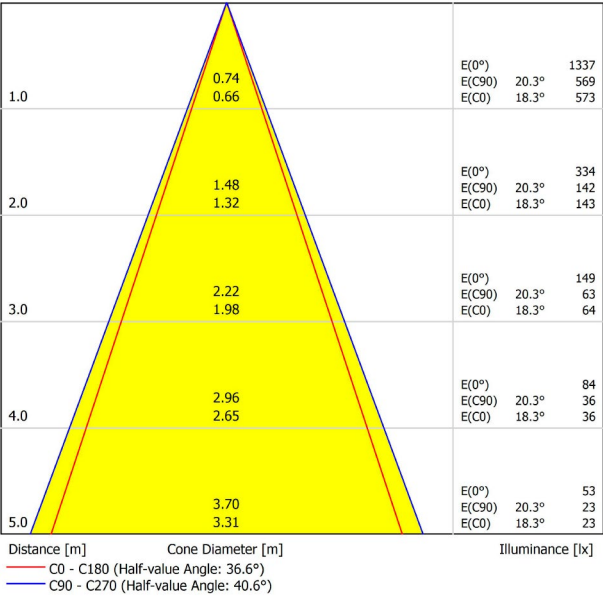



DIMENSIONS

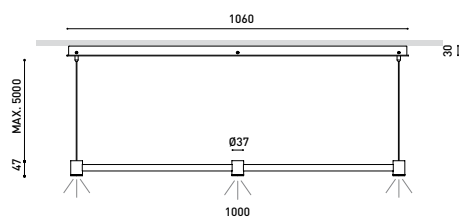

AWARDS



PRODUCT

Name	ART SURF 2700K BGWT
Reference	A3421010BGWT
Color	Brushed Gold
RAL	Paint of metallic nanoparticles
Category	SUSPENSION

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	570 Lm
Power	6,3 W
Power values of the system	7,00 W
Colour temperature	2700 K - Other K, please consult
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 3
Light beam angle	38°
Lighting efficiency	92%
Efficacy	92 Lm/W
Current intensity	700 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Cord length	5 m
Fast adjustment tensioner	No
Weight	4024 g.
Packaged weight	4451 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Brass / Acrylonitrile Butadiene Styrene + Polycarbonate




Art Surface is a version that allows it to be installed in places where it is impossible to access the false ceiling. Cement, concrete, vault ... its base, in which the driver locates, allows the luminaire to be installed on all types of surfaces.

POLAR DIAGRAM

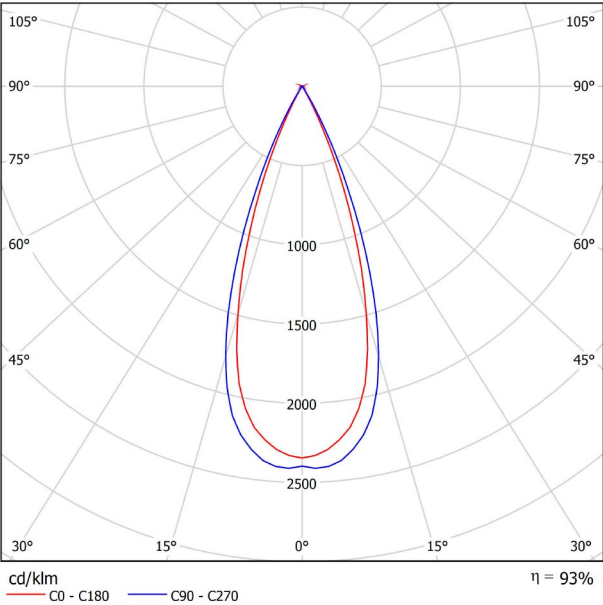


CONICAL DIAGRAM

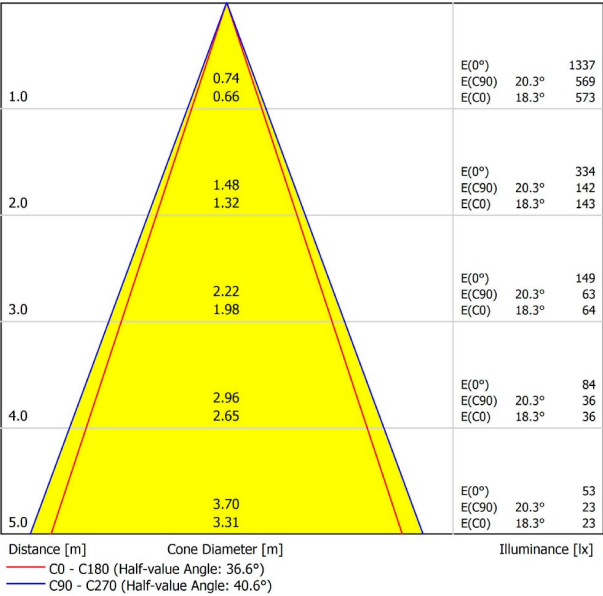



DIMENSIONS

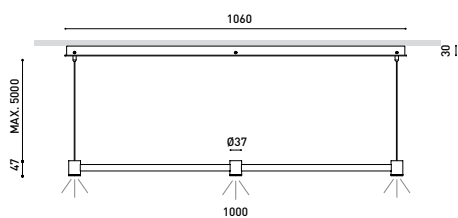

AWARDS



PRODUCT

Name	ART SURF 2700K BGNT
Reference	A3421010BGNT
Color	Brushed Gold
RAL	Paint of metallic nanoparticles
Category	SUSPENSION

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	570 Lm
Power	6,3 W
Power values of the system	7,00 W
Colour temperature	2700 K - Other K, please consult
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 3
Light beam angle	38°
Lighting efficiency	92%
Efficacy	92 Lm/W
Current intensity	700 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Cord length	5 m
Fast adjustment tensioner	No
Weight	4024 g.
Packaged weight	4451 g.
Packaging dimensions	1078 × 139 × 89 mm
Units per package	1
Materials	Brass / Acrylonitrile Butadiene Styrene + Polycarbonate




Art Surface is a version that allows it to be installed in places where it is impossible to access the false ceiling. Cement, concrete, vault ... its base, in which the driver locates, allows the luminaire to be installed on all types of surfaces.

POLAR DIAGRAM

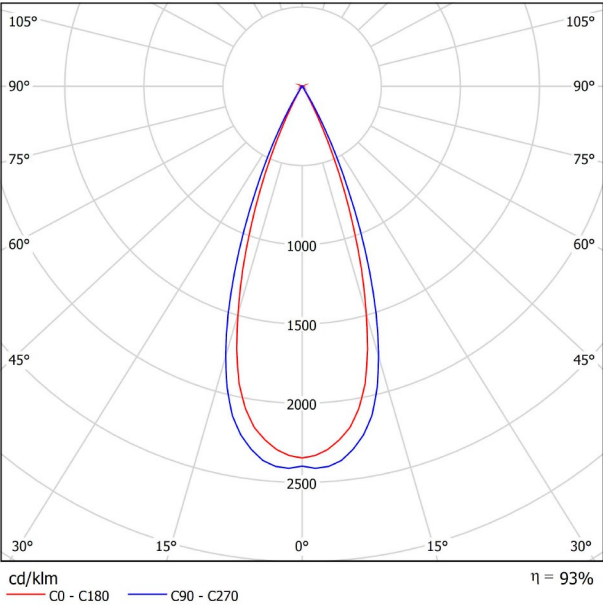


CONICAL DIAGRAM

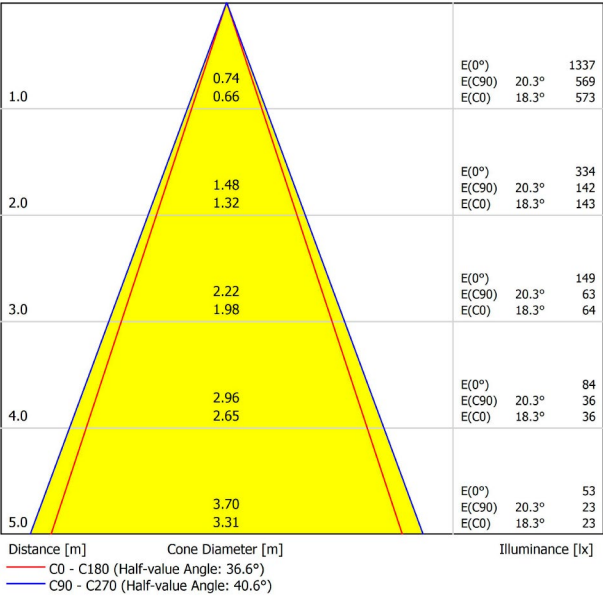



DIMENSIONS

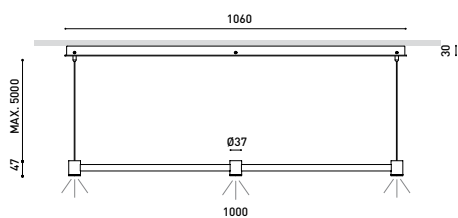

AWARDS



Name	ART SURF 2700K BCWT
Reference	A3421010BCWT
Color	Brushed Copper
RAL	Paint of metallic nanoparticles
Category	SUSPENSION

PRODUCT

Light source	LED
Gross luminous flux	570 Lm
Power	6,3 W
Power values of the system	7,00 W
Colour temperature	2700 K - Other K, please consult
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 3
Light beam angle	38°
Lighting efficiency	92%
Efficacy	92 Lm/W
Current intensity	700 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


OTHER DATA

Ingress Protection	IP20
Cord length	5 m
Fast adjustment tensioner	No
Weight	4024 g.
Packaged weight	4451 g.
Packaging dimensions	1078 × 139 × 89 mm
Units per package	1
Materials	Brass / Acrylonitrile Butadiene Styrene + Polycarbonate




Art Surface is a version that allows it to be installed in places where it is impossible to access the false ceiling. Cement, concrete, vault ... its base, in which the driver locates, allows the luminaire to be installed on all types of surfaces.

POLAR DIAGRAM

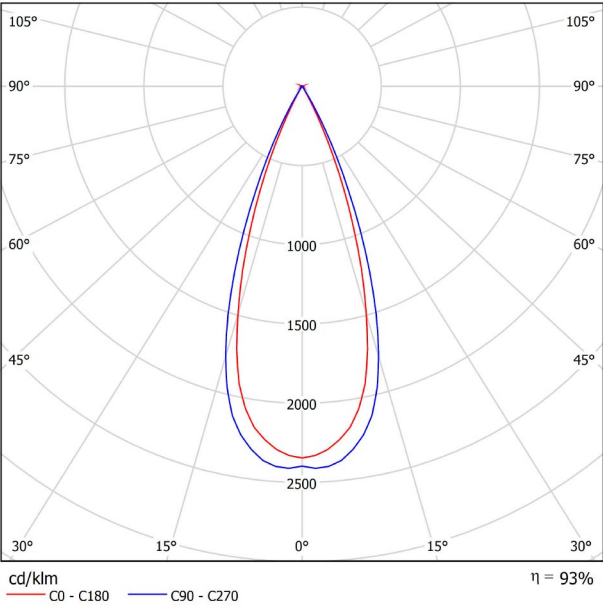


CONICAL DIAGRAM

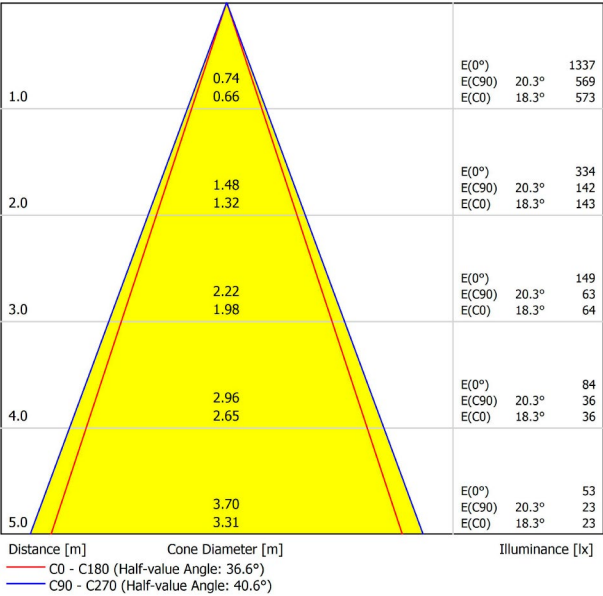



DIMENSIONS

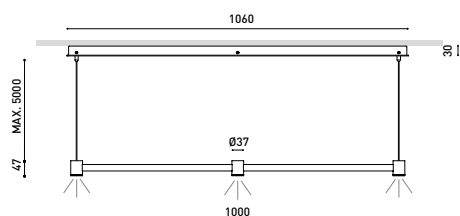

AWARDS



PRODUCT

Name	ART SURF 2700K BCNT
Reference	A3421010BCNT
Color	Brushed Copper
RAL	Paint of metallic nanoparticles
Category	SUSPENSION

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	570 Lm
Power	6,3 W
Power values of the system	7,00 W
Colour temperature	2700 K - Other K, please consult
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 3
Light beam angle	38°
Lighting efficiency	92%
Efficacy	92 Lm/W
Current intensity	700 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Cord length	5 m
Fast adjustment tensioner	No
Weight	4024 g.
Packaged weight	4451 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Brass / Acrylonitrile Butadiene Styrene + Polycarbonate




Art Surface is a version that allows it to be installed in places where it is impossible to access the false ceiling. Cement, concrete, vault ... its base, in which the driver locates, allows the luminaire to be installed on all types of surfaces.

POLAR DIAGRAM

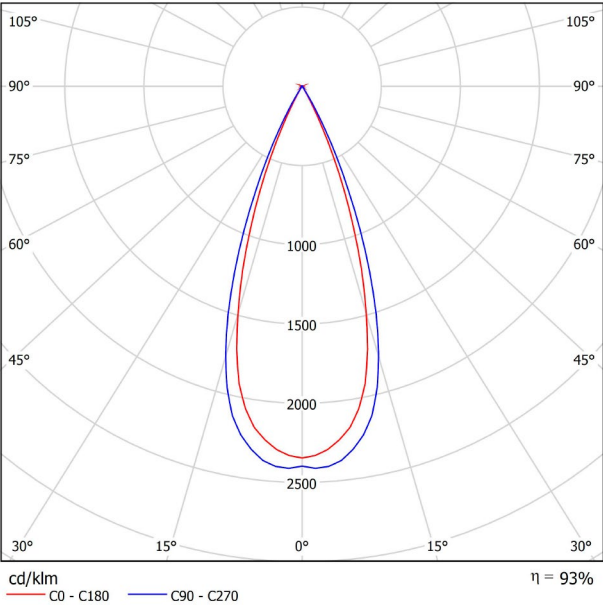


CONICAL DIAGRAM

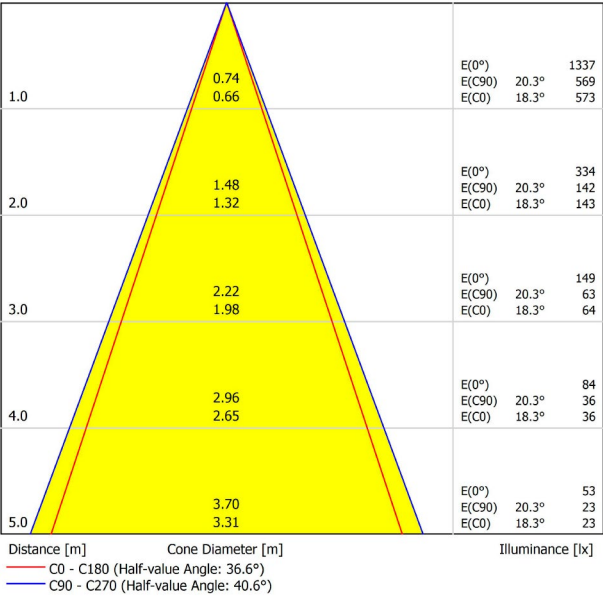



DIMENSIONS

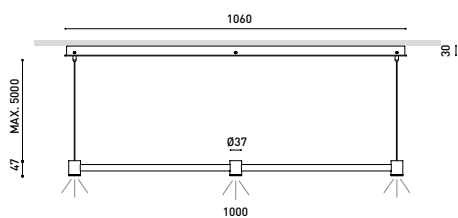

AWARDS



PRODUCT

Name	ART SURF 3000K WTWT
Reference	A3421011WTWT
Color	Textured white
RAL	9016
Category	SUSPENSION

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	630 Lm
Power	6,3 W
Power values of the system	7,00 W
Colour temperature	3000 K - Other K, please consult
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 3
Light beam angle	38°
Lighting efficiency	92%
Efficacy	105 Lm/W
Current intensity	700 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Cord length	5 m
Fast adjustment tensioner	No
Weight	4024 g.
Packaged weight	4451 g.
Packaging dimensions	1078 x 139 x 89 mm
Units per package	1
Materials	Brass / Acrylonitrile Butadiene Styrene + Polycarbonate




Art Surface is a version that allows it to be installed in places where it is impossible to access the false ceiling. Cement, concrete, vault ... its base, in which the driver locates, allows the luminaire to be installed on all types of surfaces.

POLAR DIAGRAM

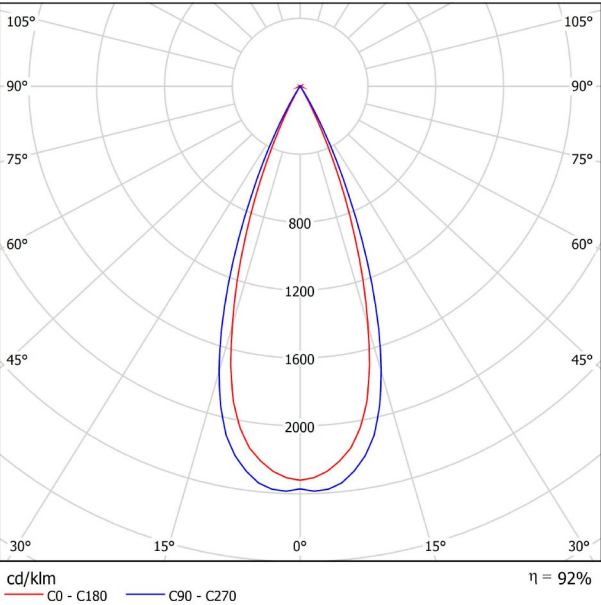


CONICAL DIAGRAM

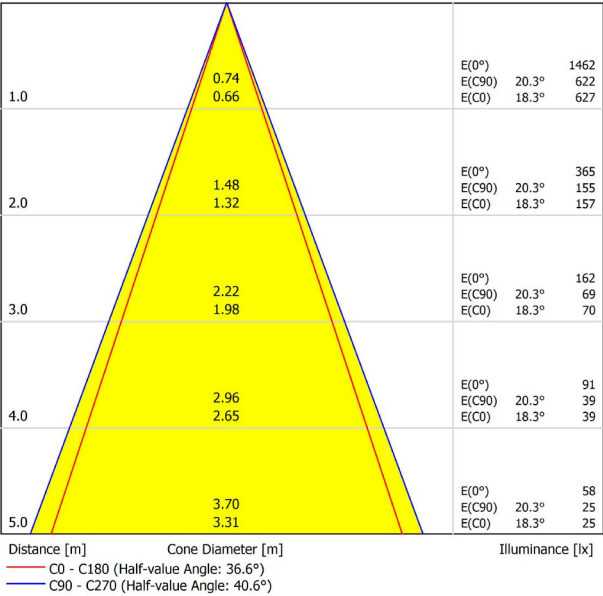



DIMENSIONS

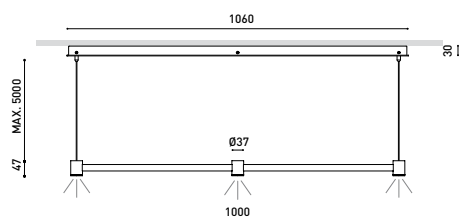

AWARDS



PRODUCT

Name	ART SURF 3000K WTNT
Reference	A3421011WTNT
Color	Textured white
RAL	9016
Category	SUSPENSION

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	630 Lm
Power	6,3 W
Power values of the system	7,00 W
Colour temperature	3000 K - Other K, please consult
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 3
Light beam angle	38°
Lighting efficiency	92%
Efficacy	105 Lm/W
Current intensity	700 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Cord length	5 m
Fast adjustment tensioner	No
Weight	4024 g.
Packaged weight	4451 g.
Packaging dimensions	1078 × 139 × 89 mm
Units per package	1
Materials	Brass / Acrylonitrile Butadiene Styrene + Polycarbonate




Art Surface is a version that allows it to be installed in places where it is impossible to access the false ceiling. Cement, concrete, vault ... its base, in which the driver locates, allows the luminaire to be installed on all types of surfaces.

POLAR DIAGRAM

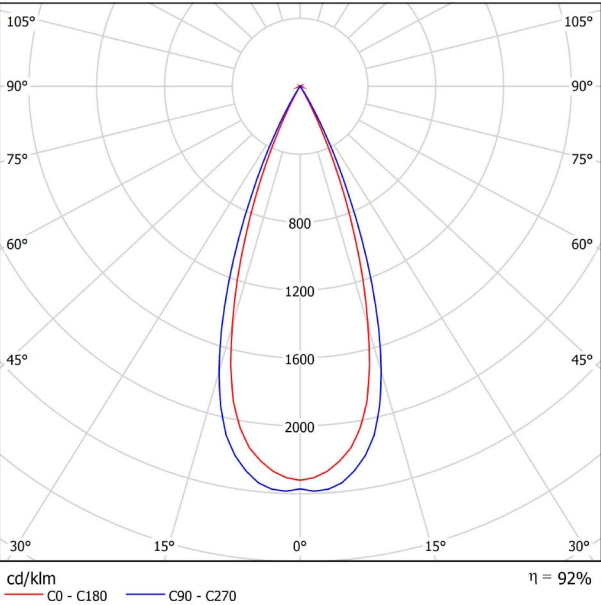


CONICAL DIAGRAM

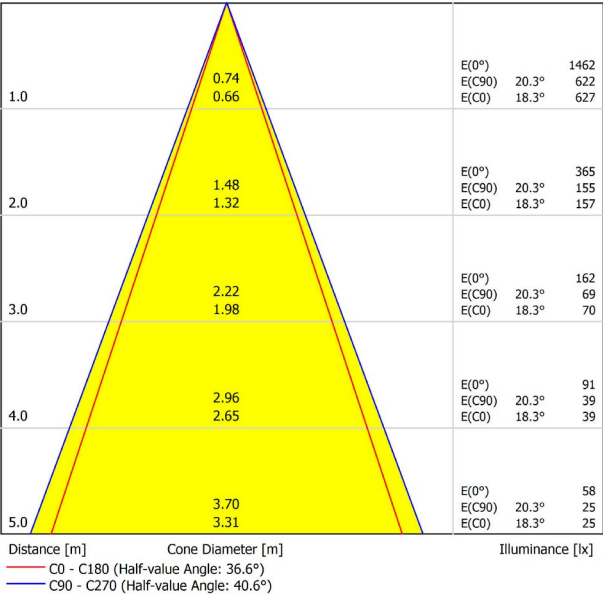



DIMENSIONS

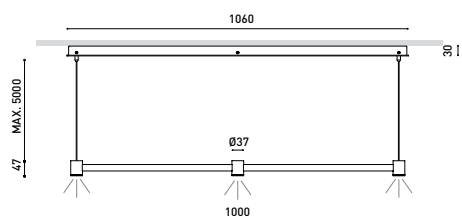

AWARDS



Name	ART SURF 3000K NTWT
Reference	A3421011NTWT
Color	Textured black
RAL	9005
Category	SUSPENSION

PRODUCT

ART SURF 3000K NTWT

A3421011NTWT

Textured black

9005

SUSPENSION

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	630 Lm
Power	6,3 W
Power values of the system	7,00 W
Colour temperature	3000 K - Other K, please consult
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 3
Light beam angle	38°
Lighting efficiency	92%
Efficacy	97 Lm/W
Current intensity	700 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Cord length	5 m
Fast adjustment tensioner	No
Weight	4024 g.
Packaged weight	4451 g.
Packaging dimensions	1078 × 139 × 89 mm
Units per package	1
Materials	Brass / Acrylonitrile Butadiene Styrene + Polycarbonate




Art Surface is a version that allows it to be installed in places where it is impossible to access the false ceiling. Cement, concrete, vault ... its base, in which the driver locates, allows the luminaire to be installed on all types of surfaces.

POLAR DIAGRAM

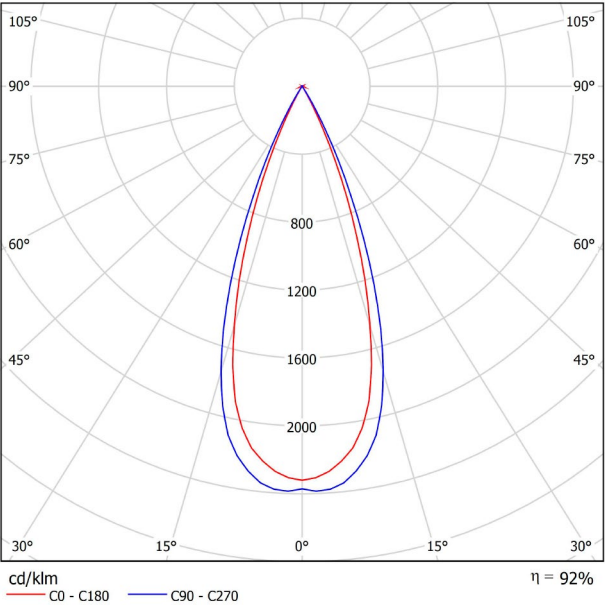


CONICAL DIAGRAM

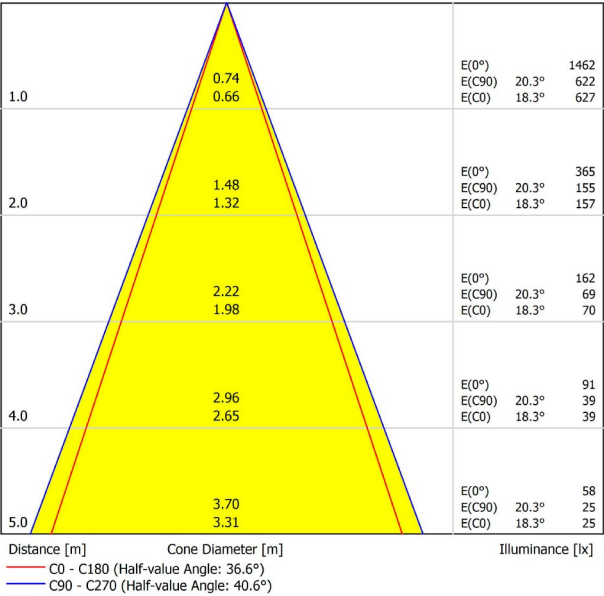



DIMENSIONS

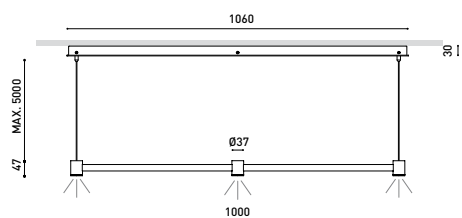

AWARDS



Name	ART SURF 3000K NTNT
Reference	A3421011NTNT
Color	Textured black
RAL	9005
Category	SUSPENSION

PRODUCT

ART SURF 3000K NTNT

A3421011NTNT

Textured black

9005

SUSPENSION

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	630 Lm
Power	6,3 W
Power values of the system	7,00 W
Colour temperature	3000 K - Other K, please consult
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 3
Light beam angle	38°
Lighting efficiency	92%
Efficacy	97 Lm/W
Current intensity	700 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	□
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Cord length	5 m
Fast adjustment tensioner	No
Weight	4024 g.
Packaged weight	4451 g.
Packaging dimensions	1078 × 139 × 89 mm
Units per package	1
Materials	Brass / Acrylonitrile Butadiene Styrene + Polycarbonate




Art Surface is a version that allows it to be installed in places where it is impossible to access the false ceiling. Cement, concrete, vault ... its base, in which the driver locates, allows the luminaire to be installed on all types of surfaces.

POLAR DIAGRAM

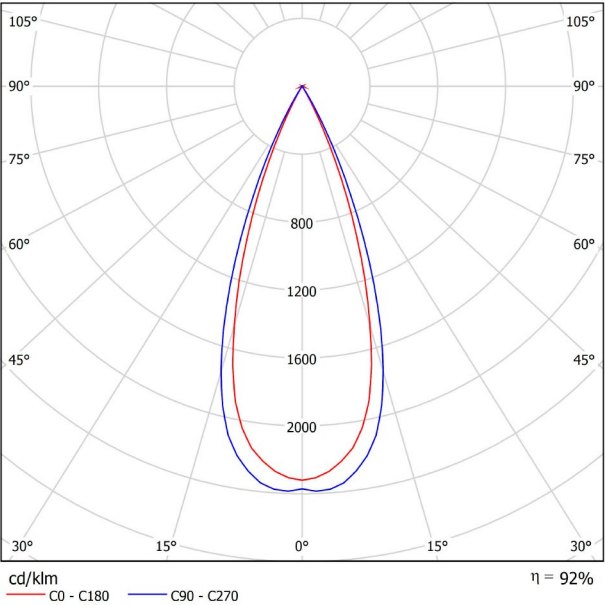


CONICAL DIAGRAM

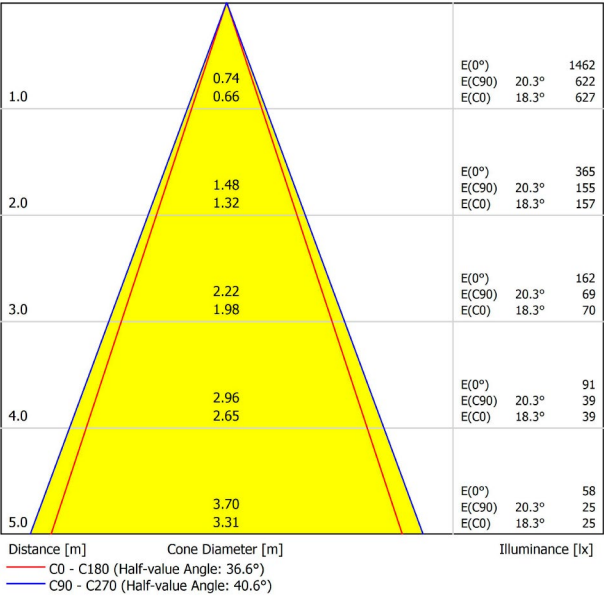



DIMENSIONS

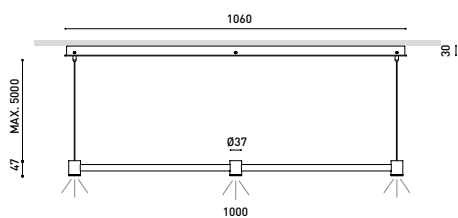

AWARDS



PRODUCT

Name	ART SURF 3000K BGWT
Reference	A3421011BGWT
Color	Brushed Gold
RAL	Paint of metallic nanoparticles
Category	SUSPENSION

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	630 Lm
Power	6,3 W
Power values of the system	7,00 W
Colour temperature	3000 K - Other K, please consult
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 3
Light beam angle	38°
Lighting efficiency	92%
Efficacy	97 Lm/W
Current intensity	700 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Cord length	5 m
Fast adjustment tensioner	No
Weight	4024 g.
Packaged weight	4451 g.
Packaging dimensions	1078 × 139 × 89 mm
Units per package	1
Materials	Brass / Acrylonitrile Butadiene Styrene + Polycarbonate




Art Surface is a version that allows it to be installed in places where it is impossible to access the false ceiling. Cement, concrete, vault ... its base, in which the driver locates, allows the luminaire to be installed on all types of surfaces.

POLAR DIAGRAM

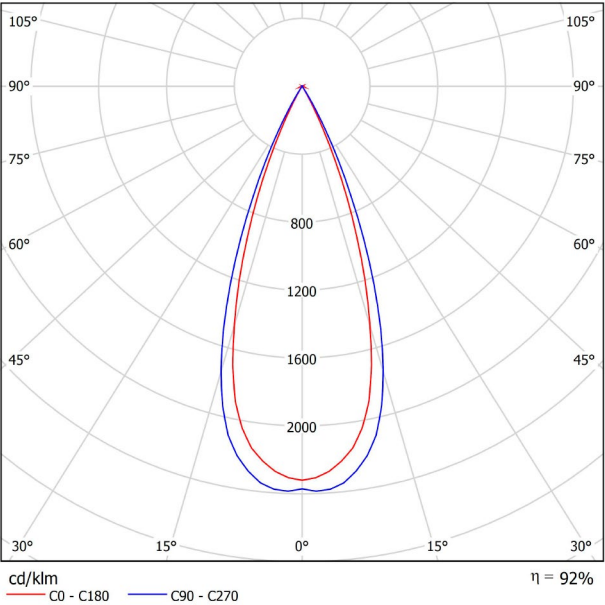


CONICAL DIAGRAM

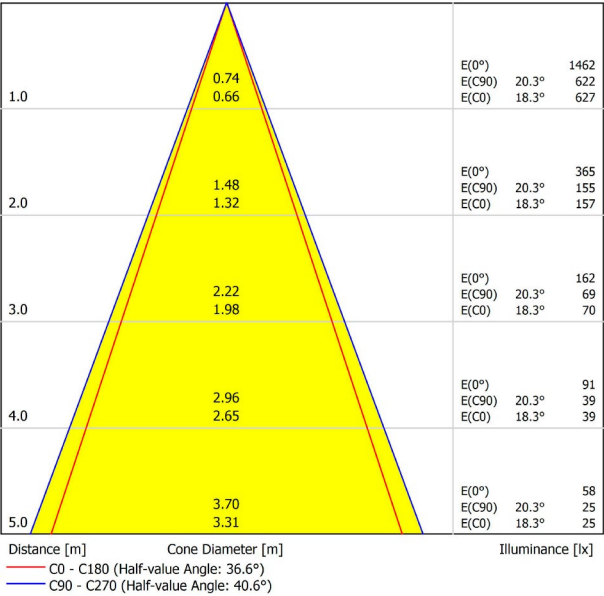



DIMENSIONS

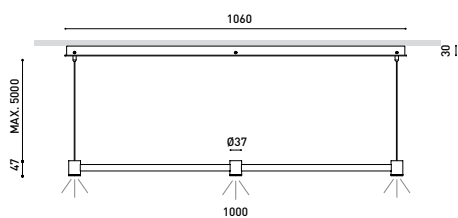

AWARDS



PRODUCT

Name	ART SURF 3000K BGNT
Reference	A3421011BGNT
Color	Brushed Gold
RAL	Paint of metallic nanoparticles
Category	SUSPENSION

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	630 Lm
Power	6,3 W
Power values of the system	7,00 W
Colour temperature	3000 K - Other K, please consult
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 3
Light beam angle	38°
Lighting efficiency	92%
Efficacy	97 Lm/W
Current intensity	700 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Cord length	5 m
Fast adjustment tensioner	No
Weight	4024 g.
Packaged weight	4451 g.
Packaging dimensions	1078 × 139 × 89 mm
Units per package	1
Materials	Brass / Acrylonitrile Butadiene Styrene + Polycarbonate




Art Surface is a version that allows it to be installed in places where it is impossible to access the false ceiling. Cement, concrete, vault ... its base, in which the driver locates, allows the luminaire to be installed on all types of surfaces.

POLAR DIAGRAM

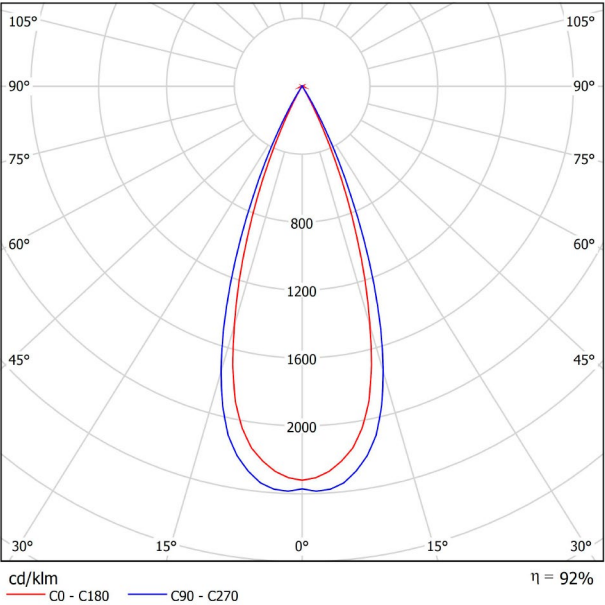


CONICAL DIAGRAM

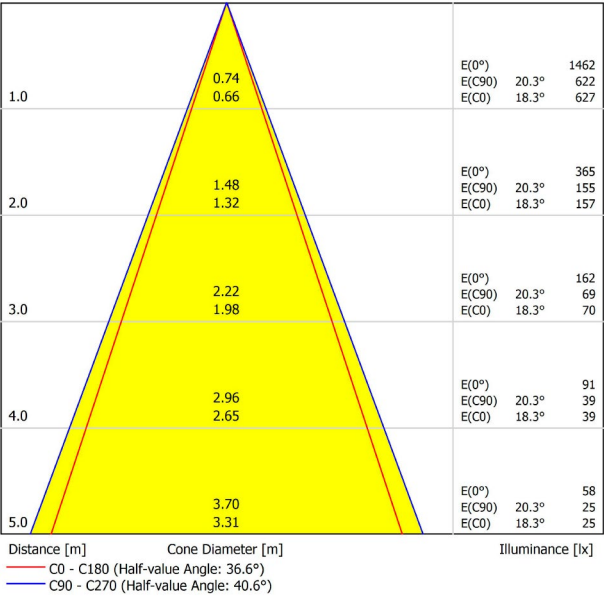



DIMENSIONS

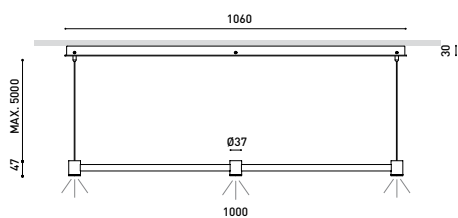

AWARDS



Name	ART SURF 3000K BCWT
Reference	A3421011BCWT
Color	Brushed Copper
RAL	Paint of metallic nanoparticles
Category	SUSPENSION

PRODUCT

ART SURF 3000K BCWT

A3421011BCWT

Brushed Copper

Paint of metallic nanoparticles

SUSPENSION

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	630 Lm
Power	6,3 W
Power values of the system	7,00 W
Colour temperature	3000 K - Other K, please consult
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 3
Light beam angle	38°
Lighting efficiency	92%
Efficacy	97 Lm/W
Current intensity	700 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Cord length	5 m
Fast adjustment tensioner	No
Weight	4024 g.
Packaged weight	4451 g.
Packaging dimensions	1078 × 139 × 89 mm
Units per package	1
Materials	Brass / Acrylonitrile Butadiene Styrene + Polycarbonate



Art Surface is a version that allows it to be installed in places where it is impossible to access the false ceiling. Cement, concrete, vault ... its base, in which the driver locates, allows the luminaire to be installed on all types of surfaces.

POLAR DIAGRAM

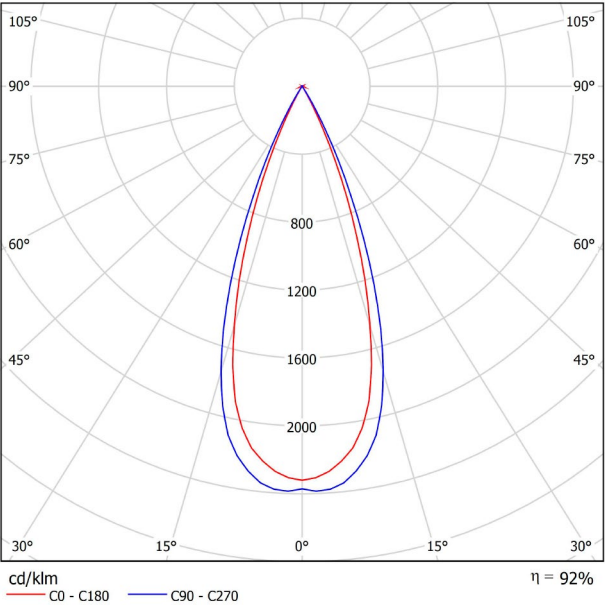

CONICAL DIAGRAM

