




## DIMENSIONS



## ACCESSORIES

ANTI-GLARE HONEYCOMB  
LOUVER

## PRODUCT

Name	WELLIT M TUNABLE WHITE 14° NT
Reference	A3810218NT
Color	Textured black
RAL	9005
Category	CEILING RECESSED

## LIGHTING INFORMATION

Light source	LED
Gross luminous flux	2700 Lm
Power	10,5 W
Power values of the system	10,5 W
Colour temperature	Tunable White 2700 - 5000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 3
Light beam angle	14°
Lighting efficiency	83%
Efficacy	257 Lm/W
Current intensity	600 mA
Dimming	Please Consult
Control through bluetooth	Please Consult
Driver	Included
Emergency power supply	Please Consult
Electrical insulation class	□
Voltage	230 V
Frequency	50/60 Hz
Energy efficiency	A++
LED lifespan	L80B10 (Tj=85°C) >55.000h


## OTHER DATA

Ingress Protection	IP20
Recess measurements	Ø102 mm.
Swivel angle	25°
Rotation angle	355°
Weight	588 g.
Packaged weight	698 g.
Packaging dimensions	179 x 164 x 101 mm
Units per package	1
Materials	Aluminium / Polycarbonate





Wellit is a family of recessed luminaires, that comes in 3 sizes and can be adjusted with a rotation and tilting system. Wellit offers outstanding technical features. It is a compact product: its 3 sizes are consistent with a luminous flux level that is commensurate with its dimensions. It is also noteworthy for its efficient thermal management thanks to an excellently designed dissipation system. With Wellit, the interior designer will have great versatility in terms of applications, for general, retail and contract lighting.

POLAR DIAGRAM

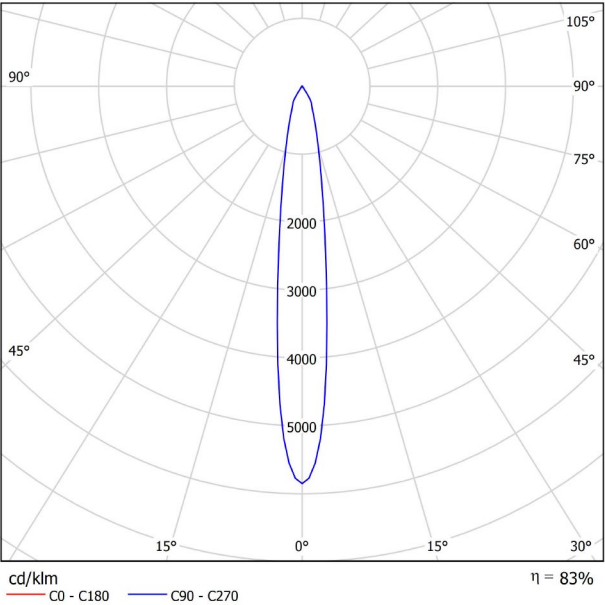

CONICAL DIAGRAM

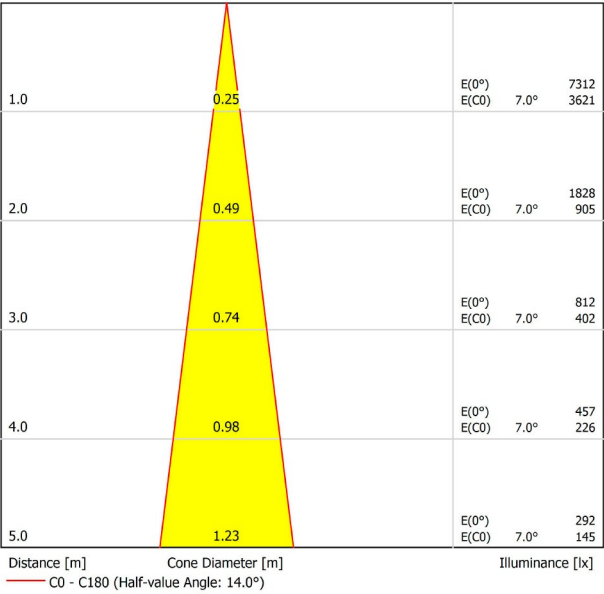



PRODUCT	
Model	Anti-glare Honeycomb Louver
Reference	A381-00-00
Category	Accessories


NOT SOLD SEPARATELY.



Accessory made up of louver in the shape of a honeycomb panel to reduce glare and the effects of direct rays of vision.



## DIMENSIONS



## ACCESSORIES

ANTI-GLARE HONEYCOMB  
LOUVER

## PRODUCT

Name	WELLIT M TUNABLE WHITE 14° WT
Reference	A3810218WT
Color	Textured white
RAL	9016
Category	CEILING RECESSED

## LIGHTING INFORMATION

Light source	LED
Gross luminous flux	1250 Lm
Power	10,5 W
Power values of the system	10,5 W
Colour temperature	Tunable White 2700 - 5000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 3
Light beam angle	14°
Lighting efficiency	83%
Efficacy	119 Lm/W
Current intensity	600 mA
Dimming	Please Consult
Control through bluetooth	Please Consult
Driver	Included
Emergency power supply	Please Consult
Electrical insulation class	□
Voltage	230 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tj=85°C) >55.000h

## OTHER DATA


Ingress Protection	IP20
Recess measurements	Ø102 mm.
Swivel angle	25°
Rotation angle	355°
Weight	588 g.
Packaged weight	698 g.
Packaging dimensions	179 x 164 x 101 mm
Units per package	1
Materials	Aluminium / Polycarbonate




Wellit is a family of recessed luminaires, that comes in 3 sizes and can be adjusted with a rotation and tilting system. Wellit offers outstanding technical features. It is a compact product: its 3 sizes are consistent with a luminous flux level that is commensurate with its dimensions. It is also noteworthy for its efficient thermal management thanks to an excellently designed dissipation system. With Wellit, the interior designer will have great versatility in terms of applications, for general, retail and contract lighting.




POLAR DIAGRAM

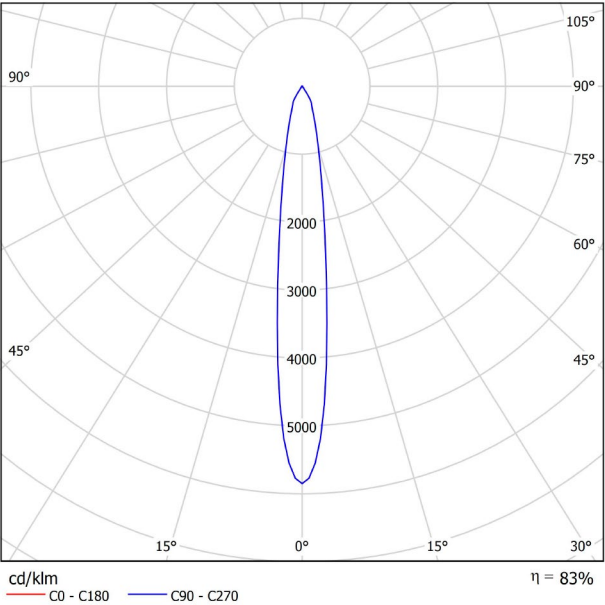

CONICAL DIAGRAM

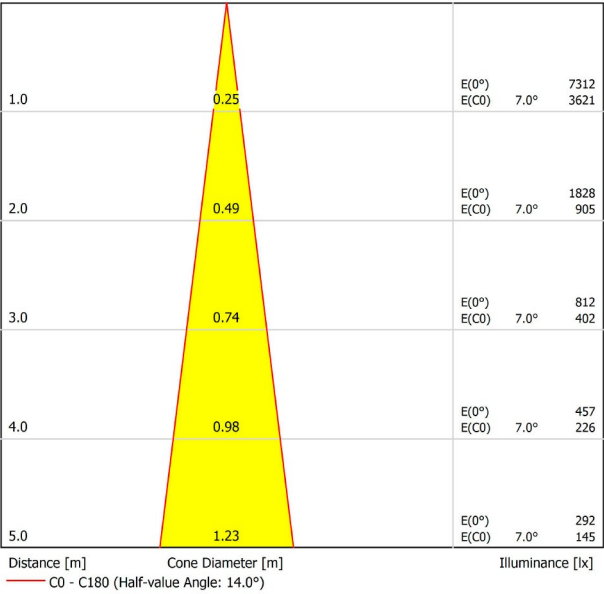




PRODUCT	
Model	Anti-glare Honeycomb Louver
Reference	A381-00-00
Category	Accessories
NOT SOLD SEPARATELY.	



Accessory made up of louver in the shape of a honeycomb panel to reduce glare and the effects of direct rays of vision.



## DIMENSIONS



## ACCESSORIES

ANTI-GLARE HONEYCOMB  
LOUVER

## PRODUCT

Name	WELLIT M TUNABLE WHITE 20° NT
Reference	A3810228NT
Color	Textured black
RAL	9005
Category	CEILING RECESSED

## LIGHTING INFORMATION

Light source	LED
Gross luminous flux	1250 Lm
Power	10,5 W
Power values of the system	10,5 W
Colour temperature	Tunable White 2700 - 5000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 3
Light beam angle	20°
Lighting efficiency	82%
Efficacy	119 Lm/W
Current intensity	600 mA
Dimming	Please Consult
Control through bluetooth	Please Consult
Driver	Included
Emergency power supply	Please Consult
Electrical insulation class	□
Voltage	230 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tj=85°C) >55.000h


## OTHER DATA

Ingress Protection	IP20
Recess measurements	Ø102 mm.
Swivel angle	25°
Rotation angle	355°
Weight	588 g.
Packaged weight	698 g.
Packaging dimensions	179 x 164 x 101 mm
Units per package	1
Materials	Aluminium / Polycarbonate





Wellit is a family of recessed luminaires, that comes in 3 sizes and can be adjusted with a rotation and tilting system. Wellit offers outstanding technical features. It is a compact product: its 3 sizes are consistent with a luminous flux level that is commensurate with its dimensions. It is also noteworthy for its efficient thermal management thanks to an excellently designed dissipation system. With Wellit, the interior designer will have great versatility in terms of applications, for general, retail and contract lighting.

POLAR DIAGRAM

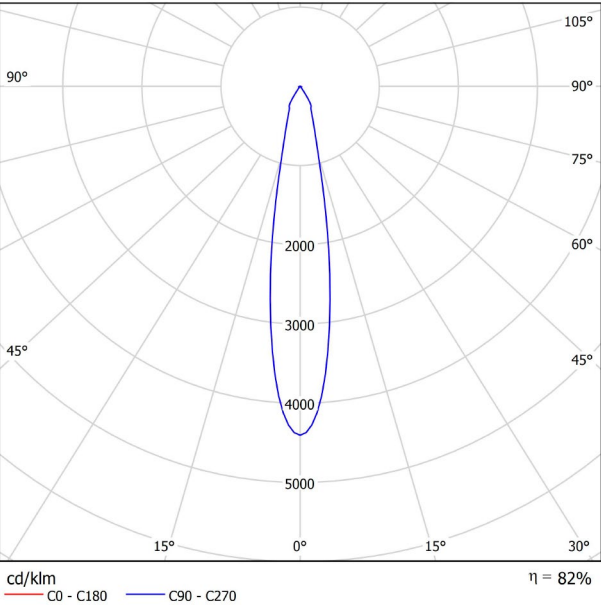

CONICAL DIAGRAM

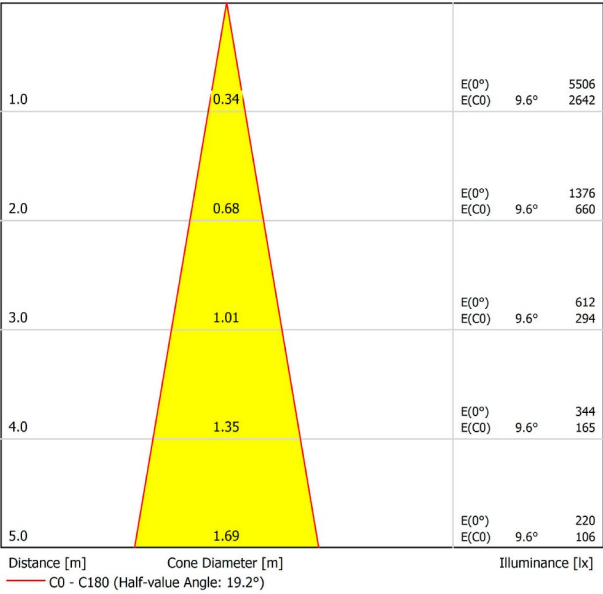




PRODUCT	
Model	Anti-glare Honeycomb Louver
Reference	A381-00-00
Category	Accessories
NOT SOLD SEPARATELY.	



Accessory made up of louver in the shape of a honeycomb panel to reduce glare and the effects of direct rays of vision.



## DIMENSIONS



## ACCESSORIES

ANTI-GLARE HONEYCOMB  
LOUVER

## PRODUCT

Name	WELLIT M TUNABLE WHITE 20° WT
Reference	A3810228WT
Color	Textured white
RAL	9016
Category	CEILING RECESSED

## LIGHTING INFORMATION

Light source	LED
Gross luminous flux	1250 Lm
Power	10,5 W
Power values of the system	10,5 W
Colour temperature	Tunable White 2700 - 5000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 3
Light beam angle	20°
Lighting efficiency	82%
Efficacy	119 Lm/W
Current intensity	600 mA
Dimming	Please Consult
Control through bluetooth	Please Consult
Driver	Included
Emergency power supply	Please Consult
Electrical insulation class	□
Voltage	230 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tj=85°C) >55.000h


## OTHER DATA

Ingress Protection	IP20
Recess measurements	Ø102 mm.
Swivel angle	25°
Rotation angle	355°
Weight	588 g.
Packaged weight	698 g.
Packaging dimensions	179 x 164 x 101 mm
Units per package	1
Materials	Aluminium / Polycarbonate





Wellit is a family of recessed luminaires, that comes in 3 sizes and can be adjusted with a rotation and tilting system. Wellit offers outstanding technical features. It is a compact product: its 3 sizes are consistent with a luminous flux level that is commensurate with its dimensions. It is also noteworthy for its efficient thermal management thanks to an excellently designed dissipation system. With Wellit, the interior designer will have great versatility in terms of applications, for general, retail and contract lighting.

POLAR DIAGRAM

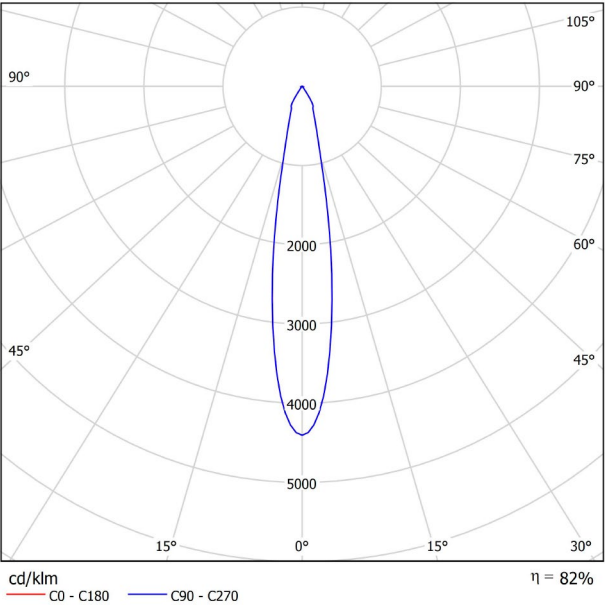

CONICAL DIAGRAM

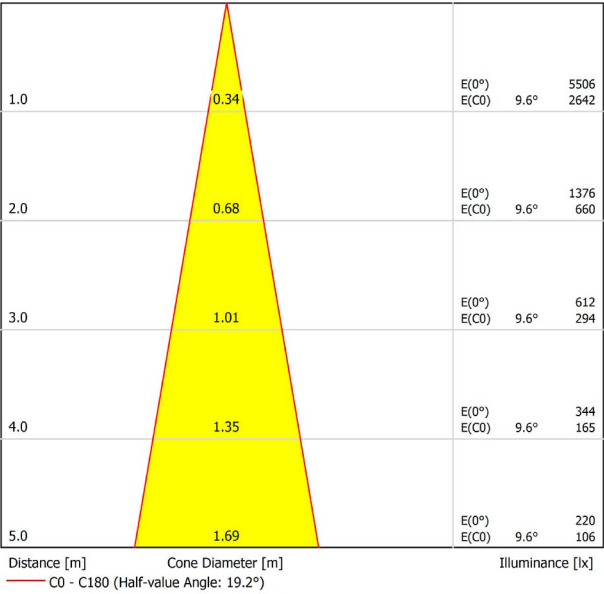



PRODUCT	
Model	Anti-glare Honeycomb Louver
Reference	A381-00-00
Category	Accessories
NOT SOLD SEPARATELY.	




Accessory made up of louver in the shape of a honeycomb panel to reduce glare and the effects of direct rays of vision.





## DIMENSIONS



## ACCESSORIES

ANTI-GLARE HONEYCOMB  
LOUVER

## PRODUCT

Name	WELLIT M TUNABLE WHITE 34° NT
Reference	A3810238NT
Color	Textured black
RAL	9005
Category	CEILING RECESSED

## LIGHTING INFORMATION

Light source	LED
Gross luminous flux	1250 Lm
Power	10,5 W
Power values of the system	10,5 W
Colour temperature	Tunable White 2700 - 5000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 3
Light beam angle	34°
Lighting efficiency	80%
Efficacy	119 Lm/W
Current intensity	600 mA
Dimming	Please Consult
Control through bluetooth	Please Consult
Driver	Included
Emergency power supply	Please Consult
Electrical insulation class	□
Voltage	230 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tj=85°C) >55.000h


## OTHER DATA

Ingress Protection	IP20
Recess measurements	Ø102 mm.
Swivel angle	25°
Rotation angle	355°
Weight	588 g.
Packaged weight	698 g.
Packaging dimensions	179 x 164 x 101 mm
Units per package	1
Materials	Aluminium / Polycarbonate





Wellit is a family of recessed luminaires, that comes in 3 sizes and can be adjusted with a rotation and tilting system. Wellit offers outstanding technical features. It is a compact product: its 3 sizes are consistent with a luminous flux level that is commensurate with its dimensions. It is also noteworthy for its efficient thermal management thanks to an excellently designed dissipation system. With Wellit, the interior designer will have great versatility in terms of applications, for general, retail and contract lighting.

POLAR DIAGRAM

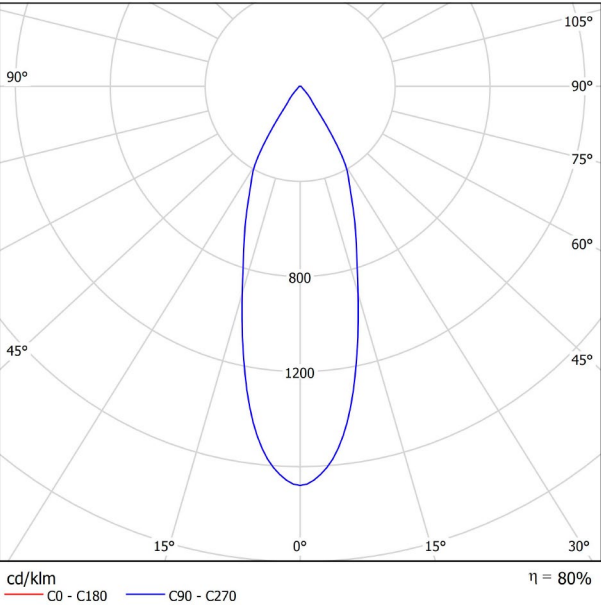

CONICAL DIAGRAM

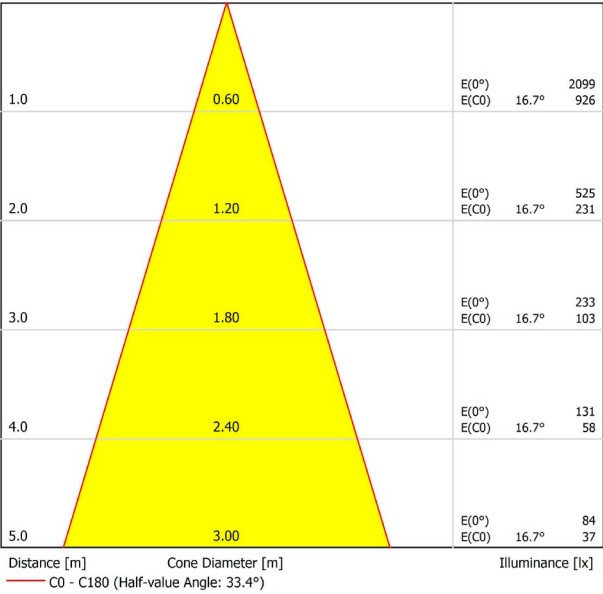




	PRODUCT
Model	Anti-glare Honeycomb Louver
Reference	A381-00-00
Category	Accessories
	NOT SOLD SEPARATELY.



Accessory made up of louver in the shape of a honeycomb panel to reduce glare and the effects of direct rays of vision.



## DIMENSIONS



## ACCESSORIES

ANTI-GLARE HONEYCOMB  
LOUVER

## PRODUCT

Name	WELLIT M TUNABLE WHITE 34° WT
Reference	A3810238WT
Color	Textured white
RAL	9016
Category	CEILING RECESSED

## LIGHTING INFORMATION

Light source	LED
Gross luminous flux	1250 Lm
Power	10,5 W
Power values of the system	10,5 W
Colour temperature	Tunable White 2700 - 5000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 3
Light beam angle	34°
Lighting efficiency	80%
Efficacy	119 Lm/W
Current intensity	600 mA
Dimming	Please Consult
Control through bluetooth	Please Consult
Driver	Included
Emergency power supply	Please Consult
Electrical insulation class	□
Voltage	230 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tj=85°C) >55.000h


## OTHER DATA

Ingress Protection	IP20
Recess measurements	Ø102 mm.
Swivel angle	25°
Rotation angle	355°
Weight	588 g.
Packaged weight	698 g.
Packaging dimensions	179 x 164 x 101 mm
Units per package	1
Materials	Aluminium / Polycarbonate





Wellit is a family of recessed luminaires, that comes in 3 sizes and can be adjusted with a rotation and tilting system. Wellit offers outstanding technical features. It is a compact product: its 3 sizes are consistent with a luminous flux level that is commensurate with its dimensions. It is also noteworthy for its efficient thermal management thanks to an excellently designed dissipation system. With Wellit, the interior designer will have great versatility in terms of applications, for general, retail and contract lighting.

POLAR DIAGRAM

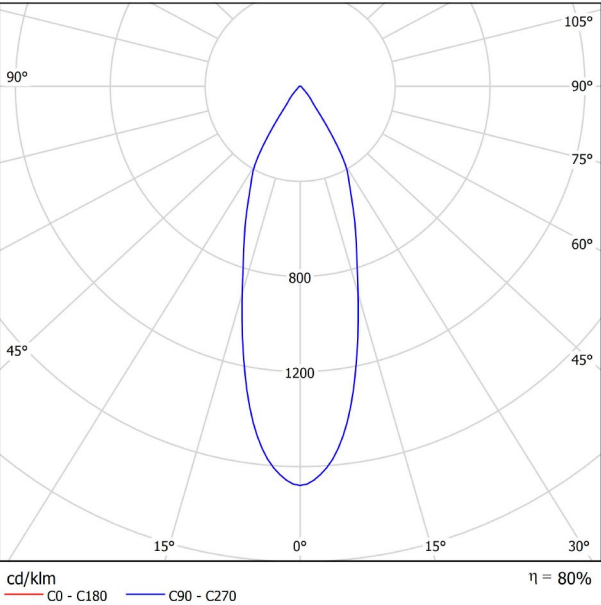

CONICAL DIAGRAM

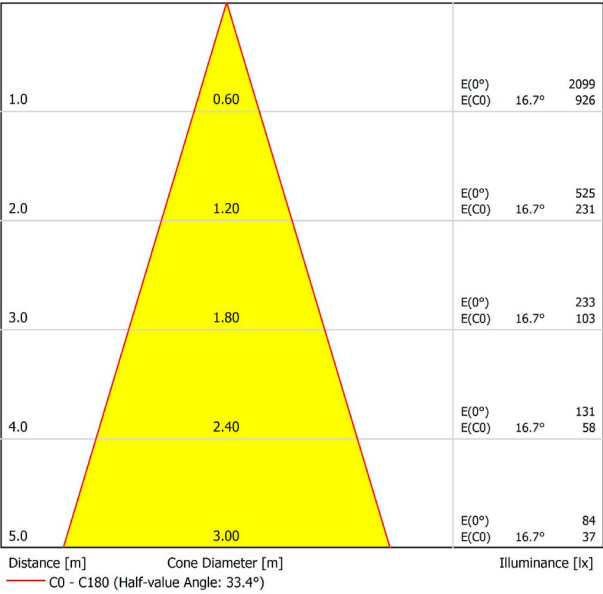




PRODUCT	
Model	Anti-glare Honeycomb Louver
Reference	A381-00-00
Category	Accessories
NOT SOLD SEPARATELY.	



Accessory made up of louver in the shape of a honeycomb panel to reduce glare and the effects of direct rays of vision.



## DIMENSIONS



## ACCESSORIES

ANTI-GLARE HONEYCOMB  
LOUVER

## PRODUCT

Name	WELLIT M 1 19° 3000K NT
Reference	A3811111NT
Color	Textured black
RAL	9005
Category	CEILING RECESSED

## LIGHTING INFORMATION

Light source	LED
Gross luminous flux	1190 Lm
Power	8 W
Power values of the system	8 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	19°
Lighting efficiency	81%
Efficacy	149 Lm/W
Current intensity	250 mA
Control through bluetooth	Please Consult
Driver	Included
Emergency power supply	Please Consult
Electrical insulation class	<input type="checkbox"/>
Voltage	230 V
Frequency	50/60 Hz
Energy efficiency	A++
LED lifespan	L80B10 (Tj=85°C) >60.000h


## OTHER DATA

Ingress Protection	IP20
Recess measurements	Ø102 mm.
Swivel angle	25°
Rotation angle	355°
Weight	498 g.
Packaged weight	608 g.
Packaging dimensions	179 x 164 x 101 mm
Units per package	1
Materials	Aluminium / Polycarbonate




Wellit is a family of recessed luminaires, that comes in 3 sizes and can be adjusted with a rotation and tilting system. Wellit offers outstanding technical features. It is a compact product: its 3 sizes are consistent with a luminous flux level that is commensurate with its dimensions. It is also noteworthy for its efficient thermal management thanks to an excellently designed dissipation system. With Wellit, the interior designer will have great versatility in terms of applications, for general, retail and contract lighting.


POLAR DIAGRAM

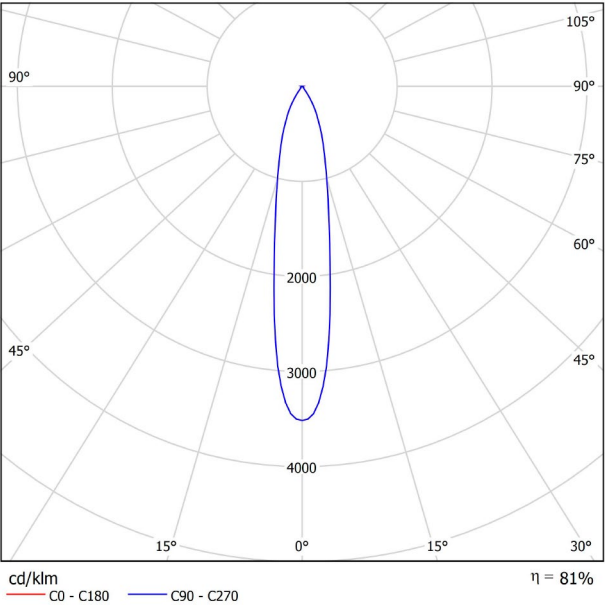

CONICAL DIAGRAM

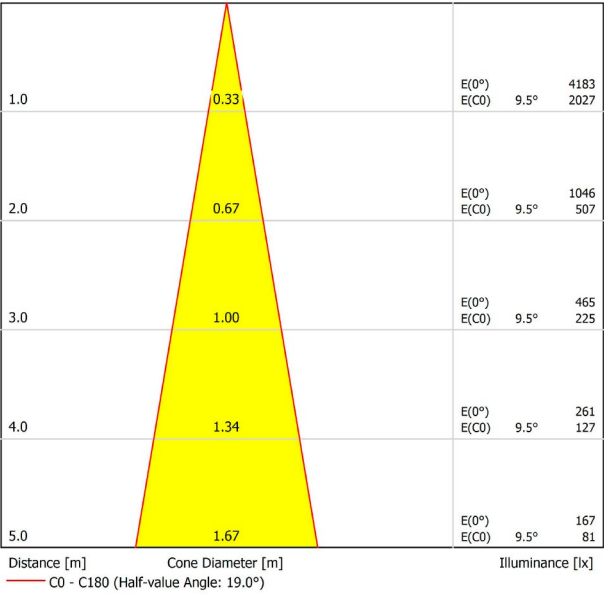





PRODUCT	
Model	Anti-glare Honeycomb Louver
Reference	A381-00-00
Category	Accessories


NOT SOLD SEPARATELY.



Accessory made up of louver in the shape of a honeycomb panel to reduce glare and the effects of direct rays of vision.



## DIMENSIONS



## ACCESSORIES

ANTI-GLARE HONEYCOMB  
LOUVER

## PRODUCT

Name	WELLIT M 1 19° 3000K WT
Reference	A3811111WT
Color	Textured white
RAL	9016
Category	CEILING RECESSED

## LIGHTING INFORMATION

Light source	LED
Gross luminous flux	1190 Lm
Power	8 W
Power values of the system	8 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	19°
Lighting efficiency	81%
Efficacy	149 Lm/W
Current intensity	250 mA
Control through bluetooth	Please Consult
Driver	Included
Emergency power supply	Please Consult
Electrical insulation class	<input type="checkbox"/>
Voltage	230 V
Frequency	50/60 Hz
Energy efficiency	A++
LED lifespan	L80B10 (Tj=85°C) >60.000h


## OTHER DATA

Ingress Protection	IP20
Recess measurements	Ø102 mm.
Swivel angle	25°
Rotation angle	355°
Weight	498 g.
Packaged weight	608 g.
Packaging dimensions	179 x 164 x 101 mm
Units per package	1
Materials	Aluminium / Polycarbonate





Wellit is a family of recessed luminaires, that comes in 3 sizes and can be adjusted with a rotation and tilting system. Wellit offers outstanding technical features. It is a compact product: its 3 sizes are consistent with a luminous flux level that is commensurate with its dimensions. It is also noteworthy for its efficient thermal management thanks to an excellently designed dissipation system. With Wellit, the interior designer will have great versatility in terms of applications, for general, retail and contract lighting.

POLAR DIAGRAM

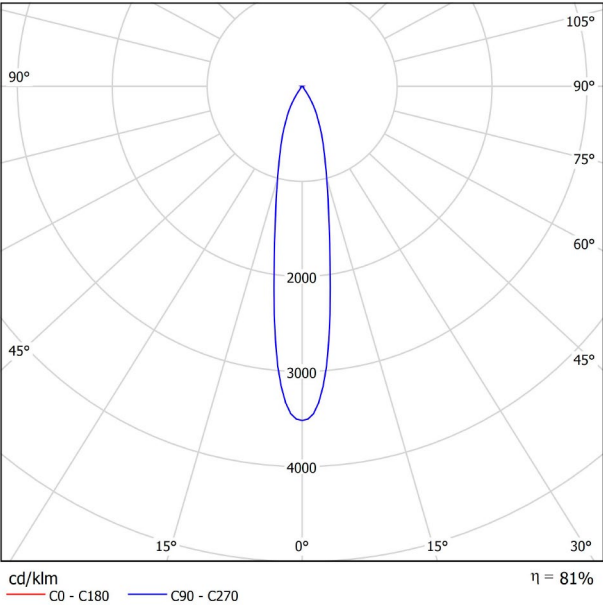

CONICAL DIAGRAM

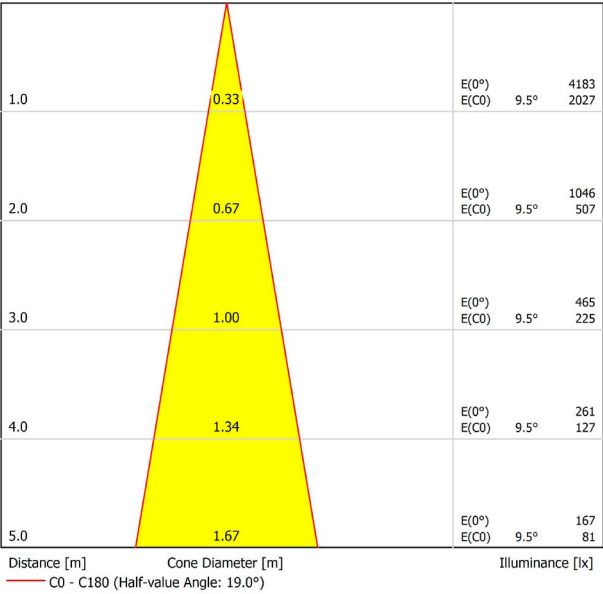



	PRODUCT
Model	Anti-glare Honeycomb Louver
Reference	A381-00-00
Category	Accessories


NOT SOLD SEPARATELY.



Accessory made up of louver in the shape of a honeycomb panel to reduce glare and the effects of direct rays of vision.



## DIMENSIONS



## ACCESSORIES

ANTI-GLARE HONEYCOMB  
LOUVER

## PRODUCT

Name	WELLIT M 1 19° 4000K NT
Reference	A3811112NT
Color	Textured black
RAL	9005
Category	CEILING RECESSED

## LIGHTING INFORMATION

Light source	LED
Gross luminous flux	1210 Lm
Power	8 W
Power values of the system	8 W
Colour temperature	4000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	19°
Lighting efficiency	81%
Efficacy	151 Lm/W
Current intensity	250 mA
Control through bluetooth	Please Consult
Driver	Included
Emergency power supply	Please Consult
Electrical insulation class	<input type="checkbox"/>
Voltage	230 V
Frequency	50/60 Hz
Energy efficiency	A++
LED lifespan	L80B10 (Tj=85°C) >60.000h


## OTHER DATA

Ingress Protection	IP20
Recess measurements	Ø102 mm.
Swivel angle	25°
Rotation angle	355°
Weight	498 g.
Packaged weight	608 g.
Packaging dimensions	179 x 164 x 101 mm
Units per package	1
Materials	Aluminium / Polycarbonate





Wellit is a family of recessed luminaires, that comes in 3 sizes and can be adjusted with a rotation and tilting system. Wellit offers outstanding technical features. It is a compact product: its 3 sizes are consistent with a luminous flux level that is commensurate with its dimensions. It is also noteworthy for its efficient thermal management thanks to an excellently designed dissipation system. With Wellit, the interior designer will have great versatility in terms of applications, for general, retail and contract lighting.

POLAR DIAGRAM

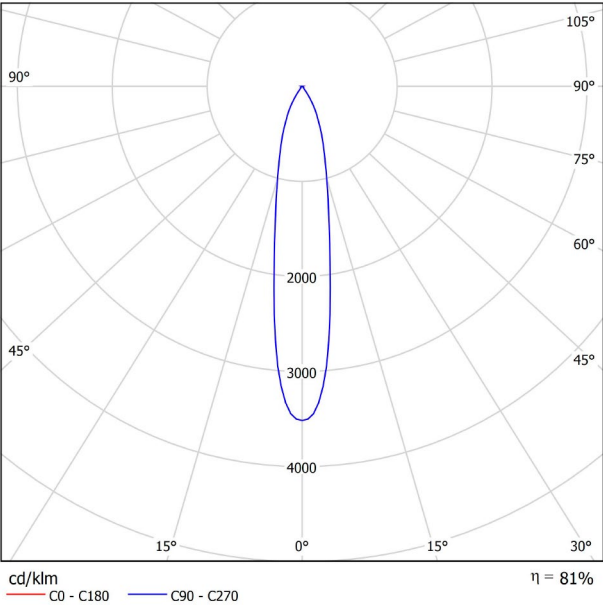

CONICAL DIAGRAM

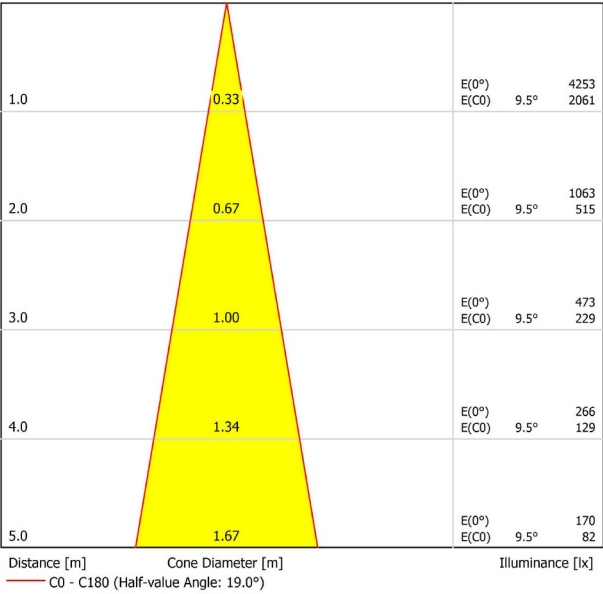



PRODUCT	
Model	Anti-glare Honeycomb Louver
Reference	A381-00-00
Category	Accessories


NOT SOLD SEPARATELY.



Accessory made up of louver in the shape of a honeycomb panel to reduce glare and the effects of direct rays of vision.



## DIMENSIONS



## ACCESSORIES

ANTI-GLARE HONEYCOMB  
LOUVER

## PRODUCT

Name	WELLIT M 1 19° 4000K WT
Reference	A3811112WT
Color	Textured white
RAL	9016
Category	CEILING RECESSED

## LIGHTING INFORMATION

Light source	LED
Gross luminous flux	1210 Lm
Power	8 W
Power values of the system	8 W
Colour temperature	4000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	19°
Lighting efficiency	81%
Efficacy	151 Lm/W
Current intensity	250 mA
Control through bluetooth	Please Consult
Driver	Included
Emergency power supply	Please Consult
Electrical insulation class	<input type="checkbox"/>
Voltage	230 V
Frequency	50/60 Hz
Energy efficiency	A++
LED lifespan	L80B10 (Tj=85°C) >60.000h

## OTHER DATA


Ingress Protection	IP20
Recess measurements	Ø102 mm.
Swivel angle	25°
Rotation angle	355°
Weight	498 g.
Packaged weight	608 g.
Packaging dimensions	179 x 164 x 101 mm
Units per package	1
Materials	Aluminium / Polycarbonate




Wellit is a family of recessed luminaires, that comes in 3 sizes and can be adjusted with a rotation and tilting system. Wellit offers outstanding technical features. It is a compact product: its 3 sizes are consistent with a luminous flux level that is commensurate with its dimensions. It is also noteworthy for its efficient thermal management thanks to an excellently designed dissipation system. With Wellit, the interior designer will have great versatility in terms of applications, for general, retail and contract lighting.




POLAR DIAGRAM

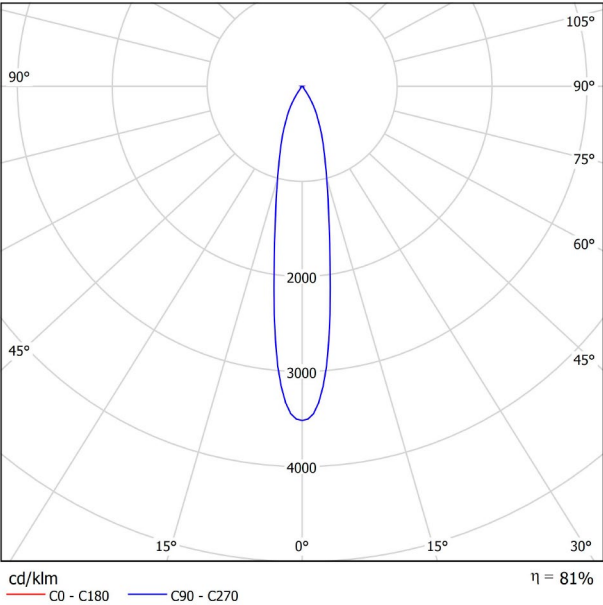

CONICAL DIAGRAM

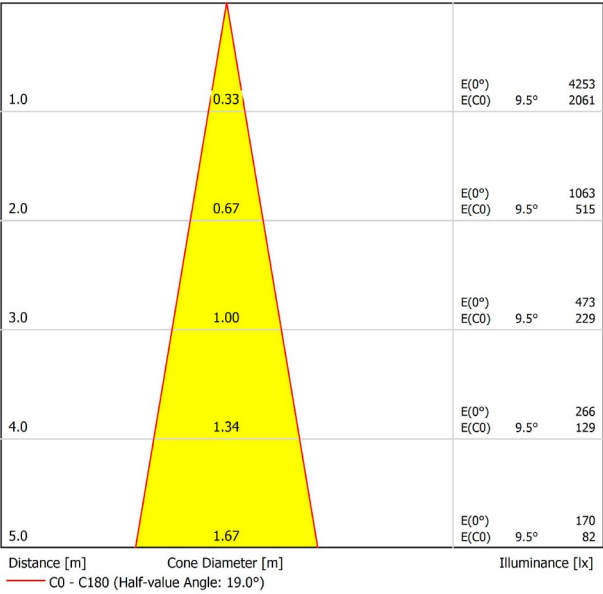



PRODUCT	
Model	Anti-glare Honeycomb Louver
Reference	A381-00-00
Category	Accessories


NOT SOLD SEPARATELY.



Accessory made up of louver in the shape of a honeycomb panel to reduce glare and the effects of direct rays of vision.



## DIMENSIONS



## ACCESSORIES

ANTI-GLARE HONEYCOMB  
LOUVER

## PRODUCT

Name	WELLIT M 1 24° 3000K NT
Reference	A3811121NT
Color	Textured black
RAL	9005
Category	CEILING RECESSED

## LIGHTING INFORMATION

Light source	LED
Gross luminous flux	1190 Lm
Power	8 W
Power values of the system	8 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	24°
Lighting efficiency	83%
Efficacy	149 Lm/W
Current intensity	250 mA
Control through bluetooth	Please Consult
Driver	Included
Emergency power supply	Please Consult
Electrical insulation class	<input type="checkbox"/>
Voltage	230 V
Frequency	50/60 Hz
Energy efficiency	A++
LED lifespan	L80B10 (Tj=85°C) >60.000h


## OTHER DATA

Ingress Protection	IP20
Recess measurements	Ø102 mm.
Swivel angle	25°
Rotation angle	355°
Weight	498 g.
Packaged weight	608 g.
Packaging dimensions	179 x 164 x 101 mm
Units per package	1
Materials	Aluminium / Polycarbonate





Wellit is a family of recessed luminaires, that comes in 3 sizes and can be adjusted with a rotation and tilting system. Wellit offers outstanding technical features. It is a compact product: its 3 sizes are consistent with a luminous flux level that is commensurate with its dimensions. It is also noteworthy for its efficient thermal management thanks to an excellently designed dissipation system. With Wellit, the interior designer will have great versatility in terms of applications, for general, retail and contract lighting.

POLAR DIAGRAM

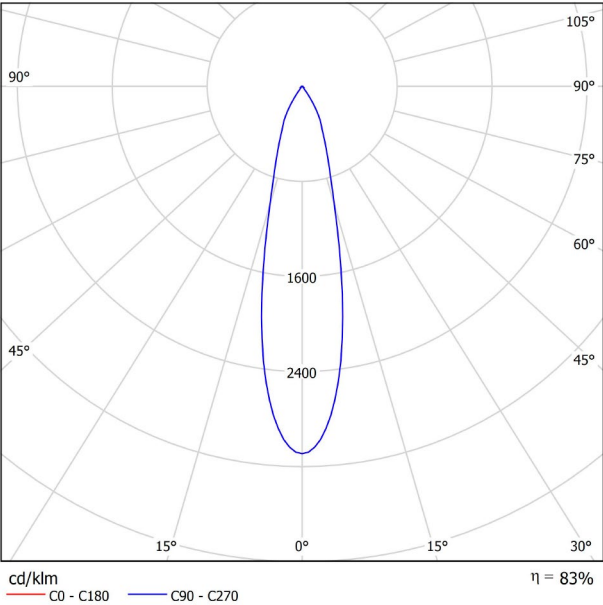

CONICAL DIAGRAM

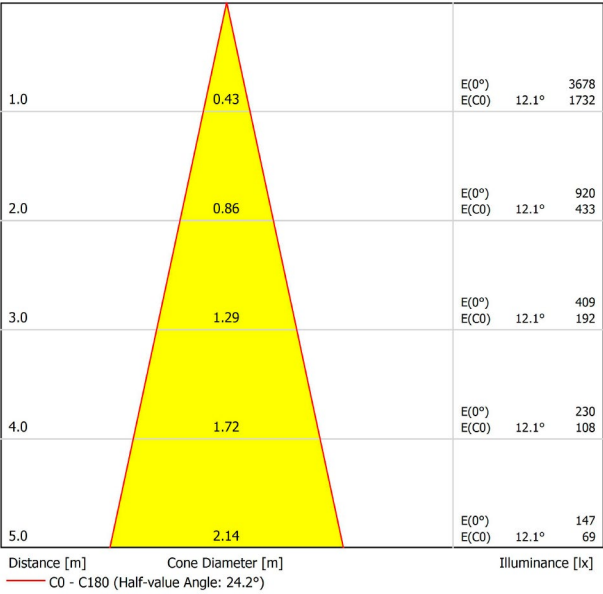



PRODUCT	
Model	Anti-glare Honeycomb Louver
Reference	A381-00-00
Category	Accessories


NOT SOLD SEPARATELY.



Accessory made up of louver in the shape of a honeycomb panel to reduce glare and the effects of direct rays of vision.



## DIMENSIONS



## ACCESSORIES

ANTI-GLARE HONEYCOMB  
LOUVER

## PRODUCT

Name	WELLIT M 1 24° 3000K WT
Reference	A3811121WT
Color	Textured white
RAL	9016
Category	CEILING RECESSED

## LIGHTING INFORMATION

Light source	LED
Gross luminous flux	1190 Lm
Power	8 W
Power values of the system	8 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	24°
Lighting efficiency	83%
Efficacy	149 Lm/W
Current intensity	250 mA
Control through bluetooth	Please Consult
Driver	Included
Emergency power supply	Please Consult
Electrical insulation class	<input type="checkbox"/>
Voltage	230 V
Frequency	50/60 Hz
Energy efficiency	A++
LED lifespan	L80B10 (Tj=85°C) >60.000h


## OTHER DATA

Ingress Protection	IP20
Recess measurements	Ø102 mm.
Swivel angle	25°
Rotation angle	355°
Weight	498 g.
Packaged weight	608 g.
Packaging dimensions	179 x 164 x 101 mm
Units per package	1
Materials	Aluminium / Polycarbonate





Wellit is a family of recessed luminaires, that comes in 3 sizes and can be adjusted with a rotation and tilting system. Wellit offers outstanding technical features. It is a compact product: its 3 sizes are consistent with a luminous flux level that is commensurate with its dimensions. It is also noteworthy for its efficient thermal management thanks to an excellently designed dissipation system. With Wellit, the interior designer will have great versatility in terms of applications, for general, retail and contract lighting.

POLAR DIAGRAM

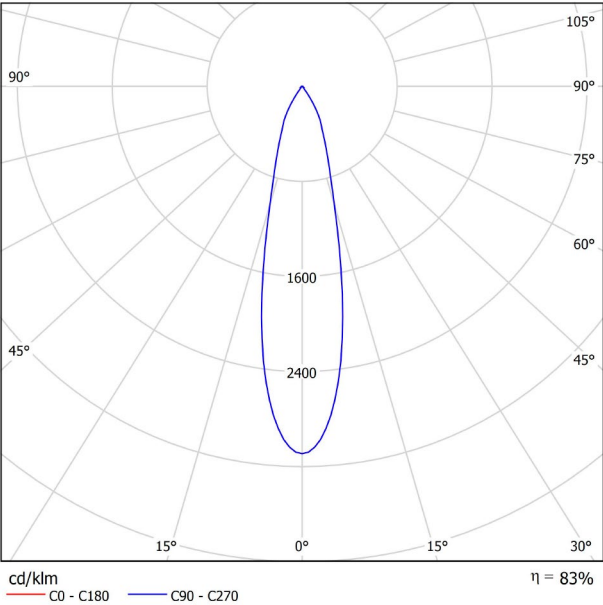

CONICAL DIAGRAM

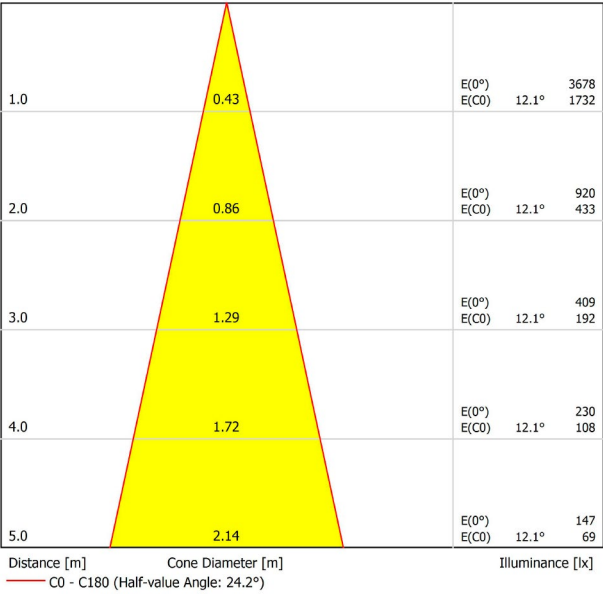



PRODUCT	
Model	Anti-glare Honeycomb Louver
Reference	A381-00-00
Category	Accessories
NOT SOLD SEPARATELY.	




Accessory made up of louver in the shape of a honeycomb panel to reduce glare and the effects of direct rays of vision.





## DIMENSIONS



## ACCESSORIES

ANTI-GLARE HONEYCOMB  
LOUVER

## PRODUCT

Name	WELLIT M 1 24° 4000K NT
Reference	A3811122NT
Color	Textured black
RAL	9005
Category	CEILING RECESSED

## LIGHTING INFORMATION

Light source	LED
Gross luminous flux	1210 Lm
Power	8 W
Power values of the system	8 W
Colour temperature	4000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	24°
Lighting efficiency	83%
Efficacy	151 Lm/W
Current intensity	250 mA
Control through bluetooth	Please Consult
Driver	Included
Emergency power supply	Please Consult
Electrical insulation class	<input type="checkbox"/>
Voltage	230 V
Frequency	50/60 Hz
Energy efficiency	A++
LED lifespan	L80B10 (Tj=85°C) >60.000h


## OTHER DATA

Ingress Protection	IP20
Recess measurements	Ø102 mm.
Swivel angle	25°
Rotation angle	355°
Weight	498 g.
Packaged weight	608 g.
Packaging dimensions	179 x 164 x 101 mm
Units per package	1
Materials	Aluminium / Polycarbonate





Wellit is a family of recessed luminaires, that comes in 3 sizes and can be adjusted with a rotation and tilting system. Wellit offers outstanding technical features. It is a compact product: its 3 sizes are consistent with a luminous flux level that is commensurate with its dimensions. It is also noteworthy for its efficient thermal management thanks to an excellently designed dissipation system. With Wellit, the interior designer will have great versatility in terms of applications, for general, retail and contract lighting.

POLAR DIAGRAM

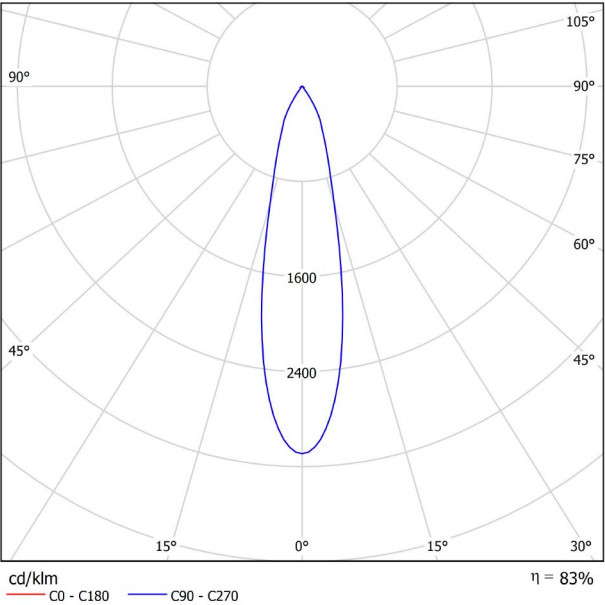

CONICAL DIAGRAM

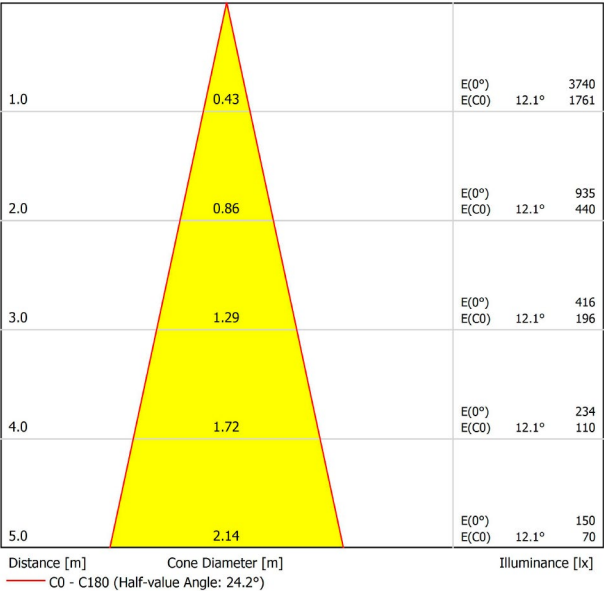



PRODUCT	
Model	Anti-glare Honeycomb Louver
Reference	A381-00-00
Category	Accessories


NOT SOLD SEPARATELY.



Accessory made up of louver in the shape of a honeycomb panel to reduce glare and the effects of direct rays of vision.



## DIMENSIONS



## ACCESSORIES

ANTI-GLARE HONEYCOMB  
LOUVER

## PRODUCT

Name	WELLIT M 1 24° 4000K WT
Reference	A3811122WT
Color	Textured white
RAL	9016
Category	CEILING RECESSED

## LIGHTING INFORMATION

Light source	LED
Gross luminous flux	1210 Lm
Power	8 W
Power values of the system	8 W
Colour temperature	4000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	24°
Lighting efficiency	83%
Efficacy	151 Lm/W
Current intensity	250 mA
Control through bluetooth	Please Consult
Driver	Included
Emergency power supply	Please Consult
Electrical insulation class	□
Voltage	230 V
Frequency	50/60 Hz
Energy efficiency	A++
LED lifespan	L80B10 (Tj=85°C) >60.000h


## OTHER DATA

Ingress Protection	IP20
Recess measurements	Ø102 mm.
Swivel angle	25°
Rotation angle	355°
Weight	498 g.
Packaged weight	608 g.
Packaging dimensions	179 x 164 x 101 mm
Units per package	1
Materials	Aluminium / Polycarbonate





Wellit is a family of recessed luminaires, that comes in 3 sizes and can be adjusted with a rotation and tilting system. Wellit offers outstanding technical features. It is a compact product: its 3 sizes are consistent with a luminous flux level that is commensurate with its dimensions. It is also noteworthy for its efficient thermal management thanks to an excellently designed dissipation system. With Wellit, the interior designer will have great versatility in terms of applications, for general, retail and contract lighting.

POLAR DIAGRAM

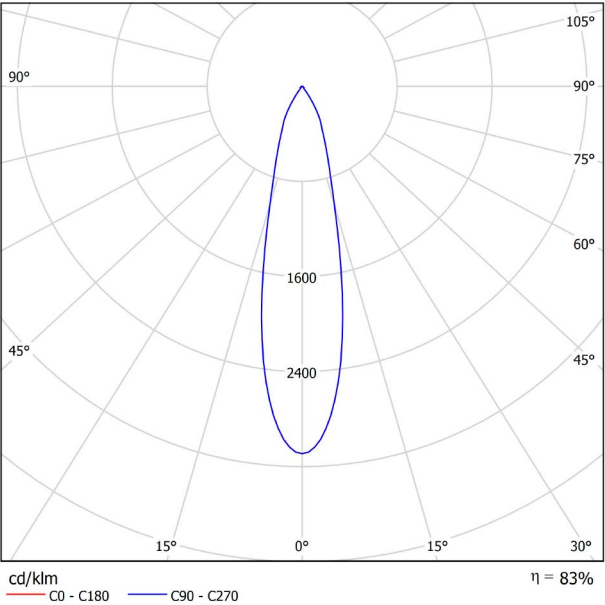

CONICAL DIAGRAM

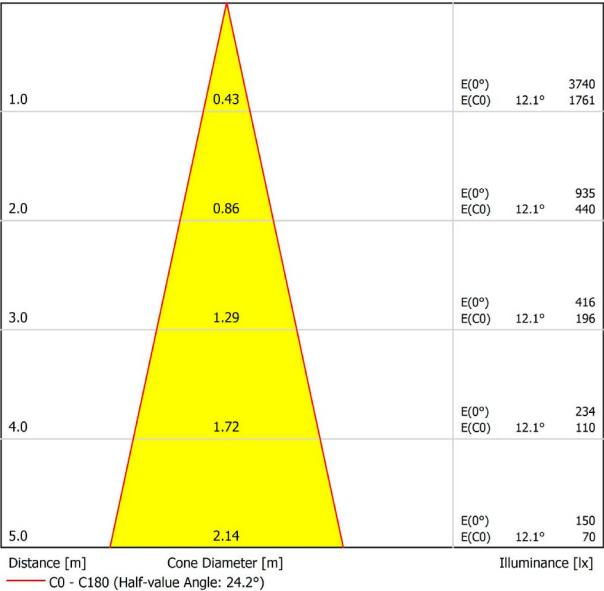




PRODUCT	
Model	Anti-glare Honeycomb Louver
Reference	A381-00-00
Category	Accessories
NOT SOLD SEPARATELY.	



Accessory made up of louver in the shape of a honeycomb panel to reduce glare and the effects of direct rays of vision.



## DIMENSIONS



## ACCESSORIES

ANTI-GLARE HONEYCOMB  
LOUVER

## PRODUCT

Name	WELLIT M 1 39° 3000K NT
Reference	A3811131NT
Color	Textured black
RAL	9005
Category	CEILING RECESSED

## LIGHTING INFORMATION

Light source	LED
Gross luminous flux	1190 Lm
Power	8 W
Power values of the system	8 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	39°
Lighting efficiency	83%
Efficacy	149 Lm/W
Current intensity	250 mA
Control through bluetooth	Please Consult
Driver	Included
Emergency power supply	Please Consult
Electrical insulation class	<input type="checkbox"/>
Voltage	230 V
Frequency	50/60 Hz
Energy efficiency	A++
LED lifespan	L80B10 (Tj=85°C) >60.000h


## OTHER DATA

Ingress Protection	IP20
Recess measurements	Ø102 mm.
Swivel angle	25°
Rotation angle	355°
Weight	498 g.
Packaged weight	608 g.
Packaging dimensions	179 x 164 x 101 mm
Units per package	1
Materials	Aluminium / Polycarbonate




Wellit is a family of recessed luminaires, that comes in 3 sizes and can be adjusted with a rotation and tilting system. Wellit offers outstanding technical features. It is a compact product: its 3 sizes are consistent with a luminous flux level that is commensurate with its dimensions. It is also noteworthy for its efficient thermal management thanks to an excellently designed dissipation system. With Wellit, the interior designer will have great versatility in terms of applications, for general, retail and contract lighting.


POLAR DIAGRAM

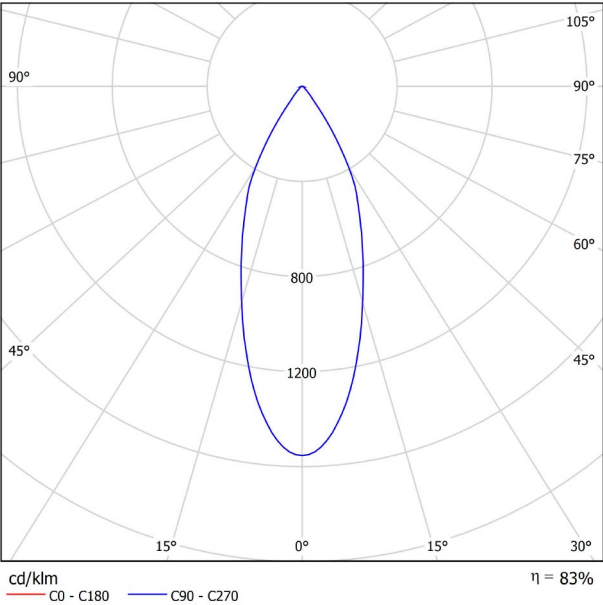

CONICAL DIAGRAM

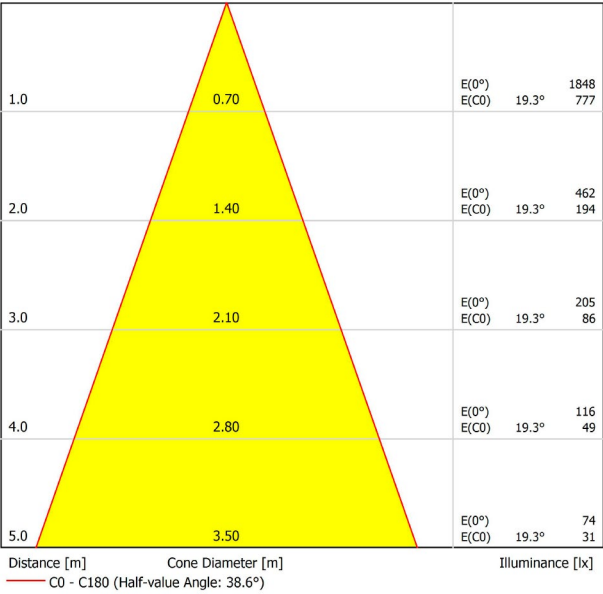






PRODUCT	
Model	Anti-glare Honeycomb Louver
Reference	A381-00-00
Category	Accessories
NOT SOLD SEPARATELY.	



Accessory made up of louver in the shape of a honeycomb panel to reduce glare and the effects of direct rays of vision.



## DIMENSIONS



## ACCESSORIES

ANTI-GLARE HONEYCOMB  
LOUVER

## PRODUCT

Name	WELLIT M 1 39° 3000K WT
Reference	A3811131WT
Color	Textured white
RAL	9016
Category	CEILING RECESSED

## LIGHTING INFORMATION

Light source	LED
Gross luminous flux	1190 Lm
Power	8 W
Power values of the system	8 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	39°
Lighting efficiency	83%
Efficacy	149 Lm/W
Current intensity	250 mA
Control through bluetooth	Please Consult
Driver	Included
Emergency power supply	Please Consult
Electrical insulation class	□
Voltage	230 V
Frequency	50/60 Hz
Energy efficiency	A++
LED lifespan	L80B10 (Tj=85°C) >60.000h


## OTHER DATA

Ingress Protection	IP20
Recess measurements	Ø102 mm.
Swivel angle	25°
Rotation angle	355°
Weight	498 g.
Packaged weight	608 g.
Packaging dimensions	179 x 164 x 101 mm
Units per package	1
Materials	Aluminium / Polycarbonate





Wellit is a family of recessed luminaires, that comes in 3 sizes and can be adjusted with a rotation and tilting system. Wellit offers outstanding technical features. It is a compact product: its 3 sizes are consistent with a luminous flux level that is commensurate with its dimensions. It is also noteworthy for its efficient thermal management thanks to an excellently designed dissipation system. With Wellit, the interior designer will have great versatility in terms of applications, for general, retail and contract lighting.

POLAR DIAGRAM

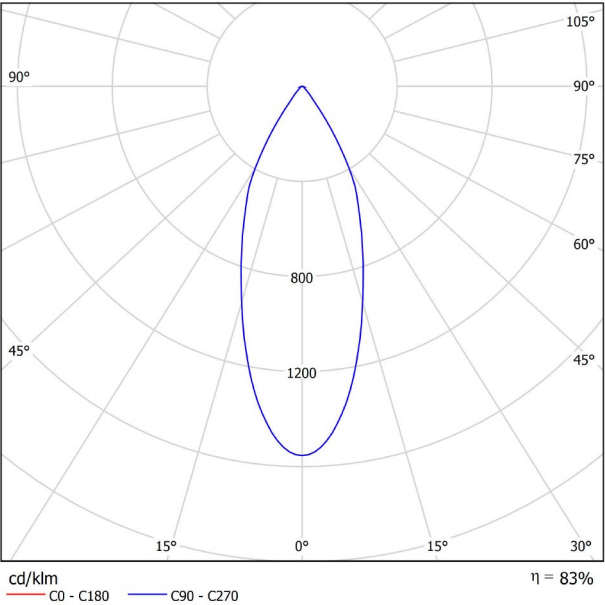

CONICAL DIAGRAM

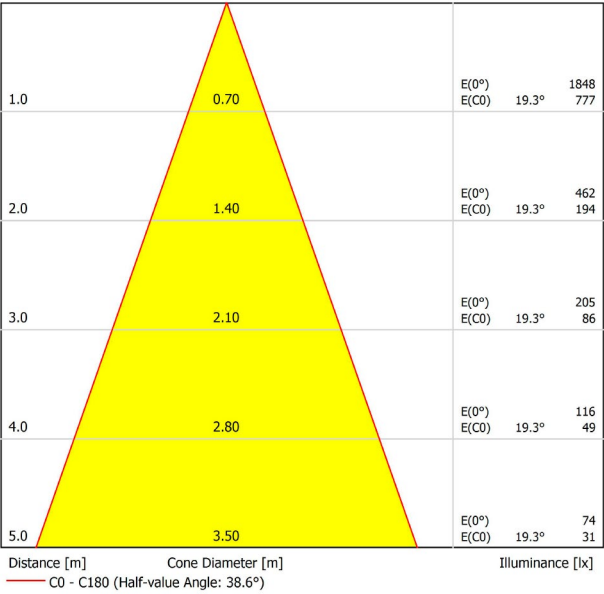



PRODUCT	
Model	Anti-glare Honeycomb Louver
Reference	A381-00-00
Category	Accessories


NOT SOLD SEPARATELY.



Accessory made up of louver in the shape of a honeycomb panel to reduce glare and the effects of direct rays of vision.



## DIMENSIONS



## ACCESSORIES

ANTI-GLARE HONEYCOMB  
LOUVER

## PRODUCT

Name	WELLIT M 1 39° 4000K NT
Reference	A3811132NT
Color	Textured black
RAL	9005
Category	CEILING RECESSED

## LIGHTING INFORMATION

Light source	LED
Gross luminous flux	1210 Lm
Power	8 W
Power values of the system	8 W
Colour temperature	4000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	39°
Lighting efficiency	83%
Efficacy	151 Lm/W
Current intensity	250 mA
Control through bluetooth	Please Consult
Driver	Included
Emergency power supply	Please Consult
Electrical insulation class	<input type="checkbox"/>
Voltage	230 V
Frequency	50/60 Hz
Energy efficiency	A++
LED lifespan	L80B10 (Tj=85°C) >60.000h


## OTHER DATA

Ingress Protection	IP20
Recess measurements	Ø102 mm.
Swivel angle	25°
Rotation angle	355°
Weight	498 g.
Packaged weight	608 g.
Packaging dimensions	179 x 164 x 101 mm
Units per package	1
Materials	Aluminium / Polycarbonate





Wellit is a family of recessed luminaires, that comes in 3 sizes and can be adjusted with a rotation and tilting system. Wellit offers outstanding technical features. It is a compact product: its 3 sizes are consistent with a luminous flux level that is commensurate with its dimensions. It is also noteworthy for its efficient thermal management thanks to an excellently designed dissipation system. With Wellit, the interior designer will have great versatility in terms of applications, for general, retail and contract lighting.

POLAR DIAGRAM

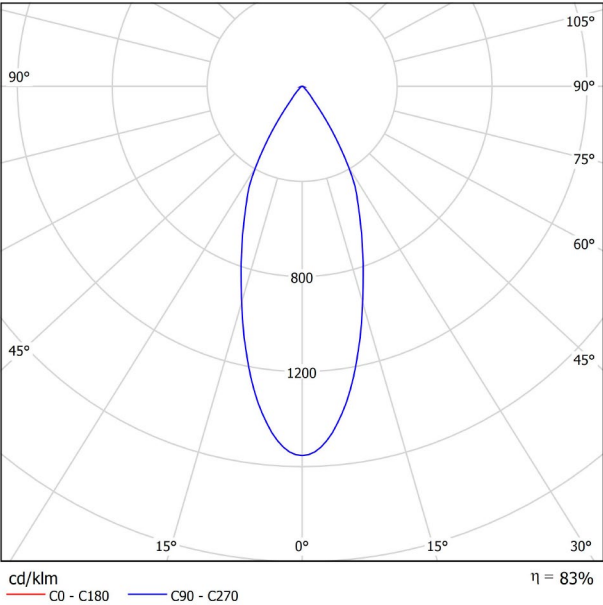

CONICAL DIAGRAM

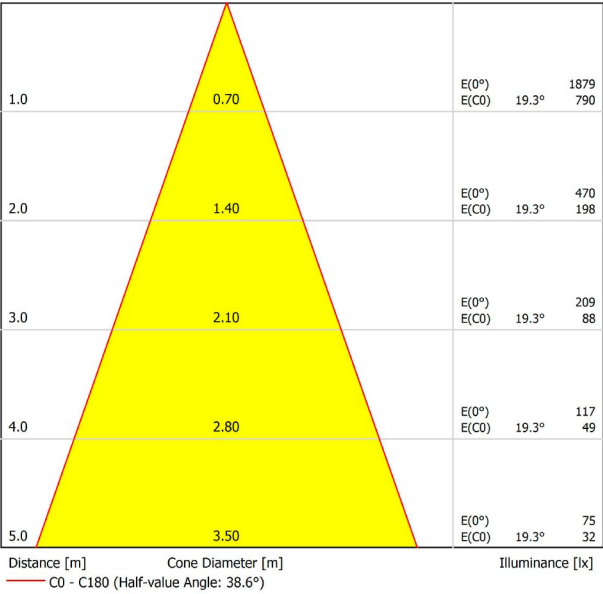




PRODUCT	
Model	Anti-glare Honeycomb Louver
Reference	A381-00-00
Category	Accessories
NOT SOLD SEPARATELY.	



Accessory made up of louver in the shape of a honeycomb panel to reduce glare and the effects of direct rays of vision.



## DIMENSIONS



## ACCESSORIES

ANTI-GLARE HONEYCOMB  
LOUVER

## PRODUCT

Name	WELLIT M 1 39° 4000K WT
Reference	A3811132WT
Color	Textured white
RAL	9016
Category	CEILING RECESSED

## LIGHTING INFORMATION

Light source	LED
Gross luminous flux	1210 Lm
Power	8 W
Power values of the system	8 W
Colour temperature	4000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	39°
Lighting efficiency	83%
Efficacy	151 Lm/W
Current intensity	250 mA
Control through bluetooth	Please Consult
Driver	Included
Emergency power supply	Please Consult
Electrical insulation class	<input type="checkbox"/>
Voltage	230 V
Frequency	50/60 Hz
Energy efficiency	A++
LED lifespan	L80B10 (Tj=85°C) >60.000h

## OTHER DATA


Ingress Protection	IP20
Recess measurements	Ø102 mm.
Swivel angle	25°
Rotation angle	355°
Weight	498 g.
Packaged weight	608 g.
Packaging dimensions	179 x 164 x 101 mm
Units per package	1
Materials	Aluminium / Polycarbonate




Wellit is a family of recessed luminaires, that comes in 3 sizes and can be adjusted with a rotation and tilting system. Wellit offers outstanding technical features. It is a compact product: its 3 sizes are consistent with a luminous flux level that is commensurate with its dimensions. It is also noteworthy for its efficient thermal management thanks to an excellently designed dissipation system. With Wellit, the interior designer will have great versatility in terms of applications, for general, retail and contract lighting.




POLAR DIAGRAM

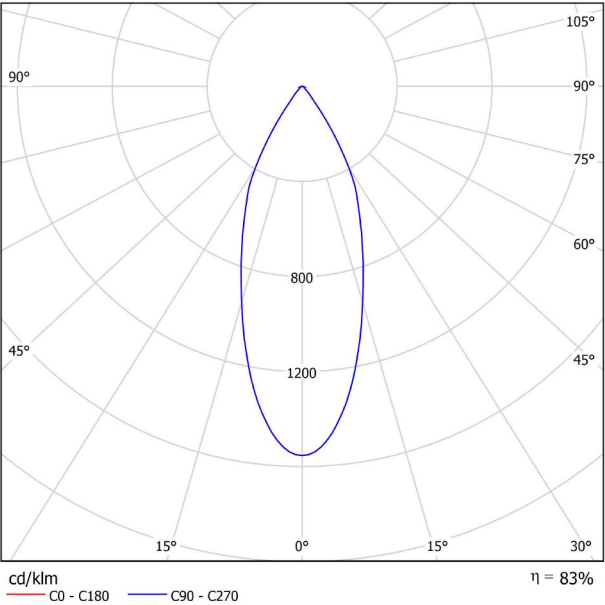

CONICAL DIAGRAM

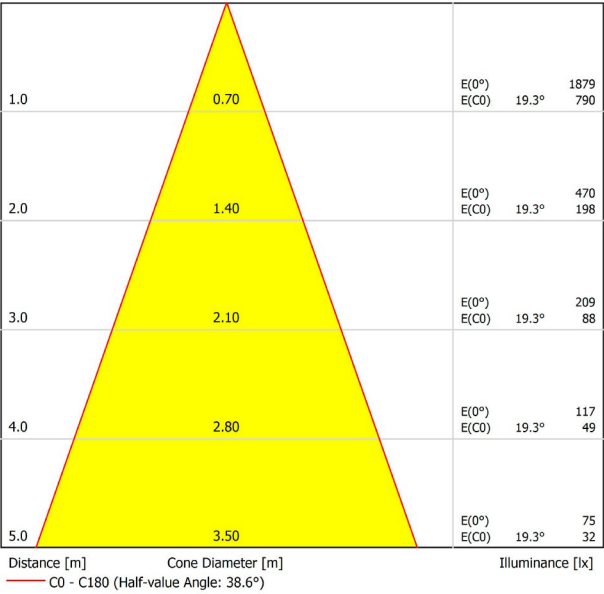



PRODUCT	
Model	Anti-glare Honeycomb Louver
Reference	A381-00-00
Category	Accessories


NOT SOLD SEPARATELY.



Accessory made up of louver in the shape of a honeycomb panel to reduce glare and the effects of direct rays of vision.



## DIMENSIONS



## ACCESSORIES

ANTI-GLARE HONEYCOMB  
LOUVER

## PRODUCT

Name	WELLIT M 2 19° 3000K NT
Reference	A3812111NT
Color	Textured black
RAL	9005
Category	CEILING RECESSED

## LIGHTING INFORMATION

Light source	LED
Gross luminous flux	1970 Lm
Power	15 W
Power values of the system	15 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	19°
Lighting efficiency	81%
Efficacy	131 Lm/W
Current intensity	450 mA
Control through bluetooth	Please Consult
Driver	Included
Emergency power supply	Please Consult
Electrical insulation class	□
Voltage	230 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tj=85°C) >60.000h


## OTHER DATA

Ingress Protection	IP20
Recess measurements	Ø102 mm.
Swivel angle	25°
Rotation angle	355°
Weight	498 g.
Packaged weight	608 g.
Packaging dimensions	179 x 164 x 101 mm
Units per package	1
Materials	Aluminium / Polycarbonate





Wellit is a family of recessed luminaires, that comes in 3 sizes and can be adjusted with a rotation and tilting system. Wellit offers outstanding technical features. It is a compact product: its 3 sizes are consistent with a luminous flux level that is commensurate with its dimensions. It is also noteworthy for its efficient thermal management thanks to an excellently designed dissipation system. With Wellit, the interior designer will have great versatility in terms of applications, for general, retail and contract lighting.

POLAR DIAGRAM

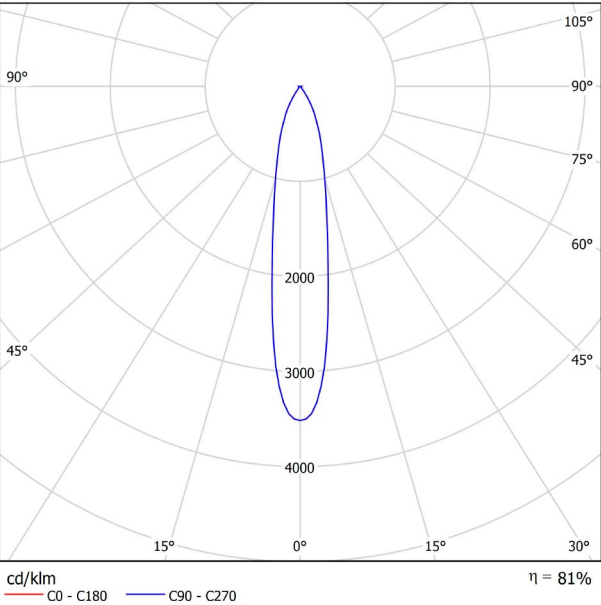

CONICAL DIAGRAM

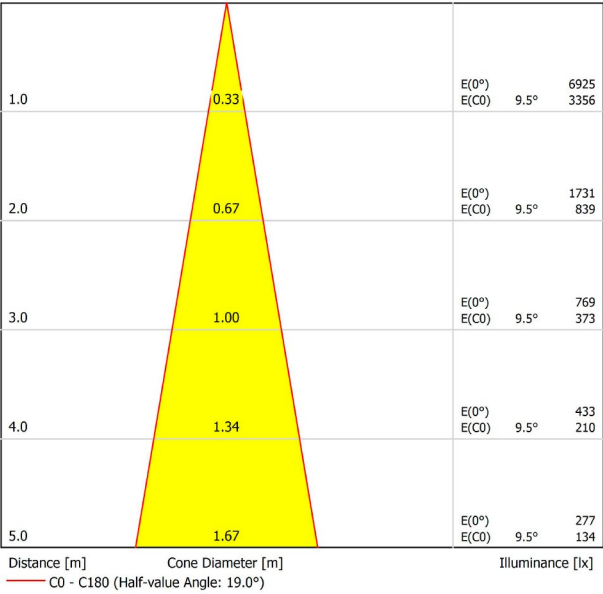




PRODUCT	
Model	Anti-glare Honeycomb Louver
Reference	A381-00-00
Category	Accessories
NOT SOLD SEPARATELY.	



Accessory made up of louver in the shape of a honeycomb panel to reduce glare and the effects of direct rays of vision.



## DIMENSIONS



## ACCESSORIES

ANTI-GLARE HONEYCOMB  
LOUVER

## PRODUCT

Name	WELLIT M 2 19° 3000K WT
Reference	A3812111WT
Color	Textured white
RAL	9016
Category	CEILING RECESSED

## LIGHTING INFORMATION

Light source	LED
Gross luminous flux	1970 Lm
Power	15 W
Power values of the system	15 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	19°
Lighting efficiency	81%
Efficacy	131 Lm/W
Current intensity	450 mA
Control through bluetooth	Please Consult
Driver	Included
Emergency power supply	Please Consult
Electrical insulation class	<input type="checkbox"/>
Voltage	230 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tj=85°C) >60.000h


## OTHER DATA

Ingress Protection	IP20
Recess measurements	Ø102 mm.
Swivel angle	25°
Rotation angle	355°
Weight	498 g.
Packaged weight	608 g.
Packaging dimensions	179 x 164 x 101 mm
Units per package	1
Materials	Aluminium / Polycarbonate





Wellit is a family of recessed luminaires, that comes in 3 sizes and can be adjusted with a rotation and tilting system. Wellit offers outstanding technical features. It is a compact product: its 3 sizes are consistent with a luminous flux level that is commensurate with its dimensions. It is also noteworthy for its efficient thermal management thanks to an excellently designed dissipation system. With Wellit, the interior designer will have great versatility in terms of applications, for general, retail and contract lighting.

POLAR DIAGRAM

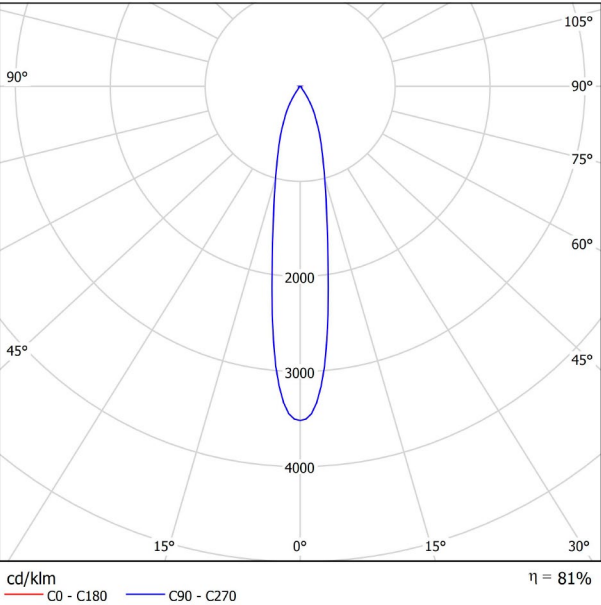

CONICAL DIAGRAM

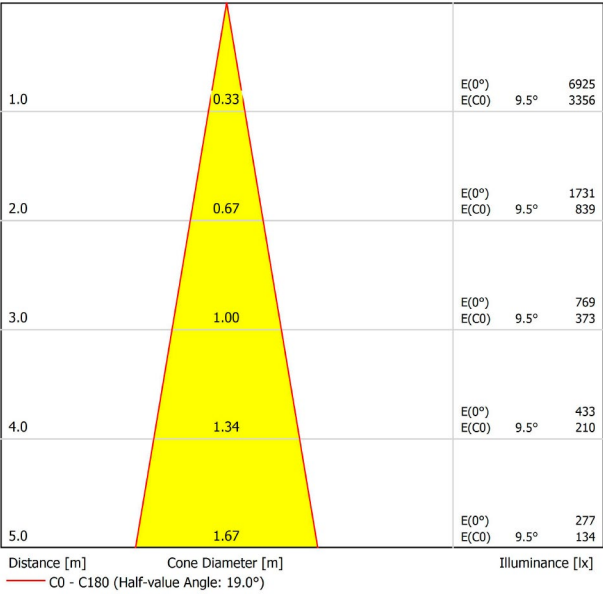



PRODUCT	
Model	Anti-glare Honeycomb Louver
Reference	A381-00-00
Category	Accessories

NOT SOLD SEPARATELY.



Accessory made up of louver in the shape of a honeycomb panel to reduce glare and the effects of direct rays of vision.