




DIMENSIONS



Name	REC DOUBLE-DOUBLE DIM 2700K NT
Reference	A3090120NT
Color	Textured black
RAL	9005
Category	WALL & FLOOR LIGHTS

PRODUCT

Light source	LED
Gross luminous flux	2 X 2075 Lm
Power	2 x 14,7 W
Power values of the system	33,41 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Lighting efficiency	76%
Efficacy	141 Lm/W
Current intensity	2 X 450 mA
Dimming	DALI / Push
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


Ingress Protection	IP20
Weight	2095 g.
Packaged weight	2220 g.
Packaging dimensions	408 x 145 x 64 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate

OTHER DATA




Rec is a LED appliance that is especially ideal to carry out indirect lighting functions. This is a luminaire that perfectly fits into projects that prioritise the comfort given by indirect lighting but also require a high volume of light. Formally, Rec is expressed in a slender cuboid with pure lines and a minimalist design.

POLAR DIAGRAM

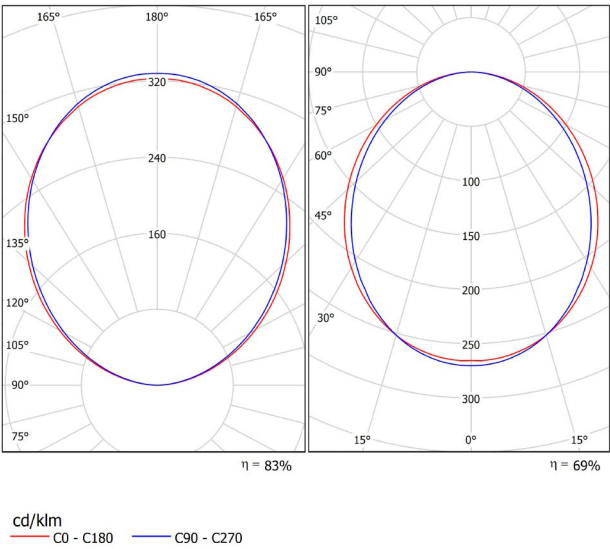


CONICAL DIAGRAM

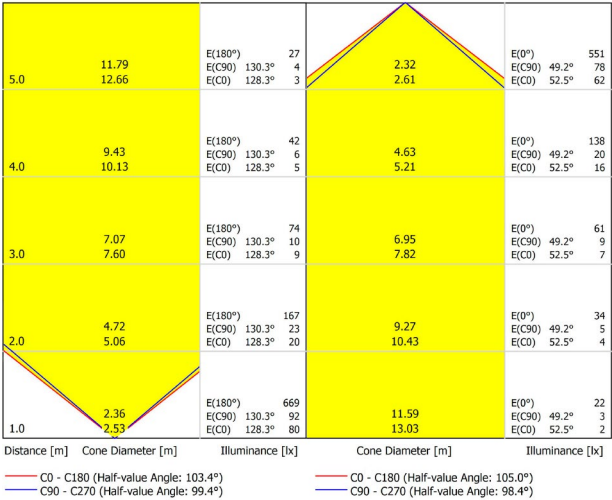



DIMENSIONS



PRODUCT

Name	REC DOUBLE-DOUBLE DIM 2700K WT
Reference	A3090120WT
Color	Textured white
RAL	9016
Category	WALL & FLOOR LIGHTS

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	2 X 2075 Lm
Power	2 x 14,7 W
Power values of the system	33,41 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Lighting efficiency	76%
Efficacy	141 Lm/W
Current intensity	2 X 450 mA
Dimming	DALI / Push
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	□
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Weight	2095 g.
Packaged weight	2220 g.
Packaging dimensions	408 x 145 x 64 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate



Rec is a LED appliance that is especially ideal to carry out indirect lighting functions. This is a luminaire that perfectly fits into projects that prioritise the comfort given by indirect lighting but also require a high volume of light. Formally, Rec is expressed in a slender cuboid with pure lines and a minimalist design.


POLAR DIAGRAM

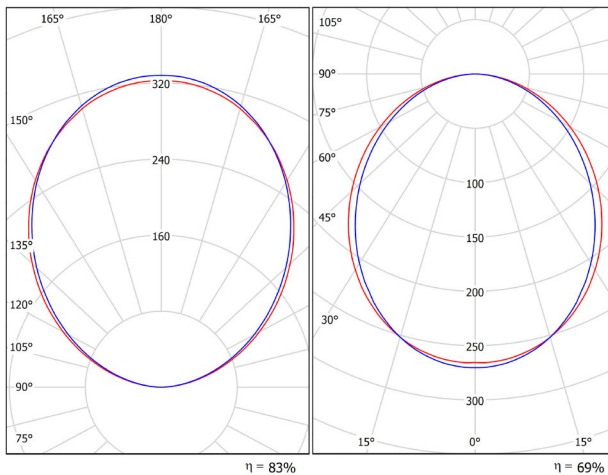

cd/klm


— C0 - C180 — C90 - C270

CONICAL DIAGRAM

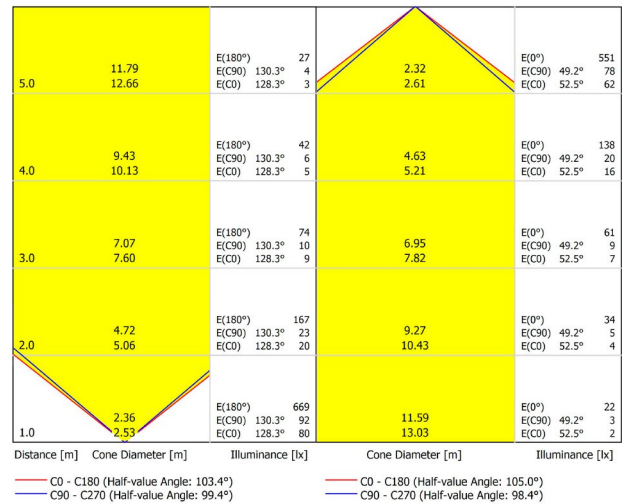



DIMENSIONS



PRODUCT

Name	REC DOUBLE-DOUBLE DIM 3000K NT
Reference	A3090121NT
Color	Textured black
RAL	9005
Category	WALL & FLOOR LIGHTS

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	2 X 2250 Lm
Power	2 x 14,7 W
Power values of the system	33,41 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Lighting efficiency	76%
Efficacy	153 Lm/W
Current intensity	2 X 450 mA
Dimming	DALI / Push
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Weight	2095 g.
Packaged weight	2220 g.
Packaging dimensions	408 x 145 x 64 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Rec is a LED appliance that is especially ideal to carry out indirect lighting functions. This is a luminaire that perfectly fits into projects that prioritise the comfort given by indirect lighting but also require a high volume of light. Formally, Rec is expressed in a slender cuboid with pure lines and a minimalist design.

POLAR DIAGRAM

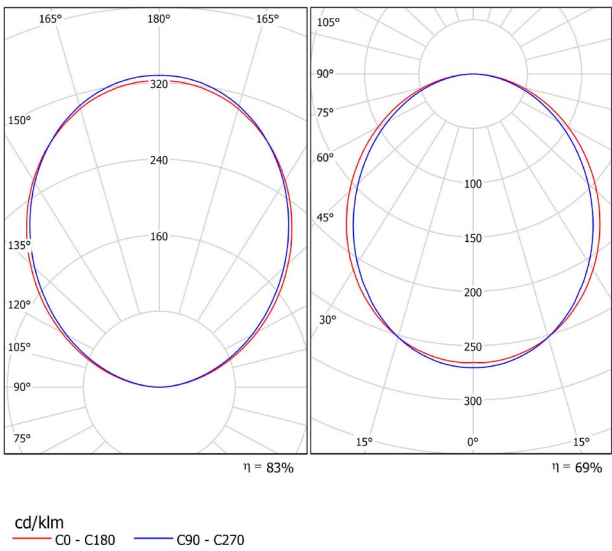


CONICAL DIAGRAM

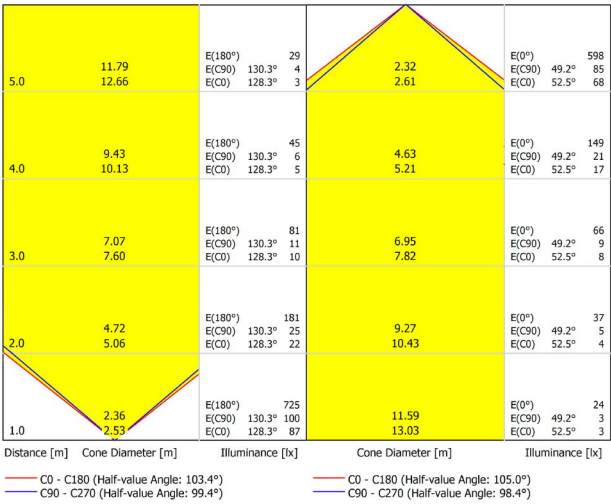



DIMENSIONS



PRODUCT

Name	REC DOUBLE-DOUBLE DIM 3000K WT
Reference	A3090121WT
Color	Textured white
RAL	9016
Category	WALL & FLOOR LIGHTS

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	2 X 2250 Lm
Power	2 x 14,7 W
Power values of the system	33,41 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Lighting efficiency	76%
Efficacy	153 Lm/W
Current intensity	2 X 450 mA
Dimming	DALI / Push
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Weight	2095 g.
Packaged weight	2220 g.
Packaging dimensions	408 x 145 x 64 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Rec is a LED appliance that is especially ideal to carry out indirect lighting functions. This is a luminaire that perfectly fits into projects that prioritise the comfort given by indirect lighting but also require a high volume of light. Formally, Rec is expressed in a slender cuboid with pure lines and a minimalist design.

POLAR DIAGRAM

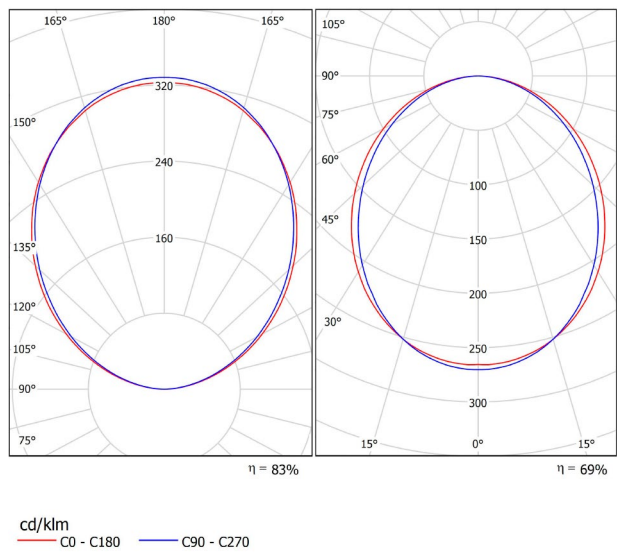


CONICAL DIAGRAM

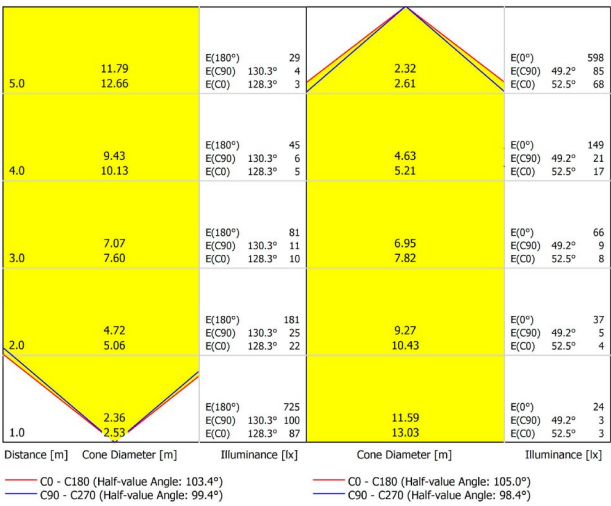



DIMENSIONS



PRODUCT

Name	REC DOUBLE-DOUBLE DIM 4000K NT
Reference	A3090122NT
Color	Textured black
RAL	9005
Category	WALL & FLOOR LIGHTS

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	2 X 2280 Lm
Power	2 x 14,7 W
Power values of the system	33,41 W
Colour temperature	4000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Lighting efficiency	76%
Efficacy	155 Lm/W
Current intensity	2 X 450 mA
Dimming	DALI / Push
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Weight	2095 g.
Packaged weight	2220 g.
Packaging dimensions	408 x 145 x 64 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Rec is a LED appliance that is especially ideal to carry out indirect lighting functions. This is a luminaire that perfectly fits into projects that prioritise the comfort given by indirect lighting but also require a high volume of light. Formally, Rec is expressed in a slender cuboid with pure lines and a minimalist design.

POLAR DIAGRAM

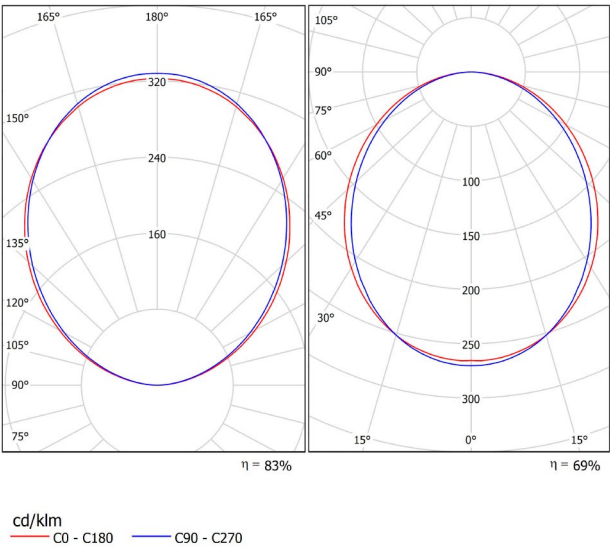


CONICAL DIAGRAM

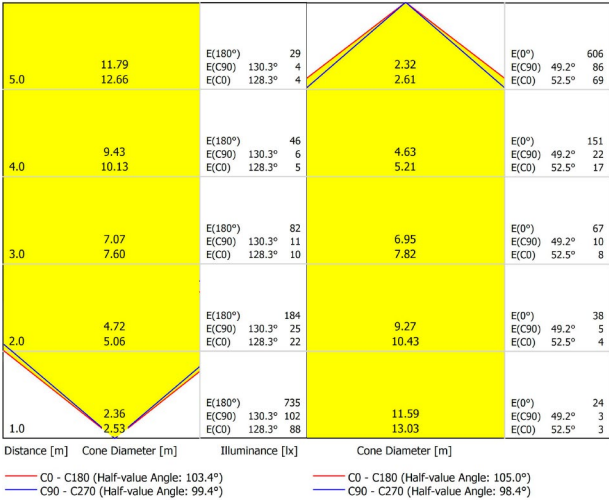



DIMENSIONS



PRODUCT

Name	REC DOUBLE-DOUBLE DIM 4000K WT
Reference	A3090122WT
Color	Textured white
RAL	9016
Category	WALL & FLOOR LIGHTS

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	2 X 2280 Lm
Power	2 x 14,7 W
Power values of the system	33,41 W
Colour temperature	4000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Lighting efficiency	76%
Efficacy	155 Lm/W
Current intensity	2 X 450 mA
Dimming	DALI / Push
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Weight	2095 g.
Packaged weight	2220 g.
Packaging dimensions	408 x 145 x 64 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Rec is a LED appliance that is especially ideal to carry out indirect lighting functions. This is a luminaire that perfectly fits into projects that prioritise the comfort given by indirect lighting but also require a high volume of light. Formally, Rec is expressed in a slender cuboid with pure lines and a minimalist design.

POLAR DIAGRAM

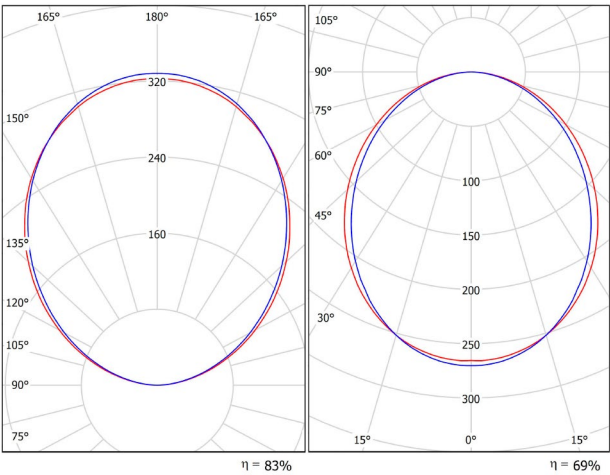


cd/klm
C0 - C180 C90 - C270

CONICAL DIAGRAM

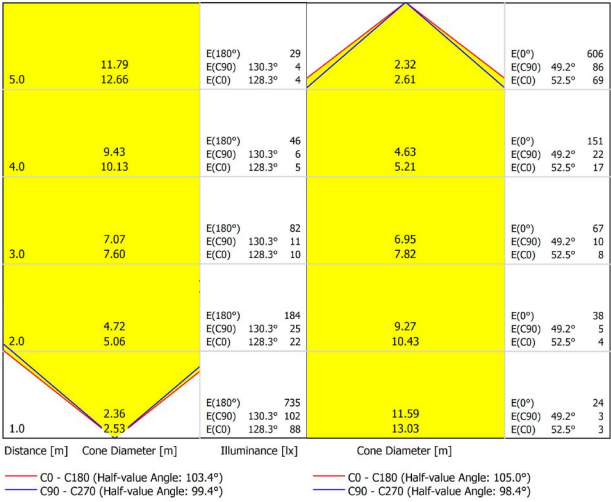



DIMENSIONS



PRODUCT

Name	REC DOUBLE-DOUBLE 2700K NT
Reference	A3090110NT
Color	Textured black
RAL	9005
Category	WALL & FLOOR LIGHTS

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	2 X 2075 Lm
Power	2 x 14,7 W
Power values of the system	33,03 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Lighting efficiency	76%
Efficacy	141 Lm/W
Current intensity	2 X 450 mA
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	□
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Weight	2095 g.
Packaged weight	2220 g.
Packaging dimensions	408 x 145 x 64 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate



Rec is a LED appliance that is especially ideal to carry out indirect lighting functions. This is a luminaire that perfectly fits into projects that prioritise the comfort given by indirect lighting but also require a high volume of light. Formally, Rec is expressed in a slender cuboid with pure lines and a minimalist design.


POLAR DIAGRAM

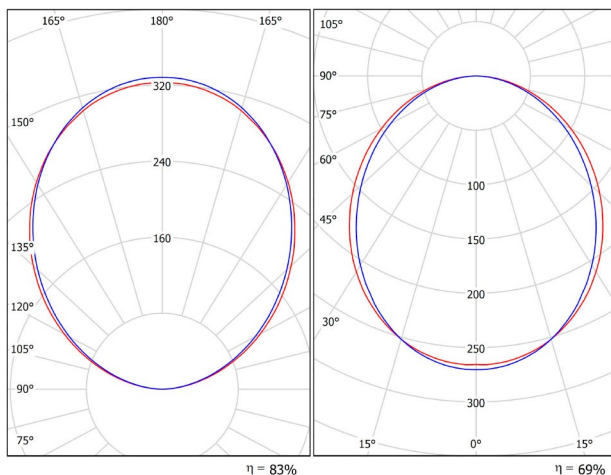

cd/klm


— C0 - C180 — C90 - C270

CONICAL DIAGRAM

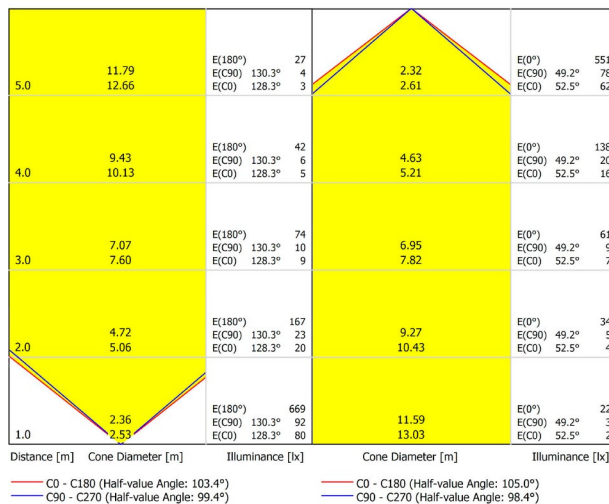



DIMENSIONS



PRODUCT

Name	REC DOUBLE-DOUBLE 2700K WT
Reference	A3090110WT
Color	Textured white
RAL	9016
Category	WALL & FLOOR LIGHTS

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	2 X 2075 Lm
Power	2 x 14,7 W
Power values of the system	33,03 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Lighting efficiency	76%
Efficacy	141 Lm/W
Current intensity	2 X 450 mA
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Weight	2095 g.
Packaged weight	2220 g.
Packaging dimensions	408 x 145 x 64 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate



Rec is a LED appliance that is especially ideal to carry out indirect lighting functions. This is a luminaire that perfectly fits into projects that prioritise the comfort given by indirect lighting but also require a high volume of light. Formally, Rec is expressed in a slender cuboid with pure lines and a minimalist design.


POLAR DIAGRAM

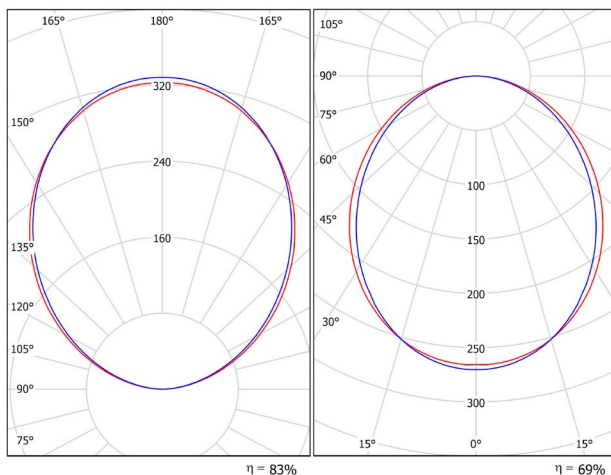

cd/klm


— C0 - C180 — C90 - C270

CONICAL DIAGRAM

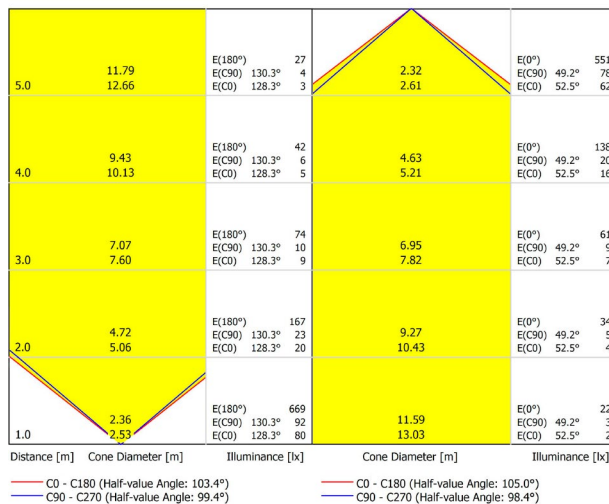



DIMENSIONS



PRODUCT

Name	REC DOUBLE-DOUBLE 3000K NT
Reference	A3090111NT
Color	Textured black
RAL	9005
Category	WALL & FLOOR LIGHTS

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	2 X 2250 Lm
Power	2 x 14,7 W
Power values of the system	33,03 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Lighting efficiency	76%
Efficacy	153 Lm/W
Current intensity	2 X 450 mA
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	□
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Weight	2095 g.
Packaged weight	2220 g.
Packaging dimensions	408 x 145 x 64 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Rec is a LED appliance that is especially ideal to carry out indirect lighting functions. This is a luminaire that perfectly fits into projects that prioritise the comfort given by indirect lighting but also require a high volume of light. Formally, Rec is expressed in a slender cuboid with pure lines and a minimalist design.

POLAR DIAGRAM

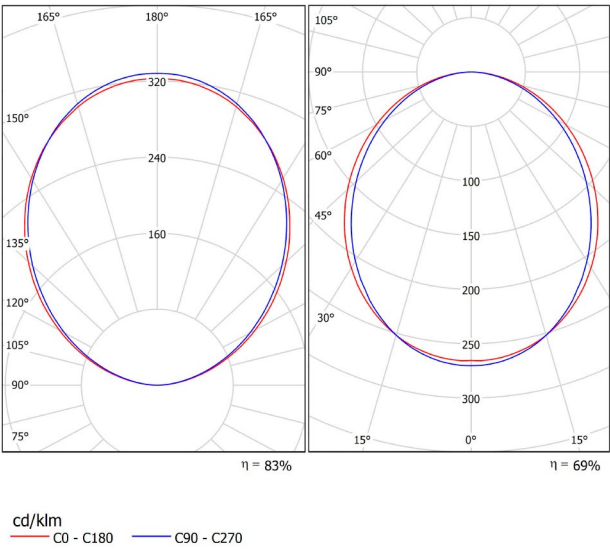


CONICAL DIAGRAM

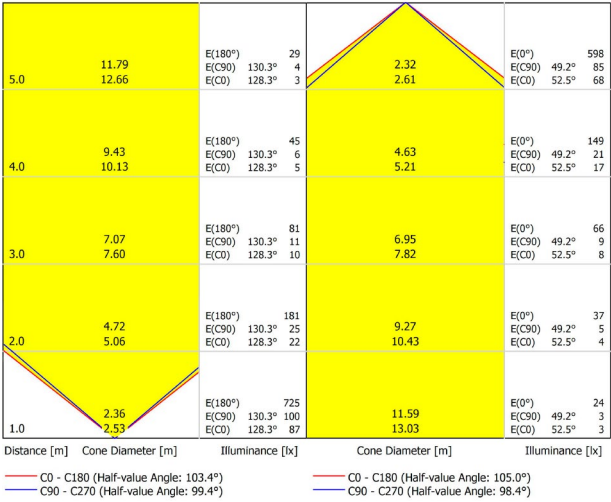



DIMENSIONS



PRODUCT

Name	REC DOUBLE-DOUBLE 3000K WT
Reference	A3090111WT
Color	Textured white
RAL	9016
Category	WALL & FLOOR LIGHTS

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	2 X 2250 Lm
Power	2 x 14,7 W
Power values of the system	33,03 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Lighting efficiency	76%
Efficacy	153 Lm/W
Current intensity	2 X 450 mA
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Weight	2095 g.
Packaged weight	2220 g.
Packaging dimensions	408 x 145 x 64 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Rec is a LED appliance that is especially ideal to carry out indirect lighting functions. This is a luminaire that perfectly fits into projects that prioritise the comfort given by indirect lighting but also require a high volume of light. Formally, Rec is expressed in a slender cuboid with pure lines and a minimalist design.

POLAR DIAGRAM

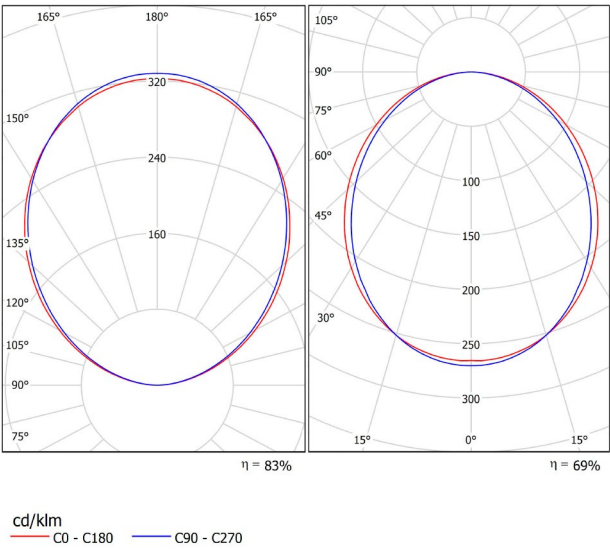


CONICAL DIAGRAM

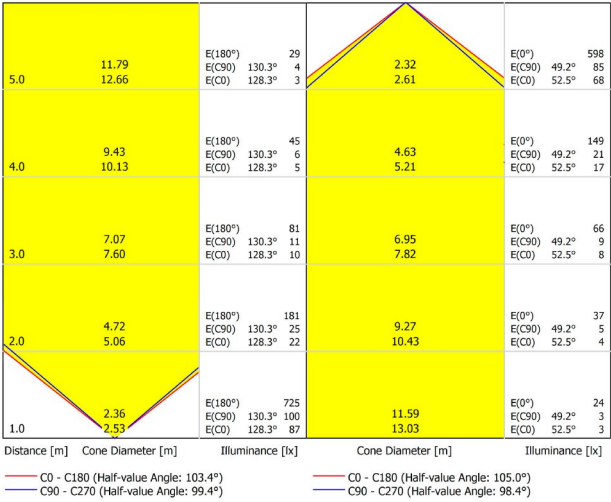



DIMENSIONS



PRODUCT

Name	REC DOUBLE-DOUBLE 4000K NT
Reference	A3090112NT
Color	Textured black
RAL	9005
Category	WALL & FLOOR LIGHTS

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	2 X 2280 Lm
Power	2 x 14,7 W
Power values of the system	33,03 W
Colour temperature	4000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Lighting efficiency	76%
Efficacy	155 Lm/W
Current intensity	2 X 450 mA
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	□
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Weight	2095 g.
Packaged weight	2220 g.
Packaging dimensions	408 x 145 x 64 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Rec is a LED appliance that is especially ideal to carry out indirect lighting functions. This is a luminary that perfectly fits into projects that prioritise the comfort given by indirect lighting but also require a high volume of light. Formally, Rec is expressed in a slender cuboid with pure lines and a minimalist design.

POLAR DIAGRAM

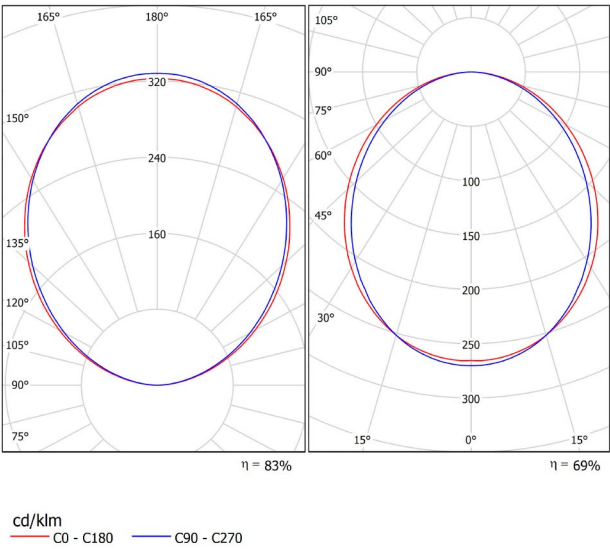


CONICAL DIAGRAM

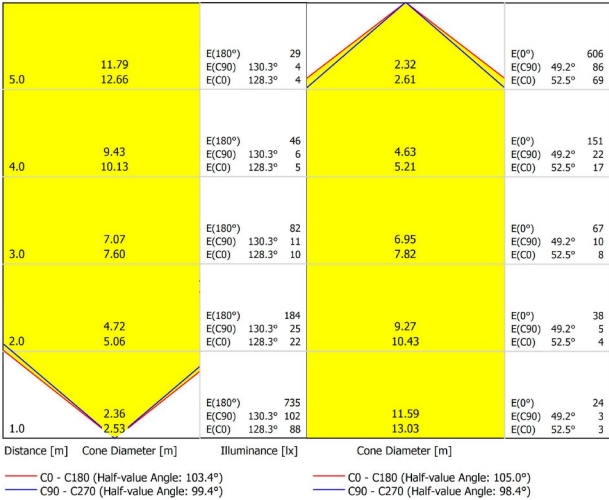



DIMENSIONS



PRODUCT

Name	REC DOUBLE-DOUBLE 4000K WT
Reference	A3090112WT
Color	Textured white
RAL	9016
Category	WALL & FLOOR LIGHTS

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	2 X 2280 Lm
Power	2 x 14,7 W
Power values of the system	33,03 W
Colour temperature	4000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Lighting efficiency	76%
Efficacy	155 Lm/W
Current intensity	2 X 450 mA
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Weight	2095 g.
Packaged weight	2220 g.
Packaging dimensions	408 x 145 x 64 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate



Rec is a LED appliance that is especially ideal to carry out indirect lighting functions. This is a luminary that perfectly fits into projects that prioritise the comfort given by indirect lighting but also require a high volume of light. Formally, Rec is expressed in a slender cuboid with pure lines and a minimalist design.

POLAR DIAGRAM

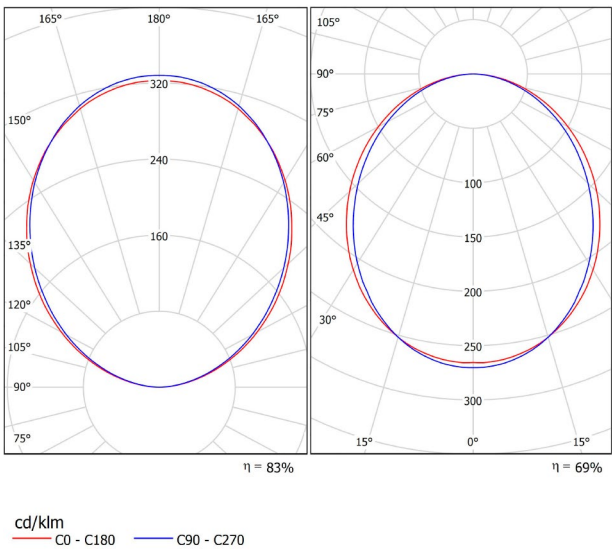

CONICAL DIAGRAM

