# SPIN 48V

ARKOSLIGHT®

## DIMENSIONS

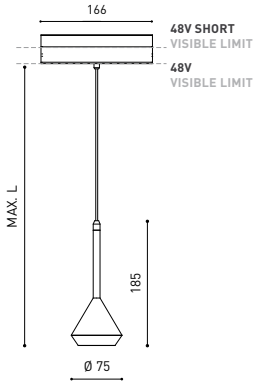


## ACCESSORIES

CORD ACCESOSORY



TRACK 48V OPTIONS

| | PRODUCT |
|---|---|
| Name | SPIN 48V 2M 24º 2700K MC |
| Reference | A3500100MC |
| Color | Metallized copper |
| RAL | Paint of metallic nanoparticles |
| Category | TRACKLIGHTS |

| | LIGHTING INFORMATION |
|---|---|
| Light source | LED |
| Gross luminous flux | 600 Lm |
| Power | 6,5 W |
| Power values of the system | 6,84 W |
| Colour temperature | 2700 K |
| Colour Rendering Index | CRI>90 |
| Chromatic stability | MacAdam Step 2 |
| Light beam angle | 24° |
| Lighting efficiency | 86% |
| Efficacy | 92 Lm/W |
| Current intensity | 700 mA |
| Dimming | No Dim - Other DIM, please consult |
| Control through bluetooth | Please Consult |
| Driver | Included |
| Electrical insulation class | III |
| Voltage | 48 Vdc |
| Energy efficiency | A+ |
| LED lifespan | L80B10 (Tj=85°C) >60.000h |

| | OTHER DATA |
|---|---|
| Ingress Protection | IP20 |
| Cord length | 2 m |
| Fast adjustment tensioner | No |
| Track type | Track 48V |
| Weight | 530 g. |
| Packaged weight | 666 g. |
| Packaging dimensions | 253 × 152 × 102 mm |
| Units per package | 1 |
| Materials | Aluminium / Polymethyl Methacrylate |

CE

## AWARDS

Spin 48V, reduced dimensions, essential lines and revolutionary geometry in a pendant luminary for accent lighting. Its extra fine wire gives Spin a sense of airiness and flotability. Spin, now available for Arkoslight's low voltage tracklight systems.

Calle N · Pol. Ind. EL OLIVERAL
46394 Ribarroja del Turia · Valencia (Spain)
Tel. +34 961 667 207 · Fax +34 961 667 054
info@arkoslight.com · www.arkoslight.com

28-03-20 / 04:07

5 Year GUARANTEE*

## POLAR DIAGRAM

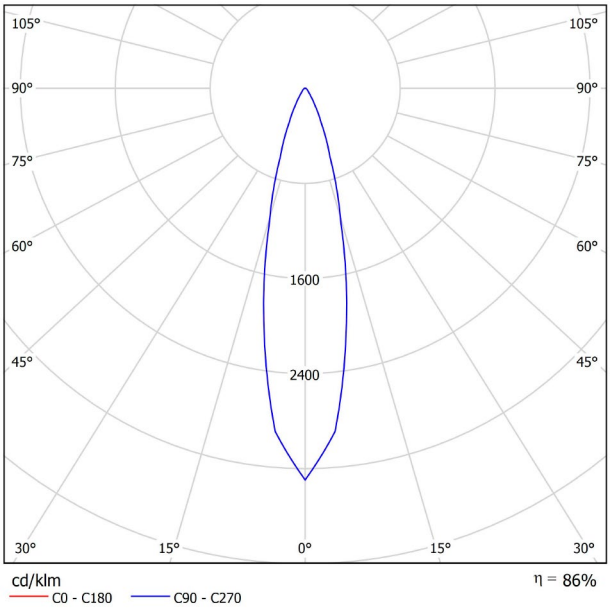


## CONICAL DIAGRAM

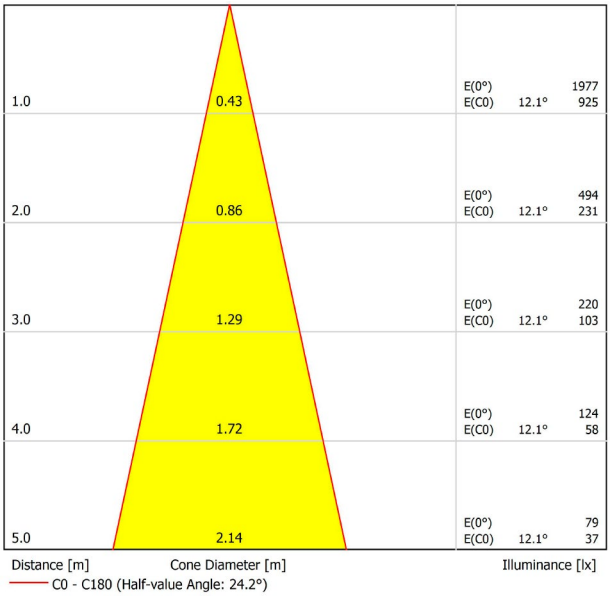

# CORD ACCESSORY

ARKOSLIGHT®

| | PRODUCT |
|---|---|
| Model | Cord Accessory |
| Reference | **02230000** \| **WT** \| **NT** \| |
| Colour | **WT** ☐ RAL 9016 \| **NT** ■ RAL9005 |
| Category | Accessories |

## DIMENSIONAL DRAWING




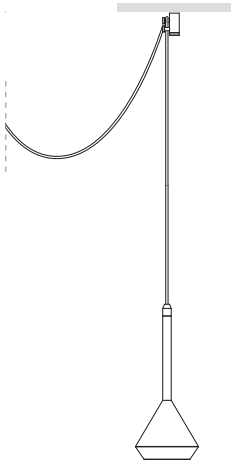

Calle N · Pol. Ind. EL OLIVERAL
46394 Ribarroja del Turia · Valencia (Spain)
Tel. +34 961 667 207 · Fax +34 961 667 054
info@arkoslight.com · www.arkoslight.com

5 Year GUARANTEE*

# TRACK 48V




## TRACK 48V TRIMLESS

| | | |
|---|---|---|
| TRACK 48V TRIMLESS 1m | A338-01-00- | N |
| TRACK 48V TRIMLESS 2m | A338-02-00- | N |
| TRACK 48V TRIMLESS 3m | A338-03-00- | N |
| TRACK 48V TRIMLESS Corner 90º One Plane | A338-06-00- | N |
| TRACK 48V TRIMLESS Corner 90º Two Planes | A338-07-00- | N |

RECOMMENDED FOR INSTALLATIONS WHERE THE PROFILE CAN BE INSTALLED BEFORE THE FALSE PLASTERBOARD CEILING (THICKNESS 12,5mm.)

CE III

TRACK 48V TRIMLESS
Corner 90º One Plane




*Electrical connection not included

TRACK 48V TRIMLESS
Corner 90º Two Planes




*Electrical connection not included




## TRACK 48V SURFACE

| | | |
|---|---|---|
| TRACK 48V SURFACE 1m | A338-11-00- | N |
| TRACK 48V SURFACE 2m | A338-12-00- | N |
| TRACK 48V SURFACE 3m | A338-13-00- | N |
| TRACK 48V SURFACE Corner 90º One Plane | A338-14-00- | N |

CE III

TRACK 48V SURFACE
Corner 90º One Plane




*Electrical connection not included




## TRACK 48V SURFACE SHORT

| | | |
|---|---|---|
| TRACK 48V SURFACE SHORT 1m | A338-21-00- | N |
| TRACK 48V SURFACE SHORT 2m | A338-22-00- | N |
| TRACK 48V SURFACE SHORT 3m | A338-23-00- | N |
| TRACK 48V SURFACE SHORT Corner 90º One Plane | A338-24-00- | N |

CE III

TRACK 48V SURFACE SHORT
Corner 90º One Plane




*Electrical connection not included

48V SYSTEM

# TRACK 48V

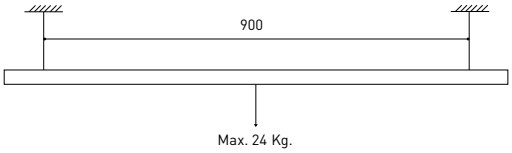


| | | P | V | D |
|---|---|---|---|---|
| CONSTANT VOLTAGE LED POWER SUPPLY | **0434-01-21** | 75W | 48V | 180 x 52 x 30mm |
| | **0434-01-22** | 150W | 48V | 240 x 60 x 49mm |

DROP VOLTAGE TABLE

| | | **CABLE LENGHT** (m) | | | |
|---|---|---|---|---|---|
| | | 5 | 10 | 20 | 30 |
| **POWER** (W) | **CABLE SECTION** ($mm^2$) | **TRACK LENGHT** (m) | | | |
| 75 | 0,75 | 50 | 50 | 30 | X |
| | 1,5 | 50 | 50 | 50 | 50 |
| 150 | 0,75 | 40 | 15 | X | X |
| | 1,5 | 50 | 40 | 20 | X |

## COMPATIBILITY ACCORDING TO TYPE OF TRACK

### TRACK 48V & TRACK 48V SURFACE SHORT

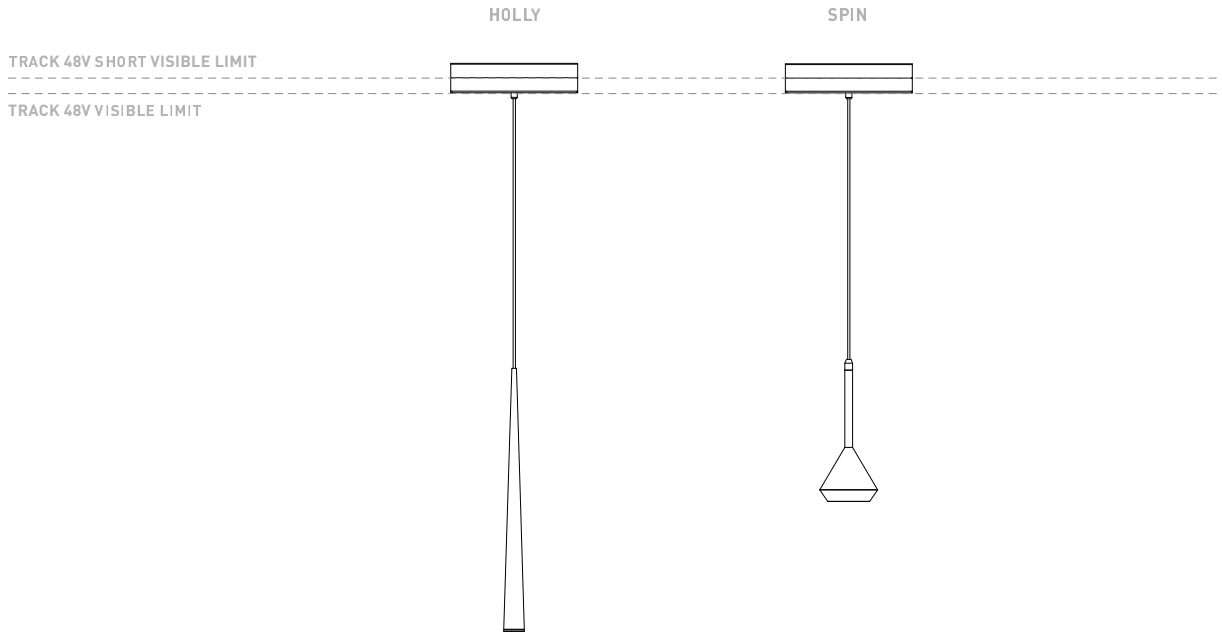





Order with *The 2019 Collection* codes. Products with one single version for both tracks

# TRACK 48V

## ALL 48V TRACK




**TRACK 48V** Live-End Connector

A338-00-01- | N |




**TRACK 48V** Central Connector

A338-00-02- | N |




**TRACK 48V** Corner 90º Connector

A338-00-12- | N |




**TRACK 48V** Wireless Control

0434-01-31- | N | Casambi/AAG Stucchi App

0434-01-32- | N | AAG Stucchi App

## TRIMLESS 48V

**TRACK 48V TRIMLESS** Short T-Bracket

A338-00-03



**TRACK 48V TRIMLESS** Long T-Bracket

A338-00-04



**TRACK 48V TRIMLESS** Straight Joiners (2 units)

A338-00-05



**TRACK 48V TRIMLESS** Plaster Installation Guard 1m

A338-00-21

**TRACK 48V** Clamp for M6 ROD

A338-00-09

*See accessories quantities

**TRACK 48V** Track Clamp

A338-00-10

*See accessories quantities




**TRACK 48V TRIMLESS** Suspension Kit

A338-00-08

*See accessories quantities

*** SUGGESTED MOUNTING ACCESSORIES QUANTITIES**

1000mm - 2 Pcs.
2000mm - 3 Pcs.
3000mm - 4 Pcs.

## SURFACE, SUSPENSION , SURFACE SHORT & SUSPENSION SHORT 48V



**TRACK 48V SURFACE** Straight Joiner

A338-00-11- | N |

COLOUR | N ■ |

# TRACK 48V

## TRIMLESS, SURFACE & SUSPENSION 48V

**TRACK 48V TRIMLESS & SURFACE End**

A338-00-06- | N |

**TRACK 48V TRIMLESS & SURFACE End Feed**

A338-00-07- | N |

## SURFACE SHORT & SUSPENSION SHORT 48V

**TRACK 48V SURFACE SHORT End**

A338-00-18- | N |

**TRACK 48V SURFACE SHORT End Feed**

A338-00-19- | N |

## SURFACE & SURFACE SHORT 48V




**TRACK 48V Power Supply Case**

A338-00-20- | N | NO DIM

*To be installed aside 48V Surface Tracks
Power supply not included

## SUSPENSION & SUSPENSION SHORT 48V




**TRACK 48V Wired Power Supply Case**

A338-00-22- | N | NO DIM

A338-00-23- | N | DIM

*Power supply not included




**TRACK 48V SURFACE Suspension Kit (2 units)**

A338-00-15- | N |

**TRACK 48V SURFACE Suspension Feed Kit**

A338-00-16- | N | NO DIM

A338-00-17- | N | DIM

*For remote power supply

COLOUR | N ■ |

# SPIN 48V

ARKOSLIGHT®

## DIMENSIONS

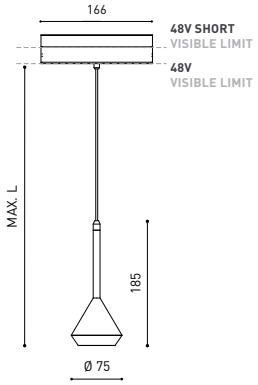


## ACCESSORIES

CORD ACCESOSORY



TRACK 48V OPTIONS

| | PRODUCT |
|---|---|
| Name | SPIN 48V 2M 24° 2700K MG |
| Reference | A3500100MG |
| Color | Metallized gold |
| RAL | Paint of metallic nanoparticles |
| Category | TRACKLIGHTS |

| | LIGHTING INFORMATION |
|---|---|
| Light source | LED |
| Gross luminous flux | 600 Lm |
| Power | 6,5 W |
| Power values of the system | 6,84 W |
| Colour temperature | 2700 K |
| Colour Rendering Index | CRI>90 |
| Chromatic stability | MacAdam Step 2 |
| Light beam angle | 24° |
| Lighting efficiency | 86% |
| Efficacy | 92 Lm/W |
| Current intensity | 700 mA |
| Dimming | No Dim - Other DIM, please consult |
| Control through bluetooth | Please Consult |
| Driver | Included |
| Electrical insulation class | III |
| Voltage | 48 Vdc |
| Energy efficiency | A+ |
| LED lifespan | L80B10 (Tj=85°C) >60.000h |

| | OTHER DATA |
|---|---|
| Ingress Protection | IP20 |
| Cord length | 2 m |
| Fast adjustment tensioner | No |
| Track type | Track 48V |
| Weight | 530 g. |
| Packaged weight | 666 g. |
| Packaging dimensions | 253 × 152 × 102 mm |
| Units per package | 1 |
| Materials | Aluminium / Polymethyl Methacrylate |

CE

## AWARDS

Spin 48V, reduced dimensions, essential lines and revolutionary geometry in a pendant luminary for accent lighting. Its extra fine wire gives Spin a sense of airiness and flotability. Spin, now available for Arkoslight's low voltage tracklight systems.

Calle N · Pol. Ind. EL OLIVERAL
46394 Ribarroja del Turia · Valencia (Spain)
Tel. +34 961 667 207 · Fax +34 961 667 054
info@arkoslight.com · www.arkoslight.com

28-03-20 / 04:07

5 Year GUARANTEE*

## POLAR DIAGRAM

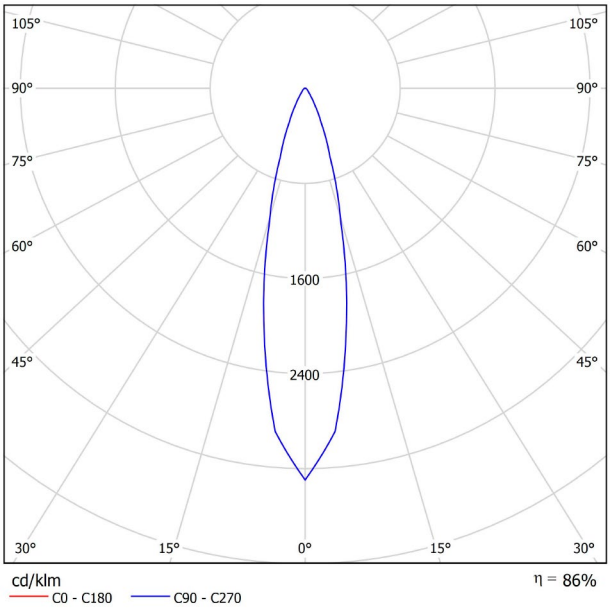


## CONICAL DIAGRAM

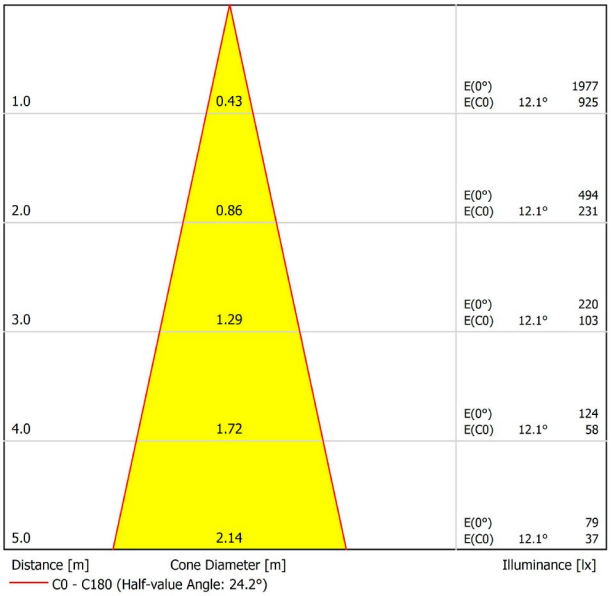

# CORD ACCESSORY

ARKOSLIGHT®

| | PRODUCT |
|---|---|
| Model | Cord Accessory |
| Reference | **02230000** \| **WT** \| **NT** \| |
| Colour | **WT** ☐ RAL 9016 \| **NT** ■ RAL9005 |
| Category | Accessories |

## DIMENSIONAL DRAWING




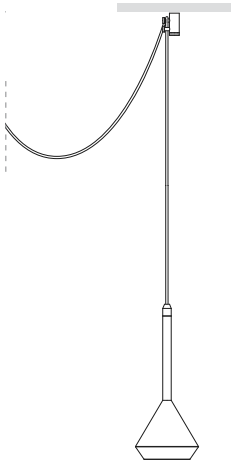

Calle N · Pol. Ind. EL OLIVERAL
46394 Ribarroja del Turia · Valencia (Spain)
Tel. +34 961 667 207 · Fax +34 961 667 054
info@arkoslight.com · www.arkoslight.com

5 Year GUARANTEE*

# TRACK 48V




## TRACK 48V TRIMLESS

| | | |
|---|---|---|
| TRACK 48V TRIMLESS 1m | A338-01-00- | N |
| TRACK 48V TRIMLESS 2m | A338-02-00- | N |
| TRACK 48V TRIMLESS 3m | A338-03-00- | N |
| TRACK 48V TRIMLESS Corner 90º One Plane | A338-06-00- | N |
| TRACK 48V TRIMLESS Corner 90º Two Planes | A338-07-00- | N |

RECOMMENDED FOR INSTALLATIONS WHERE THE PROFILE CAN BE INSTALLED BEFORE THE FALSE PLASTERBOARD CEILING (THICKNESS 12,5mm.)

CE III

TRACK 48V TRIMLESS

Corner 90º One Plane




*Electrical connection not included

TRACK 48V TRIMLESS

Corner 90º Two Planes




*Electrical connection not included




## TRACK 48V SURFACE

| | | |
|---|---|---|
| TRACK 48V SURFACE 1m | A338-11-00- | N |
| TRACK 48V SURFACE 2m | A338-12-00- | N |
| TRACK 48V SURFACE 3m | A338-13-00- | N |
| TRACK 48V SURFACE Corner 90º One Plane | A338-14-00- | N |

CE III

TRACK 48V SURFACE

Corner 90º One Plane




*Electrical connection not included




## TRACK 48V SURFACE SHORT

| | | |
|---|---|---|
| TRACK 48V SURFACE SHORT 1m | A338-21-00- | N |
| TRACK 48V SURFACE SHORT 2m | A338-22-00- | N |
| TRACK 48V SURFACE SHORT 3m | A338-23-00- | N |
| TRACK 48V SURFACE SHORT Corner 90º One Plane | A338-24-00- | N |

CE III

TRACK 48V SURFACE SHORT

Corner 90º One Plane




*Electrical connection not included

48V SYSTEM

# TRACK 48V

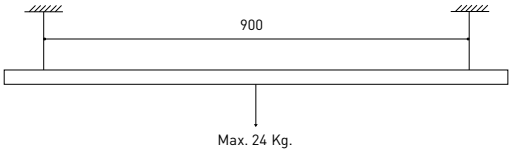


| | | P | V | D |
|---|---|---|---|---|
| CONSTANT VOLTAGE LED POWER SUPPLY | **0434-01-21** | 75W | 48V | 180 x 52 x 30mm |
| | **0434-01-22** | 150W | 48V | 240 x 60 x 49mm |

DROP VOLTAGE TABLE

| | | CABLE LENGHT (m) | | | |
|---|---|---|---|---|---|
| | | 5 | 10 | 20 | 30 |
| **POWER** (W) | **CABLE SECTION** ($mm^2$) | **TRACK LENGHT** (m) | | | |
| 75 | 0,75 | 50 | 50 | 30 | X |
| | 1,5 | 50 | 50 | 50 | 50 |
| 150 | 0,75 | 40 | 15 | X | X |
| | 1,5 | 50 | 40 | 20 | X |

## COMPATIBILITY ACCORDING TO TYPE OF TRACK

### TRACK 48V & TRACK 48V SURFACE SHORT

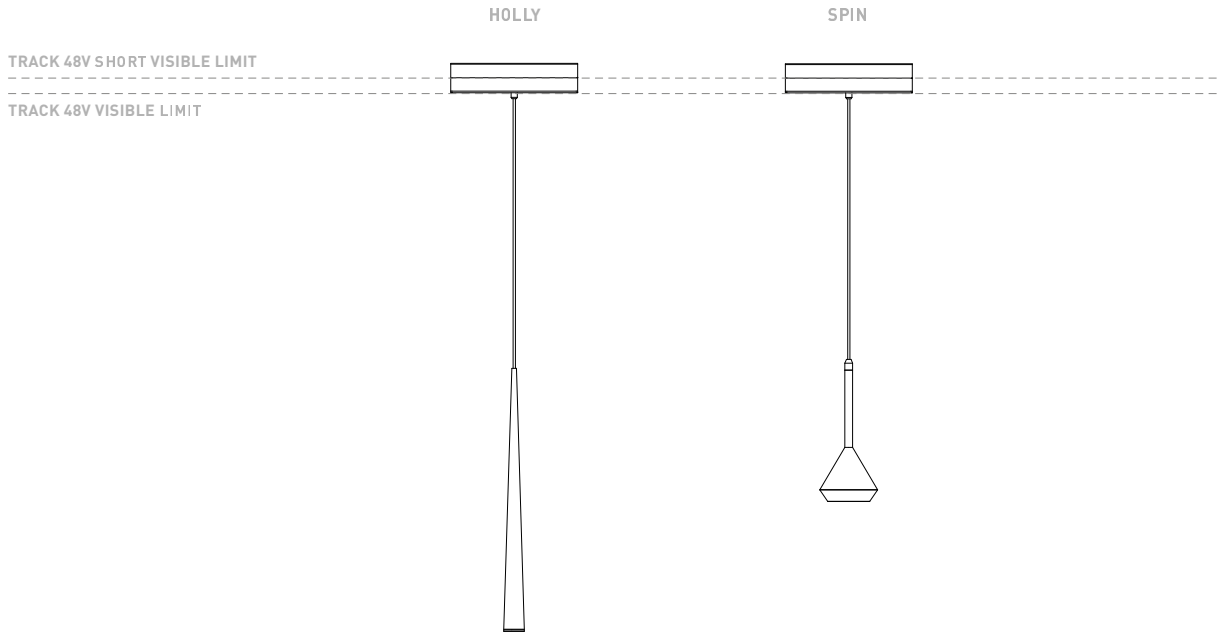





Order with *The 2019 Collection* codes. Products with one single version for both tracks

# TRACK 48V

## ALL 48V TRACK




**TRACK 48V** Live-End Connector

A338-00-01- | N |




**TRACK 48V** Central Connector

A338-00-02- | N |




**TRACK 48V** Corner 90º Connector

A338-00-12- | N |




**TRACK 48V** Wireless Control

0434-01-31- | N | Casambi/AAG Stucchi App

0434-01-32- | N | AAG Stucchi App

## TRIMLESS 48V

**TRACK 48V TRIMLESS** Short T-Bracket

A338-00-03



**TRACK 48V TRIMLESS** Long T-Bracket

A338-00-04



**TRACK 48V TRIMLESS** Straight Joiners (2 units)

A338-00-05



**TRACK 48V TRIMLESS** Plaster Installation Guard 1m

A338-00-21

**TRACK 48V** Clamp for M6 ROD

A338-00-09

*See accessories quantities

**TRACK 48V** Track Clamp

A338-00-10

*See accessories quantities




**TRACK 48V TRIMLESS** Suspension Kit

A338-00-08

*See accessories quantities

*** SUGGESTED MOUNTING ACCESSORIES QUANTITIES**

1000mm - 2 Pcs.
2000mm - 3 Pcs.
3000mm - 4 Pcs.

## SURFACE, SUSPENSION , SURFACE SHORT & SUSPENSION SHORT 48V



**TRACK 48V SURFACE** Straight Joiner

A338-00-11- | N |

COLOUR | N ■ |

# TRACK 48V

## TRIMLESS, SURFACE & SUSPENSION 48V

**TRACK 48V TRIMLESS & SURFACE End**

A338-00-06- | N |

**TRACK 48V TRIMLESS & SURFACE End Feed**

A338-00-07- | N |

## SURFACE SHORT & SUSPENSION SHORT 48V

**TRACK 48V SURFACE SHORT End**

A338-00-18- | N |

**TRACK 48V SURFACE SHORT End Feed**

A338-00-19- | N |

## SURFACE & SURFACE SHORT 48V




**TRACK 48V Power Supply Case**

A338-00-20- | N | NO DIM

*To be installed aside 48V Surface Tracks
Power supply not included

## SUSPENSION & SUSPENSION SHORT 48V




**TRACK 48V Wired Power Supply Case**

A338-00-22- | N | NO DIM

A338-00-23- | N | DIM

*Power supply not included




**TRACK 48V SURFACE Suspension Kit (2 units)**

A338-00-15- | N |

**TRACK 48V SURFACE Suspension Feed Kit**

A338-00-16- | N | NO DIM

A338-00-17- | N | DIM

*For remote power supply

COLOUR | N ■ |

# SPIN 48V

ARKOSLIGHT®

## DIMENSIONS

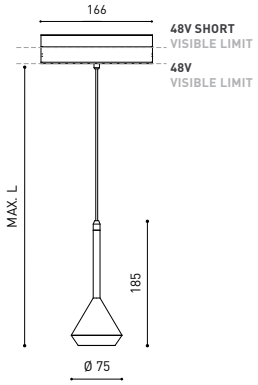


## ACCESSORIES

CORD ACCESOSORY



TRACK 48V OPTIONS

| | PRODUCT |
|---|---|
| Name | SPIN 48V 2M 24° 2700K NT |
| Reference | A3500100NT |
| Color | Textured black |
| RAL | 9005 |
| Category | TRACKLIGHTS |

| | LIGHTING INFORMATION |
|---|---|
| Light source | LED |
| Gross luminous flux | 600 Lm |
| Power | 6,5 W |
| Power values of the system | 6,84 W |
| Colour temperature | 2700 K |
| Colour Rendering Index | CRI>90 |
| Chromatic stability | MacAdam Step 2 |
| Light beam angle | 24° |
| Lighting efficiency | 86% |
| Efficacy | 92 Lm/W |
| Current intensity | 700 mA |
| Dimming | No Dim - Other DIM, please consult |
| Control through bluetooth | Please Consult |
| Driver | Included |
| Electrical insulation class | III |
| Voltage | 48 Vdc |
| Energy efficiency | A+ |
| LED lifespan | L80B10 (Tj=85°C) >60.000h |

| | OTHER DATA |
|---|---|
| Ingress Protection | IP20 |
| Cord length | 2 m |
| Fast adjustment tensioner | No |
| Track type | Track 48V |
| Weight | 530 g. |
| Packaged weight | 666 g. |
| Packaging dimensions | 253 × 152 × 102 mm |
| Units per package | 1 |
| Materials | Aluminium / Polymethyl Methacrylate |

CE

## AWARDS

Spin 48V, reduced dimensions, essential lines and revolutionary geometry in a pendant luminary for accent lighting. Its extra fine wire gives Spin a sense of airiness and flotability. Spin, now available for Arkoslight's low voltage tracklight systems.

Calle N · Pol. Ind. EL OLIVERAL
46394 Ribarroja del Turia · Valencia (Spain)
Tel. +34 961 667 207 · Fax +34 961 667 054
info@arkoslight.com · www.arkoslight.com

28-03-20 / 04:04

5 Year GUARANTEE*

## POLAR DIAGRAM

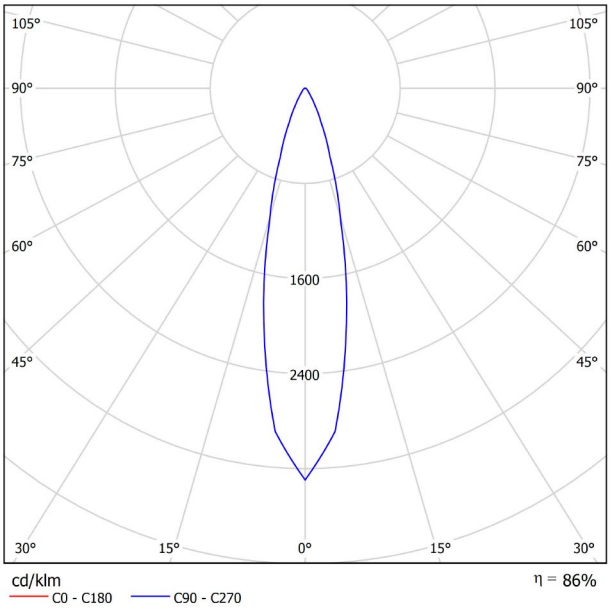


## CONICAL DIAGRAM

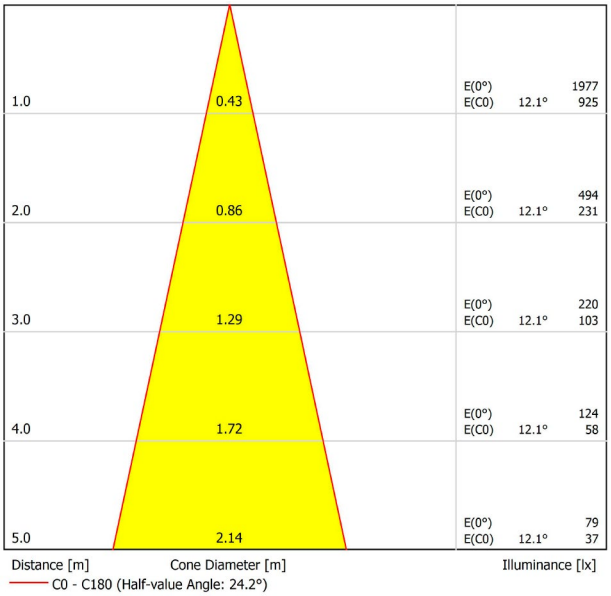

# CORD ACCESSORY

ARKOSLIGHT®

| | PRODUCT |
|---|---|
| Model | Cord Accessory |
| Reference | **02230000** \| **WT** \| **NT** \| |
| Colour | **WT** ☐ RAL 9016 \| **NT** ■ RAL9005 |
| Category | Accessories |

## DIMENSIONAL DRAWING




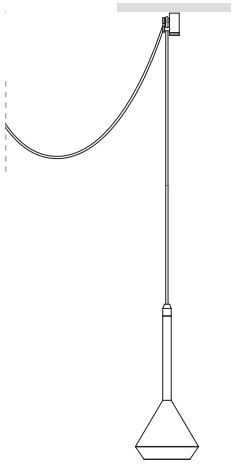

Calle N · Pol. Ind. EL OLIVERAL
46394 Ribarroja del Turia · Valencia (Spain)
Tel. +34 961 667 207 · Fax +34 961 667 054
info@arkoslight.com · www.arkoslight.com

5 Year GUARANTEE*

# TRACK 48V




## TRACK 48V TRIMLESS

| | | |
|---|---|---|
| TRACK 48V TRIMLESS 1m | A338-01-00- | N |
| TRACK 48V TRIMLESS 2m | A338-02-00- | N |
| TRACK 48V TRIMLESS 3m | A338-03-00- | N |
| TRACK 48V TRIMLESS Corner 90º One Plane | A338-06-00- | N |
| TRACK 48V TRIMLESS Corner 90º Two Planes | A338-07-00- | N |

RECOMMENDED FOR INSTALLATIONS WHERE THE PROFILE CAN BE INSTALLED BEFORE THE FALSE PLASTERBOARD CEILING (THICKNESS 12,5mm.)

CE III

TRACK 48V TRIMLESS

Corner 90º One Plane




*Electrical connection not included

TRACK 48V TRIMLESS

Corner 90º Two Planes




*Electrical connection not included




## TRACK 48V SURFACE

| | | |
|---|---|---|
| TRACK 48V SURFACE 1m | A338-11-00- | N |
| TRACK 48V SURFACE 2m | A338-12-00- | N |
| TRACK 48V SURFACE 3m | A338-13-00- | N |
| TRACK 48V SURFACE Corner 90º One Plane | A338-14-00- | N |

CE III

TRACK 48V SURFACE

Corner 90º One Plane




*Electrical connection not included




## TRACK 48V SURFACE SHORT

| | | |
|---|---|---|
| TRACK 48V SURFACE SHORT 1m | A338-21-00- | N |
| TRACK 48V SURFACE SHORT 2m | A338-22-00- | N |
| TRACK 48V SURFACE SHORT 3m | A338-23-00- | N |
| TRACK 48V SURFACE SHORT Corner 90º One Plane | A338-24-00- | N |

CE III

TRACK 48V SURFACE SHORT

Corner 90º One Plane




*Electrical connection not included

48V SYSTEM

# TRACK 48V

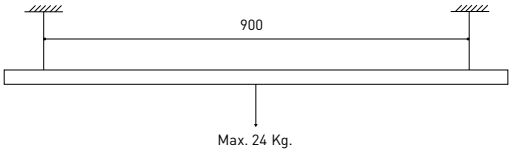


| | | P | V | D |
|---|---|---|---|---|
| CONSTANT VOLTAGE LED POWER SUPPLY | **0434-01-21** | 75W | 48V | 180 x 52 x 30mm |
| | **0434-01-22** | 150W | 48V | 240 x 60 x 49mm |

DROP VOLTAGE TABLE

| | | CABLE LENGHT (m) | | | |
|---|---|---|---|---|---|
| | | 5 | 10 | 20 | 30 |
| **POWER** (W) | **CABLE SECTION** ($mm^2$) | **TRACK LENGHT** (m) | | | |
| 75 | 0,75 | 50 | 50 | 30 | X |
| | 1,5 | 50 | 50 | 50 | 50 |
| 150 | 0,75 | 40 | 15 | X | X |
| | 1,5 | 50 | 40 | 20 | X |

## COMPATIBILITY ACCORDING TO TYPE OF TRACK

### TRACK 48V & TRACK 48V SURFACE SHORT

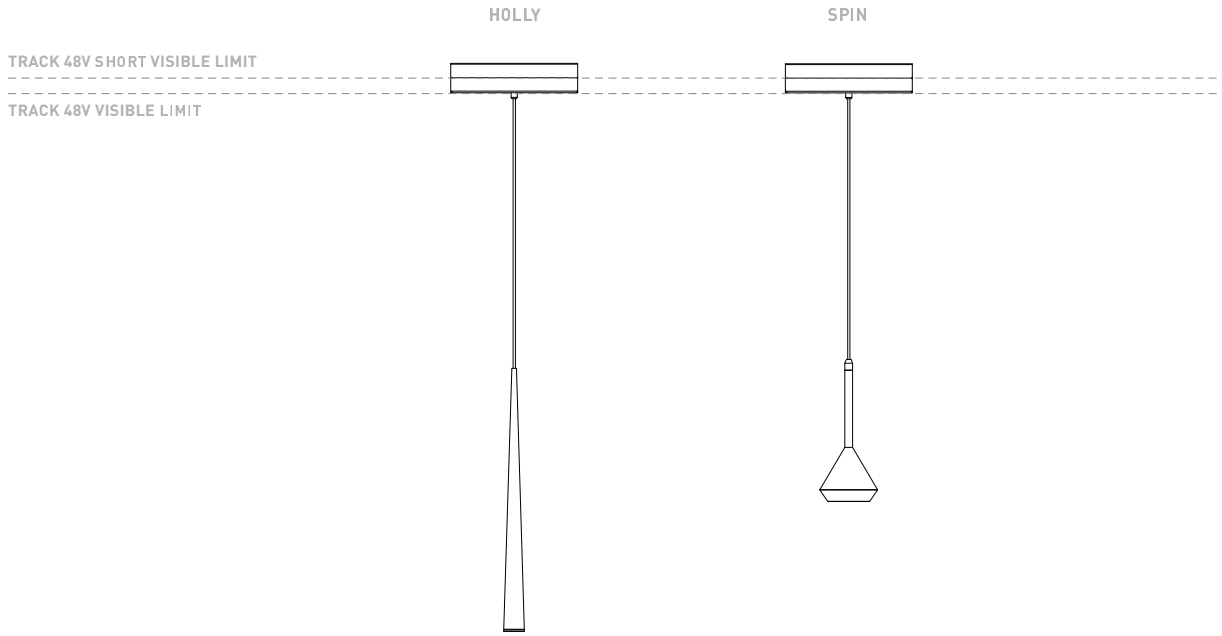





Order with *The 2019 Collection* codes. Products with one single version for both tracks

# TRACK 48V

## ALL 48V TRACK




**TRACK 48V** Live-End Connector

A338-00-01- | N |




**TRACK 48V** Central Connector

A338-00-02- | N |




**TRACK 48V** Corner 90º Connector

A338-00-12- | N |




**TRACK 48V** Wireless Control

0434-01-31- | N | Casambi/AAG Stucchi App

0434-01-32- | N | AAG Stucchi App

## TRIMLESS 48V

**TRACK 48V TRIMLESS** Short T-Bracket

A338-00-03



**TRACK 48V TRIMLESS** Long T-Bracket

A338-00-04



**TRACK 48V TRIMLESS** Straight Joiners (2 units)

A338-00-05



**TRACK 48V TRIMLESS** Plaster Installation Guard 1m

A338-00-21

**TRACK 48V** Clamp for M6 ROD

A338-00-09

*See accessories quantities

**TRACK 48V** Track Clamp

A338-00-10

*See accessories quantities




**TRACK 48V TRIMLESS** Suspension Kit

A338-00-08

*See accessories quantities

*** SUGGESTED MOUNTING ACCESSORIES QUANTITIES**

1000mm - 2 Pcs.
2000mm - 3 Pcs.
3000mm - 4 Pcs.

## SURFACE, SUSPENSION , SURFACE SHORT & SUSPENSION SHORT 48V



**TRACK 48V SURFACE** Straight Joiner

A338-00-11- | N |

COLOUR | N ■ |

# TRACK 48V

## TRIMLESS, SURFACE & SUSPENSION 48V

**TRACK 48V TRIMLESS & SURFACE End**

A338-00-06- | N |

**TRACK 48V TRIMLESS & SURFACE End Feed**

A338-00-07- | N |

## SURFACE SHORT & SUSPENSION SHORT 48V

**TRACK 48V SURFACE SHORT End**

A338-00-18- | N |

**TRACK 48V SURFACE SHORT End Feed**

A338-00-19- | N |

## SURFACE & SURFACE SHORT 48V




**TRACK 48V Power Supply Case**

A338-00-20- | N | NO DIM

*To be installed aside 48V Surface Tracks
Power supply not included

## SUSPENSION & SUSPENSION SHORT 48V




**TRACK 48V Wired Power Supply Case**

A338-00-22- | N | NO DIM

A338-00-23- | N | DIM

*Power supply not included




**TRACK 48V SURFACE Suspension Kit (2 units)**

A338-00-15- | N |

**TRACK 48V SURFACE Suspension Feed Kit**

A338-00-16- | N | NO DIM

A338-00-17- | N | DIM

*For remote power supply

COLOUR | N ■ |

# SPIN 48V

ARKOSLIGHT®

## DIMENSIONS

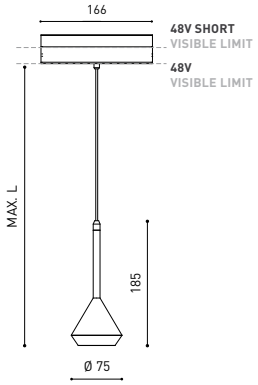


## ACCESSORIES

CORD ACCESOSORY



TRACK 48V OPTIONS

| | PRODUCT |
|---|---|
| Name | SPIN 48V 2M 24° 2700K WT |
| Reference | A3500100WT |
| Color | Textured white |
| RAL | 9016 |
| Category | TRACKLIGHTS |

| | LIGHTING INFORMATION |
|---|---|
| Light source | LED |
| Gross luminous flux | 600 Lm |
| Power | 6,5 W |
| Power values of the system | 6,84 W |
| Colour temperature | 2700 K |
| Colour Rendering Index | CRI>90 |
| Chromatic stability | MacAdam Step 2 |
| Light beam angle | 24° |
| Lighting efficiency | 86% |
| Efficacy | 92 Lm/W |
| Current intensity | 700 mA |
| Dimming | No Dim - Other DIM, please consult |
| Control through bluetooth | Please Consult |
| Driver | Included |
| Electrical insulation class | III |
| Voltage | 48 Vdc |
| Energy efficiency | A+ |
| LED lifespan | L80B10 (Tj=85°C) >60.000h |

| | OTHER DATA |
|---|---|
| Ingress Protection | IP20 |
| Cord length | 2 m |
| Fast adjustment tensioner | No |
| Track type | Track 48V |
| Weight | 530 g. |
| Packaged weight | 666 g. |
| Packaging dimensions | 253 × 152 × 102 mm |
| Units per package | 1 |
| Materials | Aluminium / Polymethyl Methacrylate |

CE

## AWARDS

Spin 48V, reduced dimensions, essential lines and revolutionary geometry in a pendant luminary for accent lighting. Its extra fine wire gives Spin a sense of airiness and flotability. Spin, now available for Arkoslight's low voltage tracklight systems.

Calle N · Pol. Ind. EL OLIVERAL
46394 Ribarroja del Turia · Valencia (Spain)
Tel. +34 961 667 207 · Fax +34 961 667 054
info@arkoslight.com · www.arkoslight.com

28-03-20 / 04:04

5 Year GUARANTEE*

## POLAR DIAGRAM

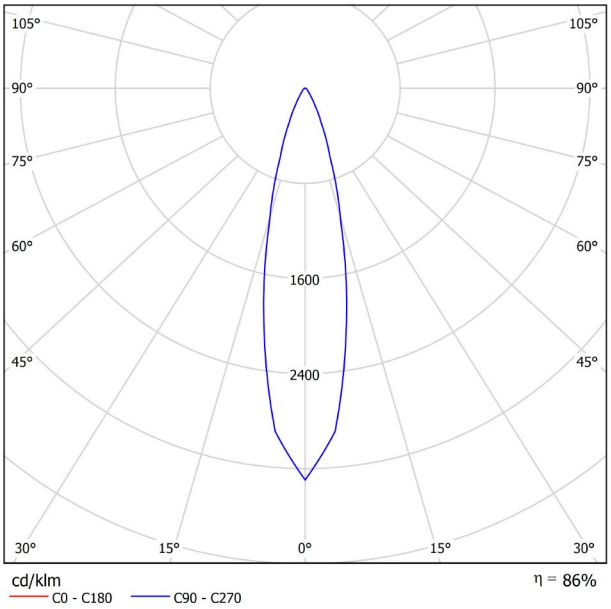


## CONICAL DIAGRAM

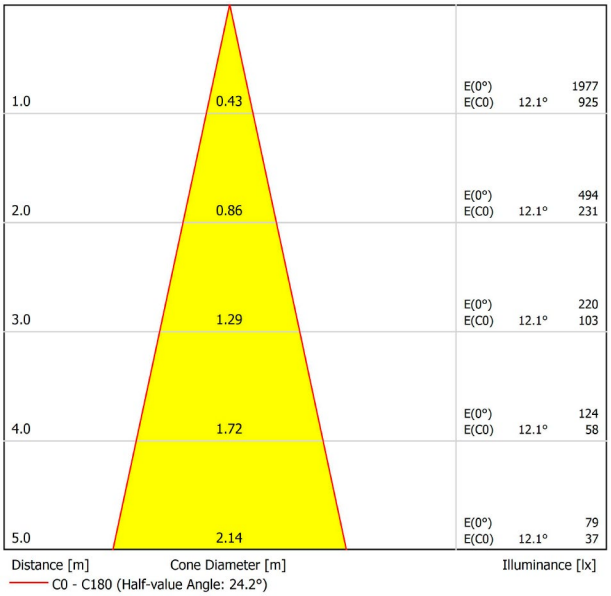

# CORD ACCESSORY

ARKOSLIGHT®

| | PRODUCT |
|---|---|
| Model | Cord Accessory |
| Reference | **02230000** \| **WT** \| **NT** \| |
| Colour | **WT** ☐ RAL 9016 \| **NT** ■ RAL9005 |
| Category | Accessories |

## DIMENSIONAL DRAWING




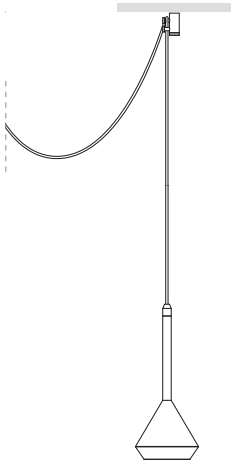

Calle N · Pol. Ind. EL OLIVERAL
46394 Ribarroja del Turia · Valencia (Spain)
Tel. +34 961 667 207 · Fax +34 961 667 054
info@arkoslight.com · www.arkoslight.com

5 Year GUARANTEE*

# TRACK 48V




## TRACK 48V TRIMLESS

| | | |
|---|---|---|
| TRACK 48V TRIMLESS 1m | A338-01-00- | N |
| TRACK 48V TRIMLESS 2m | A338-02-00- | N |
| TRACK 48V TRIMLESS 3m | A338-03-00- | N |
| TRACK 48V TRIMLESS Corner 90º One Plane | A338-06-00- | N |
| TRACK 48V TRIMLESS Corner 90º Two Planes | A338-07-00- | N |

RECOMMENDED FOR INSTALLATIONS WHERE THE PROFILE CAN BE INSTALLED BEFORE THE FALSE PLASTERBOARD CEILING (THICKNESS 12,5mm.)

CE III

TRACK 48V TRIMLESS

Corner 90º One Plane




*Electrical connection not included

TRACK 48V TRIMLESS

Corner 90º Two Planes




*Electrical connection not included




## TRACK 48V SURFACE

| | | |
|---|---|---|
| TRACK 48V SURFACE 1m | A338-11-00- | N |
| TRACK 48V SURFACE 2m | A338-12-00- | N |
| TRACK 48V SURFACE 3m | A338-13-00- | N |
| TRACK 48V SURFACE Corner 90º One Plane | A338-14-00- | N |

CE III

TRACK 48V SURFACE

Corner 90º One Plane




*Electrical connection not included




## TRACK 48V SURFACE SHORT

| | | |
|---|---|---|
| TRACK 48V SURFACE SHORT 1m | A338-21-00- | N |
| TRACK 48V SURFACE SHORT 2m | A338-22-00- | N |
| TRACK 48V SURFACE SHORT 3m | A338-23-00- | N |
| TRACK 48V SURFACE SHORT Corner 90º One Plane | A338-24-00- | N |

CE III

TRACK 48V SURFACE SHORT

Corner 90º One Plane




*Electrical connection not included

48V SYSTEM

# TRACK 48V

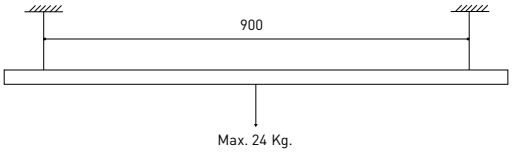


| | | P | V | D |
|---|---|---|---|---|
| CONSTANT VOLTAGE LED POWER SUPPLY | **0434-01-21** | 75W | 48V | 180 x 52 x 30mm |
| | **0434-01-22** | 150W | 48V | 240 x 60 x 49mm |

DROP VOLTAGE TABLE

| | | **CABLE LENGHT** (m) | | | |
|---|---|---|---|---|---|
| | | 5 | 10 | 20 | 30 |
| **POWER** (W) | **CABLE SECTION** ($mm^2$) | **TRACK LENGHT** (m) | | | |
| 75 | 0,75 | 50 | 50 | 30 | X |
| | 1,5 | 50 | 50 | 50 | 50 |
| 150 | 0,75 | 40 | 15 | X | X |
| | 1,5 | 50 | 40 | 20 | X |

## COMPATIBILITY ACCORDING TO TYPE OF TRACK

### TRACK 48V & TRACK 48V SURFACE SHORT

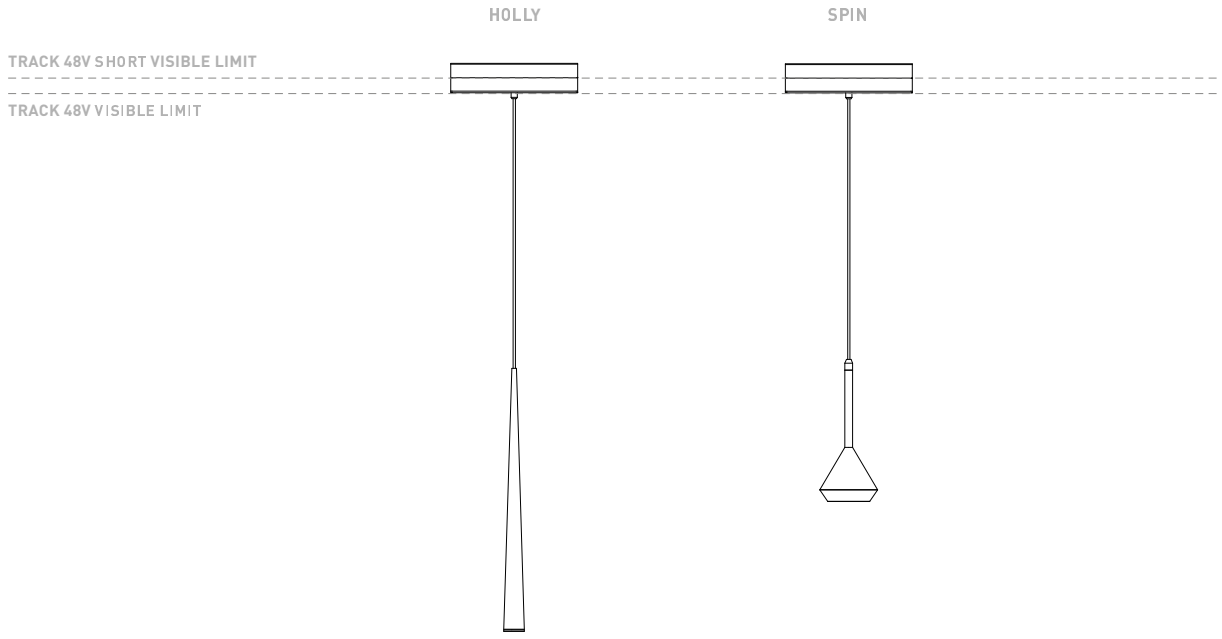





Order with *The 2019 Collection* codes. Products with one single version for both tracks

# TRACK 48V

## ALL 48V TRACK




**TRACK 48V** Live-End Connector

A338-00-01- | N |




**TRACK 48V** Central Connector

A338-00-02- | N |




**TRACK 48V** Corner 90º Connector

A338-00-12- | N |




**TRACK 48V** Wireless Control

0434-01-31- | N | Casambi/AAG Stucchi App

0434-01-32- | N | AAG Stucchi App

## TRIMLESS 48V

**TRACK 48V TRIMLESS** Short T-Bracket

A338-00-03



**TRACK 48V TRIMLESS** Long T-Bracket

A338-00-04



**TRACK 48V TRIMLESS** Straight Joiners (2 units)

A338-00-05



**TRACK 48V TRIMLESS** Plaster Installation Guard 1m

A338-00-21

**TRACK 48V** Clamp for M6 ROD

A338-00-09

*See accessories quantities

**TRACK 48V** Track Clamp

A338-00-10

*See accessories quantities




**TRACK 48V TRIMLESS** Suspension Kit

A338-00-08

*See accessories quantities

*** SUGGESTED MOUNTING ACCESSORIES QUANTITIES**

1000mm - 2 Pcs.
2000mm - 3 Pcs.
3000mm - 4 Pcs.

## SURFACE, SUSPENSION , SURFACE SHORT & SUSPENSION SHORT 48V



**TRACK 48V SURFACE** Straight Joiner

A338-00-11- | N |

COLOUR | N ■ |

# TRACK 48V

## TRIMLESS, SURFACE & SUSPENSION 48V

**TRACK 48V TRIMLESS & SURFACE End**

A338-00-06- | N |

**TRACK 48V TRIMLESS & SURFACE End Feed**

A338-00-07- | N |

## SURFACE SHORT & SUSPENSION SHORT 48V

**TRACK 48V SURFACE SHORT End**

A338-00-18- | N |

**TRACK 48V SURFACE SHORT End Feed**

A338-00-19- | N |

## SURFACE & SURFACE SHORT 48V




**TRACK 48V Power Supply Case**

A338-00-20- | N | NO DIM

*To be installed aside 48V Surface Tracks
Power supply not included

## SUSPENSION & SUSPENSION SHORT 48V




**TRACK 48V Wired Power Supply Case**

A338-00-22- | N | NO DIM

A338-00-23- | N | DIM

*Power supply not included




**TRACK 48V SURFACE Suspension Kit (2 units)**

A338-00-15- | N |

**TRACK 48V SURFACE Suspension Feed Kit**

A338-00-16- | N | NO DIM

A338-00-17- | N | DIM

*For remote power supply

COLOUR | N ■ |

# SPIN 48V

ARKOSLIGHT®

## DIMENSIONS

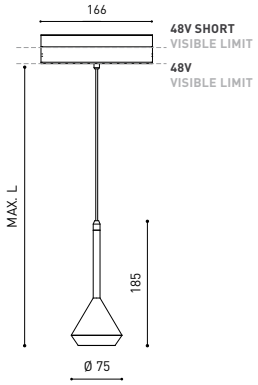


## ACCESSORIES

CORD ACCESOSORY



TRACK 48V OPTIONS

| | PRODUCT |
|---|---|
| Name | SPIN 48V 2M 24º 3000K MC |
| Reference | A3500101MC |
| Color | Metallized copper |
| RAL | Paint of metallic nanoparticles |
| Category | TRACKLIGHTS |

| | LIGHTING INFORMATION |
|---|---|
| Light source | LED |
| Gross luminous flux | 630 Lm |
| Power | 6,5 W |
| Power values of the system | 6,84 W |
| Colour temperature | 3000 K |
| Colour Rendering Index | CRI>90 |
| Chromatic stability | MacAdam Step 2 |
| Light beam angle | 24° |
| Lighting efficiency | 86% |
| Efficacy | 97 Lm/W |
| Current intensity | 700 mA |
| Dimming | No Dim - Other DIM, please consult |
| Control through bluetooth | Please Consult |
| Driver | Included |
| Electrical insulation class | III |
| Voltage | 48 Vdc |
| Energy efficiency | A+ |
| LED lifespan | L80B10 (Tj=85°C) >60.000h |

| | OTHER DATA |
|---|---|
| Ingress Protection | IP20 |
| Cord length | 2 m |
| Fast adjustment tensioner | No |
| Track type | Track 48V |
| Weight | 530 g. |
| Packaged weight | 666 g. |
| Packaging dimensions | 253 × 152 × 102 mm |
| Units per package | 1 |
| Materials | Aluminium / Polymethyl Methacrylate |

CE

## AWARDS

Spin 48V, reduced dimensions, essential lines and revolutionary geometry in a pendant luminary for accent lighting. Its extra fine wire gives Spin a sense of airiness and flotability. Spin, now available for Arkoslight's low voltage tracklight systems.

Calle N · Pol. Ind. EL OLIVERAL
46394 Ribarroja del Turia · Valencia (Spain)
Tel. +34 961 667 207 · Fax +34 961 667 054
info@arkoslight.com · www.arkoslight.com

28-03-20 / 04:00

5 Year GUARANTEE*

## POLAR DIAGRAM

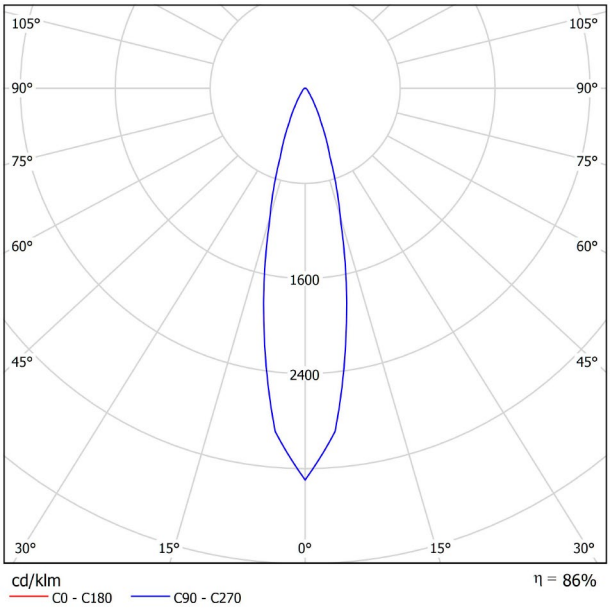


## CONICAL DIAGRAM

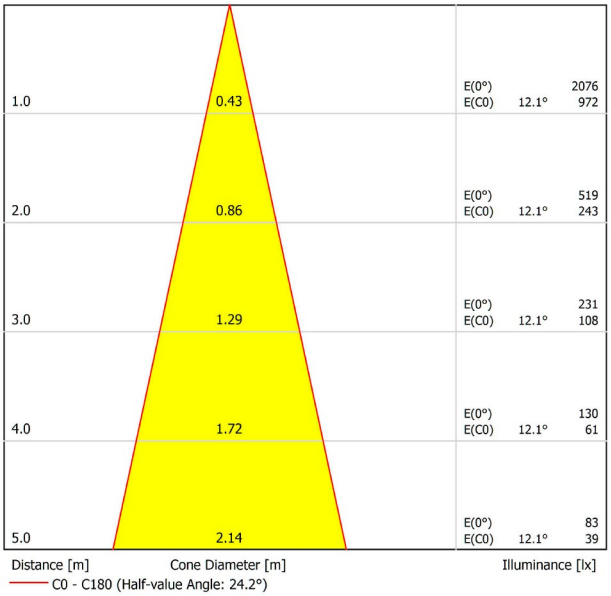

# CORD ACCESSORY

ARKOSLIGHT®

| | PRODUCT |
|---|---|
| Model | Cord Accessory |
| Reference | **02230000** \| **WT** \| **NT** \| |
| Colour | **WT** ☐ RAL 9016 \| **NT** ■ RAL9005 |
| Category | Accessories |

## DIMENSIONAL DRAWING




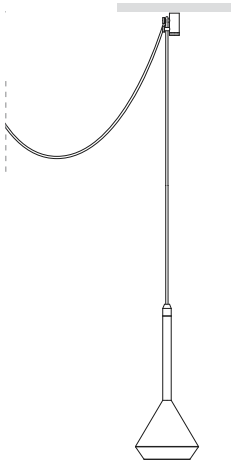

Calle N · Pol. Ind. EL OLIVERAL
46394 Ribarroja del Turia · Valencia (Spain)
Tel. +34 961 667 207 · Fax +34 961 667 054
info@arkoslight.com · www.arkoslight.com

5 Year GUARANTEE*

# TRACK 48V




## TRACK 48V TRIMLESS

| | | |
|---|---|---|
| TRACK 48V TRIMLESS 1m | A338-01-00- | N |
| TRACK 48V TRIMLESS 2m | A338-02-00- | N |
| TRACK 48V TRIMLESS 3m | A338-03-00- | N |
| TRACK 48V TRIMLESS Corner 90º One Plane | A338-06-00- | N |
| TRACK 48V TRIMLESS Corner 90º Two Planes | A338-07-00- | N |

RECOMMENDED FOR INSTALLATIONS WHERE THE PROFILE CAN BE INSTALLED BEFORE THE FALSE PLASTERBOARD CEILING (THICKNESS 12,5mm.)

CE III

TRACK 48V TRIMLESS

Corner 90º One Plane




*Electrical connection not included

TRACK 48V TRIMLESS

Corner 90º Two Planes




*Electrical connection not included




## TRACK 48V SURFACE

| | | |
|---|---|---|
| TRACK 48V SURFACE 1m | A338-11-00- | N |
| TRACK 48V SURFACE 2m | A338-12-00- | N |
| TRACK 48V SURFACE 3m | A338-13-00- | N |
| TRACK 48V SURFACE Corner 90º One Plane | A338-14-00- | N |

CE III

TRACK 48V SURFACE

Corner 90º One Plane




*Electrical connection not included




## TRACK 48V SURFACE SHORT

| | | |
|---|---|---|
| TRACK 48V SURFACE SHORT 1m | A338-21-00- | N |
| TRACK 48V SURFACE SHORT 2m | A338-22-00- | N |
| TRACK 48V SURFACE SHORT 3m | A338-23-00- | N |
| TRACK 48V SURFACE SHORT Corner 90º One Plane | A338-24-00- | N |

CE III

TRACK 48V SURFACE SHORT

Corner 90º One Plane




*Electrical connection not included

48V SYSTEM

# TRACK 48V

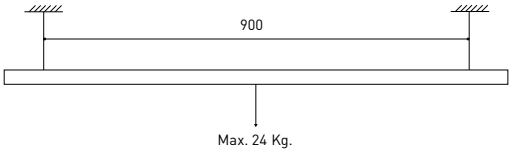


| | | P | V | D |
|---|---|---|---|---|
| CONSTANT VOLTAGE LED POWER SUPPLY | **0434-01-21** | 75W | 48V | 180 x 52 x 30mm |
| | **0434-01-22** | 150W | 48V | 240 x 60 x 49mm |

DROP VOLTAGE TABLE

| | | **CABLE LENGHT** (m) | | | |
|---|---|---|---|---|---|
| | | 5 | 10 | 20 | 30 |
| **POWER** (W) | **CABLE SECTION** ($mm^2$) | **TRACK LENGHT** (m) | | | |
| 75 | 0,75 | 50 | 50 | 30 | X |
| | 1,5 | 50 | 50 | 50 | 50 |
| 150 | 0,75 | 40 | 15 | X | X |
| | 1,5 | 50 | 40 | 20 | X |

## COMPATIBILITY ACCORDING TO TYPE OF TRACK

### TRACK 48V & TRACK 48V SURFACE SHORT

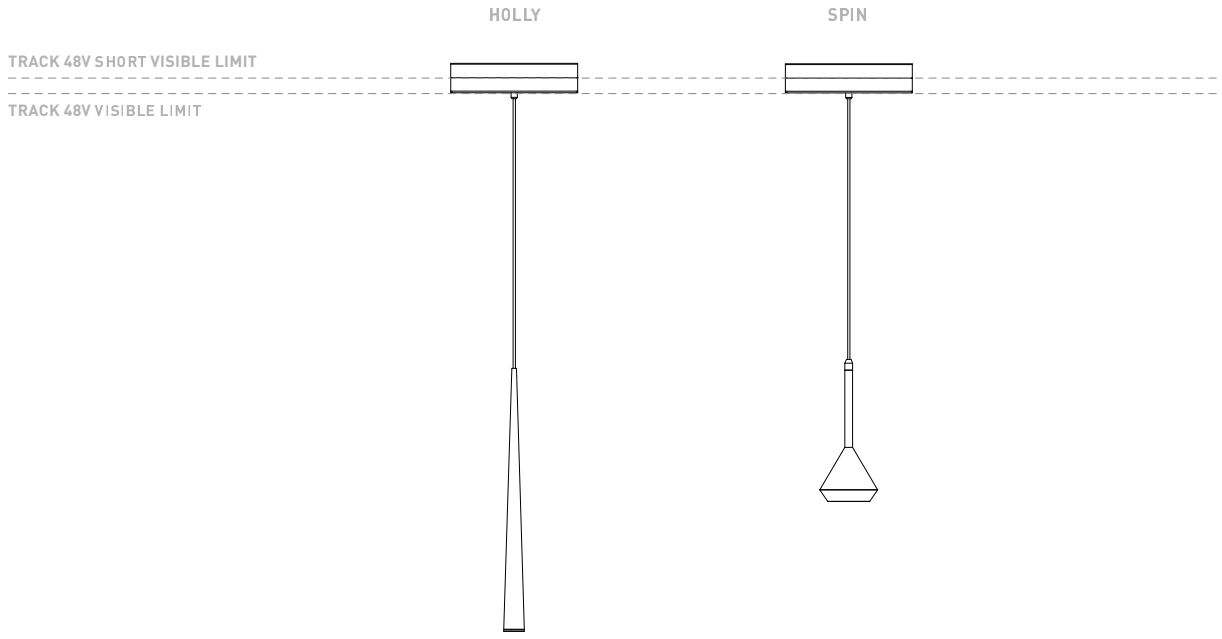





Order with *The 2019 Collection* codes. Products with one single version for both tracks

# TRACK 48V

## ALL 48V TRACK




**TRACK 48V** Live-End Connector

A338-00-01- | N |




**TRACK 48V** Central Connector

A338-00-02- | N |




**TRACK 48V** Corner 90º Connector

A338-00-12- | N |




**TRACK 48V** Wireless Control

0434-01-31- | N | Casambi/AAG Stucchi App

0434-01-32- | N | AAG Stucchi App

## TRIMLESS 48V

**TRACK 48V TRIMLESS** Short T-Bracket

A338-00-03



**TRACK 48V TRIMLESS** Long T-Bracket

A338-00-04



**TRACK 48V TRIMLESS** Straight Joiners (2 units)

A338-00-05



**TRACK 48V TRIMLESS** Plaster Installation Guard 1m

A338-00-21

**TRACK 48V** Clamp for M6 ROD

A338-00-09

*See accessories quantities

**TRACK 48V** Track Clamp

A338-00-10

*See accessories quantities




**TRACK 48V TRIMLESS** Suspension Kit

A338-00-08

*See accessories quantities

*** SUGGESTED MOUNTING ACCESSORIES QUANTITIES**

1000mm - 2 Pcs.
2000mm - 3 Pcs.
3000mm - 4 Pcs.

## SURFACE, SUSPENSION , SURFACE SHORT & SUSPENSION SHORT 48V



**TRACK 48V SURFACE** Straight Joiner

A338-00-11- | N |

COLOUR | N ■ |

# TRACK 48V

## TRIMLESS, SURFACE & SUSPENSION 48V

**TRACK 48V TRIMLESS & SURFACE End**

A338-00-06- | N |

**TRACK 48V TRIMLESS & SURFACE End Feed**

A338-00-07- | N |

## SURFACE SHORT & SUSPENSION SHORT 48V

**TRACK 48V SURFACE SHORT End**

A338-00-18- | N |

**TRACK 48V SURFACE SHORT End Feed**

A338-00-19- | N |

## SURFACE & SURFACE SHORT 48V




**TRACK 48V Power Supply Case**

A338-00-20- | N | NO DIM

*To be installed aside 48V Surface Tracks
Power supply not included

## SUSPENSION & SUSPENSION SHORT 48V




**TRACK 48V Wired Power Supply Case**

A338-00-22- | N | NO DIM

A338-00-23- | N | DIM

*Power supply not included




**TRACK 48V SURFACE Suspension Kit (2 units)**

A338-00-15- | N |

**TRACK 48V SURFACE Suspension Feed Kit**

A338-00-16- | N | NO DIM

A338-00-17- | N | DIM

*For remote power supply

COLOUR | N ■ |

# SPIN 48V

ARKOSLIGHT®

## DIMENSIONS

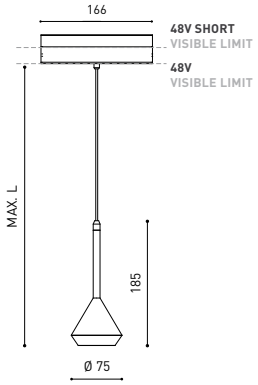


## ACCESSORIES

CORD ACCESOSORY



TRACK 48V OPTIONS

| | PRODUCT |
|---|---|
| Name | SPIN 48V 2M 24º 3000K MG |
| Reference | A3500101MG |
| Color | Metallized gold |
| RAL | Paint of metallic nanoparticles |
| Category | TRACKLIGHTS |

| | LIGHTING INFORMATION |
|---|---|
| Light source | LED |
| Gross luminous flux | 630 Lm |
| Power | 6,5 W |
| Power values of the system | 6,84 W |
| Colour temperature | 3000 K |
| Colour Rendering Index | CRI>90 |
| Chromatic stability | MacAdam Step 2 |
| Light beam angle | 24° |
| Lighting efficiency | 86% |
| Efficacy | 97 Lm/W |
| Current intensity | 700 mA |
| Dimming | No Dim - Other DIM, please consult |
| Control through bluetooth | Please Consult |
| Driver | Included |
| Electrical insulation class | III |
| Voltage | 48 Vdc |
| Energy efficiency | A+ |
| LED lifespan | L80B10 (Tj=85°C) >60.000h |

| | OTHER DATA |
|---|---|
| Ingress Protection | IP20 |
| Cord length | 2 m |
| Fast adjustment tensioner | No |
| Track type | Track 48V |
| Weight | 530 g. |
| Packaged weight | 666 g. |
| Packaging dimensions | 253 × 152 × 102 mm |
| Units per package | 1 |
| Materials | Aluminium / Polymethyl Methacrylate |

CE

## AWARDS

Spin 48V, reduced dimensions, essential lines and revolutionary geometry in a pendant luminary for accent lighting. Its extra fine wire gives Spin a sense of airiness and flotability. Spin, now available for Arkoslight's low voltage tracklight systems.

Calle N · Pol. Ind. EL OLIVERAL
46394 Ribarroja del Turia · Valencia (Spain)
Tel. +34 961 667 207 · Fax +34 961 667 054
info@arkoslight.com · www.arkoslight.com

28-03-20 / 04:00

5 Year GUARANTEE*

## POLAR DIAGRAM

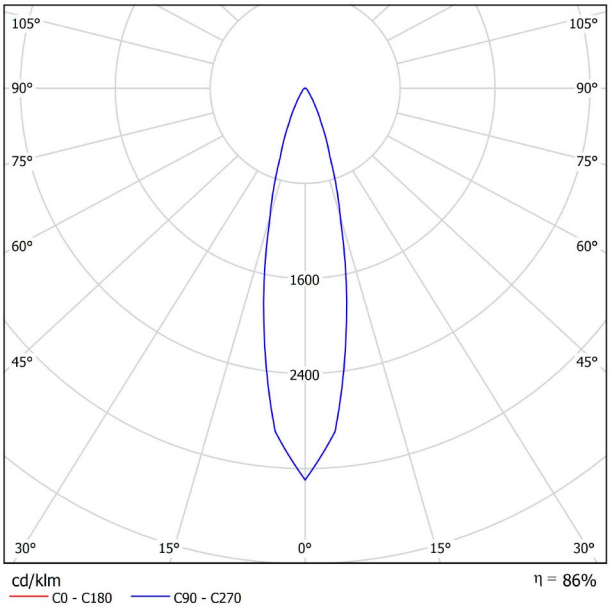


## CONICAL DIAGRAM

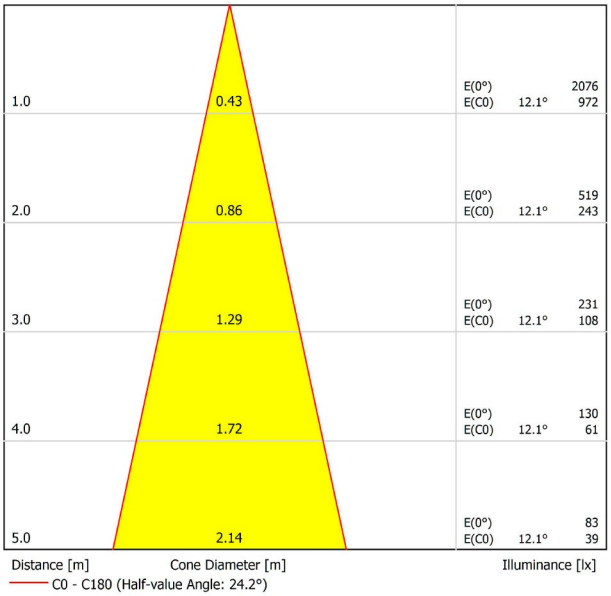

# CORD ACCESSORY

ARKOSLIGHT®

| | PRODUCT |
|---|---|
| Model | Cord Accessory |
| Reference | **02230000** \| **WT** \| **NT** \| |
| Colour | **WT** ☐ RAL 9016 \| **NT** ■ RAL9005 |
| Category | Accessories |

## DIMENSIONAL DRAWING




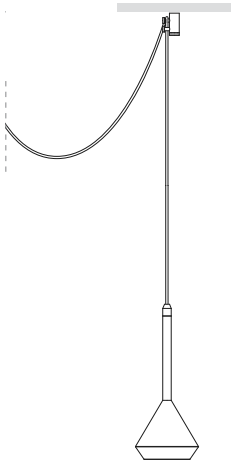

Calle N · Pol. Ind. EL OLIVERAL
46394 Ribarroja del Turia · Valencia (Spain)
Tel. +34 961 667 207 · Fax +34 961 667 054
info@arkoslight.com · www.arkoslight.com

5 Year GUARANTEE*

# TRACK 48V




## TRACK 48V TRIMLESS

| | | |
|---|---|---|
| TRACK 48V TRIMLESS 1m | A338-01-00- | N |
| TRACK 48V TRIMLESS 2m | A338-02-00- | N |
| TRACK 48V TRIMLESS 3m | A338-03-00- | N |
| TRACK 48V TRIMLESS Corner 90º One Plane | A338-06-00- | N |
| TRACK 48V TRIMLESS Corner 90º Two Planes | A338-07-00- | N |

RECOMMENDED FOR INSTALLATIONS WHERE THE PROFILE CAN BE INSTALLED BEFORE THE FALSE PLASTERBOARD CEILING (THICKNESS 12,5mm.)

CE III

TRACK 48V TRIMLESS

Corner 90º One Plane




*Electrical connection not included

TRACK 48V TRIMLESS

Corner 90º Two Planes




*Electrical connection not included




## TRACK 48V SURFACE

| | | |
|---|---|---|
| TRACK 48V SURFACE 1m | A338-11-00- | N |
| TRACK 48V SURFACE 2m | A338-12-00- | N |
| TRACK 48V SURFACE 3m | A338-13-00- | N |
| TRACK 48V SURFACE Corner 90º One Plane | A338-14-00- | N |

CE III

TRACK 48V SURFACE

Corner 90º One Plane




*Electrical connection not included




## TRACK 48V SURFACE SHORT

| | | |
|---|---|---|
| TRACK 48V SURFACE SHORT 1m | A338-21-00- | N |
| TRACK 48V SURFACE SHORT 2m | A338-22-00- | N |
| TRACK 48V SURFACE SHORT 3m | A338-23-00- | N |
| TRACK 48V SURFACE SHORT Corner 90º One Plane | A338-24-00- | N |

CE III

TRACK 48V SURFACE SHORT

Corner 90º One Plane




*Electrical connection not included

48V SYSTEM

# TRACK 48V

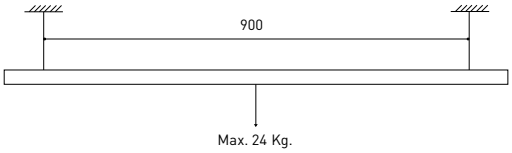


| | | P | V | D |
|---|---|---|---|---|
| CONSTANT VOLTAGE LED POWER SUPPLY | **0434-01-21** | 75W | 48V | 180 x 52 x 30mm |
| | **0434-01-22** | 150W | 48V | 240 x 60 x 49mm |

DROP VOLTAGE TABLE

| | | **CABLE LENGHT** (m) | | | |
|---|---|---|---|---|---|
| | | 5 | 10 | 20 | 30 |
| **POWER** (W) | **CABLE SECTION** ($mm^2$) | **TRACK LENGHT** (m) | | | |
| 75 | 0,75 | 50 | 50 | 30 | X |
| | 1,5 | 50 | 50 | 50 | 50 |
| 150 | 0,75 | 40 | 15 | X | X |
| | 1,5 | 50 | 40 | 20 | X |

## COMPATIBILITY ACCORDING TO TYPE OF TRACK

### TRACK 48V & TRACK 48V SURFACE SHORT

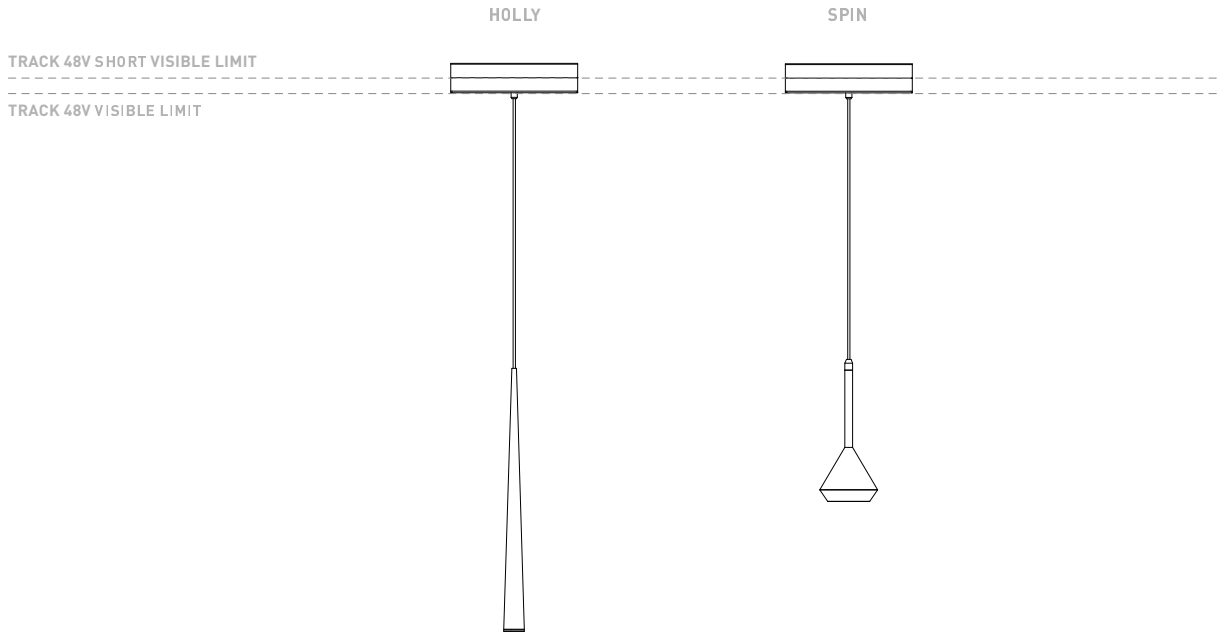





Order with *The 2019 Collection* codes. Products with one single version for both tracks

# TRACK 48V

## ALL 48V TRACK




**TRACK 48V** Live-End Connector

A338-00-01- | N |




**TRACK 48V** Central Connector

A338-00-02- | N |




**TRACK 48V** Corner 90º Connector

A338-00-12- | N |




**TRACK 48V** Wireless Control

0434-01-31- | N | Casambi/AAG Stucchi App

0434-01-32- | N | AAG Stucchi App

## TRIMLESS 48V

**TRACK 48V TRIMLESS** Short T-Bracket

A338-00-03



**TRACK 48V TRIMLESS** Long T-Bracket

A338-00-04



**TRACK 48V TRIMLESS** Straight Joiners (2 units)

A338-00-05



**TRACK 48V TRIMLESS** Plaster Installation Guard 1m

A338-00-21

**TRACK 48V** Clamp for M6 ROD

A338-00-09

*See accessories quantities

**TRACK 48V** Track Clamp

A338-00-10

*See accessories quantities




**TRACK 48V TRIMLESS** Suspension Kit

A338-00-08

*See accessories quantities

*** SUGGESTED MOUNTING ACCESSORIES QUANTITIES**

1000mm - 2 Pcs.
2000mm - 3 Pcs.
3000mm - 4 Pcs.

## SURFACE, SUSPENSION , SURFACE SHORT & SUSPENSION SHORT 48V



**TRACK 48V SURFACE** Straight Joiner

A338-00-11- | N |

COLOUR | N ■ |

# TRACK 48V

## TRIMLESS, SURFACE & SUSPENSION 48V

**TRACK 48V TRIMLESS & SURFACE End**

A338-00-06- | N |

**TRACK 48V TRIMLESS & SURFACE End Feed**

A338-00-07- | N |

## SURFACE SHORT & SUSPENSION SHORT 48V

**TRACK 48V SURFACE SHORT End**

A338-00-18- | N |

**TRACK 48V SURFACE SHORT End Feed**

A338-00-19- | N |

## SURFACE & SURFACE SHORT 48V




**TRACK 48V Power Supply Case**

A338-00-20- | N | NO DIM

*To be installed aside 48V Surface Tracks
Power supply not included

## SUSPENSION & SUSPENSION SHORT 48V




**TRACK 48V Wired Power Supply Case**

A338-00-22- | N | NO DIM

A338-00-23- | N | DIM

*Power supply not included




**TRACK 48V SURFACE Suspension Kit (2 units)**

A338-00-15- | N |

**TRACK 48V SURFACE Suspension Feed Kit**

A338-00-16- | N | NO DIM

A338-00-17- | N | DIM

*For remote power supply

COLOUR | N ■ |

# SPIN 48V

ARKOSLIGHT®

## DIMENSIONS

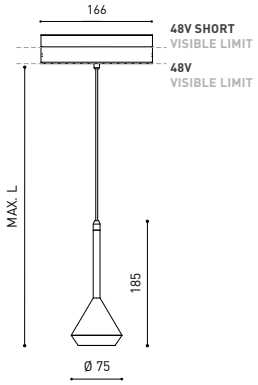


## ACCESSORIES

CORD ACCESOSORY



TRACK 48V OPTIONS

| | PRODUCT |
|---|---|
| Name | SPIN 48V 2M 24º 3000K NT |
| Reference | A3500101NT |
| Color | Textured black |
| RAL | 9005 |
| Category | TRACKLIGHTS |

| | LIGHTING INFORMATION |
|---|---|
| Light source | LED |
| Gross luminous flux | 630 Lm |
| Power | 6,5 W |
| Power values of the system | 6,84 W |
| Colour temperature | 3000 K |
| Colour Rendering Index | CRI>90 |
| Chromatic stability | MacAdam Step 2 |
| Light beam angle | 24° |
| Lighting efficiency | 86% |
| Efficacy | 97 Lm/W |
| Current intensity | 700 mA |
| Dimming | No Dim - Other DIM, please consult |
| Control through bluetooth | Please Consult |
| Driver | Included |
| Electrical insulation class | III |
| Voltage | 48 Vdc |
| Energy efficiency | A+ |
| LED lifespan | L80B10 (Tj=85°C) >60.000h |

| | OTHER DATA |
|---|---|
| Ingress Protection | IP20 |
| Cord length | 2 m |
| Fast adjustment tensioner | No |
| Track type | Track 48V |
| Weight | 530 g. |
| Packaged weight | 666 g. |
| Packaging dimensions | 253 × 152 × 102 mm |
| Units per package | 1 |
| Materials | Aluminium / Polymethyl Methacrylate |

CE

## AWARDS

Spin 48V, reduced dimensions, essential lines and revolutionary geometry in a pendant luminary for accent lighting. Its extra fine wire gives Spin a sense of airiness and flotability. Spin, now available for Arkoslight's low voltage tracklight systems.

Calle N · Pol. Ind. EL OLIVERAL
46394 Ribarroja del Turia · Valencia (Spain)
Tel. +34 961 667 207 · Fax +34 961 667 054
info@arkoslight.com · www.arkoslight.com

28-03-20 / 03:56

5 Year GUARANTEE*

## POLAR DIAGRAM

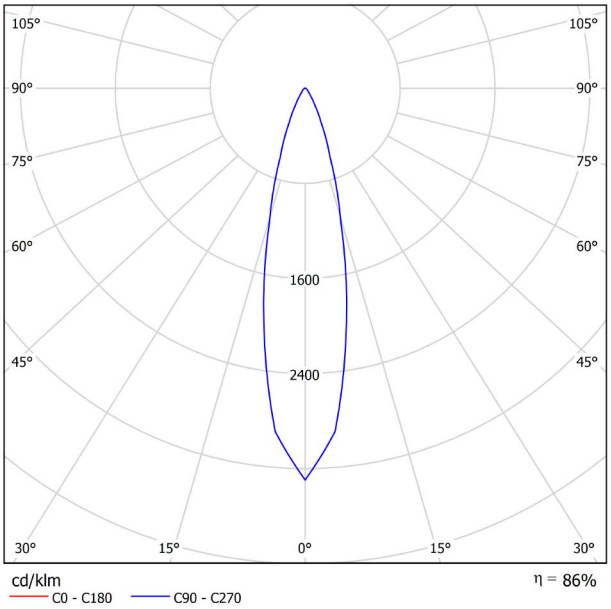


## CONICAL DIAGRAM

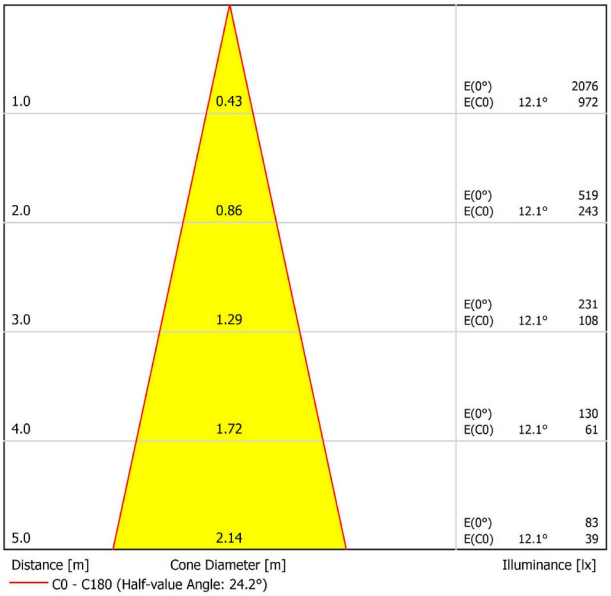

# CORD ACCESSORY

ARKOSLIGHT®

| | PRODUCT |
|---|---|
| Model | Cord Accessory |
| Reference | **02230000** \| **WT** \| **NT** \| |
| Colour | **WT** ☐ RAL 9016 \| **NT** ■ RAL9005 |
| Category | Accessories |

## DIMENSIONAL DRAWING




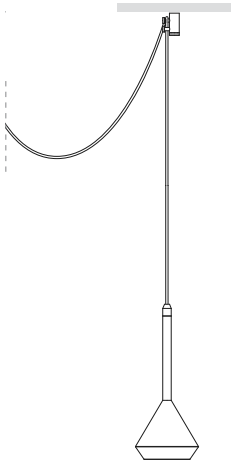

Calle N · Pol. Ind. EL OLIVERAL
46394 Ribarroja del Turia · Valencia (Spain)
Tel. +34 961 667 207 · Fax +34 961 667 054
info@arkoslight.com · www.arkoslight.com

5 Year GUARANTEE*

# TRACK 48V




## TRACK 48V TRIMLESS

| | | |
|---|---|---|
| TRACK 48V TRIMLESS 1m | A338-01-00- | N |
| TRACK 48V TRIMLESS 2m | A338-02-00- | N |
| TRACK 48V TRIMLESS 3m | A338-03-00- | N |
| TRACK 48V TRIMLESS Corner 90º One Plane | A338-06-00- | N |
| TRACK 48V TRIMLESS Corner 90º Two Planes | A338-07-00- | N |

RECOMMENDED FOR INSTALLATIONS WHERE THE PROFILE CAN BE INSTALLED BEFORE THE FALSE PLASTERBOARD CEILING (THICKNESS 12,5mm.)

CE III

TRACK 48V TRIMLESS

Corner 90º One Plane




*Electrical connection not included

TRACK 48V TRIMLESS

Corner 90º Two Planes




*Electrical connection not included




## TRACK 48V SURFACE

| | | |
|---|---|---|
| TRACK 48V SURFACE 1m | A338-11-00- | N |
| TRACK 48V SURFACE 2m | A338-12-00- | N |
| TRACK 48V SURFACE 3m | A338-13-00- | N |
| TRACK 48V SURFACE Corner 90º One Plane | A338-14-00- | N |

CE III

TRACK 48V SURFACE

Corner 90º One Plane




*Electrical connection not included




## TRACK 48V SURFACE SHORT

| | | |
|---|---|---|
| TRACK 48V SURFACE SHORT 1m | A338-21-00- | N |
| TRACK 48V SURFACE SHORT 2m | A338-22-00- | N |
| TRACK 48V SURFACE SHORT 3m | A338-23-00- | N |
| TRACK 48V SURFACE SHORT Corner 90º One Plane | A338-24-00- | N |

CE III

TRACK 48V SURFACE SHORT

Corner 90º One Plane




*Electrical connection not included

48V SYSTEM

# TRACK 48V

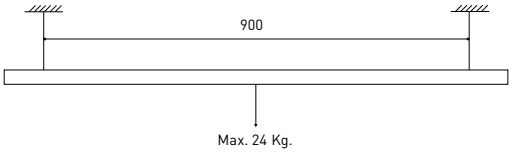


| | | P | V | D |
|---|---|---|---|---|
| CONSTANT VOLTAGE LED POWER SUPPLY | **0434-01-21** | 75W | 48V | 180 x 52 x 30mm |
| | **0434-01-22** | 150W | 48V | 240 x 60 x 49mm |

DROP VOLTAGE TABLE

| | | CABLE LENGHT (m) | | | |
|---|---|---|---|---|---|
| | | 5 | 10 | 20 | 30 |
| **POWER** (W) | **CABLE SECTION** ($mm^2$) | **TRACK LENGHT** (m) | | | |
| 75 | 0,75 | 50 | 50 | 30 | X |
| | 1,5 | 50 | 50 | 50 | 50 |
| 150 | 0,75 | 40 | 15 | X | X |
| | 1,5 | 50 | 40 | 20 | X |

## COMPATIBILITY ACCORDING TO TYPE OF TRACK

### TRACK 48V & TRACK 48V SURFACE SHORT

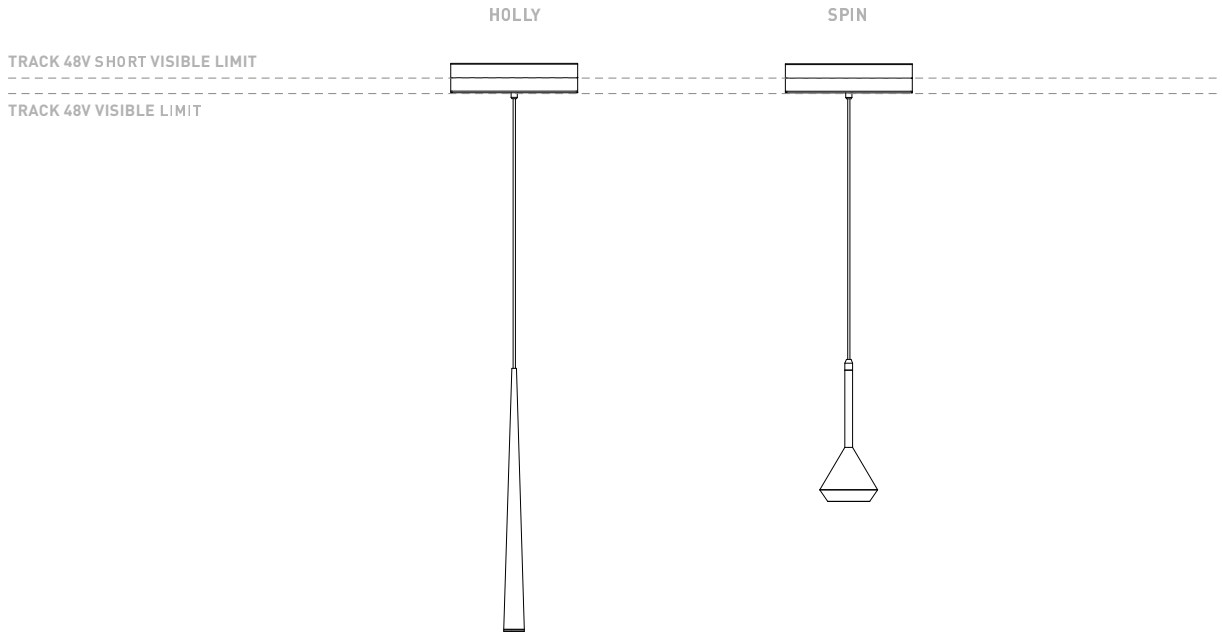





Order with *The 2019 Collection* codes. Products with one single version for both tracks

# TRACK 48V

## ALL 48V TRACK




**TRACK 48V** Live-End Connector

A338-00-01- | N |




**TRACK 48V** Central Connector

A338-00-02- | N |




**TRACK 48V** Corner 90º Connector

A338-00-12- | N |




**TRACK 48V** Wireless Control

0434-01-31- | N | Casambi/AAG Stucchi App

0434-01-32- | N | AAG Stucchi App

## TRIMLESS 48V

**TRACK 48V TRIMLESS** Short T-Bracket

A338-00-03



**TRACK 48V TRIMLESS** Long T-Bracket

A338-00-04



**TRACK 48V TRIMLESS** Straight Joiners (2 units)

A338-00-05



**TRACK 48V TRIMLESS** Plaster Installation Guard 1m

A338-00-21

**TRACK 48V** Clamp for M6 ROD

A338-00-09

*See accessories quantities

**TRACK 48V** Track Clamp

A338-00-10

*See accessories quantities




**TRACK 48V TRIMLESS** Suspension Kit

A338-00-08

*See accessories quantities

*** SUGGESTED MOUNTING ACCESSORIES QUANTITIES**

1000mm - 2 Pcs.
2000mm - 3 Pcs.
3000mm - 4 Pcs.

## SURFACE, SUSPENSION , SURFACE SHORT & SUSPENSION SHORT 48V



**TRACK 48V SURFACE** Straight Joiner

A338-00-11- | N |

COLOUR | N ■ |

# TRACK 48V

## TRIMLESS, SURFACE & SUSPENSION 48V

**TRACK 48V TRIMLESS & SURFACE End**

A338-00-06- | N |

**TRACK 48V TRIMLESS & SURFACE End Feed**

A338-00-07- | N |

## SURFACE SHORT & SUSPENSION SHORT 48V

**TRACK 48V SURFACE SHORT End**

A338-00-18- | N |

**TRACK 48V SURFACE SHORT End Feed**

A338-00-19- | N |

## SURFACE & SURFACE SHORT 48V




**TRACK 48V Power Supply Case**

A338-00-20- | N | NO DIM

*To be installed aside 48V Surface Tracks
Power supply not included

## SUSPENSION & SUSPENSION SHORT 48V




**TRACK 48V Wired Power Supply Case**

A338-00-22- | N | NO DIM

A338-00-23- | N | DIM

*Power supply not included




**TRACK 48V SURFACE Suspension Kit (2 units)**

A338-00-15- | N |

**TRACK 48V SURFACE Suspension Feed Kit**

A338-00-16- | N | NO DIM

A338-00-17- | N | DIM

*For remote power supply

COLOUR | N ■ |

# SPIN 48V

ARKOSLIGHT®

## DIMENSIONS

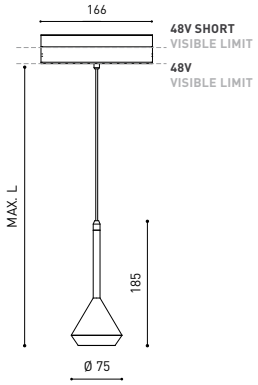


## ACCESSORIES

CORD ACCESOSORY



TRACK 48V OPTIONS

| | PRODUCT |
|---|---|
| Name | SPIN 48V 2M 24º 3000K WT |
| Reference | A3500101WT |
| Color | Textured white |
| RAL | 9016 |
| Category | TRACKLIGHTS |

| | LIGHTING INFORMATION |
|---|---|
| Light source | LED |
| Gross luminous flux | 630 Lm |
| Power | 6,5 W |
| Power values of the system | 6,84 W |
| Colour temperature | 3000 K |
| Colour Rendering Index | CRI>90 |
| Chromatic stability | MacAdam Step 2 |
| Light beam angle | 24° |
| Lighting efficiency | 86% |
| Efficacy | 97 Lm/W |
| Current intensity | 700 mA |
| Dimming | No Dim - Other DIM, please consult |
| Control through bluetooth | Please Consult |
| Driver | Included |
| Electrical insulation class | III |
| Voltage | 48 Vdc |
| Energy efficiency | A+ |
| LED lifespan | L80B10 (Tj=85°C) >60.000h |

| | OTHER DATA |
|---|---|
| Ingress Protection | IP20 |
| Cord length | 2 m |
| Fast adjustment tensioner | No |
| Track type | Track 48V |
| Weight | 530 g. |
| Packaged weight | 666 g. |
| Packaging dimensions | 253 × 152 × 102 mm |
| Units per package | 1 |
| Materials | Aluminium / Polymethyl Methacrylate |

CE

## AWARDS

Spin 48V, reduced dimensions, essential lines and revolutionary geometry in a pendant luminary for accent lighting. Its extra fine wire gives Spin a sense of airiness and flotability. Spin, now available for Arkoslight's low voltage tracklight systems.

Calle N · Pol. Ind. EL OLIVERAL
46394 Ribarroja del Turia · Valencia (Spain)
Tel. +34 961 667 207 · Fax +34 961 667 054
info@arkoslight.com · www.arkoslight.com

28-03-20 / 03:56

5 Year GUARANTEE*

## POLAR DIAGRAM

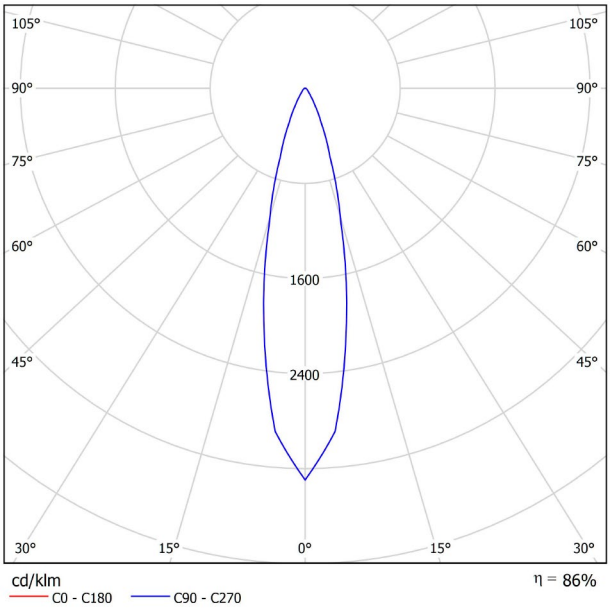


## CONICAL DIAGRAM

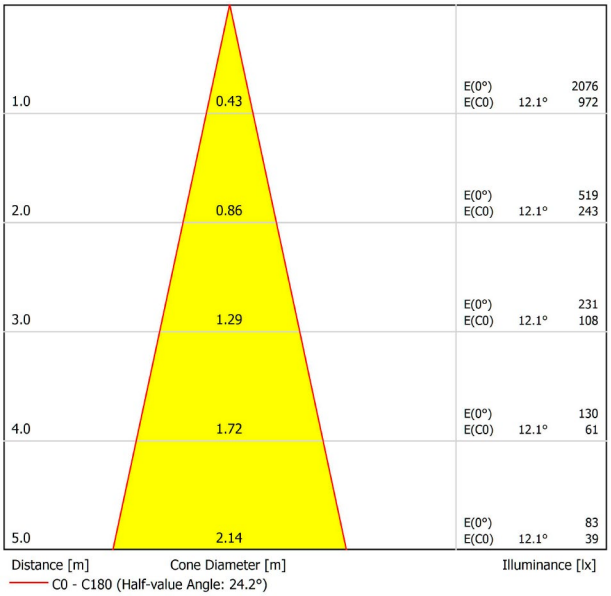

# CORD ACCESSORY

ARKOSLIGHT®

| | PRODUCT |
|---|---|
| Model | Cord Accessory |
| Reference | **02230000** \| **WT** \| **NT** \| |
| Colour | **WT** ☐ RAL 9016 \| **NT** ■ RAL9005 |
| Category | Accessories |

## DIMENSIONAL DRAWING




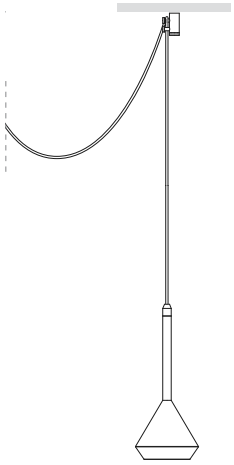

Calle N · Pol. Ind. EL OLIVERAL
46394 Ribarroja del Turia · Valencia (Spain)
Tel. +34 961 667 207 · Fax +34 961 667 054
info@arkoslight.com · www.arkoslight.com

5 Year GUARANTEE*

# TRACK 48V




## TRACK 48V TRIMLESS

| | | |
|---|---|---|
| TRACK 48V TRIMLESS 1m | A338-01-00- | N |
| TRACK 48V TRIMLESS 2m | A338-02-00- | N |
| TRACK 48V TRIMLESS 3m | A338-03-00- | N |
| TRACK 48V TRIMLESS Corner 90º One Plane | A338-06-00- | N |
| TRACK 48V TRIMLESS Corner 90º Two Planes | A338-07-00- | N |

RECOMMENDED FOR INSTALLATIONS WHERE THE PROFILE CAN BE INSTALLED BEFORE THE FALSE PLASTERBOARD CEILING (THICKNESS 12,5mm.)

CE III

TRACK 48V TRIMLESS

Corner 90º One Plane




*Electrical connection not included

TRACK 48V TRIMLESS

Corner 90º Two Planes




*Electrical connection not included




## TRACK 48V SURFACE

| | | |
|---|---|---|
| TRACK 48V SURFACE 1m | A338-11-00- | N |
| TRACK 48V SURFACE 2m | A338-12-00- | N |
| TRACK 48V SURFACE 3m | A338-13-00- | N |
| TRACK 48V SURFACE Corner 90º One Plane | A338-14-00- | N |

CE III

TRACK 48V SURFACE

Corner 90º One Plane




*Electrical connection not included




## TRACK 48V SURFACE SHORT

| | | |
|---|---|---|
| TRACK 48V SURFACE SHORT 1m | A338-21-00- | N |
| TRACK 48V SURFACE SHORT 2m | A338-22-00- | N |
| TRACK 48V SURFACE SHORT 3m | A338-23-00- | N |
| TRACK 48V SURFACE SHORT Corner 90º One Plane | A338-24-00- | N |

CE III

TRACK 48V SURFACE SHORT

Corner 90º One Plane




*Electrical connection not included

48V SYSTEM

# TRACK 48V

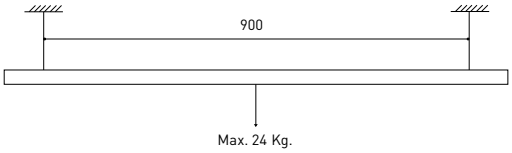


| | | P | V | D |
|---|---|---|---|---|
| CONSTANT VOLTAGE LED POWER SUPPLY | **0434-01-21** | 75W | 48V | 180 x 52 x 30mm |
| | **0434-01-22** | 150W | 48V | 240 x 60 x 49mm |

DROP VOLTAGE TABLE

| | | CABLE LENGHT (m) | | | |
|---|---|---|---|---|---|
| | | 5 | 10 | 20 | 30 |
| **POWER** (W) | **CABLE SECTION** ($mm^2$) | **TRACK LENGHT** (m) | | | |
| 75 | 0,75 | 50 | 50 | 30 | X |
| | 1,5 | 50 | 50 | 50 | 50 |
| 150 | 0,75 | 40 | 15 | X | X |
| | 1,5 | 50 | 40 | 20 | X |

## COMPATIBILITY ACCORDING TO TYPE OF TRACK

### TRACK 48V & TRACK 48V SURFACE SHORT

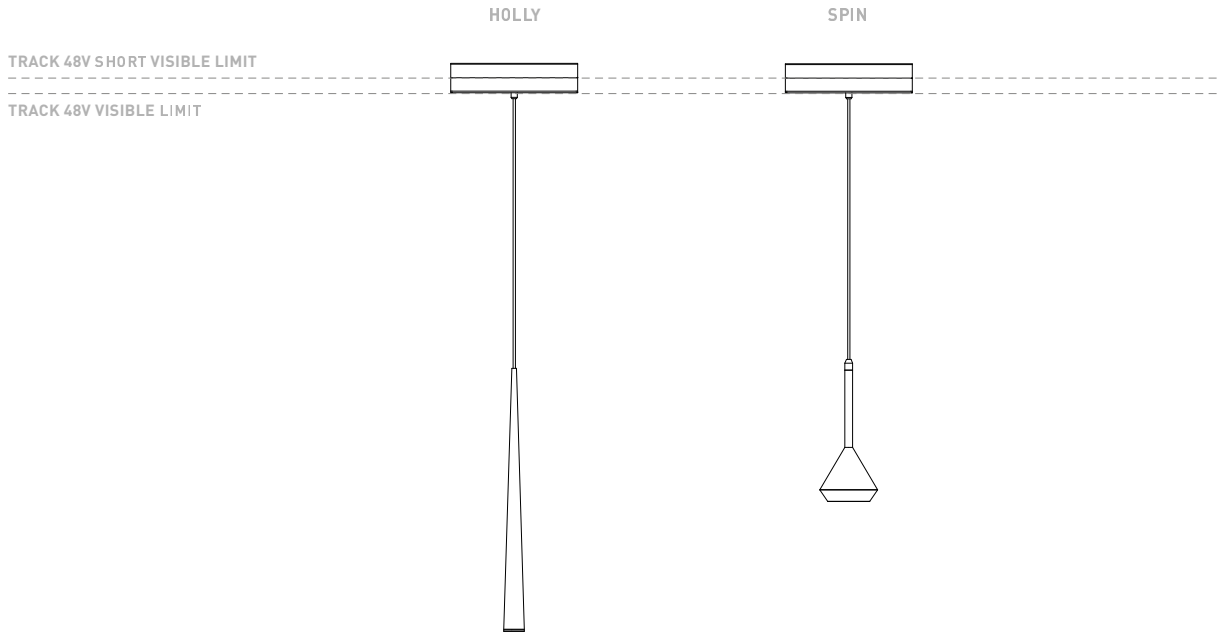





Order with *The 2019 Collection* codes. Products with one single version for both tracks

# TRACK 48V

## ALL 48V TRACK




**TRACK 48V** Live-End Connector

A338-00-01- | N |




**TRACK 48V** Central Connector

A338-00-02- | N |




**TRACK 48V** Corner 90º Connector

A338-00-12- | N |




**TRACK 48V** Wireless Control

0434-01-31- | N | Casambi/AAG Stucchi App

0434-01-32- | N | AAG Stucchi App

## TRIMLESS 48V

**TRACK 48V TRIMLESS** Short T-Bracket

A338-00-03



**TRACK 48V TRIMLESS** Long T-Bracket

A338-00-04



**TRACK 48V TRIMLESS** Straight Joiners (2 units)

A338-00-05



**TRACK 48V TRIMLESS** Plaster Installation Guard 1m

A338-00-21

**TRACK 48V** Clamp for M6 ROD

A338-00-09

*See accessories quantities

**TRACK 48V** Track Clamp

A338-00-10

*See accessories quantities




**TRACK 48V TRIMLESS** Suspension Kit

A338-00-08

*See accessories quantities

*** SUGGESTED MOUNTING ACCESSORIES QUANTITIES**

1000mm - 2 Pcs.
2000mm - 3 Pcs.
3000mm - 4 Pcs.

## SURFACE, SUSPENSION , SURFACE SHORT & SUSPENSION SHORT 48V



**TRACK 48V SURFACE** Straight Joiner

A338-00-11- | N |

COLOUR | N ■ |

# TRACK 48V

## TRIMLESS, SURFACE & SUSPENSION 48V

**TRACK 48V TRIMLESS & SURFACE End**

A338-00-06- | N |

**TRACK 48V TRIMLESS & SURFACE End Feed**

A338-00-07- | N |

## SURFACE SHORT & SUSPENSION SHORT 48V

**TRACK 48V SURFACE SHORT End**

A338-00-18- | N |

**TRACK 48V SURFACE SHORT End Feed**

A338-00-19- | N |

## SURFACE & SURFACE SHORT 48V




**TRACK 48V Power Supply Case**

A338-00-20- | N | NO DIM

*To be installed aside 48V Surface Tracks
Power supply not included

## SUSPENSION & SUSPENSION SHORT 48V




**TRACK 48V Wired Power Supply Case**

A338-00-22- | N | NO DIM

A338-00-23- | N | DIM

*Power supply not included




**TRACK 48V SURFACE Suspension Kit (2 units)**

A338-00-15- | N |

**TRACK 48V SURFACE Suspension Feed Kit**

A338-00-16- | N | NO DIM

A338-00-17- | N | DIM

*For remote power supply

COLOUR | N ■ |

# SPIN 48V

ARKOSLIGHT®

## DIMENSIONS

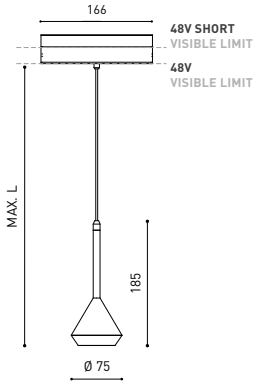


## ACCESSORIES

CORD ACCESOSORY



TRACK 48V OPTIONS

| | PRODUCT |
|---|---|
| Name | SPIN 48V 2M 40º 2700K MC |
| Reference | A3500110MC |
| Color | Metallized copper |
| RAL | Paint of metallic nanoparticles |
| Category | TRACKLIGHTS |

| | LIGHTING INFORMATION |
|---|---|
| Light source | LED |
| Gross luminous flux | 600 Lm |
| Power | 6,5 W |
| Power values of the system | 6,84 W |
| Colour temperature | 2700 K |
| Colour Rendering Index | CRI>90 |
| Chromatic stability | MacAdam Step 2 |
| Light beam angle | 40° |
| Lighting efficiency | 84% |
| Efficacy | 92 Lm/W |
| Current intensity | 700 mA |
| Dimming | No Dim - Other DIM, please consult |
| Control through bluetooth | Please Consult |
| Driver | Included |
| Electrical insulation class | III |
| Voltage | 48 Vdc |
| Energy efficiency | A+ |
| LED lifespan | L80B10 (Tj=85°C) >60.000h |

| | OTHER DATA |
|---|---|
| Ingress Protection | IP20 |
| Cord length | 2 m |
| Fast adjustment tensioner | No |
| Track type | Track 48V |
| Weight | 530 g. |
| Packaged weight | 666 g. |
| Packaging dimensions | 253 × 152 × 102 mm |
| Units per package | 1 |
| Materials | Aluminium / Polymethyl Methacrylate |

CE

## AWARDS

Spin 48V, reduced dimensions, essential lines and revolutionary geometry in a pendant luminary for accent lighting. Its extra fine wire gives Spin a sense of airiness and flotability. Spin, now available for Arkoslight's low voltage tracklight systems.

Calle N · Pol. Ind. EL OLIVERAL
46394 Ribarroja del Turia · Valencia (Spain)
Tel. +34 961 667 207 · Fax +34 961 667 054
info@arkoslight.com · www.arkoslight.com

28-03-20 / 04:08

5 Year GUARANTEE*

ARKOSLIGHT®

## POLAR DIAGRAM

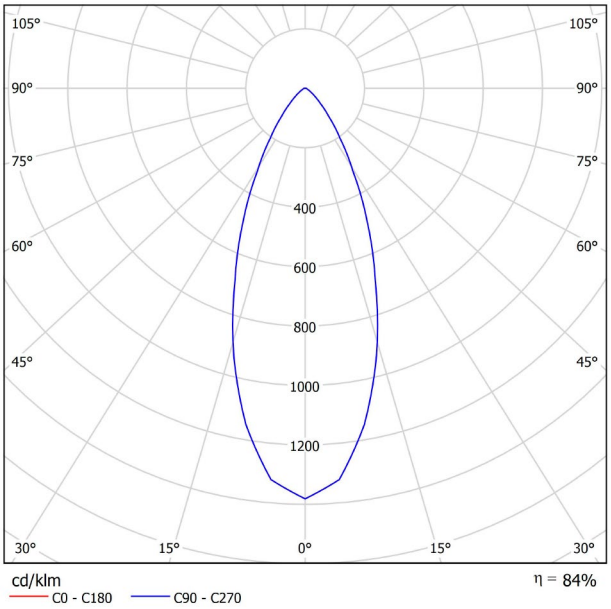


## CONICAL DIAGRAM

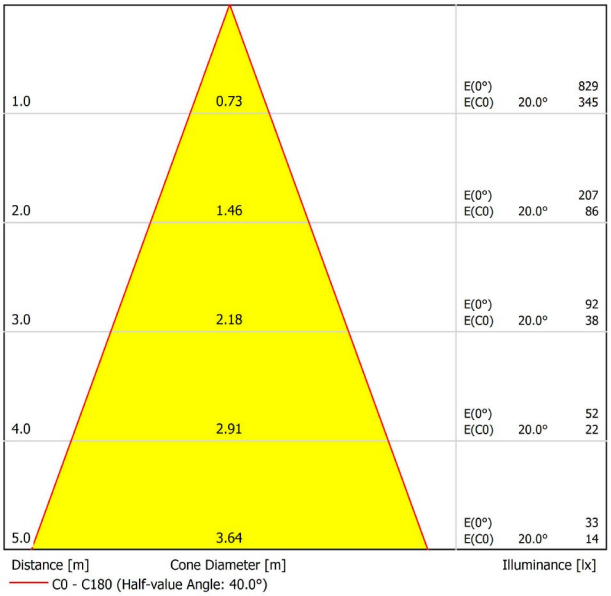




Calle N · Pol. Ind. EL OLIVERAL
46394 Ribarroja del Turia · Valencia (Spain)
Tel. +34 961 667 207 · Fax +34 961 667 054
info@arkoslight.com · www.arkoslight.com

5 Year GUARANTEE*

# CORD ACCESSORY

ARKOSLIGHT®

| | PRODUCT |
|---|---|
| Model | Cord Accessory |
| Reference | **02230000** \| **WT** \| **NT** \| |
| Colour | **WT** ☐ RAL 9016 \| **NT** ■ RAL9005 |
| Category | Accessories |

## DIMENSIONAL DRAWING




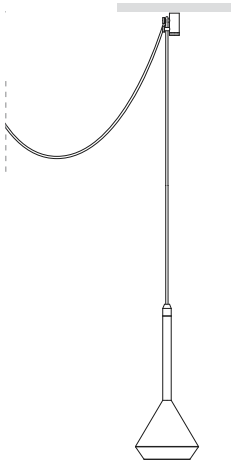

Calle N · Pol. Ind. EL OLIVERAL
46394 Ribarroja del Turia · Valencia (Spain)
Tel. +34 961 667 207 · Fax +34 961 667 054
info@arkoslight.com · www.arkoslight.com

5 Year GUARANTEE*

# TRACK 48V




## TRACK 48V TRIMLESS

| | | |
|---|---|---|
| TRACK 48V TRIMLESS 1m | A338-01-00- | N |
| TRACK 48V TRIMLESS 2m | A338-02-00- | N |
| TRACK 48V TRIMLESS 3m | A338-03-00- | N |
| TRACK 48V TRIMLESS Corner 90º One Plane | A338-06-00- | N |
| TRACK 48V TRIMLESS Corner 90º Two Planes | A338-07-00- | N |

RECOMMENDED FOR INSTALLATIONS WHERE THE PROFILE CAN BE INSTALLED BEFORE THE FALSE PLASTERBOARD CEILING (THICKNESS 12,5mm.)

CE III

TRACK 48V TRIMLESS

Corner 90º One Plane




*Electrical connection not included

TRACK 48V TRIMLESS

Corner 90º Two Planes




*Electrical connection not included




## TRACK 48V SURFACE

| | | |
|---|---|---|
| TRACK 48V SURFACE 1m | A338-11-00- | N |
| TRACK 48V SURFACE 2m | A338-12-00- | N |
| TRACK 48V SURFACE 3m | A338-13-00- | N |
| TRACK 48V SURFACE Corner 90º One Plane | A338-14-00- | N |

CE III

TRACK 48V SURFACE

Corner 90º One Plane




*Electrical connection not included




## TRACK 48V SURFACE SHORT

| | | |
|---|---|---|
| TRACK 48V SURFACE SHORT 1m | A338-21-00- | N |
| TRACK 48V SURFACE SHORT 2m | A338-22-00- | N |
| TRACK 48V SURFACE SHORT 3m | A338-23-00- | N |
| TRACK 48V SURFACE SHORT Corner 90º One Plane | A338-24-00- | N |

CE III

TRACK 48V SURFACE SHORT

Corner 90º One Plane




*Electrical connection not included

48V SYSTEM

# TRACK 48V

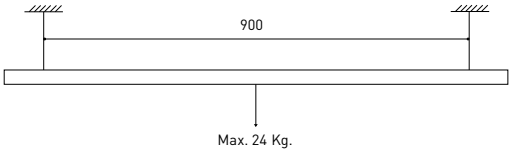


| | | P | V | D |
|---|---|---|---|---|
| CONSTANT VOLTAGE LED POWER SUPPLY | **0434-01-21** | 75W | 48V | 180 x 52 x 30mm |
| | **0434-01-22** | 150W | 48V | 240 x 60 x 49mm |

DROP VOLTAGE TABLE

| | | **CABLE LENGHT** (m) | | | |
|---|---|---|---|---|---|
| | | 5 | 10 | 20 | 30 |
| **POWER** (W) | **CABLE SECTION** ($mm^2$) | **TRACK LENGHT** (m) | | | |
| 75 | 0,75 | 50 | 50 | 30 | X |
| | 1,5 | 50 | 50 | 50 | 50 |
| 150 | 0,75 | 40 | 15 | X | X |
| | 1,5 | 50 | 40 | 20 | X |

## COMPATIBILITY ACCORDING TO TYPE OF TRACK

### TRACK 48V & TRACK 48V SURFACE SHORT

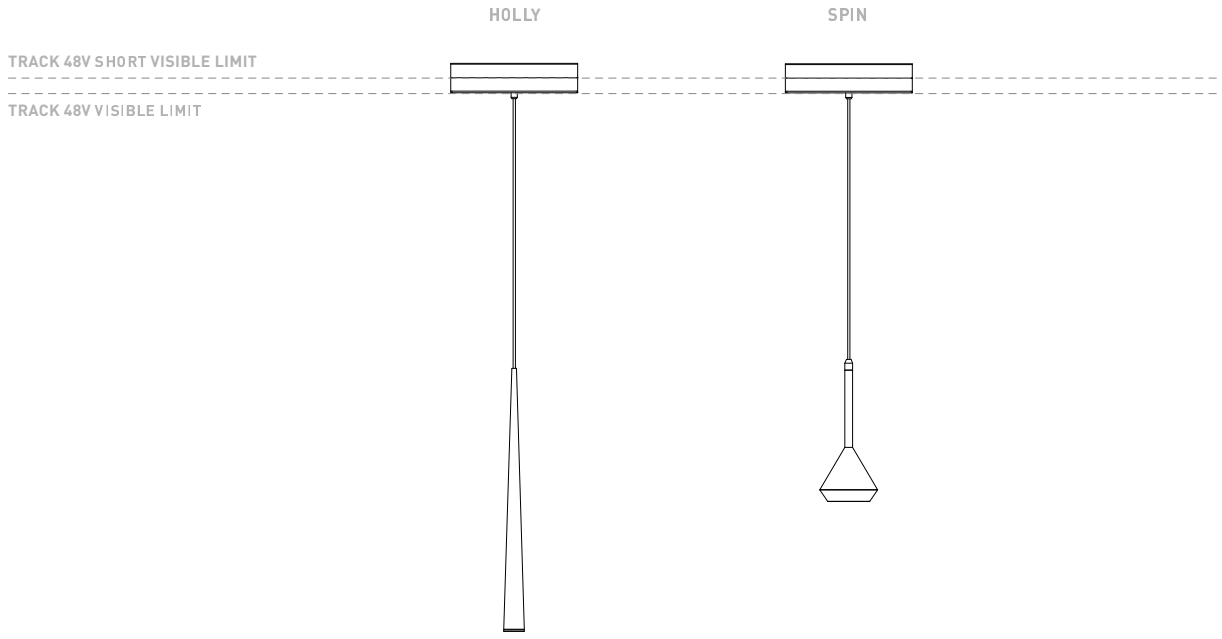





Order with *The 2019 Collection* codes. Products with one single version for both tracks

# TRACK 48V

## ALL 48V TRACK




**TRACK 48V** Live-End Connector

A338-00-01- | N |




**TRACK 48V** Central Connector

A338-00-02- | N |




**TRACK 48V** Corner 90º Connector

A338-00-12- | N |




**TRACK 48V** Wireless Control

0434-01-31- | N | Casambi/AAG Stucchi App

0434-01-32- | N | AAG Stucchi App

## TRIMLESS 48V

**TRACK 48V TRIMLESS** Short T-Bracket

A338-00-03



**TRACK 48V TRIMLESS** Long T-Bracket

A338-00-04



**TRACK 48V TRIMLESS** Straight Joiners (2 units)

A338-00-05



**TRACK 48V TRIMLESS** Plaster Installation Guard 1m

A338-00-21

**TRACK 48V** Clamp for M6 ROD

A338-00-09

*See accessories quantities

**TRACK 48V** Track Clamp

A338-00-10

*See accessories quantities




**TRACK 48V TRIMLESS** Suspension Kit

A338-00-08

*See accessories quantities

*** SUGGESTED MOUNTING ACCESSORIES QUANTITIES**

1000mm - 2 Pcs.
2000mm - 3 Pcs.
3000mm - 4 Pcs.

## SURFACE, SUSPENSION , SURFACE SHORT & SUSPENSION SHORT 48V



**TRACK 48V SURFACE** Straight Joiner

A338-00-11- | N |

COLOUR | N ■ |

# TRACK 48V

## TRIMLESS, SURFACE & SUSPENSION 48V

**TRACK 48V TRIMLESS & SURFACE End**

A338-00-06- | N |

**TRACK 48V TRIMLESS & SURFACE End Feed**

A338-00-07- | N |

## SURFACE SHORT & SUSPENSION SHORT 48V

**TRACK 48V SURFACE SHORT End**

A338-00-18- | N |

**TRACK 48V SURFACE SHORT End Feed**

A338-00-19- | N |

## SURFACE & SURFACE SHORT 48V




**TRACK 48V Power Supply Case**

A338-00-20- | N | NO DIM

*To be installed aside 48V Surface Tracks
Power supply not included

## SUSPENSION & SUSPENSION SHORT 48V




**TRACK 48V Wired Power Supply Case**

A338-00-22- | N | NO DIM

A338-00-23- | N | DIM

*Power supply not included




**TRACK 48V SURFACE Suspension Kit (2 units)**

A338-00-15- | N |

**TRACK 48V SURFACE Suspension Feed Kit**

A338-00-16- | N | NO DIM

A338-00-17- | N | DIM

*For remote power supply

COLOUR | N ■ |

# SPIN 48V

ARKOSLIGHT®

## DIMENSIONS

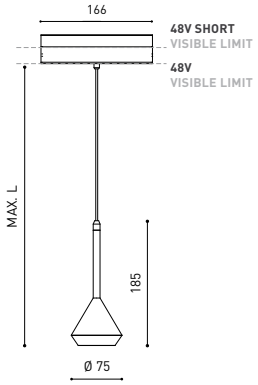


## ACCESSORIES

CORD ACCESOSORY



TRACK 48V OPTIONS

| | PRODUCT |
|---|---|
| Name | SPIN 48V 2M 40º 2700K MG |
| Reference | A3500110MG |
| Color | Metallized gold |
| RAL | Paint of metallic nanoparticles |
| Category | TRACKLIGHTS |

| | LIGHTING INFORMATION |
|---|---|
| Light source | LED |
| Gross luminous flux | 600 Lm |
| Power | 6,5 W |
| Power values of the system | 6,84 W |
| Colour temperature | 2700 K |
| Colour Rendering Index | CRI>90 |
| Chromatic stability | MacAdam Step 2 |
| Light beam angle | 40° |
| Lighting efficiency | 84% |
| Efficacy | 92 Lm/W |
| Current intensity | 700 mA |
| Dimming | No Dim - Other DIM, please consult |
| Control through bluetooth | Please Consult |
| Driver | Included |
| Electrical insulation class | III |
| Voltage | 48 Vdc |
| Energy efficiency | A+ |
| LED lifespan | L80B10 (Tj=85°C) >60.000h |

| | OTHER DATA |
|---|---|
| Ingress Protection | IP20 |
| Cord length | 2 m |
| Fast adjustment tensioner | No |
| Track type | Track 48V |
| Weight | 530 g. |
| Packaged weight | 666 g. |
| Packaging dimensions | 253 × 152 × 102 mm |
| Units per package | 1 |
| Materials | Aluminium / Polymethyl Methacrylate |

CE

## AWARDS

Spin 48V, reduced dimensions, essential lines and revolutionary geometry in a pendant luminary for accent lighting. Its extra fine wire gives Spin a sense of airiness and flotability. Spin, now available for Arkoslight's low voltage tracklight systems.


Calle N · Pol. Ind. EL OLIVERAL
46394 Ribarroja del Turia · Valencia (Spain)
Tel. +34 961 667 207 · Fax +34 961 667 054
info@arkoslight.com · www.arkoslight.com


28-03-20 / 04:08

5 Year GUARANTEE*

ARKOSLIGHT®

## POLAR DIAGRAM

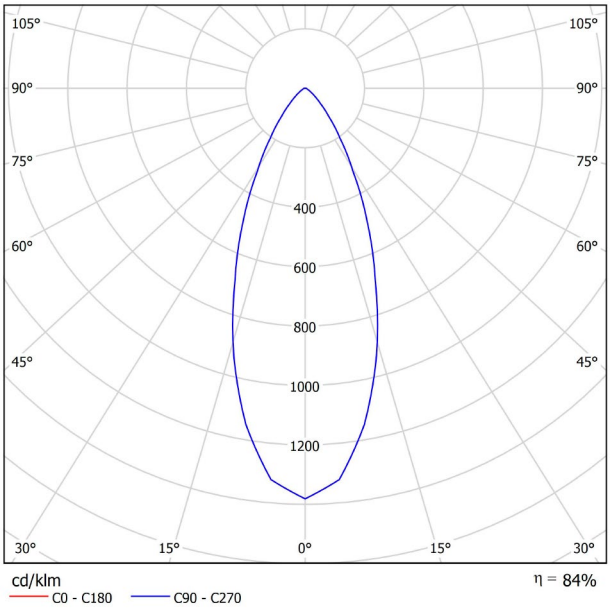


## CONICAL DIAGRAM

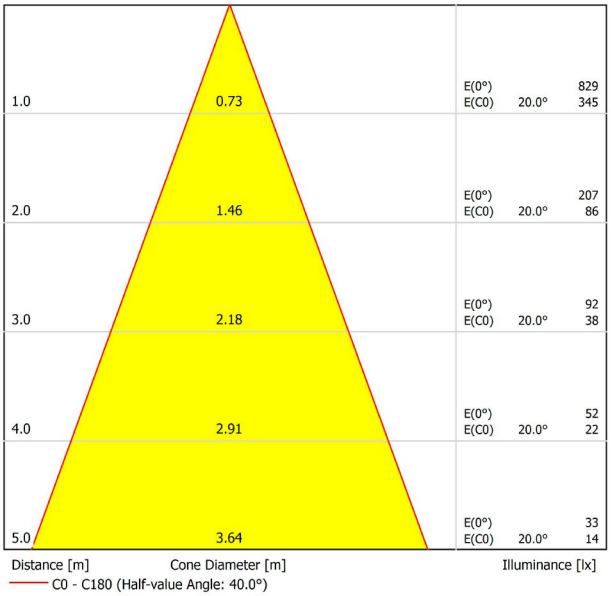




Calle N · Pol. Ind. EL OLIVERAL
46394 Ribarroja del Turia · Valencia (Spain)
Tel. +34 961 667 207 · Fax +34 961 667 054
info@arkoslight.com · www.arkoslight.com

5 Year GUARANTEE*

# CORD ACCESSORY

ARKOSLIGHT®

| | PRODUCT |
|---|---|
| Model | Cord Accessory |
| Reference | **02230000** \| **WT** \| **NT** \| |
| Colour | **WT** ☐ RAL 9016 \| **NT** ■ RAL9005 |
| Category | Accessories |

## DIMENSIONAL DRAWING




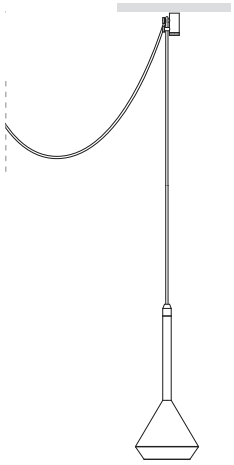

Calle N · Pol. Ind. EL OLIVERAL
46394 Ribarroja del Turia · Valencia (Spain)
Tel. +34 961 667 207 · Fax +34 961 667 054
info@arkoslight.com · www.arkoslight.com

5 Year GUARANTEE*

# TRACK 48V




## TRACK 48V TRIMLESS

| | | |
|---|---|---|
| TRACK 48V TRIMLESS 1m | A338-01-00- | N |
| TRACK 48V TRIMLESS 2m | A338-02-00- | N |
| TRACK 48V TRIMLESS 3m | A338-03-00- | N |
| TRACK 48V TRIMLESS Corner 90º One Plane | A338-06-00- | N |
| TRACK 48V TRIMLESS Corner 90º Two Planes | A338-07-00- | N |

RECOMMENDED FOR INSTALLATIONS WHERE THE PROFILE CAN BE INSTALLED BEFORE THE FALSE PLASTERBOARD CEILING (THICKNESS 12,5mm.)

CE III

TRACK 48V TRIMLESS

Corner 90º One Plane




*Electrical connection not included

TRACK 48V TRIMLESS

Corner 90º Two Planes




*Electrical connection not included




## TRACK 48V SURFACE

| | | |
|---|---|---|
| TRACK 48V SURFACE 1m | A338-11-00- | N |
| TRACK 48V SURFACE 2m | A338-12-00- | N |
| TRACK 48V SURFACE 3m | A338-13-00- | N |
| TRACK 48V SURFACE Corner 90º One Plane | A338-14-00- | N |

CE III

TRACK 48V SURFACE

Corner 90º One Plane




*Electrical connection not included




## TRACK 48V SURFACE SHORT

| | | |
|---|---|---|
| TRACK 48V SURFACE SHORT 1m | A338-21-00- | N |
| TRACK 48V SURFACE SHORT 2m | A338-22-00- | N |
| TRACK 48V SURFACE SHORT 3m | A338-23-00- | N |
| TRACK 48V SURFACE SHORT Corner 90º One Plane | A338-24-00- | N |

CE III

TRACK 48V SURFACE SHORT

Corner 90º One Plane




*Electrical connection not included

48V SYSTEM

# TRACK 48V

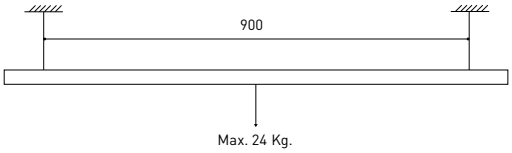


| | | P | V | D |
|---|---|---|---|---|
| CONSTANT VOLTAGE LED POWER SUPPLY | **0434-01-21** | 75W | 48V | 180 x 52 x 30mm |
| | **0434-01-22** | 150W | 48V | 240 x 60 x 49mm |

DROP VOLTAGE TABLE

| | | **CABLE LENGHT** (m) | | | |
|---|---|---|---|---|---|
| | | 5 | 10 | 20 | 30 |
| **POWER** (W) | **CABLE SECTION** ($mm^2$) | **TRACK LENGHT** (m) | | | |
| 75 | 0,75 | 50 | 50 | 30 | X |
| | 1,5 | 50 | 50 | 50 | 50 |
| 150 | 0,75 | 40 | 15 | X | X |
| | 1,5 | 50 | 40 | 20 | X |

## COMPATIBILITY ACCORDING TO TYPE OF TRACK

### TRACK 48V & TRACK 48V SURFACE SHORT

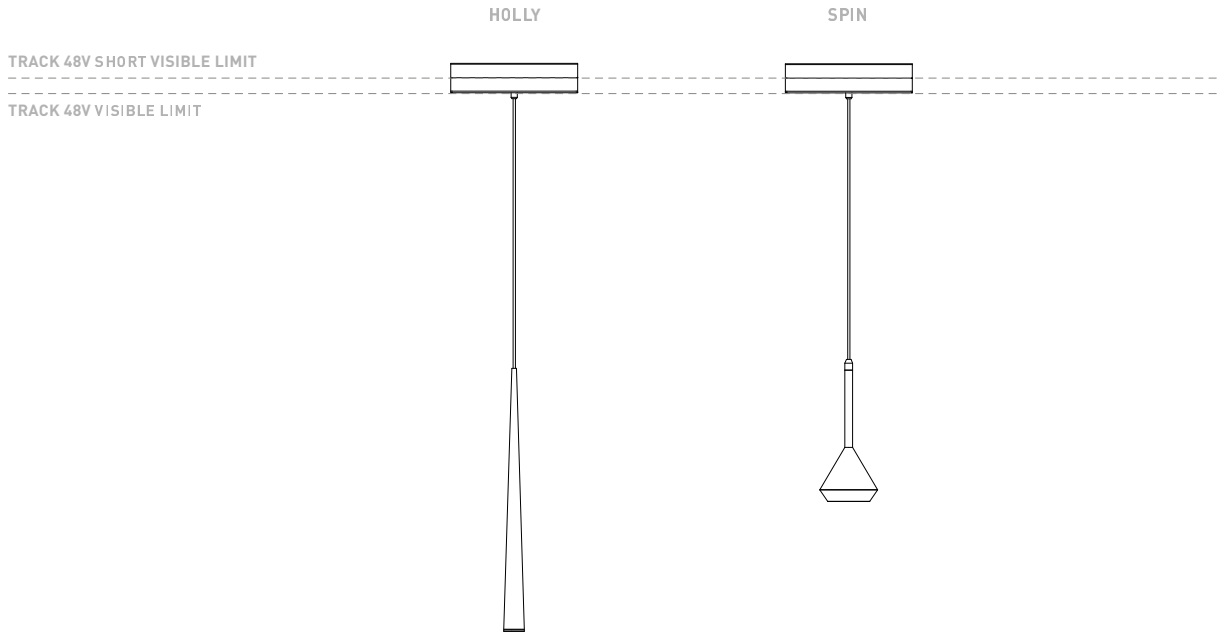





Order with *The 2019 Collection* codes. Products with one single version for both tracks

# TRACK 48V

## ALL 48V TRACK




**TRACK 48V** Live-End Connector

A338-00-01- | N |




**TRACK 48V** Central Connector

A338-00-02- | N |




**TRACK 48V** Corner 90º Connector

A338-00-12- | N |




**TRACK 48V** Wireless Control

0434-01-31- | N | Casambi/AAG Stucchi App

0434-01-32- | N | AAG Stucchi App

## TRIMLESS 48V

**TRACK 48V TRIMLESS** Short T-Bracket

A338-00-03



**TRACK 48V TRIMLESS** Long T-Bracket

A338-00-04



**TRACK 48V TRIMLESS** Straight Joiners (2 units)

A338-00-05



**TRACK 48V TRIMLESS** Plaster Installation Guard 1m

A338-00-21

**TRACK 48V** Clamp for M6 ROD

A338-00-09

*See accessories quantities

**TRACK 48V** Track Clamp

A338-00-10

*See accessories quantities




**TRACK 48V TRIMLESS** Suspension Kit

A338-00-08

*See accessories quantities

*** SUGGESTED MOUNTING ACCESSORIES QUANTITIES**

1000mm - 2 Pcs.
2000mm - 3 Pcs.
3000mm - 4 Pcs.

## SURFACE, SUSPENSION , SURFACE SHORT & SUSPENSION SHORT 48V



**TRACK 48V SURFACE** Straight Joiner

A338-00-11- | N |

COLOUR | N ■ |

# TRACK 48V

## TRIMLESS, SURFACE & SUSPENSION 48V

**TRACK 48V TRIMLESS & SURFACE End**

A338-00-06- | N |

**TRACK 48V TRIMLESS & SURFACE End Feed**

A338-00-07- | N |

## SURFACE SHORT & SUSPENSION SHORT 48V

**TRACK 48V SURFACE SHORT End**

A338-00-18- | N |

**TRACK 48V SURFACE SHORT End Feed**

A338-00-19- | N |

## SURFACE & SURFACE SHORT 48V




**TRACK 48V Power Supply Case**

A338-00-20- | N | NO DIM

*To be installed aside 48V Surface Tracks
Power supply not included

## SUSPENSION & SUSPENSION SHORT 48V




**TRACK 48V Wired Power Supply Case**

A338-00-22- | N | NO DIM

A338-00-23- | N | DIM

*Power supply not included




**TRACK 48V SURFACE Suspension Kit (2 units)**

A338-00-15- | N |

**TRACK 48V SURFACE Suspension Feed Kit**

A338-00-16- | N | NO DIM

A338-00-17- | N | DIM

*For remote power supply

COLOUR | N ■ |

# SPIN 48V

ARKOSLIGHT®

## DIMENSIONS

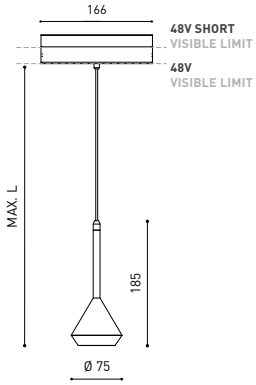


## ACCESSORIES

CORD ACCESOSORY



TRACK 48V OPTIONS

| | PRODUCT |
|---|---|
| Name | SPIN 48V 2M 40º 2700K NT |
| Reference | A3500110NT |
| Color | Textured black |
| RAL | 9005 |
| Category | TRACKLIGHTS |

| | LIGHTING INFORMATION |
|---|---|
| Light source | LED |
| Gross luminous flux | 600 Lm |
| Power | 6,5 W |
| Power values of the system | 6,84 W |
| Colour temperature | 2700 K |
| Colour Rendering Index | CRI>90 |
| Chromatic stability | MacAdam Step 2 |
| Light beam angle | 40° |
| Lighting efficiency | 84% |
| Efficacy | 92 Lm/W |
| Current intensity | 700 mA |
| Dimming | No Dim - Other DIM, please consult |
| Control through bluetooth | Please Consult |
| Driver | Included |
| Electrical insulation class | III |
| Voltage | 48 Vdc |
| Energy efficiency | A+ |
| LED lifespan | L80B10 (Tj=85°C) >60.000h |

| | OTHER DATA |
|---|---|
| Ingress Protection | IP20 |
| Cord length | 2 m |
| Fast adjustment tensioner | No |
| Track type | Track 48V |
| Weight | 530 g. |
| Packaged weight | 666 g. |
| Packaging dimensions | 253 × 152 × 102 mm |
| Units per package | 1 |
| Materials | Aluminium / Polymethyl Methacrylate |

CE

## AWARDS

Spin 48V, reduced dimensions, essential lines and revolutionary geometry in a pendant luminary for accent lighting. Its extra fine wire gives Spin a sense of airiness and flotability. Spin, now available for Arkoslight's low voltage tracklight systems.

Calle N · Pol. Ind. EL OLIVERAL
46394 Ribarroja del Turia · Valencia (Spain)
Tel. +34 961 667 207 · Fax +34 961 667 054
info@arkoslight.com · www.arkoslight.com

28-03-20 / 04:04

5 Year GUARANTEE*

ARKOSLIGHT®

## POLAR DIAGRAM

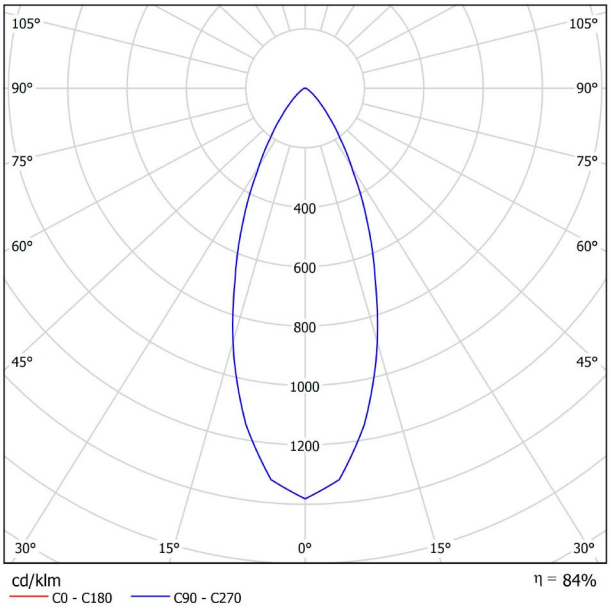


## CONICAL DIAGRAM

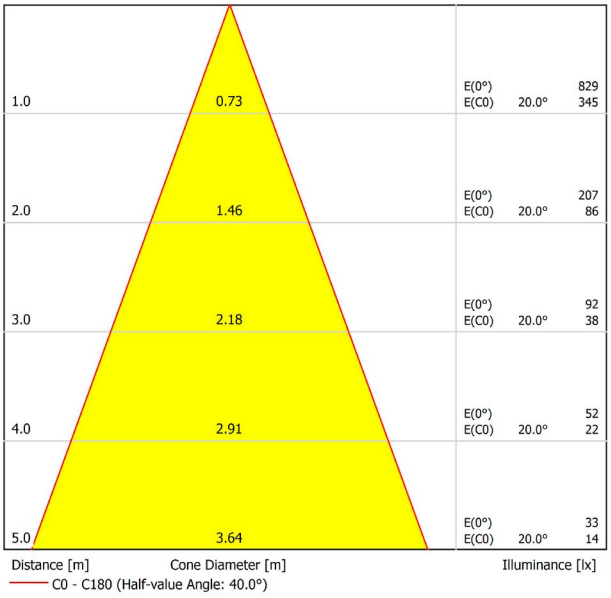




Calle N · Pol. Ind. EL OLIVERAL
46394 Ribarroja del Turia · Valencia (Spain)
Tel. +34 961 667 207 · Fax +34 961 667 054
info@arkoslight.com · www.arkoslight.com

5 Year GUARANTEE*

# CORD ACCESSORY

ARKOSLIGHT®

| | PRODUCT |
|---|---|
| Model | Cord Accessory |
| Reference | **02230000** \| **WT** \| **NT** \| |
| Colour | **WT** ☐ RAL 9016 \| **NT** ■ RAL9005 |
| Category | Accessories |

## DIMENSIONAL DRAWING




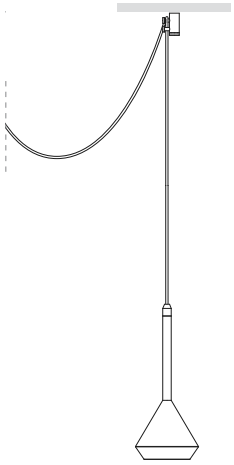

Calle N · Pol. Ind. EL OLIVERAL
46394 Ribarroja del Turia · Valencia (Spain)
Tel. +34 961 667 207 · Fax +34 961 667 054
info@arkoslight.com · www.arkoslight.com

5 Year GUARANTEE*

# TRACK 48V




## TRACK 48V TRIMLESS

| | | |
|---|---|---|
| TRACK 48V TRIMLESS 1m | A338-01-00- | N |
| TRACK 48V TRIMLESS 2m | A338-02-00- | N |
| TRACK 48V TRIMLESS 3m | A338-03-00- | N |
| TRACK 48V TRIMLESS Corner 90º One Plane | A338-06-00- | N |
| TRACK 48V TRIMLESS Corner 90º Two Planes | A338-07-00- | N |

RECOMMENDED FOR INSTALLATIONS WHERE THE PROFILE CAN BE INSTALLED BEFORE THE FALSE PLASTERBOARD CEILING (THICKNESS 12,5mm.)

CE III

TRACK 48V TRIMLESS

Corner 90º One Plane




*Electrical connection not included

TRACK 48V TRIMLESS

Corner 90º Two Planes




*Electrical connection not included




## TRACK 48V SURFACE

| | | |
|---|---|---|
| TRACK 48V SURFACE 1m | A338-11-00- | N |
| TRACK 48V SURFACE 2m | A338-12-00- | N |
| TRACK 48V SURFACE 3m | A338-13-00- | N |
| TRACK 48V SURFACE Corner 90º One Plane | A338-14-00- | N |

CE III

TRACK 48V SURFACE

Corner 90º One Plane




*Electrical connection not included




## TRACK 48V SURFACE SHORT

| | | |
|---|---|---|
| TRACK 48V SURFACE SHORT 1m | A338-21-00- | N |
| TRACK 48V SURFACE SHORT 2m | A338-22-00- | N |
| TRACK 48V SURFACE SHORT 3m | A338-23-00- | N |
| TRACK 48V SURFACE SHORT Corner 90º One Plane | A338-24-00- | N |

CE III

TRACK 48V SURFACE SHORT

Corner 90º One Plane




*Electrical connection not included

48V SYSTEM

# TRACK 48V

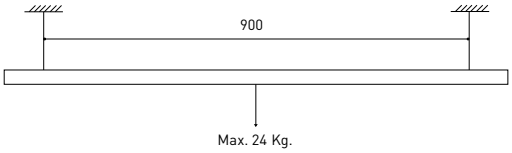


| | | P | V | D |
|---|---|---|---|---|
| CONSTANT VOLTAGE LED POWER SUPPLY | **0434-01-21** | 75W | 48V | 180 x 52 x 30mm |
| | **0434-01-22** | 150W | 48V | 240 x 60 x 49mm |

DROP VOLTAGE TABLE

| | | **CABLE LENGHT** (m) | | | |
|---|---|---|---|---|---|
| | | 5 | 10 | 20 | 30 |
| **POWER** (W) | **CABLE SECTION** ($mm^2$) | **TRACK LENGHT** (m) | | | |
| 75 | 0,75 | 50 | 50 | 30 | X |
| | 1,5 | 50 | 50 | 50 | 50 |
| 150 | 0,75 | 40 | 15 | X | X |
| | 1,5 | 50 | 40 | 20 | X |

## COMPATIBILITY ACCORDING TO TYPE OF TRACK

### TRACK 48V & TRACK 48V SURFACE SHORT

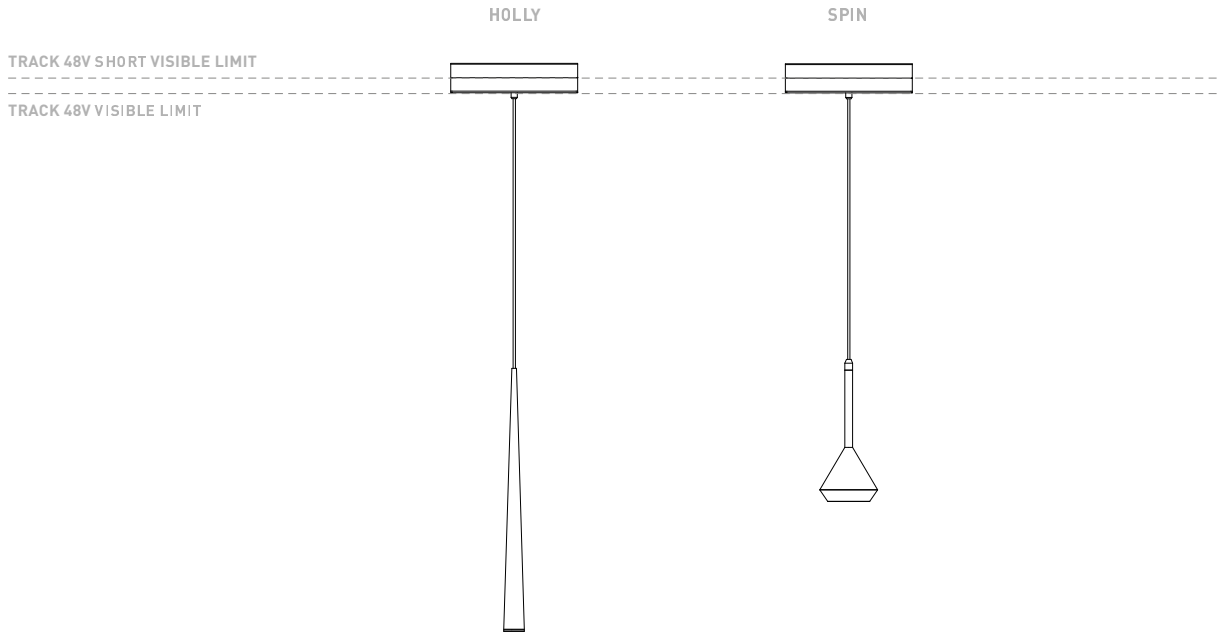





Order with *The 2019 Collection* codes. Products with one single version for both tracks

# TRACK 48V

## ALL 48V TRACK




**TRACK 48V** Live-End Connector

A338-00-01- | N |




**TRACK 48V** Central Connector

A338-00-02- | N |




**TRACK 48V** Corner 90º Connector

A338-00-12- | N |




**TRACK 48V** Wireless Control

0434-01-31- | N | Casambi/AAG Stucchi App

0434-01-32- | N | AAG Stucchi App

## TRIMLESS 48V

**TRACK 48V TRIMLESS** Short T-Bracket

A338-00-03



**TRACK 48V TRIMLESS** Long T-Bracket

A338-00-04



**TRACK 48V TRIMLESS** Straight Joiners (2 units)

A338-00-05



**TRACK 48V TRIMLESS** Plaster Installation Guard 1m

A338-00-21

**TRACK 48V** Clamp for M6 ROD

A338-00-09

*See accessories quantities

**TRACK 48V** Track Clamp

A338-00-10

*See accessories quantities




**TRACK 48V TRIMLESS** Suspension Kit

A338-00-08

*See accessories quantities

*** SUGGESTED MOUNTING ACCESSORIES QUANTITIES**

1000mm - 2 Pcs.
2000mm - 3 Pcs.
3000mm - 4 Pcs.

## SURFACE, SUSPENSION , SURFACE SHORT & SUSPENSION SHORT 48V



**TRACK 48V SURFACE** Straight Joiner

A338-00-11- | N |

COLOUR | N ■ |

# TRACK 48V

## TRIMLESS, SURFACE & SUSPENSION 48V

**TRACK 48V TRIMLESS & SURFACE End**

A338-00-06- | N |

**TRACK 48V TRIMLESS & SURFACE End Feed**

A338-00-07- | N |

## SURFACE SHORT & SUSPENSION SHORT 48V

**TRACK 48V SURFACE SHORT End**

A338-00-18- | N |

**TRACK 48V SURFACE SHORT End Feed**

A338-00-19- | N |

## SURFACE & SURFACE SHORT 48V




**TRACK 48V Power Supply Case**

A338-00-20- | N | NO DIM

*To be installed aside 48V Surface Tracks
Power supply not included

## SUSPENSION & SUSPENSION SHORT 48V




**TRACK 48V Wired Power Supply Case**

A338-00-22- | N | NO DIM

A338-00-23- | N | DIM

*Power supply not included




**TRACK 48V SURFACE Suspension Kit (2 units)**

A338-00-15- | N |

**TRACK 48V SURFACE Suspension Feed Kit**

A338-00-16- | N | NO DIM

A338-00-17- | N | DIM

*For remote power supply

COLOUR | N ■ |

# SPIN 48V

ARKOSLIGHT®

## DIMENSIONS

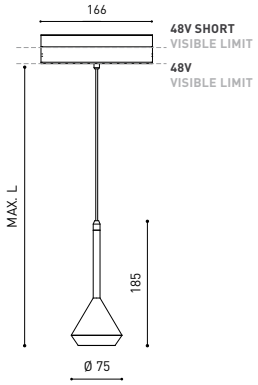


## ACCESSORIES

CORD ACCESOSORY



TRACK 48V OPTIONS

| | PRODUCT |
|---|---|
| Name | SPIN 48V 2M 40º 2700K WT |
| Reference | A3500110WT |
| Color | Textured white |
| RAL | 9016 |
| Category | TRACKLIGHTS |

| | LIGHTING INFORMATION |
|---|---|
| Light source | LED |
| Gross luminous flux | 600 Lm |
| Power | 6,5 W |
| Power values of the system | 6,84 W |
| Colour temperature | 2700 K |
| Colour Rendering Index | CRI>90 |
| Chromatic stability | MacAdam Step 2 |
| Light beam angle | 40° |
| Lighting efficiency | 84% |
| Efficacy | 92 Lm/W |
| Current intensity | 700 mA |
| Dimming | No Dim - Other DIM, please consult |
| Control through bluetooth | Please Consult |
| Driver | Included |
| Electrical insulation class | III |
| Voltage | 48 Vdc |
| Energy efficiency | A+ |
| LED lifespan | L80B10 (Tj=85°C) >60.000h |

| | OTHER DATA |
|---|---|
| Ingress Protection | IP20 |
| Cord length | 2 m |
| Fast adjustment tensioner | No |
| Track type | Track 48V |
| Weight | 530 g. |
| Packaged weight | 666 g. |
| Packaging dimensions | 253 × 152 × 102 mm |
| Units per package | 1 |
| Materials | Aluminium / Polymethyl Methacrylate |

CE

## AWARDS

Spin 48V, reduced dimensions, essential lines and revolutionary geometry in a pendant luminary for accent lighting. Its extra fine wire gives Spin a sense of airiness and flotability. Spin, now available for Arkoslight's low voltage tracklight systems.

Calle N · Pol. Ind. EL OLIVERAL
46394 Ribarroja del Turia · Valencia (Spain)
Tel. +34 961 667 207 · Fax +34 961 667 054
info@arkoslight.com · www.arkoslight.com

28-03-20 / 04:04

5 Year GUARANTEE*

ARKOSLIGHT®

## POLAR DIAGRAM

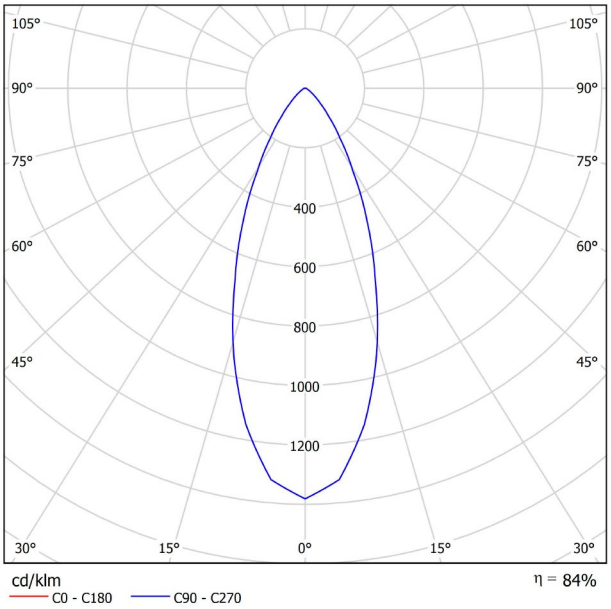


## CONICAL DIAGRAM

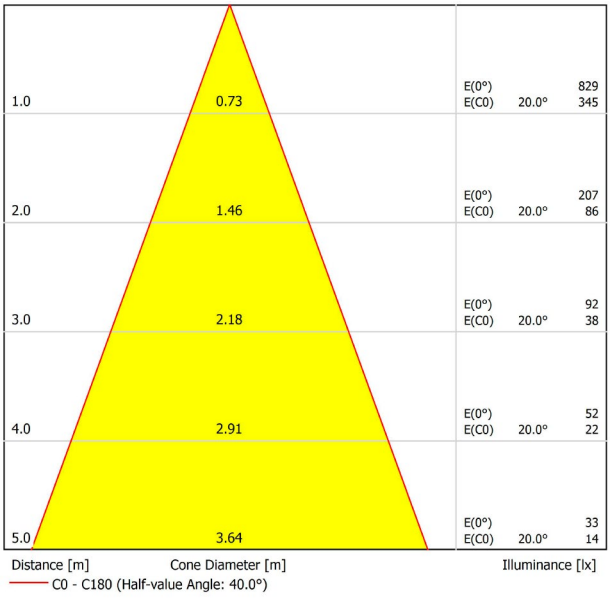




Calle N · Pol. Ind. EL OLIVERAL
46394 Ribarroja del Turia · Valencia (Spain)
Tel. +34 961 667 207 · Fax +34 961 667 054
info@arkoslight.com · www.arkoslight.com

5 Year GUARANTEE*

# CORD ACCESSORY

ARKOSLIGHT®

| | PRODUCT |
|---|---|
| Model | Cord Accessory |
| Reference | **02230000** \| **WT** \| **NT** \| |
| Colour | **WT** ☐ RAL 9016 \| **NT** ■ RAL9005 |
| Category | Accessories |

## DIMENSIONAL DRAWING




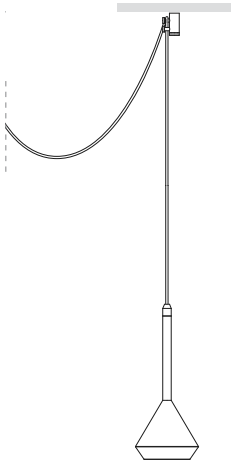

Calle N · Pol. Ind. EL OLIVERAL
46394 Ribarroja del Turia · Valencia (Spain)
Tel. +34 961 667 207 · Fax +34 961 667 054
info@arkoslight.com · www.arkoslight.com

5 Year GUARANTEE*

# TRACK 48V




## TRACK 48V TRIMLESS

| | | |
|---|---|---|
| TRACK 48V TRIMLESS 1m | A338-01-00- | N |
| TRACK 48V TRIMLESS 2m | A338-02-00- | N |
| TRACK 48V TRIMLESS 3m | A338-03-00- | N |
| TRACK 48V TRIMLESS Corner 90º One Plane | A338-06-00- | N |
| TRACK 48V TRIMLESS Corner 90º Two Planes | A338-07-00- | N |

RECOMMENDED FOR INSTALLATIONS WHERE THE PROFILE CAN BE INSTALLED BEFORE THE FALSE PLASTERBOARD CEILING (THICKNESS 12,5mm.)

CE III

TRACK 48V TRIMLESS

Corner 90º One Plane




*Electrical connection not included

TRACK 48V TRIMLESS

Corner 90º Two Planes




*Electrical connection not included




## TRACK 48V SURFACE

| | | |
|---|---|---|
| TRACK 48V SURFACE 1m | A338-11-00- | N |
| TRACK 48V SURFACE 2m | A338-12-00- | N |
| TRACK 48V SURFACE 3m | A338-13-00- | N |
| TRACK 48V SURFACE Corner 90º One Plane | A338-14-00- | N |

CE III

TRACK 48V SURFACE

Corner 90º One Plane




*Electrical connection not included




## TRACK 48V SURFACE SHORT

| | | |
|---|---|---|
| TRACK 48V SURFACE SHORT 1m | A338-21-00- | N |
| TRACK 48V SURFACE SHORT 2m | A338-22-00- | N |
| TRACK 48V SURFACE SHORT 3m | A338-23-00- | N |
| TRACK 48V SURFACE SHORT Corner 90º One Plane | A338-24-00- | N |

CE III

TRACK 48V SURFACE SHORT

Corner 90º One Plane




*Electrical connection not included

48V SYSTEM

# TRACK 48V

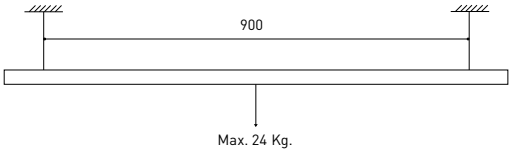


| | | P | V | D |
|---|---|---|---|---|
| CONSTANT VOLTAGE LED POWER SUPPLY | **0434-01-21** | 75W | 48V | 180 x 52 x 30mm |
| | **0434-01-22** | 150W | 48V | 240 x 60 x 49mm |

DROP VOLTAGE TABLE

| | | **CABLE LENGHT** (m) | | | |
|---|---|---|---|---|---|
| | | 5 | 10 | 20 | 30 |
| **POWER** (W) | **CABLE SECTION** ($mm^2$) | **TRACK LENGHT** (m) | | | |
| 75 | 0,75 | 50 | 50 | 30 | X |
| | 1,5 | 50 | 50 | 50 | 50 |
| 150 | 0,75 | 40 | 15 | X | X |
| | 1,5 | 50 | 40 | 20 | X |

## COMPATIBILITY ACCORDING TO TYPE OF TRACK

### TRACK 48V & TRACK 48V SURFACE SHORT

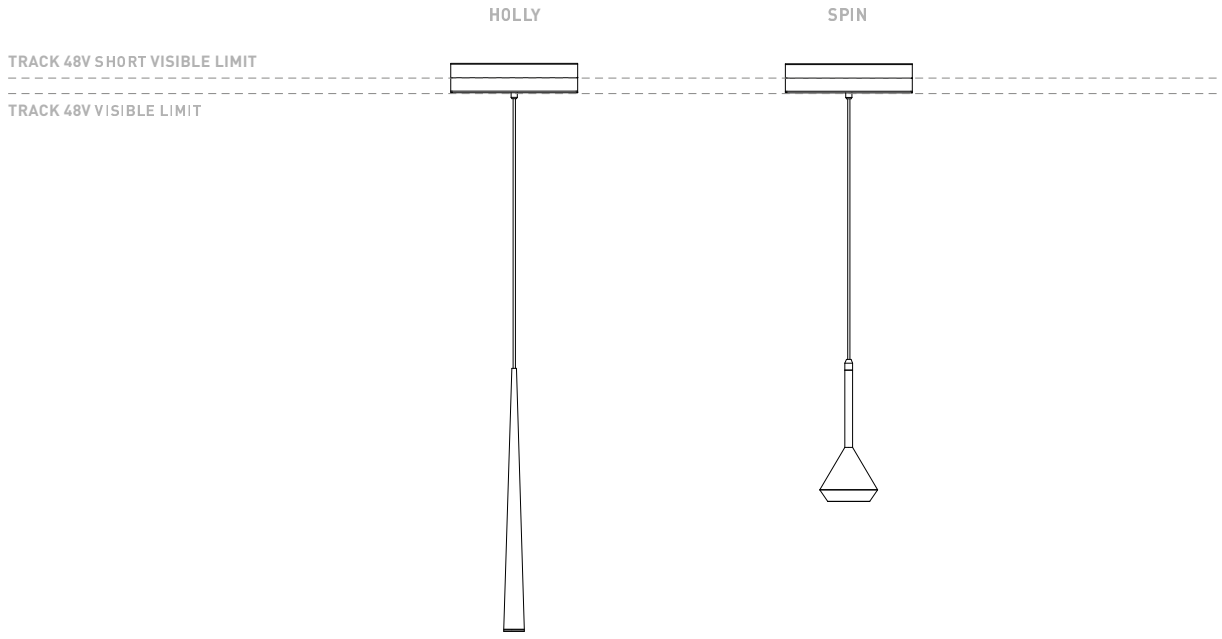





Order with *The 2019 Collection* codes. Products with one single version for both tracks

# TRACK 48V

## ALL 48V TRACK




**TRACK 48V** Live-End Connector

A338-00-01- | N |




**TRACK 48V** Central Connector

A338-00-02- | N |




**TRACK 48V** Corner 90º Connector

A338-00-12- | N |




**TRACK 48V** Wireless Control

0434-01-31- | N | Casambi/AAG Stucchi App

0434-01-32- | N | AAG Stucchi App

## TRIMLESS 48V

**TRACK 48V TRIMLESS** Short T-Bracket

A338-00-03



**TRACK 48V TRIMLESS** Long T-Bracket

A338-00-04



**TRACK 48V TRIMLESS** Straight Joiners (2 units)

A338-00-05



**TRACK 48V TRIMLESS** Plaster Installation Guard 1m

A338-00-21

**TRACK 48V** Clamp for M6 ROD

A338-00-09

*See accessories quantities

**TRACK 48V** Track Clamp

A338-00-10

*See accessories quantities




**TRACK 48V TRIMLESS** Suspension Kit

A338-00-08

*See accessories quantities

*** SUGGESTED MOUNTING ACCESSORIES QUANTITIES**

1000mm - 2 Pcs.
2000mm - 3 Pcs.
3000mm - 4 Pcs.

## SURFACE, SUSPENSION , SURFACE SHORT & SUSPENSION SHORT 48V



**TRACK 48V SURFACE** Straight Joiner

A338-00-11- | N |

COLOUR | N ■ |

# TRACK 48V

## TRIMLESS, SURFACE & SUSPENSION 48V

**TRACK 48V TRIMLESS & SURFACE End**

A338-00-06- | N |

**TRACK 48V TRIMLESS & SURFACE End Feed**

A338-00-07- | N |

## SURFACE SHORT & SUSPENSION SHORT 48V

**TRACK 48V SURFACE SHORT End**

A338-00-18- | N |

**TRACK 48V SURFACE SHORT End Feed**

A338-00-19- | N |

## SURFACE & SURFACE SHORT 48V




**TRACK 48V Power Supply Case**

A338-00-20- | N | NO DIM

*To be installed aside 48V Surface Tracks
Power supply not included

## SUSPENSION & SUSPENSION SHORT 48V




**TRACK 48V Wired Power Supply Case**

A338-00-22- | N | NO DIM

A338-00-23- | N | DIM

*Power supply not included




**TRACK 48V SURFACE Suspension Kit (2 units)**

A338-00-15- | N |

**TRACK 48V SURFACE Suspension Feed Kit**

A338-00-16- | N | NO DIM

A338-00-17- | N | DIM

*For remote power supply

COLOUR | N ■ |

# SPIN 48V

ARKOSLIGHT®

## DIMENSIONS

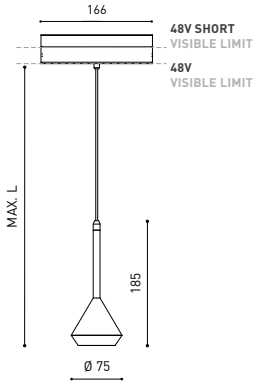


## ACCESSORIES

CORD ACCESOSORY



TRACK 48V OPTIONS

| | PRODUCT |
|---|---|
| Name | SPIN 48V 2M 40º 3000K MC |
| Reference | A3500111MC |
| Color | Metallized copper |
| RAL | Paint of metallic nanoparticles |
| Category | TRACKLIGHTS |

| | LIGHTING INFORMATION |
|---|---|
| Light source | LED |
| Gross luminous flux | 630 Lm |
| Power | 6,5 W |
| Power values of the system | 6,84 W |
| Colour temperature | 3000 K |
| Colour Rendering Index | CRI>90 |
| Chromatic stability | MacAdam Step 2 |
| Light beam angle | 40° |
| Lighting efficiency | 84% |
| Efficacy | 97 Lm/W |
| Current intensity | 700 mA |
| Dimming | No Dim - Other DIM, please consult |
| Control through bluetooth | Please Consult |
| Driver | Included |
| Electrical insulation class | III |
| Voltage | 48 Vdc |
| Energy efficiency | A+ |
| LED lifespan | L80B10 (Tj=85°C) >60.000h |

| | OTHER DATA |
|---|---|
| Ingress Protection | IP20 |
| Cord length | 2 m |
| Fast adjustment tensioner | No |
| Track type | Track 48V |
| Weight | 530 g. |
| Packaged weight | 666 g. |
| Packaging dimensions | 253 × 152 × 102 mm |
| Units per package | 1 |
| Materials | Aluminium / Polymethyl Methacrylate |

CE

## AWARDS

Spin 48V, reduced dimensions, essential lines and revolutionary geometry in a pendant luminary for accent lighting. Its extra fine wire gives Spin a sense of airiness and flotability. Spin, now available for Arkoslight's low voltage tracklight systems.

Calle N · Pol. Ind. EL OLIVERAL
46394 Ribarroja del Turia · Valencia (Spain)
Tel. +34 961 667 207 · Fax +34 961 667 054
info@arkoslight.com · www.arkoslight.com

28-03-20 / 04:00

5 Year GUARANTEE*

## POLAR DIAGRAM

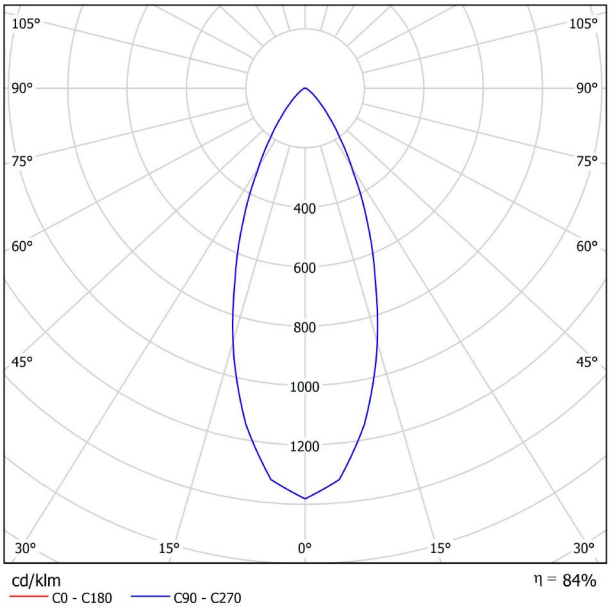


## CONICAL DIAGRAM

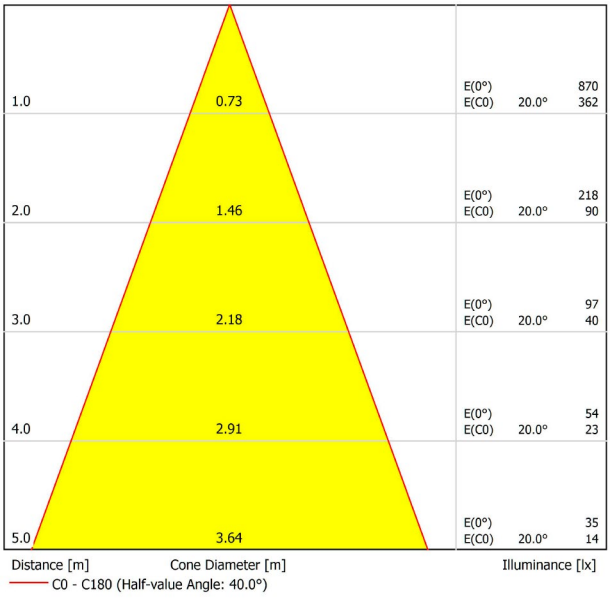

# CORD ACCESSORY

ARKOSLIGHT®

| | PRODUCT |
|---|---|
| Model | Cord Accessory |
| Reference | **02230000** \| **WT** \| **NT** \| |
| Colour | **WT** ☐ RAL 9016 \| **NT** ■ RAL9005 |
| Category | Accessories |

## DIMENSIONAL DRAWING




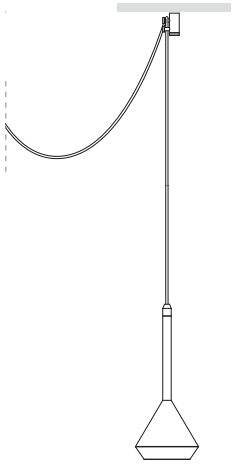

Calle N · Pol. Ind. EL OLIVERAL
46394 Ribarroja del Turia · Valencia (Spain)
Tel. +34 961 667 207 · Fax +34 961 667 054
info@arkoslight.com · www.arkoslight.com

5 Year GUARANTEE*

# TRACK 48V




## TRACK 48V TRIMLESS

| | | |
|---|---|---|
| TRACK 48V TRIMLESS 1m | A338-01-00- | N |
| TRACK 48V TRIMLESS 2m | A338-02-00- | N |
| TRACK 48V TRIMLESS 3m | A338-03-00- | N |
| TRACK 48V TRIMLESS Corner 90º One Plane | A338-06-00- | N |
| TRACK 48V TRIMLESS Corner 90º Two Planes | A338-07-00- | N |

RECOMMENDED FOR INSTALLATIONS WHERE THE PROFILE CAN BE INSTALLED BEFORE THE FALSE PLASTERBOARD CEILING (THICKNESS 12,5mm.)

CE III

TRACK 48V TRIMLESS
Corner 90º One Plane




*Electrical connection not included

TRACK 48V TRIMLESS
Corner 90º Two Planes




*Electrical connection not included




## TRACK 48V SURFACE

| | | |
|---|---|---|
| TRACK 48V SURFACE 1m | A338-11-00- | N |
| TRACK 48V SURFACE 2m | A338-12-00- | N |
| TRACK 48V SURFACE 3m | A338-13-00- | N |
| TRACK 48V SURFACE Corner 90º One Plane | A338-14-00- | N |

CE III

TRACK 48V SURFACE
Corner 90º One Plane




*Electrical connection not included




## TRACK 48V SURFACE SHORT

| | | |
|---|---|---|
| TRACK 48V SURFACE SHORT 1m | A338-21-00- | N |
| TRACK 48V SURFACE SHORT 2m | A338-22-00- | N |
| TRACK 48V SURFACE SHORT 3m | A338-23-00- | N |
| TRACK 48V SURFACE SHORT Corner 90º One Plane | A338-24-00- | N |

CE III

TRACK 48V SURFACE SHORT
Corner 90º One Plane




*Electrical connection not included

48V SYSTEM

# TRACK 48V

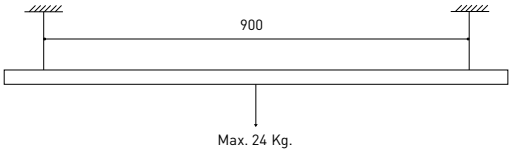


| | | P | V | D |
|---|---|---|---|---|
| CONSTANT VOLTAGE LED POWER SUPPLY | **0434-01-21** | 75W | 48V | 180 x 52 x 30mm |
| | **0434-01-22** | 150W | 48V | 240 x 60 x 49mm |

DROP VOLTAGE TABLE

| | | **CABLE LENGHT** (m) | | | |
|---|---|---|---|---|---|
| | | 5 | 10 | 20 | 30 |
| **POWER** (W) | **CABLE SECTION** ($mm^2$) | **TRACK LENGHT** (m) | | | |
| 75 | 0,75 | 50 | 50 | 30 | X |
| | 1,5 | 50 | 50 | 50 | 50 |
| 150 | 0,75 | 40 | 15 | X | X |
| | 1,5 | 50 | 40 | 20 | X |

## COMPATIBILITY ACCORDING TO TYPE OF TRACK

### TRACK 48V & TRACK 48V SURFACE SHORT

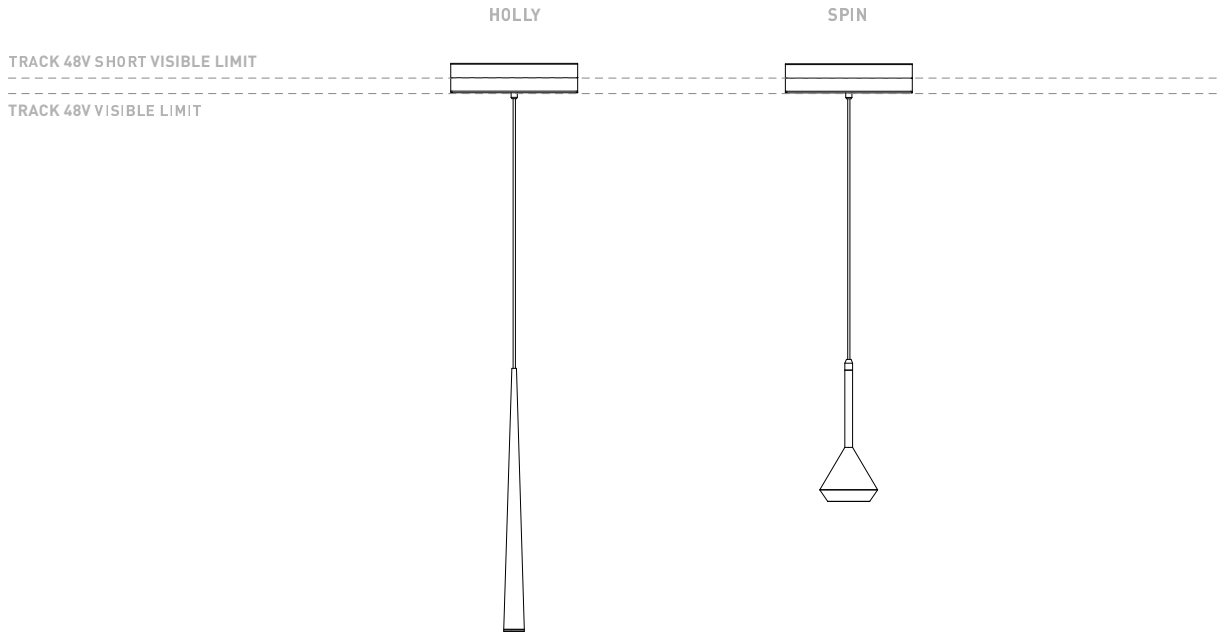





Order with *The 2019 Collection* codes. Products with one single version for both tracks

# TRACK 48V

## ALL 48V TRACK




**TRACK 48V** Live-End Connector

A338-00-01- | N |




**TRACK 48V** Central Connector

A338-00-02- | N |




**TRACK 48V** Corner 90º Connector

A338-00-12- | N |




**TRACK 48V** Wireless Control

0434-01-31- | N | Casambi/AAG Stucchi App

0434-01-32- | N | AAG Stucchi App

## TRIMLESS 48V

**TRACK 48V TRIMLESS** Short T-Bracket

A338-00-03



**TRACK 48V TRIMLESS** Long T-Bracket

A338-00-04



**TRACK 48V TRIMLESS** Straight Joiners (2 units)

A338-00-05



**TRACK 48V TRIMLESS** Plaster Installation Guard 1m

A338-00-21

**TRACK 48V** Clamp for M6 ROD

A338-00-09

*See accessories quantities

**TRACK 48V** Track Clamp

A338-00-10

*See accessories quantities




**TRACK 48V TRIMLESS** Suspension Kit

A338-00-08

*See accessories quantities

*** SUGGESTED MOUNTING ACCESSORIES QUANTITIES**

1000mm - 2 Pcs.
2000mm - 3 Pcs.
3000mm - 4 Pcs.

## SURFACE, SUSPENSION , SURFACE SHORT & SUSPENSION SHORT 48V



**TRACK 48V SURFACE** Straight Joiner

A338-00-11- | N |

COLOUR | N ■ |

# TRACK 48V

## TRIMLESS, SURFACE & SUSPENSION 48V

**TRACK 48V TRIMLESS & SURFACE End**

A338-00-06- | N |

**TRACK 48V TRIMLESS & SURFACE End Feed**

A338-00-07- | N |

## SURFACE SHORT & SUSPENSION SHORT 48V

**TRACK 48V SURFACE SHORT End**

A338-00-18- | N |

**TRACK 48V SURFACE SHORT End Feed**

A338-00-19- | N |

## SURFACE & SURFACE SHORT 48V




**TRACK 48V Power Supply Case**

A338-00-20- | N | NO DIM

*To be installed aside 48V Surface Tracks
Power supply not included

## SUSPENSION & SUSPENSION SHORT 48V




**TRACK 48V Wired Power Supply Case**

A338-00-22- | N | NO DIM

A338-00-23- | N | DIM

*Power supply not included




**TRACK 48V SURFACE Suspension Kit (2 units)**

A338-00-15- | N |

**TRACK 48V SURFACE Suspension Feed Kit**

A338-00-16- | N | NO DIM

A338-00-17- | N | DIM

*For remote power supply

COLOUR | N ■ |

# SPIN 48V

ARKOSLIGHT®

## DIMENSIONS

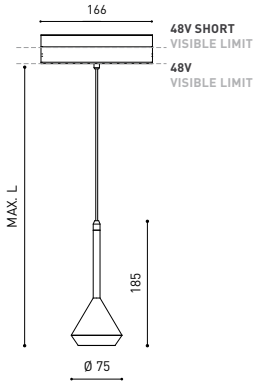


## ACCESSORIES

CORD ACCESOSORY



TRACK 48V OPTIONS

| | PRODUCT |
|---|---|
| Name | SPIN 48V 2M 40º 3000K MG |
| Reference | A3500111MG |
| Color | Metallized gold |
| RAL | Paint of metallic nanoparticles |
| Category | TRACKLIGHTS |

| | LIGHTING INFORMATION |
|---|---|
| Light source | LED |
| Gross luminous flux | 630 Lm |
| Power | 6,5 W |
| Power values of the system | 6,84 W |
| Colour temperature | 3000 K |
| Colour Rendering Index | CRI>90 |
| Chromatic stability | MacAdam Step 2 |
| Light beam angle | 40° |
| Lighting efficiency | 84% |
| Efficacy | 97 Lm/W |
| Current intensity | 700 mA |
| Dimming | No Dim - Other DIM, please consult |
| Control through bluetooth | Please Consult |
| Driver | Included |
| Electrical insulation class | III |
| Voltage | 48 Vdc |
| Energy efficiency | A+ |
| LED lifespan | L80B10 (Tj=85°C) >60.000h |

| | OTHER DATA |
|---|---|
| Ingress Protection | IP20 |
| Cord length | 2 m |
| Fast adjustment tensioner | No |
| Track type | Track 48V |
| Weight | 530 g. |
| Packaged weight | 666 g. |
| Packaging dimensions | 253 × 152 × 102 mm |
| Units per package | 1 |
| Materials | Aluminium / Polymethyl Methacrylate |

CE

## AWARDS

Spin 48V, reduced dimensions, essential lines and revolutionary geometry in a pendant luminary for accent lighting. Its extra fine wire gives Spin a sense of airiness and flotability. Spin, now available for Arkoslight's low voltage tracklight systems.

Calle N · Pol. Ind. EL OLIVERAL
46394 Ribarroja del Turia · Valencia (Spain)
Tel. +34 961 667 207 · Fax +34 961 667 054
info@arkoslight.com · www.arkoslight.com

28-03-20 / 04:00

5 Year GUARANTEE*

## POLAR DIAGRAM

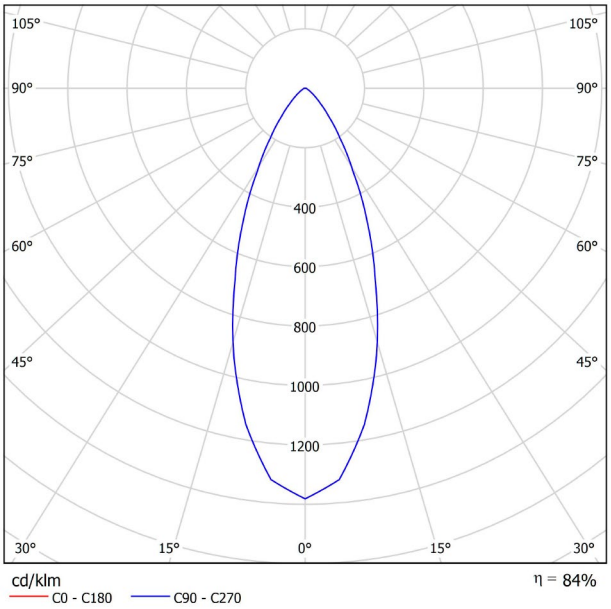


## CONICAL DIAGRAM

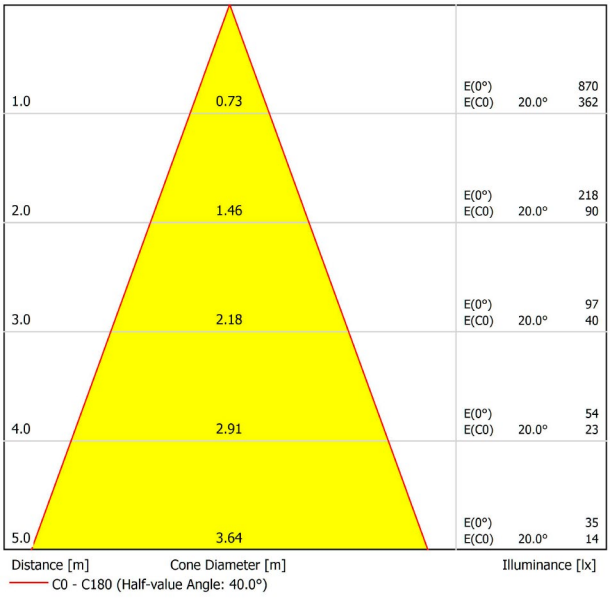

# CORD ACCESSORY

ARKOSLIGHT®

| | PRODUCT |
|---|---|
| Model | Cord Accessory |
| Reference | **02230000** \| **WT** \| **NT** \| |
| Colour | **WT** ☐ RAL 9016 \| **NT** ■ RAL9005 |
| Category | Accessories |

## DIMENSIONAL DRAWING




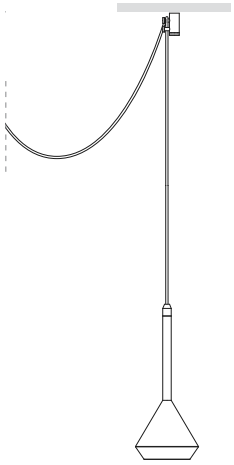

Calle N · Pol. Ind. EL OLIVERAL
46394 Ribarroja del Turia · Valencia (Spain)
Tel. +34 961 667 207 · Fax +34 961 667 054
info@arkoslight.com · www.arkoslight.com

5 Year GUARANTEE*

# TRACK 48V




## TRACK 48V TRIMLESS

| | | |
|---|---|---|
| TRACK 48V TRIMLESS 1m | A338-01-00- | N |
| TRACK 48V TRIMLESS 2m | A338-02-00- | N |
| TRACK 48V TRIMLESS 3m | A338-03-00- | N |
| TRACK 48V TRIMLESS Corner 90º One Plane | A338-06-00- | N |
| TRACK 48V TRIMLESS Corner 90º Two Planes | A338-07-00- | N |

RECOMMENDED FOR INSTALLATIONS WHERE THE PROFILE CAN BE INSTALLED BEFORE THE FALSE PLASTERBOARD CEILING (THICKNESS 12,5mm.)

CE III

TRACK 48V TRIMLESS

Corner 90º One Plane




*Electrical connection not included

TRACK 48V TRIMLESS

Corner 90º Two Planes




*Electrical connection not included




## TRACK 48V SURFACE

| | | |
|---|---|---|
| TRACK 48V SURFACE 1m | A338-11-00- | N |
| TRACK 48V SURFACE 2m | A338-12-00- | N |
| TRACK 48V SURFACE 3m | A338-13-00- | N |
| TRACK 48V SURFACE Corner 90º One Plane | A338-14-00- | N |

CE III

TRACK 48V SURFACE

Corner 90º One Plane




*Electrical connection not included




## TRACK 48V SURFACE SHORT

| | | |
|---|---|---|
| TRACK 48V SURFACE SHORT 1m | A338-21-00- | N |
| TRACK 48V SURFACE SHORT 2m | A338-22-00- | N |
| TRACK 48V SURFACE SHORT 3m | A338-23-00- | N |
| TRACK 48V SURFACE SHORT Corner 90º One Plane | A338-24-00- | N |

CE III

TRACK 48V SURFACE SHORT

Corner 90º One Plane




*Electrical connection not included

48V SYSTEM

# TRACK 48V

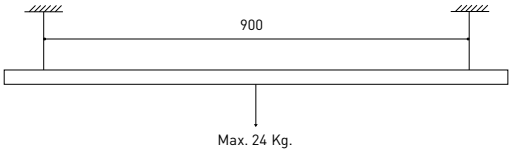


| | | P | V | D |
|---|---|---|---|---|
| CONSTANT VOLTAGE LED POWER SUPPLY | **0434-01-21** | 75W | 48V | 180 x 52 x 30mm |
| | **0434-01-22** | 150W | 48V | 240 x 60 x 49mm |

DROP VOLTAGE TABLE

| | | CABLE LENGHT (m) | | | |
|---|---|---|---|---|---|
| | | 5 | 10 | 20 | 30 |
| **POWER** (W) | **CABLE SECTION** ($mm^2$) | **TRACK LENGHT** (m) | | | |
| 75 | 0,75 | 50 | 50 | 30 | X |
| | 1,5 | 50 | 50 | 50 | 50 |
| 150 | 0,75 | 40 | 15 | X | X |
| | 1,5 | 50 | 40 | 20 | X |

## COMPATIBILITY ACCORDING TO TYPE OF TRACK

### TRACK 48V & TRACK 48V SURFACE SHORT

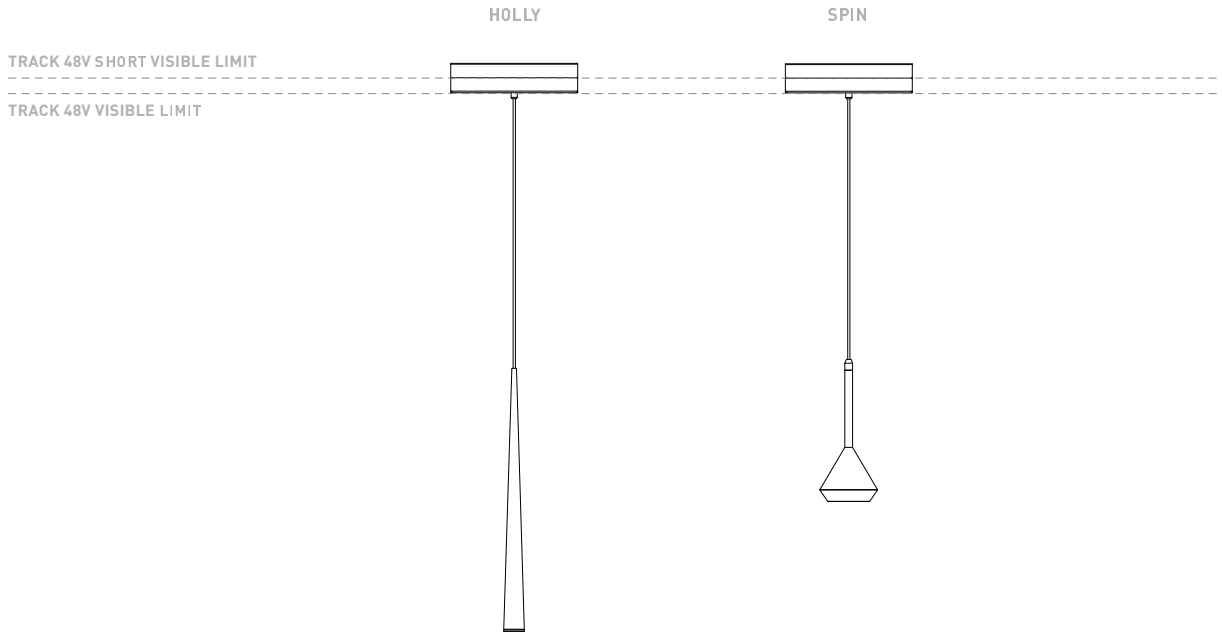





Order with *The 2019 Collection* codes. Products with one single version for both tracks

# TRACK 48V

## ALL 48V TRACK




**TRACK 48V** Live-End Connector

A338-00-01- | N |




**TRACK 48V** Central Connector

A338-00-02- | N |




**TRACK 48V** Corner 90º Connector

A338-00-12- | N |




**TRACK 48V** Wireless Control

0434-01-31- | N | Casambi/AAG Stucchi App

0434-01-32- | N | AAG Stucchi App

## TRIMLESS 48V

**TRACK 48V TRIMLESS** Short T-Bracket

A338-00-03



**TRACK 48V TRIMLESS** Long T-Bracket

A338-00-04



**TRACK 48V TRIMLESS** Straight Joiners (2 units)

A338-00-05



**TRACK 48V TRIMLESS** Plaster Installation Guard 1m

A338-00-21

**TRACK 48V** Clamp for M6 ROD

A338-00-09

*See accessories quantities

**TRACK 48V** Track Clamp

A338-00-10

*See accessories quantities




**TRACK 48V TRIMLESS** Suspension Kit

A338-00-08

*See accessories quantities

*** SUGGESTED MOUNTING ACCESSORIES QUANTITIES**

1000mm - 2 Pcs.
2000mm - 3 Pcs.
3000mm - 4 Pcs.

## SURFACE, SUSPENSION , SURFACE SHORT & SUSPENSION SHORT 48V



**TRACK 48V SURFACE** Straight Joiner

A338-00-11- | N |

COLOUR | N ■ |

# TRACK 48V

## TRIMLESS, SURFACE & SUSPENSION 48V

**TRACK 48V TRIMLESS & SURFACE End**

A338-00-06- | N |

**TRACK 48V TRIMLESS & SURFACE End Feed**

A338-00-07- | N |

## SURFACE SHORT & SUSPENSION SHORT 48V

**TRACK 48V SURFACE SHORT End**

A338-00-18- | N |

**TRACK 48V SURFACE SHORT End Feed**

A338-00-19- | N |

## SURFACE & SURFACE SHORT 48V




**TRACK 48V Power Supply Case**

A338-00-20- | N | NO DIM

*To be installed aside 48V Surface Tracks
Power supply not included

## SUSPENSION & SUSPENSION SHORT 48V




**TRACK 48V Wired Power Supply Case**

A338-00-22- | N | NO DIM

A338-00-23- | N | DIM

*Power supply not included




**TRACK 48V SURFACE Suspension Kit (2 units)**

A338-00-15- | N |

**TRACK 48V SURFACE Suspension Feed Kit**

A338-00-16- | N | NO DIM

A338-00-17- | N | DIM

*For remote power supply

COLOUR | N ■ |

# SPIN 48V

ARKOSLIGHT®

## DIMENSIONS

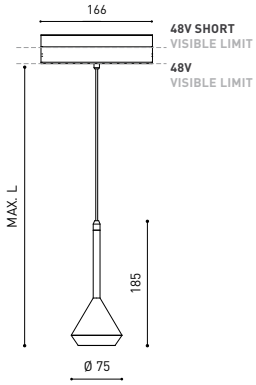


## ACCESSORIES

CORD ACCESOSORY



TRACK 48V OPTIONS

| | PRODUCT |
|---|---|
| Name | SPIN 48V 2M 40º 3000K NT |
| Reference | A3500111NT |
| Color | Textured black |
| RAL | 9005 |
| Category | TRACKLIGHTS |

| | LIGHTING INFORMATION |
|---|---|
| Light source | LED |
| Gross luminous flux | 630 Lm |
| Power | 6,5 W |
| Power values of the system | 6,84 W |
| Colour temperature | 3000 K |
| Colour Rendering Index | CRI>90 |
| Chromatic stability | MacAdam Step 2 |
| Light beam angle | 40° |
| Lighting efficiency | 84% |
| Efficacy | 97 Lm/W |
| Current intensity | 700 mA |
| Dimming | No Dim - Other DIM, please consult |
| Control through bluetooth | Please Consult |
| Driver | Included |
| Electrical insulation class | III |
| Voltage | 48 Vdc |
| Energy efficiency | A+ |
| LED lifespan | L80B10 (Tj=85°C) >60.000h |

| | OTHER DATA |
|---|---|
| Ingress Protection | IP20 |
| Cord length | 2 m |
| Fast adjustment tensioner | No |
| Track type | Track 48V |
| Weight | 530 g. |
| Packaged weight | 666 g. |
| Packaging dimensions | 253 × 152 × 102 mm |
| Units per package | 1 |
| Materials | Aluminium / Polymethyl Methacrylate |

CE

## AWARDS

Spin 48V, reduced dimensions, essential lines and revolutionary geometry in a pendant luminary for accent lighting. Its extra fine wire gives Spin a sense of airiness and flotability. Spin, now available for Arkoslight's low voltage tracklight systems.

Calle N · Pol. Ind. EL OLIVERAL
46394 Ribarroja del Turia · Valencia (Spain)
Tel. +34 961 667 207 · Fax +34 961 667 054
info@arkoslight.com · www.arkoslight.com

28-03-20 / 03:57

5 Year GUARANTEE*

## POLAR DIAGRAM

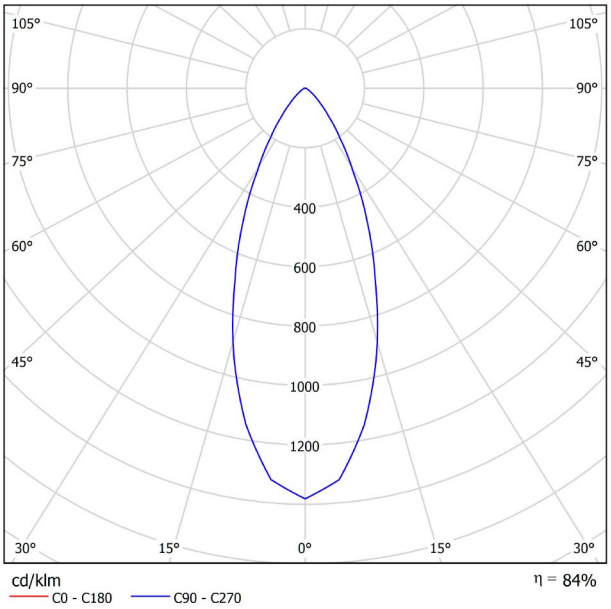


## CONICAL DIAGRAM

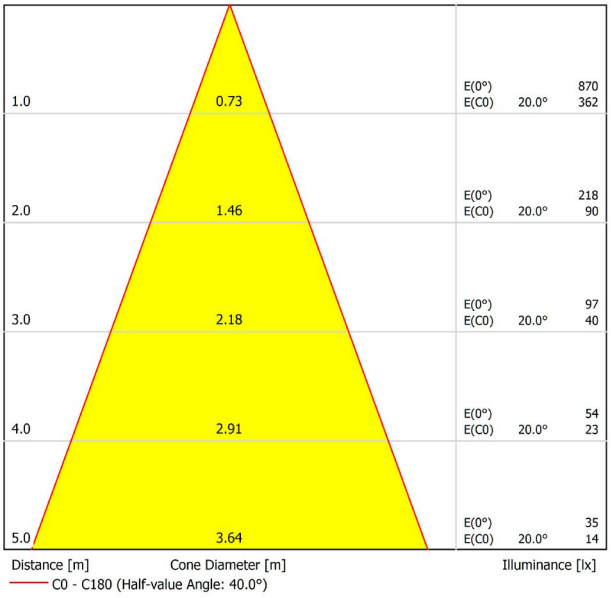

# CORD ACCESSORY

ARKOSLIGHT®

| | PRODUCT |
|---|---|
| Model | Cord Accessory |
| Reference | **02230000** \| **WT** \| **NT** \| |
| Colour | **WT** ☐ RAL 9016 \| **NT** ■ RAL9005 |
| Category | Accessories |

## DIMENSIONAL DRAWING




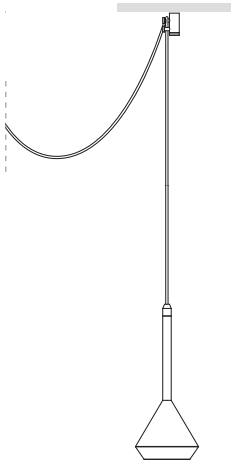

Calle N · Pol. Ind. EL OLIVERAL
46394 Ribarroja del Turia · Valencia (Spain)
Tel. +34 961 667 207 · Fax +34 961 667 054
info@arkoslight.com · www.arkoslight.com

5 Year GUARANTEE*

# TRACK 48V




## TRACK 48V TRIMLESS

| | | |
|---|---|---|
| TRACK 48V TRIMLESS 1m | A338-01-00- | N |
| TRACK 48V TRIMLESS 2m | A338-02-00- | N |
| TRACK 48V TRIMLESS 3m | A338-03-00- | N |
| TRACK 48V TRIMLESS Corner 90º One Plane | A338-06-00- | N |
| TRACK 48V TRIMLESS Corner 90º Two Planes | A338-07-00- | N |

RECOMMENDED FOR INSTALLATIONS WHERE THE PROFILE CAN BE INSTALLED BEFORE THE FALSE PLASTERBOARD CEILING (THICKNESS 12,5mm.)

CE III

TRACK 48V TRIMLESS

Corner 90º One Plane




*Electrical connection not included

TRACK 48V TRIMLESS

Corner 90º Two Planes




*Electrical connection not included




## TRACK 48V SURFACE

| | | |
|---|---|---|
| TRACK 48V SURFACE 1m | A338-11-00- | N |
| TRACK 48V SURFACE 2m | A338-12-00- | N |
| TRACK 48V SURFACE 3m | A338-13-00- | N |
| TRACK 48V SURFACE Corner 90º One Plane | A338-14-00- | N |

CE III

TRACK 48V SURFACE

Corner 90º One Plane




*Electrical connection not included




## TRACK 48V SURFACE SHORT

| | | |
|---|---|---|
| TRACK 48V SURFACE SHORT 1m | A338-21-00- | N |
| TRACK 48V SURFACE SHORT 2m | A338-22-00- | N |
| TRACK 48V SURFACE SHORT 3m | A338-23-00- | N |
| TRACK 48V SURFACE SHORT Corner 90º One Plane | A338-24-00- | N |

CE III

TRACK 48V SURFACE SHORT

Corner 90º One Plane




*Electrical connection not included

48V SYSTEM

# TRACK 48V

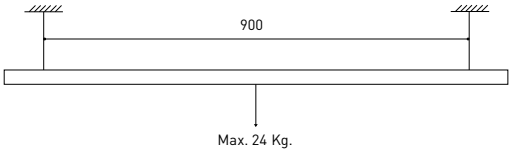


| | | P | V | D |
|---|---|---|---|---|
| CONSTANT VOLTAGE LED POWER SUPPLY | **0434-01-21** | 75W | 48V | 180 x 52 x 30mm |
| | **0434-01-22** | 150W | 48V | 240 x 60 x 49mm |

DROP VOLTAGE TABLE

| | | CABLE LENGHT (m) | | | |
|---|---|---|---|---|---|
| | | 5 | 10 | 20 | 30 |
| **POWER** (W) | **CABLE SECTION** ($mm^2$) | **TRACK LENGHT** (m) | | | |
| 75 | 0,75 | 50 | 50 | 30 | X |
| | 1,5 | 50 | 50 | 50 | 50 |
| 150 | 0,75 | 40 | 15 | X | X |
| | 1,5 | 50 | 40 | 20 | X |

## COMPATIBILITY ACCORDING TO TYPE OF TRACK

### TRACK 48V & TRACK 48V SURFACE SHORT

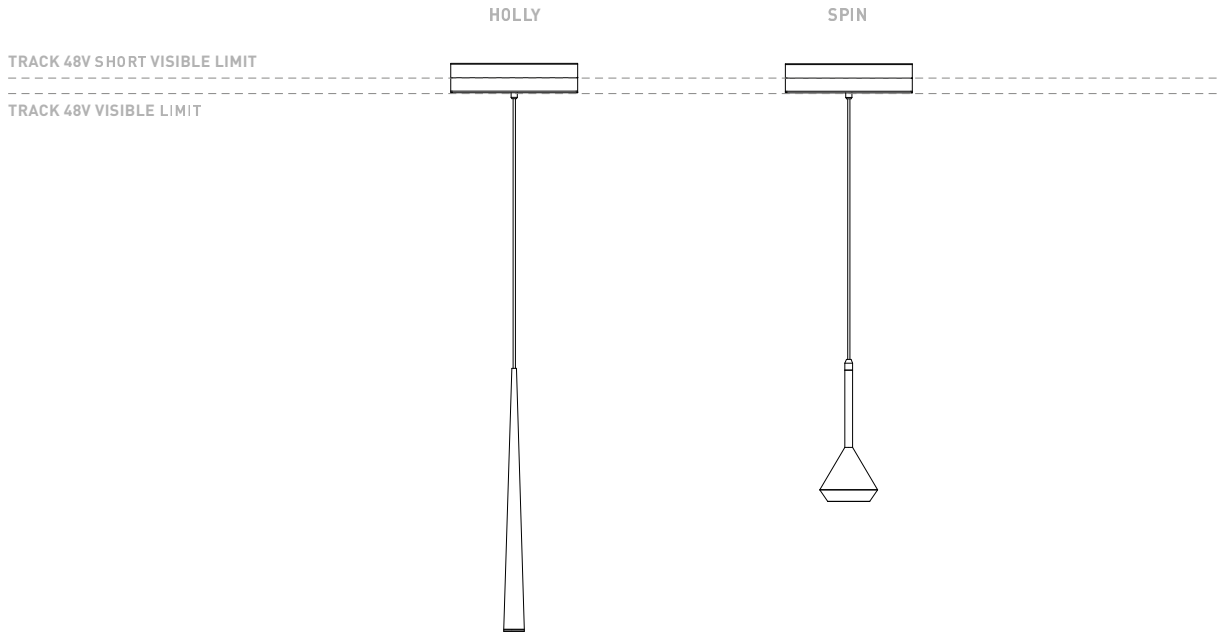





Order with *The 2019 Collection* codes. Products with one single version for both tracks

# TRACK 48V

## ALL 48V TRACK




**TRACK 48V** Live-End Connector

A338-00-01- | N |




**TRACK 48V** Central Connector

A338-00-02- | N |




**TRACK 48V** Corner 90º Connector

A338-00-12- | N |




**TRACK 48V** Wireless Control

0434-01-31- | N | Casambi/AAG Stucchi App

0434-01-32- | N | AAG Stucchi App

## TRIMLESS 48V

**TRACK 48V TRIMLESS** Short T-Bracket

A338-00-03



**TRACK 48V TRIMLESS** Long T-Bracket

A338-00-04



**TRACK 48V TRIMLESS** Straight Joiners (2 units)

A338-00-05



**TRACK 48V TRIMLESS** Plaster Installation Guard 1m

A338-00-21

**TRACK 48V** Clamp for M6 ROD

A338-00-09

*See accessories quantities

**TRACK 48V** Track Clamp

A338-00-10

*See accessories quantities




**TRACK 48V TRIMLESS** Suspension Kit

A338-00-08

*See accessories quantities

*** SUGGESTED MOUNTING ACCESSORIES QUANTITIES**

1000mm - 2 Pcs.
2000mm - 3 Pcs.
3000mm - 4 Pcs.

## SURFACE, SUSPENSION , SURFACE SHORT & SUSPENSION SHORT 48V



**TRACK 48V SURFACE** Straight Joiner

A338-00-11- | N |

COLOUR | N ■ |

# TRACK 48V

## TRIMLESS, SURFACE & SUSPENSION 48V

**TRACK 48V TRIMLESS & SURFACE End**

A338-00-06- | N |

**TRACK 48V TRIMLESS & SURFACE End Feed**

A338-00-07- | N |

## SURFACE SHORT & SUSPENSION SHORT 48V

**TRACK 48V SURFACE SHORT End**

A338-00-18- | N |

**TRACK 48V SURFACE SHORT End Feed**

A338-00-19- | N |

## SURFACE & SURFACE SHORT 48V




**TRACK 48V Power Supply Case**

A338-00-20- | N | NO DIM

*To be installed aside 48V Surface Tracks
Power supply not included

## SUSPENSION & SUSPENSION SHORT 48V




**TRACK 48V Wired Power Supply Case**

A338-00-22- | N | NO DIM

A338-00-23- | N | DIM

*Power supply not included




**TRACK 48V SURFACE Suspension Kit (2 units)**

A338-00-15- | N |

**TRACK 48V SURFACE Suspension Feed Kit**

A338-00-16- | N | NO DIM

A338-00-17- | N | DIM

*For remote power supply

COLOUR | N ■ |

# SPIN 48V

ARKOSLIGHT®

## DIMENSIONS

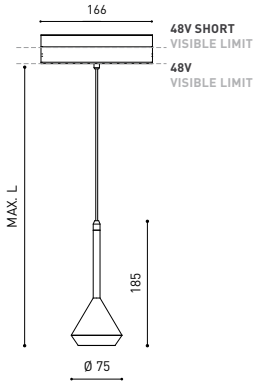


## ACCESSORIES

CORD ACCESOSORY



TRACK 48V OPTIONS

| | PRODUCT |
|---|---|
| Name | SPIN 48V 2M 40º 3000K WT |
| Reference | A3500111WT |
| Color | Textured white |
| RAL | 9016 |
| Category | TRACKLIGHTS |

| | LIGHTING INFORMATION |
|---|---|
| Light source | LED |
| Gross luminous flux | 630 Lm |
| Power | 6,5 W |
| Power values of the system | 6,84 W |
| Colour temperature | 3000 K |
| Colour Rendering Index | CRI>90 |
| Chromatic stability | MacAdam Step 2 |
| Light beam angle | 40° |
| Lighting efficiency | 84% |
| Efficacy | 97 Lm/W |
| Current intensity | 700 mA |
| Dimming | No Dim - Other DIM, please consult |
| Control through bluetooth | Please Consult |
| Driver | Included |
| Electrical insulation class | III |
| Voltage | 48 Vdc |
| Energy efficiency | A+ |
| LED lifespan | L80B10 (Tj=85°C) >60.000h |

| | OTHER DATA |
|---|---|
| Ingress Protection | IP20 |
| Cord length | 2 m |
| Fast adjustment tensioner | No |
| Track type | Track 48V |
| Weight | 530 g. |
| Packaged weight | 666 g. |
| Packaging dimensions | 253 × 152 × 102 mm |
| Units per package | 1 |
| Materials | Aluminium / Polymethyl Methacrylate |

CE

## AWARDS

Spin 48V, reduced dimensions, essential lines and revolutionary geometry in a pendant luminary for accent lighting. Its extra fine wire gives Spin a sense of airiness and flotability. Spin, now available for Arkoslight's low voltage tracklight systems.

Calle N · Pol. Ind. EL OLIVERAL
46394 Ribarroja del Turia · Valencia (Spain)
Tel. +34 961 667 207 · Fax +34 961 667 054
info@arkoslight.com · www.arkoslight.com

28-03-20 / 03:57

5 Year GUARANTEE*

## POLAR DIAGRAM

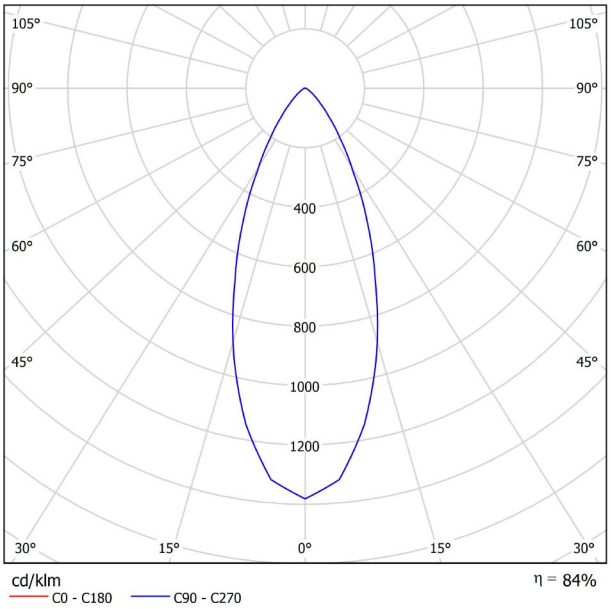


## CONICAL DIAGRAM

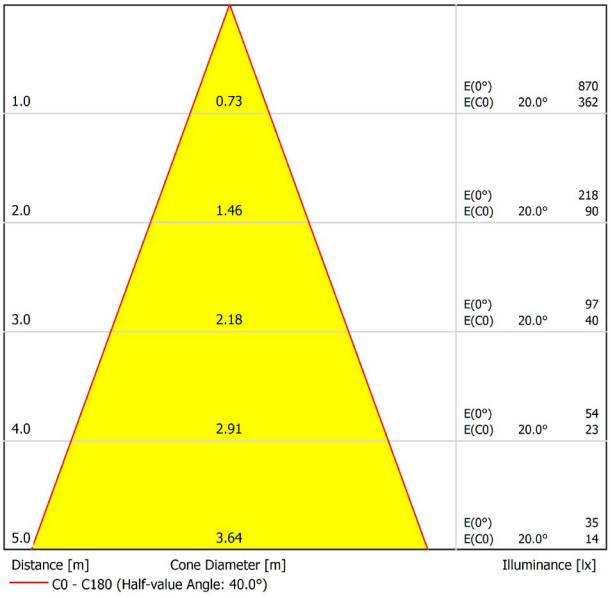

# CORD ACCESSORY

ARKOSLIGHT®

| | PRODUCT |
|---|---|
| Model | Cord Accessory |
| Reference | **02230000** \| **WT** \| **NT** \| |
| Colour | **WT** ☐ RAL 9016 \| **NT** ■ RAL9005 |
| Category | Accessories |

## DIMENSIONAL DRAWING




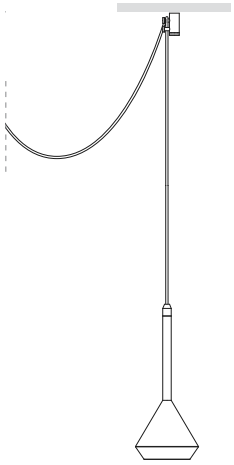

Calle N · Pol. Ind. EL OLIVERAL
46394 Ribarroja del Turia · Valencia (Spain)
Tel. +34 961 667 207 · Fax +34 961 667 054
info@arkoslight.com · www.arkoslight.com

5 Year GUARANTEE*

# TRACK 48V




## TRACK 48V TRIMLESS

| | | |
|---|---|---|
| TRACK 48V TRIMLESS 1m | A338-01-00- | N |
| TRACK 48V TRIMLESS 2m | A338-02-00- | N |
| TRACK 48V TRIMLESS 3m | A338-03-00- | N |
| TRACK 48V TRIMLESS Corner 90º One Plane | A338-06-00- | N |
| TRACK 48V TRIMLESS Corner 90º Two Planes | A338-07-00- | N |

RECOMMENDED FOR INSTALLATIONS WHERE THE PROFILE CAN BE INSTALLED BEFORE THE FALSE PLASTERBOARD CEILING (THICKNESS 12,5mm.)

CE III

TRACK 48V TRIMLESS

Corner 90º One Plane




*Electrical connection not included

TRACK 48V TRIMLESS

Corner 90º Two Planes




*Electrical connection not included




## TRACK 48V SURFACE

| | | |
|---|---|---|
| TRACK 48V SURFACE 1m | A338-11-00- | N |
| TRACK 48V SURFACE 2m | A338-12-00- | N |
| TRACK 48V SURFACE 3m | A338-13-00- | N |
| TRACK 48V SURFACE Corner 90º One Plane | A338-14-00- | N |

CE III

TRACK 48V SURFACE

Corner 90º One Plane




*Electrical connection not included




## TRACK 48V SURFACE SHORT

| | | |
|---|---|---|
| TRACK 48V SURFACE SHORT 1m | A338-21-00- | N |
| TRACK 48V SURFACE SHORT 2m | A338-22-00- | N |
| TRACK 48V SURFACE SHORT 3m | A338-23-00- | N |
| TRACK 48V SURFACE SHORT Corner 90º One Plane | A338-24-00- | N |

CE III

TRACK 48V SURFACE SHORT

Corner 90º One Plane




*Electrical connection not included

48V SYSTEM

# TRACK 48V

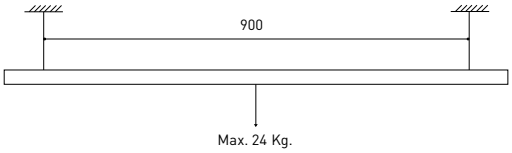


| | | P | V | D |
|---|---|---|---|---|
| CONSTANT VOLTAGE LED POWER SUPPLY | **0434-01-21** | 75W | 48V | 180 x 52 x 30mm |
| | **0434-01-22** | 150W | 48V | 240 x 60 x 49mm |

DROP VOLTAGE TABLE

| | | **CABLE LENGHT** (m) | | | |
|---|---|---|---|---|---|
| | | 5 | 10 | 20 | 30 |
| **POWER** (W) | **CABLE SECTION** ($mm^2$) | **TRACK LENGHT** (m) | | | |
| 75 | 0,75 | 50 | 50 | 30 | X |
| | 1,5 | 50 | 50 | 50 | 50 |
| 150 | 0,75 | 40 | 15 | X | X |
| | 1,5 | 50 | 40 | 20 | X |

## COMPATIBILITY ACCORDING TO TYPE OF TRACK

### TRACK 48V & TRACK 48V SURFACE SHORT

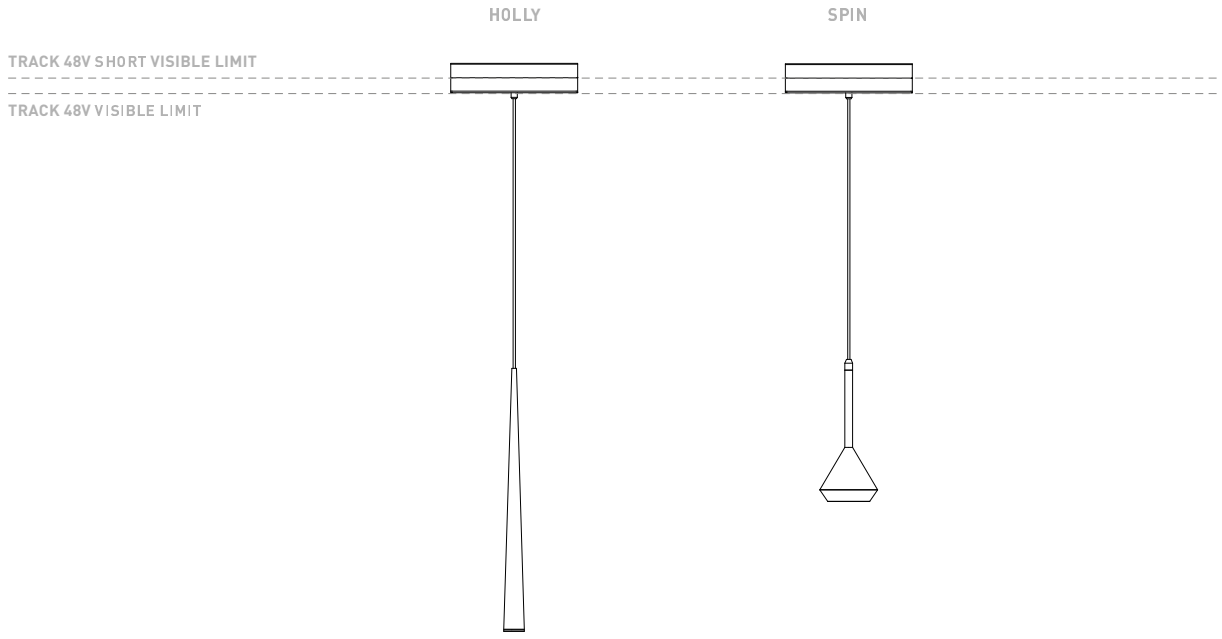





Order with *The 2019 Collection* codes. Products with one single version for both tracks

# TRACK 48V

## ALL 48V TRACK




**TRACK 48V** Live-End Connector

A338-00-01- | N |




**TRACK 48V** Central Connector

A338-00-02- | N |




**TRACK 48V** Corner 90º Connector

A338-00-12- | N |




**TRACK 48V** Wireless Control

0434-01-31- | N | Casambi/AAG Stucchi App

0434-01-32- | N | AAG Stucchi App

## TRIMLESS 48V

**TRACK 48V TRIMLESS** Short T-Bracket

A338-00-03



**TRACK 48V TRIMLESS** Long T-Bracket

A338-00-04



**TRACK 48V TRIMLESS** Straight Joiners (2 units)

A338-00-05



**TRACK 48V TRIMLESS** Plaster Installation Guard 1m

A338-00-21

**TRACK 48V** Clamp for M6 ROD

A338-00-09

*See accessories quantities

**TRACK 48V** Track Clamp

A338-00-10

*See accessories quantities




**TRACK 48V TRIMLESS** Suspension Kit

A338-00-08

*See accessories quantities

*** SUGGESTED MOUNTING ACCESSORIES QUANTITIES**

1000mm - 2 Pcs.
2000mm - 3 Pcs.
3000mm - 4 Pcs.

## SURFACE, SUSPENSION , SURFACE SHORT & SUSPENSION SHORT 48V



**TRACK 48V SURFACE** Straight Joiner

A338-00-11- | N |

COLOUR | N ■ |

# TRACK 48V

## TRIMLESS, SURFACE & SUSPENSION 48V

**TRACK 48V TRIMLESS & SURFACE End**

A338-00-06- | N |

**TRACK 48V TRIMLESS & SURFACE End Feed**

A338-00-07- | N |

## SURFACE SHORT & SUSPENSION SHORT 48V

**TRACK 48V SURFACE SHORT End**

A338-00-18- | N |

**TRACK 48V SURFACE SHORT End Feed**

A338-00-19- | N |

## SURFACE & SURFACE SHORT 48V




**TRACK 48V Power Supply Case**

A338-00-20- | N | NO DIM

*To be installed aside 48V Surface Tracks
Power supply not included

## SUSPENSION & SUSPENSION SHORT 48V




**TRACK 48V Wired Power Supply Case**

A338-00-22- | N | NO DIM

A338-00-23- | N | DIM

*Power supply not included




**TRACK 48V SURFACE Suspension Kit (2 units)**

A338-00-15- | N |

**TRACK 48V SURFACE Suspension Feed Kit**

A338-00-16- | N | NO DIM

A338-00-17- | N | DIM

*For remote power supply

COLOUR | N ■ |

# SPIN 48V

ARKOSLIGHT®

## DIMENSIONS

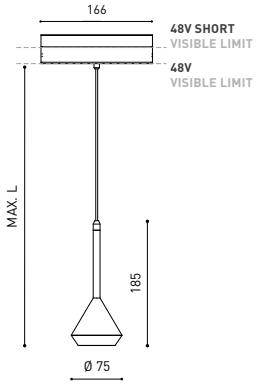


## ACCESSORIES

CORD ACCESOSORY



TRACK 48V OPTIONS

| | PRODUCT |
|---|---|
| Name | SPIN 48V 2M DIM DALI 24º 2700K MC |
| Reference | A3500200MC |
| Color | Metallized copper |
| RAL | Paint of metallic nanoparticles |
| Category | TRACKLIGHTS |

| | LIGHTING INFORMATION |
|---|---|
| Light source | LED |
| Gross luminous flux | 600 Lm |
| Power | 6,5 W |
| Power values of the system | 6,84 W |
| Colour temperature | 2700 K |
| Colour Rendering Index | CRI>90 |
| Chromatic stability | MacAdam Step 2 |
| Light beam angle | 24° |
| Lighting efficiency | 86% |
| Efficacy | 92 Lm/W |
| Current intensity | 700 mA |
| Dimming | DALI - Other DIM, please consult |
| Control through bluetooth | Please Consult |
| Driver | Included |
| Electrical insulation class | III |
| Voltage | 48 Vdc |
| Energy efficiency | A+ |
| LED lifespan | L80B10 (Tj=85°C) >60.000h |

| | OTHER DATA |
|---|---|
| Ingress Protection | IP20 |
| Cord length | 2 m |
| Fast adjustment tensioner | No |
| Track type | Track 48V |
| Weight | 530 g. |
| Packaged weight | 666 g. |
| Packaging dimensions | 253 × 152 × 102 mm |
| Units per package | 1 |
| Materials | Aluminium / Polymethyl Methacrylate |

CE

## AWARDS

Spin 48V, reduced dimensions, essential lines and revolutionary geometry in a pendant luminary for accent lighting. Its extra fine wire gives Spin a sense of airiness and flotability. Spin, now available for Arkoslight's low voltage tracklight systems.

Calle N · Pol. Ind. EL OLIVERAL
46394 Ribarroja del Turia · Valencia (Spain)
Tel. +34 961 667 207 · Fax +34 961 667 054
info@arkoslight.com · www.arkoslight.com

28-03-20 / 04:08

5 Year GUARANTEE*

## POLAR DIAGRAM

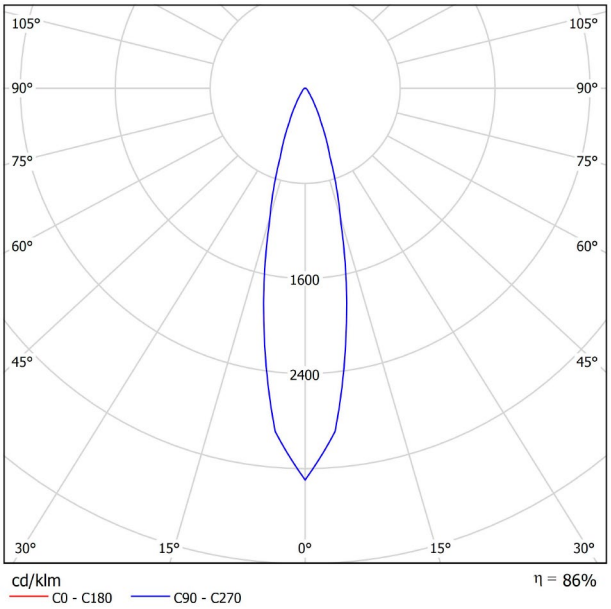


## CONICAL DIAGRAM

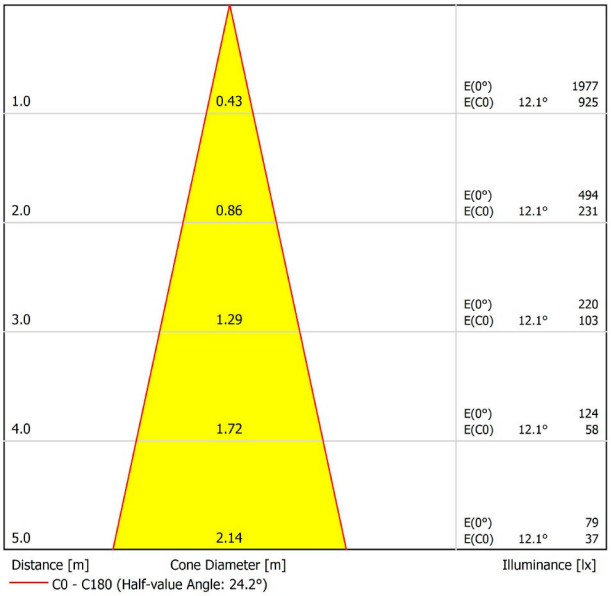

# CORD ACCESSORY

ARKOSLIGHT®

| | PRODUCT |
|---|---|
| Model | Cord Accessory |
| Reference | **02230000** \| **WT** \| **NT** \| |
| Colour | **WT** ☐ RAL 9016 \| **NT** ■ RAL9005 |
| Category | Accessories |

## DIMENSIONAL DRAWING




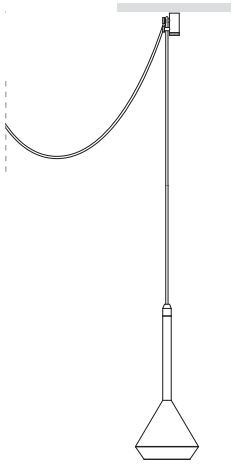

Calle N · Pol. Ind. EL OLIVERAL
46394 Ribarroja del Turia · Valencia (Spain)
Tel. +34 961 667 207 · Fax +34 961 667 054
info@arkoslight.com · www.arkoslight.com

5 Year GUARANTEE*

# TRACK 48V




## TRACK 48V TRIMLESS

| | | |
|---|---|---|
| TRACK 48V TRIMLESS 1m | A338-01-00- | N |
| TRACK 48V TRIMLESS 2m | A338-02-00- | N |
| TRACK 48V TRIMLESS 3m | A338-03-00- | N |
| TRACK 48V TRIMLESS Corner 90º One Plane | A338-06-00- | N |
| TRACK 48V TRIMLESS Corner 90º Two Planes | A338-07-00- | N |

RECOMMENDED FOR INSTALLATIONS WHERE THE PROFILE CAN BE INSTALLED BEFORE THE FALSE PLASTERBOARD CEILING (THICKNESS 12,5mm.)

CE III

TRACK 48V TRIMLESS

Corner 90º One Plane




*Electrical connection not included

TRACK 48V TRIMLESS

Corner 90º Two Planes




*Electrical connection not included




## TRACK 48V SURFACE

| | | |
|---|---|---|
| TRACK 48V SURFACE 1m | A338-11-00- | N |
| TRACK 48V SURFACE 2m | A338-12-00- | N |
| TRACK 48V SURFACE 3m | A338-13-00- | N |
| TRACK 48V SURFACE Corner 90º One Plane | A338-14-00- | N |

CE III

TRACK 48V SURFACE

Corner 90º One Plane




*Electrical connection not included




## TRACK 48V SURFACE SHORT

| | | |
|---|---|---|
| TRACK 48V SURFACE SHORT 1m | A338-21-00- | N |
| TRACK 48V SURFACE SHORT 2m | A338-22-00- | N |
| TRACK 48V SURFACE SHORT 3m | A338-23-00- | N |
| TRACK 48V SURFACE SHORT Corner 90º One Plane | A338-24-00- | N |

CE III

TRACK 48V SURFACE SHORT

Corner 90º One Plane




*Electrical connection not included

48V SYSTEM

# TRACK 48V

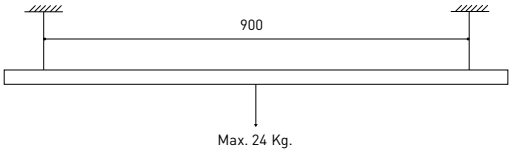


| | | P | V | D |
|---|---|---|---|---|
| CONSTANT VOLTAGE LED POWER SUPPLY | **0434-01-21** | 75W | 48V | 180 x 52 x 30mm |
| | **0434-01-22** | 150W | 48V | 240 x 60 x 49mm |

DROP VOLTAGE TABLE

| | | **CABLE LENGHT** (m) | | | |
|---|---|---|---|---|---|
| | | 5 | 10 | 20 | 30 |
| **POWER** (W) | **CABLE SECTION** ($mm^2$) | **TRACK LENGHT** (m) | | | |
| 75 | 0,75 | 50 | 50 | 30 | X |
| | 1,5 | 50 | 50 | 50 | 50 |
| 150 | 0,75 | 40 | 15 | X | X |
| | 1,5 | 50 | 40 | 20 | X |

## COMPATIBILITY ACCORDING TO TYPE OF TRACK

### TRACK 48V & TRACK 48V SURFACE SHORT

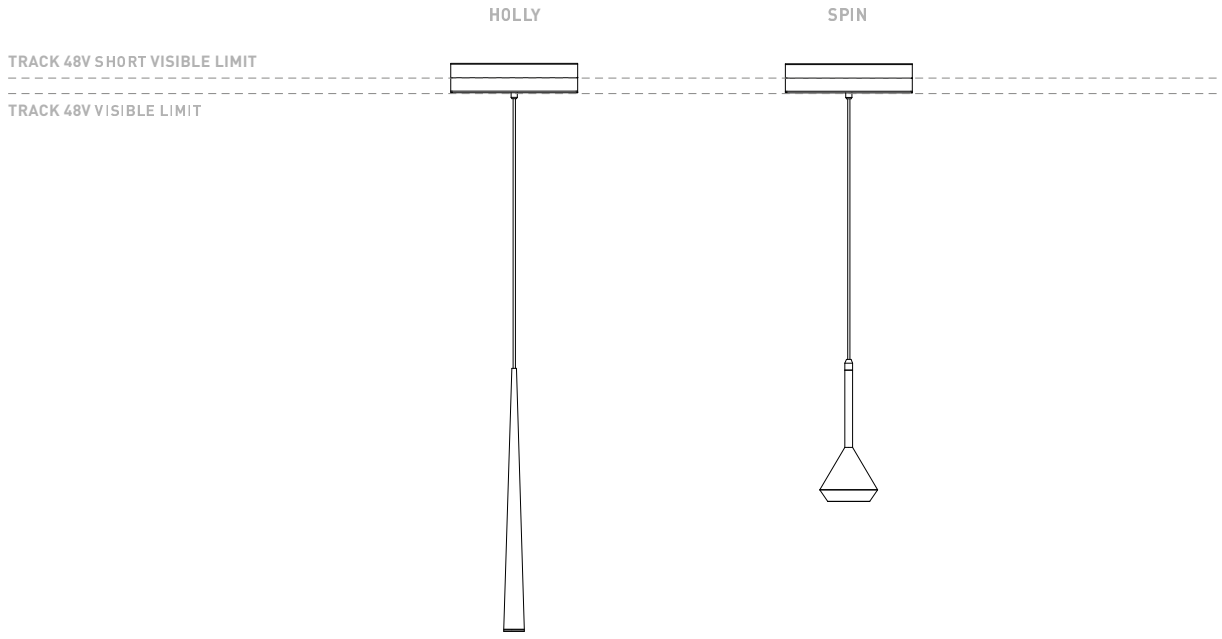





Order with *The 2019 Collection* codes. Products with one single version for both tracks

# TRACK 48V

## ALL 48V TRACK




**TRACK 48V** Live-End Connector

A338-00-01- | N |




**TRACK 48V** Central Connector

A338-00-02- | N |




**TRACK 48V** Corner 90º Connector

A338-00-12- | N |




**TRACK 48V** Wireless Control

0434-01-31- | N | Casambi/AAG Stucchi App

0434-01-32- | N | AAG Stucchi App

## TRIMLESS 48V

**TRACK 48V TRIMLESS** Short T-Bracket

A338-00-03



**TRACK 48V TRIMLESS** Long T-Bracket

A338-00-04



**TRACK 48V TRIMLESS** Straight Joiners (2 units)

A338-00-05



**TRACK 48V TRIMLESS** Plaster Installation Guard 1m

A338-00-21

**TRACK 48V** Clamp for M6 ROD

A338-00-09

*See accessories quantities

**TRACK 48V** Track Clamp

A338-00-10

*See accessories quantities




**TRACK 48V TRIMLESS** Suspension Kit

A338-00-08

*See accessories quantities

*** SUGGESTED MOUNTING ACCESSORIES QUANTITIES**

1000mm - 2 Pcs.
2000mm - 3 Pcs.
3000mm - 4 Pcs.

## SURFACE, SUSPENSION , SURFACE SHORT & SUSPENSION SHORT 48V



**TRACK 48V SURFACE** Straight Joiner

A338-00-11- | N |

COLOUR | N ■ |

# TRACK 48V

## TRIMLESS, SURFACE & SUSPENSION 48V

**TRACK 48V TRIMLESS & SURFACE End**

A338-00-06- | N |

**TRACK 48V TRIMLESS & SURFACE End Feed**

A338-00-07- | N |

## SURFACE SHORT & SUSPENSION SHORT 48V

**TRACK 48V SURFACE SHORT End**

A338-00-18- | N |

**TRACK 48V SURFACE SHORT End Feed**

A338-00-19- | N |

## SURFACE & SURFACE SHORT 48V




**TRACK 48V Power Supply Case**

A338-00-20- | N | NO DIM

*To be installed aside 48V Surface Tracks
Power supply not included

## SUSPENSION & SUSPENSION SHORT 48V




**TRACK 48V Wired Power Supply Case**

A338-00-22- | N | NO DIM

A338-00-23- | N | DIM

*Power supply not included




**TRACK 48V SURFACE Suspension Kit (2 units)**

A338-00-15- | N |

**TRACK 48V SURFACE Suspension Feed Kit**

A338-00-16- | N | NO DIM

A338-00-17- | N | DIM

*For remote power supply

COLOUR | N ■ |

# SPIN 48V

ARKOSLIGHT®

## DIMENSIONS

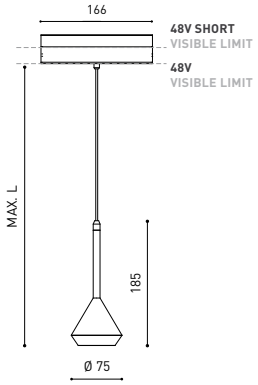


## ACCESSORIES

CORD ACCESOSORY



TRACK 48V OPTIONS

| | PRODUCT |
|---|---|
| Name | SPIN 48V 2M DIM DALI 24º 2700K MG |
| Reference | A3500200MG |
| Color | Metallized gold |
| RAL | Paint of metallic nanoparticles |
| Category | TRACKLIGHTS |

| | LIGHTING INFORMATION |
|---|---|
| Light source | LED |
| Gross luminous flux | 600 Lm |
| Power | 6,5 W |
| Power values of the system | 6,84 W |
| Colour temperature | 2700 K |
| Colour Rendering Index | CRI>90 |
| Chromatic stability | MacAdam Step 2 |
| Light beam angle | 24° |
| Lighting efficiency | 86% |
| Efficacy | 92 Lm/W |
| Current intensity | 700 mA |
| Dimming | DALI - Other DIM, please consult |
| Control through bluetooth | Please Consult |
| Driver | Included |
| Electrical insulation class | III |
| Voltage | 48 Vdc |
| Energy efficiency | A+ |
| LED lifespan | L80B10 (Tj=85°C) >60.000h |

| | OTHER DATA |
|---|---|
| Ingress Protection | IP20 |
| Cord length | 2 m |
| Fast adjustment tensioner | No |
| Track type | Track 48V |
| Weight | 530 g. |
| Packaged weight | 666 g. |
| Packaging dimensions | 253 × 152 × 102 mm |
| Units per package | 1 |
| Materials | Aluminium / Polymethyl Methacrylate |

CE

## AWARDS

Spin 48V, reduced dimensions, essential lines and revolutionary geometry in a pendant luminary for accent lighting. Its extra fine wire gives Spin a sense of airiness and flotability. Spin, now available for Arkoslight's low voltage tracklight systems.

Calle N · Pol. Ind. EL OLIVERAL
46394 Ribarroja del Turia · Valencia (Spain)
Tel. +34 961 667 207 · Fax +34 961 667 054
info@arkoslight.com · www.arkoslight.com

28-03-20 / 04:08

5 Year GUARANTEE*

## POLAR DIAGRAM

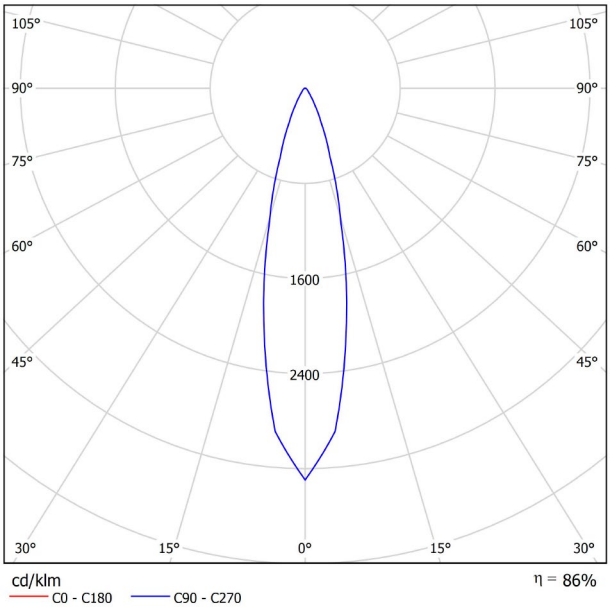


## CONICAL DIAGRAM

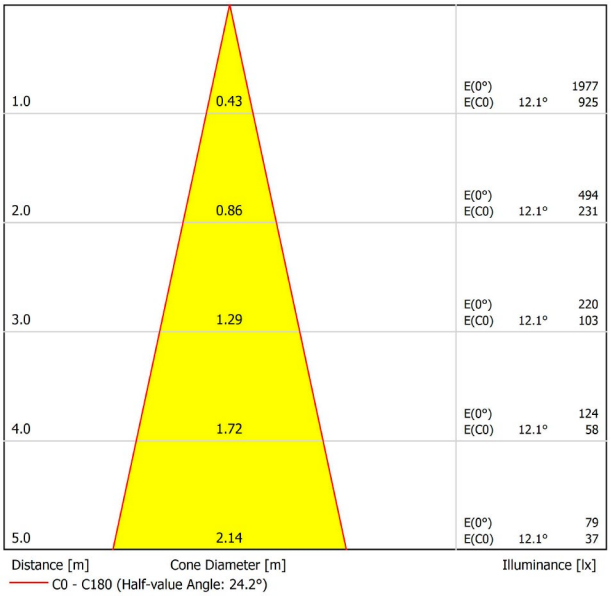

# CORD ACCESSORY

ARKOSLIGHT®

| | PRODUCT |
|---|---|
| Model | Cord Accessory |
| Reference | **02230000** \| **WT** \| **NT** \| |
| Colour | **WT** ☐ RAL 9016 \| **NT** ■ RAL9005 |
| Category | Accessories |

## DIMENSIONAL DRAWING




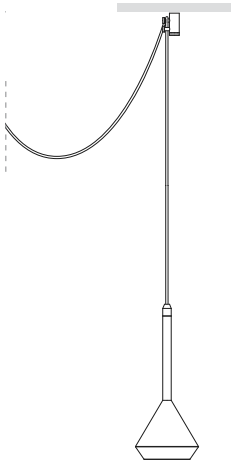

Calle N · Pol. Ind. EL OLIVERAL
46394 Ribarroja del Turia · Valencia (Spain)
Tel. +34 961 667 207 · Fax +34 961 667 054
info@arkoslight.com · www.arkoslight.com

5 Year GUARANTEE*

# TRACK 48V




## TRACK 48V TRIMLESS

| | | |
|---|---|---|
| TRACK 48V TRIMLESS 1m | A338-01-00- | N |
| TRACK 48V TRIMLESS 2m | A338-02-00- | N |
| TRACK 48V TRIMLESS 3m | A338-03-00- | N |
| TRACK 48V TRIMLESS Corner 90º One Plane | A338-06-00- | N |
| TRACK 48V TRIMLESS Corner 90º Two Planes | A338-07-00- | N |

RECOMMENDED FOR INSTALLATIONS WHERE THE PROFILE CAN BE INSTALLED BEFORE THE FALSE PLASTERBOARD CEILING (THICKNESS 12,5mm.)

CE III

TRACK 48V TRIMLESS

Corner 90º One Plane




*Electrical connection not included

TRACK 48V TRIMLESS

Corner 90º Two Planes




*Electrical connection not included




## TRACK 48V SURFACE

| | | |
|---|---|---|
| TRACK 48V SURFACE 1m | A338-11-00- | N |
| TRACK 48V SURFACE 2m | A338-12-00- | N |
| TRACK 48V SURFACE 3m | A338-13-00- | N |
| TRACK 48V SURFACE Corner 90º One Plane | A338-14-00- | N |

CE III

TRACK 48V SURFACE

Corner 90º One Plane




*Electrical connection not included




## TRACK 48V SURFACE SHORT

| | | |
|---|---|---|
| TRACK 48V SURFACE SHORT 1m | A338-21-00- | N |
| TRACK 48V SURFACE SHORT 2m | A338-22-00- | N |
| TRACK 48V SURFACE SHORT 3m | A338-23-00- | N |
| TRACK 48V SURFACE SHORT Corner 90º One Plane | A338-24-00- | N |

CE III

TRACK 48V SURFACE SHORT

Corner 90º One Plane




*Electrical connection not included

48V SYSTEM

# TRACK 48V

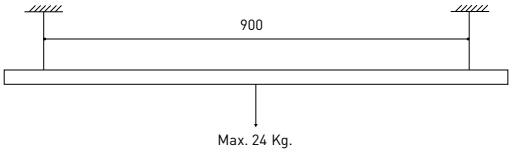


| | | P | V | D |
|---|---|---|---|---|
| CONSTANT VOLTAGE LED POWER SUPPLY | **0434-01-21** | 75W | 48V | 180 x 52 x 30mm |
| | **0434-01-22** | 150W | 48V | 240 x 60 x 49mm |

DROP VOLTAGE TABLE

| | | **CABLE LENGHT** (m) | | | |
|---|---|---|---|---|---|
| | | 5 | 10 | 20 | 30 |
| **POWER** (W) | **CABLE SECTION** ($mm^2$) | **TRACK LENGHT** (m) | | | |
| 75 | 0,75 | 50 | 50 | 30 | X |
| | 1,5 | 50 | 50 | 50 | 50 |
| 150 | 0,75 | 40 | 15 | X | X |
| | 1,5 | 50 | 40 | 20 | X |

## COMPATIBILITY ACCORDING TO TYPE OF TRACK

### TRACK 48V & TRACK 48V SURFACE SHORT

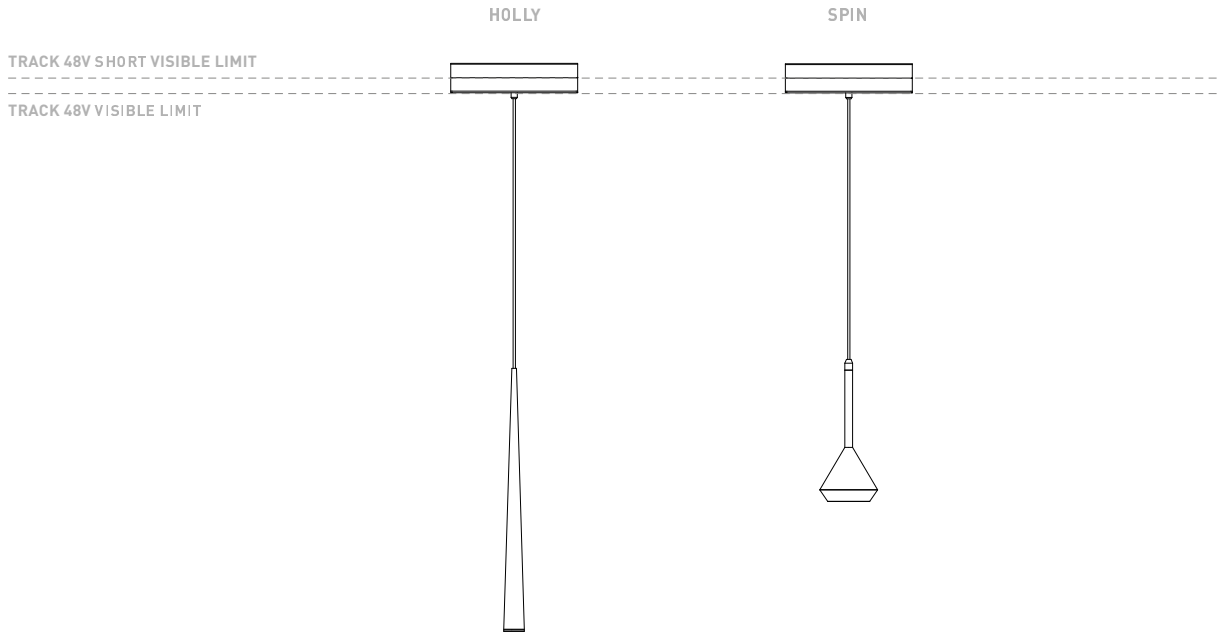





Order with *The 2019 Collection* codes. Products with one single version for both tracks

# TRACK 48V

## ALL 48V TRACK




**TRACK 48V** Live-End Connector

A338-00-01- | N |




**TRACK 48V** Central Connector

A338-00-02- | N |




**TRACK 48V** Corner 90º Connector

A338-00-12- | N |




**TRACK 48V** Wireless Control

0434-01-31- | N | Casambi/AAG Stucchi App

0434-01-32- | N | AAG Stucchi App

## TRIMLESS 48V

**TRACK 48V TRIMLESS** Short T-Bracket

A338-00-03



**TRACK 48V TRIMLESS** Long T-Bracket

A338-00-04



**TRACK 48V TRIMLESS** Straight Joiners (2 units)

A338-00-05



**TRACK 48V TRIMLESS** Plaster Installation Guard 1m

A338-00-21

**TRACK 48V** Clamp for M6 ROD

A338-00-09

*See accessories quantities

**TRACK 48V** Track Clamp

A338-00-10

*See accessories quantities




**TRACK 48V TRIMLESS** Suspension Kit

A338-00-08

*See accessories quantities

*** SUGGESTED MOUNTING ACCESSORIES QUANTITIES**

1000mm - 2 Pcs.
2000mm - 3 Pcs.
3000mm - 4 Pcs.

## SURFACE, SUSPENSION , SURFACE SHORT & SUSPENSION SHORT 48V



**TRACK 48V SURFACE** Straight Joiner

A338-00-11- | N |

COLOUR | N ■ |

# TRACK 48V

## TRIMLESS, SURFACE & SUSPENSION 48V

**TRACK 48V TRIMLESS & SURFACE End**

A338-00-06- | N |

**TRACK 48V TRIMLESS & SURFACE End Feed**

A338-00-07- | N |

## SURFACE SHORT & SUSPENSION SHORT 48V

**TRACK 48V SURFACE SHORT End**

A338-00-18- | N |

**TRACK 48V SURFACE SHORT End Feed**

A338-00-19- | N |

## SURFACE & SURFACE SHORT 48V




**TRACK 48V Power Supply Case**

A338-00-20- | N | NO DIM

*To be installed aside 48V Surface Tracks
Power supply not included

## SUSPENSION & SUSPENSION SHORT 48V




**TRACK 48V Wired Power Supply Case**

A338-00-22- | N | NO DIM

A338-00-23- | N | DIM

*Power supply not included




**TRACK 48V SURFACE Suspension Kit (2 units)**

A338-00-15- | N |

**TRACK 48V SURFACE Suspension Feed Kit**

A338-00-16- | N | NO DIM

A338-00-17- | N | DIM

*For remote power supply

COLOUR | N ■ |

# SPIN 48V

ARKOSLIGHT®

## DIMENSIONS

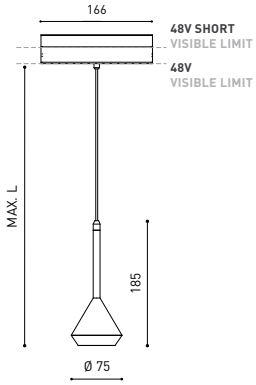


## ACCESSORIES

CORD ACCESOSORY



TRACK 48V OPTIONS

| | PRODUCT |
|---|---|
| Name | SPIN 48V 2M DIM DALI 24º 2700K NT |
| Reference | A3500200NT |
| Color | Textured black |
| RAL | 9005 |
| Category | TRACKLIGHTS |

| | LIGHTING INFORMATION |
|---|---|
| Light source | LED |
| Gross luminous flux | 600 Lm |
| Power | 6,5 W |
| Power values of the system | 6,84 W |
| Colour temperature | 2700 K |
| Colour Rendering Index | CRI>90 |
| Chromatic stability | MacAdam Step 2 |
| Light beam angle | 24° |
| Lighting efficiency | 86% |
| Efficacy | 92 Lm/W |
| Current intensity | 700 mA |
| Dimming | DALI - Other DIM, please consult |
| Control through bluetooth | Please Consult |
| Driver | Included |
| Electrical insulation class | III |
| Voltage | 48 Vdc |
| Energy efficiency | A+ |
| LED lifespan | L80B10 (Tj=85°C) >60.000h |

| | OTHER DATA |
|---|---|
| Ingress Protection | IP20 |
| Cord length | 2 m |
| Fast adjustment tensioner | No |
| Track type | Track 48V |
| Weight | 530 g. |
| Packaged weight | 666 g. |
| Packaging dimensions | 253 × 152 × 102 mm |
| Units per package | 1 |
| Materials | Aluminium / Polymethyl Methacrylate |

CE

## AWARDS

Spin 48V, reduced dimensions, essential lines and revolutionary geometry in a pendant luminary for accent lighting. Its extra fine wire gives Spin a sense of airiness and flotability. Spin, now available for Arkoslight's low voltage tracklight systems.

Calle N · Pol. Ind. EL OLIVERAL
46394 Ribarroja del Turia · Valencia (Spain)
Tel. +34 961 667 207 · Fax +34 961 667 054
info@arkoslight.com · www.arkoslight.com

28-03-20 / 04:04

5 Year GUARANTEE*

## POLAR DIAGRAM

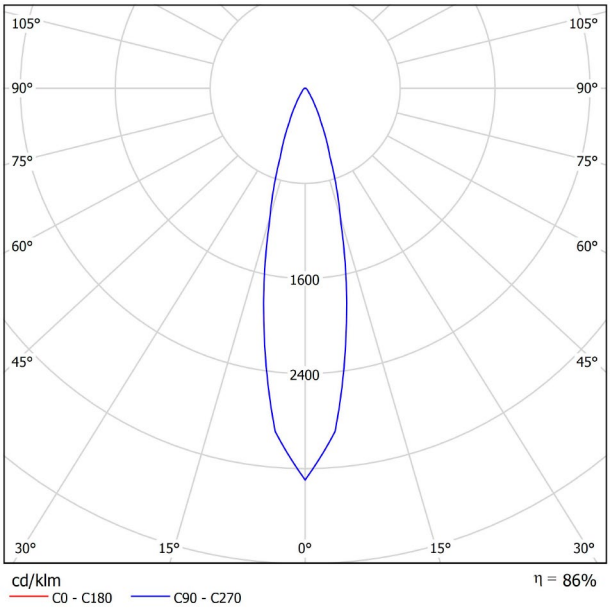


## CONICAL DIAGRAM

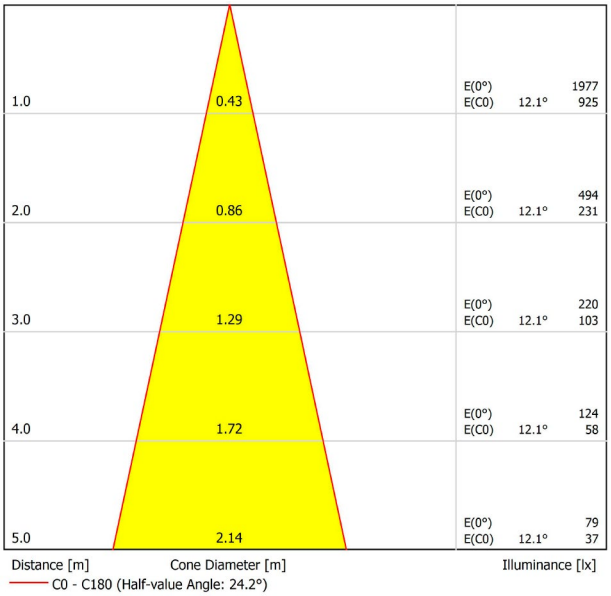

# CORD ACCESSORY

ARKOSLIGHT®

| | PRODUCT |
|---|---|
| Model | Cord Accessory |
| Reference | **02230000** \| **WT** \| **NT** \| |
| Colour | **WT** ☐ RAL 9016 \| **NT** ■ RAL9005 |
| Category | Accessories |

## DIMENSIONAL DRAWING




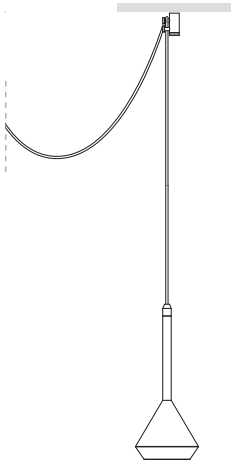

Calle N · Pol. Ind. EL OLIVERAL
46394 Ribarroja del Turia · Valencia (Spain)
Tel. +34 961 667 207 · Fax +34 961 667 054
info@arkoslight.com · www.arkoslight.com

5 Year GUARANTEE*

# TRACK 48V




## TRACK 48V TRIMLESS

| | | |
|---|---|---|
| TRACK 48V TRIMLESS 1m | A338-01-00- | N |
| TRACK 48V TRIMLESS 2m | A338-02-00- | N |
| TRACK 48V TRIMLESS 3m | A338-03-00- | N |
| TRACK 48V TRIMLESS Corner 90º One Plane | A338-06-00- | N |
| TRACK 48V TRIMLESS Corner 90º Two Planes | A338-07-00- | N |

RECOMMENDED FOR INSTALLATIONS WHERE THE PROFILE CAN BE INSTALLED BEFORE THE FALSE PLASTERBOARD CEILING (THICKNESS 12,5mm.)

CE III

TRACK 48V TRIMLESS

Corner 90º One Plane




*Electrical connection not included

TRACK 48V TRIMLESS

Corner 90º Two Planes




*Electrical connection not included




## TRACK 48V SURFACE

| | | |
|---|---|---|
| TRACK 48V SURFACE 1m | A338-11-00- | N |
| TRACK 48V SURFACE 2m | A338-12-00- | N |
| TRACK 48V SURFACE 3m | A338-13-00- | N |
| TRACK 48V SURFACE Corner 90º One Plane | A338-14-00- | N |

CE III

TRACK 48V SURFACE

Corner 90º One Plane




*Electrical connection not included




## TRACK 48V SURFACE SHORT

| | | |
|---|---|---|
| TRACK 48V SURFACE SHORT 1m | A338-21-00- | N |
| TRACK 48V SURFACE SHORT 2m | A338-22-00- | N |
| TRACK 48V SURFACE SHORT 3m | A338-23-00- | N |
| TRACK 48V SURFACE SHORT Corner 90º One Plane | A338-24-00- | N |

CE III

TRACK 48V SURFACE SHORT

Corner 90º One Plane




*Electrical connection not included

48V SYSTEM

# TRACK 48V

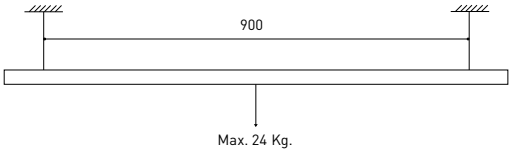


| | | P | V | D |
|---|---|---|---|---|
| CONSTANT VOLTAGE LED POWER SUPPLY | **0434-01-21** | 75W | 48V | 180 x 52 x 30mm |
| | **0434-01-22** | 150W | 48V | 240 x 60 x 49mm |

DROP VOLTAGE TABLE

| | | **CABLE LENGHT** (m) | | | |
|---|---|---|---|---|---|
| | | 5 | 10 | 20 | 30 |
| **POWER** (W) | **CABLE SECTION** ($mm^2$) | **TRACK LENGHT** (m) | | | |
| 75 | 0,75 | 50 | 50 | 30 | X |
| | 1,5 | 50 | 50 | 50 | 50 |
| 150 | 0,75 | 40 | 15 | X | X |
| | 1,5 | 50 | 40 | 20 | X |

## COMPATIBILITY ACCORDING TO TYPE OF TRACK

### TRACK 48V & TRACK 48V SURFACE SHORT

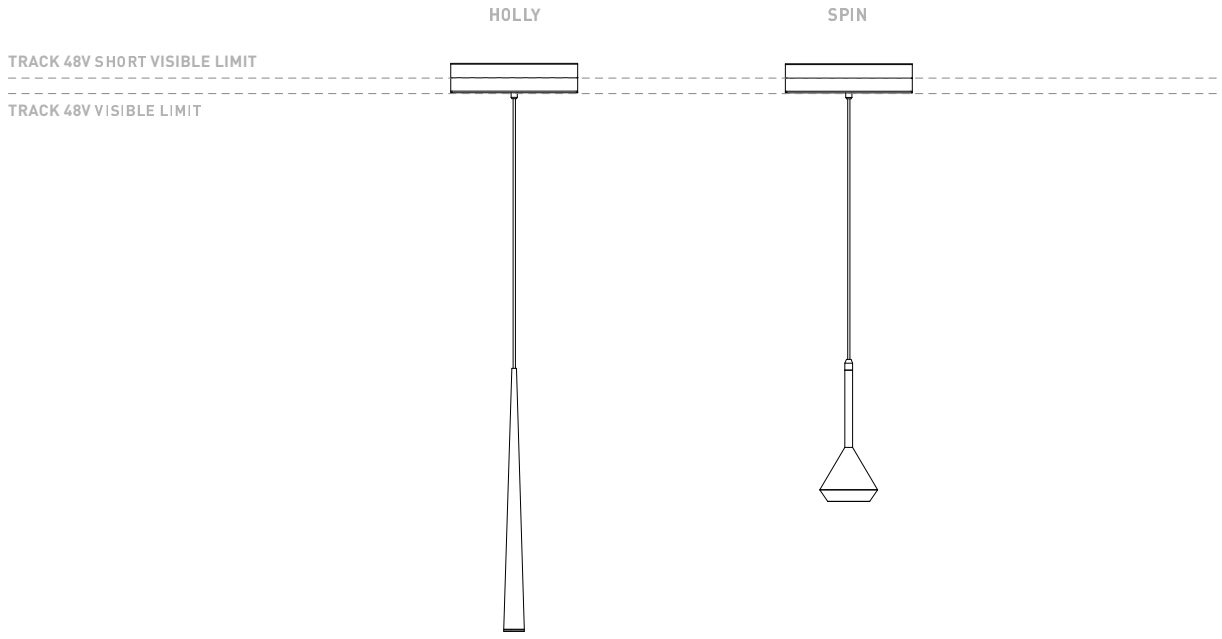





Order with *The 2019 Collection* codes. Products with one single version for both tracks

# TRACK 48V

## ALL 48V TRACK




**TRACK 48V** Live-End Connector

A338-00-01- | N |




**TRACK 48V** Central Connector

A338-00-02- | N |




**TRACK 48V** Corner 90º Connector

A338-00-12- | N |




**TRACK 48V** Wireless Control

0434-01-31- | N | Casambi/AAG Stucchi App

0434-01-32- | N | AAG Stucchi App

## TRIMLESS 48V

**TRACK 48V TRIMLESS** Short T-Bracket

A338-00-03



**TRACK 48V TRIMLESS** Long T-Bracket

A338-00-04



**TRACK 48V TRIMLESS** Straight Joiners (2 units)

A338-00-05



**TRACK 48V TRIMLESS** Plaster Installation Guard 1m

A338-00-21

**TRACK 48V** Clamp for M6 ROD

A338-00-09

*See accessories quantities

**TRACK 48V** Track Clamp

A338-00-10

*See accessories quantities




**TRACK 48V TRIMLESS** Suspension Kit

A338-00-08

*See accessories quantities

*** SUGGESTED MOUNTING ACCESSORIES QUANTITIES**

1000mm - 2 Pcs.
2000mm - 3 Pcs.
3000mm - 4 Pcs.

## SURFACE, SUSPENSION , SURFACE SHORT & SUSPENSION SHORT 48V



**TRACK 48V SURFACE** Straight Joiner

A338-00-11- | N |

COLOUR | N ■ |

# TRACK 48V

## TRIMLESS, SURFACE & SUSPENSION 48V

**TRACK 48V TRIMLESS & SURFACE End**

A338-00-06- | N |

**TRACK 48V TRIMLESS & SURFACE End Feed**

A338-00-07- | N |

## SURFACE SHORT & SUSPENSION SHORT 48V

**TRACK 48V SURFACE SHORT End**

A338-00-18- | N |

**TRACK 48V SURFACE SHORT End Feed**

A338-00-19- | N |

## SURFACE & SURFACE SHORT 48V




**TRACK 48V Power Supply Case**

A338-00-20- | N | NO DIM

*To be installed aside 48V Surface Tracks
Power supply not included

## SUSPENSION & SUSPENSION SHORT 48V




**TRACK 48V Wired Power Supply Case**

A338-00-22- | N | NO DIM

A338-00-23- | N | DIM

*Power supply not included




**TRACK 48V SURFACE Suspension Kit (2 units)**

A338-00-15- | N |

**TRACK 48V SURFACE Suspension Feed Kit**

A338-00-16- | N | NO DIM

A338-00-17- | N | DIM

*For remote power supply

COLOUR | N ■ |

# SPIN 48V

ARKOSLIGHT®

## DIMENSIONS

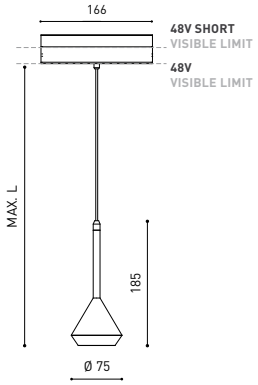


## ACCESSORIES

CORD ACCESOSORY



TRACK 48V OPTIONS

| | PRODUCT |
|---|---|
| Name | SPIN 48V 2M DIM DALI 24º 2700K WT |
| Reference | A3500200WT |
| Color | Textured white |
| RAL | 9016 |
| Category | TRACKLIGHTS |

| | LIGHTING INFORMATION |
|---|---|
| Light source | LED |
| Gross luminous flux | 600 Lm |
| Power | 6,5 W |
| Power values of the system | 6,84 W |
| Colour temperature | 2700 K |
| Colour Rendering Index | CRI>90 |
| Chromatic stability | MacAdam Step 2 |
| Light beam angle | 24° |
| Lighting efficiency | 86% |
| Efficacy | 92 Lm/W |
| Current intensity | 700 mA |
| Dimming | DALI - Other DIM, please consult |
| Control through bluetooth | Please Consult |
| Driver | Included |
| Electrical insulation class | III |
| Voltage | 48 Vdc |
| Energy efficiency | A+ |
| LED lifespan | L80B10 (Tj=85°C) >60.000h |

| | OTHER DATA |
|---|---|
| Ingress Protection | IP20 |
| Cord length | 2 m |
| Fast adjustment tensioner | No |
| Track type | Track 48V |
| Weight | 530 g. |
| Packaged weight | 666 g. |
| Packaging dimensions | 253 × 152 × 102 mm |
| Units per package | 1 |
| Materials | Aluminium / Polymethyl Methacrylate |

CE

## AWARDS

Spin 48V, reduced dimensions, essential lines and revolutionary geometry in a pendant luminary for accent lighting. Its extra fine wire gives Spin a sense of airiness and flotability. Spin, now available for Arkoslight's low voltage tracklight systems.

Calle N · Pol. Ind. EL OLIVERAL
46394 Ribarroja del Turia · Valencia (Spain)
Tel. +34 961 667 207 · Fax +34 961 667 054
info@arkoslight.com · www.arkoslight.com

28-03-20 / 04:04

5 Year GUARANTEE*

## POLAR DIAGRAM

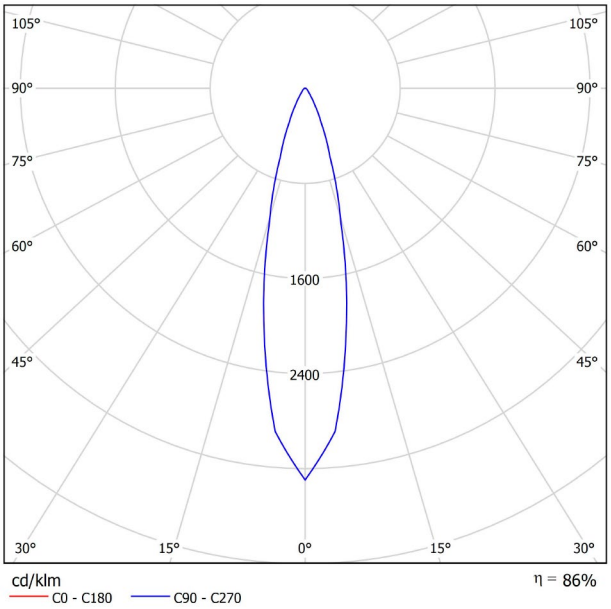


## CONICAL DIAGRAM

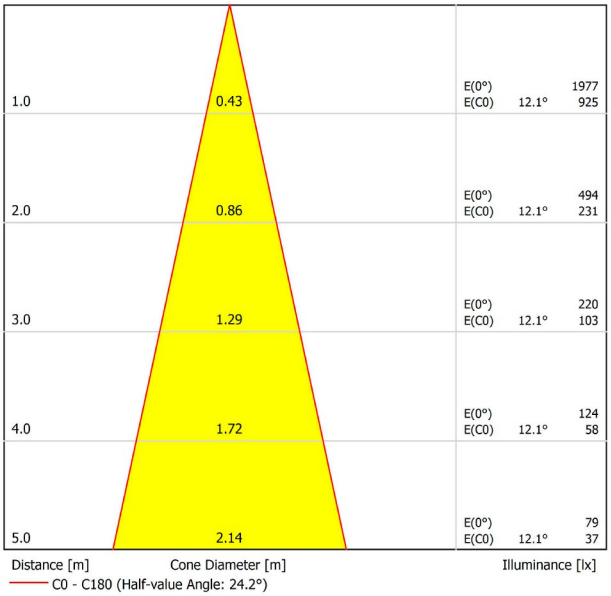

# CORD ACCESSORY

ARKOSLIGHT®

| | PRODUCT |
|---|---|
| Model | Cord Accessory |
| Reference | **02230000** \| **WT** \| **NT** \| |
| Colour | **WT** ☐ RAL 9016 \| **NT** ■ RAL9005 |
| Category | Accessories |

## DIMENSIONAL DRAWING




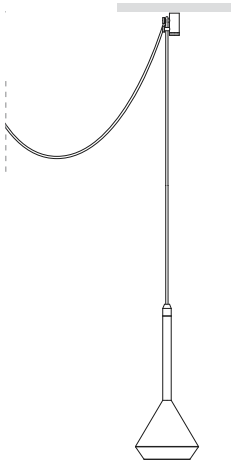

Calle N · Pol. Ind. EL OLIVERAL
46394 Ribarroja del Turia · Valencia (Spain)
Tel. +34 961 667 207 · Fax +34 961 667 054
info@arkoslight.com · www.arkoslight.com

5 Year GUARANTEE*

# TRACK 48V




## TRACK 48V TRIMLESS

| | | |
|---|---|---|
| TRACK 48V TRIMLESS 1m | A338-01-00- | N |
| TRACK 48V TRIMLESS 2m | A338-02-00- | N |
| TRACK 48V TRIMLESS 3m | A338-03-00- | N |
| TRACK 48V TRIMLESS Corner 90º One Plane | A338-06-00- | N |
| TRACK 48V TRIMLESS Corner 90º Two Planes | A338-07-00- | N |

RECOMMENDED FOR INSTALLATIONS WHERE THE PROFILE CAN BE INSTALLED BEFORE THE FALSE PLASTERBOARD CEILING (THICKNESS 12,5mm.)

CE III

TRACK 48V TRIMLESS
Corner 90º One Plane




*Electrical connection not included

TRACK 48V TRIMLESS
Corner 90º Two Planes




*Electrical connection not included




## TRACK 48V SURFACE

| | | |
|---|---|---|
| TRACK 48V SURFACE 1m | A338-11-00- | N |
| TRACK 48V SURFACE 2m | A338-12-00- | N |
| TRACK 48V SURFACE 3m | A338-13-00- | N |
| TRACK 48V SURFACE Corner 90º One Plane | A338-14-00- | N |

CE III

TRACK 48V SURFACE
Corner 90º One Plane




*Electrical connection not included




## TRACK 48V SURFACE SHORT

| | | |
|---|---|---|
| TRACK 48V SURFACE SHORT 1m | A338-21-00- | N |
| TRACK 48V SURFACE SHORT 2m | A338-22-00- | N |
| TRACK 48V SURFACE SHORT 3m | A338-23-00- | N |
| TRACK 48V SURFACE SHORT Corner 90º One Plane | A338-24-00- | N |

CE III

TRACK 48V SURFACE SHORT
Corner 90º One Plane




*Electrical connection not included

48V SYSTEM

# TRACK 48V

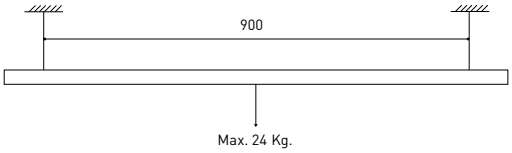


| | | P | V | D |
|---|---|---|---|---|
| CONSTANT VOLTAGE LED POWER SUPPLY | **0434-01-21** | 75W | 48V | 180 x 52 x 30mm |
| | **0434-01-22** | 150W | 48V | 240 x 60 x 49mm |

DROP VOLTAGE TABLE

| | | **CABLE LENGHT** (m) | | | |
|---|---|---|---|---|---|
| | | 5 | 10 | 20 | 30 |
| **POWER** (W) | **CABLE SECTION** ($mm^2$) | **TRACK LENGHT** (m) | | | |
| 75 | 0,75 | 50 | 50 | 30 | X |
| | 1,5 | 50 | 50 | 50 | 50 |
| 150 | 0,75 | 40 | 15 | X | X |
| | 1,5 | 50 | 40 | 20 | X |

## COMPATIBILITY ACCORDING TO TYPE OF TRACK

### TRACK 48V & TRACK 48V SURFACE SHORT

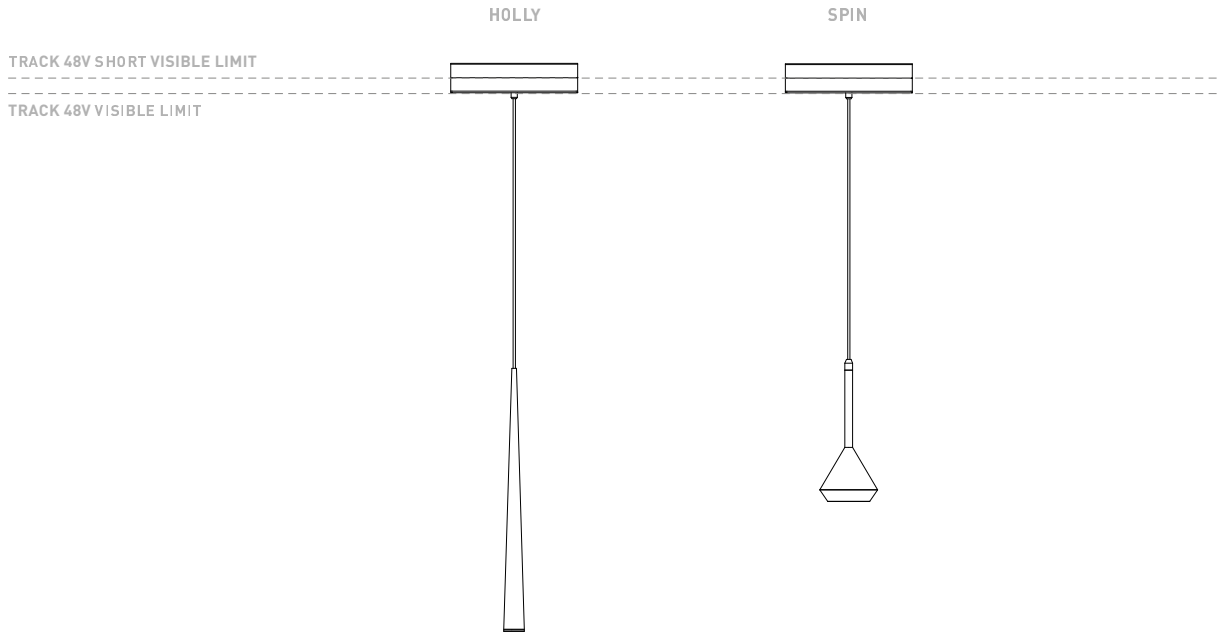





Order with *The 2019 Collection* codes. Products with one single version for both tracks

# TRACK 48V

## ALL 48V TRACK




**TRACK 48V** Live-End Connector

A338-00-01- | N |




**TRACK 48V** Central Connector

A338-00-02- | N |




**TRACK 48V** Corner 90º Connector

A338-00-12- | N |




**TRACK 48V** Wireless Control

0434-01-31- | N | Casambi/AAG Stucchi App

0434-01-32- | N | AAG Stucchi App

## TRIMLESS 48V

**TRACK 48V TRIMLESS** Short T-Bracket

A338-00-03



**TRACK 48V TRIMLESS** Long T-Bracket

A338-00-04



**TRACK 48V TRIMLESS** Straight Joiners (2 units)

A338-00-05



**TRACK 48V TRIMLESS** Plaster Installation Guard 1m

A338-00-21

**TRACK 48V** Clamp for M6 ROD

A338-00-09

*See accessories quantities

**TRACK 48V** Track Clamp

A338-00-10

*See accessories quantities




**TRACK 48V TRIMLESS** Suspension Kit

A338-00-08

*See accessories quantities

*** SUGGESTED MOUNTING ACCESSORIES QUANTITIES**

1000mm - 2 Pcs.
2000mm - 3 Pcs.
3000mm - 4 Pcs.

## SURFACE, SUSPENSION , SURFACE SHORT & SUSPENSION SHORT 48V



**TRACK 48V SURFACE** Straight Joiner

A338-00-11- | N |

COLOUR | N ■ |

# TRACK 48V

## TRIMLESS, SURFACE & SUSPENSION 48V

**TRACK 48V TRIMLESS & SURFACE End**

A338-00-06- | N |

**TRACK 48V TRIMLESS & SURFACE End Feed**

A338-00-07- | N |

## SURFACE SHORT & SUSPENSION SHORT 48V

**TRACK 48V SURFACE SHORT End**

A338-00-18- | N |

**TRACK 48V SURFACE SHORT End Feed**

A338-00-19- | N |

## SURFACE & SURFACE SHORT 48V




**TRACK 48V Power Supply Case**

A338-00-20- | N | NO DIM

*To be installed aside 48V Surface Tracks
Power supply not included

## SUSPENSION & SUSPENSION SHORT 48V




**TRACK 48V Wired Power Supply Case**

A338-00-22- | N | NO DIM

A338-00-23- | N | DIM

*Power supply not included




**TRACK 48V SURFACE Suspension Kit (2 units)**

A338-00-15- | N |

**TRACK 48V SURFACE Suspension Feed Kit**

A338-00-16- | N | NO DIM

A338-00-17- | N | DIM

*For remote power supply

COLOUR | N ■ |

# SPIN 48V

ARKOSLIGHT®

## DIMENSIONS

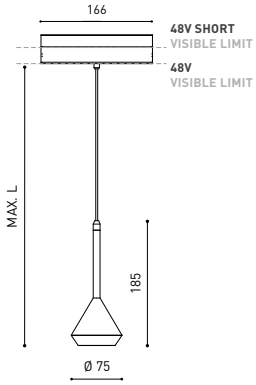


## ACCESSORIES

CORD ACCESOSORY



TRACK 48V OPTIONS

| | PRODUCT |
|---|---|
| Name | SPIN 48V 2M DIM DALI24º 3000K MC |
| Reference | A3500201MC |
| Color | Metallized copper |
| RAL | Paint of metallic nanoparticles |
| Category | TRACKLIGHTS |

| | LIGHTING INFORMATION |
|---|---|
| Light source | LED |
| Gross luminous flux | 630 Lm |
| Power | 6,5 W |
| Power values of the system | 6,84 W |
| Colour temperature | 3000 K |
| Colour Rendering Index | CRI>90 |
| Chromatic stability | MacAdam Step 2 |
| Light beam angle | 24° |
| Lighting efficiency | 86% |
| Efficacy | 97 Lm/W |
| Current intensity | 700 mA |
| Dimming | DALI - Other DIM, please consult |
| Control through bluetooth | Please Consult |
| Driver | Included |
| Electrical insulation class | III |
| Voltage | 48 Vdc |
| Energy efficiency | A+ |
| LED lifespan | L80B10 (Tj=85°C) >60.000h |

| | OTHER DATA |
|---|---|
| Ingress Protection | IP20 |
| Cord length | 2 m |
| Fast adjustment tensioner | No |
| Track type | Track 48V |
| Weight | 530 g. |
| Packaged weight | 666 g. |
| Packaging dimensions | 253 × 152 × 102 mm |
| Units per package | 1 |
| Materials | Aluminium / Polymethyl Methacrylate |

CE

## AWARDS

Spin 48V, reduced dimensions, essential lines and revolutionary geometry in a pendant luminary for accent lighting. Its extra fine wire gives Spin a sense of airiness and flotability. Spin, now available for Arkoslight's low voltage tracklight systems.

Calle N · Pol. Ind. EL OLIVERAL
46394 Ribarroja del Turia · Valencia (Spain)
Tel. +34 961 667 207 · Fax +34 961 667 054
info@arkoslight.com · www.arkoslight.com

28-03-20 / 04:01

5 Year GUARANTEE*

## POLAR DIAGRAM

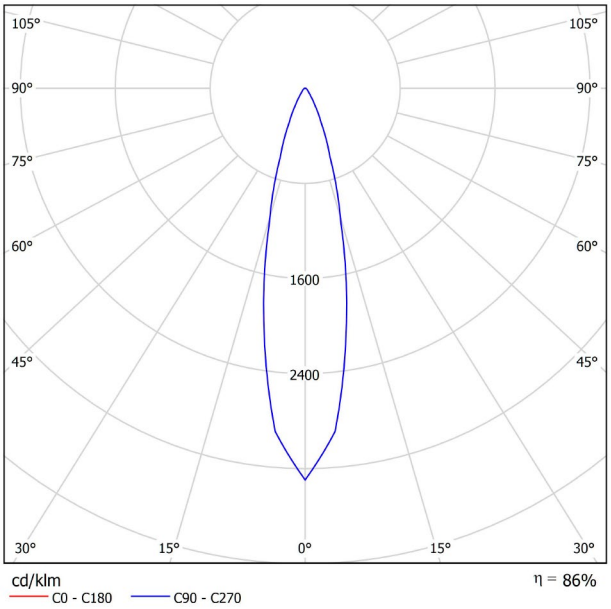


## CONICAL DIAGRAM

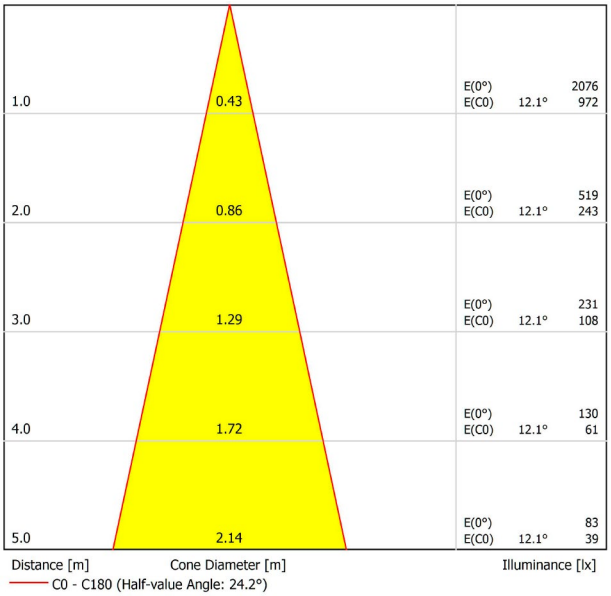

# CORD ACCESSORY

ARKOSLIGHT®

| | PRODUCT |
|---|---|
| Model | Cord Accessory |
| Reference | **02230000** \| **WT** \| **NT** \| |
| Colour | **WT** ☐ RAL 9016 \| **NT** ■ RAL9005 |
| Category | Accessories |

## DIMENSIONAL DRAWING




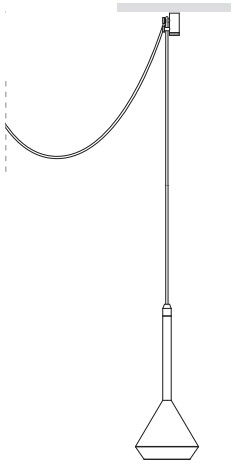

Calle N · Pol. Ind. EL OLIVERAL
46394 Ribarroja del Turia · Valencia (Spain)
Tel. +34 961 667 207 · Fax +34 961 667 054
info@arkoslight.com · www.arkoslight.com

5 Year GUARANTEE*

# TRACK 48V




## TRACK 48V TRIMLESS

| | | |
|---|---|---|
| TRACK 48V TRIMLESS 1m | A338-01-00- | N |
| TRACK 48V TRIMLESS 2m | A338-02-00- | N |
| TRACK 48V TRIMLESS 3m | A338-03-00- | N |
| TRACK 48V TRIMLESS Corner 90º One Plane | A338-06-00- | N |
| TRACK 48V TRIMLESS Corner 90º Two Planes | A338-07-00- | N |

RECOMMENDED FOR INSTALLATIONS WHERE THE PROFILE CAN BE INSTALLED BEFORE THE FALSE PLASTERBOARD CEILING (THICKNESS 12,5mm.)

CE III

TRACK 48V TRIMLESS

Corner 90º One Plane




*Electrical connection not included

TRACK 48V TRIMLESS

Corner 90º Two Planes




*Electrical connection not included




## TRACK 48V SURFACE

| | | |
|---|---|---|
| TRACK 48V SURFACE 1m | A338-11-00- | N |
| TRACK 48V SURFACE 2m | A338-12-00- | N |
| TRACK 48V SURFACE 3m | A338-13-00- | N |
| TRACK 48V SURFACE Corner 90º One Plane | A338-14-00- | N |

CE III

TRACK 48V SURFACE

Corner 90º One Plane




*Electrical connection not included




## TRACK 48V SURFACE SHORT

| | | |
|---|---|---|
| TRACK 48V SURFACE SHORT 1m | A338-21-00- | N |
| TRACK 48V SURFACE SHORT 2m | A338-22-00- | N |
| TRACK 48V SURFACE SHORT 3m | A338-23-00- | N |
| TRACK 48V SURFACE SHORT Corner 90º One Plane | A338-24-00- | N |

CE III

TRACK 48V SURFACE SHORT

Corner 90º One Plane




*Electrical connection not included

48V SYSTEM

# TRACK 48V

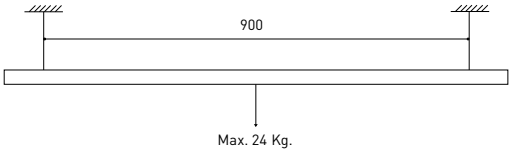


| | | P | V | D |
|---|---|---|---|---|
| CONSTANT VOLTAGE LED POWER SUPPLY | **0434-01-21** | 75W | 48V | 180 x 52 x 30mm |
| | **0434-01-22** | 150W | 48V | 240 x 60 x 49mm |

DROP VOLTAGE TABLE

| | | CABLE LENGHT (m) | | | |
|---|---|---|---|---|---|
| | | 5 | 10 | 20 | 30 |
| **POWER** (W) | **CABLE SECTION** ($mm^2$) | **TRACK LENGHT** (m) | | | |
| 75 | 0,75 | 50 | 50 | 30 | X |
| | 1,5 | 50 | 50 | 50 | 50 |
| 150 | 0,75 | 40 | 15 | X | X |
| | 1,5 | 50 | 40 | 20 | X |

## COMPATIBILITY ACCORDING TO TYPE OF TRACK

### TRACK 48V & TRACK 48V SURFACE SHORT

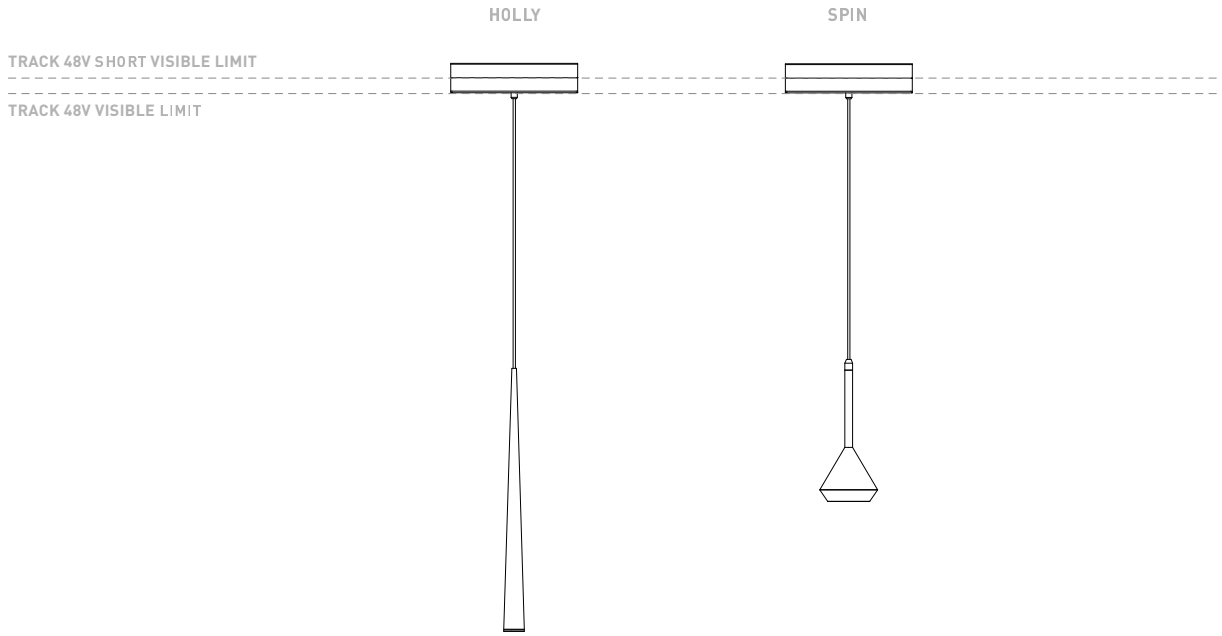





Order with *The 2019 Collection* codes. Products with one single version for both tracks

# TRACK 48V

## ALL 48V TRACK




**TRACK 48V** Live-End Connector

A338-00-01- | N |




**TRACK 48V** Central Connector

A338-00-02- | N |




**TRACK 48V** Corner 90º Connector

A338-00-12- | N |




**TRACK 48V** Wireless Control

0434-01-31- | N | Casambi/AAG Stucchi App

0434-01-32- | N | AAG Stucchi App

## TRIMLESS 48V

**TRACK 48V TRIMLESS** Short T-Bracket

A338-00-03



**TRACK 48V TRIMLESS** Long T-Bracket

A338-00-04



**TRACK 48V TRIMLESS** Straight Joiners (2 units)

A338-00-05



**TRACK 48V TRIMLESS** Plaster Installation Guard 1m

A338-00-21

**TRACK 48V** Clamp for M6 ROD

A338-00-09

*See accessories quantities

**TRACK 48V** Track Clamp

A338-00-10

*See accessories quantities




**TRACK 48V TRIMLESS** Suspension Kit

A338-00-08

*See accessories quantities

*** SUGGESTED MOUNTING ACCESSORIES QUANTITIES**

1000mm - 2 Pcs.
2000mm - 3 Pcs.
3000mm - 4 Pcs.

## SURFACE, SUSPENSION , SURFACE SHORT & SUSPENSION SHORT 48V



**TRACK 48V SURFACE** Straight Joiner

A338-00-11- | N |

COLOUR | N ■ |

# TRACK 48V

## TRIMLESS, SURFACE & SUSPENSION 48V

**TRACK 48V TRIMLESS & SURFACE End**

A338-00-06- | N |

**TRACK 48V TRIMLESS & SURFACE End Feed**

A338-00-07- | N |

## SURFACE SHORT & SUSPENSION SHORT 48V

**TRACK 48V SURFACE SHORT End**

A338-00-18- | N |

**TRACK 48V SURFACE SHORT End Feed**

A338-00-19- | N |

## SURFACE & SURFACE SHORT 48V




**TRACK 48V Power Supply Case**

A338-00-20- | N | NO DIM

*To be installed aside 48V Surface Tracks
Power supply not included

## SUSPENSION & SUSPENSION SHORT 48V




**TRACK 48V Wired Power Supply Case**

A338-00-22- | N | NO DIM

A338-00-23- | N | DIM

*Power supply not included




**TRACK 48V SURFACE Suspension Kit (2 units)**

A338-00-15- | N |

**TRACK 48V SURFACE Suspension Feed Kit**

A338-00-16- | N | NO DIM

A338-00-17- | N | DIM

*For remote power supply

COLOUR | N ■ |

# SPIN 48V

ARKOSLIGHT®

## DIMENSIONS

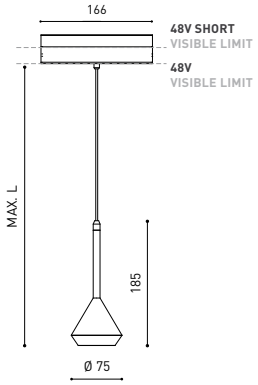


## ACCESSORIES

CORD ACCESOSORY



TRACK 48V OPTIONS

| | PRODUCT |
|---|---|
| Name | SPIN 48V 2M DIM DALI24º 3000K MG |
| Reference | A3500201MG |
| Color | Metallized gold |
| RAL | Paint of metallic nanoparticles |
| Category | TRACKLIGHTS |

| | LIGHTING INFORMATION |
|---|---|
| Light source | LED |
| Gross luminous flux | 630 Lm |
| Power | 6,5 W |
| Power values of the system | 6,84 W |
| Colour temperature | 3000 K |
| Colour Rendering Index | CRI>90 |
| Chromatic stability | MacAdam Step 2 |
| Light beam angle | 24° |
| Lighting efficiency | 86% |
| Efficacy | 97 Lm/W |
| Current intensity | 700 mA |
| Dimming | DALI - Other DIM, please consult |
| Control through bluetooth | Please Consult |
| Driver | Included |
| Electrical insulation class | III |
| Voltage | 48 Vdc |
| Energy efficiency | A+ |
| LED lifespan | L80B10 (Tj=85°C) >60.000h |

| | OTHER DATA |
|---|---|
| Ingress Protection | IP20 |
| Cord length | 2 m |
| Fast adjustment tensioner | No |
| Track type | Track 48V |
| Weight | 530 g. |
| Packaged weight | 666 g. |
| Packaging dimensions | 253 × 152 × 102 mm |
| Units per package | 1 |
| Materials | Aluminium / Polymethyl Methacrylate |

CE

## AWARDS

Spin 48V, reduced dimensions, essential lines and revolutionary geometry in a pendant luminary for accent lighting. Its extra fine wire gives Spin a sense of airiness and flotability. Spin, now available for Arkoslight's low voltage tracklight systems.

Calle N · Pol. Ind. EL OLIVERAL
46394 Ribarroja del Turia · Valencia (Spain)
Tel. +34 961 667 207 · Fax +34 961 667 054
info@arkoslight.com · www.arkoslight.com

28-03-20 / 04:01

5 Year GUARANTEE*

## POLAR DIAGRAM

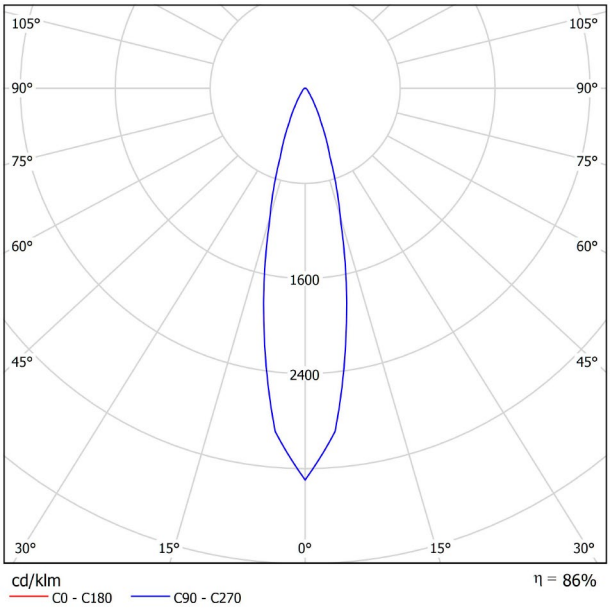


## CONICAL DIAGRAM

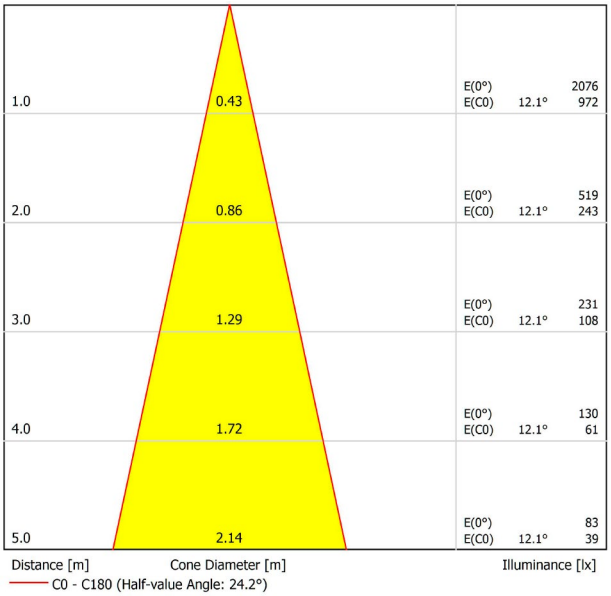

# CORD ACCESSORY

ARKOSLIGHT®

| | PRODUCT |
|---|---|
| Model | Cord Accessory |
| Reference | **02230000** \| **WT** \| **NT** \| |
| Colour | **WT** ☐ RAL 9016 \| **NT** ■ RAL9005 |
| Category | Accessories |

## DIMENSIONAL DRAWING




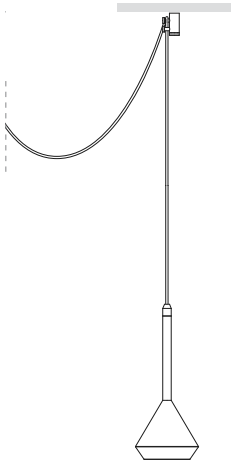

Calle N · Pol. Ind. EL OLIVERAL
46394 Ribarroja del Turia · Valencia (Spain)
Tel. +34 961 667 207 · Fax +34 961 667 054
info@arkoslight.com · www.arkoslight.com

5 Year GUARANTEE*

# TRACK 48V




## TRACK 48V TRIMLESS

| | | |
|---|---|---|
| TRACK 48V TRIMLESS 1m | A338-01-00- | N |
| TRACK 48V TRIMLESS 2m | A338-02-00- | N |
| TRACK 48V TRIMLESS 3m | A338-03-00- | N |
| TRACK 48V TRIMLESS Corner 90º One Plane | A338-06-00- | N |
| TRACK 48V TRIMLESS Corner 90º Two Planes | A338-07-00- | N |

RECOMMENDED FOR INSTALLATIONS WHERE THE PROFILE CAN BE INSTALLED BEFORE THE FALSE PLASTERBOARD CEILING (THICKNESS 12,5mm.)

CE III

TRACK 48V TRIMLESS

Corner 90º One Plane




*Electrical connection not included

TRACK 48V TRIMLESS

Corner 90º Two Planes




*Electrical connection not included




## TRACK 48V SURFACE

| | | |
|---|---|---|
| TRACK 48V SURFACE 1m | A338-11-00- | N |
| TRACK 48V SURFACE 2m | A338-12-00- | N |
| TRACK 48V SURFACE 3m | A338-13-00- | N |
| TRACK 48V SURFACE Corner 90º One Plane | A338-14-00- | N |

CE III

TRACK 48V SURFACE

Corner 90º One Plane




*Electrical connection not included




## TRACK 48V SURFACE SHORT

| | | |
|---|---|---|
| TRACK 48V SURFACE SHORT 1m | A338-21-00- | N |
| TRACK 48V SURFACE SHORT 2m | A338-22-00- | N |
| TRACK 48V SURFACE SHORT 3m | A338-23-00- | N |
| TRACK 48V SURFACE SHORT Corner 90º One Plane | A338-24-00- | N |

CE III

TRACK 48V SURFACE SHORT

Corner 90º One Plane




*Electrical connection not included

48V SYSTEM

# TRACK 48V

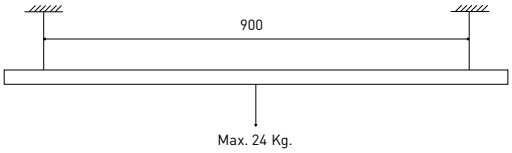


| | | P | V | D |
|---|---|---|---|---|
| CONSTANT VOLTAGE LED POWER SUPPLY | **0434-01-21** | 75W | 48V | 180 x 52 x 30mm |
| | **0434-01-22** | 150W | 48V | 240 x 60 x 49mm |

DROP VOLTAGE TABLE

| | | CABLE LENGHT (m) | | | |
|---|---|---|---|---|---|
| | | 5 | 10 | 20 | 30 |
| **POWER** (W) | **CABLE SECTION** ($mm^2$) | **TRACK LENGHT** (m) | | | |
| 75 | 0,75 | 50 | 50 | 30 | X |
| | 1,5 | 50 | 50 | 50 | 50 |
| 150 | 0,75 | 40 | 15 | X | X |
| | 1,5 | 50 | 40 | 20 | X |

## COMPATIBILITY ACCORDING TO TYPE OF TRACK

### TRACK 48V & TRACK 48V SURFACE SHORT

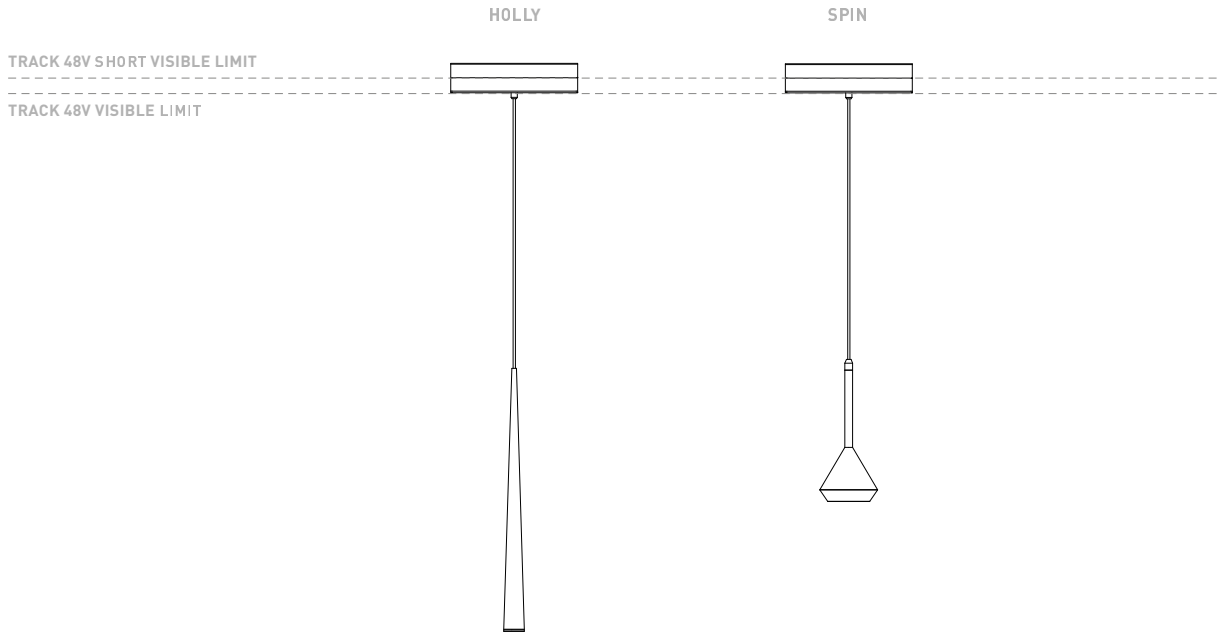





Order with *The 2019 Collection* codes. Products with one single version for both tracks

# TRACK 48V

## ALL 48V TRACK




**TRACK 48V** Live-End Connector

A338-00-01- | N |




**TRACK 48V** Central Connector

A338-00-02- | N |




**TRACK 48V** Corner 90º Connector

A338-00-12- | N |




**TRACK 48V** Wireless Control

0434-01-31- | N | Casambi/AAG Stucchi App

0434-01-32- | N | AAG Stucchi App

## TRIMLESS 48V

**TRACK 48V TRIMLESS** Short T-Bracket

A338-00-03



**TRACK 48V TRIMLESS** Long T-Bracket

A338-00-04



**TRACK 48V TRIMLESS** Straight Joiners (2 units)

A338-00-05



**TRACK 48V TRIMLESS** Plaster Installation Guard 1m

A338-00-21

**TRACK 48V** Clamp for M6 ROD

A338-00-09

*See accessories quantities

**TRACK 48V** Track Clamp

A338-00-10

*See accessories quantities




**TRACK 48V TRIMLESS** Suspension Kit

A338-00-08

*See accessories quantities

*** SUGGESTED MOUNTING ACCESSORIES QUANTITIES**

1000mm - 2 Pcs.
2000mm - 3 Pcs.
3000mm - 4 Pcs.

## SURFACE, SUSPENSION , SURFACE SHORT & SUSPENSION SHORT 48V



**TRACK 48V SURFACE** Straight Joiner

A338-00-11- | N |

COLOUR | N ■ |

# TRACK 48V

## TRIMLESS, SURFACE & SUSPENSION 48V

**TRACK 48V TRIMLESS & SURFACE End**

A338-00-06- | N |

**TRACK 48V TRIMLESS & SURFACE End Feed**

A338-00-07- | N |

## SURFACE SHORT & SUSPENSION SHORT 48V

**TRACK 48V SURFACE SHORT End**

A338-00-18- | N |

**TRACK 48V SURFACE SHORT End Feed**

A338-00-19- | N |

## SURFACE & SURFACE SHORT 48V




**TRACK 48V Power Supply Case**

A338-00-20- | N | NO DIM

*To be installed aside 48V Surface Tracks
Power supply not included

## SUSPENSION & SUSPENSION SHORT 48V




**TRACK 48V Wired Power Supply Case**

A338-00-22- | N | NO DIM

A338-00-23- | N | DIM

*Power supply not included




**TRACK 48V SURFACE Suspension Kit (2 units)**

A338-00-15- | N |

**TRACK 48V SURFACE Suspension Feed Kit**

A338-00-16- | N | NO DIM

A338-00-17- | N | DIM

*For remote power supply

COLOUR | N ■ |

# SPIN 48V

ARKOSLIGHT®

## DIMENSIONS

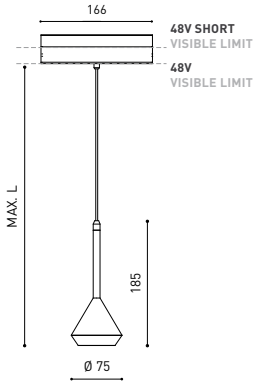


## ACCESSORIES

CORD ACCESOSORY



TRACK 48V OPTIONS

| | PRODUCT |
|---|---|
| Name | SPIN 48V 2M DIM DALI24º 3000K NT |
| Reference | A3500201NT |
| Color | Textured black |
| RAL | 9005 |
| Category | TRACKLIGHTS |

| | LIGHTING INFORMATION |
|---|---|
| Light source | LED |
| Gross luminous flux | 630 Lm |
| Power | 6,5 W |
| Power values of the system | 6,84 W |
| Colour temperature | 3000 K |
| Colour Rendering Index | CRI>90 |
| Chromatic stability | MacAdam Step 2 |
| Light beam angle | 24° |
| Lighting efficiency | 86% |
| Efficacy | 97 Lm/W |
| Current intensity | 700 mA |
| Dimming | DALI - Other DIM, please consult |
| Control through bluetooth | Please Consult |
| Driver | Included |
| Electrical insulation class | III |
| Voltage | 48 Vdc |
| Energy efficiency | A+ |
| LED lifespan | L80B10 (Tj=85°C) >60.000h |

| | OTHER DATA |
|---|---|
| Ingress Protection | IP20 |
| Cord length | 2 m |
| Fast adjustment tensioner | No |
| Track type | Track 48V |
| Weight | 530 g. |
| Packaged weight | 666 g. |
| Packaging dimensions | 253 × 152 × 102 mm |
| Units per package | 1 |
| Materials | Aluminium / Polymethyl Methacrylate |

CE

## AWARDS

Spin 48V, reduced dimensions, essential lines and revolutionary geometry in a pendant luminary for accent lighting. Its extra fine wire gives Spin a sense of airiness and flotability. Spin, now available for Arkoslight's low voltage tracklight systems.

Calle N · Pol. Ind. EL OLIVERAL
46394 Ribarroja del Turia · Valencia (Spain)
Tel. +34 961 667 207 · Fax +34 961 667 054
info@arkoslight.com · www.arkoslight.com

28-03-20 / 03:57

5 Year GUARANTEE*

## POLAR DIAGRAM

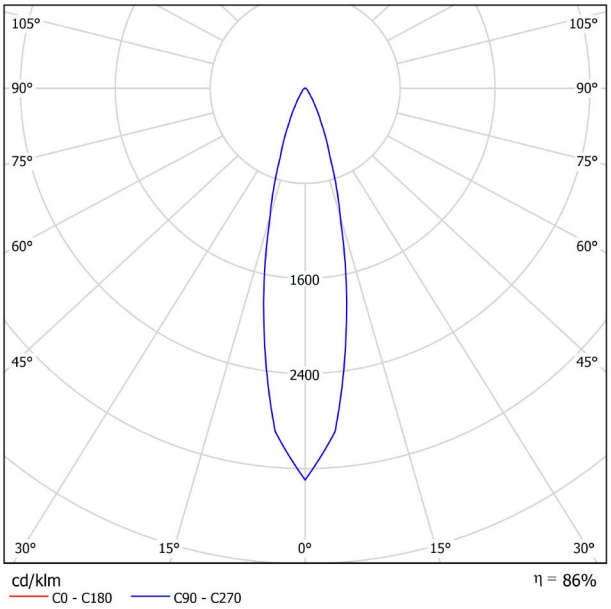


## CONICAL DIAGRAM

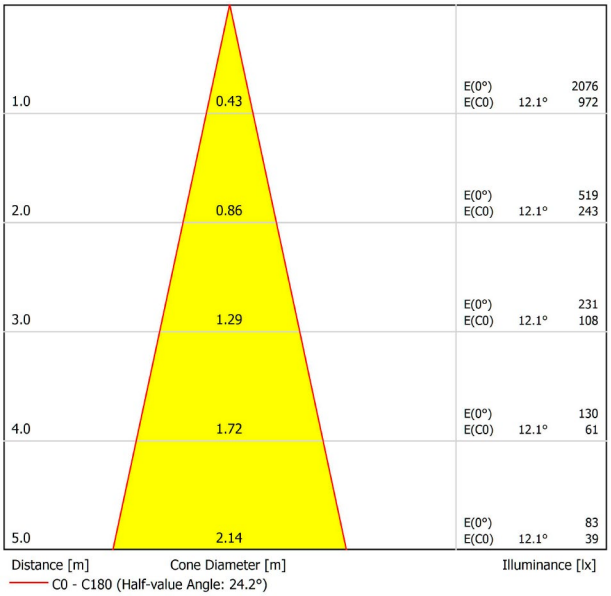

# CORD ACCESSORY

ARKOSLIGHT®

| | PRODUCT |
|---|---|
| Model | Cord Accessory |
| Reference | **02230000** \| **WT** \| **NT** \| |
| Colour | **WT** ☐ RAL 9016 \| **NT** ■ RAL9005 |
| Category | Accessories |

## DIMENSIONAL DRAWING




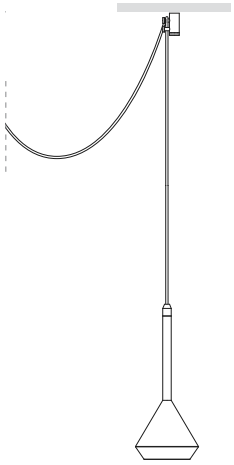

Calle N · Pol. Ind. EL OLIVERAL
46394 Ribarroja del Turia · Valencia (Spain)
Tel. +34 961 667 207 · Fax +34 961 667 054
info@arkoslight.com · www.arkoslight.com

5 Year GUARANTEE*

# TRACK 48V




## TRACK 48V TRIMLESS

| | | |
|---|---|---|
| TRACK 48V TRIMLESS 1m | A338-01-00- | N |
| TRACK 48V TRIMLESS 2m | A338-02-00- | N |
| TRACK 48V TRIMLESS 3m | A338-03-00- | N |
| TRACK 48V TRIMLESS Corner 90º One Plane | A338-06-00- | N |
| TRACK 48V TRIMLESS Corner 90º Two Planes | A338-07-00- | N |

RECOMMENDED FOR INSTALLATIONS WHERE THE PROFILE CAN BE INSTALLED BEFORE THE FALSE PLASTERBOARD CEILING (THICKNESS 12,5mm.)

CE III

TRACK 48V TRIMLESS

Corner 90º One Plane




*Electrical connection not included

TRACK 48V TRIMLESS

Corner 90º Two Planes




*Electrical connection not included




## TRACK 48V SURFACE

| | | |
|---|---|---|
| TRACK 48V SURFACE 1m | A338-11-00- | N |
| TRACK 48V SURFACE 2m | A338-12-00- | N |
| TRACK 48V SURFACE 3m | A338-13-00- | N |
| TRACK 48V SURFACE Corner 90º One Plane | A338-14-00- | N |

CE III

TRACK 48V SURFACE

Corner 90º One Plane




*Electrical connection not included




## TRACK 48V SURFACE SHORT

| | | |
|---|---|---|
| TRACK 48V SURFACE SHORT 1m | A338-21-00- | N |
| TRACK 48V SURFACE SHORT 2m | A338-22-00- | N |
| TRACK 48V SURFACE SHORT 3m | A338-23-00- | N |
| TRACK 48V SURFACE SHORT Corner 90º One Plane | A338-24-00- | N |

CE III

TRACK 48V SURFACE SHORT

Corner 90º One Plane




*Electrical connection not included

48V SYSTEM

# TRACK 48V

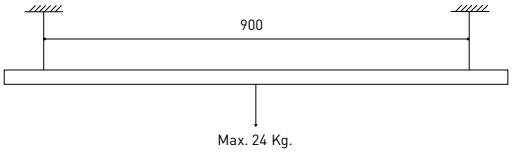


| | | P | V | D |
|---|---|---|---|---|
| CONSTANT VOLTAGE LED POWER SUPPLY | **0434-01-21** | 75W | 48V | 180 x 52 x 30mm |
| | **0434-01-22** | 150W | 48V | 240 x 60 x 49mm |

DROP VOLTAGE TABLE

| | | **CABLE LENGHT** (m) | | | |
|---|---|---|---|---|---|
| | | 5 | 10 | 20 | 30 |
| **POWER** (W) | **CABLE SECTION** ($mm^2$) | **TRACK LENGHT** (m) | | | |
| 75 | 0,75 | 50 | 50 | 30 | X |
| | 1,5 | 50 | 50 | 50 | 50 |
| 150 | 0,75 | 40 | 15 | X | X |
| | 1,5 | 50 | 40 | 20 | X |

## COMPATIBILITY ACCORDING TO TYPE OF TRACK

### TRACK 48V & TRACK 48V SURFACE SHORT

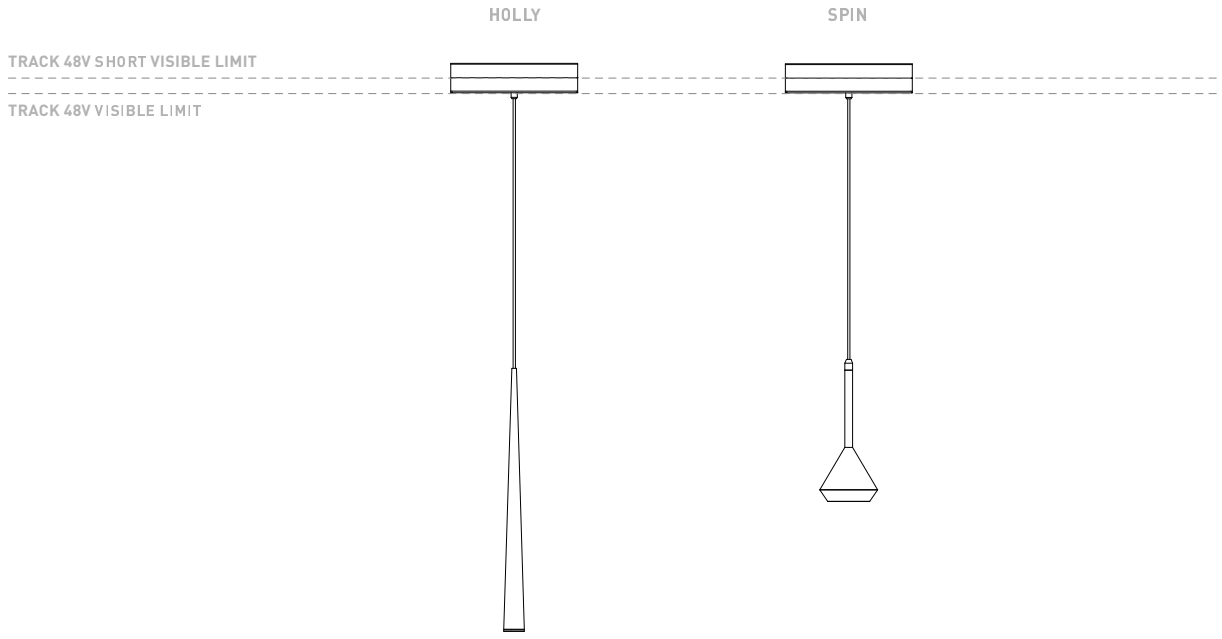





Order with *The 2019 Collection* codes. Products with one single version for both tracks

# TRACK 48V

## ALL 48V TRACK




**TRACK 48V** Live-End Connector

A338-00-01- | N |




**TRACK 48V** Central Connector

A338-00-02- | N |




**TRACK 48V** Corner 90º Connector

A338-00-12- | N |




**TRACK 48V** Wireless Control

0434-01-31- | N | Casambi/AAG Stucchi App

0434-01-32- | N | AAG Stucchi App

## TRIMLESS 48V

**TRACK 48V TRIMLESS** Short T-Bracket

A338-00-03



**TRACK 48V TRIMLESS** Long T-Bracket

A338-00-04



**TRACK 48V TRIMLESS** Straight Joiners (2 units)

A338-00-05



**TRACK 48V TRIMLESS** Plaster Installation Guard 1m

A338-00-21

**TRACK 48V** Clamp for M6 ROD

A338-00-09

*See accessories quantities

**TRACK 48V** Track Clamp

A338-00-10

*See accessories quantities




**TRACK 48V TRIMLESS** Suspension Kit

A338-00-08

*See accessories quantities

*** SUGGESTED MOUNTING ACCESSORIES QUANTITIES**

1000mm - 2 Pcs.
2000mm - 3 Pcs.
3000mm - 4 Pcs.

## SURFACE, SUSPENSION , SURFACE SHORT & SUSPENSION SHORT 48V



**TRACK 48V SURFACE** Straight Joiner

A338-00-11- | N |

COLOUR | N ■ |

# TRACK 48V

## TRIMLESS, SURFACE & SUSPENSION 48V

**TRACK 48V TRIMLESS & SURFACE End**

A338-00-06- | N |

**TRACK 48V TRIMLESS & SURFACE End Feed**

A338-00-07- | N |

## SURFACE SHORT & SUSPENSION SHORT 48V

**TRACK 48V SURFACE SHORT End**

A338-00-18- | N |

**TRACK 48V SURFACE SHORT End Feed**

A338-00-19- | N |

## SURFACE & SURFACE SHORT 48V




**TRACK 48V Power Supply Case**

A338-00-20- | N | NO DIM

*To be installed aside 48V Surface Tracks
Power supply not included

## SUSPENSION & SUSPENSION SHORT 48V




**TRACK 48V Wired Power Supply Case**

A338-00-22- | N | NO DIM

A338-00-23- | N | DIM

*Power supply not included




**TRACK 48V SURFACE Suspension Kit (2 units)**

A338-00-15- | N |

**TRACK 48V SURFACE Suspension Feed Kit**

A338-00-16- | N | NO DIM

A338-00-17- | N | DIM

*For remote power supply

COLOUR | N ■ |

# SPIN 48V

ARKOSLIGHT®

## DIMENSIONS

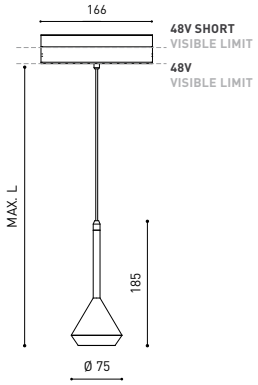


## ACCESSORIES

CORD ACCESOSORY



TRACK 48V OPTIONS

| | PRODUCT |
|---|---|
| Name | SPIN 48V 2M DIM DALI24º 3000K WT |
| Reference | A3500201WT |
| Color | Textured white |
| RAL | 9016 |
| Category | TRACKLIGHTS |

| | LIGHTING INFORMATION |
|---|---|
| Light source | LED |
| Gross luminous flux | 630 Lm |
| Power | 6,5 W |
| Power values of the system | 6,84 W |
| Colour temperature | 3000 K |
| Colour Rendering Index | CRI>90 |
| Chromatic stability | MacAdam Step 2 |
| Light beam angle | 24° |
| Lighting efficiency | 86% |
| Efficacy | 97 Lm/W |
| Current intensity | 700 mA |
| Dimming | DALI - Other DIM, please consult |
| Control through bluetooth | Please Consult |
| Driver | Included |
| Electrical insulation class | III |
| Voltage | 48 Vdc |
| Energy efficiency | A+ |
| LED lifespan | L80B10 (Tj=85°C) >60.000h |

| | OTHER DATA |
|---|---|
| Ingress Protection | IP20 |
| Cord length | 2 m |
| Fast adjustment tensioner | No |
| Track type | Track 48V |
| Weight | 530 g. |
| Packaged weight | 666 g. |
| Packaging dimensions | 253 × 152 × 102 mm |
| Units per package | 1 |
| Materials | Aluminium / Polymethyl Methacrylate |

CE

## AWARDS

Spin 48V, reduced dimensions, essential lines and revolutionary geometry in a pendant luminary for accent lighting. Its extra fine wire gives Spin a sense of airiness and flotability. Spin, now available for Arkoslight's low voltage tracklight systems.

Calle N · Pol. Ind. EL OLIVERAL
46394 Ribarroja del Turia · Valencia (Spain)
Tel. +34 961 667 207 · Fax +34 961 667 054
info@arkoslight.com · www.arkoslight.com

28-03-20 / 03:57

5 Year GUARANTEE*

## POLAR DIAGRAM

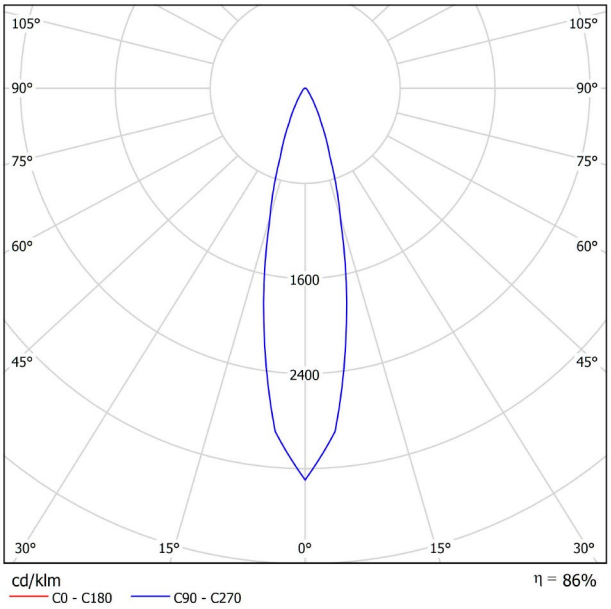


## CONICAL DIAGRAM

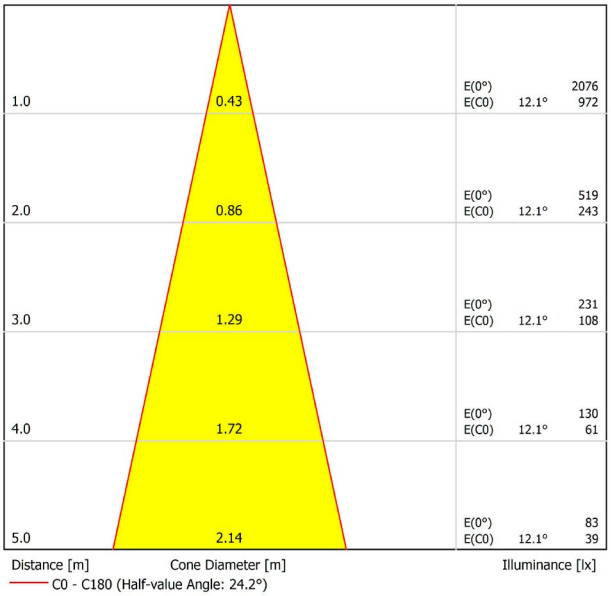

# CORD ACCESSORY

ARKOSLIGHT®

| | PRODUCT |
|---|---|
| Model | Cord Accessory |
| Reference | **02230000** \| **WT** \| **NT** \| |
| Colour | **WT** ☐ RAL 9016 \| **NT** ■ RAL9005 |
| Category | Accessories |

## DIMENSIONAL DRAWING




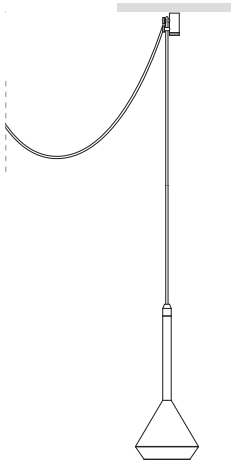

Calle N · Pol. Ind. EL OLIVERAL
46394 Ribarroja del Turia · Valencia (Spain)
Tel. +34 961 667 207 · Fax +34 961 667 054
info@arkoslight.com · www.arkoslight.com

5 Year GUARANTEE*

# TRACK 48V




## TRACK 48V TRIMLESS

| | | |
|---|---|---|
| TRACK 48V TRIMLESS 1m | A338-01-00- | N |
| TRACK 48V TRIMLESS 2m | A338-02-00- | N |
| TRACK 48V TRIMLESS 3m | A338-03-00- | N |
| TRACK 48V TRIMLESS Corner 90º One Plane | A338-06-00- | N |
| TRACK 48V TRIMLESS Corner 90º Two Planes | A338-07-00- | N |

RECOMMENDED FOR INSTALLATIONS WHERE THE PROFILE CAN BE INSTALLED BEFORE THE FALSE PLASTERBOARD CEILING (THICKNESS 12,5mm.)

CE III

TRACK 48V TRIMLESS

Corner 90º One Plane




*Electrical connection not included

TRACK 48V TRIMLESS

Corner 90º Two Planes




*Electrical connection not included




## TRACK 48V SURFACE

| | | |
|---|---|---|
| TRACK 48V SURFACE 1m | A338-11-00- | N |
| TRACK 48V SURFACE 2m | A338-12-00- | N |
| TRACK 48V SURFACE 3m | A338-13-00- | N |
| TRACK 48V SURFACE Corner 90º One Plane | A338-14-00- | N |

CE III

TRACK 48V SURFACE

Corner 90º One Plane




*Electrical connection not included




## TRACK 48V SURFACE SHORT

| | | |
|---|---|---|
| TRACK 48V SURFACE SHORT 1m | A338-21-00- | N |
| TRACK 48V SURFACE SHORT 2m | A338-22-00- | N |
| TRACK 48V SURFACE SHORT 3m | A338-23-00- | N |
| TRACK 48V SURFACE SHORT Corner 90º One Plane | A338-24-00- | N |

CE III

TRACK 48V SURFACE SHORT

Corner 90º One Plane




*Electrical connection not included

48V SYSTEM

# TRACK 48V

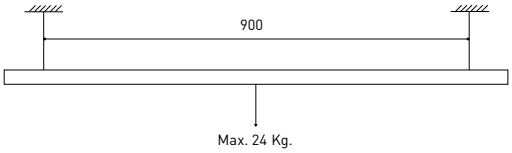


| | | P | V | D |
|---|---|---|---|---|
| CONSTANT VOLTAGE LED POWER SUPPLY | **0434-01-21** | 75W | 48V | 180 x 52 x 30mm |
| | **0434-01-22** | 150W | 48V | 240 x 60 x 49mm |

DROP VOLTAGE TABLE

| | | **CABLE LENGHT** (m) | | | |
|---|---|---|---|---|---|
| | | 5 | 10 | 20 | 30 |
| **POWER** (W) | **CABLE SECTION** ($mm^2$) | **TRACK LENGHT** (m) | | | |
| 75 | 0,75 | 50 | 50 | 30 | X |
| | 1,5 | 50 | 50 | 50 | 50 |
| 150 | 0,75 | 40 | 15 | X | X |
| | 1,5 | 50 | 40 | 20 | X |

## COMPATIBILITY ACCORDING TO TYPE OF TRACK

### TRACK 48V & TRACK 48V SURFACE SHORT

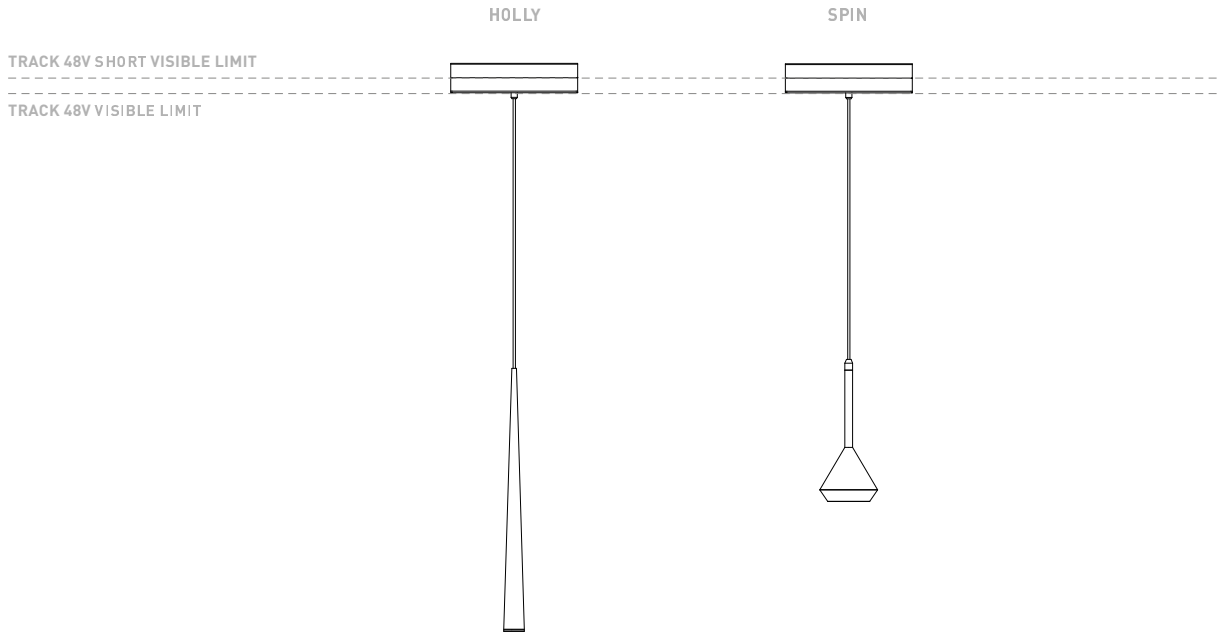





Order with *The 2019 Collection* codes. Products with one single version for both tracks

# TRACK 48V

## ALL 48V TRACK




**TRACK 48V** Live-End Connector

A338-00-01- | N |




**TRACK 48V** Central Connector

A338-00-02- | N |




**TRACK 48V** Corner 90º Connector

A338-00-12- | N |




**TRACK 48V** Wireless Control

0434-01-31- | N | Casambi/AAG Stucchi App

0434-01-32- | N | AAG Stucchi App

## TRIMLESS 48V

**TRACK 48V TRIMLESS** Short T-Bracket

A338-00-03



**TRACK 48V TRIMLESS** Long T-Bracket

A338-00-04



**TRACK 48V TRIMLESS** Straight Joiners (2 units)

A338-00-05



**TRACK 48V TRIMLESS** Plaster Installation Guard 1m

A338-00-21

**TRACK 48V** Clamp for M6 ROD

A338-00-09

*See accessories quantities

**TRACK 48V** Track Clamp

A338-00-10

*See accessories quantities




**TRACK 48V TRIMLESS** Suspension Kit

A338-00-08

*See accessories quantities

*** SUGGESTED MOUNTING ACCESSORIES QUANTITIES**

1000mm - 2 Pcs.
2000mm - 3 Pcs.
3000mm - 4 Pcs.

## SURFACE, SUSPENSION , SURFACE SHORT & SUSPENSION SHORT 48V



**TRACK 48V SURFACE** Straight Joiner

A338-00-11- | N |

COLOUR | N ■ |

# TRACK 48V

## TRIMLESS, SURFACE & SUSPENSION 48V

**TRACK 48V TRIMLESS & SURFACE End**

A338-00-06- | N |

**TRACK 48V TRIMLESS & SURFACE End Feed**

A338-00-07- | N |

## SURFACE SHORT & SUSPENSION SHORT 48V

**TRACK 48V SURFACE SHORT End**

A338-00-18- | N |

**TRACK 48V SURFACE SHORT End Feed**

A338-00-19- | N |

## SURFACE & SURFACE SHORT 48V




**TRACK 48V Power Supply Case**

A338-00-20- | N | NO DIM

*To be installed aside 48V Surface Tracks
Power supply not included

## SUSPENSION & SUSPENSION SHORT 48V




**TRACK 48V Wired Power Supply Case**

A338-00-22- | N | NO DIM

A338-00-23- | N | DIM

*Power supply not included




**TRACK 48V SURFACE Suspension Kit (2 units)**

A338-00-15- | N |

**TRACK 48V SURFACE Suspension Feed Kit**

A338-00-16- | N | NO DIM

A338-00-17- | N | DIM

*For remote power supply

COLOUR | N ■ |

# SPIN 48V

ARKOSLIGHT®

## DIMENSIONS

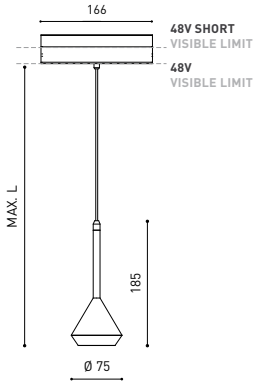


## ACCESSORIES

CORD ACCESOSORY



TRACK 48V OPTIONS

| | PRODUCT |
|---|---|
| Name | SPIN 48V 2M DIM DALI 40º 2700K MC |
| Reference | A3500210MC |
| Color | Metallized copper |
| RAL | Paint of metallic nanoparticles |
| Category | TRACKLIGHTS |

| | LIGHTING INFORMATION |
|---|---|
| Light source | LED |
| Gross luminous flux | 600 Lm |
| Power | 6,5 W |
| Power values of the system | 6,84 W |
| Colour temperature | 2700 K |
| Colour Rendering Index | CRI>90 |
| Chromatic stability | MacAdam Step 2 |
| Light beam angle | 40° |
| Lighting efficiency | 84% |
| Efficacy | 92 Lm/W |
| Current intensity | 700 mA |
| Dimming | DALI - Other DIM, please consult |
| Control through bluetooth | Please Consult |
| Driver | Included |
| Electrical insulation class | III |
| Voltage | 48 Vdc |
| Energy efficiency | A+ |
| LED lifespan | L80B10 (Tj=85°C) >60.000h |

| | OTHER DATA |
|---|---|
| Ingress Protection | IP20 |
| Cord length | 2 m |
| Fast adjustment tensioner | No |
| Track type | Track 48V |
| Weight | 530 g. |
| Packaged weight | 666 g. |
| Packaging dimensions | 253 × 152 × 102 mm |
| Units per package | 1 |
| Materials | Aluminium / Polymethyl Methacrylate |

CE

## AWARDS

Spin 48V, reduced dimensions, essential lines and revolutionary geometry in a pendant luminary for accent lighting. Its extra fine wire gives Spin a sense of airiness and flotability. Spin, now available for Arkoslight's low voltage tracklight systems.

Calle N · Pol. Ind. EL OLIVERAL
46394 Ribarroja del Turia · Valencia (Spain)
Tel. +34 961 667 207 · Fax +34 961 667 054
info@arkoslight.com · www.arkoslight.com

28-03-20 / 04:08

5 Year GUARANTEE*

ARKOSLIGHT®

## POLAR DIAGRAM

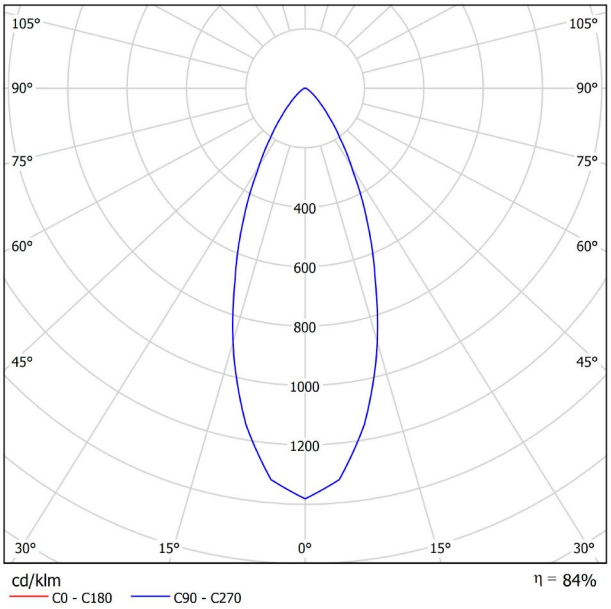


## CONICAL DIAGRAM

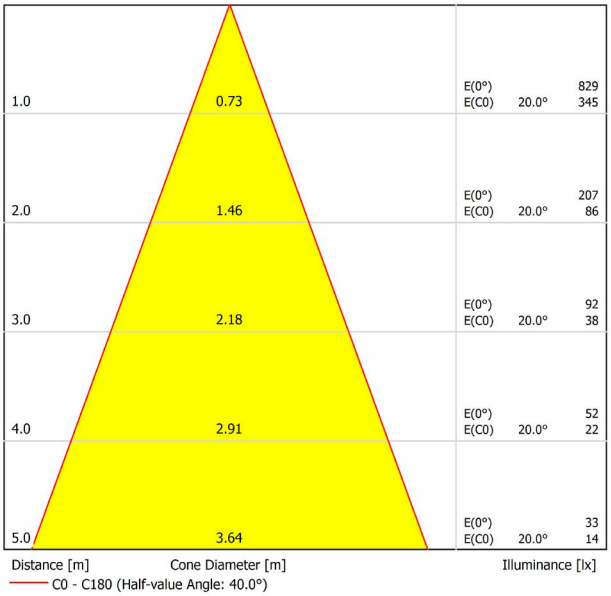




Calle N · Pol. Ind. EL OLIVERAL
46394 Ribarroja del Turia · Valencia (Spain)
Tel. +34 961 667 207 · Fax +34 961 667 054
info@arkoslight.com · www.arkoslight.com

5 Year GUARANTEE*

# CORD ACCESSORY

ARKOSLIGHT®

| | PRODUCT |
|---|---|
| Model | Cord Accessory |
| Reference | **02230000** \| **WT** \| **NT** \| |
| Colour | **WT** ☐ RAL 9016 \| **NT** ■ RAL9005 |
| Category | Accessories |

## DIMENSIONAL DRAWING




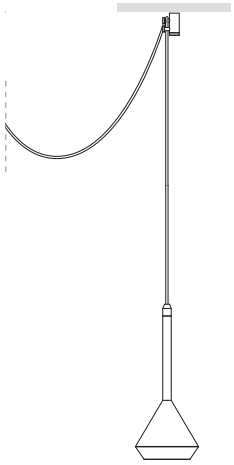

Calle N · Pol. Ind. EL OLIVERAL
46394 Ribarroja del Turia · Valencia (Spain)
Tel. +34 961 667 207 · Fax +34 961 667 054
info@arkoslight.com · www.arkoslight.com

5 Year GUARANTEE*

# TRACK 48V




## TRACK 48V TRIMLESS

| | | |
|---|---|---|
| TRACK 48V TRIMLESS 1m | A338-01-00- | N |
| TRACK 48V TRIMLESS 2m | A338-02-00- | N |
| TRACK 48V TRIMLESS 3m | A338-03-00- | N |
| TRACK 48V TRIMLESS Corner 90º One Plane | A338-06-00- | N |
| TRACK 48V TRIMLESS Corner 90º Two Planes | A338-07-00- | N |

RECOMMENDED FOR INSTALLATIONS WHERE THE PROFILE CAN BE INSTALLED BEFORE THE FALSE PLASTERBOARD CEILING (THICKNESS 12,5mm.)

CE III

TRACK 48V TRIMLESS

Corner 90º One Plane




*Electrical connection not included

TRACK 48V TRIMLESS

Corner 90º Two Planes




*Electrical connection not included




## TRACK 48V SURFACE

| | | |
|---|---|---|
| TRACK 48V SURFACE 1m | A338-11-00- | N |
| TRACK 48V SURFACE 2m | A338-12-00- | N |
| TRACK 48V SURFACE 3m | A338-13-00- | N |
| TRACK 48V SURFACE Corner 90º One Plane | A338-14-00- | N |

CE III

TRACK 48V SURFACE

Corner 90º One Plane




*Electrical connection not included




## TRACK 48V SURFACE SHORT

| | | |
|---|---|---|
| TRACK 48V SURFACE SHORT 1m | A338-21-00- | N |
| TRACK 48V SURFACE SHORT 2m | A338-22-00- | N |
| TRACK 48V SURFACE SHORT 3m | A338-23-00- | N |
| TRACK 48V SURFACE SHORT Corner 90º One Plane | A338-24-00- | N |

CE III

TRACK 48V SURFACE SHORT

Corner 90º One Plane




*Electrical connection not included

48V SYSTEM

# TRACK 48V

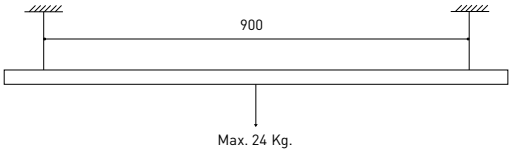


| | | P | V | D |
|---|---|---|---|---|
| CONSTANT VOLTAGE LED POWER SUPPLY | **0434-01-21** | 75W | 48V | 180 x 52 x 30mm |
| | **0434-01-22** | 150W | 48V | 240 x 60 x 49mm |

DROP VOLTAGE TABLE

| | | **CABLE LENGHT** (m) | | | |
|---|---|---|---|---|---|
| | | 5 | 10 | 20 | 30 |
| **POWER** (W) | **CABLE SECTION** ($mm^2$) | **TRACK LENGHT** (m) | | | |
| 75 | 0,75 | 50 | 50 | 30 | X |
| | 1,5 | 50 | 50 | 50 | 50 |
| 150 | 0,75 | 40 | 15 | X | X |
| | 1,5 | 50 | 40 | 20 | X |

## COMPATIBILITY ACCORDING TO TYPE OF TRACK

### TRACK 48V & TRACK 48V SURFACE SHORT

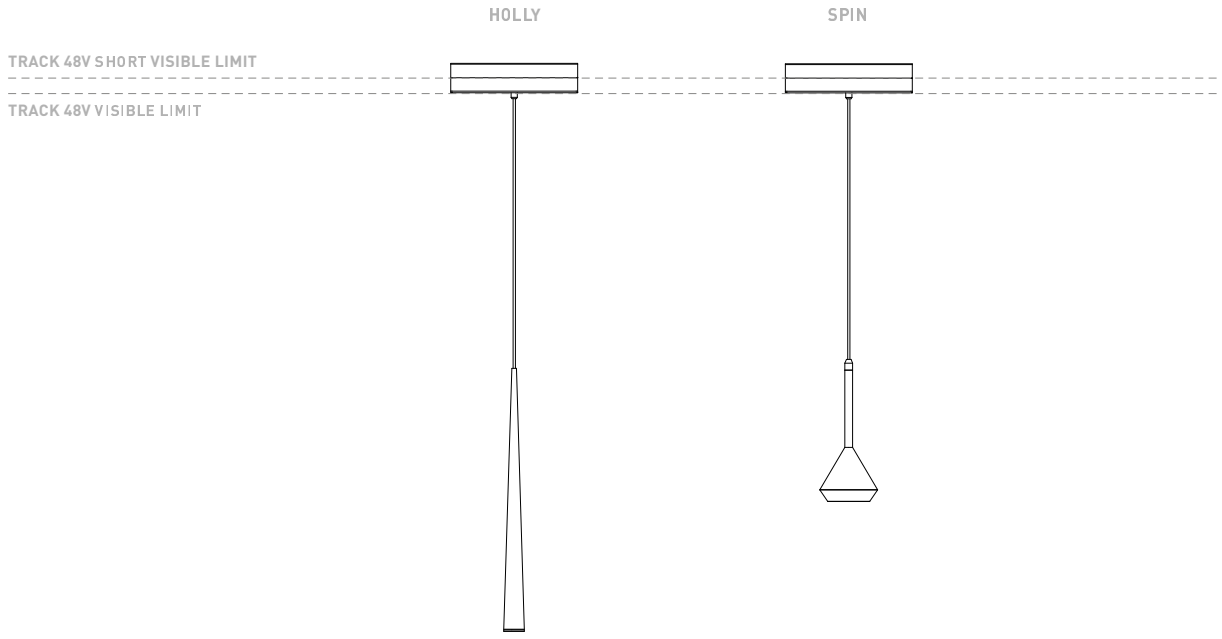





Order with *The 2019 Collection* codes. Products with one single version for both tracks

# TRACK 48V

## ALL 48V TRACK




**TRACK 48V** Live-End Connector

A338-00-01- | N |




**TRACK 48V** Central Connector

A338-00-02- | N |




**TRACK 48V** Corner 90º Connector

A338-00-12- | N |




**TRACK 48V** Wireless Control

0434-01-31- | N | Casambi/AAG Stucchi App

0434-01-32- | N | AAG Stucchi App

## TRIMLESS 48V

**TRACK 48V TRIMLESS** Short T-Bracket

A338-00-03



**TRACK 48V TRIMLESS** Long T-Bracket

A338-00-04



**TRACK 48V TRIMLESS** Straight Joiners (2 units)

A338-00-05



**TRACK 48V TRIMLESS** Plaster Installation Guard 1m

A338-00-21

**TRACK 48V** Clamp for M6 ROD

A338-00-09

*See accessories quantities

**TRACK 48V** Track Clamp

A338-00-10

*See accessories quantities




**TRACK 48V TRIMLESS** Suspension Kit

A338-00-08

*See accessories quantities

*** SUGGESTED MOUNTING ACCESSORIES QUANTITIES**

1000mm - 2 Pcs.
2000mm - 3 Pcs.
3000mm - 4 Pcs.

## SURFACE, SUSPENSION , SURFACE SHORT & SUSPENSION SHORT 48V



**TRACK 48V SURFACE** Straight Joiner

A338-00-11- | N |

COLOUR | N ■ |

# TRACK 48V

## TRIMLESS, SURFACE & SUSPENSION 48V

**TRACK 48V TRIMLESS & SURFACE End**

A338-00-06- | N |

**TRACK 48V TRIMLESS & SURFACE End Feed**

A338-00-07- | N |

## SURFACE SHORT & SUSPENSION SHORT 48V

**TRACK 48V SURFACE SHORT End**

A338-00-18- | N |

**TRACK 48V SURFACE SHORT End Feed**

A338-00-19- | N |

## SURFACE & SURFACE SHORT 48V




**TRACK 48V Power Supply Case**

A338-00-20- | N | NO DIM

*To be installed aside 48V Surface Tracks
Power supply not included

## SUSPENSION & SUSPENSION SHORT 48V




**TRACK 48V Wired Power Supply Case**

A338-00-22- | N | NO DIM

A338-00-23- | N | DIM

*Power supply not included




**TRACK 48V SURFACE Suspension Kit (2 units)**

A338-00-15- | N |

**TRACK 48V SURFACE Suspension Feed Kit**

A338-00-16- | N | NO DIM

A338-00-17- | N | DIM

*For remote power supply

COLOUR | N ■ |