




DIMENSIONS



ACCESSORIES



CORD ACCESSORY

PRODUCT

Name	HOLLY 2M 17° 2700K MC
Reference	A2810000MC
Color	Metallized copper
RAL	Paint of metallic nanoparticles
Category	SUSPENSION

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	190 Lm
Power	2,1 W
Power values of the system	2,80 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 3
Light beam angle	17°
Lighting efficiency	92%
Efficacy	90 Lm/W
Current intensity	700 mA
Dimming	Please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A++
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Recess measurements	Ø50 mm.
Cord length	2 m
Fast adjustment tensioner	No
Weight	321 g.
Packaged weight	450 g.
Packaging dimensions	385 x 103 x 78 mm
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene




Holly is a suspended luminaire for accent lighting applications. Its stylish and elegant geometry and its solid body of machined aluminium define a piece of a highly decorative character and perceived high quality. Its light beam, strictly defined by a micro-reflector, optimises the light beam of the LED, in order to obtain a relatively elevated illuminance at the working plane, thanks to a remarkable utilization of the lumen gross flow. To install the luminaire, Holly gets implemented by means of a recessed ceiling base, discrete and integrated. Its most frequent applications are counters, bedside tables, stairwells, etc.

POLAR DIAGRAM

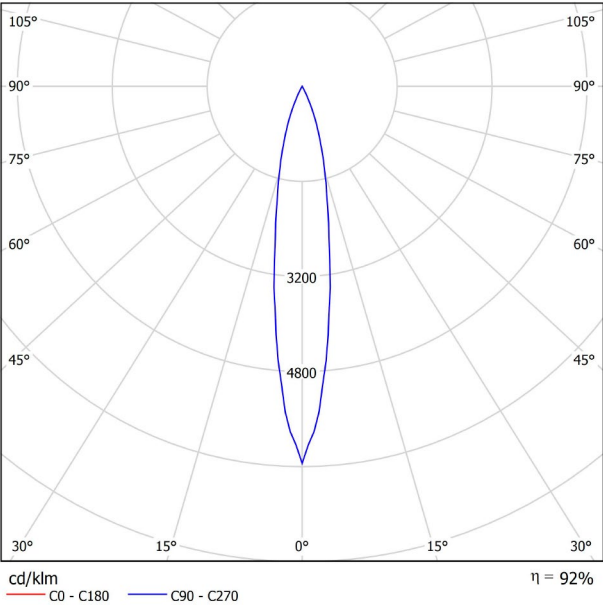



CONICAL DIAGRAM

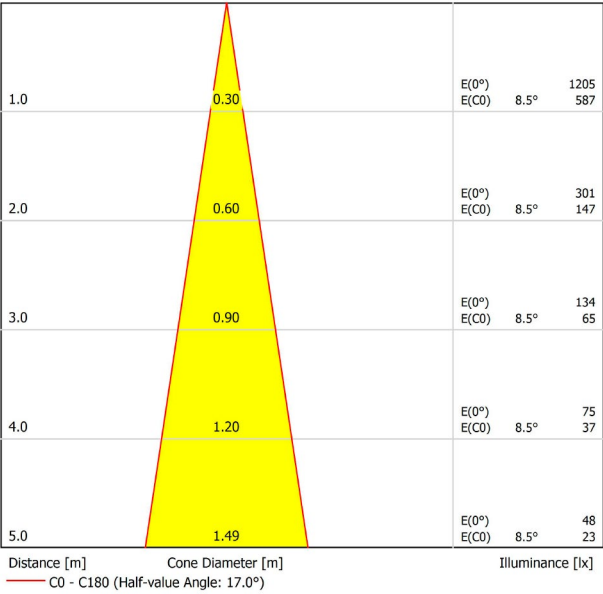




PRODUCT	
Model	Cord Accessory
Reference	02230000 WT NT
Colour	WT ☐ RAL 9016 NT ☒ RAL9005
Category	Accessories

DIMENSIONAL DRAWING

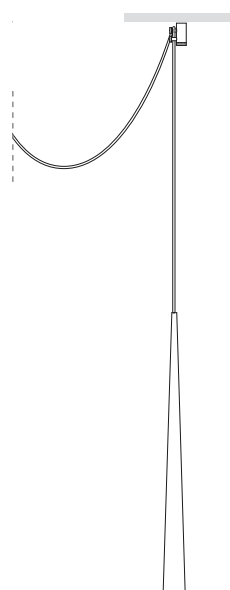



DIMENSIONS



ACCESSORIES



CORD ACCESSORY

PRODUCT

Name	HOLLY 2M 17° 2700K MG
Reference	A2810000MG
Color	Metallized gold
RAL	Paint of metallic nanoparticles
Category	SUSPENSION

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	190 Lm
Power	2,1 W
Power values of the system	2,80 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 3
Light beam angle	17°
Lighting efficiency	92%
Efficacy	90 Lm/W
Current intensity	700 mA
Dimming	Please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A++
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Recess measurements	Ø50 mm.
Cord length	2 m
Fast adjustment tensioner	No
Weight	321 g.
Packaged weight	450 g.
Packaging dimensions	385 x 103 x 78 mm
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene




Holly is a suspended luminaire for accent lighting applications. Its stylish and elegant geometry and its solid body of machined aluminium define a piece of a highly decorative character and perceived high quality. Its light beam, strictly defined by a micro-reflector, optimises the light beam of the LED, in order to obtain a relatively elevated illuminance at the working plane, thanks to a remarkable utilization of the lumen gross flow. To install the luminaire, Holly gets implemented by means of a recessed ceiling base, discrete and integrated. Its most frequent applications are counters, bedside tables, stairwells, etc.

POLAR DIAGRAM

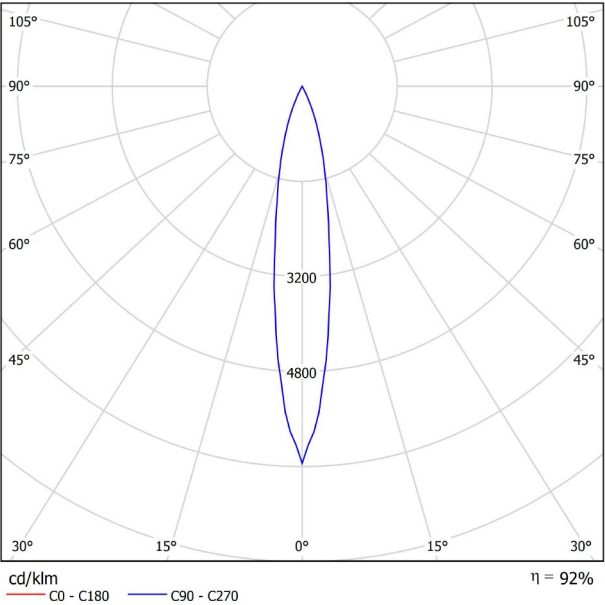



CONICAL DIAGRAM

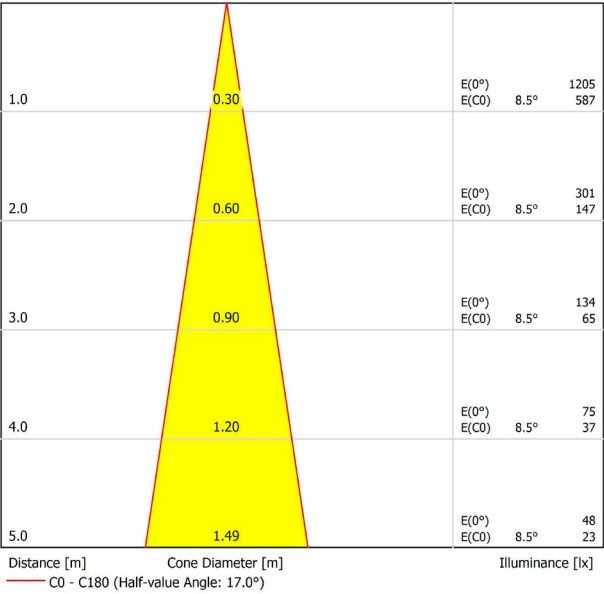




PRODUCT	
Model	Cord Accessory
Reference	02230000 WT NT
Colour	WT ☐ RAL 9016 NT ☒ RAL9005
Category	Accessories

DIMENSIONAL DRAWING

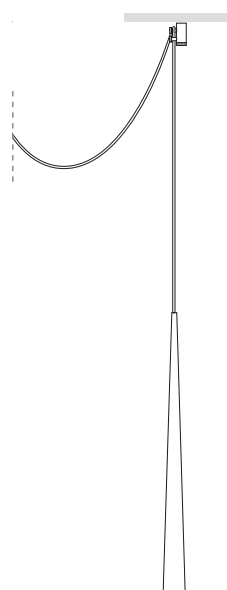



DIMENSIONS



ACCESSORIES



CORD ACCESSORY

PRODUCT

Name	HOLLY 2M 17° 2700K NT
Reference	A2810000NT
Color	Textured black
RAL	9005
Category	SUSPENSION

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	190 Lm
Power	2,1 W
Power values of the system	2,80 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 3
Light beam angle	17°
Lighting efficiency	92%
Efficacy	90 Lm/W
Current intensity	700 mA
Dimming	Please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A++
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Recess measurements	Ø50 mm.
Cord length	2 m
Fast adjustment tensioner	No
Weight	321 g.
Packaged weight	450 g.
Packaging dimensions	385 x 103 x 78 mm
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene




Holly is a suspended luminaire for accent lighting applications. Its stylish and elegant geometry and its solid body of machined aluminium define a piece of a highly decorative character and perceived high quality. Its light beam, strictly defined by a micro-reflector, optimises the light beam of the LED, in order to obtain a relatively elevated illuminance at the working plane, thanks to a remarkable utilization of the lumen gross flow. To install the luminaire, Holly gets implemented by means of a recessed ceiling base, discrete and integrated. Its most frequent applications are counters, bedside tables, stairwells, etc.

POLAR DIAGRAM

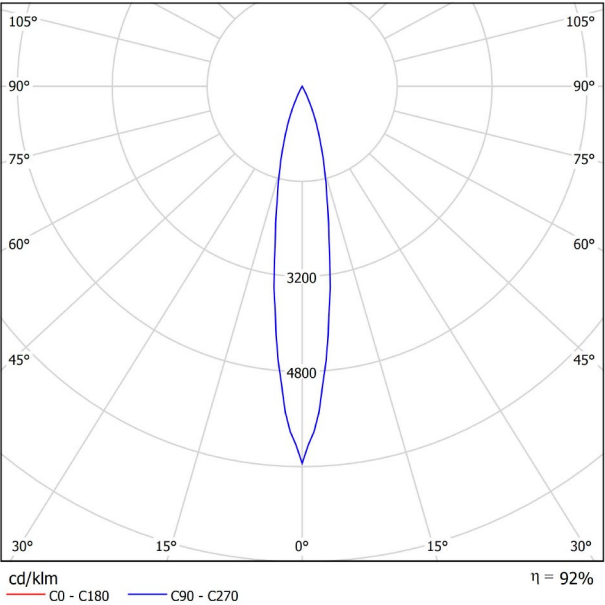



CONICAL DIAGRAM

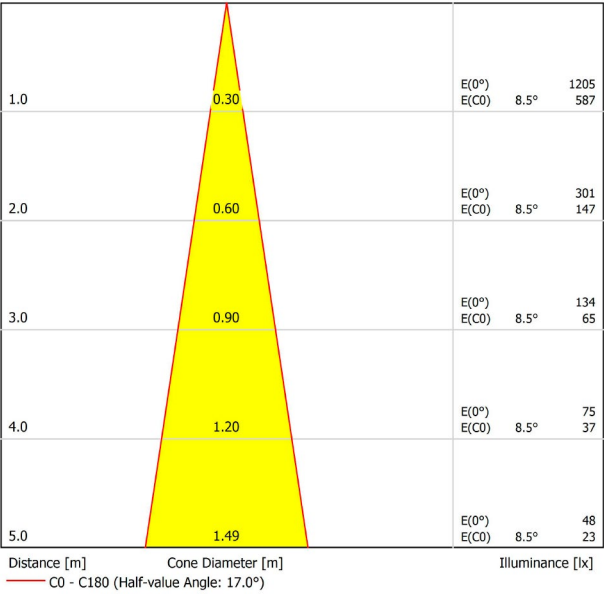




PRODUCT	
Model	Cord Accessory
Reference	02230000 WT NT
Colour	WT ☐ RAL 9016 NT ☒ RAL9005
Category	Accessories

DIMENSIONAL DRAWING

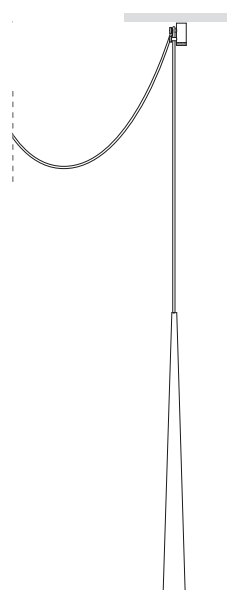



DIMENSIONS



ACCESSORIES



CORD ACCESSORY

PRODUCT

Name	HOLLY 2M 17° 2700K WT
Reference	A2810000WT
Color	Textured white
RAL	9016
Category	SUSPENSION

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	190 Lm
Power	2,1 W
Power values of the system	2,80 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 3
Light beam angle	17°
Lighting efficiency	92%
Efficacy	90 Lm/W
Current intensity	700 mA
Dimming	Please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A++
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Recess measurements	Ø50 mm.
Cord length	2 m
Fast adjustment tensioner	No
Weight	321 g.
Packaged weight	450 g.
Packaging dimensions	385 x 103 x 78 mm
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene




Holly is a suspended luminaire for accent lighting applications. Its stylish and elegant geometry and its solid body of machined aluminium define a piece of a highly decorative character and perceived high quality. Its light beam, strictly defined by a micro-reflector, optimises the light beam of the LED, in order to obtain a relatively elevated illuminance at the working plane, thanks to a remarkable utilization of the lumen gross flow. To install the luminaire, Holly gets implemented by means of a recessed ceiling base, discrete and integrated. Its most frequent applications are counters, bedside tables, stairwells, etc.

POLAR DIAGRAM

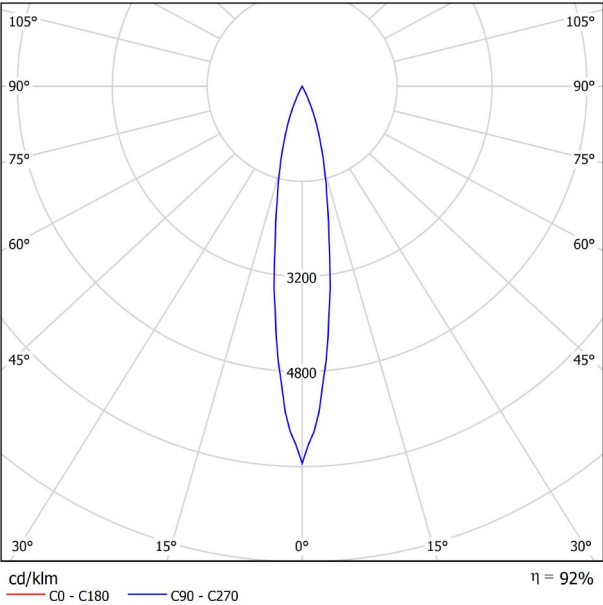



CONICAL DIAGRAM

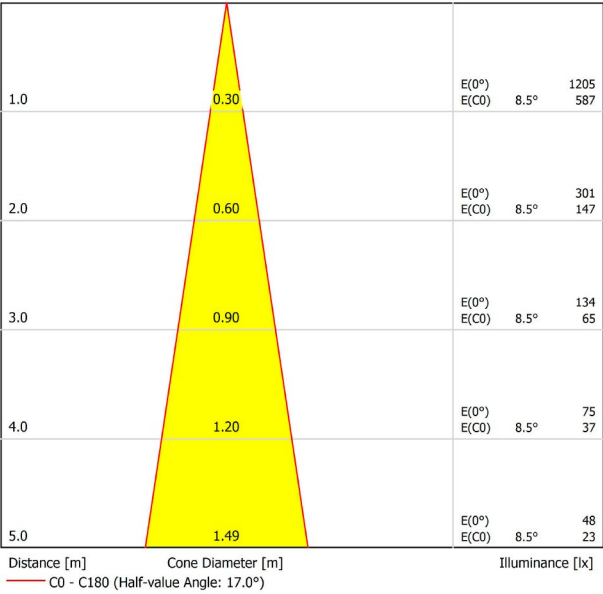




PRODUCT	
Model	Cord Accessory
Reference	02230000 WT NT
Colour	WT ☐ RAL 9016 NT ☒ RAL9005
Category	Accessories

DIMENSIONAL DRAWING

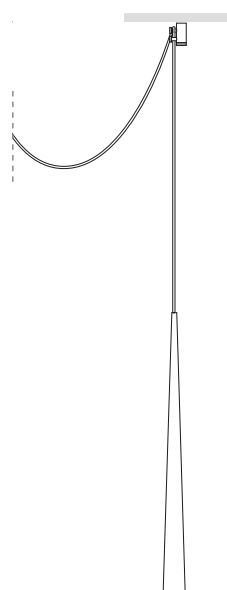



DIMENSIONS



ACCESSORIES



CORD ACCESSORY

PRODUCT

Name	HOLLY 2M 17° 3000K MC
Reference	A2810001MC
Color	Metallized copper
RAL	Paint of metallic nanoparticles
Category	SUSPENSION

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	210 Lm
Power	2,1 W
Power values of the system	2,80 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 3
Light beam angle	17°
Lighting efficiency	92%
Efficacy	100 Lm/W
Current intensity	700 mA
Dimming	Please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A++
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Recess measurements	Ø50 mm.
Cord length	2 m
Fast adjustment tensioner	No
Weight	321 g.
Packaged weight	450 g.
Packaging dimensions	385 x 103 x 78 mm
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene




Holly is a suspended luminaire for accent lighting applications. Its stylish and elegant geometry and its solid body of machined aluminium define a piece of a highly decorative character and perceived high quality. Its light beam, strictly defined by a micro-reflector, optimises the light beam of the LED, in order to obtain a relatively elevated illuminance at the working plane, thanks to a remarkable utilization of the lumen gross flow. To install the luminaire, Holly gets implemented by means of a recessed ceiling base, discrete and integrated. Its most frequent applications are counters, bedside tables, stairwells, etc.

POLAR DIAGRAM

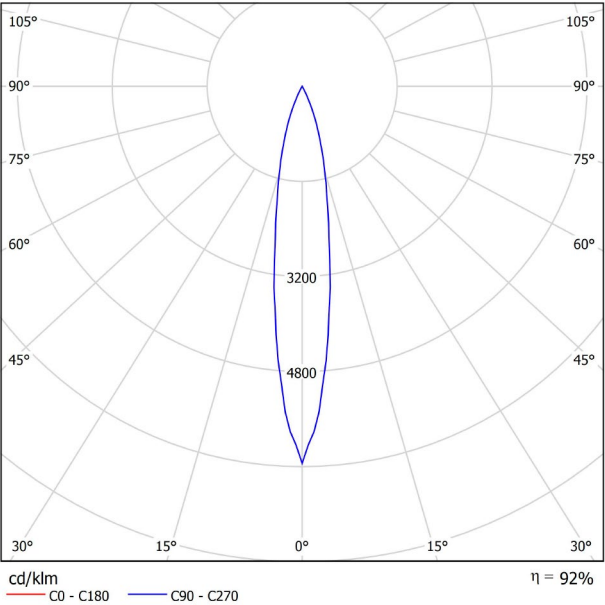



CONICAL DIAGRAM

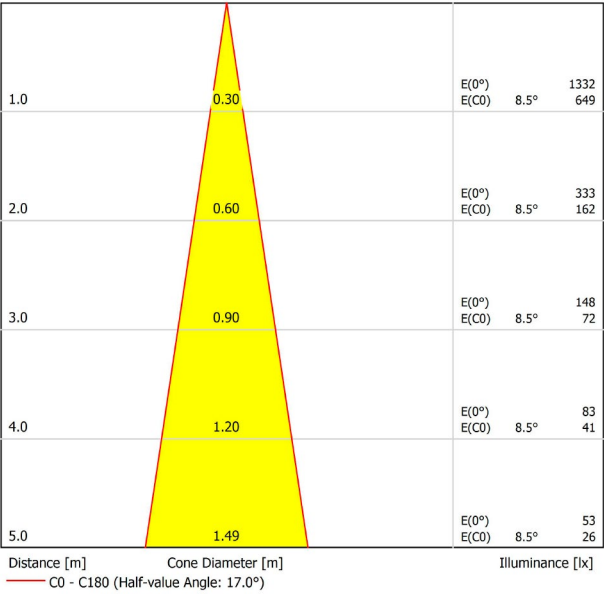




PRODUCT	
Model	Cord Accessory
Reference	02230000 WT NT
Colour	WT ☐ RAL 9016 NT ☒ RAL9005
Category	Accessories

DIMENSIONAL DRAWING

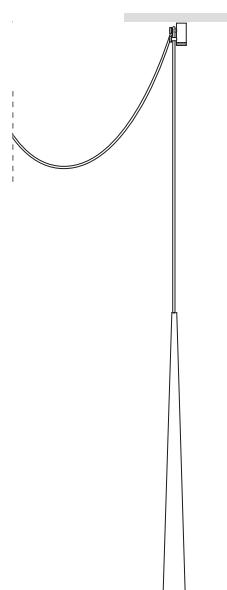



DIMENSIONS



ACCESSORIES



CORD ACCESSORY

PRODUCT

Name	HOLLY 2M 17° 3000K MG
Reference	A2810001MG
Color	Metallized gold
RAL	Paint of metallic nanoparticles
Category	SUSPENSION

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	210 Lm
Power	2,1 W
Power values of the system	2,80 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 3
Light beam angle	17°
Lighting efficiency	92%
Efficacy	100 Lm/W
Current intensity	700 mA
Dimming	Please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A++
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Recess measurements	Ø50 mm.
Cord length	2 m
Fast adjustment tensioner	No
Weight	321 g.
Packaged weight	450 g.
Packaging dimensions	385 x 103 x 78 mm
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene




Holly is a suspended luminaire for accent lighting applications. Its stylish and elegant geometry and its solid body of machined aluminium define a piece of a highly decorative character and perceived high quality. Its light beam, strictly defined by a micro-reflector, optimises the light beam of the LED, in order to obtain a relatively elevated illuminance at the working plane, thanks to a remarkable utilization of the lumen gross flow. To install the luminaire, Holly gets implemented by means of a recessed ceiling base, discrete and integrated. Its most frequent applications are counters, bedside tables, stairwells, etc.

POLAR DIAGRAM

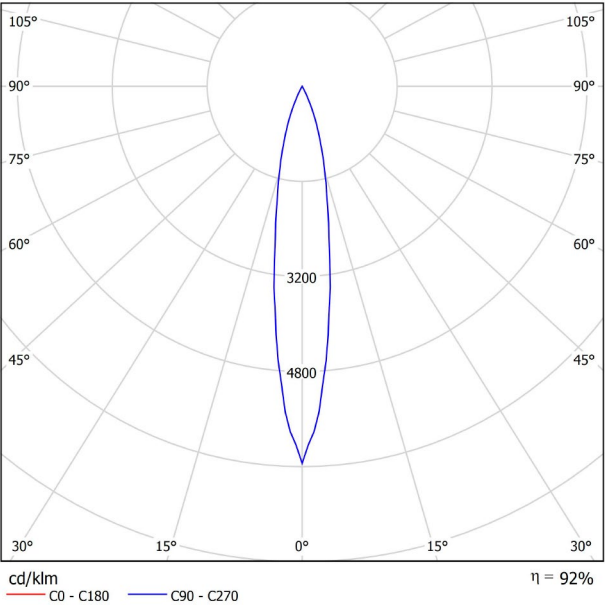



CONICAL DIAGRAM

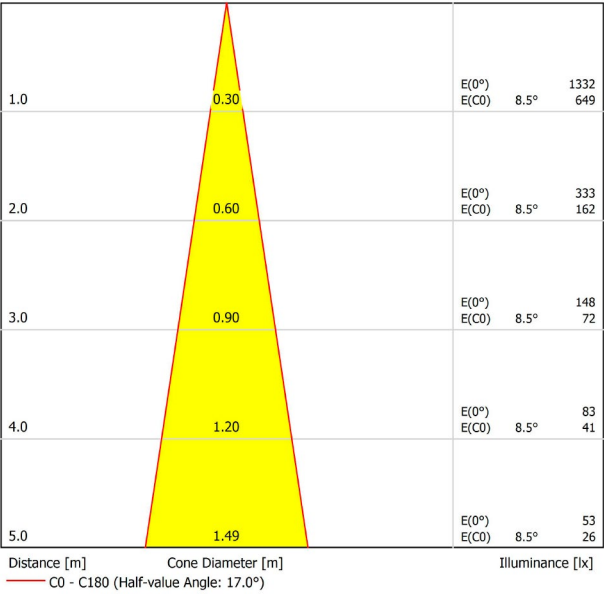




PRODUCT	
Model	Cord Accessory
Reference	02230000 WT NT
Colour	WT ☐ RAL 9016 NT ☒ RAL9005
Category	Accessories

DIMENSIONAL DRAWING

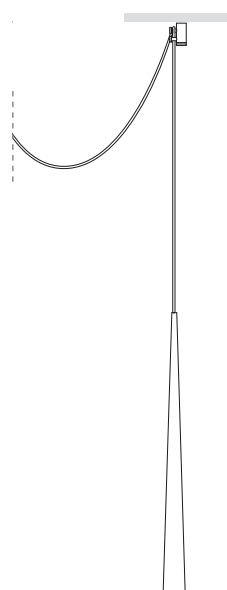



DIMENSIONS



ACCESSORIES



CORD ACCESSORY

PRODUCT

Name	HOLLY 2M 17° 3000K NT
Reference	A2810001NT
Color	Textured black
RAL	9005
Category	SUSPENSION

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	210 Lm
Power	2,1 W
Power values of the system	2,80 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 3
Light beam angle	17°
Lighting efficiency	92%
Efficacy	100 Lm/W
Current intensity	700 mA
Dimming	Please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A++
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Recess measurements	Ø50 mm.
Cord length	2 m
Fast adjustment tensioner	No
Weight	321 g.
Packaged weight	450 g.
Packaging dimensions	385 x 103 x 78 mm
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene




Holly is a suspended luminaire for accent lighting applications. Its stylish and elegant geometry and its solid body of machined aluminium define a piece of a highly decorative character and perceived high quality. Its light beam, strictly defined by a micro-reflector, optimises the light beam of the LED, in order to obtain a relatively elevated illuminance at the working plane, thanks to a remarkable utilization of the lumen gross flow. To install the luminaire, Holly gets implemented by means of a recessed ceiling base, discrete and integrated. Its most frequent applications are counters, bedside tables, stairwells, etc.

POLAR DIAGRAM

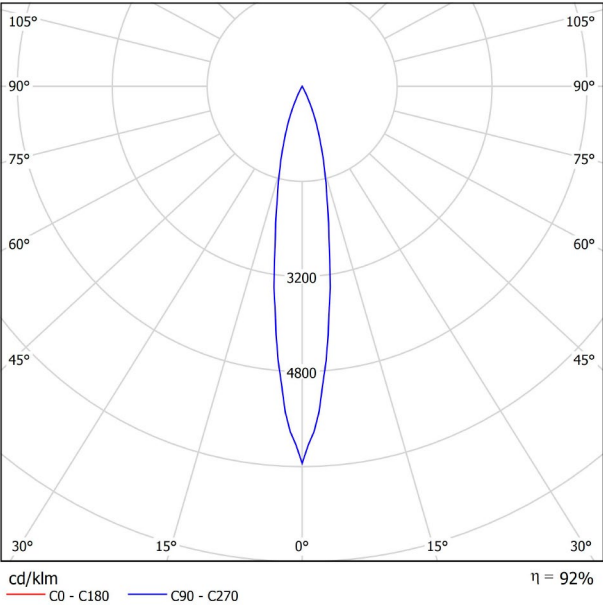



CONICAL DIAGRAM

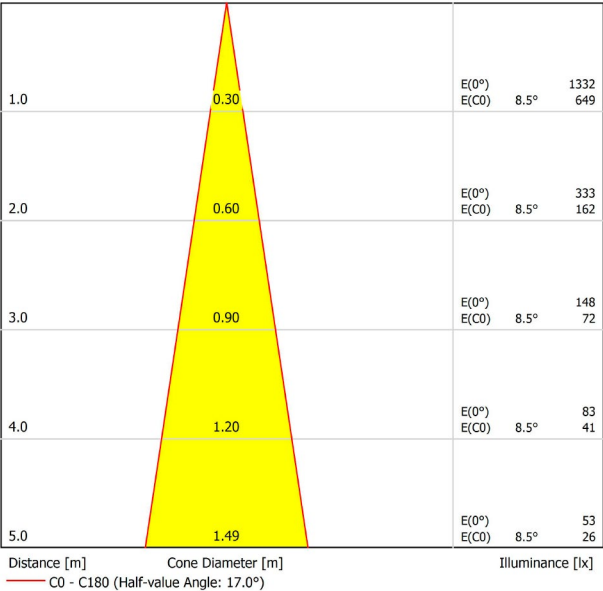




PRODUCT	
Model	Cord Accessory
Reference	02230000 WT NT
Colour	WT ☐ RAL 9016 NT ☒ RAL9005
Category	Accessories

DIMENSIONAL DRAWING

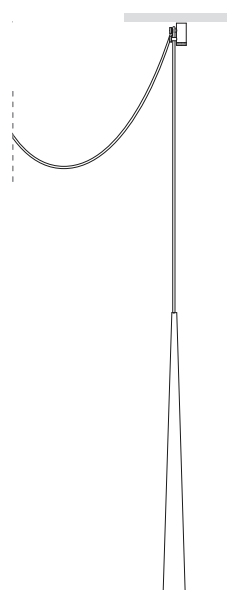



DIMENSIONS



ACCESSORIES



CORD ACCESSORY

PRODUCT

Name	HOLLY 2M 17° 3000K WT
Reference	A2810001WT
Color	Textured white
RAL	9016
Category	SUSPENSION

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	210 Lm
Power	2,1 W
Power values of the system	2,80 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 3
Light beam angle	17°
Lighting efficiency	92%
Efficacy	100 Lm/W
Current intensity	700 mA
Dimming	Please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A++
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Recess measurements	Ø50 mm.
Cord length	2 m
Fast adjustment tensioner	No
Weight	321 g.
Packaged weight	450 g.
Packaging dimensions	385 x 103 x 78 mm
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene




Holly is a suspended luminaire for accent lighting applications. Its stylish and elegant geometry and its solid body of machined aluminium define a piece of a highly decorative character and perceived high quality. Its light beam, strictly defined by a micro-reflector, optimises the light beam of the LED, in order to obtain a relatively elevated illuminance at the working plane, thanks to a remarkable utilization of the lumen gross flow. To install the luminaire, Holly gets implemented by means of a recessed ceiling base, discrete and integrated. Its most frequent applications are counters, bedside tables, stairwells, etc.

POLAR DIAGRAM

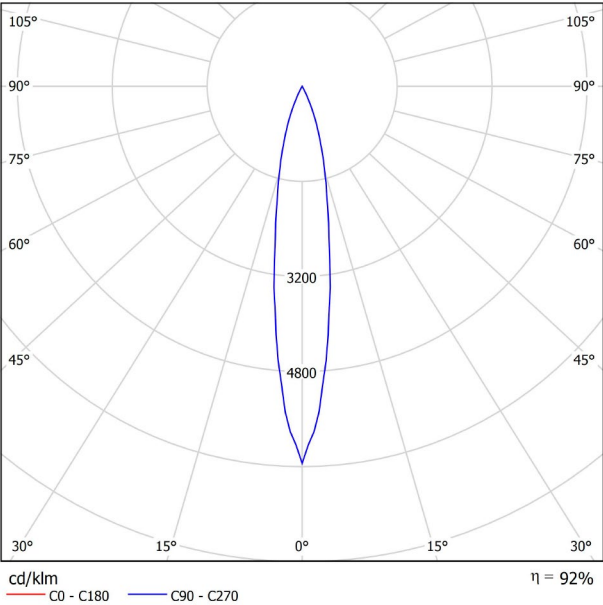



CONICAL DIAGRAM

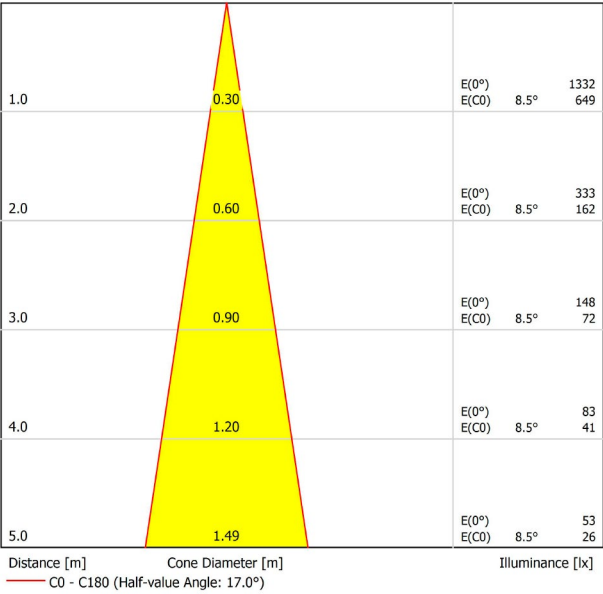




PRODUCT	
Model	Cord Accessory
Reference	02230000 WT NT
Colour	WT ☐ RAL 9016 NT ☒ RAL9005
Category	Accessories

DIMENSIONAL DRAWING

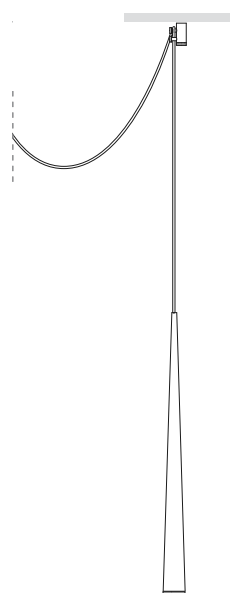



DIMENSIONS



ACCESSORIES



CORD ACCESSORY

PRODUCT

Name	HOLLY 2M 35° 2700K MC
Reference	A2810010MC
Color	Metallized copper
RAL	Paint of metallic nanoparticles
Category	SUSPENSION

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	190 Lm
Power	2,1 W
Power values of the system	2,80 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 3
Light beam angle	35°
Lighting efficiency	93%
Efficacy	90 Lm/W
Current intensity	700 mA
Dimming	Please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A++
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Recess measurements	Ø50 mm.
Cord length	2 m
Fast adjustment tensioner	No
Weight	321 g.
Packaged weight	450 g.
Packaging dimensions	385 x 103 x 78 mm
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene




Holly is a suspended luminaire for accent lighting applications. Its stylish and elegant geometry and its solid body of machined aluminium define a piece of a highly decorative character and perceived high quality. Its light beam, strictly defined by a micro-reflector, optimises the light beam of the LED, in order to obtain a relatively elevated illuminance at the working plane, thanks to a remarkable utilization of the lumen gross flow. To install the luminaire, Holly gets implemented by means of a recessed ceiling base, discrete and integrated. Its most frequent applications are counters, bedside tables, stairwells, etc.

POLAR DIAGRAM

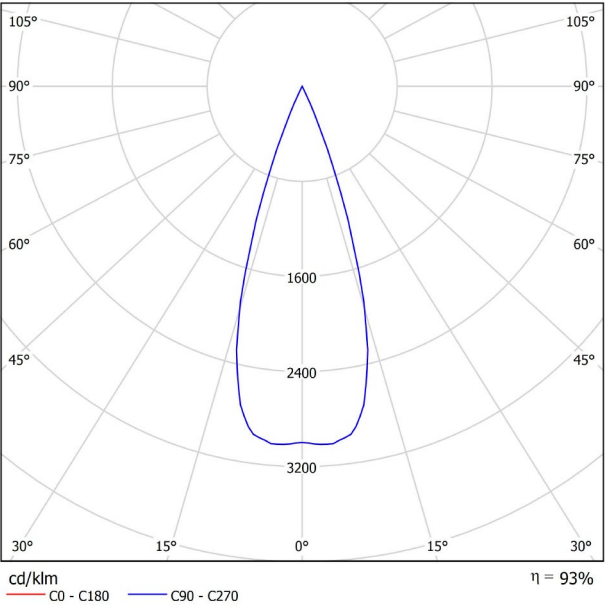



CONICAL DIAGRAM

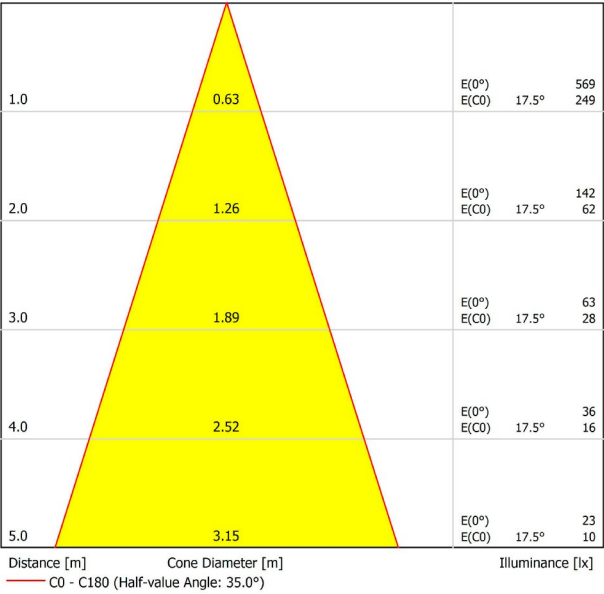




PRODUCT	
Model	Cord Accessory
Reference	02230000 WT NT
Colour	WT ☐ RAL 9016 NT ☒ RAL9005
Category	Accessories

DIMENSIONAL DRAWING

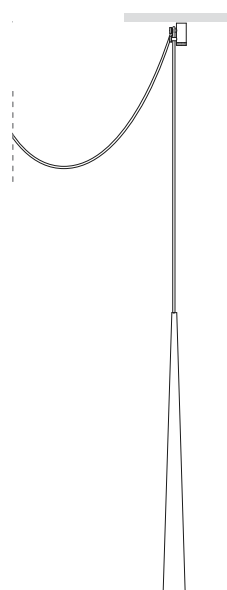



DIMENSIONS



ACCESSORIES



CORD ACCESSORY

PRODUCT

Name	HOLLY 2M 35° 2700K MG
Reference	A2810010MG
Color	Metallized gold
RAL	Paint of metallic nanoparticles
Category	SUSPENSION

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	190 Lm
Power	2,1 W
Power values of the system	2,80 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 3
Light beam angle	35°
Lighting efficiency	93%
Efficacy	90 Lm/W
Current intensity	700 mA
Dimming	Please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A++
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Recess measurements	Ø50 mm.
Cord length	2 m
Fast adjustment tensioner	No
Weight	321 g.
Packaged weight	450 g.
Packaging dimensions	385 x 103 x 78 mm
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene




Holly is a suspended luminaire for accent lighting applications. Its stylish and elegant geometry and its solid body of machined aluminium define a piece of a highly decorative character and perceived high quality. Its light beam, strictly defined by a micro-reflector, optimises the light beam of the LED, in order to obtain a relatively elevated illuminance at the working plane, thanks to a remarkable utilization of the lumen gross flow. To install the luminaire, Holly gets implemented by means of a recessed ceiling base, discrete and integrated. Its most frequent applications are counters, bedside tables, stairwells, etc.

POLAR DIAGRAM

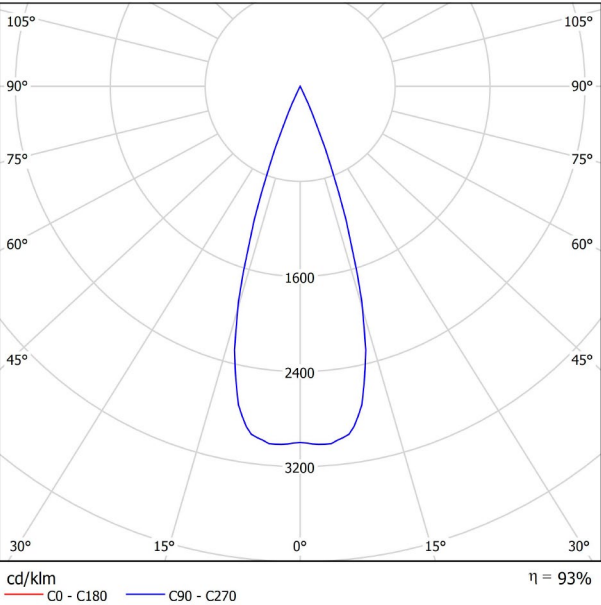



CONICAL DIAGRAM

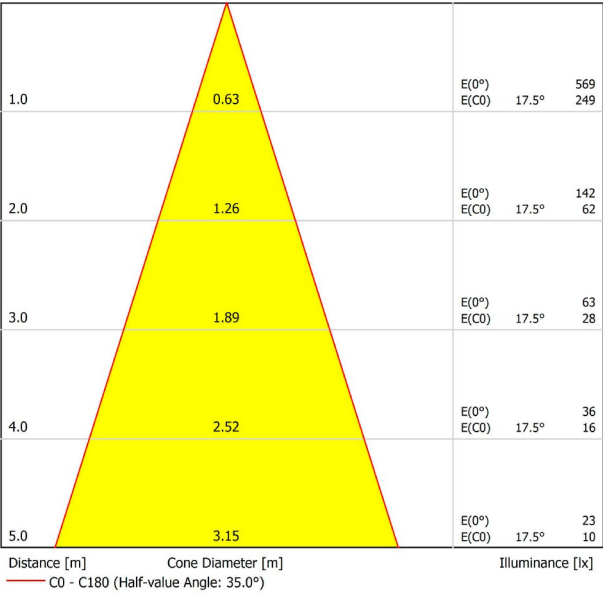




PRODUCT	
Model	Cord Accessory
Reference	02230000 WT NT
Colour	WT ☐ RAL 9016 NT ☒ RAL9005
Category	Accessories

DIMENSIONAL DRAWING

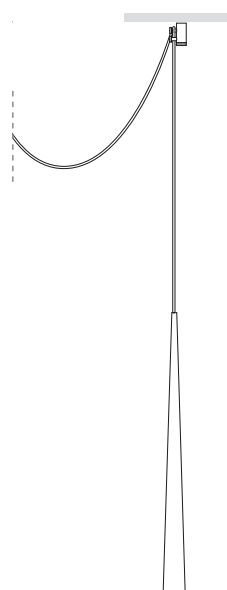



DIMENSIONS



ACCESSORIES



CORD ACCESSORY

PRODUCT

Name	HOLLY 2M 35° 2700K NT
Reference	A2810010NT
Color	Textured black
RAL	9005
Category	SUSPENSION

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	190 Lm
Power	2,1 W
Power values of the system	2,80 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 3
Light beam angle	35°
Lighting efficiency	93%
Efficacy	90 Lm/W
Current intensity	700 mA
Dimming	Please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A++
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Recess measurements	Ø50 mm.
Cord length	2 m
Fast adjustment tensioner	No
Weight	321 g.
Packaged weight	450 g.
Packaging dimensions	385 x 103 x 78 mm
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene




Holly is a suspended luminaire for accent lighting applications. Its stylish and elegant geometry and its solid body of machined aluminium define a piece of a highly decorative character and perceived high quality. Its light beam, strictly defined by a micro-reflector, optimises the light beam of the LED, in order to obtain a relatively elevated illuminance at the working plane, thanks to a remarkable utilization of the lumen gross flow. To install the luminaire, Holly gets implemented by means of a recessed ceiling base, discrete and integrated. Its most frequent applications are counters, bedside tables, stairwells, etc.

POLAR DIAGRAM

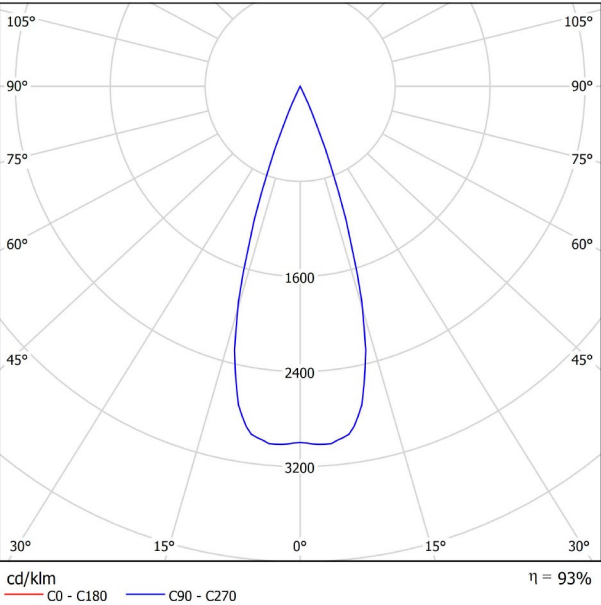



CONICAL DIAGRAM

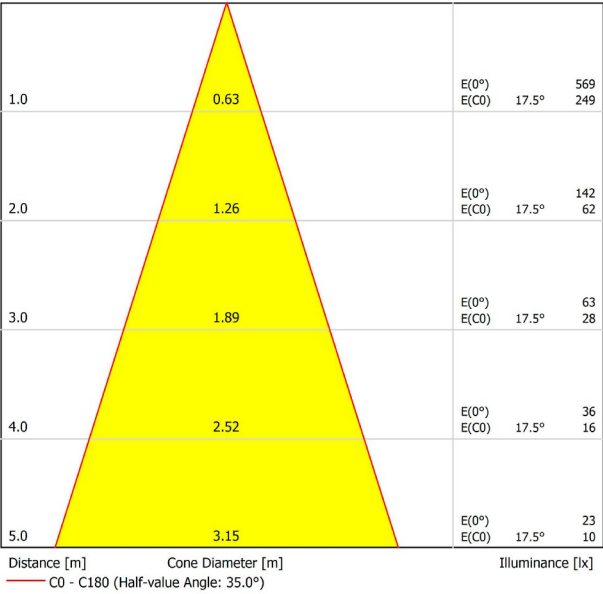




PRODUCT	
Model	Cord Accessory
Reference	02230000 WT NT
Colour	WT ☐ RAL 9016 NT ☒ RAL9005
Category	Accessories

DIMENSIONAL DRAWING

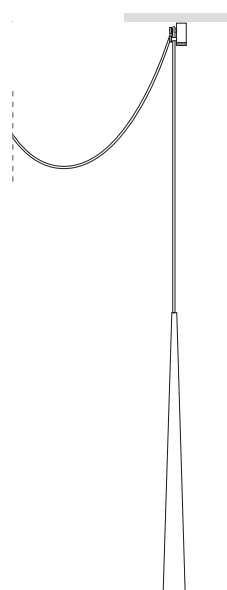



DIMENSIONS



ACCESSORIES



CORD ACCESSORY

PRODUCT

Name	HOLLY 2M 35° 2700K WT
Reference	A2810010WT
Color	Textured white
RAL	9016
Category	SUSPENSION

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	190 Lm
Power	2,1 W
Power values of the system	2,80 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 3
Light beam angle	35°
Lighting efficiency	93%
Efficacy	90 Lm/W
Current intensity	700 mA
Dimming	Please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A++
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Recess measurements	Ø50 mm.
Cord length	2 m
Fast adjustment tensioner	No
Weight	321 g.
Packaged weight	450 g.
Packaging dimensions	385 x 103 x 78 mm
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene




Holly is a suspended luminaire for accent lighting applications. Its stylish and elegant geometry and its solid body of machined aluminium define a piece of a highly decorative character and perceived high quality. Its light beam, strictly defined by a micro-reflector, optimises the light beam of the LED, in order to obtain a relatively elevated illuminance at the working plane, thanks to a remarkable utilization of the lumen gross flow. To install the luminaire, Holly gets implemented by means of a recessed ceiling base, discrete and integrated. Its most frequent applications are counters, bedside tables, stairwells, etc.

POLAR DIAGRAM

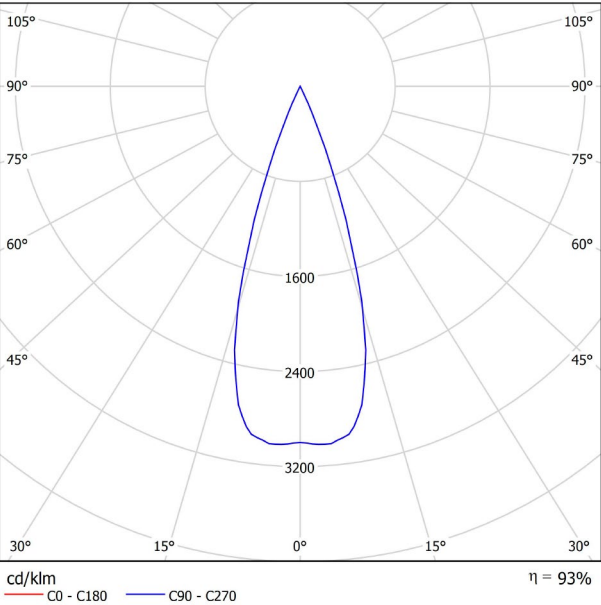



CONICAL DIAGRAM

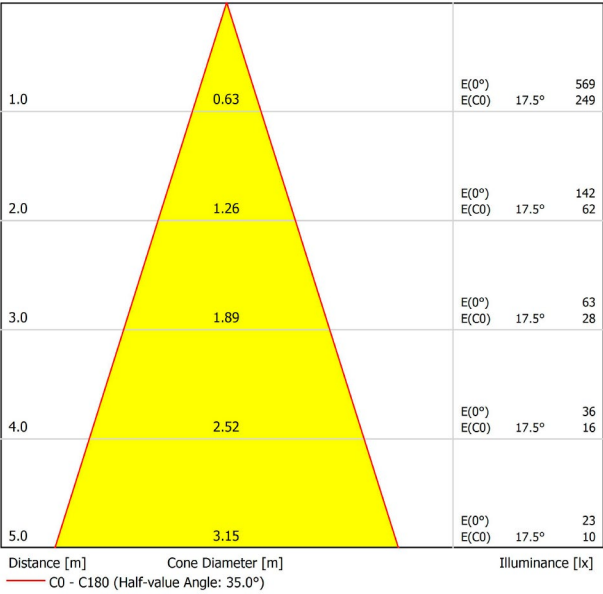




PRODUCT	
Model	Cord Accessory
Reference	02230000 WT NT
Colour	WT ☐ RAL 9016 NT ☒ RAL9005
Category	Accessories

DIMENSIONAL DRAWING

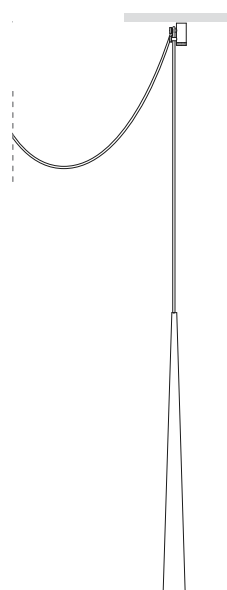



DIMENSIONS



ACCESSORIES



CORD ACCESSORY

PRODUCT

Name	HOLLY 2M 35° 3000K MC
Reference	A2810011MC
Color	Metallized copper
RAL	Paint of metallic nanoparticles
Category	SUSPENSION

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	210 Lm
Power	2,1 W
Power values of the system	2,80 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 3
Light beam angle	35°
Lighting efficiency	93%
Efficacy	100 Lm/W
Current intensity	700 mA
Dimming	Please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A++
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Recess measurements	Ø50 mm.
Cord length	2 m
Fast adjustment tensioner	No
Weight	321 g.
Packaged weight	450 g.
Packaging dimensions	385 x 103 x 78 mm
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene




Holly is a suspended luminaire for accent lighting applications. Its stylish and elegant geometry and its solid body of machined aluminium define a piece of a highly decorative character and perceived high quality. Its light beam, strictly defined by a micro-reflector, optimises the light beam of the LED, in order to obtain a relatively elevated illuminance at the working plane, thanks to a remarkable utilization of the lumen gross flow. To install the luminaire, Holly gets implemented by means of a recessed ceiling base, discrete and integrated. Its most frequent applications are counters, bedside tables, stairwells, etc.

POLAR DIAGRAM

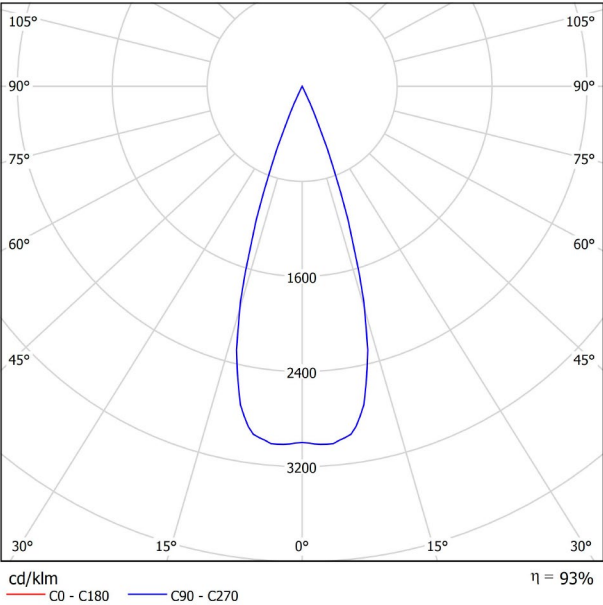



CONICAL DIAGRAM

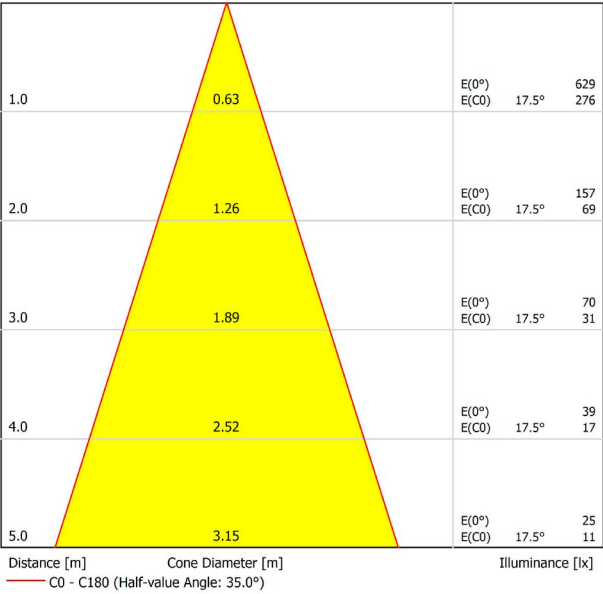




PRODUCT	
Model	Cord Accessory
Reference	02230000 WT NT
Colour	WT ☐ RAL 9016 NT ☒ RAL9005
Category	Accessories

DIMENSIONAL DRAWING

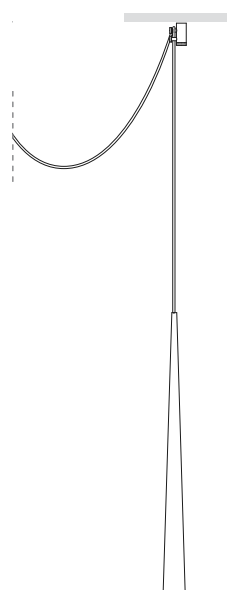



DIMENSIONS



ACCESSORIES



CORD ACCESSORY

PRODUCT

Name	HOLLY 2M 35° 3000K MG
Reference	A2810011MG
Color	Metallized gold
RAL	Paint of metallic nanoparticles
Category	SUSPENSION

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	210 Lm
Power	2,1 W
Power values of the system	2,80 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 3
Light beam angle	35°
Lighting efficiency	93%
Efficacy	100 Lm/W
Current intensity	700 mA
Dimming	Please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A++
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Recess measurements	Ø50 mm.
Cord length	2 m
Fast adjustment tensioner	No
Weight	321 g.
Packaged weight	450 g.
Packaging dimensions	385 x 103 x 78 mm
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene




Holly is a suspended luminaire for accent lighting applications. Its stylish and elegant geometry and its solid body of machined aluminium define a piece of a highly decorative character and perceived high quality. Its light beam, strictly defined by a micro-reflector, optimises the light beam of the LED, in order to obtain a relatively elevated illuminance at the working plane, thanks to a remarkable utilization of the lumen gross flow. To install the luminaire, Holly gets implemented by means of a recessed ceiling base, discrete and integrated. Its most frequent applications are counters, bedside tables, stairwells, etc.

POLAR DIAGRAM

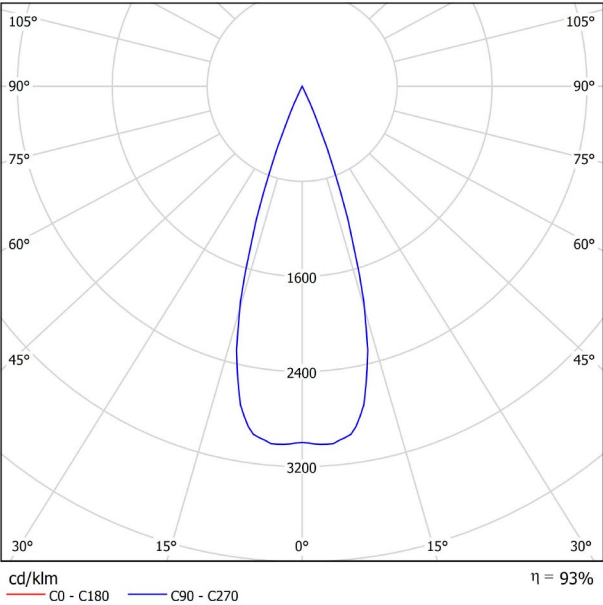



CONICAL DIAGRAM

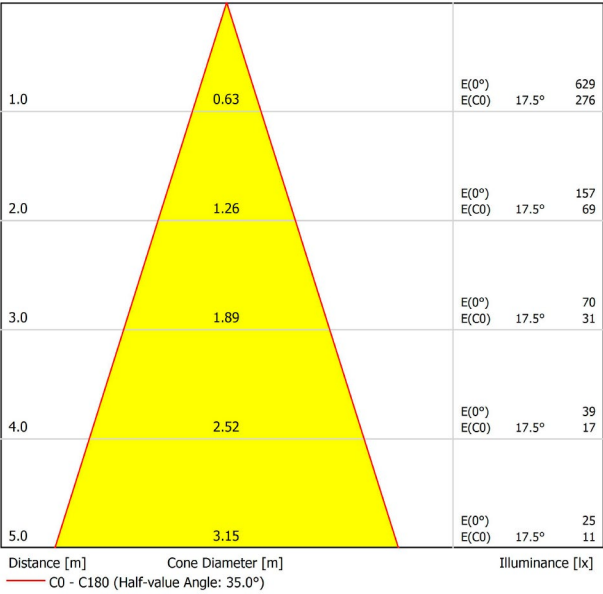




PRODUCT	
Model	Cord Accessory
Reference	02230000 WT NT
Colour	WT ☐ RAL 9016 NT ☒ RAL9005
Category	Accessories

DIMENSIONAL DRAWING

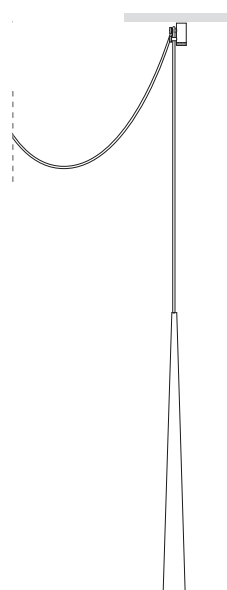



DIMENSIONS



ACCESSORIES



CORD ACCESSORY

PRODUCT

Name	HOLLY 2M 35° 3000K NT
Reference	A2810011NT
Color	Textured black
RAL	9005
Category	SUSPENSION

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	210 Lm
Power	2,1 W
Power values of the system	2,80 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 3
Light beam angle	35°
Lighting efficiency	93%
Efficacy	100 Lm/W
Current intensity	700 mA
Dimming	Please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A++
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Recess measurements	Ø50 mm.
Cord length	2 m
Fast adjustment tensioner	No
Weight	321 g.
Packaged weight	450 g.
Packaging dimensions	385 x 103 x 78 mm
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene




Holly is a suspended luminaire for accent lighting applications. Its stylish and elegant geometry and its solid body of machined aluminium define a piece of a highly decorative character and perceived high quality. Its light beam, strictly defined by a micro-reflector, optimises the light beam of the LED, in order to obtain a relatively elevated illuminance at the working plane, thanks to a remarkable utilization of the lumen gross flow. To install the luminaire, Holly gets implemented by means of a recessed ceiling base, discrete and integrated. Its most frequent applications are counters, bedside tables, stairwells, etc.

POLAR DIAGRAM

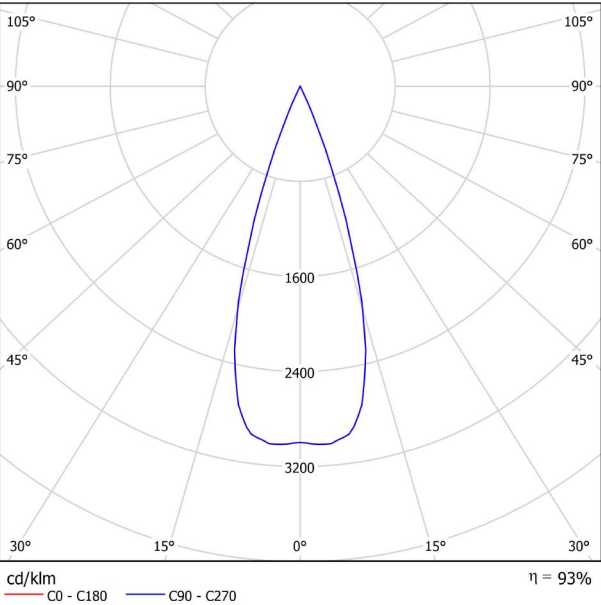



CONICAL DIAGRAM

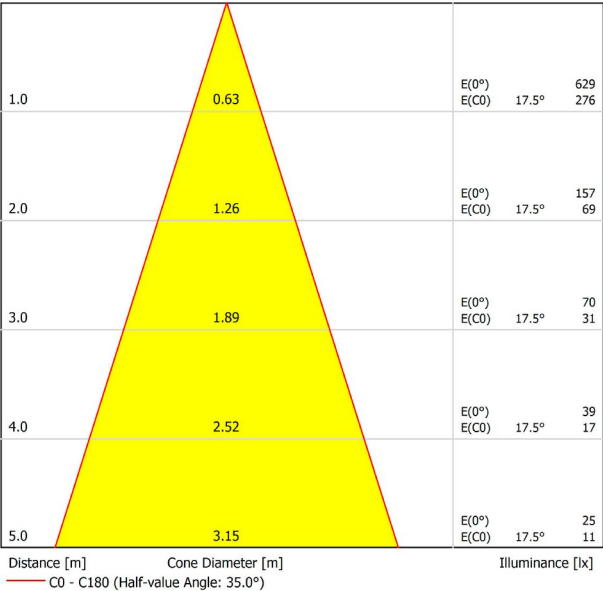




PRODUCT	
Model	Cord Accessory
Reference	02230000 WT NT
Colour	WT ☐ RAL 9016 NT ☒ RAL9005
Category	Accessories

DIMENSIONAL DRAWING

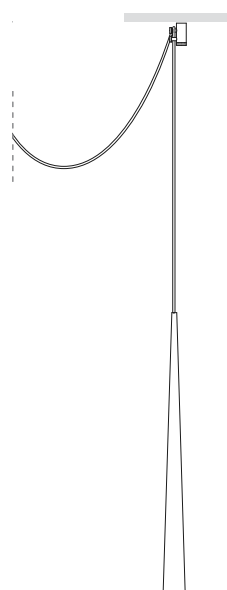



DIMENSIONS



ACCESSORIES



CORD ACCESSORY

PRODUCT

Name	HOLLY 2M 35° 3000K WT
Reference	A2810011WT
Color	Textured white
RAL	9016
Category	SUSPENSION

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	210 Lm
Power	2,1 W
Power values of the system	2,80 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 3
Light beam angle	35°
Lighting efficiency	93%
Efficacy	100 Lm/W
Current intensity	700 mA
Dimming	Please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A++
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Recess measurements	Ø50 mm.
Cord length	2 m
Fast adjustment tensioner	No
Weight	321 g.
Packaged weight	450 g.
Packaging dimensions	385 x 103 x 78 mm
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene




Holly is a suspended luminaire for accent lighting applications. Its stylish and elegant geometry and its solid body of machined aluminium define a piece of a highly decorative character and perceived high quality. Its light beam, strictly defined by a micro-reflector, optimises the light beam of the LED, in order to obtain a relatively elevated illuminance at the working plane, thanks to a remarkable utilization of the lumen gross flow. To install the luminaire, Holly gets implemented by means of a recessed ceiling base, discrete and integrated. Its most frequent applications are counters, bedside tables, stairwells, etc.

POLAR DIAGRAM

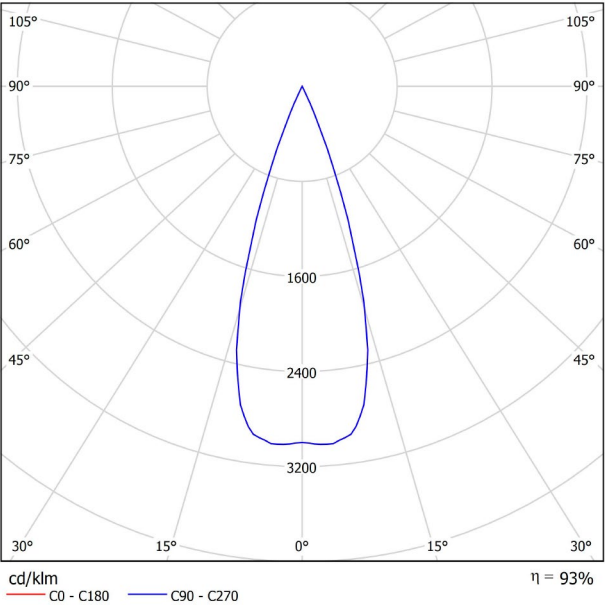



CONICAL DIAGRAM

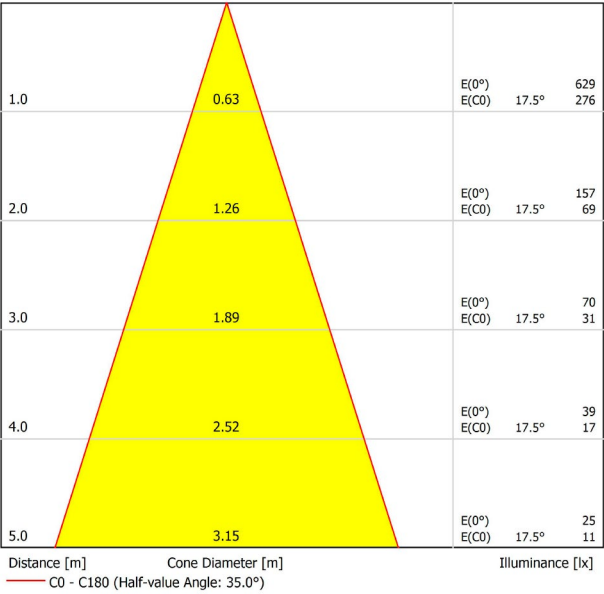




PRODUCT	
Model	Cord Accessory
Reference	02230000 WT NT
Colour	WT ☐ RAL 9016 NT ☒ RAL9005
Category	Accessories

DIMENSIONAL DRAWING

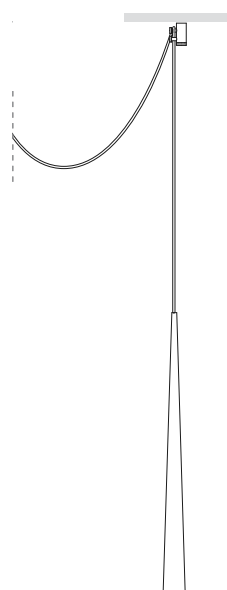



DIMENSIONS



ACCESSORIES



CORD ACCESSORY

PRODUCT

Name	HOLLY 3M 17° 2700K MC
Reference	A2811000MC
Color	Metallized copper
RAL	Paint of metallic nanoparticles
Category	SUSPENSION

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	190 Lm
Power	2,1 W
Power values of the system	2,80 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 3
Light beam angle	17°
Lighting efficiency	92%
Efficacy	90 Lm/W
Current intensity	700 mA
Dimming	Please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A++
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Recess measurements	Ø50 mm.
Cord length	3 m
Fast adjustment tensioner	No
Weight	321 g.
Packaged weight	450 g.
Packaging dimensions	385 x 103 x 78 mm
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene




Holly is a suspended luminaire for accent lighting applications. Its stylish and elegant geometry and its solid body of machined aluminium define a piece of a highly decorative character and perceived high quality. Its light beam, strictly defined by a micro-reflector, optimises the light beam of the LED, in order to obtain a relatively elevated illuminance at the working plane, thanks to a remarkable utilization of the lumen gross flow. To install the luminaire, Holly gets implemented by means of a recessed ceiling base, discrete and integrated. Its most frequent applications are counters, bedside tables, stairwells, etc.

POLAR DIAGRAM

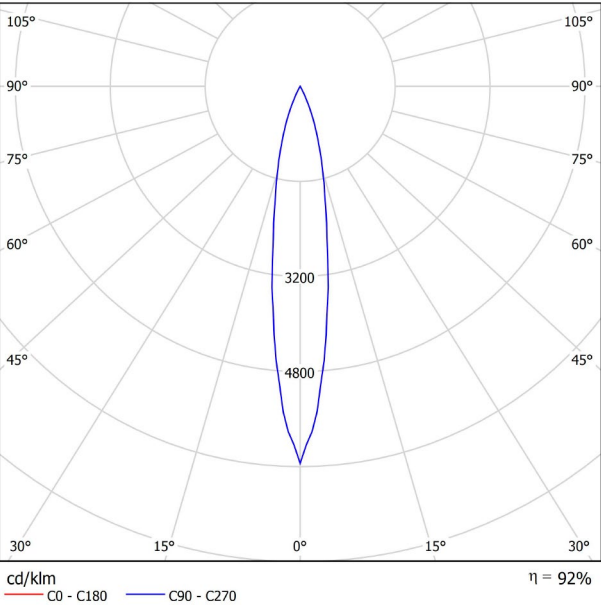



CONICAL DIAGRAM

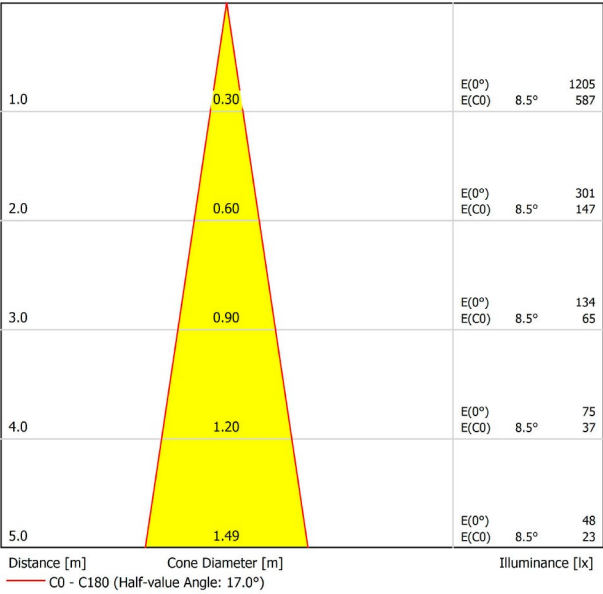




PRODUCT	
Model	Cord Accessory
Reference	02230000 WT NT
Colour	WT ☐ RAL 9016 NT ☒ RAL9005
Category	Accessories

DIMENSIONAL DRAWING

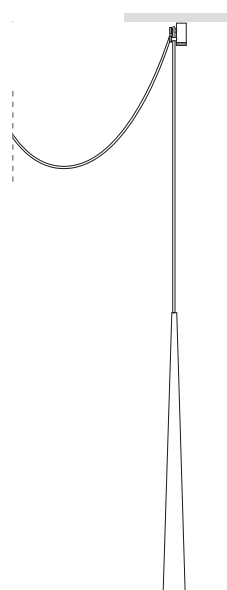



DIMENSIONS



ACCESSORIES



CORD ACCESSORY

PRODUCT

Name	HOLLY 3M 17° 2700K MG
Reference	A2811000MG
Color	Metallized gold
RAL	Paint of metallic nanoparticles
Category	SUSPENSION

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	190 Lm
Power	2,1 W
Power values of the system	2,80 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 3
Light beam angle	17°
Lighting efficiency	92%
Efficacy	90 Lm/W
Current intensity	700 mA
Dimming	Please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A++
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Recess measurements	Ø50 mm.
Cord length	3 m
Fast adjustment tensioner	No
Weight	321 g.
Packaged weight	450 g.
Packaging dimensions	385 x 103 x 78 mm
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene




Holly is a suspended luminaire for accent lighting applications. Its stylish and elegant geometry and its solid body of machined aluminium define a piece of a highly decorative character and perceived high quality. Its light beam, strictly defined by a micro-reflector, optimises the light beam of the LED, in order to obtain a relatively elevated illuminance at the working plane, thanks to a remarkable utilization of the lumen gross flow. To install the luminaire, Holly gets implemented by means of a recessed ceiling base, discrete and integrated. Its most frequent applications are counters, bedside tables, stairwells, etc.

POLAR DIAGRAM

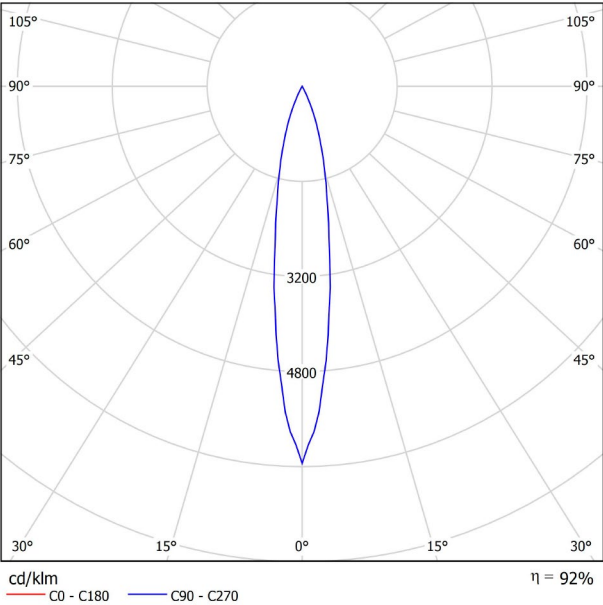



CONICAL DIAGRAM

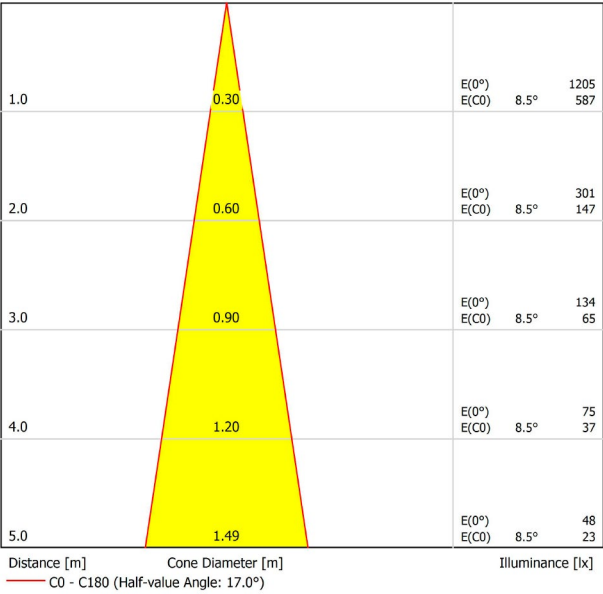




PRODUCT	
Model	Cord Accessory
Reference	02230000 WT NT
Colour	WT ☐ RAL 9016 NT ☒ RAL9005
Category	Accessories

DIMENSIONAL DRAWING

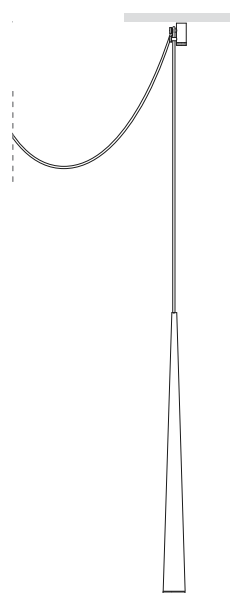



DIMENSIONS



ACCESSORIES



CORD ACCESSORY

PRODUCT

Name	HOLLY 3M 17° 2700K NT
Reference	A2811000NT
Color	Textured black
RAL	9005
Category	SUSPENSION

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	190 Lm
Power	2,1 W
Power values of the system	2,80 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 3
Light beam angle	17°
Lighting efficiency	92%
Efficacy	90 Lm/W
Current intensity	700 mA
Dimming	Please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A++
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Recess measurements	Ø50 mm.
Cord length	3 m
Fast adjustment tensioner	No
Weight	321 g.
Packaged weight	450 g.
Packaging dimensions	385 x 103 x 78 mm
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene




Holly is a suspended luminaire for accent lighting applications. Its stylish and elegant geometry and its solid body of machined aluminium define a piece of a highly decorative character and perceived high quality. Its light beam, strictly defined by a micro-reflector, optimises the light beam of the LED, in order to obtain a relatively elevated illuminance at the working plane, thanks to a remarkable utilization of the lumen gross flow. To install the luminaire, Holly gets implemented by means of a recessed ceiling base, discrete and integrated. Its most frequent applications are counters, bedside tables, stairwells, etc.

POLAR DIAGRAM

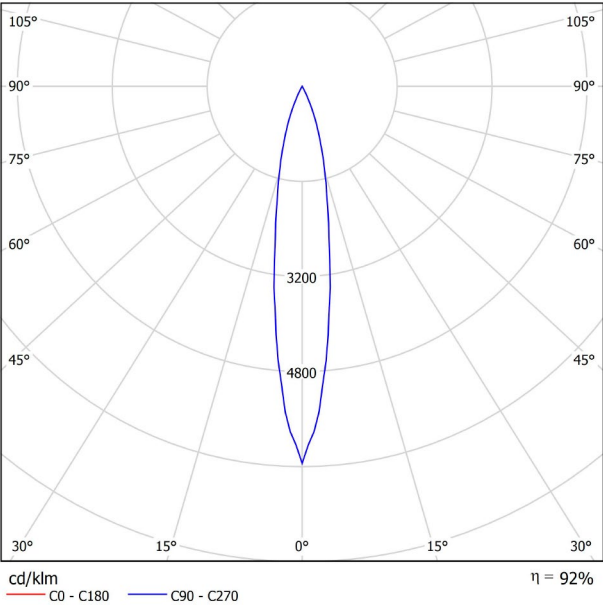



CONICAL DIAGRAM

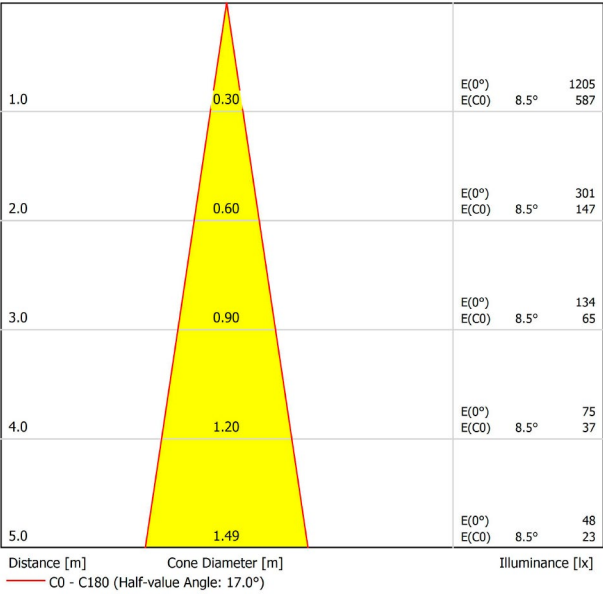




PRODUCT	
Model	Cord Accessory
Reference	02230000 WT NT
Colour	WT ☐ RAL 9016 NT ☒ RAL9005
Category	Accessories

DIMENSIONAL DRAWING

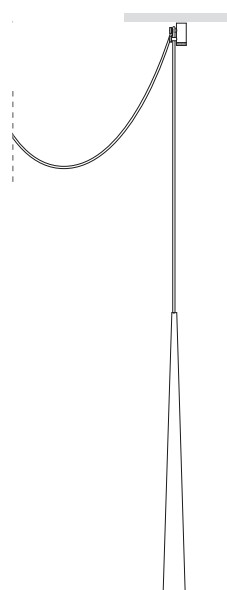



DIMENSIONS



ACCESSORIES



CORD ACCESSORY

PRODUCT

Name	HOLLY 3M 17° 2700K WT
Reference	A2811000WT
Color	Textured white
RAL	9016
Category	SUSPENSION

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	190 Lm
Power	2,1 W
Power values of the system	2,80 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 3
Light beam angle	17°
Lighting efficiency	92%
Efficacy	90 Lm/W
Current intensity	700 mA
Dimming	Please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A++
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Recess measurements	Ø50 mm.
Cord length	3 m
Fast adjustment tensioner	No
Weight	321 g.
Packaged weight	450 g.
Packaging dimensions	385 x 103 x 78 mm
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene




Holly is a suspended luminaire for accent lighting applications. Its stylish and elegant geometry and its solid body of machined aluminium define a piece of a highly decorative character and perceived high quality. Its light beam, strictly defined by a micro-reflector, optimises the light beam of the LED, in order to obtain a relatively elevated illuminance at the working plane, thanks to a remarkable utilization of the lumen gross flow. To install the luminaire, Holly gets implemented by means of a recessed ceiling base, discrete and integrated. Its most frequent applications are counters, bedside tables, stairwells, etc.

POLAR DIAGRAM

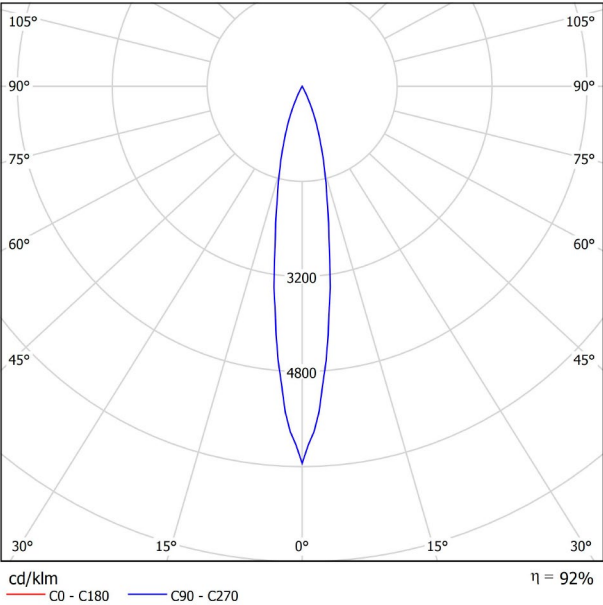



CONICAL DIAGRAM

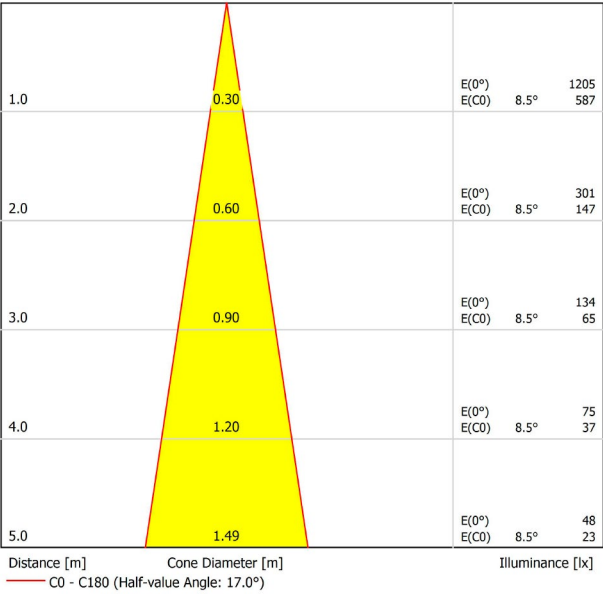




PRODUCT	
Model	Cord Accessory
Reference	02230000 WT NT
Colour	WT ☐ RAL 9016 NT ☒ RAL9005
Category	Accessories

DIMENSIONAL DRAWING

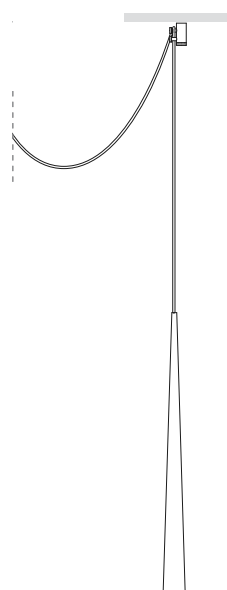



DIMENSIONS



ACCESSORIES



CORD ACCESSORY

PRODUCT

Name	HOLLY 3M 17° 3000K MC
Reference	A2811001MC
Color	Metallized copper
RAL	Paint of metallic nanoparticles
Category	SUSPENSION

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	210 Lm
Power	2,1 W
Power values of the system	2,80 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 3
Light beam angle	17°
Lighting efficiency	92%
Efficacy	100 Lm/W
Current intensity	700 mA
Dimming	Please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A++
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Recess measurements	Ø50 mm.
Cord length	3 m
Fast adjustment tensioner	No
Weight	321 g.
Packaged weight	450 g.
Packaging dimensions	385 x 103 x 78 mm
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene




Holly is a suspended luminaire for accent lighting applications. Its stylish and elegant geometry and its solid body of machined aluminium define a piece of a highly decorative character and perceived high quality. Its light beam, strictly defined by a micro-reflector, optimises the light beam of the LED, in order to obtain a relatively elevated illuminance at the working plane, thanks to a remarkable utilization of the lumen gross flow. To install the luminaire, Holly gets implemented by means of a recessed ceiling base, discrete and integrated. Its most frequent applications are counters, bedside tables, stairwells, etc.

POLAR DIAGRAM

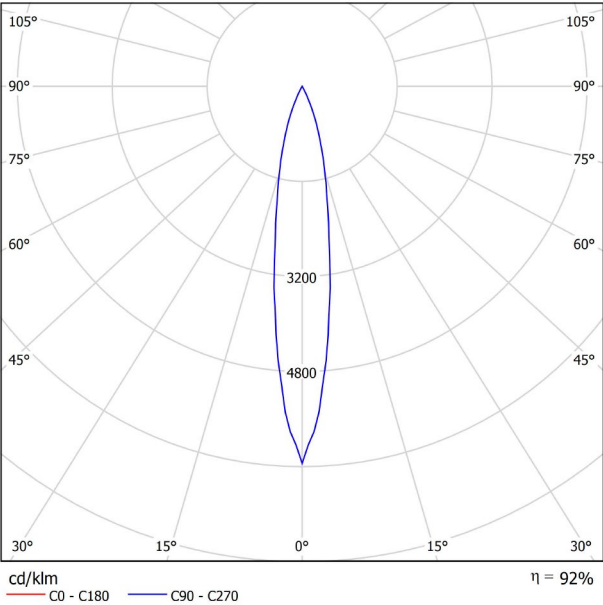



CONICAL DIAGRAM

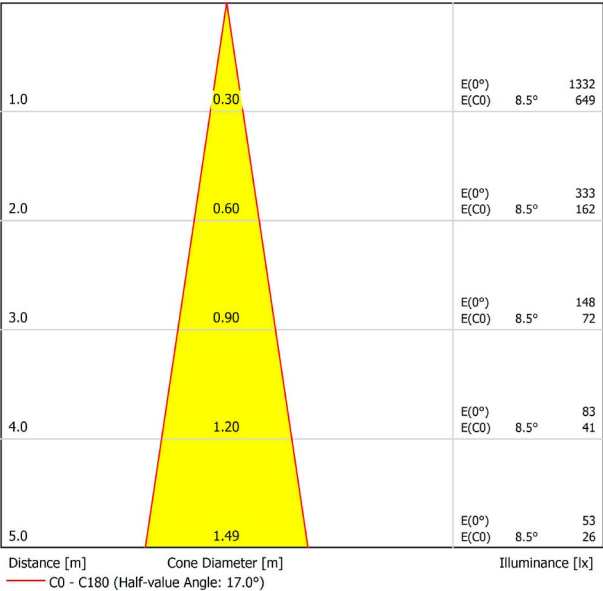




PRODUCT	
Model	Cord Accessory
Reference	02230000 WT NT
Colour	WT ☐ RAL 9016 NT ☒ RAL9005
Category	Accessories

DIMENSIONAL DRAWING

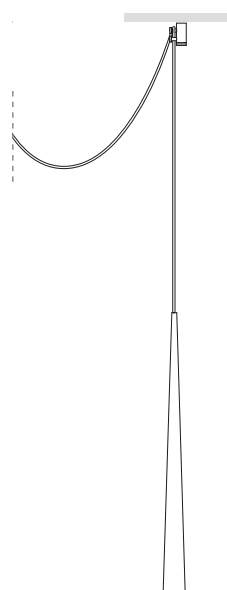



DIMENSIONS



ACCESSORIES



CORD ACCESSORY

PRODUCT

Name	HOLLY 3M 17° 3000K MG
Reference	A2811001MG
Color	Metallized gold
RAL	Paint of metallic nanoparticles
Category	SUSPENSION

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	210 Lm
Power	2,1 W
Power values of the system	2,80 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 3
Light beam angle	17°
Lighting efficiency	92%
Efficacy	100 Lm/W
Current intensity	700 mA
Dimming	Please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A++
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Recess measurements	Ø50 mm.
Cord length	3 m
Fast adjustment tensioner	No
Weight	321 g.
Packaged weight	450 g.
Packaging dimensions	385 x 103 x 78 mm
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene




Holly is a suspended luminaire for accent lighting applications. Its stylish and elegant geometry and its solid body of machined aluminium define a piece of a highly decorative character and perceived high quality. Its light beam, strictly defined by a micro-reflector, optimises the light beam of the LED, in order to obtain a relatively elevated illuminance at the working plane, thanks to a remarkable utilization of the lumen gross flow. To install the luminaire, Holly gets implemented by means of a recessed ceiling base, discrete and integrated. Its most frequent applications are counters, bedside tables, stairwells, etc.

POLAR DIAGRAM

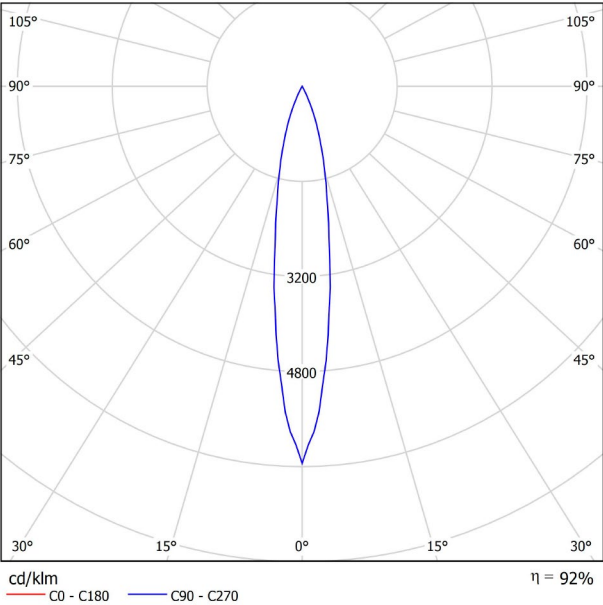



CONICAL DIAGRAM

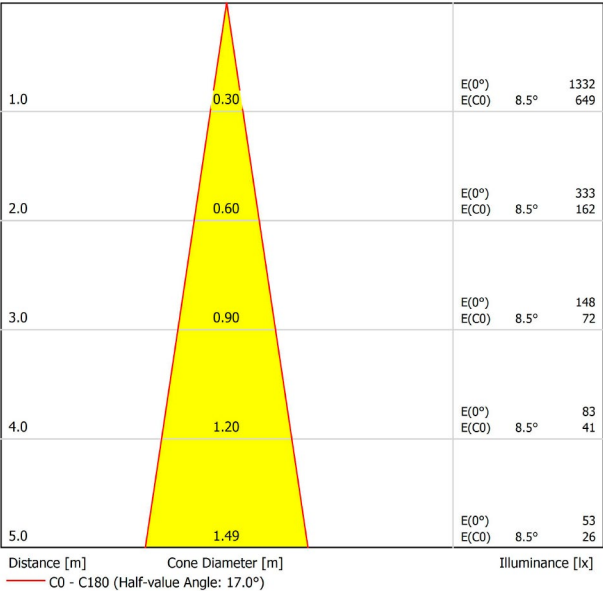




PRODUCT	
Model	Cord Accessory
Reference	02230000 WT NT
Colour	WT ☐ RAL 9016 NT ☒ RAL9005
Category	Accessories

DIMENSIONAL DRAWING

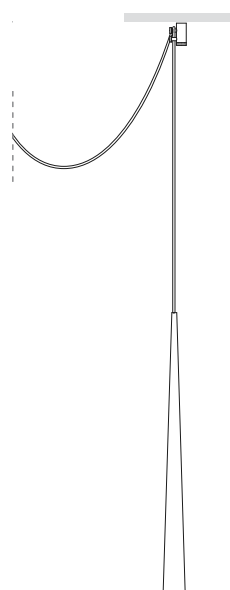



DIMENSIONS



ACCESSORIES



CORD ACCESSORY

PRODUCT

Name	HOLLY 3M 17° 3000K NT
Reference	A2811001NT
Color	Textured black
RAL	9005
Category	SUSPENSION

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	210 Lm
Power	2,1 W
Power values of the system	2,80 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 3
Light beam angle	17°
Lighting efficiency	92%
Efficacy	100 Lm/W
Current intensity	700 mA
Dimming	Please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A++
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Recess measurements	Ø50 mm.
Cord length	3 m
Fast adjustment tensioner	No
Weight	321 g.
Packaged weight	450 g.
Packaging dimensions	385 x 103 x 78 mm
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene




Holly is a suspended luminaire for accent lighting applications. Its stylish and elegant geometry and its solid body of machined aluminium define a piece of a highly decorative character and perceived high quality. Its light beam, strictly defined by a micro-reflector, optimises the light beam of the LED, in order to obtain a relatively elevated illuminance at the working plane, thanks to a remarkable utilization of the lumen gross flow. To install the luminaire, Holly gets implemented by means of a recessed ceiling base, discrete and integrated. Its most frequent applications are counters, bedside tables, stairwells, etc.

POLAR DIAGRAM

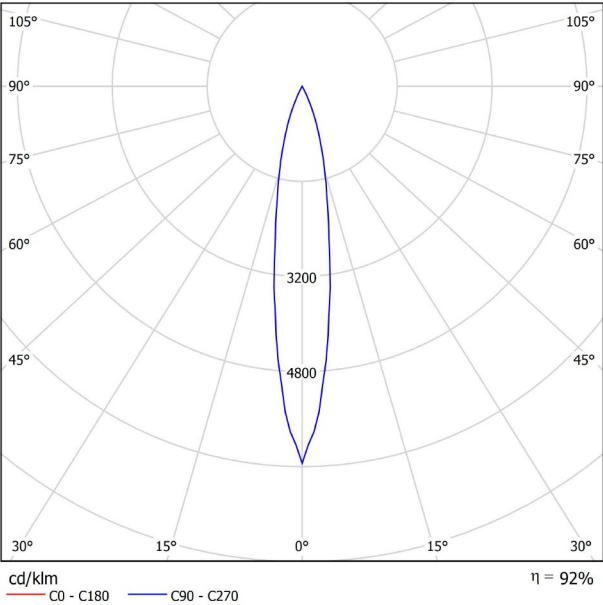



CONICAL DIAGRAM

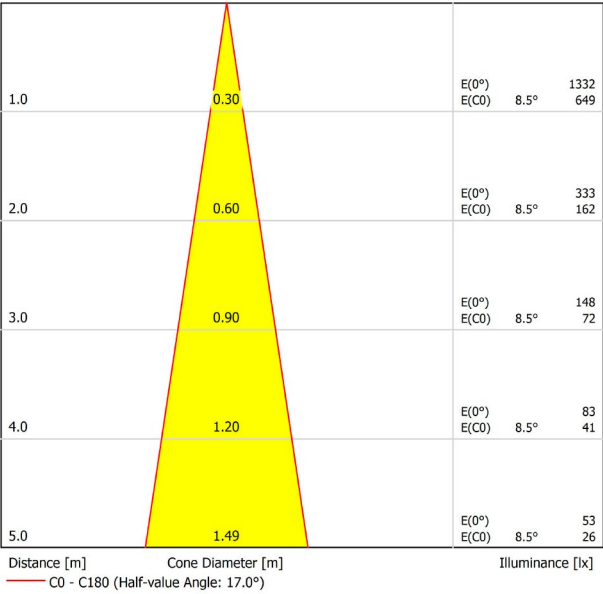




PRODUCT	
Model	Cord Accessory
Reference	02230000 WT NT
Colour	WT ☐ RAL 9016 NT ☒ RAL9005
Category	Accessories

DIMENSIONAL DRAWING

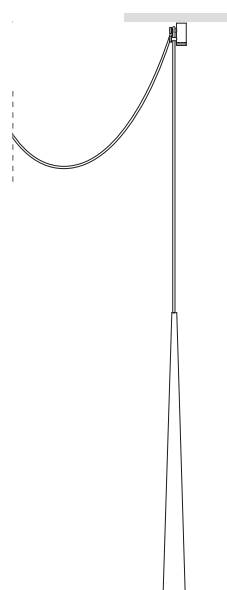



DIMENSIONS



ACCESSORIES



CORD ACCESSORY

PRODUCT

Name	HOLLY 3M 17° 3000K WT
Reference	A2811001WT
Color	Textured white
RAL	9016
Category	SUSPENSION

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	210 Lm
Power	2,1 W
Power values of the system	2,80 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 3
Light beam angle	17°
Lighting efficiency	92%
Efficacy	100 Lm/W
Current intensity	700 mA
Dimming	Please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A++
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Recess measurements	Ø50 mm.
Cord length	3 m
Fast adjustment tensioner	No
Weight	321 g.
Packaged weight	450 g.
Packaging dimensions	385 x 103 x 78 mm
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene




Holly is a suspended luminaire for accent lighting applications. Its stylish and elegant geometry and its solid body of machined aluminium define a piece of a highly decorative character and perceived high quality. Its light beam, strictly defined by a micro-reflector, optimises the light beam of the LED, in order to obtain a relatively elevated illuminance at the working plane, thanks to a remarkable utilization of the lumen gross flow. To install the luminaire, Holly gets implemented by means of a recessed ceiling base, discrete and integrated. Its most frequent applications are counters, bedside tables, stairwells, etc.

POLAR DIAGRAM

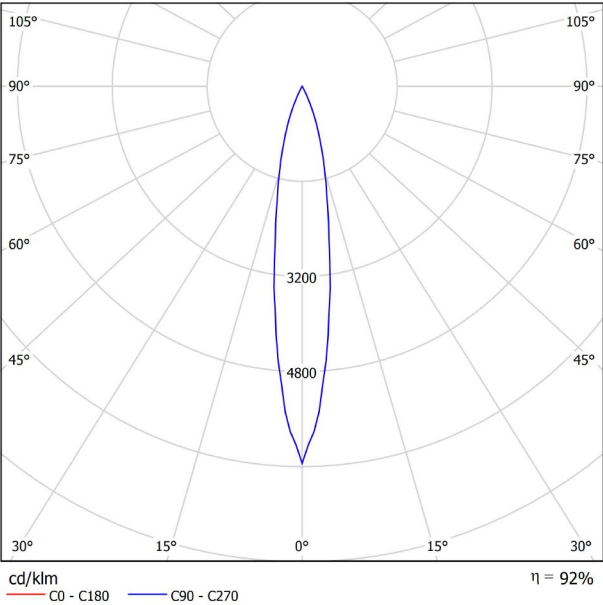



CONICAL DIAGRAM

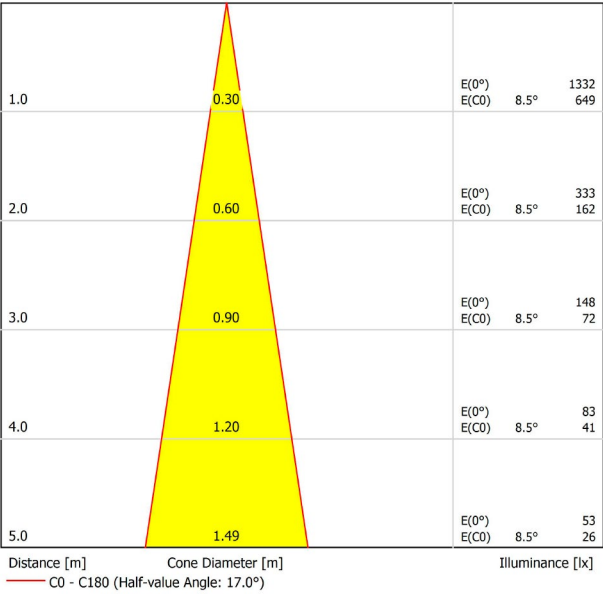




PRODUCT	
Model	Cord Accessory
Reference	02230000 WT NT
Colour	WT ☐ RAL 9016 NT ☒ RAL9005
Category	Accessories

DIMENSIONAL DRAWING

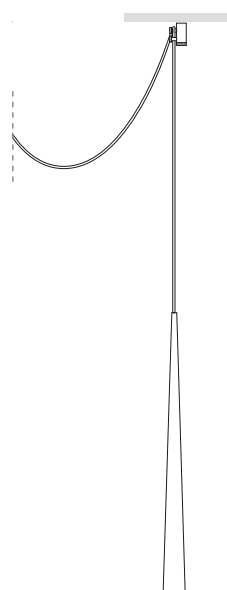



DIMENSIONS



ACCESSORIES



CORD ACCESSORY

PRODUCT

Name	HOLLY 3M 35° 2700K MC
Reference	A2811010MC
Color	Metallized copper
RAL	Paint of metallic nanoparticles
Category	SUSPENSION

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	190 Lm
Power	2,1 W
Power values of the system	2,80 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 3
Light beam angle	35°
Lighting efficiency	93%
Efficacy	90 Lm/W
Current intensity	700 mA
Dimming	Please consult
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A++
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Recess measurements	Ø50 mm.
Cord length	3 m
Fast adjustment tensioner	No
Weight	321 g.
Packaged weight	450 g.
Packaging dimensions	385 x 103 x 78 mm
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene




Holly is a suspended luminaire for accent lighting applications. Its stylish and elegant geometry and its solid body of machined aluminium define a piece of a highly decorative character and perceived high quality. Its light beam, strictly defined by a micro-reflector, optimises the light beam of the LED, in order to obtain a relatively elevated illuminance at the working plane, thanks to a remarkable utilization of the lumen gross flow. To install the luminaire, Holly gets implemented by means of a recessed ceiling base, discrete and integrated. Its most frequent applications are counters, bedside tables, stairwells, etc.

POLAR DIAGRAM

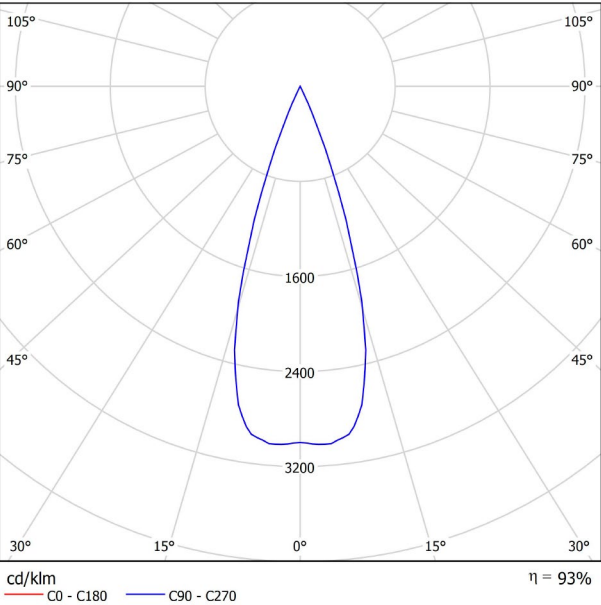

CONICAL DIAGRAM

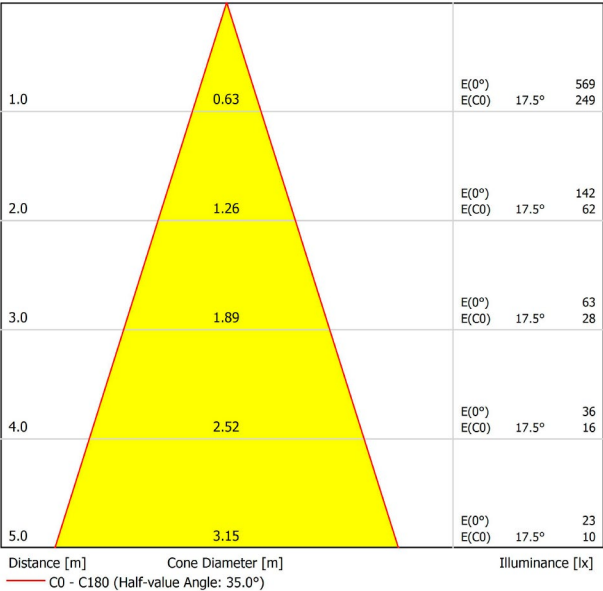



PRODUCT	
Model	Cord Accessory
Reference	02230000 WT NT
Colour	WT ☐ RAL 9016 NT ☒ RAL9005
Category	Accessories

DIMENSIONAL DRAWING

