




DIMENSIONS



AWARDS




PRODUCT	
Name	BLACK FOSTER TRI 1 SPOT 4000K N
Reference	A3181112N
Color	Matt black
RAL	9005
Category	CEILING RECESSED
LIGHTING INFORMATION	
Light source	LED
Gross luminous flux	250 Lm
Power	2,1 W
Power values of the system	3,23 W
Colour temperature	4000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 3
Light beam angle	19°
Lighting efficiency	90%
Efficacy	119 Lm/W
Current intensity	700 mA
Control through bluetooth	Please Consult
Driver	Included - Connected
Emergency power supply	Please Consult
Electrical insulation class	□
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A++
LED lifespan	L80B10 (Tc=85°C) >60.000h
OTHER DATA	
Ingress Protection	IP20
Recess measurements	50 × 50 mm.
Weight	115 g.
Packaged weight	170 g.
Packaging dimensions	193 × 108 × 53 mm
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene / Polycarbonate




Black Foster is the product that transfers the claimed effect "The Invisible Black" to a recessed-isolated lineal luminary; also available in trimless version. If we take a closer view to the recessed model, its bezel is so thin than when lighted up, it is unperceived; offering an aesthetic of "visual trimless". Black Foster stands out for its refinement, its visual comfort and for almost completely hide the source of light from the human eye range.

POLAR DIAGRAM

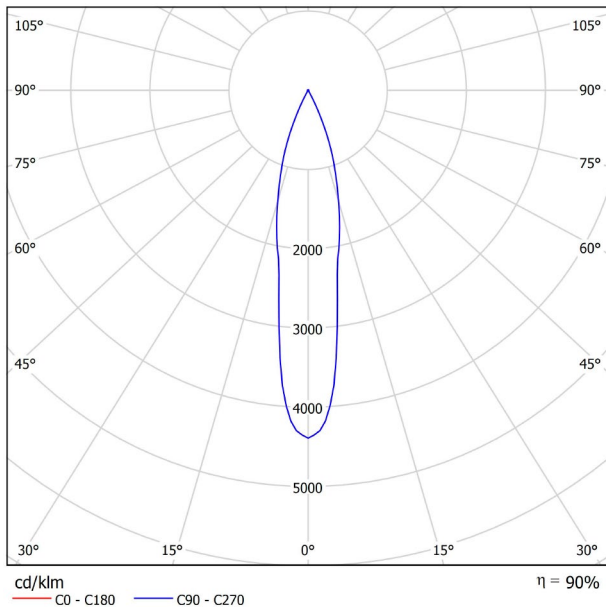

CONICAL DIAGRAM

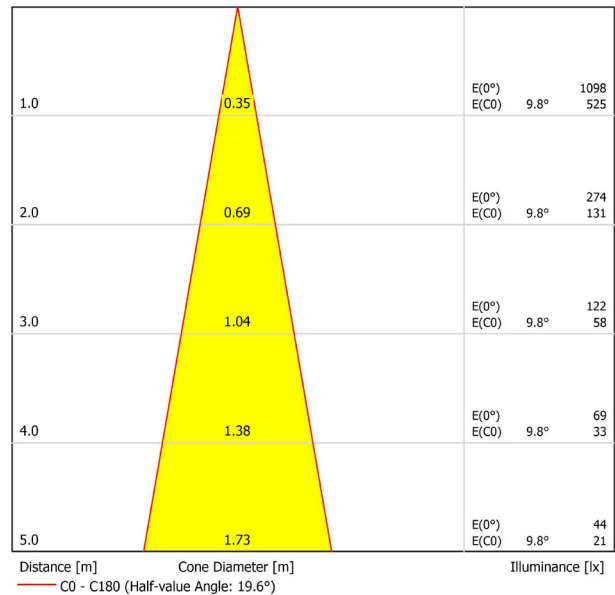


UGR

Glare Evaluation According to UGR												
ρ Ceiling		70	70	50	50	30	70	70	50	50	30	
ρ Walls		50	30	50	30	30	50	30	50	30	30	
ρ Floor		20	20	20	20	20	20	20	20	20	20	
Room Size X Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis					
2H	2H	-2.5	-1.9	-2.3	-1.7	-1.5	-2.5	-1.9	-2.3	-1.7	-1.5	
	3H	1.4	2.0	1.7	2.2	2.4	1.4	2.0	1.7	2.2	2.4	
	4H	3.8	4.4	4.1	4.6	4.9	3.8	4.4	4.1	4.6	4.9	
	6H	5.6	6.1	5.9	6.3	6.6	5.6	6.1	5.9	6.3	6.6	
	8H	6.8	7.3	7.1	7.6	7.8	6.8	7.3	7.1	7.6	7.8	
4H	12H	8.1	8.6	8.5	8.9	9.2	8.1	8.6	8.5	8.9	9.2	
	2H	-0.9	-0.3	-0.6	-0.1	0.2	-0.9	-0.3	-0.6	-0.1	0.2	
	3H	2.9	3.4	3.2	3.7	4.0	2.9	3.4	3.2	3.7	4.0	
	4H	5.3	5.7	5.7	6.1	6.4	5.3	5.7	5.7	6.1	6.4	
	6H	7.2	7.6	7.6	7.9	8.3	7.2	7.6	7.6	7.9	8.3	
8H	8H	8.6	8.9	9.0	9.2	9.6	8.6	8.9	9.0	9.2	9.6	
	12H	10.0	10.3	10.4	10.7	11.1	10.0	10.3	10.4	10.7	11.1	
	4H	6.0	6.3	6.5	6.7	7.1	6.0	6.3	6.5	6.7	7.1	
	6H	8.2	8.5	8.7	8.9	9.3	8.2	8.5	8.7	8.9	9.3	
	8H	9.8	10.0	10.3	10.5	10.9	9.8	10.0	10.3	10.5	10.9	
12H	12H	11.5	11.6	12.0	12.1	12.6	11.5	11.6	12.0	12.1	12.6	
	4H	6.3	6.5	6.7	6.9	7.3	6.3	6.5	6.7	6.9	7.3	
	6H	8.6	8.8	9.1	9.2	9.7	8.6	8.8	9.1	9.2	9.7	
	8H	10.3	10.5	10.8	10.9	11.4	10.3	10.5	10.8	10.9	11.4	
	Variation of the observer position for the luminaire distances S											
S = 1.0H		+0.1 / -0.2					+0.1 / -0.2					
S = 1.5H		+0.3 / -0.3					+0.3 / -0.3					
S = 2.0H		+0.6 / -0.5					+0.6 / -0.5					
Standard table		---					---					
Correction		---					---					
Summand		---					---					
Corrected Glare Indices referring to 250lm Total Luminous Flux												



DIMENSIONS



AWARDS



Name	BLACK FOSTER TRI 1 SPOT 4000K NMG
Reference	A3181112NMG
Color	Matt black-Metallized gold
RAL	Metallic finish
Category	CEILING RECESSED

PRODUCT

BLACK FOSTER TRI 1 SPOT 4000K NMG

A3181112NMG

Matt black-Metallized gold

Metallic finish

CEILING RECESSED

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	250 Lm
Power	2,1 W
Power values of the system	3,23 W
Colour temperature	4000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 3
Light beam angle	19°
Lighting efficiency	90%
Efficacy	119 Lm/W
Current intensity	700 mA
Control through bluetooth	Please Consult
Driver	Included - Connected
Emergency power supply	Please Consult
Electrical insulation class	□
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A++
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Recess measurements	50 × 50 mm.
Weight	115 g.
Packaged weight	170 g.
Packaging dimensions	193 × 108 × 53 mm
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene / Polycarbonate




Black Foster is the product that transfers the claimed effect "The Invisible Black" to a recessed-isolated lineal luminary; also available in trimless version. If we take a closer view to the recessed model, its bezel is so thin than when lighted up, it is unperceived; offering an aesthetic of "visual trimless". Black Foster stands out for its refinement, its visual comfort and for almost completely hide the source of light from the human eye range.

POLAR DIAGRAM

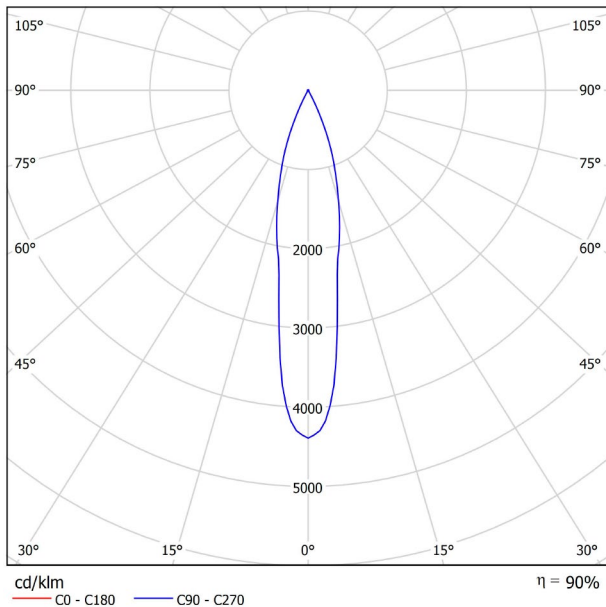

CONICAL DIAGRAM

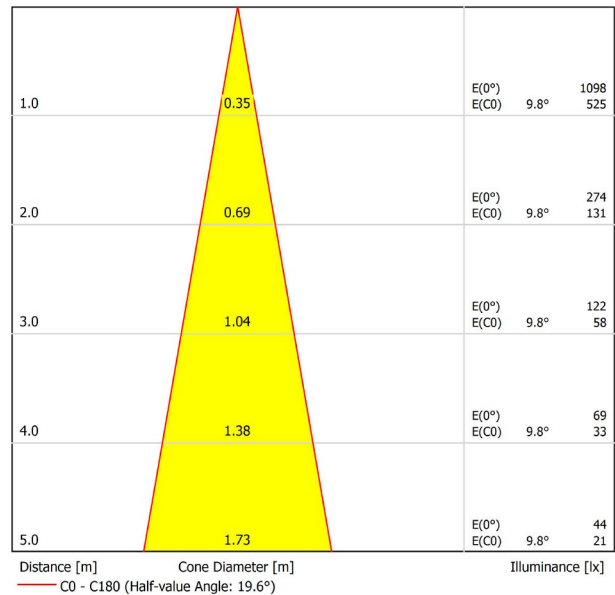


UGR

Glare Evaluation According to UGR												
ρ Ceiling		70	70	50	50	30	70	70	50	50	30	
ρ Walls		50	30	50	30	30	50	30	50	30	30	
ρ Floor		20	20	20	20	20	20	20	20	20	20	
Room Size X Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis					
2H	2H	-2.5	-1.9	-2.3	-1.7	-1.5	-2.5	-1.9	-2.3	-1.7	-1.5	
	3H	1.4	2.0	1.7	2.2	2.4	1.4	2.0	1.7	2.2	2.4	
	4H	3.8	4.4	4.1	4.6	4.9	3.8	4.4	4.1	4.6	4.9	
	6H	5.6	6.1	5.9	6.3	6.6	5.6	6.1	5.9	6.3	6.6	
	8H	6.8	7.3	7.1	7.6	7.8	6.8	7.3	7.1	7.6	7.8	
4H	12H	8.1	8.6	8.5	8.9	9.2	8.1	8.6	8.5	8.9	9.2	
	2H	-0.9	-0.3	-0.6	-0.1	0.2	-0.9	-0.3	-0.6	-0.1	0.2	
	3H	2.9	3.4	3.2	3.7	4.0	2.9	3.4	3.2	3.7	4.0	
	4H	5.3	5.7	5.7	6.1	6.4	5.3	5.7	5.7	6.1	6.4	
	6H	7.2	7.6	7.6	7.9	8.3	7.2	7.6	7.6	7.9	8.3	
8H	8H	8.6	8.9	9.0	9.2	9.6	8.6	8.9	9.0	9.2	9.6	
	12H	10.0	10.3	10.4	10.7	11.1	10.0	10.3	10.4	10.7	11.1	
	4H	6.0	6.3	6.5	6.7	7.1	6.0	6.3	6.5	6.7	7.1	
	6H	8.2	8.5	8.7	8.9	9.3	8.2	8.5	8.7	8.9	9.3	
	8H	9.8	10.0	10.3	10.5	10.9	9.8	10.0	10.3	10.5	10.9	
12H	12H	11.5	11.6	12.0	12.1	12.6	11.5	11.6	12.0	12.1	12.6	
	4H	6.3	6.5	6.7	6.9	7.3	6.3	6.5	6.7	6.9	7.3	
	6H	8.6	8.8	9.1	9.2	9.7	8.6	8.8	9.1	9.2	9.7	
	8H	10.3	10.5	10.8	10.9	11.4	10.3	10.5	10.8	10.9	11.4	
	Variation of the observer position for the luminaire distances S											
S = 1.0H		+0.1 / -0.2					+0.1 / -0.2					
S = 1.5H		+0.3 / -0.3					+0.3 / -0.3					
S = 2.0H		+0.6 / -0.5					+0.6 / -0.5					
Standard table		---					---					
Correction		---					---					
Summand		---					---					
Corrected Glare Indices referring to 250lm Total Luminous Flux												



DIMENSIONS



AWARDS



Name	BLACK FOSTER TRI 1 SPOT DIM DALI 2700K N
Reference	A3181140N
Color	Matt black
RAL	9005
Category	CEILING RECESSED

PRODUCT

BLACK FOSTER TRI 1 SPOT DIM DALI 2700K N

A3181140N

Matt black

9005

CEILING RECESSED

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	190 Lm
Power	2,1 W
Power values of the system	2,56 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 3
Light beam angle	19°
Lighting efficiency	90%
Efficacy	90 Lm/W
Current intensity	700 mA
Dimming	DALI
Control through bluetooth	Please Consult
Driver	Included - Connected
Emergency power supply	Please Consult
Electrical insulation class	□
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A++
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Recess measurements	50 × 50 mm.
Weight	190 g.
Packaged weight	245 g.
Packaging dimensions	193 × 108 × 53 mm
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene / Polycarbonate




Black Foster is the product that transfers the claimed effect "The Invisible Black" to a recessed-isolated lineal luminary; also available in trimless version. If we take a closer view to the recessed model, its bezel is so thin than when lighted up, it is unperceived; offering an aesthetic of "visual trimless". Black Foster stands out for its refinement, its visual comfort and for almost completely hide the source of light from the human eye range.

POLAR DIAGRAM

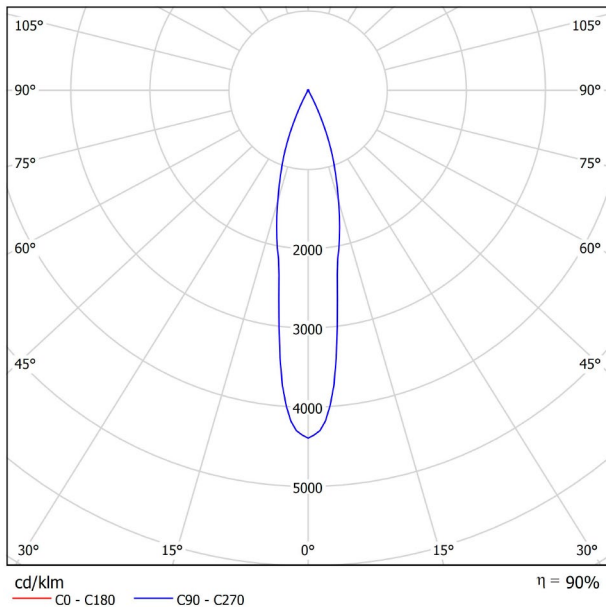

CONICAL DIAGRAM

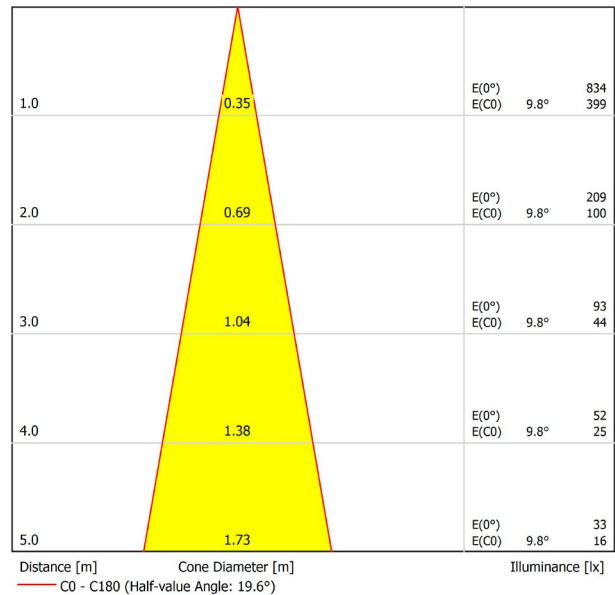


UGR

Glare Evaluation According to UGR												
ρ Ceiling		70	70	50	50	30	70	70	50	50	30	
ρ Walls		50	30	50	30	30	50	30	50	30	30	
ρ Floor		20	20	20	20	20	20	20	20	20	20	
Room Size X Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis					
2H	2H	-3.5	-2.8	-3.2	-2.6	-2.4	-3.5	-2.8	-3.2	-2.6	-2.4	
	3H	0.4	1.0	0.7	1.3	1.5	0.4	1.0	0.7	1.3	1.5	
	4H	2.9	3.4	3.2	3.7	3.9	2.9	3.4	3.2	3.7	3.9	
	6H	4.6	5.1	4.9	5.4	5.7	4.6	5.1	4.9	5.4	5.7	
	8H	5.8	6.3	6.2	6.6	6.9	5.8	6.3	6.2	6.6	6.9	
	12H	7.2	7.6	7.5	7.9	8.2	7.2	7.6	7.5	7.9	8.2	
4H	2H	-1.8	-1.3	-1.5	-1.0	-0.8	-1.8	-1.3	-1.5	-1.0	-0.8	
	3H	1.9	2.4	2.3	2.7	3.0	1.9	2.4	2.3	2.7	3.0	
	4H	4.4	4.8	4.7	5.1	5.4	4.4	4.8	4.7	5.1	5.4	
	6H	6.3	6.6	6.7	7.0	7.3	6.3	6.6	6.7	7.0	7.3	
	8H	7.6	7.9	8.0	8.3	8.7	7.6	7.9	8.0	8.3	8.7	
	12H	9.1	9.3	9.5	9.7	10.1	9.1	9.3	9.5	9.7	10.1	
8H	4H	5.1	5.4	5.5	5.8	6.2	5.1	5.4	5.5	5.8	6.2	
	6H	7.3	7.5	7.7	7.9	8.4	7.3	7.5	7.7	7.9	8.4	
	8H	8.9	9.1	9.3	9.5	10.0	8.9	9.1	9.3	9.5	10.0	
	12H	10.5	10.7	11.0	11.1	11.6	10.5	10.7	11.0	11.1	11.6	
12H	4H	5.3	5.5	5.7	5.9	6.4	5.3	5.5	5.7	5.9	6.4	
	6H	7.7	7.8	8.1	8.3	8.7	7.7	7.8	8.1	8.3	8.7	
	8H	9.4	9.5	9.9	10.0	10.5	9.4	9.5	9.9	10.0	10.5	
Variation of the observer position for the luminaire distances S												
S = 1.0H		+0.1 / -0.2					+0.1 / -0.2					
S = 1.5H		+0.3 / -0.3					+0.3 / -0.3					
S = 2.0H		+0.6 / -0.5					+0.6 / -0.5					
Standard table		---					---					
Correction		---					---					
Summand		---					---					
Corrected Glare Indices referring to 190lm Total Luminous Flux												



DIMENSIONS



AWARDS



Name	BLACK FOSTER TRI 1 SPOT DIM DALI 2700K NMG
Reference	A3181140NMG
Color	Matt black-Metallized gold
RAL	Metallic finish
Category	CEILING RECESSED

PRODUCT

BLACK FOSTER TRI 1 SPOT DIM DALI 2700K NMG

A3181140NMG

Matt black-Metallized gold

Metallic finish

CEILING RECESSED

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	190 Lm
Power	2,1 W
Power values of the system	3,23 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 3
Light beam angle	19°
Lighting efficiency	90%
Efficacy	90 Lm/W
Current intensity	700 mA
Dimming	DALI
Control through bluetooth	Please Consult
Driver	Included - Connected
Emergency power supply	Please Consult
Electrical insulation class	□
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A++
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Recess measurements	50 × 50 mm.
Weight	190 g.
Packaged weight	245 g.
Packaging dimensions	193 × 108 × 53 mm
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene / Polycarbonate




Black Foster is the product that transfers the claimed effect "The Invisible Black" to a recessed-isolated lineal luminary; also available in trimless version. If we take a closer view to the recessed model, its bezel is so thin than when lighted up, it is unperceived; offering an aesthetic of "visual trimless". Black Foster stands out for its refinement, its visual comfort and for almost completely hide the source of light from the human eye range.

POLAR DIAGRAM

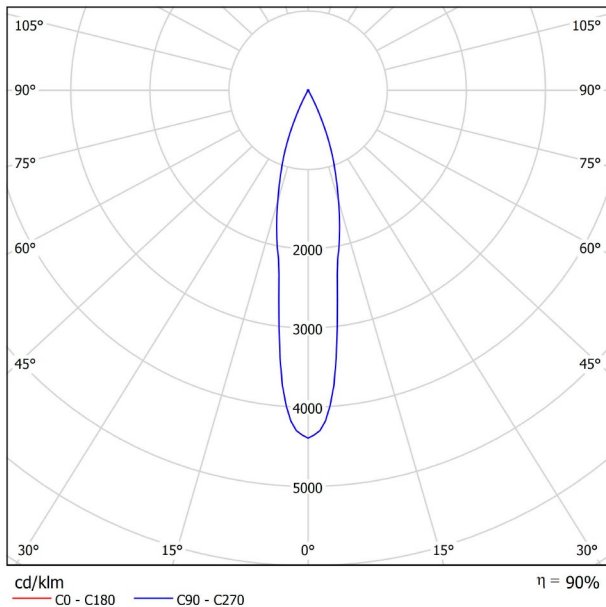

CONICAL DIAGRAM

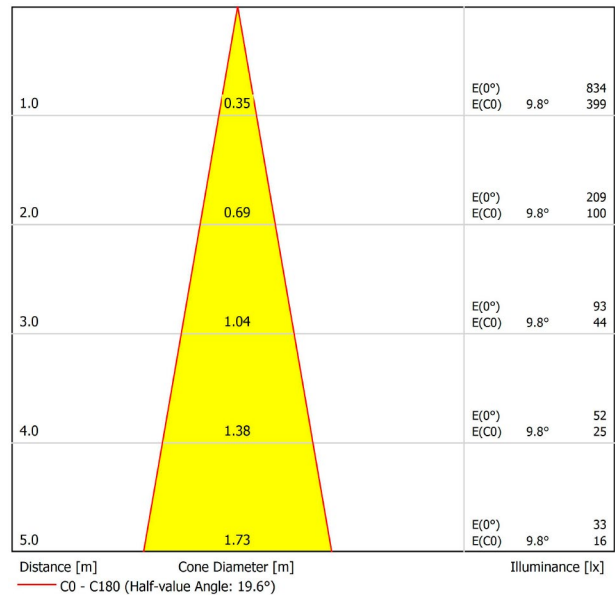


UGR

Glare Evaluation According to UGR												
ρ Ceiling		70	70	50	50	30	70	70	50	50	30	
ρ Walls		50	30	50	30	30	50	30	50	30	30	
ρ Floor		20	20	20	20	20	20	20	20	20	20	
Room Size X Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis					
2H	2H	-3.5	-2.8	-3.2	-2.6	-2.4	-3.5	-2.8	-3.2	-2.6	-2.4	
	3H	0.4	1.0	0.7	1.3	1.5	0.4	1.0	0.7	1.3	1.5	
	4H	2.9	3.4	3.2	3.7	3.9	2.9	3.4	3.2	3.7	3.9	
	6H	4.6	5.1	4.9	5.4	5.7	4.6	5.1	4.9	5.4	5.7	
	8H	5.8	6.3	6.2	6.6	6.9	5.8	6.3	6.2	6.6	6.9	
	12H	7.2	7.6	7.5	7.9	8.2	7.2	7.6	7.5	7.9	8.2	
4H	2H	-1.8	-1.3	-1.5	-1.0	-0.8	-1.8	-1.3	-1.5	-1.0	-0.8	
	3H	1.9	2.4	2.3	2.7	3.0	1.9	2.4	2.3	2.7	3.0	
	4H	4.4	4.8	4.7	5.1	5.4	4.4	4.8	4.7	5.1	5.4	
	6H	6.3	6.6	6.7	7.0	7.3	6.3	6.6	6.7	7.0	7.3	
	8H	7.6	7.9	8.0	8.3	8.7	7.6	7.9	8.0	8.3	8.7	
	12H	9.1	9.3	9.5	9.7	10.1	9.1	9.3	9.5	9.7	10.1	
8H	4H	5.1	5.4	5.5	5.8	6.2	5.1	5.4	5.5	5.8	6.2	
	6H	7.3	7.5	7.7	7.9	8.4	7.3	7.5	7.7	7.9	8.4	
	8H	8.9	9.1	9.3	9.5	10.0	8.9	9.1	9.3	9.5	10.0	
	12H	10.5	10.7	11.0	11.1	11.6	10.5	10.7	11.0	11.1	11.6	
12H	4H	5.3	5.5	5.7	5.9	6.4	5.3	5.5	5.7	5.9	6.4	
	6H	7.7	7.8	8.1	8.3	8.7	7.7	7.8	8.1	8.3	8.7	
	8H	9.4	9.5	9.9	10.0	10.5	9.4	9.5	9.9	10.0	10.5	
Variation of the observer position for the luminaire distances S												
S = 1.0H		+0.1 / -0.2					+0.1 / -0.2					
S = 1.5H		+0.3 / -0.3					+0.3 / -0.3					
S = 2.0H		+0.6 / -0.5					+0.6 / -0.5					
Standard table		---					---					
Correction		---					---					
Summand		---					---					
Corrected Glare Indices referring to 190lm Total Luminous Flux												



DIMENSIONS



AWARDS



Name	BLACK FOSTER TRI 1 SPOT DIM DALI 3000K N
Reference	A3181141N
Color	Matt black
RAL	9005
Category	CEILING RECESSED

PRODUCT

Light source	LED
Gross luminous flux	210 Lm
Power	2,1 W
Power values of the system	2,56 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 3
Light beam angle	19°
Lighting efficiency	90%
Efficacy	100 Lm/W
Current intensity	700 mA
Dimming	DALI
Control through bluetooth	Please Consult
Driver	Included - Connected
Emergency power supply	Please Consult
Electrical insulation class	□
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A++
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


Ingress Protection	IP20
Recess measurements	50 × 50 mm.
Weight	190 g.
Packaged weight	245 g.
Packaging dimensions	193 × 108 × 53 mm
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene / Polycarbonate

OTHER DATA




Black Foster is the product that transfers the claimed effect "The Invisible Black" to a recessed-isolated lineal luminary; also available in trimless version. If we take a closer view to the recessed model, its bezel is so thin than when lighted up, it is unperceived; offering an aesthetic of "visual trimless". Black Foster stands out for its refinement, its visual comfort and for almost completely hide the source of light from the human eye range.

POLAR DIAGRAM

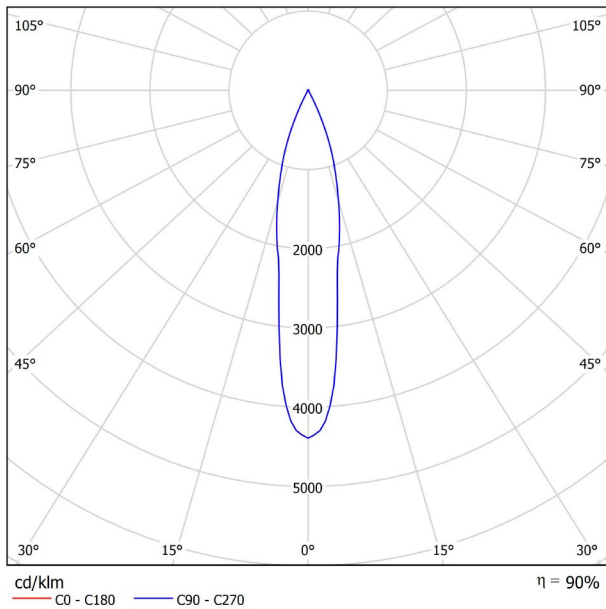

CONICAL DIAGRAM

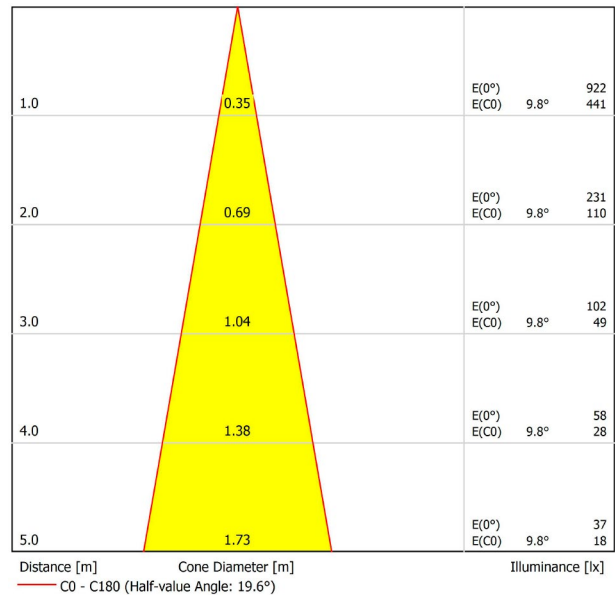


UGR

Glare Evaluation According to UGR												
ρ Ceiling		70	70	50	50	30	70	70	50	50	30	
ρ Walls		50	30	50	30	30	50	30	50	30	30	
ρ Floor		20	20	20	20	20	20	20	20	20	20	
Room Size X Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis					
2H	2H	-3.1	-2.5	-2.9	-2.3	-2.1	-3.1	-2.5	-2.9	-2.3	-2.1	
	3H	0.8	1.4	1.1	1.6	1.8	0.8	1.4	1.1	1.6	1.8	
	4H	3.2	3.8	3.5	4.0	4.3	3.2	3.8	3.5	4.0	4.3	
	6H	5.0	5.5	5.3	5.7	6.0	5.0	5.5	5.3	5.7	6.0	
	8H	6.2	6.7	6.5	6.9	7.2	6.2	6.7	6.5	6.9	7.2	
4H	12H	7.5	8.0	7.9	8.3	8.6	7.5	8.0	7.9	8.3	8.6	
	2H	-1.5	-0.9	-1.2	-0.7	-0.4	-1.5	-0.9	-1.2	-0.7	-0.4	
	3H	2.3	2.7	2.6	3.0	3.4	2.3	2.7	2.6	3.0	3.4	
	4H	4.7	5.1	5.1	5.4	5.8	4.7	5.1	5.1	5.4	5.8	
	6H	6.6	6.9	7.0	7.3	7.7	6.6	6.9	7.0	7.3	7.7	
8H	8H	8.0	8.2	8.4	8.6	9.0	8.0	8.2	8.4	8.6	9.0	
	12H	9.4	9.7	9.8	10.0	10.5	9.4	9.7	9.8	10.0	10.5	
	4H	5.4	5.7	5.9	6.1	6.5	5.4	5.7	5.9	6.1	6.5	
	6H	7.6	7.9	8.1	8.3	8.7	7.6	7.9	8.1	8.3	8.7	
	8H	9.2	9.4	9.7	9.8	10.3	9.2	9.4	9.7	9.8	10.3	
12H	12H	10.9	11.0	11.4	11.5	12.0	10.9	11.0	11.4	11.5	12.0	
	4H	5.6	5.9	6.1	6.3	6.7	5.6	5.9	6.1	6.3	6.7	
	6H	8.0	8.2	8.5	8.6	9.1	8.0	8.2	8.5	8.6	9.1	
	8H	9.7	9.9	10.2	10.3	10.8	9.7	9.9	10.2	10.3	10.8	
Variation of the observer position for the luminaire distances S												
S = 1.0H		+0.1 / -0.2					+0.1 / -0.2					
S = 1.5H		+0.3 / -0.3					+0.3 / -0.3					
S = 2.0H		+0.6 / -0.5					+0.6 / -0.5					
Standard table		---					---					
Correction		---					---					
Summand												
Corrected Glare Indices referring to 210lm Total Luminous Flux												



DIMENSIONS



AWARDS



Name	BLACK FOSTER TRI 1 SPOT DIM DALI 3000K NMG
Reference	A3181141NMG
Color	Matt black-Metallized gold
RAL	Metallic finish
Category	CEILING RECESSED

PRODUCT

BLACK FOSTER TRI 1 SPOT DIM DALI 3000K NMG

A3181141NMG

Matt black-Metallized gold

Metallic finish

CEILING RECESSED

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	210 Lm
Power	2,1 W
Power values of the system	3,23 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 3
Light beam angle	19°
Lighting efficiency	90%
Efficacy	100 Lm/W
Current intensity	700 mA
Dimming	DALI
Control through bluetooth	Please Consult
Driver	Included - Connected
Emergency power supply	Please Consult
Electrical insulation class	□
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A++
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Recess measurements	50 × 50 mm.
Weight	190 g.
Packaged weight	245 g.
Packaging dimensions	193 × 108 × 53 mm
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene / Polycarbonate




Black Foster is the product that transfers the claimed effect "The Invisible Black" to a recessed-isolated lineal luminary; also available in trimless version. If we take a closer view to the recessed model, its bezel is so thin than when lighted up, it is unperceived; offering an aesthetic of "visual trimless". Black Foster stands out for its refinement, its visual comfort and for almost completely hide the source of light from the human eye range.

POLAR DIAGRAM

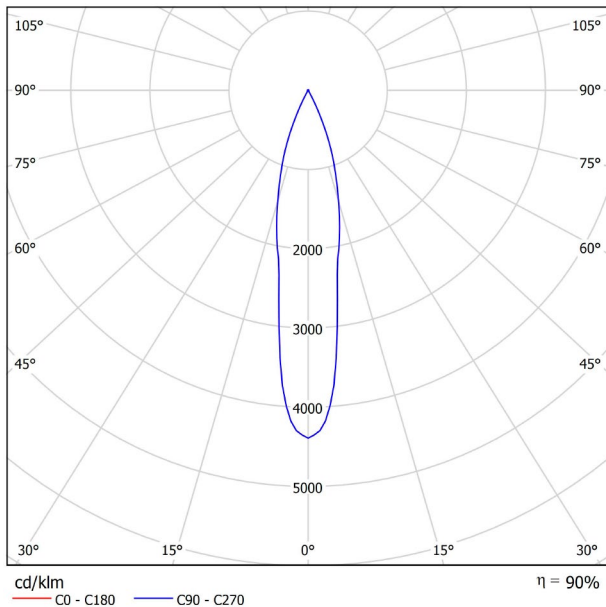

CONICAL DIAGRAM

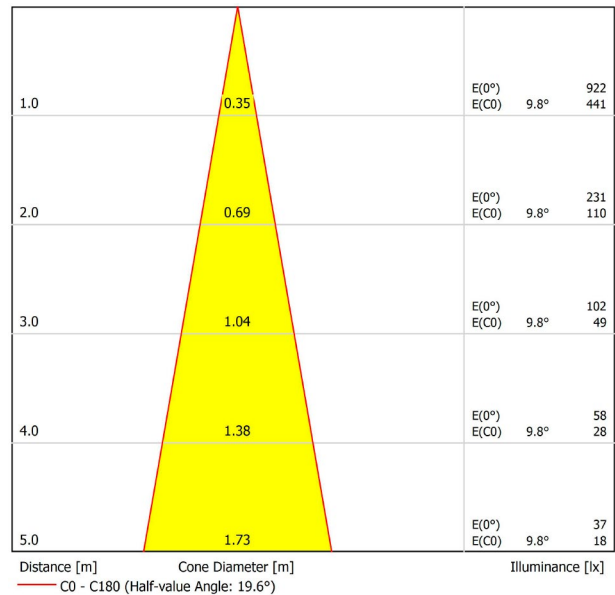


UGR

Glare Evaluation According to UGR												
ρ Ceiling		70	70	50	50	30	70	70	50	50	30	
ρ Walls		50	30	50	30	30	50	30	50	30	30	
ρ Floor		20	20	20	20	20	20	20	20	20	20	
Room Size X Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis					
2H	2H	-3.1	-2.5	-2.9	-2.3	-2.1	-3.1	-2.5	-2.9	-2.3	-2.1	
	3H	0.8	1.4	1.1	1.6	1.8	0.8	1.4	1.1	1.6	1.8	
	4H	3.2	3.8	3.5	4.0	4.3	3.2	3.8	3.5	4.0	4.3	
	6H	5.0	5.5	5.3	5.7	6.0	5.0	5.5	5.3	5.7	6.0	
	8H	6.2	6.7	6.5	6.9	7.2	6.2	6.7	6.5	6.9	7.2	
4H	12H	7.5	8.0	7.9	8.3	8.6	7.5	8.0	7.9	8.3	8.6	
	2H	-1.5	-0.9	-1.2	-0.7	-0.4	-1.5	-0.9	-1.2	-0.7	-0.4	
	3H	2.3	2.7	2.6	3.0	3.4	2.3	2.7	2.6	3.0	3.4	
	4H	4.7	5.1	5.1	5.4	5.8	4.7	5.1	5.1	5.4	5.8	
	6H	6.6	6.9	7.0	7.3	7.7	6.6	6.9	7.0	7.3	7.7	
8H	8H	8.0	8.2	8.4	8.6	9.0	8.0	8.2	8.4	8.6	9.0	
	12H	9.4	9.7	9.8	10.0	10.5	9.4	9.7	9.8	10.0	10.5	
	4H	5.4	5.7	5.9	6.1	6.5	5.4	5.7	5.9	6.1	6.5	
	6H	7.6	7.9	8.1	8.3	8.7	7.6	7.9	8.1	8.3	8.7	
	8H	9.2	9.4	9.7	9.8	10.3	9.2	9.4	9.7	9.8	10.3	
12H	12H	10.9	11.0	11.4	11.5	12.0	10.9	11.0	11.4	11.5	12.0	
	4H	5.6	5.9	6.1	6.3	6.7	5.6	5.9	6.1	6.3	6.7	
	6H	8.0	8.2	8.5	8.6	9.1	8.0	8.2	8.5	8.6	9.1	
	8H	9.7	9.9	10.2	10.3	10.8	9.7	9.9	10.2	10.3	10.8	
	Variation of the observer position for the luminaire distances S											
S = 1.0H		+0.1 / -0.2					+0.1 / -0.2					
S = 1.5H		+0.3 / -0.3					+0.3 / -0.3					
S = 2.0H		+0.6 / -0.5					+0.6 / -0.5					
Standard table		---					---					
Correction		---					---					
Summand		---					---					
Corrected Glare Indices referring to 210lm Total Luminous Flux												



DIMENSIONS



AWARDS



Name	BLACK FOSTER TRI 1 SPOT DIM DALI 4000K N
Reference	A3181142N
Color	Matt black
RAL	9005
Category	CEILING RECESSED

PRODUCT

BLACK FOSTER TRI 1 SPOT DIM DALI 4000K N

A3181142N

Matt black

9005

CEILING RECESSED

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	250 Lm
Power	2,1 W
Power values of the system	2,56 W
Colour temperature	4000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 3
Light beam angle	19°
Lighting efficiency	90%
Efficacy	119 Lm/W
Current intensity	700 mA
Dimming	DALI
Control through bluetooth	Please Consult
Driver	Included - Connected
Emergency power supply	Please Consult
Electrical insulation class	□
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A++
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Recess measurements	50 × 50 mm.
Weight	190 g.
Packaged weight	245 g.
Packaging dimensions	193 × 108 × 53 mm
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene / Polycarbonate




Black Foster is the product that transfers the claimed effect "The Invisible Black" to a recessed-isolated lineal luminary; also available in trimless version. If we take a closer view to the recessed model, its bezel is so thin than when lighted up, it is unperceived; offering an aesthetic of "visual trimless". Black Foster stands out for its refinement, its visual comfort and for almost completely hide the source of light from the human eye range.

POLAR DIAGRAM

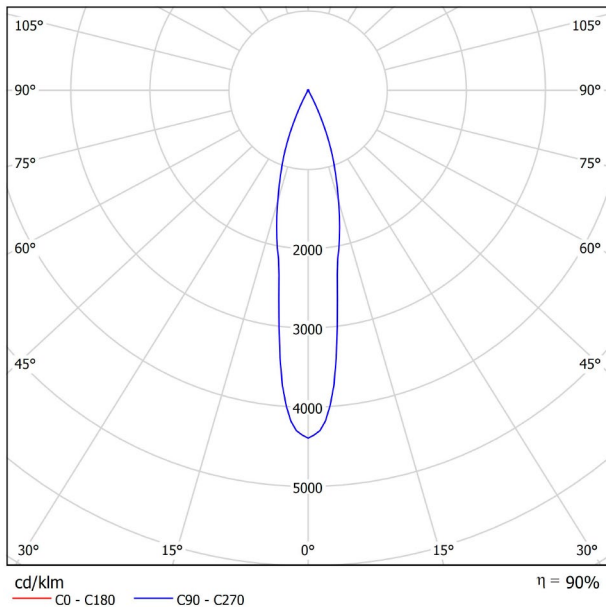

CONICAL DIAGRAM

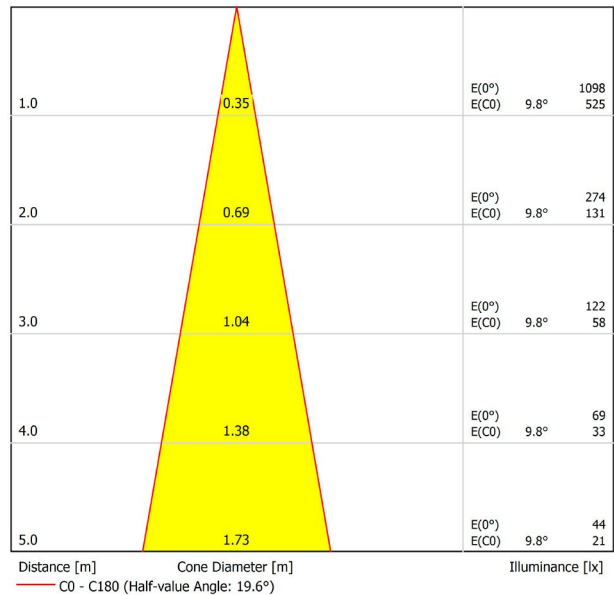


UGR

Glare Evaluation According to UGR												
ρ Ceiling		70	70	50	50	30	70	70	50	50	30	
ρ Walls		50	30	50	30	30	50	30	50	30	30	
ρ Floor		20	20	20	20	20	20	20	20	20	20	
Room Size X Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis					
2H	2H	-2.5	-1.9	-2.3	-1.7	-1.5	-2.5	-1.9	-2.3	-1.7	-1.5	
	3H	1.4	2.0	1.7	2.2	2.4	1.4	2.0	1.7	2.2	2.4	
	4H	3.8	4.4	4.1	4.6	4.9	3.8	4.4	4.1	4.6	4.9	
	6H	5.6	6.1	5.9	6.3	6.6	5.6	6.1	5.9	6.3	6.6	
	8H	6.8	7.3	7.1	7.6	7.8	6.8	7.3	7.1	7.6	7.8	
4H	12H	8.1	8.6	8.5	8.9	9.2	8.1	8.6	8.5	8.9	9.2	
	2H	-0.9	-0.3	-0.6	-0.1	0.2	-0.9	-0.3	-0.6	-0.1	0.2	
	3H	2.9	3.4	3.2	3.7	4.0	2.9	3.4	3.2	3.7	4.0	
	4H	5.3	5.7	5.7	6.1	6.4	5.3	5.7	5.7	6.1	6.4	
	6H	7.2	7.6	7.6	7.9	8.3	7.2	7.6	7.6	7.9	8.3	
8H	8H	8.6	8.9	9.0	9.2	9.6	8.6	8.9	9.0	9.2	9.6	
	12H	10.0	10.3	10.4	10.7	11.1	10.0	10.3	10.4	10.7	11.1	
	4H	6.0	6.3	6.5	6.7	7.1	6.0	6.3	6.5	6.7	7.1	
	6H	8.2	8.5	8.7	8.9	9.3	8.2	8.5	8.7	8.9	9.3	
	8H	9.8	10.0	10.3	10.5	10.9	9.8	10.0	10.3	10.5	10.9	
12H	12H	11.5	11.6	12.0	12.1	12.6	11.5	11.6	12.0	12.1	12.6	
	4H	6.3	6.5	6.7	6.9	7.3	6.3	6.5	6.7	6.9	7.3	
	6H	8.6	8.8	9.1	9.2	9.7	8.6	8.8	9.1	9.2	9.7	
	8H	10.3	10.5	10.8	10.9	11.4	10.3	10.5	10.8	10.9	11.4	
	Variation of the observer position for the luminaire distances S											
S = 1.0H		+0.1 / -0.2					+0.1 / -0.2					
S = 1.5H		+0.3 / -0.3					+0.3 / -0.3					
S = 2.0H		+0.6 / -0.5					+0.6 / -0.5					
Standard table		---					---					
Correction		---					---					
Summand												
Corrected Glare Indices referring to 250lm Total Luminous Flux												



DIMENSIONS



AWARDS



Name	BLACK FOSTER TRI 1 SPOT DIM DALI 4000K NMG
Reference	A3181142NMG
Color	Matt black-Metallized gold
RAL	Metalllic finish
Category	CEILING RECESSED

PRODUCT

BLACK FOSTER TRI 1 SPOT DIM DALI 4000K NMG

A3181142NMG

Matt black-Metallized gold

Metalllic finish

CEILING RECESSED

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	250 Lm
Power	2,1 W
Power values of the system	3,23 W
Colour temperature	4000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 3
Light beam angle	19°
Lighting efficiency	90%
Efficacy	119 Lm/W
Current intensity	700 mA
Dimming	DALI
Control through bluetooth	Please Consult
Driver	Included - Connected
Emergency power supply	Please Consult
Electrical insulation class	□
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A++
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Recess measurements	50 × 50 mm.
Weight	190 g.
Packaged weight	245 g.
Packaging dimensions	193 × 108 × 53 mm
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene / Polycarbonate




Black Foster is the product that transfers the claimed effect "The Invisible Black" to a recessed-isolated lineal luminary; also available in trimless version. If we take a closer view to the recessed model, its bezel is so thin than when lighted up, it is unperceived; offering an aesthetic of "visual trimless". Black Foster stands out for its refinement, its visual comfort and for almost completely hide the source of light from the human eye range.

POLAR DIAGRAM

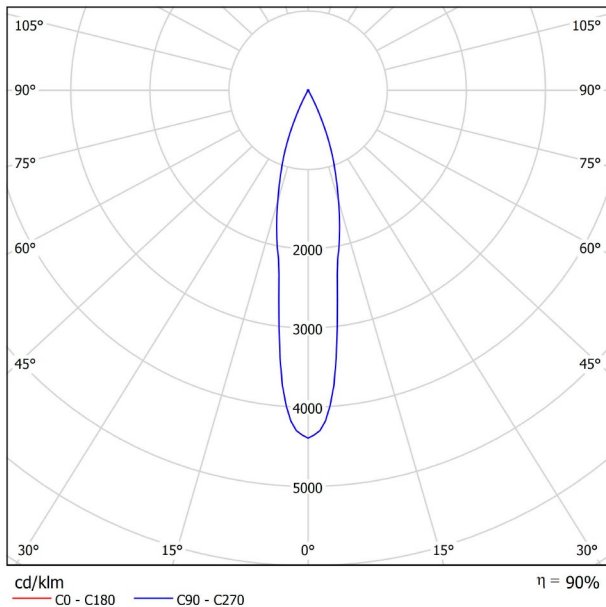

CONICAL DIAGRAM

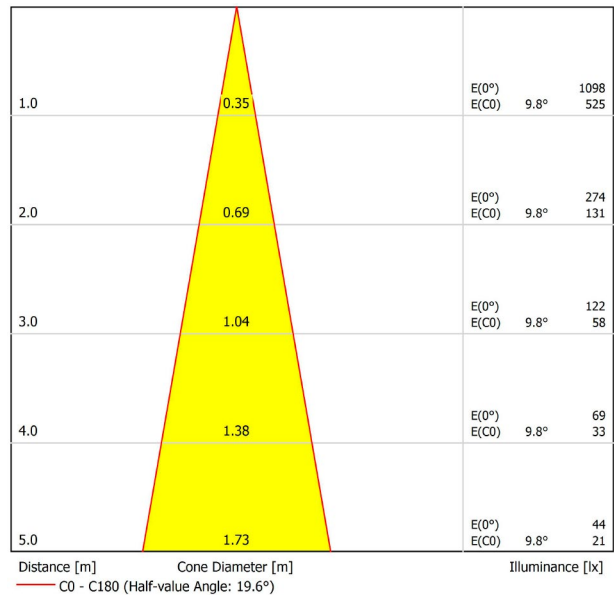


UGR

Glare Evaluation According to UGR												
ρ Ceiling		70	70	50	50	30	70	70	50	50	30	
ρ Walls		50	30	50	30	30	50	30	50	30	30	
ρ Floor		20	20	20	20	20	20	20	20	20	20	
Room Size X Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis					
2H	2H	-2.5	-1.9	-2.3	-1.7	-1.5	-2.5	-1.9	-2.3	-1.7	-1.5	
	3H	1.4	2.0	1.7	2.2	2.4	1.4	2.0	1.7	2.2	2.4	
	4H	3.8	4.4	4.1	4.6	4.9	3.8	4.4	4.1	4.6	4.9	
	6H	5.6	6.1	5.9	6.3	6.6	5.6	6.1	5.9	6.3	6.6	
	8H	6.8	7.3	7.1	7.6	7.8	6.8	7.3	7.1	7.6	7.8	
4H	12H	8.1	8.6	8.5	8.9	9.2	8.1	8.6	8.5	8.9	9.2	
	2H	-0.9	-0.3	-0.6	-0.1	0.2	-0.9	-0.3	-0.6	-0.1	0.2	
	3H	2.9	3.4	3.2	3.7	4.0	2.9	3.4	3.2	3.7	4.0	
	4H	5.3	5.7	5.7	6.1	6.4	5.3	5.7	5.7	6.1	6.4	
	6H	7.2	7.6	7.6	7.9	8.3	7.2	7.6	7.6	7.9	8.3	
8H	8H	8.6	8.9	9.0	9.2	9.6	8.6	8.9	9.0	9.2	9.6	
	12H	10.0	10.3	10.4	10.7	11.1	10.0	10.3	10.4	10.7	11.1	
	4H	6.0	6.3	6.5	6.7	7.1	6.0	6.3	6.5	6.7	7.1	
	6H	8.2	8.5	8.7	8.9	9.3	8.2	8.5	8.7	8.9	9.3	
	8H	9.8	10.0	10.3	10.5	10.9	9.8	10.0	10.3	10.5	10.9	
12H	12H	11.5	11.6	12.0	12.1	12.6	11.5	11.6	12.0	12.1	12.6	
	4H	6.3	6.5	6.7	6.9	7.3	6.3	6.5	6.7	6.9	7.3	
	6H	8.6	8.8	9.1	9.2	9.7	8.6	8.8	9.1	9.2	9.7	
	8H	10.3	10.5	10.8	10.9	11.4	10.3	10.5	10.8	10.9	11.4	
	Variation of the observer position for the luminaire distances S											
S = 1.0H		+0.1 / -0.2					+0.1 / -0.2					
S = 1.5H		+0.3 / -0.3					+0.3 / -0.3					
S = 2.0H		+0.6 / -0.5					+0.6 / -0.5					
Standard table		---					---					
Correction		---					---					
Summand		---					---					
Corrected Glare Indices referring to 250lm Total Luminous Flux												



DIMENSIONS



AWARDS




PRODUCT	
Name	BLACK FOSTER TRI 1 SPOT 2700K N
Reference	A3181110N
Color	Matt black
RAL	9005
Category	CEILING RECESSED
LIGHTING INFORMATION	
Light source	LED
Gross luminous flux	190 Lm
Power	2,1 W
Power values of the system	3,23 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 3
Light beam angle	19°
Lighting efficiency	90%
Efficacy	90 Lm/W
Current intensity	700 mA
Control through bluetooth	Please Consult
Driver	Included - Connected
Emergency power supply	Please Consult
Electrical insulation class	□
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A++
LED lifespan	L80B10 (Tc=85°C) >60.000h
OTHER DATA	
Ingress Protection	IP20
Recess measurements	50 × 50 mm.
Weight	115 g.
Packaged weight	170 g.
Packaging dimensions	193 × 108 × 53 mm
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene / Polycarbonate




Black Foster is the product that transfers the claimed effect "The Invisible Black" to a recessed-isolated lineal luminary; also available in trimless version. If we take a closer view to the recessed model, its bezel is so thin than when lighted up, it is unperceived; offering an aesthetic of "visual trimless". Black Foster stands out for its refinement, its visual comfort and for almost completely hide the source of light from the human eye range.

POLAR DIAGRAM

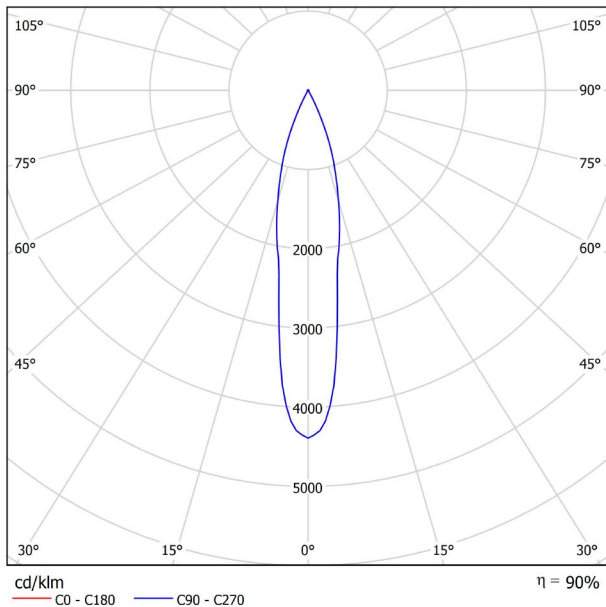

CONICAL DIAGRAM

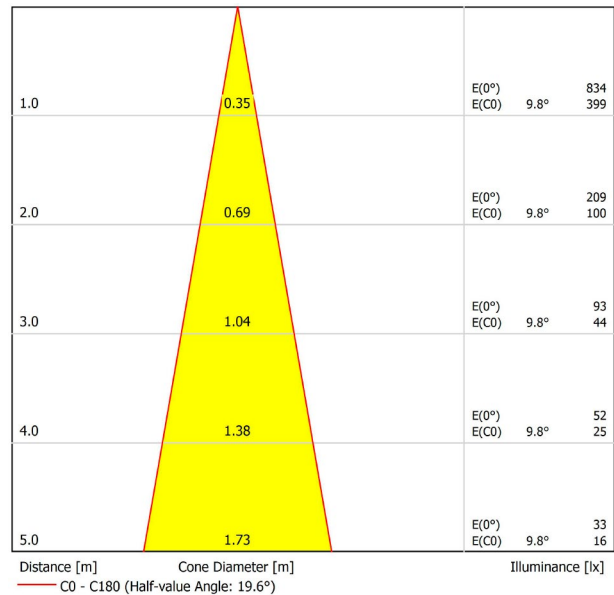


UGR

Glare Evaluation According to UGR												
ρ Ceiling		70	70	50	50	30	70	70	50	50	30	30
ρ Walls		50	30	50	30	30	50	30	50	30	30	30
ρ Floor		20	20	20	20	20	20	20	20	20	20	20
Room Size X Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis					
2H	2H	-3.5	-2.8	-3.2	-2.6	-2.4	-3.5	-2.8	-3.2	-2.6	-2.4	
	3H	0.4	1.0	0.7	1.3	1.5	0.4	1.0	0.7	1.3	1.5	
	4H	2.9	3.4	3.2	3.7	3.9	2.9	3.4	3.2	3.7	3.9	
	6H	4.6	5.1	4.9	5.4	5.7	4.6	5.1	4.9	5.4	5.7	
	8H	5.8	6.3	6.2	6.6	6.9	5.8	6.3	6.2	6.6	6.9	
4H	12H	7.2	7.6	7.5	7.9	8.2	7.2	7.6	7.5	7.9	8.2	
	2H	-1.8	-1.3	-1.5	-1.0	-0.8	-1.8	-1.3	-1.5	-1.0	-0.8	
	3H	1.9	2.4	2.3	2.7	3.0	1.9	2.4	2.3	2.7	3.0	
	4H	4.4	4.8	4.7	5.1	5.4	4.4	4.8	4.7	5.1	5.4	
	6H	6.3	6.6	6.7	7.0	7.3	6.3	6.6	6.7	7.0	7.3	
8H	8H	7.6	7.9	8.0	8.3	8.7	7.6	7.9	8.0	8.3	8.7	
	12H	9.1	9.3	9.5	9.7	10.1	9.1	9.3	9.5	9.7	10.1	
	4H	5.1	5.4	5.5	5.8	6.2	5.1	5.4	5.5	5.8	6.2	
	6H	7.3	7.5	7.7	7.9	8.4	7.3	7.5	7.7	7.9	8.4	
	8H	8.9	9.1	9.3	9.5	10.0	8.9	9.1	9.3	9.5	10.0	
12H	12H	10.5	10.7	11.0	11.1	11.6	10.5	10.7	11.0	11.1	11.6	
	4H	5.3	5.5	5.7	5.9	6.4	5.3	5.5	5.7	5.9	6.4	
	6H	7.7	7.8	8.1	8.3	8.7	7.7	7.8	8.1	8.3	8.7	
	8H	9.4	9.5	9.9	10.0	10.5	9.4	9.5	9.9	10.0	10.5	
Variation of the observer position for the luminaire distances S												
S = 1.0H		+0.1 / -0.2					+0.1 / -0.2					
S = 1.5H		+0.3 / -0.3					+0.3 / -0.3					
S = 2.0H		+0.6 / -0.5					+0.6 / -0.5					
Standard table		---					---					
Correction		---					---					
Summand		---					---					
Corrected Glare Indices referring to 190lm Total Luminous Flux												



DIMENSIONS



AWARDS




PRODUCT	
Name	BLACK FOSTER TRI 1 SPOT 2700K NMG
Reference	A3181110NMG
Color	Matt black-Metallized gold
RAL	Metallic finish
Category	CEILING RECESSED
LIGHTING INFORMATION	
Light source	LED
Gross luminous flux	190 Lm
Power	2,1 W
Power values of the system	3,23 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 3
Light beam angle	19°
Lighting efficiency	90%
Efficacy	90 Lm/W
Current intensity	700 mA
Control through bluetooth	Please Consult
Driver	Included - Connected
Emergency power supply	Please Consult
Electrical insulation class	□
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A++
LED lifespan	L80B10 (Tc=85°C) >60.000h
OTHER DATA	
Ingress Protection	IP20
Recess measurements	50 × 50 mm.
Weight	115 g.
Packaged weight	170 g.
Packaging dimensions	193 × 108 × 53 mm
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene / Polycarbonate




Black Foster is the product that transfers the claimed effect "The Invisible Black" to a recessed-isolated lineal luminary; also available in trimless version. If we take a closer view to the recessed model, its bezel is so thin than when lighted up, it is unperceived; offering an aesthetic of "visual trimless". Black Foster stands out for its refinement, its visual comfort and for almost completely hide the source of light from the human eye range.

POLAR DIAGRAM

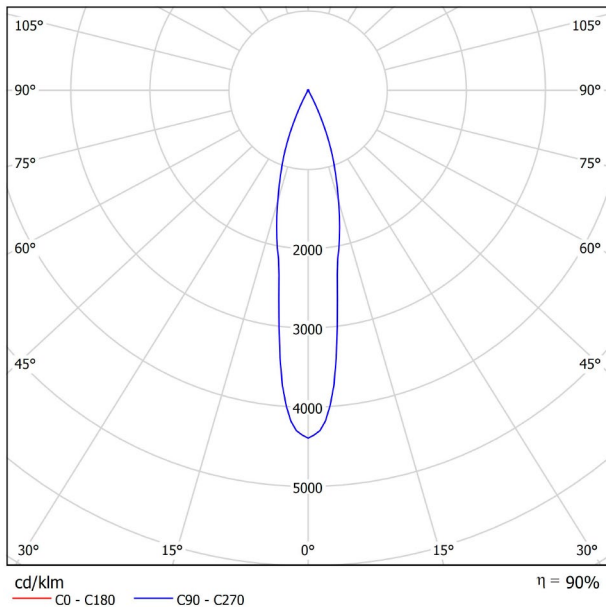

CONICAL DIAGRAM

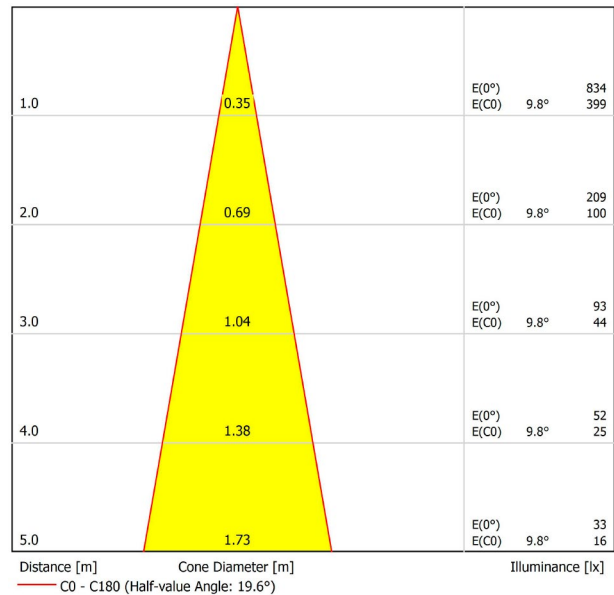


UGR

Glare Evaluation According to UGR												
ρ Ceiling		70	70	50	50	30	70	70	50	50	30	
ρ Walls		50	30	50	30	30	50	30	50	30	30	
ρ Floor		20	20	20	20	20	20	20	20	20	20	
Room Size X Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis					
2H	2H	-3.5	-2.8	-3.2	-2.6	-2.4	-3.5	-2.8	-3.2	-2.6	-2.4	
	3H	0.4	1.0	0.7	1.3	1.5	0.4	1.0	0.7	1.3	1.5	
	4H	2.9	3.4	3.2	3.7	3.9	2.9	3.4	3.2	3.7	3.9	
	6H	4.6	5.1	4.9	5.4	5.7	4.6	5.1	4.9	5.4	5.7	
	8H	5.8	6.3	6.2	6.6	6.9	5.8	6.3	6.2	6.6	6.9	
	12H	7.2	7.6	7.5	7.9	8.2	7.2	7.6	7.5	7.9	8.2	
4H	2H	-1.8	-1.3	-1.5	-1.0	-0.8	-1.8	-1.3	-1.5	-1.0	-0.8	
	3H	1.9	2.4	2.3	2.7	3.0	1.9	2.4	2.3	2.7	3.0	
	4H	4.4	4.8	4.7	5.1	5.4	4.4	4.8	4.7	5.1	5.4	
	6H	6.3	6.6	6.7	7.0	7.3	6.3	6.6	6.7	7.0	7.3	
	8H	7.6	7.9	8.0	8.3	8.7	7.6	7.9	8.0	8.3	8.7	
	12H	9.1	9.3	9.5	9.7	10.1	9.1	9.3	9.5	9.7	10.1	
8H	4H	5.1	5.4	5.5	5.8	6.2	5.1	5.4	5.5	5.8	6.2	
	6H	7.3	7.5	7.7	7.9	8.4	7.3	7.5	7.7	7.9	8.4	
	8H	8.9	9.1	9.3	9.5	10.0	8.9	9.1	9.3	9.5	10.0	
	12H	10.5	10.7	11.0	11.1	11.6	10.5	10.7	11.0	11.1	11.6	
12H	4H	5.3	5.5	5.7	5.9	6.4	5.3	5.5	5.7	5.9	6.4	
	6H	7.7	7.8	8.1	8.3	8.7	7.7	7.8	8.1	8.3	8.7	
	8H	9.4	9.5	9.9	10.0	10.5	9.4	9.5	9.9	10.0	10.5	
Variation of the observer position for the luminaire distances S												
S = 1.0H		+0.1 / -0.2					+0.1 / -0.2					
S = 1.5H		+0.3 / -0.3					+0.3 / -0.3					
S = 2.0H		+0.6 / -0.5					+0.6 / -0.5					
Standard table		---					---					
Correction		---					---					
Summand		---					---					
Corrected Glare Indices referring to 190lm Total Luminous Flux												



DIMENSIONS



AWARDS




PRODUCT	
Name	BLACK FOSTER TRI 1 SPOT 3000K N
Reference	A3181111N
Color	Matt black
RAL	9005
Category	CEILING RECESSED
LIGHTING INFORMATION	
Light source	LED
Gross luminous flux	210 Lm
Power	2,1 W
Power values of the system	3,23 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 3
Light beam angle	19°
Lighting efficiency	90%
Efficacy	100 Lm/W
Current intensity	700 mA
Control through bluetooth	Please Consult
Driver	Included - Connected
Emergency power supply	Please Consult
Electrical insulation class	□
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A++
LED lifespan	L80B10 (Tc=85°C) >60.000h
OTHER DATA	
Ingress Protection	IP20
Recess measurements	50 × 50 mm.
Weight	115 g.
Packaged weight	170 g.
Packaging dimensions	193 × 108 × 53 mm
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene / Polycarbonate




Black Foster is the product that transfers the claimed effect "The Invisible Black" to a recessed-isolated lineal luminary; also available in trimless version. If we take a closer view to the recessed model, its bezel is so thin than when lighted up, it is unperceived; offering an aesthetic of "visual trimless". Black Foster stands out for its refinement, its visual comfort and for almost completely hide the source of light from the human eye range.

POLAR DIAGRAM

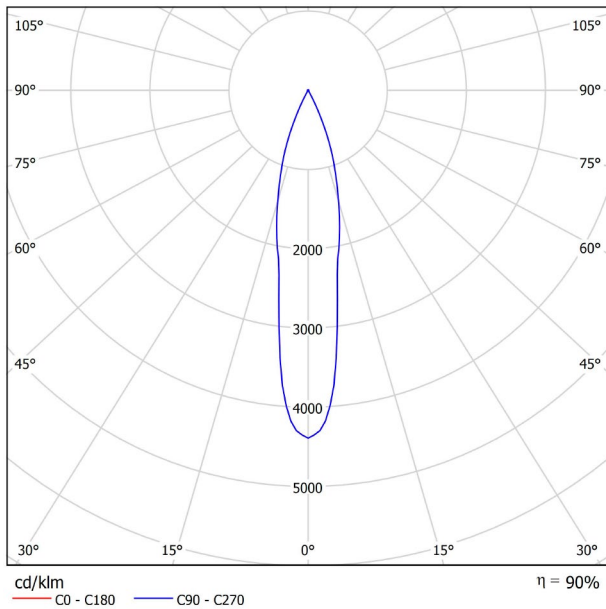

CONICAL DIAGRAM

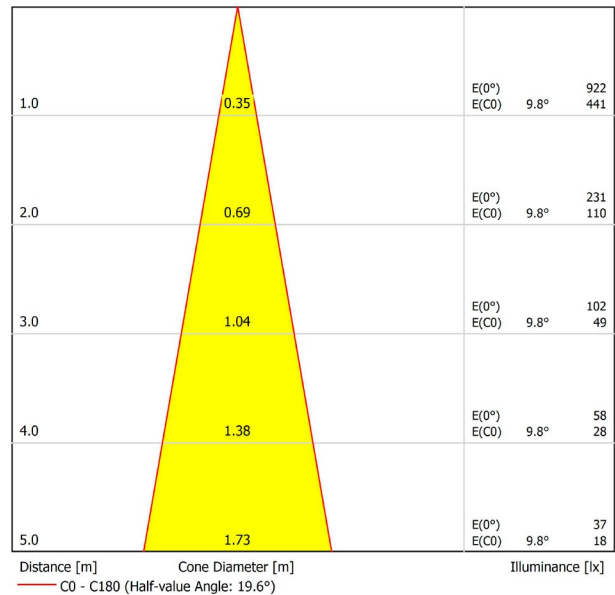


UGR

Glare Evaluation According to UGR												
ρ Ceiling		70	70	50	50	30	70	70	50	50	30	30
ρ Walls		50	30	50	30	30	50	30	50	30	30	30
ρ Floor		20	20	20	20	20	20	20	20	20	20	20
Room Size X Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis					
2H	2H	-3.1	-2.5	-2.9	-2.3	-2.1	-3.1	-2.5	-2.9	-2.3	-2.1	
	3H	0.8	1.4	1.1	1.6	1.8	0.8	1.4	1.1	1.6	1.8	
	4H	3.2	3.8	3.5	4.0	4.3	3.2	3.8	3.5	4.0	4.3	
	6H	5.0	5.5	5.3	5.7	6.0	5.0	5.5	5.3	5.7	6.0	
	8H	6.2	6.7	6.5	6.9	7.2	6.2	6.7	6.5	6.9	7.2	
4H	12H	7.5	8.0	7.9	8.3	8.6	7.5	8.0	7.9	8.3	8.6	
	2H	-1.5	-0.9	-1.2	-0.7	-0.4	-1.5	-0.9	-1.2	-0.7	-0.4	
	3H	2.3	2.7	2.6	3.0	3.4	2.3	2.7	2.6	3.0	3.4	
	4H	4.7	5.1	5.1	5.4	5.8	4.7	5.1	5.1	5.4	5.8	
	6H	6.6	6.9	7.0	7.3	7.7	6.6	6.9	7.0	7.3	7.7	
8H	8H	8.0	8.2	8.4	8.6	9.0	8.0	8.2	8.4	8.6	9.0	
	12H	9.4	9.7	9.8	10.0	10.5	9.4	9.7	9.8	10.0	10.5	
	4H	5.4	5.7	5.9	6.1	6.5	5.4	5.7	5.9	6.1	6.5	
	6H	7.6	7.9	8.1	8.3	8.7	7.6	7.9	8.1	8.3	8.7	
	8H	9.2	9.4	9.7	9.8	10.3	9.2	9.4	9.7	9.8	10.3	
12H	12H	10.9	11.0	11.4	11.5	12.0	10.9	11.0	11.4	11.5	12.0	
	4H	5.6	5.9	6.1	6.3	6.7	5.6	5.9	6.1	6.3	6.7	
	6H	8.0	8.2	8.5	8.6	9.1	8.0	8.2	8.5	8.6	9.1	
8H		9.7	9.9	10.2	10.3	10.8	9.7	9.9	10.2	10.3	10.8	
Variation of the observer position for the luminaire distances S												
S = 1.0H		+0.1 / -0.2					+0.1 / -0.2					
S = 1.5H		+0.3 / -0.3					+0.3 / -0.3					
S = 2.0H		+0.6 / -0.5					+0.6 / -0.5					
Standard table		---					---					
Correction		---					---					
Summand		---					---					
Corrected Glare Indices referring to 210lm Total Luminous Flux												



DIMENSIONS



AWARDS




PRODUCT	
Name	BLACK FOSTER TRI 1 SPOT 3000K NMG
Reference	A3181111NMG
Color	Matt black-Metallized gold
RAL	Metalllic finish
Category	CEILING RECESSED
LIGHTING INFORMATION	
Light source	LED
Gross luminous flux	210 Lm
Power	2,1 W
Power values of the system	3,23 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 3
Light beam angle	19°
Lighting efficiency	90%
Efficacy	100 Lm/W
Current intensity	700 mA
Control through bluetooth	Please Consult
Driver	Included - Connected
Emergency power supply	Please Consult
Electrical insulation class	
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A++
LED lifespan	L80B10 (Tc=85°C) >60.000h
OTHER DATA	
Ingress Protection	IP20
Recess measurements	50 × 50 mm.
Weight	115 g.
Packaged weight	170 g.
Packaging dimensions	193 × 108 × 53 mm
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene / Polycarbonate




Black Foster is the product that transfers the claimed effect "The Invisible Black" to a recessed-isolated lineal luminary; also available in trimless version. If we take a closer view to the recessed model, its bezel is so thin than when lighted up, it is unperceived; offering an aesthetic of "visual trimless". Black Foster stands out for its refinement, its visual comfort and for almost completely hide the source of light from the human eye range.

POLAR DIAGRAM

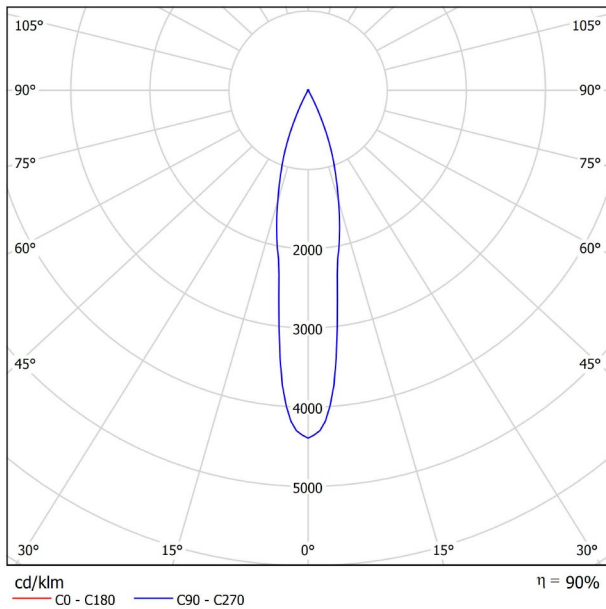

CONICAL DIAGRAM

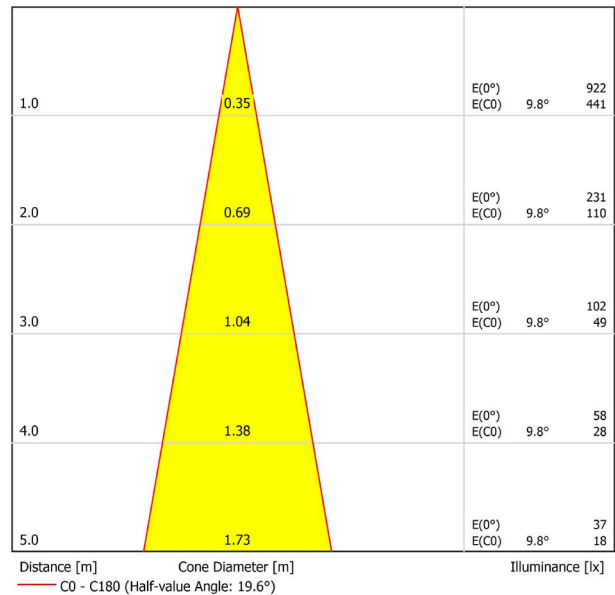

UGR

Glare Evaluation According to UGR												
ρ Ceiling		70	70	50	50	30	70	70	50	50	30	30
ρ Walls		50	30	50	30	30	50	30	50	30	30	30
ρ Floor		20	20	20	20	20	20	20	20	20	20	20
Room Size X Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis					
2H	2H	-3.1	-2.5	-2.9	-2.3	-2.1	-3.1	-2.5	-2.9	-2.3	-2.1	
	3H	0.8	1.4	1.1	1.6	1.8	0.8	1.4	1.1	1.6	1.8	
	4H	3.2	3.8	3.5	4.0	4.3	3.2	3.8	3.5	4.0	4.3	
	6H	5.0	5.5	5.3	5.7	6.0	5.0	5.5	5.3	5.7	6.0	
	8H	6.2	6.7	6.5	6.9	7.2	6.2	6.7	6.5	6.9	7.2	
4H	12H	7.5	8.0	7.9	8.3	8.6	7.5	8.0	7.9	8.3	8.6	
	2H	-1.5	-0.9	-1.2	-0.7	-0.4	-1.5	-0.9	-1.2	-0.7	-0.4	
	3H	2.3	2.7	2.6	3.0	3.4	2.3	2.7	2.6	3.0	3.4	
	4H	4.7	5.1	5.1	5.4	5.8	4.7	5.1	5.1	5.4	5.8	
	6H	6.6	6.9	7.0	7.3	7.7	6.6	6.9	7.0	7.3	7.7	
8H	8H	8.0	8.2	8.4	8.6	9.0	8.0	8.2	8.4	8.6	9.0	
	12H	9.4	9.7	9.8	10.0	10.5	9.4	9.7	9.8	10.0	10.5	
	4H	5.4	5.7	5.9	6.1	6.5	5.4	5.7	5.9	6.1	6.5	
	6H	7.6	7.9	8.1	8.3	8.7	7.6	7.9	8.1	8.3	8.7	
	8H	9.2	9.4	9.7	9.8	10.3	9.2	9.4	9.7	9.8	10.3	
12H	12H	10.9	11.0	11.4	11.5	12.0	10.9	11.0	11.4	11.5	12.0	
	4H	5.6	5.9	6.1	6.3	6.7	5.6	5.9	6.1	6.3	6.7	
	6H	8.0	8.2	8.5	8.6	9.1	8.0	8.2	8.5	8.6	9.1	
	8H	9.7	9.9	10.2	10.3	10.8	9.7	9.9	10.2	10.3	10.8	
Variation of the observer position for the luminaire distances S												
S = 1.0H		+0.1 / -0.2					+0.1 / -0.2					
S = 1.5H		+0.3 / -0.3					+0.3 / -0.3					
S = 2.0H		+0.6 / -0.5					+0.6 / -0.5					
Standard table		---					---					
Correction		---					---					
Summand		---					---					
Corrected Glare Indices referring to 210lm Total Luminous Flux												