




DIMENSIONS



AWARDS



Name	BLACK FOSTER ASYM TRI 3 2700K N
Reference	A3733010N
Color	Matt black
RAL	9005
Category	CEILING RECESSED


Light source	LED
Gross luminous flux	570 Lm
Power	6,3 W
Power values of the system	6,3 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 3
Light beam angle	38°
Lighting efficiency	90%
Efficacy	90 Lm/W
Current intensity	700 mA
Control through bluetooth	Please Consult
Driver	Included - Connected
Emergency power supply	Please Consult
Electrical insulation class	<input type="checkbox"/>
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h

Ingress Protection	IP20
Recess measurements	50 × 136 mm.
Weight	203 g.
Packaged weight	298 g.
Packaging dimensions	212 × 155 × 73 mm
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene / Polycarbonate




Black Foster is the product that transfers the claimed effect "The Invisible Black" to a recessed-isolated lineal luminary; also available in trimless version. If we take a closer view to the recessed model, its bezel is so thin than when lighted up, it is unperceived; offering an aesthetic of "visual trimless". Black Foster stands out for its refinement, its visual comfort and for almost completely hide the source of light from the human eye range.

POLAR DIAGRAM

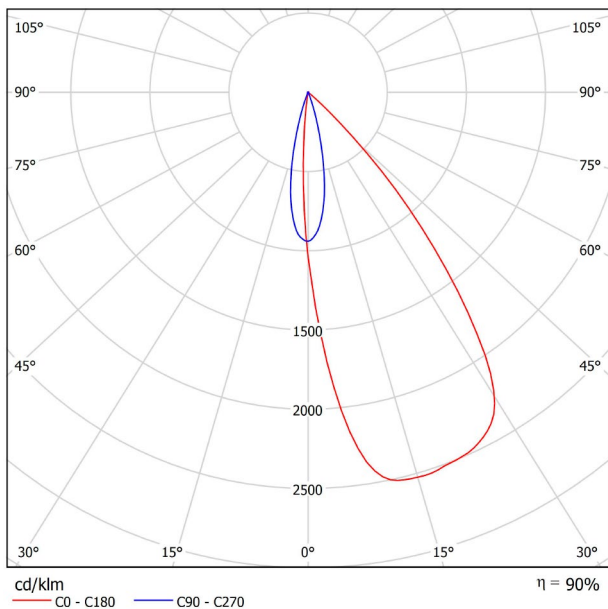


CONICAL DIAGRAM

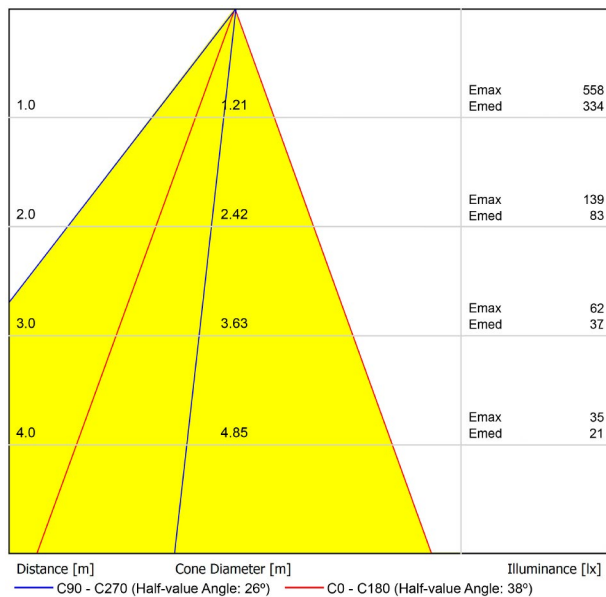



DIMENSIONS



AWARDS



INTERIOR DESIGN

Name	BLACK FOSTER ASYM TRI 3 3000K N
Reference	A3733011N
Color	Matt black
RAL	9005
Category	CEILING RECESSED

PRODUCT

Light source	LED
Gross luminous flux	630 Lm
Power	6,3 W
Power values of the system	6,3 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 3
Light beam angle	38°
Lighting efficiency	90%
Efficacy	100 Lm/W
Current intensity	700 mA
Control through bluetooth	Please Consult
Driver	Included - Connected
Emergency power supply	Please Consult
Electrical insulation class	<input type="checkbox"/>
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


Ingress Protection	IP20
Recess measurements	50 × 136 mm.
Weight	203 g.
Packaged weight	298 g.
Packaging dimensions	212 × 155 × 73 mm
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene / Polycarbonate

OTHER DATA




Black Foster is the product that transfers the claimed effect "The Invisible Black" to a recessed-isolated lineal luminary; also available in trimless version. If we take a closer view to the recessed model, its bezel is so thin than when lighted up, it is unperceived; offering an aesthetic of "visual trimless". Black Foster stands out for its refinement, its visual comfort and for almost completely hide the source of light from the human eye range.

POLAR DIAGRAM

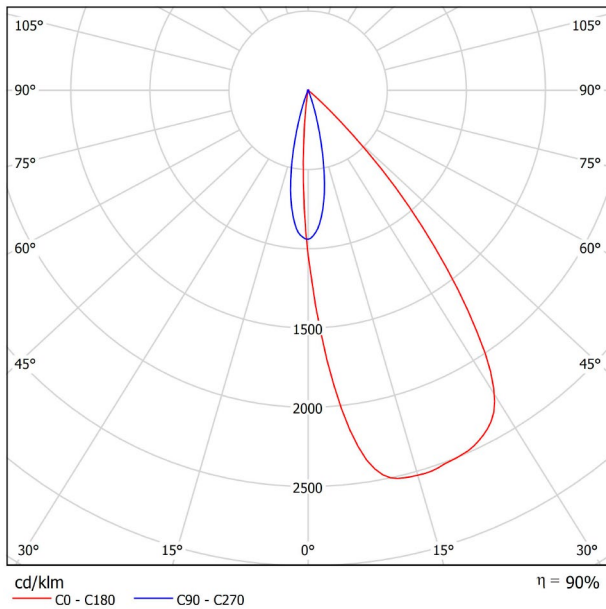


CONICAL DIAGRAM

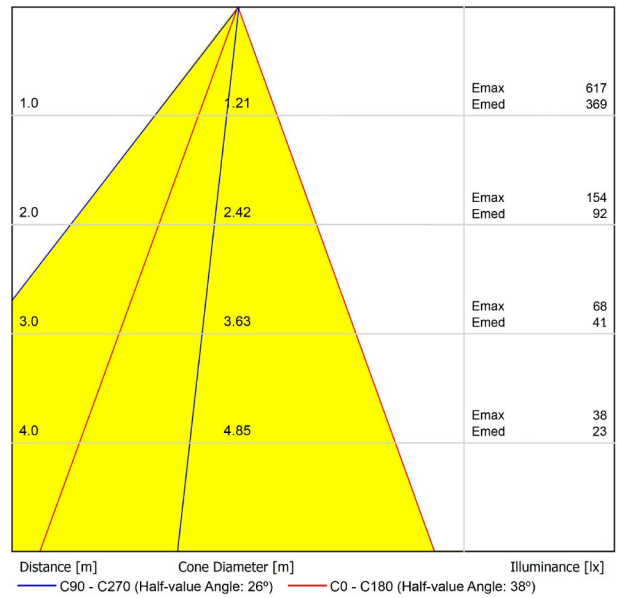



DIMENSIONS



AWARDS




PRODUCT	
Name	BLACK FOSTER ASYM TRI 3 4000K N
Reference	A3733012N
Color	Matt black
RAL	9005
Category	CEILING RECESSED
LIGHTING INFORMATION	
Light source	LED
Gross luminous flux	750 Lm
Power	6,3 W
Power values of the system	6,3 W
Colour temperature	4000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 3
Light beam angle	38°
Lighting efficiency	90%
Efficacy	119 Lm/W
Current intensity	700 mA
Control through bluetooth	Please Consult
Driver	Included - Connected
Emergency power supply	Please Consult
Electrical insulation class	<input type="checkbox"/>
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A++
LED lifespan	L80B10 (Tc=85°C) >60.000h
OTHER DATA	
Ingress Protection	IP20
Recess measurements	50 × 136 mm.
Weight	203 g.
Packaged weight	298 g.
Packaging dimensions	212 × 155 × 73 mm
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene / Polycarbonate




Black Foster is the product that transfers the claimed effect "The Invisible Black" to a recessed-isolated lineal luminary; also available in trimless version. If we take a closer view to the recessed model, its bezel is so thin than when lighted up, it is unperceived; offering an aesthetic of "visual trimless". Black Foster stands out for its refinement, its visual comfort and for almost completely hide the source of light from the human eye range.

POLAR DIAGRAM

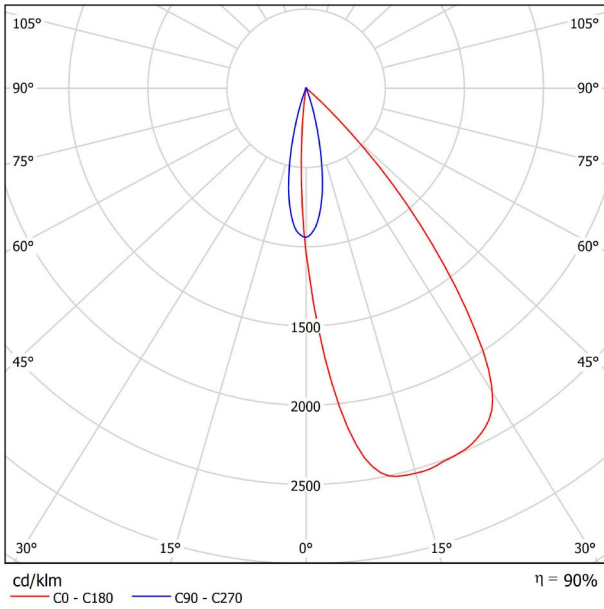


CONICAL DIAGRAM

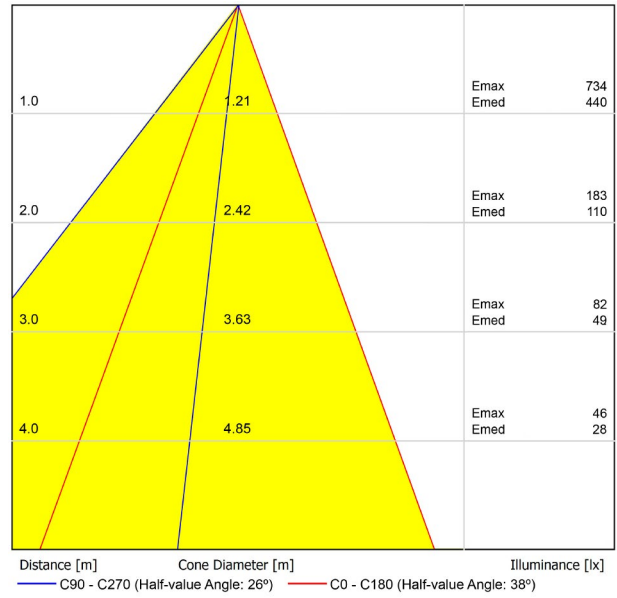



DIMENSIONS



AWARDS



INTERIOR DESIGN

Name	BLACK FOSTER ASYM TRI 3 DIM PUSH 2700K N
Reference	A3733020N
Color	Matt black
RAL	9005
Category	CEILING RECESSED

PRODUCT

Light source	LED
Gross luminous flux	570 Lm
Power	6,3 W
Power values of the system	6,3 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 3
Light beam angle	38°
Lighting efficiency	90%
Efficacy	90 Lm/W
Current intensity	700 mA
Dimming	Push
Control through bluetooth	Please Consult
Driver	Included - Connected
Emergency power supply	Please Consult
Electrical insulation class	□
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


Ingress Protection	IP20
Recess measurements	50 × 136 mm.
Weight	278 g.
Packaged weight	373 g.
Packaging dimensions	212 × 155 × 73 mm
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene / Polycarbonate

OTHER DATA




Black Foster is the product that transfers the claimed effect "The Invisible Black" to a recessed-isolated lineal luminary; also available in trimless version. If we take a closer view to the recessed model, its bezel is so thin than when lighted up, it is unperceived; offering an aesthetic of "visual trimless". Black Foster stands out for its refinement, its visual comfort and for almost completely hide the source of light from the human eye range.

POLAR DIAGRAM

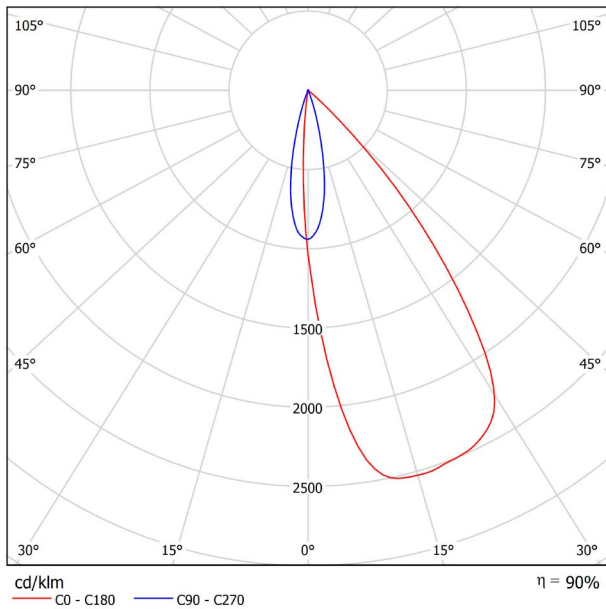


CONICAL DIAGRAM

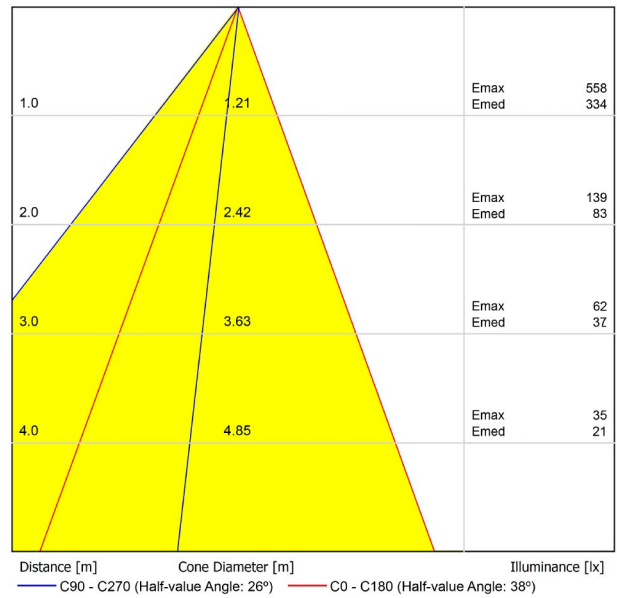



DIMENSIONS



AWARDS




Name	BLACK FOSTER ASYM TRI 3 DIM PUSH 3000K N
Reference	A3733021N
Color	Matt black
RAL	9005
Category	CEILING RECESSED
PRODUCT	
LIGHTING INFORMATION	
Light source	LED
Gross luminous flux	630 Lm
Power	6,3 W
Power values of the system	6,3 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 3
Light beam angle	38°
Lighting efficiency	90%
Efficacy	100 Lm/W
Current intensity	700 mA
Dimming	Push
Control through bluetooth	Please Consult
Driver	Included - Connected
Emergency power supply	Please Consult
Electrical insulation class	□
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h
OTHER DATA	
Ingress Protection	IP20
Recess measurements	50 × 136 mm.
Weight	278 g.
Packaged weight	373 g.
Packaging dimensions	212 × 155 × 73 mm
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene / Polycarbonate




Black Foster is the product that transfers the claimed effect "The Invisible Black" to a recessed-isolated lineal luminary; also available in trimless version. If we take a closer view to the recessed model, its bezel is so thin that when lighted up, it is unperceived; offering an aesthetic of "visual trimless". Black Foster stands out for its refinement, its visual comfort and for almost completely hide the source of light from the human eye range.

POLAR DIAGRAM

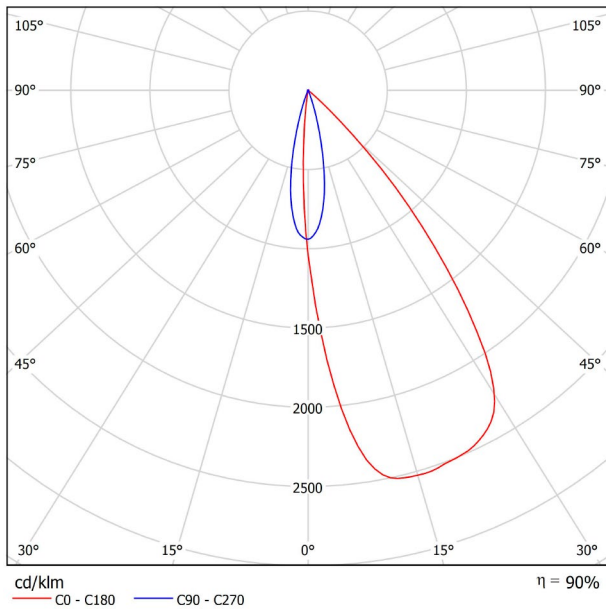


CONICAL DIAGRAM

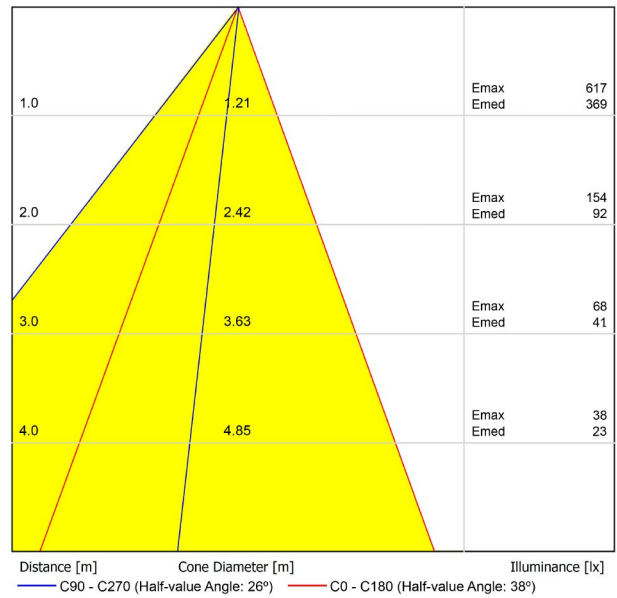



DIMENSIONS



AWARDS



Name	BLACK FOSTER ASYM TRI 3 DIM PUSH 4000K N
Reference	A3733022N
Color	Matt black
RAL	9005
Category	CEILING RECESSED

PRODUCT

BLACK FOSTER ASYM TRI 3 DIM PUSH 4000K N
A3733022N
Matt black
9005
CEILING RECESSED

Light source	LED
Gross luminous flux	750 Lm
Power	6,3 W
Power values of the system	6,3 W
Colour temperature	4000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 3
Light beam angle	38°
Lighting efficiency	90%
Efficacy	119 Lm/W
Current intensity	700 mA
Dimming	Push
Control through bluetooth	Please Consult
Driver	Included - Connected
Emergency power supply	Please Consult
Electrical insulation class	<input type="checkbox"/>
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A++
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION

LED
750 Lm
6,3 W
6,3 W
4000 K
CRI>90
MacAdam Step 3
38°
90%
119 Lm/W
700 mA
Push
Please Consult
Included - Connected
Please Consult

220 V/240 V
50/60 Hz
A++
L80B10 (Tc=85°C) >60.000h

Ingress Protection	IP20
Recess measurements	50 × 136 mm.
Weight	278 g.
Packaged weight	373 g.
Packaging dimensions	212 × 155 × 73 mm
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene / Polycarbonate


OTHER DATA

IP20
50 × 136 mm.
278 g.
373 g.
212 × 155 × 73 mm




Black Foster is the product that transfers the claimed effect "The Invisible Black" to a recessed-isolated lineal luminary; also available in trimless version. If we take a closer view to the recessed model, its bezel is so thin that when lighted up, it is unperceived; offering an aesthetic of "visual trimless". Black Foster stands out for its refinement, its visual comfort and for almost completely hide the source of light from the human eye range.

POLAR DIAGRAM

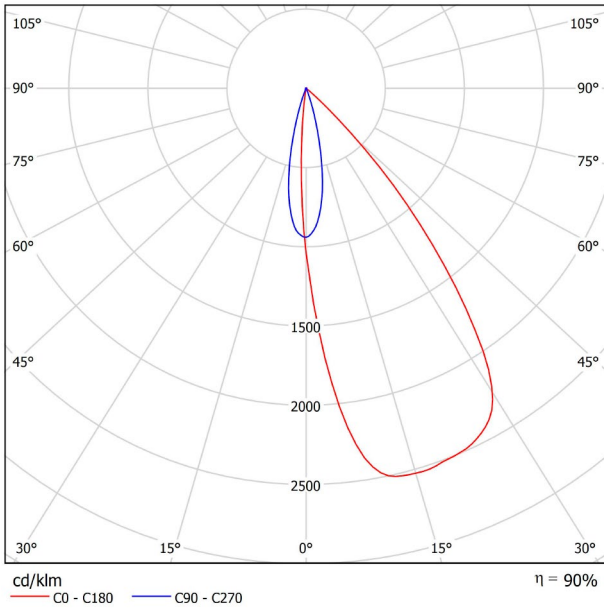


CONICAL DIAGRAM

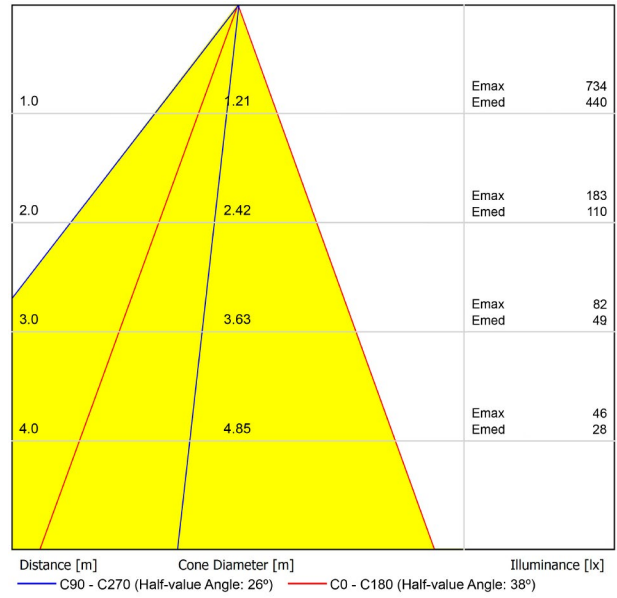



DIMENSIONS



AWARDS




PRODUCT	
Name	BLACK FOSTER ASYM TRI 3 DIM 1/10V 2700K N
Reference	A3733030N
Color	Matt black
RAL	9005
Category	CEILING RECESSED
LIGHTING INFORMATION	
Light source	LED
Gross luminous flux	570 Lm
Power	6,3 W
Power values of the system	6,3 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 3
Light beam angle	38°
Lighting efficiency	90%
Efficacy	90 Lm/W
Current intensity	700 mA
Dimming	1-10V
Control through bluetooth	Please Consult
Driver	Included - Connected
Emergency power supply	Please Consult
Electrical insulation class	□
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h
OTHER DATA	
Ingress Protection	IP20
Recess measurements	50 × 136 mm.
Weight	278 g.
Packaged weight	373 g.
Packaging dimensions	212 × 155 × 73 mm
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene / Polycarbonate




Black Foster is the product that transfers the claimed effect "The Invisible Black" to a recessed-isolated lineal luminary; also available in trimless version. If we take a closer view to the recessed model, its bezel is so thin that when lighted up, it is unperceived; offering an aesthetic of "visual trimless". Black Foster stands out for its refinement, its visual comfort and for almost completely hide the source of light from the human eye range.

POLAR DIAGRAM

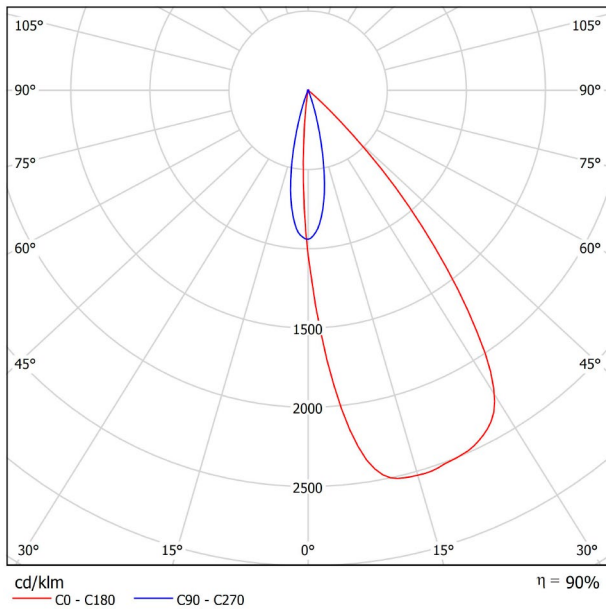


CONICAL DIAGRAM

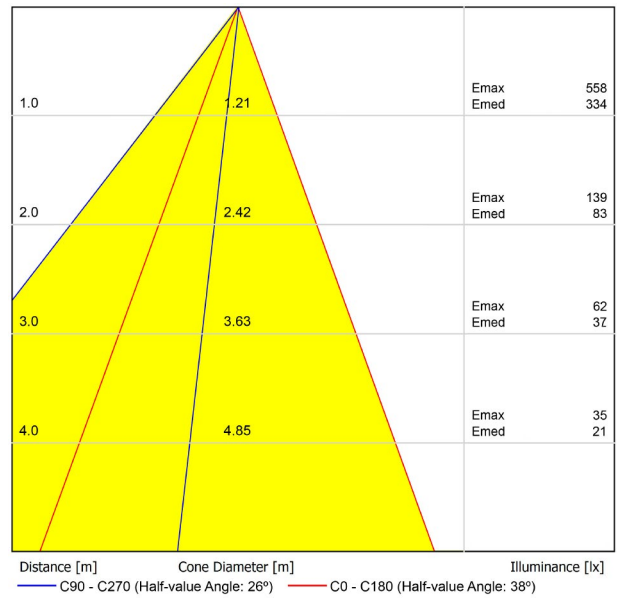



DIMENSIONS



AWARDS



Name	BLACK FOSTER ASYM TRI 3 DIM 1/10V 3000K N
Reference	A3733031N
Color	Matt black
RAL	9005
Category	CEILING RECESSED

PRODUCT

Light source	LED
Gross luminous flux	630 Lm
Power	6,3 W
Power values of the system	6,3 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 3
Light beam angle	38°
Lighting efficiency	90%
Efficacy	100 Lm/W
Current intensity	700 mA
Dimming	1-10V
Control through bluetooth	Please Consult
Driver	Included - Connected
Emergency power supply	Please Consult
Electrical insulation class	□
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


Ingress Protection	IP20
Recess measurements	50 × 136 mm.
Weight	278 g.
Packaged weight	373 g.
Packaging dimensions	212 × 155 × 73 mm
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene / Polycarbonate

OTHER DATA




Black Foster is the product that transfers the claimed effect "The Invisible Black" to a recessed-isolated lineal luminary; also available in trimless version. If we take a closer view to the recessed model, its bezel is so thin than when lighted up, it is unperceived; offering an aesthetic of "visual trimless". Black Foster stands out for its refinement, its visual comfort and for almost completely hide the source of light from the human eye range.

POLAR DIAGRAM

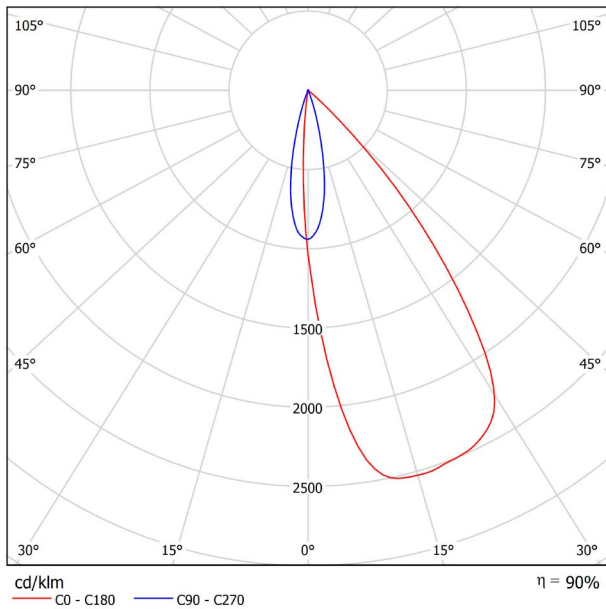


CONICAL DIAGRAM

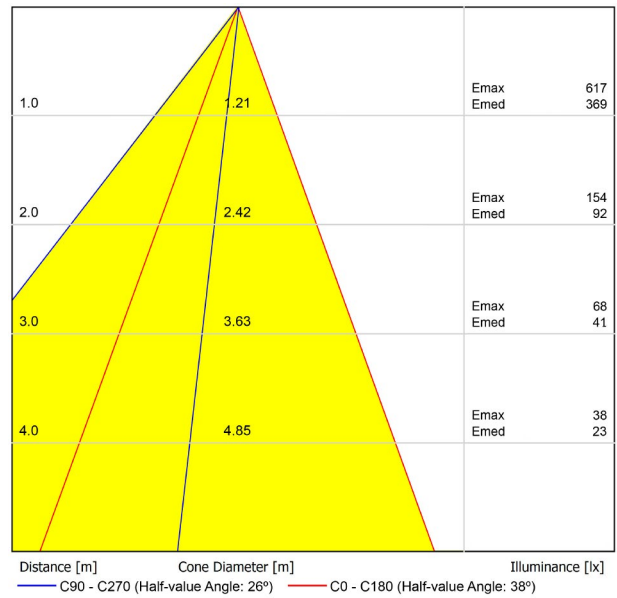



DIMENSIONS



AWARDS




PRODUCT	
Name	BLACK FOSTER ASYM TRI 3 DIM 1/10V 4000K N
Reference	A3733032N
Color	Matt black
RAL	9005
Category	CEILING RECESSED
LIGHTING INFORMATION	
Light source	LED
Gross luminous flux	750 Lm
Power	6,3 W
Power values of the system	6,3 W
Colour temperature	4000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 3
Light beam angle	38°
Lighting efficiency	90%
Efficacy	119 Lm/W
Current intensity	700 mA
Dimming	1-10V
Control through bluetooth	Please Consult
Driver	Included - Connected
Emergency power supply	Please Consult
Electrical insulation class	□
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A++
LED lifespan	L80B10 (Tc=85°C) >60.000h
OTHER DATA	
Ingress Protection	IP20
Recess measurements	50 × 136 mm.
Weight	278 g.
Packaged weight	373 g.
Packaging dimensions	212 × 155 × 73 mm
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene / Polycarbonate




Black Foster is the product that transfers the claimed effect "The Invisible Black" to a recessed-isolated lineal luminary; also available in trimless version. If we take a closer view to the recessed model, its bezel is so thin than when lighted up, it is unperceived; offering an aesthetic of "visual trimless". Black Foster stands out for its refinement, its visual comfort and for almost completely hide the source of light from the human eye range.

POLAR DIAGRAM

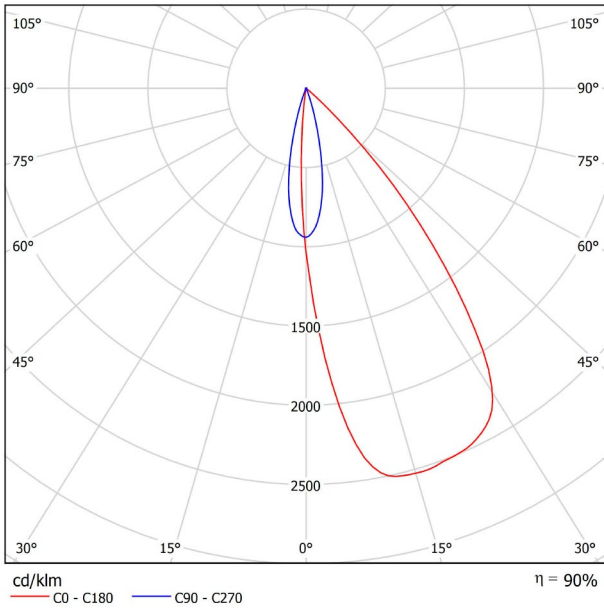


CONICAL DIAGRAM

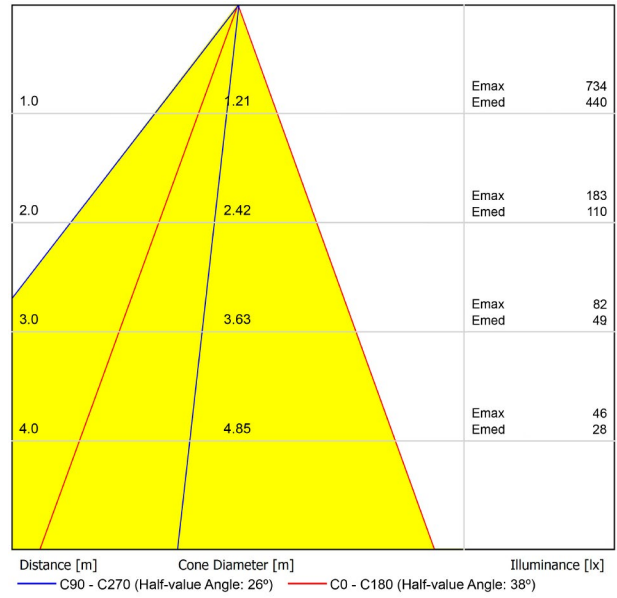



DIMENSIONS



AWARDS




PRODUCT	
Name	BLACK FOSTER ASYM TRI 3 DIM DALI 2700K N
Reference	A3733040N
Color	Matt black
RAL	9005
Category	CEILING RECESSED
LIGHTING INFORMATION	
Light source	LED
Gross luminous flux	570 Lm
Power	6,3 W
Power values of the system	6,3 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 3
Light beam angle	38°
Lighting efficiency	90%
Efficacy	90 Lm/W
Current intensity	700 mA
Dimming	DALI
Control through bluetooth	Please Consult
Driver	Included - Connected
Emergency power supply	Please Consult
Electrical insulation class	□
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h
OTHER DATA	
Ingress Protection	IP20
Recess measurements	50 × 136 mm.
Weight	278 g.
Packaged weight	373 g.
Packaging dimensions	212 × 155 × 73 mm
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene / Polycarbonate




Black Foster is the product that transfers the claimed effect "The Invisible Black" to a recessed-isolated lineal luminary; also available in trimless version. If we take a closer view to the recessed model, its bezel is so thin than when lighted up, it is unperceived; offering an aesthetic of "visual trimless". Black Foster stands out for its refinement, its visual comfort and for almost completely hide the source of light from the human eye range.

POLAR DIAGRAM

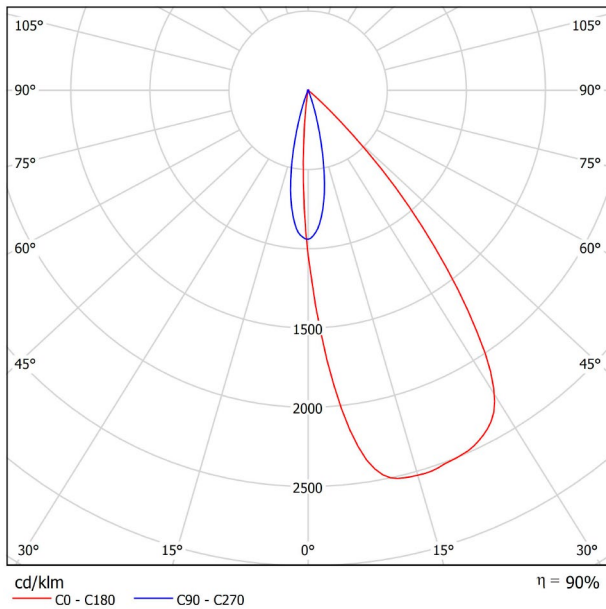


CONICAL DIAGRAM

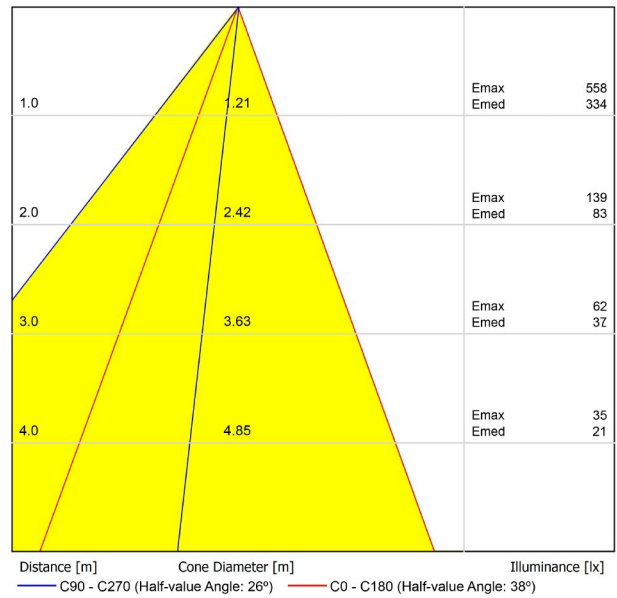



DIMENSIONS



AWARDS



Name	BLACK FOSTER ASYM TRI 3 DIM DALI 3000K N
Reference	A3733041N
Color	Matt black
RAL	9005
Category	CEILING RECESSED

PRODUCT

Light source	LED
Gross luminous flux	630 Lm
Power	6,3 W
Power values of the system	6,3 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 3
Light beam angle	38°
Lighting efficiency	90%
Efficacy	100 Lm/W
Current intensity	700 mA
Dimming	DALI
Control through bluetooth	Please Consult
Driver	Included - Connected
Emergency power supply	Please Consult
Electrical insulation class	□
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION

Ingress Protection	IP20
Recess measurements	50 × 136 mm.
Weight	278 g.
Packaged weight	373 g.
Packaging dimensions	212 × 155 × 73 mm
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene / Polycarbonate


OTHER DATA




Black Foster is the product that transfers the claimed effect "The Invisible Black" to a recessed-isolated lineal luminary; also available in trimless version. If we take a closer view to the recessed model, its bezel is so thin than when lighted up, it is unperceived; offering an aesthetic of "visual trimless". Black Foster stands out for its refinement, its visual comfort and for almost completely hide the source of light from the human eye range.



POLAR DIAGRAM

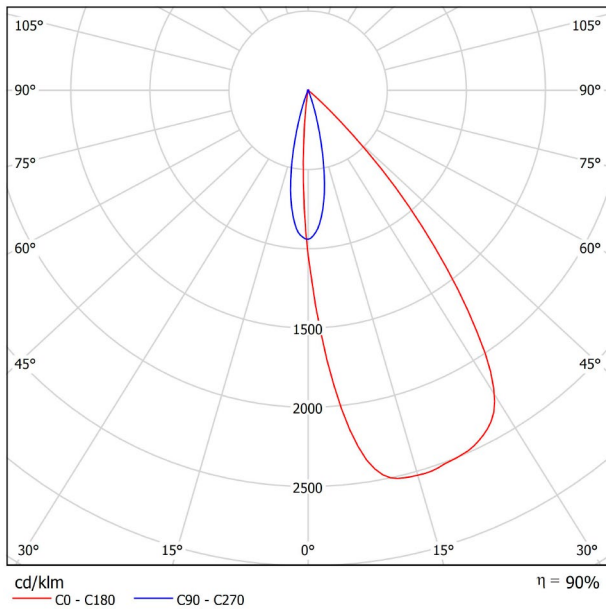


CONICAL DIAGRAM

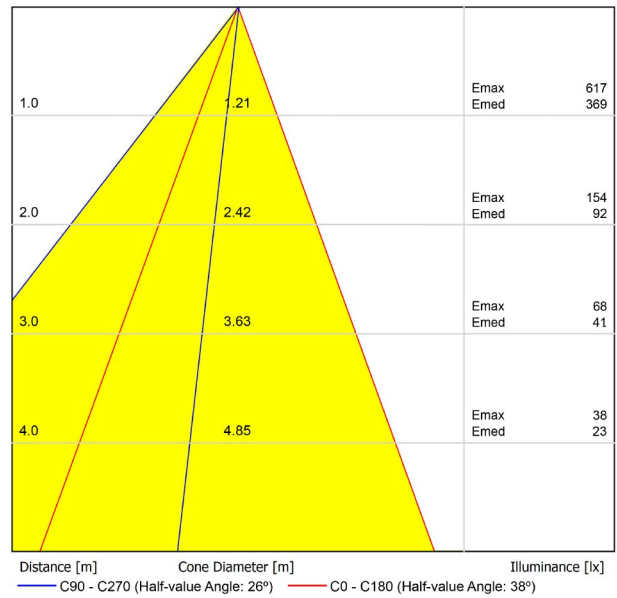



DIMENSIONS



AWARDS



Name	BLACK FOSTER ASYM TRI 3 DIM DALI 4000K N
Reference	A3733042N
Color	Matt black
RAL	9005
Category	CEILING RECESSED

PRODUCT

BLACK FOSTER ASYM TRI 3 DIM DALI 4000K N

A3733042N

Matt black

9005

CEILING RECESSED

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	750 Lm
Power	6,3 W
Power values of the system	6,3 W
Colour temperature	4000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 3
Light beam angle	38°
Lighting efficiency	90%
Efficacy	119 Lm/W
Current intensity	700 mA
Dimming	DALI
Control through bluetooth	Please Consult
Driver	Included - Connected
Emergency power supply	Please Consult
Electrical insulation class	□
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A++
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Recess measurements	50 × 136 mm.
Weight	278 g.
Packaged weight	373 g.
Packaging dimensions	212 × 155 × 73 mm
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene / Polycarbonate



Black Foster is the product that transfers the claimed effect "The Invisible Black" to a recessed-isolated lineal luminary; also available in trimless version. If we take a closer view to the recessed model, its bezel is so thin that when lighted up, it is unperceived; offering an aesthetic of "visual trimless". Black Foster stands out for its refinement, its visual comfort and for almost completely hide the source of light from the human eye range.

POLAR DIAGRAM

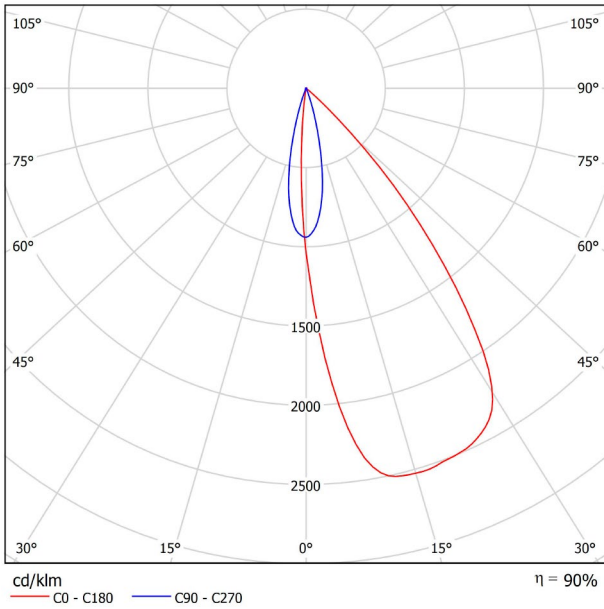

CONICAL DIAGRAM

