




DIMENSIONS




ACCESSORIES

ANTI-GLARE HONEYCOMB
LOUVER

PRODUCT

Name	WELLIT L TUNABLE WHITE 12° NT
Reference	A3820218NT
Color	Textured black
RAL	9005
Category	CEILING RECESSED

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	2300 Lm
Power	21,5 W
Power values of the system	21,5 W
Colour temperature	Tunable White 2700 - 5000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 3
Light beam angle	12°
Lighting efficiency	89%
Efficacy	107 Lm/W
Current intensity	600 mA
Dimming	Please Consult
Control through bluetooth	Please Consult
Driver	Included
Emergency power supply	Please Consult
Electrical insulation class	
Voltage	230 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tj=85°C) >55.000h


OTHER DATA

Ingress Protection	IP20
Recess measurements	Ø133 mm.
Swivel angle	25°
Rotation angle	355°
Weight	998 g.
Packaged weight	1143 g.
Packaging dimensions	208 × 164 × 132 mm
Units per package	1
Materials	Aluminium / Polycarbonate





Wellit is a family of recessed luminaires, that comes in 3 sizes and can be adjusted with a rotation and tilting system. Wellit offers outstanding technical features. It is a compact product: its 3 sizes are consistent with a luminous flux level that is commensurate with its dimensions. It is also noteworthy for its efficient thermal management thanks to an excellently designed dissipation system. With Wellit, the interior designer will have great versatility in terms of applications, for general, retail and contract lighting.

POLAR DIAGRAM

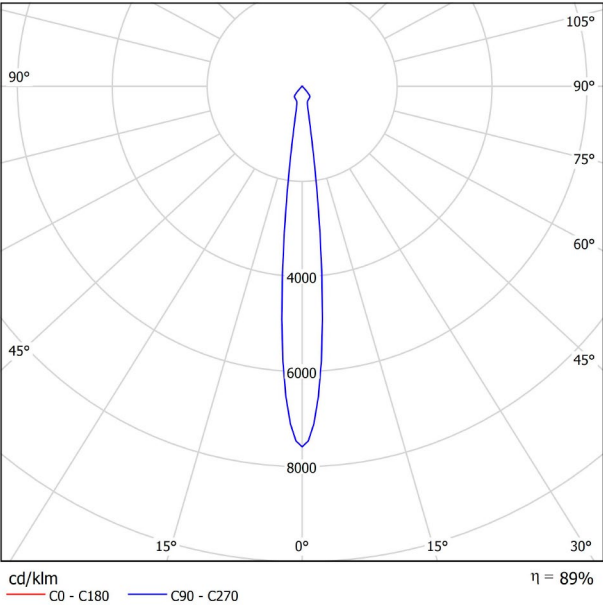

CONICAL DIAGRAM

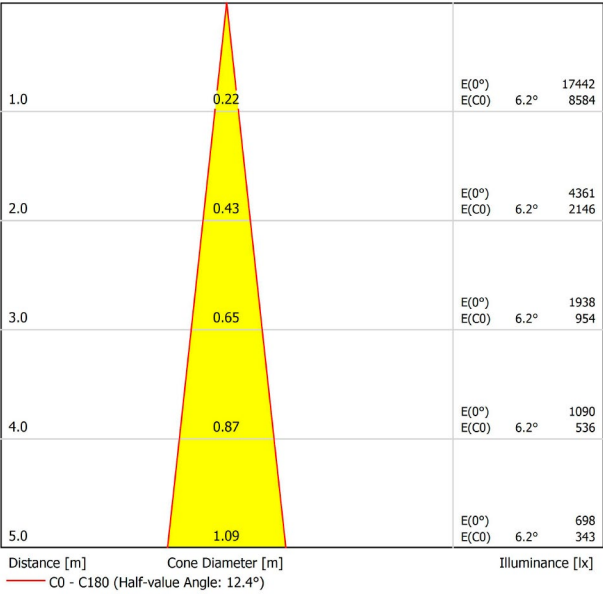




	PRODUCT
Model	Anti-glare Honeycomb Louver
Reference	A382-00-00
Category	Accessories
	NOT SOLD SEPARATELY.



Accessory made up of louver in the shape of a honeycomb panel to reduce glare and the effects of direct rays of vision.



DIMENSIONS




ACCESSORIES

ANTI-GLARE HONEYCOMB
LOUVER

PRODUCT

Name	WELLIT L TUNABLE WHITE 12° WT
Reference	A3820218WT
Color	Textured white
RAL	9016
Category	CEILING RECESSED

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	2300 Lm
Power	21,5 W
Power values of the system	21,5 W
Colour temperature	Tunable White 2700 - 5000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 3
Light beam angle	12°
Lighting efficiency	89%
Efficacy	107 Lm/W
Current intensity	600 mA
Dimming	Please Consult
Control through bluetooth	Please Consult
Driver	Included
Emergency power supply	Please Consult
Electrical insulation class	
Voltage	230 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tj=85°C) >55.000h


OTHER DATA

Ingress Protection	IP20
Recess measurements	Ø133 mm.
Swivel angle	25°
Rotation angle	355°
Weight	998 g.
Packaged weight	1143 g.
Packaging dimensions	208 × 164 × 132 mm
Units per package	1
Materials	Aluminium / Polycarbonate





Wellit is a family of recessed luminaires, that comes in 3 sizes and can be adjusted with a rotation and tilting system. Wellit offers outstanding technical features. It is a compact product: its 3 sizes are consistent with a luminous flux level that is commensurate with its dimensions. It is also noteworthy for its efficient thermal management thanks to an excellently designed dissipation system. With Wellit, the interior designer will have great versatility in terms of applications, for general, retail and contract lighting.

POLAR DIAGRAM

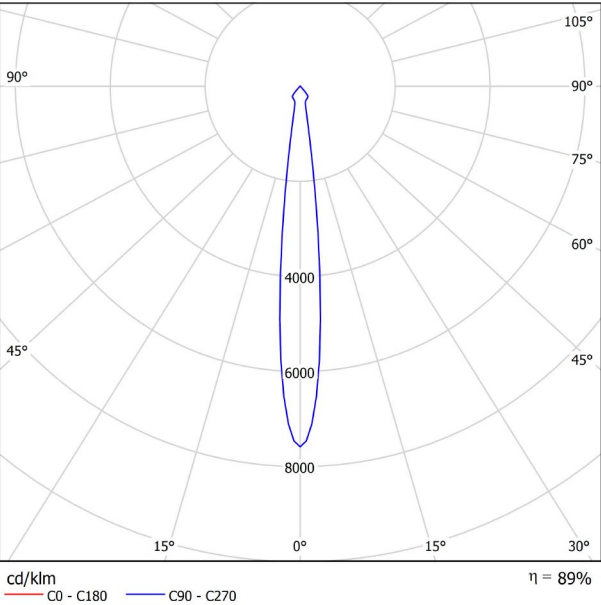

CONICAL DIAGRAM

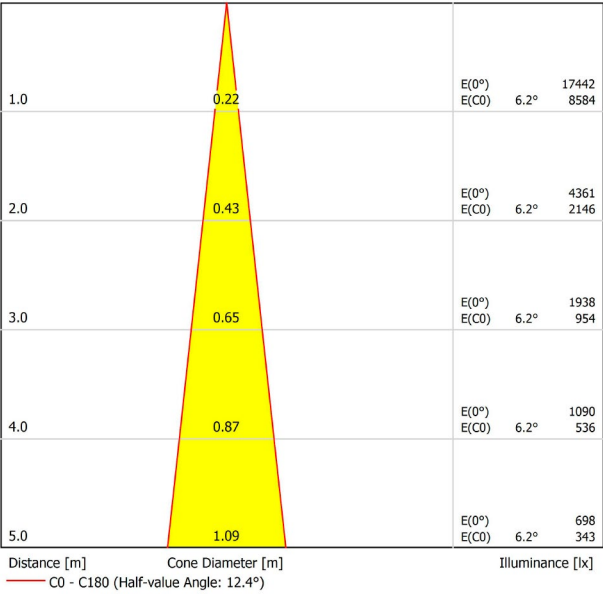





PRODUCT	
Model	Anti-glare Honeycomb Louver
Reference	A382-00-00
Category	Accessories
NOT SOLD SEPARATELY.	



Accessory made up of louver in the shape of a honeycomb panel to reduce glare and the effects of direct rays of vision.



DIMENSIONS




ACCESSORIES

ANTI-GLARE HONEYCOMB
LOUVER

PRODUCT

Name	WELLIT L TUNABLE WHITE 21° NT
Reference	A3820228NT
Color	Textured black
RAL	9005
Category	CEILING RECESSED

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	2300 Lm
Power	21,5 W
Power values of the system	21,5 W
Colour temperature	Tunable White 2700 - 5000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 3
Light beam angle	21°
Lighting efficiency	84%
Efficacy	107 Lm/W
Current intensity	600 mA
Dimming	Please Consult
Control through bluetooth	Please Consult
Driver	Included
Emergency power supply	Please Consult
Electrical insulation class	
Voltage	230 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tj=85°C) >55.000h


OTHER DATA

Ingress Protection	IP20
Recess measurements	Ø133 mm.
Swivel angle	25°
Rotation angle	355°
Weight	998 g.
Packaged weight	1143 g.
Packaging dimensions	208 × 164 × 132 mm
Units per package	1
Materials	Aluminium / Polycarbonate





Wellit is a family of recessed luminaires, that comes in 3 sizes and can be adjusted with a rotation and tilting system. Wellit offers outstanding technical features. It is a compact product: its 3 sizes are consistent with a luminous flux level that is commensurate with its dimensions. It is also noteworthy for its efficient thermal management thanks to an excellently designed dissipation system. With Wellit, the interior designer will have great versatility in terms of applications, for general, retail and contract lighting.

POLAR DIAGRAM

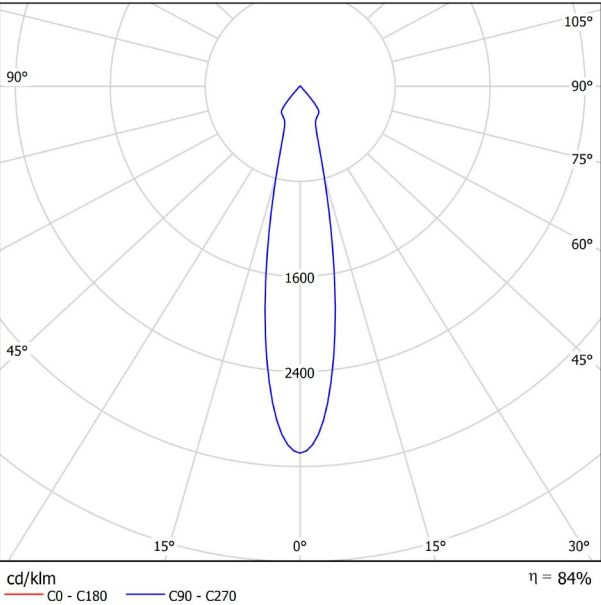

CONICAL DIAGRAM

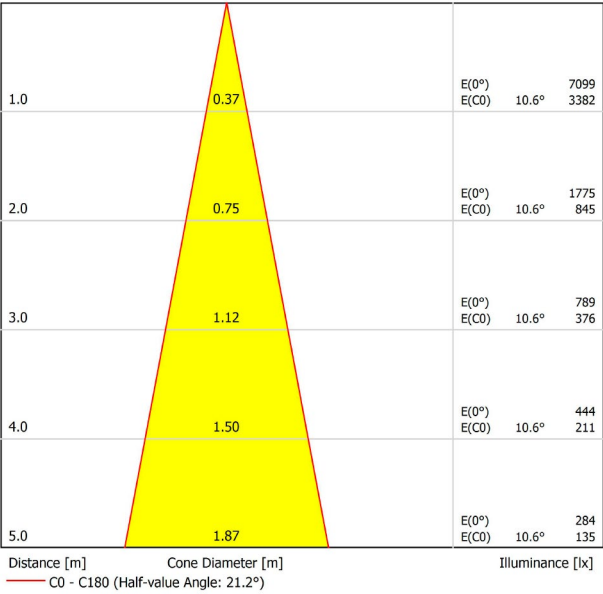




PRODUCT	
Model	Anti-glare Honeycomb Louver
Reference	A382-00-00
Category	Accessories
NOT SOLD SEPARATELY.	



Accessory made up of louver in the shape of a honeycomb panel to reduce glare and the effects of direct rays of vision.



DIMENSIONS



ACCESSORIES

ANTI-GLARE HONEYCOMB
LOUVER

PRODUCT

Name	WELLIT L TUNABLE WHITE 21° WT
Reference	A3820228WT
Color	Textured white
RAL	9016
Category	CEILING RECESSED

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	2300 Lm
Power	21,5 W
Power values of the system	21,5 W
Colour temperature	Tunable White 2700 - 5000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 3
Light beam angle	21°
Lighting efficiency	84%
Efficacy	107 Lm/W
Current intensity	600 mA
Dimming	Please Consult
Control through bluetooth	Please Consult
Driver	Included
Emergency power supply	Please Consult
Electrical insulation class	□
Voltage	230 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tj=85°C) >55.000h


OTHER DATA

Ingress Protection	IP20
Recess measurements	Ø133 mm.
Swivel angle	25°
Rotation angle	355°
Weight	998 g.
Packaged weight	1143 g.
Packaging dimensions	208 × 164 × 132 mm
Units per package	1
Materials	Aluminium / Polycarbonate





Wellit is a family of recessed luminaires, that comes in 3 sizes and can be adjusted with a rotation and tilting system. Wellit offers outstanding technical features. It is a compact product: its 3 sizes are consistent with a luminous flux level that is commensurate with its dimensions. It is also noteworthy for its efficient thermal management thanks to an excellently designed dissipation system. With Wellit, the interior designer will have great versatility in terms of applications, for general, retail and contract lighting.

POLAR DIAGRAM

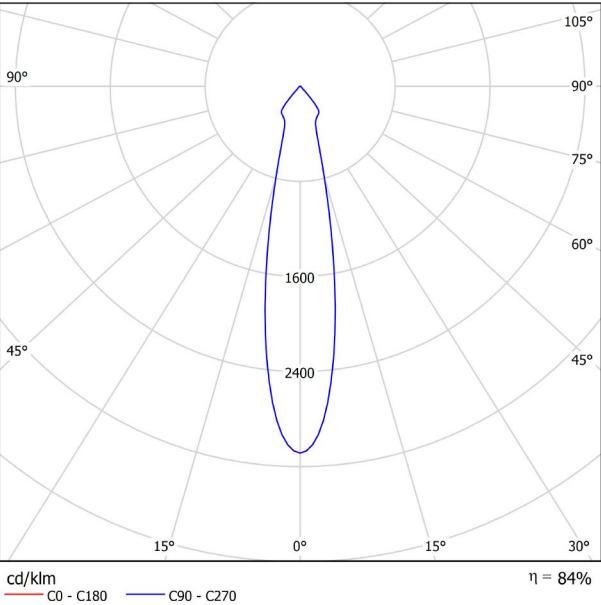

CONICAL DIAGRAM

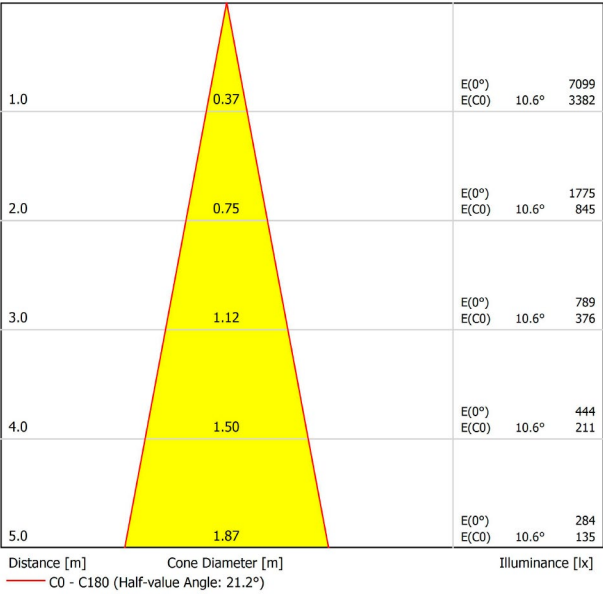




PRODUCT	
Model	Anti-glare Honeycomb Louver
Reference	A382-00-00
Category	Accessories
NOT SOLD SEPARATELY.	



Accessory made up of louver in the shape of a honeycomb panel to reduce glare and the effects of direct rays of vision.



DIMENSIONS



ACCESSORIES

ANTI-GLARE HONEYCOMB
LOUVER

PRODUCT

Name	WELLIT L TUNABLE WHITE 43° NT
Reference	A3820238NT
Color	Textured black
RAL	9005
Category	CEILING RECESSED

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	2300 Lm
Power	21,5 W
Power values of the system	21,5 W
Colour temperature	Tunable White 2700 - 5000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 3
Light beam angle	43°
Lighting efficiency	87%
Efficacy	107 Lm/W
Current intensity	600 mA
Dimming	Please Consult
Control through bluetooth	Please Consult
Driver	Included
Emergency power supply	Please Consult
Electrical insulation class	□
Voltage	230 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tj=85°C) >55.000h


OTHER DATA

Ingress Protection	IP20
Recess measurements	Ø133 mm.
Swivel angle	25°
Rotation angle	355°
Weight	998 g.
Packaged weight	1143 g.
Packaging dimensions	208 × 164 × 132 mm
Units per package	1
Materials	Aluminium / Polycarbonate





Wellit is a family of recessed luminaires, that comes in 3 sizes and can be adjusted with a rotation and tilting system. Wellit offers outstanding technical features. It is a compact product: its 3 sizes are consistent with a luminous flux level that is commensurate with its dimensions. It is also noteworthy for its efficient thermal management thanks to an excellently designed dissipation system. With Wellit, the interior designer will have great versatility in terms of applications, for general, retail and contract lighting.

POLAR DIAGRAM

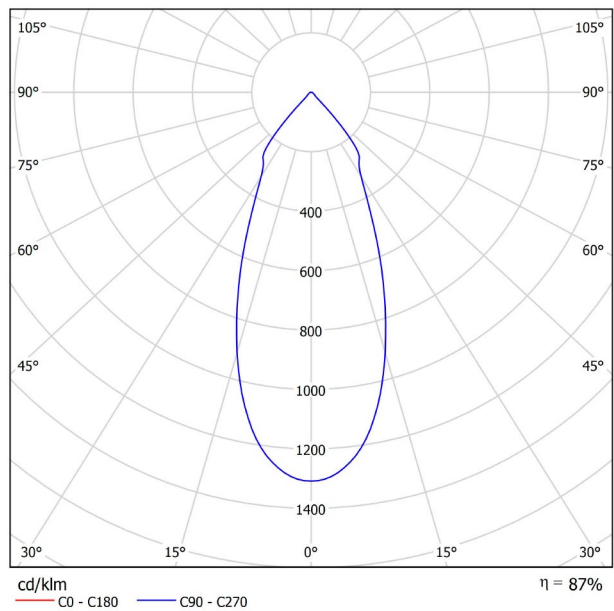

CONICAL DIAGRAM

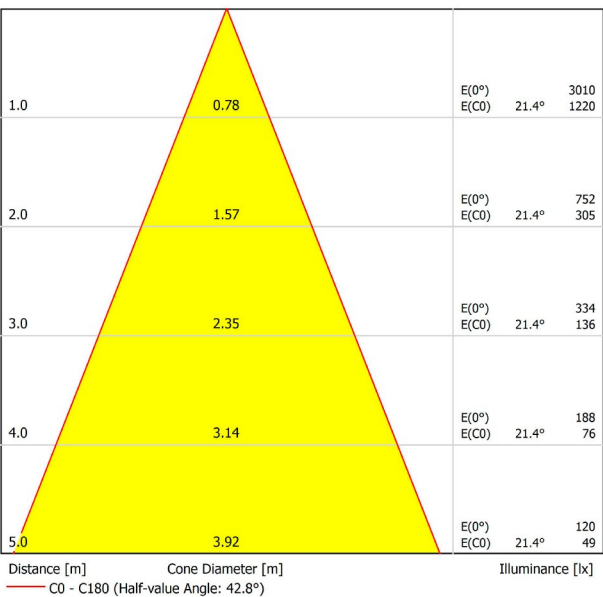




	PRODUCT
Model	Anti-glare Honeycomb Louver
Reference	A382-00-00
Category	Accessories
	NOT SOLD SEPARATELY.



Accessory made up of louver in the shape of a honeycomb panel to reduce glare and the effects of direct rays of vision.



DIMENSIONS



ACCESSORIES



ANTI-GLARE HONEYCOMB LOUVER

PRODUCT

Name	WELLIT L TUNABLE WHITE 43° WT
Reference	A3820238WT
Color	Textured white
RAL	9016
Category	CEILING RECESSED

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	2300 Lm
Power	21,5 W
Power values of the system	21,5 W
Colour temperature	Tunable White 2700 - 5000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 3
Light beam angle	43°
Lighting efficiency	87%
Efficacy	107 Lm/W
Current intensity	600 mA
Dimming	Please Consult
Control through bluetooth	Please Consult
Driver	Included
Emergency power supply	Please Consult
Electrical insulation class	□
Voltage	230 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tj=85°C) >55.000h


OTHER DATA

Ingress Protection	IP20
Recess measurements	Ø133 mm.
Swivel angle	25°
Rotation angle	355°
Weight	998 g.
Packaged weight	1143 g.
Packaging dimensions	208 × 164 × 132 mm
Units per package	1
Materials	Aluminium / Polycarbonate





Wellit is a family of recessed luminaires, that comes in 3 sizes and can be adjusted with a rotation and tilting system. Wellit offers outstanding technical features. It is a compact product: its 3 sizes are consistent with a luminous flux level that is commensurate with its dimensions. It is also noteworthy for its efficient thermal management thanks to an excellently designed dissipation system. With Wellit, the interior designer will have great versatility in terms of applications, for general, retail and contract lighting.

POLAR DIAGRAM

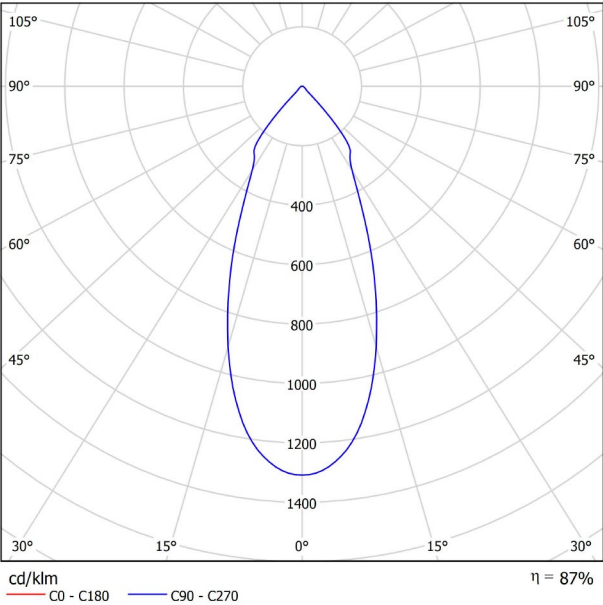

CONICAL DIAGRAM

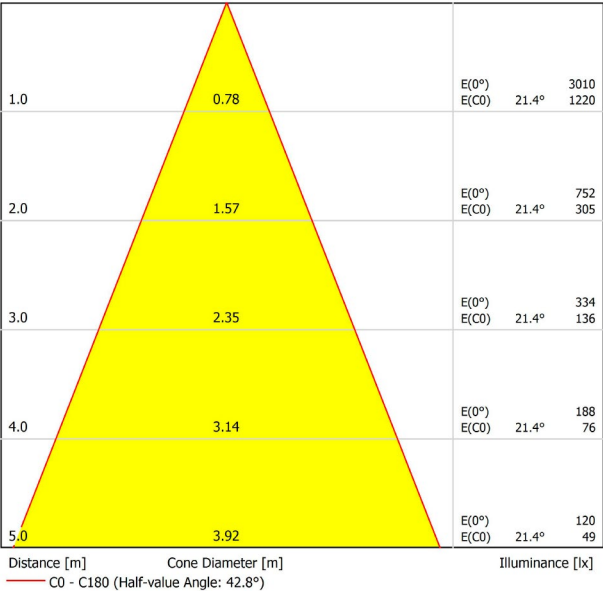




PRODUCT	
Model	Anti-glare Honeycomb Louver
Reference	A382-00-00
Category	Accessories
NOT SOLD SEPARATELY.	



Accessory made up of louver in the shape of a honeycomb panel to reduce glare and the effects of direct rays of vision.



DIMENSIONS



ACCESSORIES

ANTI-GLARE HONEYCOMB
LOUVER

PRODUCT

Name	WELLIT L 1 14° 3000K NT
Reference	A3821111NT
Color	Textured black
RAL	9005
Category	CEILING RECESSED

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	2060 Lm
Power	15 W
Power values of the system	15 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	14°
Lighting efficiency	90%
Efficacy	137 Lm/W
Current intensity	450 mA
Control through bluetooth	Please Consult
Driver	Included
Emergency power supply	Please Consult
Electrical insulation class	<input type="checkbox"/>
Voltage	230 V
Frequency	50/60 Hz
Energy efficiency	A++
LED lifespan	L80B10 (Tj=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Recess measurements	Ø133 mm.
Swivel angle	25°
Rotation angle	355°
Weight	908 g.
Packaged weight	1053 g.
Packaging dimensions	208 x 164 x 132 mm
Units per package	1
Materials	Aluminium / Polycarbonate





Wellit is a family of recessed luminaires, that comes in 3 sizes and can be adjusted with a rotation and tilting system. Wellit offers outstanding technical features. It is a compact product: its 3 sizes are consistent with a luminous flux level that is commensurate with its dimensions. It is also noteworthy for its efficient thermal management thanks to an excellently designed dissipation system. With Wellit, the interior designer will have great versatility in terms of applications, for general, retail and contract lighting.

POLAR DIAGRAM

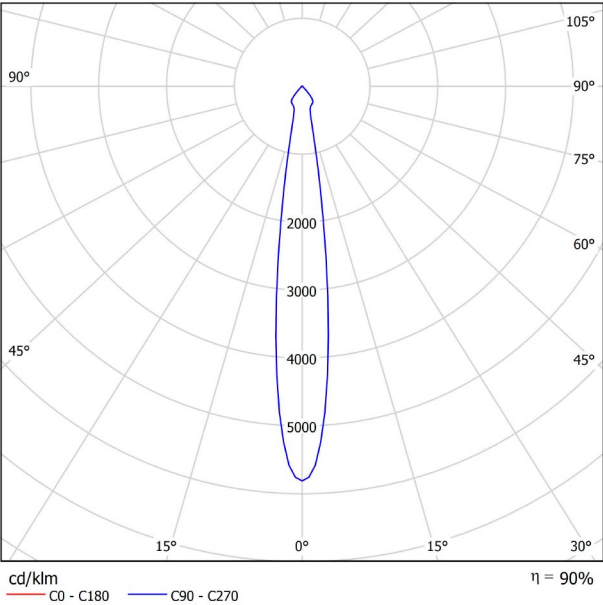

CONICAL DIAGRAM

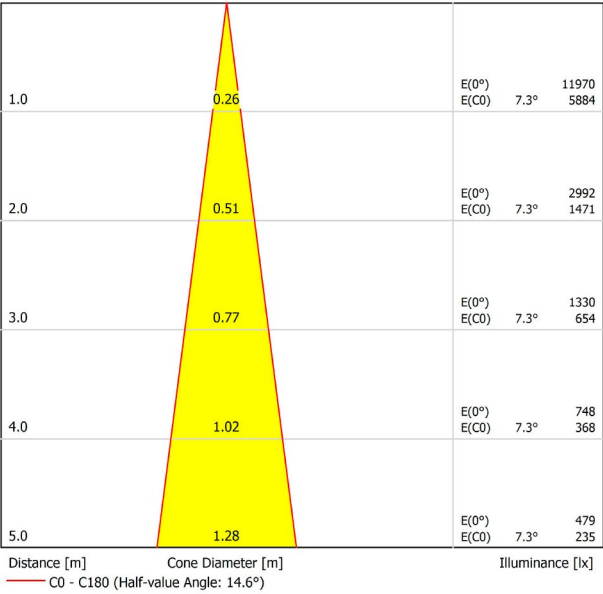




PRODUCT	
Model	Anti-glare Honeycomb Louver
Reference	A382-00-00
Category	Accessories
NOT SOLD SEPARATELY.	



Accessory made up of louver in the shape of a honeycomb panel to reduce glare and the effects of direct rays of vision.



DIMENSIONS



ACCESSORIES

ANTI-GLARE HONEYCOMB
LOUVER

PRODUCT

Name	WELLIT L 1 14° 3000K WT
Reference	A3821111WT
Color	Textured white
RAL	9016
Category	CEILING RECESSED

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	2060 Lm
Power	15 W
Power values of the system	15 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	14°
Lighting efficiency	90%
Efficacy	137 Lm/W
Current intensity	450 mA
Control through bluetooth	Please Consult
Driver	Included
Emergency power supply	Please Consult
Electrical insulation class	<input type="checkbox"/>
Voltage	230 V
Frequency	50/60 Hz
Energy efficiency	A++
LED lifespan	L80B10 (Tj=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Recess measurements	Ø133 mm.
Swivel angle	25°
Rotation angle	355°
Weight	908 g.
Packaged weight	1053 g.
Packaging dimensions	208 x 164 x 132 mm
Units per package	1
Materials	Aluminium / Polycarbonate





Wellit is a family of recessed luminaires, that comes in 3 sizes and can be adjusted with a rotation and tilting system. Wellit offers outstanding technical features. It is a compact product: its 3 sizes are consistent with a luminous flux level that is commensurate with its dimensions. It is also noteworthy for its efficient thermal management thanks to an excellently designed dissipation system. With Wellit, the interior designer will have great versatility in terms of applications, for general, retail and contract lighting.

POLAR DIAGRAM

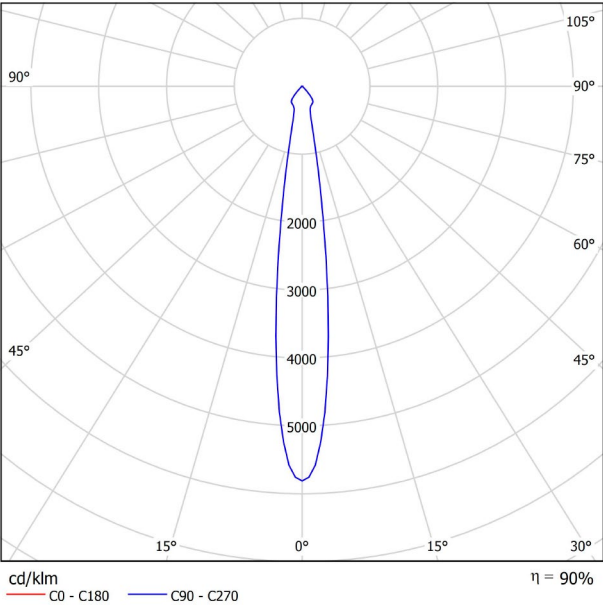

CONICAL DIAGRAM

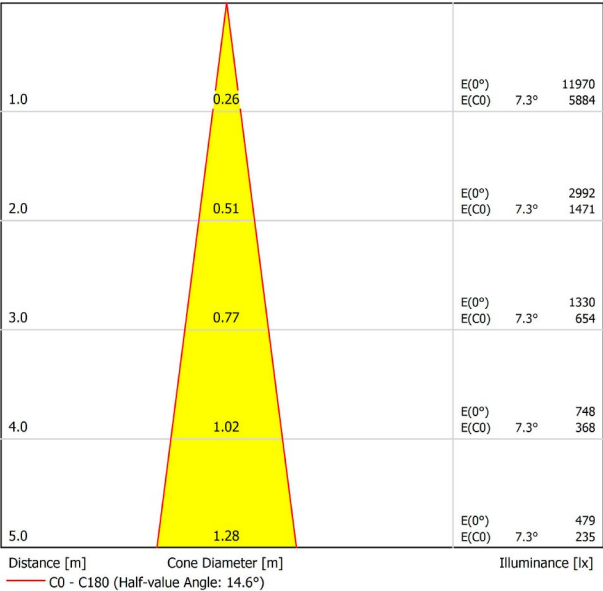




PRODUCT	
Model	Anti-glare Honeycomb Louver
Reference	A382-00-00
Category	Accessories
NOT SOLD SEPARATELY.	



Accessory made up of louver in the shape of a honeycomb panel to reduce glare and the effects of direct rays of vision.



DIMENSIONS



ACCESSORIES

ANTI-GLARE HONEYCOMB
LOUVER

PRODUCT

Name	WELLIT L 1 14° 4000K NT
Reference	A3821112NT
Color	Textured black
RAL	9005
Category	CEILING RECESSED

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	2100 Lm
Power	15 W
Power values of the system	15 W
Colour temperature	4000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	14°
Lighting efficiency	90%
Efficacy	140 Lm/W
Current intensity	450 mA
Control through bluetooth	Please Consult
Driver	Included
Emergency power supply	Please Consult
Electrical insulation class	<input type="checkbox"/>
Voltage	230 V
Frequency	50/60 Hz
Energy efficiency	A++
LED lifespan	L80B10 (Tj=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Recess measurements	Ø133 mm.
Swivel angle	25°
Rotation angle	355°
Weight	908 g.
Packaged weight	1053 g.
Packaging dimensions	208 x 164 x 132 mm
Units per package	1
Materials	Aluminium / Polycarbonate





Wellit is a family of recessed luminaires, that comes in 3 sizes and can be adjusted with a rotation and tilting system. Wellit offers outstanding technical features. It is a compact product: its 3 sizes are consistent with a luminous flux level that is commensurate with its dimensions. It is also noteworthy for its efficient thermal management thanks to an excellently designed dissipation system. With Wellit, the interior designer will have great versatility in terms of applications, for general, retail and contract lighting.

POLAR DIAGRAM

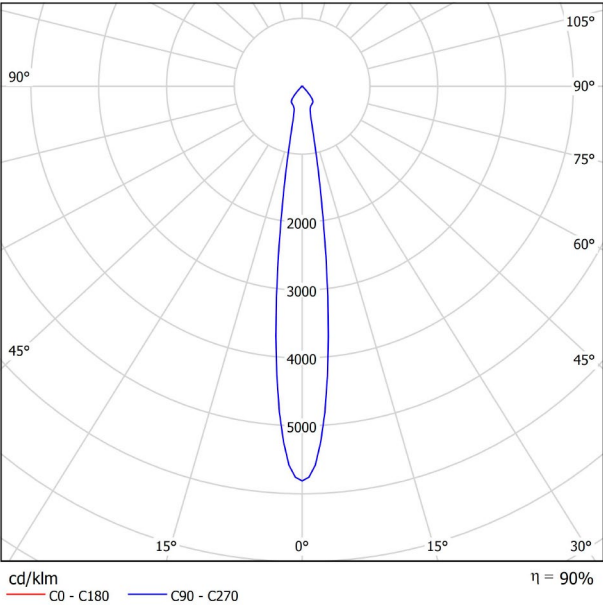

CONICAL DIAGRAM

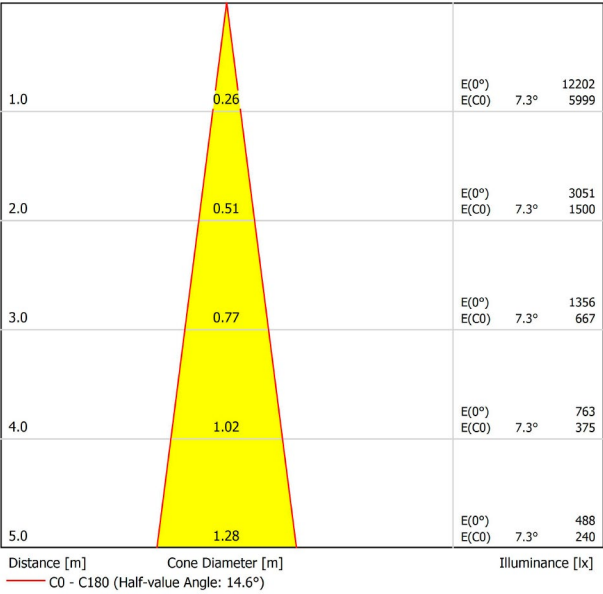




	PRODUCT
Model	Anti-glare Honeycomb Louver
Reference	A382-00-00
Category	Accessories
	NOT SOLD SEPARATELY.



Accessory made up of louver in the shape of a honeycomb panel to reduce glare and the effects of direct rays of vision.



DIMENSIONS



ACCESSORIES

ANTI-GLARE HONEYCOMB
LOUVER

PRODUCT

Name	WELLIT L 1 14° 4000K WT
Reference	A3821112WT
Color	Textured white
RAL	9016
Category	CEILING RECESSED

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	2100 Lm
Power	15 W
Power values of the system	15 W
Colour temperature	4000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	14°
Lighting efficiency	90%
Efficacy	140 Lm/W
Current intensity	450 mA
Control through bluetooth	Please Consult
Driver	Included
Emergency power supply	Please Consult
Electrical insulation class	<input type="checkbox"/>
Voltage	230 V
Frequency	50/60 Hz
Energy efficiency	A++
LED lifespan	L80B10 (Tj=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Recess measurements	Ø133 mm.
Swivel angle	25°
Rotation angle	355°
Weight	908 g.
Packaged weight	1053 g.
Packaging dimensions	208 x 164 x 132 mm
Units per package	1
Materials	Aluminium / Polycarbonate





Wellit is a family of recessed luminaires, that comes in 3 sizes and can be adjusted with a rotation and tilting system. Wellit offers outstanding technical features. It is a compact product: its 3 sizes are consistent with a luminous flux level that is commensurate with its dimensions. It is also noteworthy for its efficient thermal management thanks to an excellently designed dissipation system. With Wellit, the interior designer will have great versatility in terms of applications, for general, retail and contract lighting.

POLAR DIAGRAM

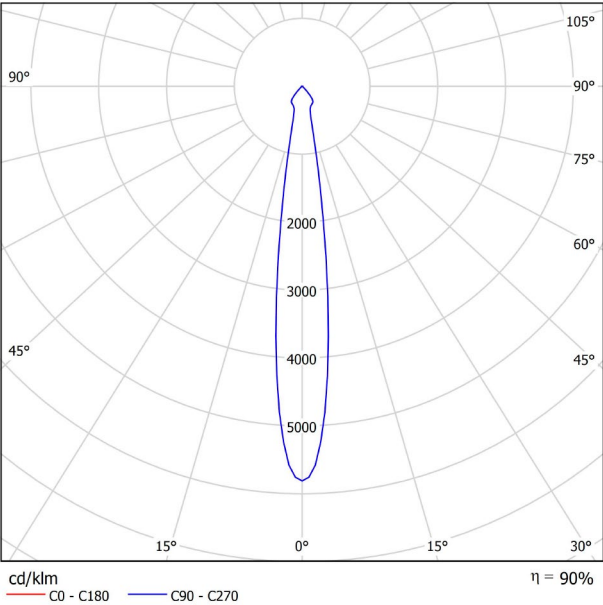

CONICAL DIAGRAM

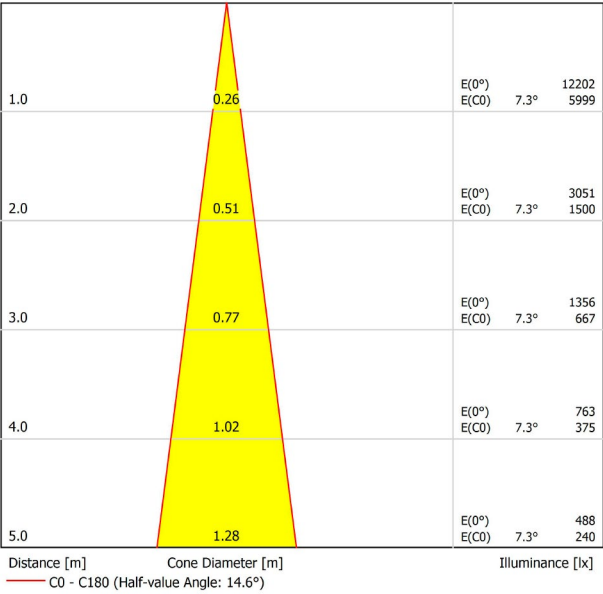




	PRODUCT
Model	Anti-glare Honeycomb Louver
Reference	A382-00-00
Category	Accessories
	NOT SOLD SEPARATELY.



Accessory made up of louver in the shape of a honeycomb panel to reduce glare and the effects of direct rays of vision.



DIMENSIONS



ACCESSORIES

ANTI-GLARE HONEYCOMB
LOUVER

PRODUCT

Name	WELLIT L 1 22° 3000K NT
Reference	A3821121NT
Color	Textured black
RAL	9005
Category	CEILING RECESSED

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	2060 Lm
Power	15 W
Power values of the system	15 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	22°
Lighting efficiency	90%
Efficacy	137 Lm/W
Current intensity	450 mA
Control through bluetooth	Please Consult
Driver	Included
Emergency power supply	Please Consult
Electrical insulation class	<input type="checkbox"/>
Voltage	230 V
Frequency	50/60 Hz
Energy efficiency	A++
LED lifespan	L80B10 (Tj=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Recess measurements	Ø133 mm.
Swivel angle	25°
Rotation angle	355°
Weight	908 g.
Packaged weight	1053 g.
Packaging dimensions	208 x 164 x 132 mm
Units per package	1
Materials	Aluminium / Polycarbonate





Wellit is a family of recessed luminaires, that comes in 3 sizes and can be adjusted with a rotation and tilting system. Wellit offers outstanding technical features. It is a compact product: its 3 sizes are consistent with a luminous flux level that is commensurate with its dimensions. It is also noteworthy for its efficient thermal management thanks to an excellently designed dissipation system. With Wellit, the interior designer will have great versatility in terms of applications, for general, retail and contract lighting.

POLAR DIAGRAM

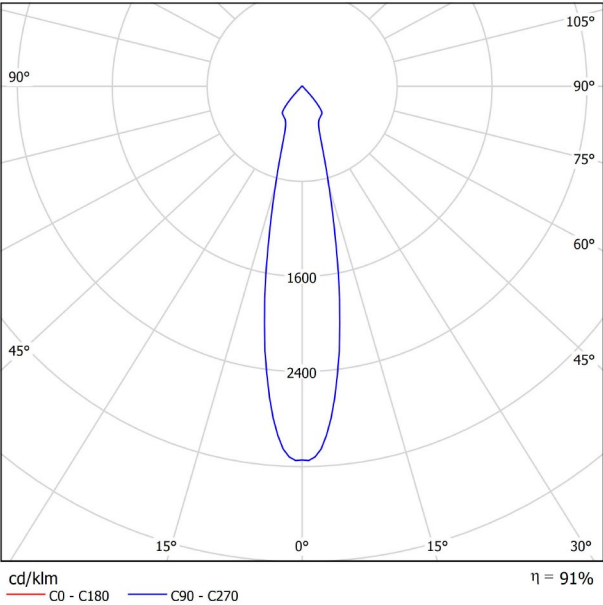

CONICAL DIAGRAM

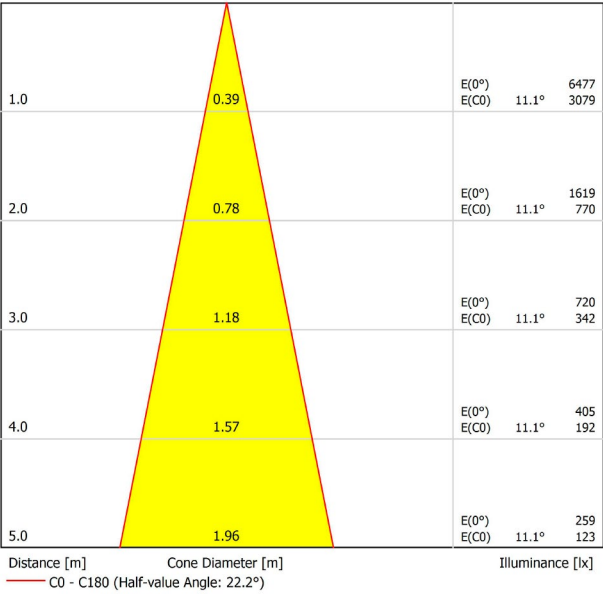




PRODUCT	
Model	Anti-glare Honeycomb Louver
Reference	A382-00-00
Category	Accessories
NOT SOLD SEPARATELY.	



Accessory made up of louver in the shape of a honeycomb panel to reduce glare and the effects of direct rays of vision.



DIMENSIONS



ACCESSORIES

ANTI-GLARE HONEYCOMB
LOUVER

PRODUCT

Name	WELLIT L 1 22° 3000K WT
Reference	A3821121WT
Color	Textured white
RAL	9016
Category	CEILING RECESSED

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	2060 Lm
Power	15 W
Power values of the system	15 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	22°
Lighting efficiency	90%
Efficacy	137 Lm/W
Current intensity	450 mA
Control through bluetooth	Please Consult
Driver	Included
Emergency power supply	Please Consult
Electrical insulation class	<input type="checkbox"/>
Voltage	230 V
Frequency	50/60 Hz
Energy efficiency	A++
LED lifespan	L80B10 (Tj=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Recess measurements	Ø133 mm.
Swivel angle	25°
Rotation angle	355°
Weight	908 g.
Packaged weight	1053 g.
Packaging dimensions	208 x 164 x 132 mm
Units per package	1
Materials	Aluminium / Polycarbonate





Wellit is a family of recessed luminaires, that comes in 3 sizes and can be adjusted with a rotation and tilting system. Wellit offers outstanding technical features. It is a compact product: its 3 sizes are consistent with a luminous flux level that is commensurate with its dimensions. It is also noteworthy for its efficient thermal management thanks to an excellently designed dissipation system. With Wellit, the interior designer will have great versatility in terms of applications, for general, retail and contract lighting.

POLAR DIAGRAM

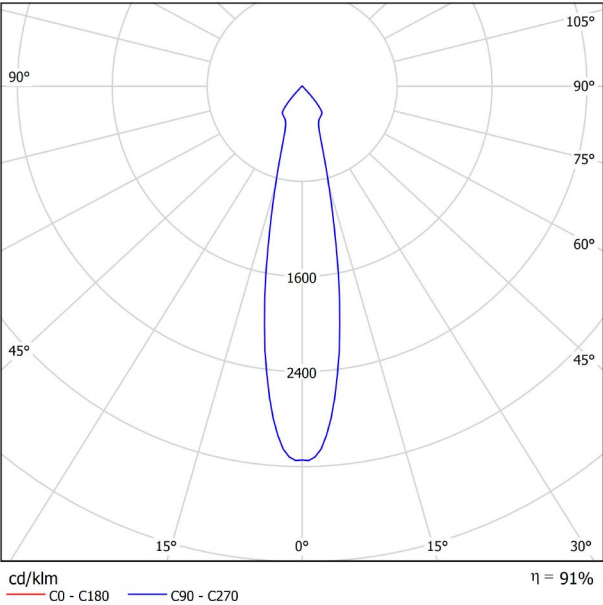

CONICAL DIAGRAM

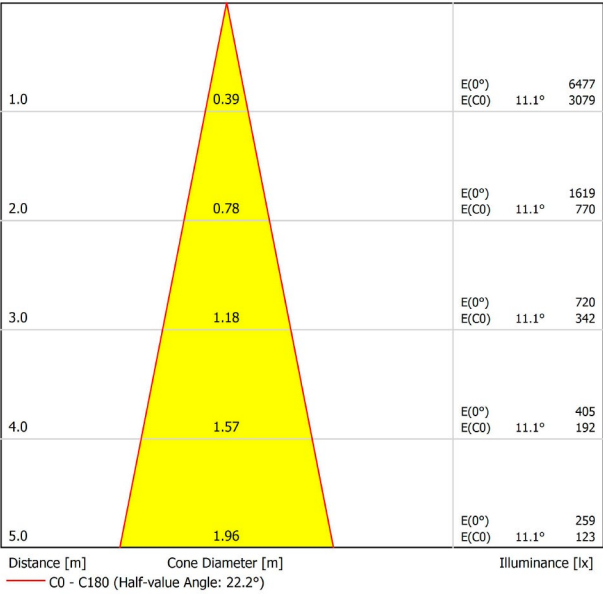




	PRODUCT
Model	Anti-glare Honeycomb Louver
Reference	A382-00-00
Category	Accessories
	NOT SOLD SEPARATELY.



Accessory made up of louver in the shape of a honeycomb panel to reduce glare and the effects of direct rays of vision.



DIMENSIONS



ACCESSORIES

ANTI-GLARE HONEYCOMB
LOUVER

PRODUCT

Name	WELLIT L 1 22° 4000K NT
Reference	A3821122NT
Color	Textured black
RAL	9005
Category	CEILING RECESSED

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	2100 Lm
Power	15 W
Power values of the system	15 W
Colour temperature	4000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	22°
Lighting efficiency	90%
Efficacy	140 Lm/W
Current intensity	450 mA
Control through bluetooth	Please Consult
Driver	Included
Emergency power supply	Please Consult
Electrical insulation class	<input type="checkbox"/>
Voltage	230 V
Frequency	50/60 Hz
Energy efficiency	A++
LED lifespan	L80B10 (Tj=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Recess measurements	Ø133 mm.
Swivel angle	25°
Rotation angle	355°
Weight	908 g.
Packaged weight	1053 g.
Packaging dimensions	208 x 164 x 132 mm
Units per package	1
Materials	Aluminium / Polycarbonate





Wellit is a family of recessed luminaires, that comes in 3 sizes and can be adjusted with a rotation and tilting system. Wellit offers outstanding technical features. It is a compact product: its 3 sizes are consistent with a luminous flux level that is commensurate with its dimensions. It is also noteworthy for its efficient thermal management thanks to an excellently designed dissipation system. With Wellit, the interior designer will have great versatility in terms of applications, for general, retail and contract lighting.

POLAR DIAGRAM

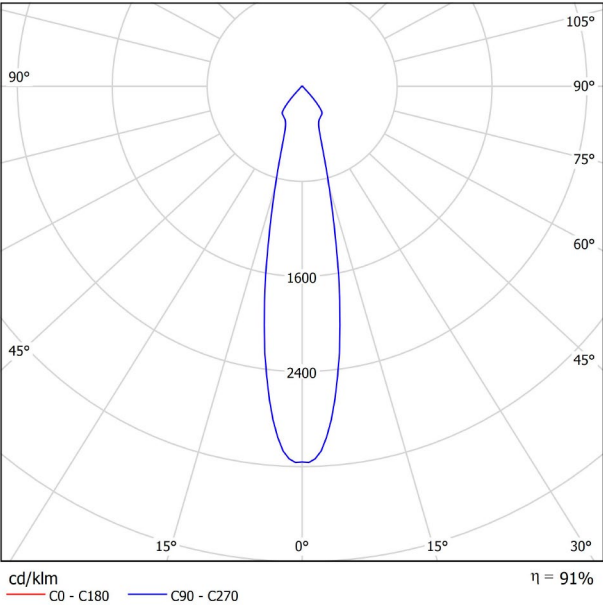

CONICAL DIAGRAM

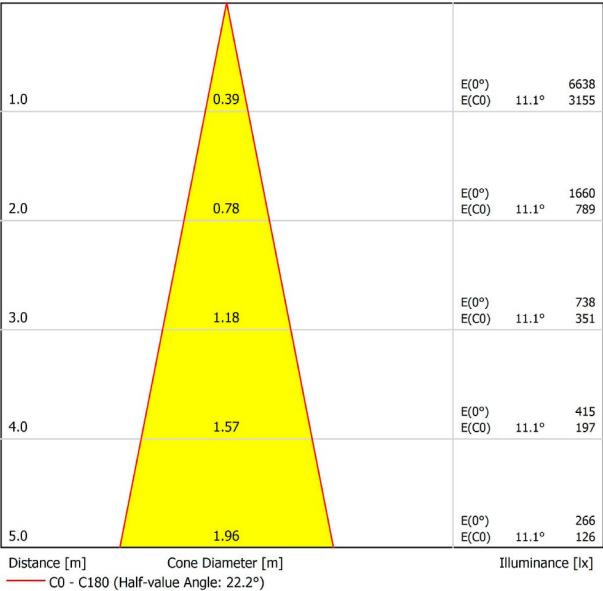




PRODUCT	
Model	Anti-glare Honeycomb Louver
Reference	A382-00-00
Category	Accessories
NOT SOLD SEPARATELY.	



Accessory made up of louver in the shape of a honeycomb panel to reduce glare and the effects of direct rays of vision.



DIMENSIONS



ACCESSORIES

ANTI-GLARE HONEYCOMB
LOUVER

PRODUCT

Name	WELLIT L 1 22° 4000K WT
Reference	A3821122WT
Color	Textured white
RAL	9016
Category	CEILING RECESSED

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	2100 Lm
Power	15 W
Power values of the system	15 W
Colour temperature	4000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	22°
Lighting efficiency	90%
Efficacy	140 Lm/W
Current intensity	450 mA
Control through bluetooth	Please Consult
Driver	Included
Emergency power supply	Please Consult
Electrical insulation class	<input type="checkbox"/>
Voltage	230 V
Frequency	50/60 Hz
Energy efficiency	A++
LED lifespan	L80B10 (Tj=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Recess measurements	Ø133 mm.
Swivel angle	25°
Rotation angle	355°
Weight	908 g.
Packaged weight	1053 g.
Packaging dimensions	208 x 164 x 132 mm
Units per package	1
Materials	Aluminium / Polycarbonate





Wellit is a family of recessed luminaires, that comes in 3 sizes and can be adjusted with a rotation and tilting system. Wellit offers outstanding technical features. It is a compact product: its 3 sizes are consistent with a luminous flux level that is commensurate with its dimensions. It is also noteworthy for its efficient thermal management thanks to an excellently designed dissipation system. With Wellit, the interior designer will have great versatility in terms of applications, for general, retail and contract lighting.

POLAR DIAGRAM

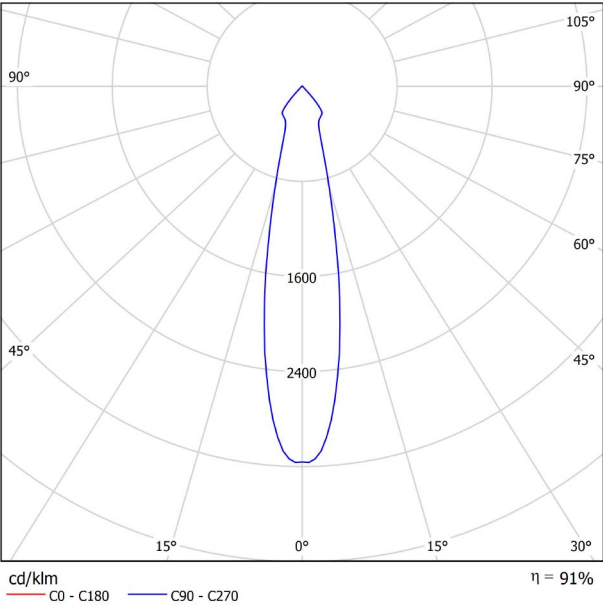

CONICAL DIAGRAM

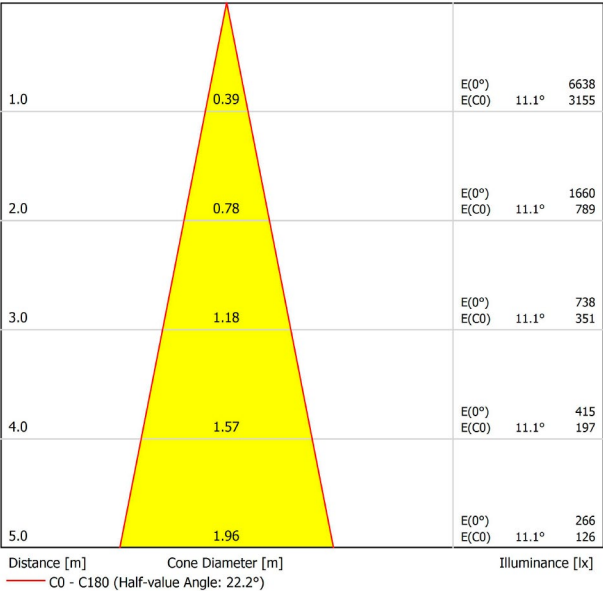




PRODUCT	
Model	Anti-glare Honeycomb Louver
Reference	A382-00-00
Category	Accessories
NOT SOLD SEPARATELY.	



Accessory made up of louver in the shape of a honeycomb panel to reduce glare and the effects of direct rays of vision.



DIMENSIONS



ACCESSORIES

ANTI-GLARE HONEYCOMB
LOUVER

PRODUCT

Name	WELLIT L 1 42° 3000K NT
Reference	A3821131NT
Color	Textured black
RAL	9005
Category	CEILING RECESSED

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	2060 Lm
Power	15 W
Power values of the system	15 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	42°
Lighting efficiency	91%
Efficacy	137 Lm/W
Current intensity	450 mA
Control through bluetooth	Please Consult
Driver	Included
Emergency power supply	Please Consult
Electrical insulation class	<input type="checkbox"/>
Voltage	230 V
Frequency	50/60 Hz
Energy efficiency	A++
LED lifespan	L80B10 (Tj=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Recess measurements	Ø133 mm.
Swivel angle	25°
Rotation angle	355°
Weight	908 g.
Packaged weight	1053 g.
Packaging dimensions	208 x 164 x 132 mm
Units per package	1
Materials	Aluminium / Polycarbonate





Wellit is a family of recessed luminaires, that comes in 3 sizes and can be adjusted with a rotation and tilting system. Wellit offers outstanding technical features. It is a compact product: its 3 sizes are consistent with a luminous flux level that is commensurate with its dimensions. It is also noteworthy for its efficient thermal management thanks to an excellently designed dissipation system. With Wellit, the interior designer will have great versatility in terms of applications, for general, retail and contract lighting.

POLAR DIAGRAM

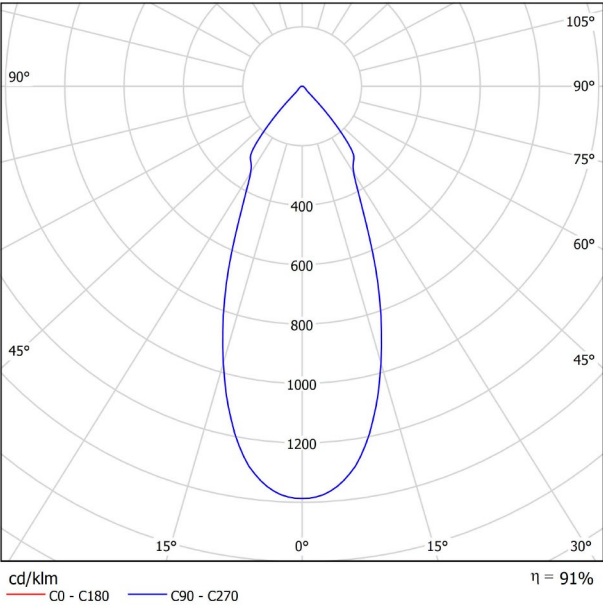

CONICAL DIAGRAM

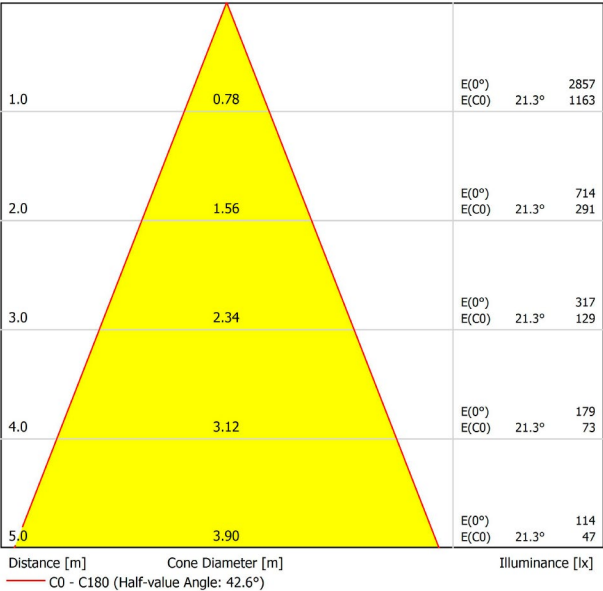




	PRODUCT
Model	Anti-glare Honeycomb Louver
Reference	A382-00-00
Category	Accessories
	NOT SOLD SEPARATELY.



Accessory made up of louver in the shape of a honeycomb panel to reduce glare and the effects of direct rays of vision.



DIMENSIONS



ACCESSORIES

ANTI-GLARE HONEYCOMB
LOUVER

PRODUCT

Name	WELLIT L 1 42° 3000K WT
Reference	A3821131WT
Color	Textured white
RAL	9016
Category	CEILING RECESSED

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	2060 Lm
Power	15 W
Power values of the system	15 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	42°
Lighting efficiency	91%
Efficacy	137 Lm/W
Current intensity	450 mA
Control through bluetooth	Please Consult
Driver	Included
Emergency power supply	Please Consult
Electrical insulation class	<input type="checkbox"/>
Voltage	230 V
Frequency	50/60 Hz
Energy efficiency	A++
LED lifespan	L80B10 (Tj=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Recess measurements	Ø133 mm.
Swivel angle	25°
Rotation angle	355°
Weight	908 g.
Packaged weight	1053 g.
Packaging dimensions	208 x 164 x 132 mm
Units per package	1
Materials	Aluminium / Polycarbonate





Wellit is a family of recessed luminaires, that comes in 3 sizes and can be adjusted with a rotation and tilting system. Wellit offers outstanding technical features. It is a compact product: its 3 sizes are consistent with a luminous flux level that is commensurate with its dimensions. It is also noteworthy for its efficient thermal management thanks to an excellently designed dissipation system. With Wellit, the interior designer will have great versatility in terms of applications, for general, retail and contract lighting.

POLAR DIAGRAM

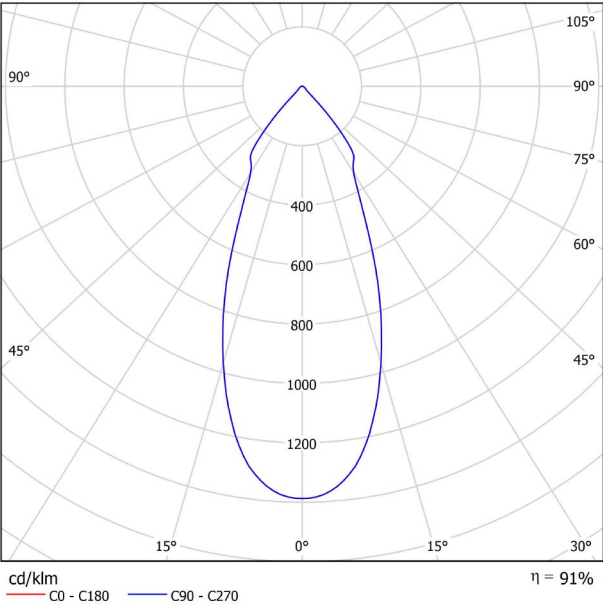

CONICAL DIAGRAM

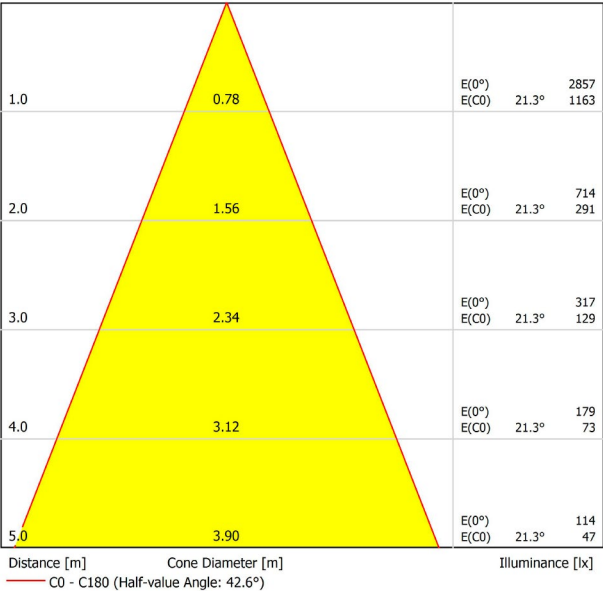




PRODUCT	
Model	Anti-glare Honeycomb Louver
Reference	A382-00-00
Category	Accessories
NOT SOLD SEPARATELY.	



Accessory made up of louver in the shape of a honeycomb panel to reduce glare and the effects of direct rays of vision.



DIMENSIONS



ACCESSORIES

ANTI-GLARE HONEYCOMB
LOUVER

PRODUCT

Name	WELLIT L 1 42° 4000K NT
Reference	A3821132NT
Color	Textured black
RAL	9005
Category	CEILING RECESSED

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	2100 Lm
Power	15 W
Power values of the system	15 W
Colour temperature	4000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	42°
Lighting efficiency	91%
Efficacy	140 Lm/W
Current intensity	450 mA
Control through bluetooth	Please Consult
Driver	Included
Emergency power supply	Please Consult
Electrical insulation class	<input type="checkbox"/>
Voltage	230 V
Frequency	50/60 Hz
Energy efficiency	A++
LED lifespan	L80B10 (Tj=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Recess measurements	Ø133 mm.
Swivel angle	25°
Rotation angle	355°
Weight	908 g.
Packaged weight	1053 g.
Packaging dimensions	208 x 164 x 132 mm
Units per package	1
Materials	Aluminium / Polycarbonate





Wellit is a family of recessed luminaires, that comes in 3 sizes and can be adjusted with a rotation and tilting system. Wellit offers outstanding technical features. It is a compact product: its 3 sizes are consistent with a luminous flux level that is commensurate with its dimensions. It is also noteworthy for its efficient thermal management thanks to an excellently designed dissipation system. With Wellit, the interior designer will have great versatility in terms of applications, for general, retail and contract lighting.

POLAR DIAGRAM

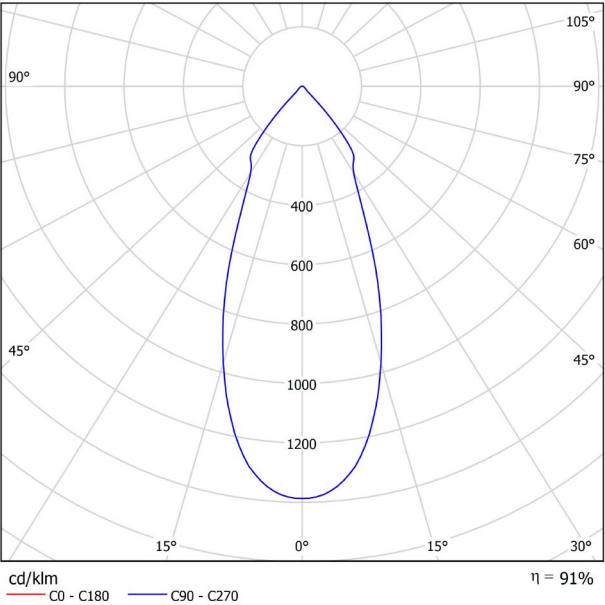

CONICAL DIAGRAM

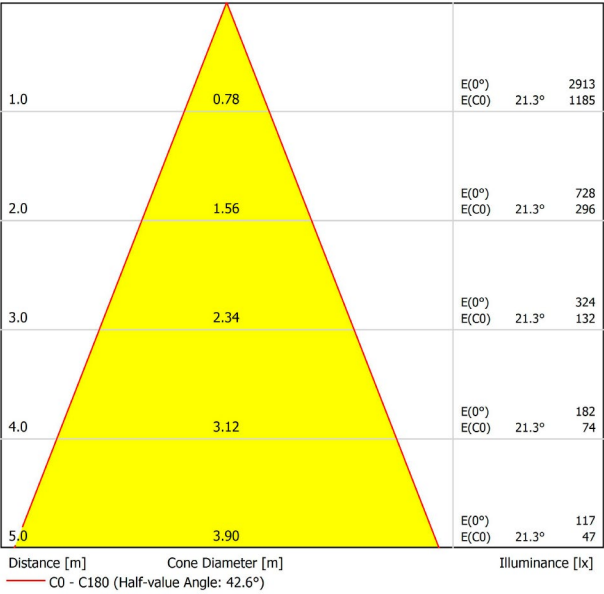




	PRODUCT
Model	Anti-glare Honeycomb Louver
Reference	A382-00-00
Category	Accessories
	NOT SOLD SEPARATELY.



Accessory made up of louver in the shape of a honeycomb panel to reduce glare and the effects of direct rays of vision.



DIMENSIONS



ACCESSORIES

ANTI-GLARE HONEYCOMB
LOUVER

PRODUCT

Name	WELLIT L 1 42° 4000K WT
Reference	A3821132WT
Color	Textured white
RAL	9016
Category	CEILING RECESSED

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	2100 Lm
Power	15 W
Power values of the system	15 W
Colour temperature	4000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	42°
Lighting efficiency	91%
Efficacy	140 Lm/W
Current intensity	450 mA
Control through bluetooth	Please Consult
Driver	Included
Emergency power supply	Please Consult
Electrical insulation class	<input type="checkbox"/>
Voltage	230 V
Frequency	50/60 Hz
Energy efficiency	A++
LED lifespan	L80B10 (Tj=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Recess measurements	Ø133 mm.
Swivel angle	25°
Rotation angle	355°
Weight	908 g.
Packaged weight	1053 g.
Packaging dimensions	208 x 164 x 132 mm
Units per package	1
Materials	Aluminium / Polycarbonate





Wellit is a family of recessed luminaires, that comes in 3 sizes and can be adjusted with a rotation and tilting system. Wellit offers outstanding technical features. It is a compact product: its 3 sizes are consistent with a luminous flux level that is commensurate with its dimensions. It is also noteworthy for its efficient thermal management thanks to an excellently designed dissipation system. With Wellit, the interior designer will have great versatility in terms of applications, for general, retail and contract lighting.

POLAR DIAGRAM

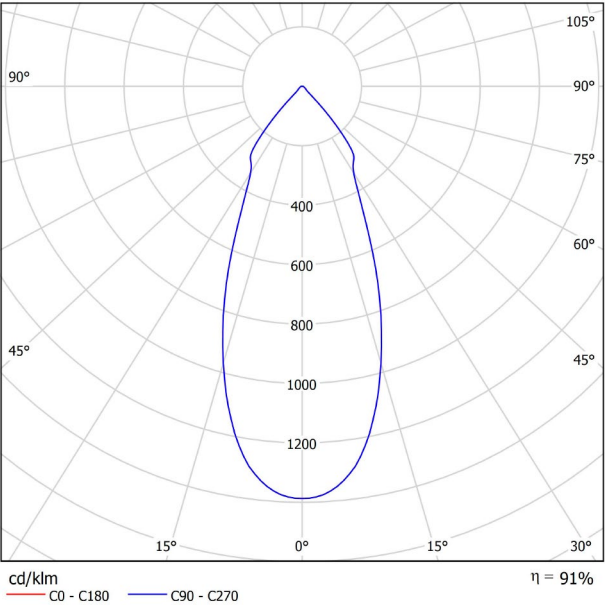

CONICAL DIAGRAM

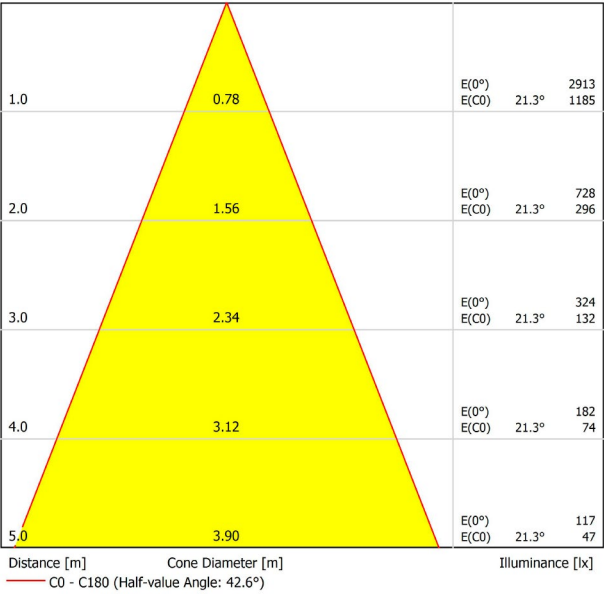





	PRODUCT
Model	Anti-glare Honeycomb Louver
Reference	A382-00-00
Category	Accessories
	NOT SOLD SEPARATELY.



Accessory made up of louver in the shape of a honeycomb panel to reduce glare and the effects of direct rays of vision.



DIMENSIONS



ACCESSORIES

ANTI-GLARE HONEYCOMB
LOUVER

PRODUCT

Name	WELLIT L 2 14° 3000K NT
Reference	A3822111NT
Color	Textured black
RAL	9005
Category	CEILING RECESSED

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	2960 Lm
Power	25 W
Power values of the system	25 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	14°
Lighting efficiency	90%
Efficacy	118 Lm/W
Current intensity	700 mA
Control through bluetooth	Please Consult
Driver	Included
Emergency power supply	Please Consult
Electrical insulation class	<input type="checkbox"/>
Voltage	230 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tj=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Recess measurements	Ø133 mm.
Swivel angle	25°
Rotation angle	355°
Weight	908 g.
Packaged weight	1053 g.
Packaging dimensions	208 x 164 x 132 mm
Units per package	1
Materials	Aluminium / Polycarbonate





Wellit is a family of recessed luminaires, that comes in 3 sizes and can be adjusted with a rotation and tilting system. Wellit offers outstanding technical features. It is a compact product: its 3 sizes are consistent with a luminous flux level that is commensurate with its dimensions. It is also noteworthy for its efficient thermal management thanks to an excellently designed dissipation system. With Wellit, the interior designer will have great versatility in terms of applications, for general, retail and contract lighting.

POLAR DIAGRAM

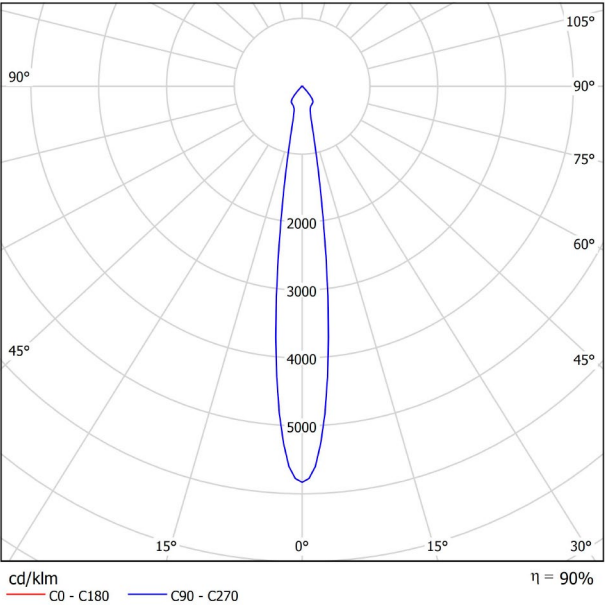

CONICAL DIAGRAM

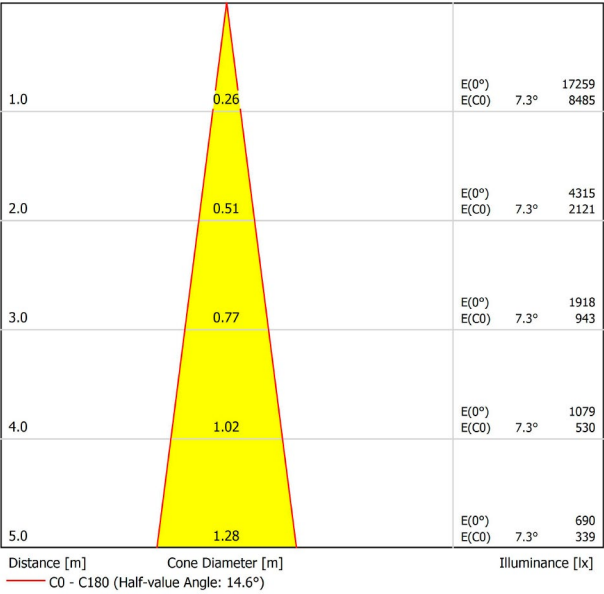




PRODUCT	
Model	Anti-glare Honeycomb Louver
Reference	A382-00-00
Category	Accessories
NOT SOLD SEPARATELY.	



Accessory made up of louver in the shape of a honeycomb panel to reduce glare and the effects of direct rays of vision.



DIMENSIONS



ACCESSORIES

ANTI-GLARE HONEYCOMB
LOUVER

PRODUCT

Name	WELLIT L 2 14° 3000K WT
Reference	A3822111WT
Color	Textured white
RAL	9016
Category	CEILING RECESSED

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	2960 Lm
Power	25 W
Power values of the system	25 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	14°
Lighting efficiency	90%
Efficacy	118 Lm/W
Current intensity	700 mA
Control through bluetooth	Please Consult
Driver	Included
Emergency power supply	Please Consult
Electrical insulation class	<input type="checkbox"/>
Voltage	230 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tj=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Recess measurements	Ø133 mm.
Swivel angle	25°
Rotation angle	355°
Weight	908 g.
Packaged weight	1053 g.
Packaging dimensions	208 x 164 x 132 mm
Units per package	1
Materials	Aluminium / Polycarbonate





Wellit is a family of recessed luminaires, that comes in 3 sizes and can be adjusted with a rotation and tilting system. Wellit offers outstanding technical features. It is a compact product: its 3 sizes are consistent with a luminous flux level that is commensurate with its dimensions. It is also noteworthy for its efficient thermal management thanks to an excellently designed dissipation system. With Wellit, the interior designer will have great versatility in terms of applications, for general, retail and contract lighting.

POLAR DIAGRAM

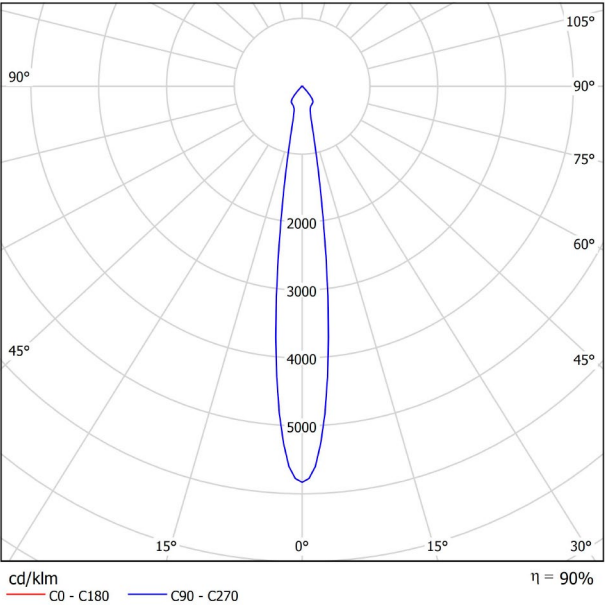

CONICAL DIAGRAM

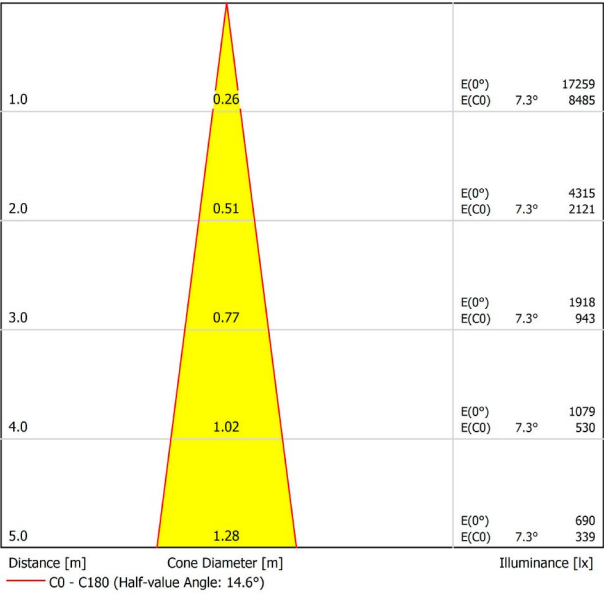



PRODUCT	
Model	Anti-glare Honeycomb Louver
Reference	A382-00-00
Category	Accessories
NOT SOLD SEPARATELY.	



Accessory made up of louver in the shape of a honeycomb panel to reduce glare and the effects of direct rays of vision.