




DIMENSIONS



AWARDS



Name	SHOT LIGHT CRI 90 17° 3000K N
Reference	A2680111N
Color	Black
RAL	Colour in the mass looks alike RAL 9005
Category	CEILING RECESSED

PRODUCT

Light source	LED
Gross luminous flux	210 Lm
Power	2,1 W
Power values of the system	3,23 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	Mac Adam Step 3
Light beam angle	17°
Unified Glare Rating	UGR<19
Lighting efficiency	92%
Efficacy	100 Lm/W
Current intensity	700 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included - Connected
Emergency power supply	Please Consult
Electrical insulation class	□
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A++
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


Ingress Protection	IP20
Recess measurements	Ø38 mm.
Weight	100 g.
Packaged weight	120 g.
Packaging dimensions	77 × 70 × 53 mm.
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene

OTHER DATA




A luminary conceived to be a small, discreet point of light in the ceiling that hides the illumination source from sight and aims to offer maximum visual comfort. In order to achieve this, it has an anti-glare screen and a specifically designed micro-reflector that generates a perfectly defined light beam.

POLAR DIAGRAM

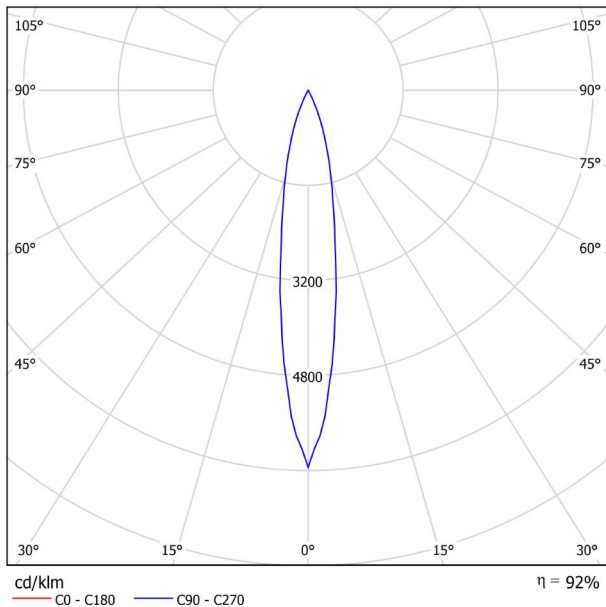

CONICAL DIAGRAM

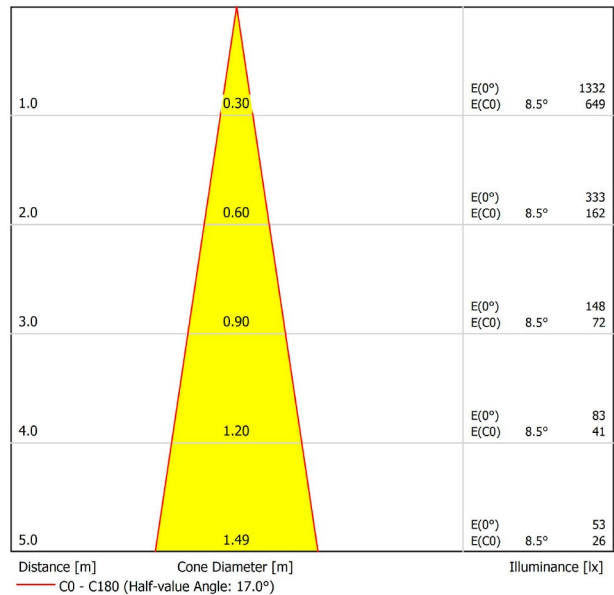


UGR


Glare Evaluation According to UGR												
ρ Ceiling		70	70	50	50	30	70	70	50	50	30	30
ρ Walls		50	30	50	30	30	50	30	50	30	30	30
ρ Floor		20	20	20	20	20	20	20	20	20	20	20
Room Size X Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis					
2H	2H	-6.4	-5.8	-6.2	-5.6	-5.4	-6.4	-5.8	-6.2	-5.6	-5.4	
	3H	-6.6	-6.0	-6.3	-5.8	-5.5	-6.6	-6.0	-6.3	-5.8	-5.5	
	4H	-6.6	-6.1	-6.3	-5.8	-5.6	-6.6	-6.1	-6.3	-5.8	-5.6	
	6H	-6.7	-6.2	-6.4	-5.9	-5.6	-6.7	-6.2	-6.4	-5.9	-5.6	
	8H	-6.7	-6.3	-6.4	-6.0	-5.7	-6.7	-6.3	-6.4	-6.0	-5.7	
4H	12H	-6.8	-6.3	-6.4	-6.0	-5.7	-6.8	-6.3	-6.4	-6.0	-5.7	
	2H	-6.6	-6.1	-6.3	-5.8	-5.6	-6.6	-6.1	-6.3	-5.8	-5.6	
	3H	-6.8	-6.3	-6.4	-6.0	-5.7	-6.8	-6.3	-6.4	-6.0	-5.7	
	4H	-6.8	-6.5	-6.5	-6.1	-5.8	-6.8	-6.5	-6.5	-6.1	-5.8	
	6H	-6.9	-6.6	-6.5	-6.2	-5.9	-6.9	-6.6	-6.5	-6.2	-5.9	
8H	8H	-7.0	-6.7	-6.5	-6.3	-5.9	-7.0	-6.7	-6.5	-6.3	-5.9	
	12H	-7.0	-6.8	-6.6	-6.4	-5.9	-7.0	-6.8	-6.6	-6.4	-5.9	
	4H	-7.0	-6.7	-6.5	-6.3	-5.9	-7.0	-6.7	-6.5	-6.3	-5.9	
	6H	-7.0	-6.8	-6.6	-6.4	-6.0	-7.0	-6.8	-6.6	-6.4	-6.0	
	8H	-7.1	-6.9	-6.6	-6.5	-6.0	-7.1	-6.9	-6.6	-6.5	-6.0	
12H	12H	-7.1	-7.0	-6.7	-6.5	-6.1	-7.1	-7.0	-6.7	-6.5	-6.1	
	4H	-7.0	-6.8	-6.6	-6.4	-5.9	-7.0	-6.8	-6.6	-6.4	-5.9	
	6H	-7.1	-6.9	-6.6	-6.5	-6.0	-7.1	-6.9	-6.6	-6.5	-6.0	
	8H	-7.1	-7.0	-6.7	-6.5	-6.1	-7.1	-7.0	-6.7	-6.5	-6.1	
	Variation of the observer position for the luminaire distances S											
S = 1.0H		+0.0 / 0.0					+0.0 / 0.0					
S = 1.5H		+0.0 / 0.0					+0.0 / 0.0					
S = 2.0H		+0.0 / 0.0					+0.0 / 0.0					
Standard table		BK00					BK00					
Correction Summand		-20.0					-20.0					
Corrected Glare Indices referring to 210lm Total Luminous Flux												



DIMENSIONS



Ø 36



45

MIN. 49

Ø 43

PRODUCT

Name	SHOT LIGHT CRI 90 17° 3000K R
Reference	A2680111R
Color	Red
RAL	2004
Category	CEILING RECESSED

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	210 Lm
Power	2,1 W
Power values of the system	3,23 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	Mac Adam Step 3
Light beam angle	17°
Unified Glare Rating	UGR<19
Lighting efficiency	92%
Efficacy	100 Lm/W
Current intensity	700 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included - Connected
Emergency power supply	Please Consult
Electrical insulation class	□
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A++
LED lifespan	L80B10 (Tc=85°C) >60.000h

OTHER DATA

Ingress Protection	IP20
Recess measurements	Ø38 mm.
Weight	100 g.
Packaged weight	120 g.
Packaging dimensions	77 x 70 x 53 mm.
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene




AWARDS




A luminary conceived to be a small, discreet point of light in the ceiling that hides the illumination source from sight and aims to offer maximum visual comfort. In order to achieve this, it has an anti-glare screen and a specifically designed micro-reflector that generates a perfectly defined light beam.

POLAR DIAGRAM

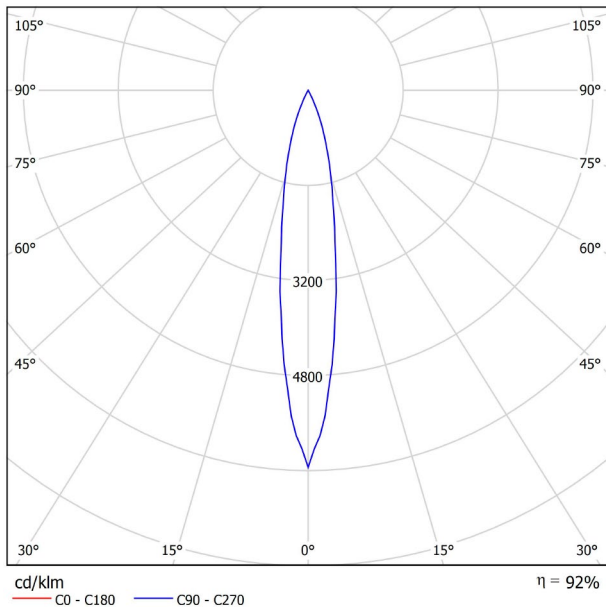

CONICAL DIAGRAM

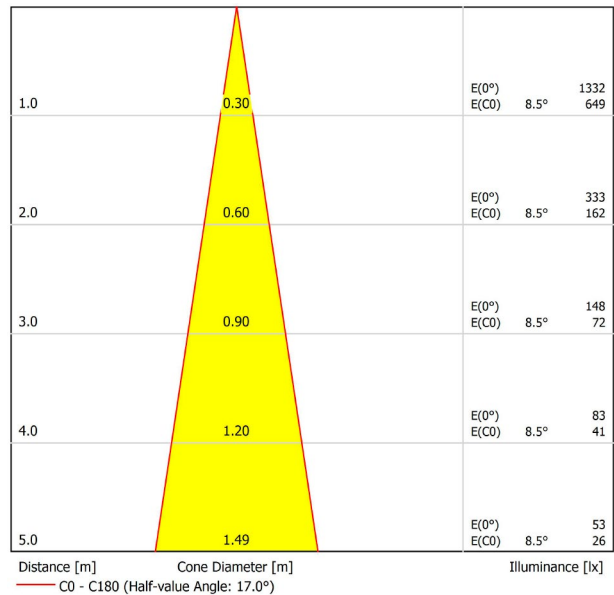


UGR

Glare Evaluation According to UGR												
p Ceiling		70	70	50	50	30	70	70	50	50	30	
p Walls		50	30	50	30	30	50	30	50	30	30	
p Floor		20	20	20	20	20	20	20	20	20	20	
Room Size X Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis					
2H	2H	-6.4	-5.8	-6.2	-5.6	-5.4	-6.4	-5.8	-6.2	-5.6	-5.4	
	3H	-6.6	-6.0	-6.3	-5.8	-5.5	-6.6	-6.0	-6.3	-5.8	-5.5	
	4H	-6.6	-6.1	-6.3	-5.8	-5.6	-6.6	-6.1	-6.3	-5.8	-5.6	
	6H	-6.7	-6.2	-6.4	-5.9	-5.6	-6.7	-6.2	-6.4	-5.9	-5.6	
	8H	-6.7	-6.3	-6.4	-6.0	-5.7	-6.7	-6.3	-6.4	-6.0	-5.7	
4H	12H	-6.8	-6.3	-6.4	-6.0	-5.7	-6.8	-6.3	-6.4	-6.0	-5.7	
	2H	-6.6	-6.1	-6.3	-5.8	-5.6	-6.6	-6.1	-6.3	-5.8	-5.6	
	3H	-6.8	-6.3	-6.4	-6.0	-5.7	-6.8	-6.3	-6.4	-6.0	-5.7	
	4H	-6.8	-6.5	-6.5	-6.1	-5.8	-6.8	-6.5	-6.5	-6.1	-5.8	
	6H	-6.9	-6.6	-6.5	-6.2	-5.9	-6.9	-6.6	-6.5	-6.2	-5.9	
8H	8H	-7.0	-6.7	-6.5	-6.3	-5.9	-7.0	-6.7	-6.5	-6.3	-5.9	
	12H	-7.0	-6.8	-6.6	-6.4	-5.9	-7.0	-6.8	-6.6	-6.4	-5.9	
	4H	-7.0	-6.7	-6.5	-6.3	-5.9	-7.0	-6.7	-6.5	-6.3	-5.9	
	6H	-7.0	-6.8	-6.6	-6.4	-6.0	-7.0	-6.8	-6.6	-6.4	-6.0	
	8H	-7.1	-6.9	-6.6	-6.5	-6.0	-7.1	-6.9	-6.6	-6.5	-6.0	
12H	12H	-7.1	-7.0	-6.7	-6.5	-6.1	-7.1	-7.0	-6.7	-6.5	-6.1	
	4H	-7.0	-6.8	-6.6	-6.4	-5.9	-7.0	-6.8	-6.6	-6.4	-5.9	
	6H	-7.1	-6.9	-6.6	-6.5	-6.0	-7.1	-6.9	-6.6	-6.5	-6.0	
	8H	-7.1	-7.0	-6.7	-6.5	-6.1	-7.1	-7.0	-6.7	-6.5	-6.1	
	Variation of the observer position for the luminaire distances S											
S = 1.0H		+0.0 / 0.0					+0.0 / 0.0					
S = 1.5H		+0.0 / 0.0					+0.0 / 0.0					
S = 2.0H		+0.0 / 0.0					+0.0 / 0.0					
Standard table		BK00					BK00					
Correction Summand		-20.0					-20.0					
Corrected Glare Indices referring to 210lm Total Luminous Flux												



DIMENSIONS



Ø 36

45

MIN. 49

Ø 43

AWARDS



Name	SHOT LIGHT CRI 90 17° 3000K W
Reference	A2680111W
Color	White
RAL	Colour in the mass looks alike RAL 9016
Category	CEILING RECESSED

PRODUCT

Light source	LED
Gross luminous flux	210 Lm
Power	2,1 W
Power values of the system	3,23 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	Mac Adam Step 3
Light beam angle	17°
Unified Glare Rating	UGR<19
Lighting efficiency	92%
Efficacy	100 Lm/W
Current intensity	700 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included - Connected
Emergency power supply	Please Consult
Electrical insulation class	□
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A++
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


Ingress Protection	IP20
Recess measurements	Ø38 mm.
Weight	100 g.
Packaged weight	120 g.
Packaging dimensions	77 × 70 × 53 mm.
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene

OTHER DATA




A luminary conceived to be a small, discreet point of light in the ceiling that hides the illumination source from sight and aims to offer maximum visual comfort. In order to achieve this, it has an anti-glare screen and a specifically designed micro-reflector that generates a perfectly defined light beam.

POLAR DIAGRAM

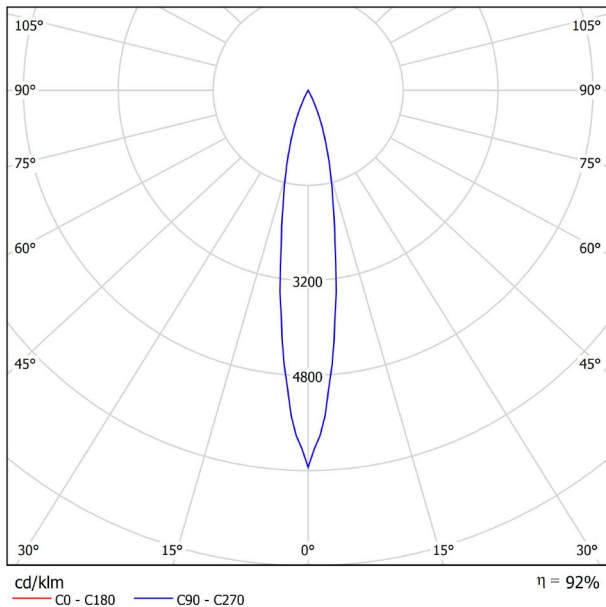

CONICAL DIAGRAM

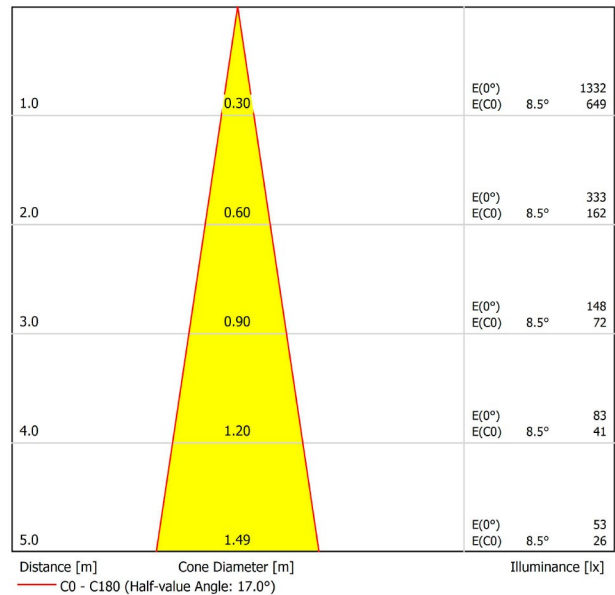


UGR

Glare Evaluation According to UGR												
p Ceiling		70	70	50	50	30	70	70	50	50	30	
p Walls		50	30	50	30	30	50	30	50	30	30	
p Floor		20	20	20	20	20	20	20	20	20	20	
Room Size X Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis					
2H	2H	-6.4	-5.8	-6.2	-5.6	-5.4	-6.4	-5.8	-6.2	-5.6	-5.4	
	3H	-6.6	-6.0	-6.3	-5.8	-5.5	-6.6	-6.0	-6.3	-5.8	-5.5	
	4H	-6.6	-6.1	-6.3	-5.8	-5.6	-6.6	-6.1	-6.3	-5.8	-5.6	
	6H	-6.7	-6.2	-6.4	-5.9	-5.6	-6.7	-6.2	-6.4	-5.9	-5.6	
	8H	-6.7	-6.3	-6.4	-6.0	-5.7	-6.7	-6.3	-6.4	-6.0	-5.7	
4H	12H	-6.8	-6.3	-6.4	-6.0	-5.7	-6.8	-6.3	-6.4	-6.0	-5.7	
	2H	-6.6	-6.1	-6.3	-5.8	-5.6	-6.6	-6.1	-6.3	-5.8	-5.6	
	3H	-6.8	-6.3	-6.4	-6.0	-5.7	-6.8	-6.3	-6.4	-6.0	-5.7	
	4H	-6.8	-6.5	-6.5	-6.1	-5.8	-6.8	-6.5	-6.5	-6.1	-5.8	
	6H	-6.9	-6.6	-6.5	-6.2	-5.9	-6.9	-6.6	-6.5	-6.2	-5.9	
8H	8H	-7.0	-6.7	-6.5	-6.3	-5.9	-7.0	-6.7	-6.5	-6.3	-5.9	
	12H	-7.0	-6.8	-6.6	-6.4	-5.9	-7.0	-6.8	-6.6	-6.4	-5.9	
	4H	-7.0	-6.7	-6.5	-6.3	-5.9	-7.0	-6.7	-6.5	-6.3	-5.9	
	6H	-7.0	-6.8	-6.6	-6.4	-6.0	-7.0	-6.8	-6.6	-6.4	-6.0	
	8H	-7.1	-6.9	-6.6	-6.5	-6.0	-7.1	-6.9	-6.6	-6.5	-6.0	
12H	12H	-7.1	-7.0	-6.7	-6.5	-6.1	-7.1	-7.0	-6.7	-6.5	-6.1	
	4H	-7.0	-6.8	-6.6	-6.4	-5.9	-7.0	-6.8	-6.6	-6.4	-5.9	
	6H	-7.1	-6.9	-6.6	-6.5	-6.0	-7.1	-6.9	-6.6	-6.5	-6.0	
	8H	-7.1	-7.0	-6.7	-6.5	-6.1	-7.1	-7.0	-6.7	-6.5	-6.1	
Variation of the observer position for the luminaire distances S												
S = 1.0H		+0.0 / 0.0					+0.0 / 0.0					
S = 1.5H		+0.0 / 0.0					+0.0 / 0.0					
S = 2.0H		+0.0 / 0.0					+0.0 / 0.0					
Standard table		BK00					BK00					
Correction Summand		-20.0					-20.0					
Corrected Glare Indices referring to 210lm Total Luminous Flux												



DIMENSIONS



AWARDS



Name	SHOT LIGHT CRI 90 17° 3000K WN
Reference	A2680111WN
Color	White-Black
RAL	Colour in the mass looks alike RAL 9016 & 9005
Category	CEILING RECESSED

PRODUCT

Light source	LED
Gross luminous flux	210 Lm
Power	2,1 W
Power values of the system	3,23 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	Mac Adam Step 3
Light beam angle	17°
Unified Glare Rating	UGR<19
Lighting efficiency	92%
Efficacy	100 Lm/W
Current intensity	700 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included - Connected
Emergency power supply	Please Consult
Electrical insulation class	□
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A++
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


Ingress Protection	IP20
Recess measurements	Ø38 mm.
Weight	100 g.
Packaged weight	120 g.
Packaging dimensions	77 × 70 × 53 mm.
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene

OTHER DATA




A luminary conceived to be a small, discreet point of light in the ceiling that hides the illumination source from sight and aims to offer maximum visual comfort. In order to achieve this, it has an anti-glare screen and a specifically designed micro-reflector that generates a perfectly defined light beam.

POLAR DIAGRAM

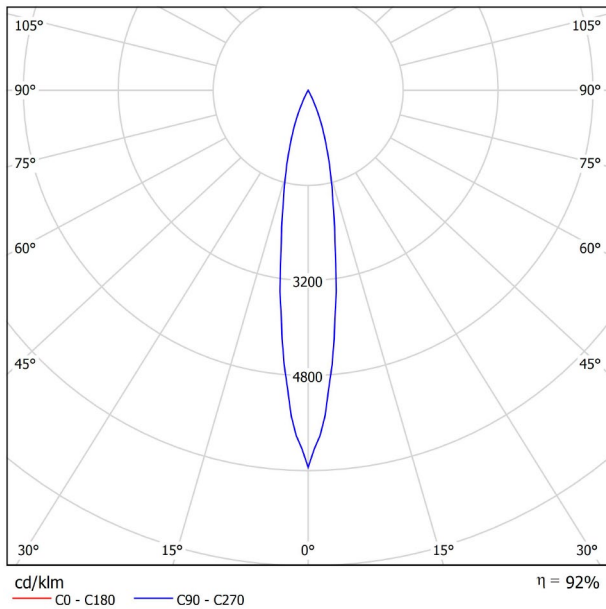

CONICAL DIAGRAM

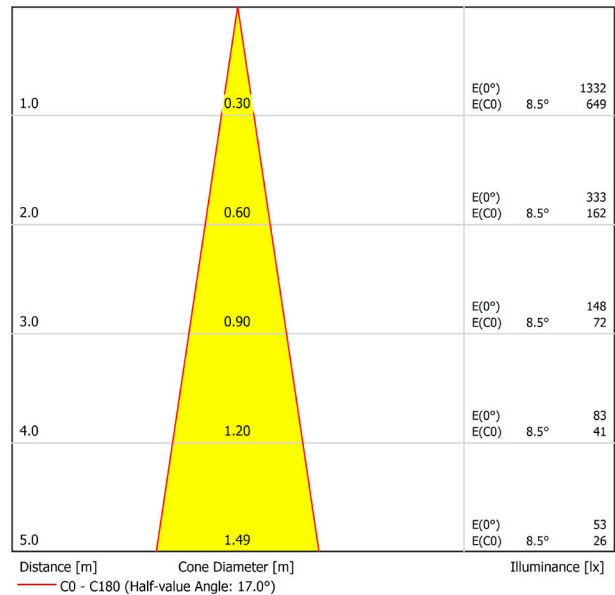


UGR

Glare Evaluation According to UGR												
p Ceiling		70	70	50	50	30	70	70	50	50	30	
p Walls		50	30	50	30	30	50	30	50	30	30	
p Floor		20	20	20	20	20	20	20	20	20	20	
Room Size X Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis					
2H	2H	-6.4	-5.8	-6.2	-5.6	-5.4	-6.4	-5.8	-6.2	-5.6	-5.4	
	3H	-6.6	-6.0	-6.3	-5.8	-5.5	-6.6	-6.0	-6.3	-5.8	-5.5	
	4H	-6.6	-6.1	-6.3	-5.8	-5.6	-6.6	-6.1	-6.3	-5.8	-5.6	
	6H	-6.7	-6.2	-6.4	-5.9	-5.6	-6.7	-6.2	-6.4	-5.9	-5.6	
	8H	-6.7	-6.3	-6.4	-6.0	-5.7	-6.7	-6.3	-6.4	-6.0	-5.7	
4H	12H	-6.8	-6.3	-6.4	-6.0	-5.7	-6.8	-6.3	-6.4	-6.0	-5.7	
	2H	-6.6	-6.1	-6.3	-5.8	-5.6	-6.6	-6.1	-6.3	-5.8	-5.6	
	3H	-6.8	-6.3	-6.4	-6.0	-5.7	-6.8	-6.3	-6.4	-6.0	-5.7	
	4H	-6.8	-6.5	-6.5	-6.1	-5.8	-6.8	-6.5	-6.5	-6.1	-5.8	
	6H	-6.9	-6.6	-6.5	-6.2	-5.9	-6.9	-6.6	-6.5	-6.2	-5.9	
8H	8H	-7.0	-6.7	-6.5	-6.3	-5.9	-7.0	-6.7	-6.5	-6.3	-5.9	
	12H	-7.0	-6.8	-6.6	-6.4	-5.9	-7.0	-6.8	-6.6	-6.4	-5.9	
	4H	-7.0	-6.7	-6.5	-6.3	-5.9	-7.0	-6.7	-6.5	-6.3	-5.9	
	6H	-7.0	-6.8	-6.6	-6.4	-6.0	-7.0	-6.8	-6.6	-6.4	-6.0	
	8H	-7.1	-6.9	-6.6	-6.5	-6.0	-7.1	-6.9	-6.6	-6.5	-6.0	
12H	12H	-7.1	-7.0	-6.7	-6.5	-6.1	-7.1	-7.0	-6.7	-6.5	-6.1	
	4H	-7.0	-6.8	-6.6	-6.4	-5.9	-7.0	-6.8	-6.6	-6.4	-5.9	
	6H	-7.1	-6.9	-6.6	-6.5	-6.0	-7.1	-6.9	-6.6	-6.5	-6.0	
	8H	-7.1	-7.0	-6.7	-6.5	-6.1	-7.1	-7.0	-6.7	-6.5	-6.1	
	Variation of the observer position for the luminaire distances S											
S = 1.0H		+0.0 / 0.0					+0.0 / 0.0					
S = 1.5H		+0.0 / 0.0					+0.0 / 0.0					
S = 2.0H		+0.0 / 0.0					+0.0 / 0.0					
Standard table		BK00					BK00					
Correction Summand		-20.0					-20.0					
Corrected Glare Indices referring to 210lm Total Luminous Flux												



DIMENSIONS



Ø 36



45

MIN. 49

Ø 43

AWARDS



Name	SHOT LIGHT CRI 90 17° 3000K Z
Reference	A2680111Z
Color	Aluminium
RAL	9006
Category	CEILING RECESSED

PRODUCT

Light source	LED
Gross luminous flux	210 Lm
Power	2,1 W
Power values of the system	3,23 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	Mac Adam Step 3
Light beam angle	17°
Unified Glare Rating	UGR<19
Lighting efficiency	92%
Efficacy	100 Lm/W
Current intensity	700 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included - Connected
Emergency power supply	Please Consult
Electrical insulation class	□
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A++
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


Ingress Protection	IP20
Recess measurements	Ø38 mm.
Weight	100 g.
Packaged weight	120 g.
Packaging dimensions	77 × 70 × 53 mm.
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene

OTHER DATA




A luminary conceived to be a small, discreet point of light in the ceiling that hides the illumination source from sight and aims to offer maximum visual comfort. In order to achieve this, it has an anti-glare screen and a specifically designed micro-reflector that generates a perfectly defined light beam.

POLAR DIAGRAM

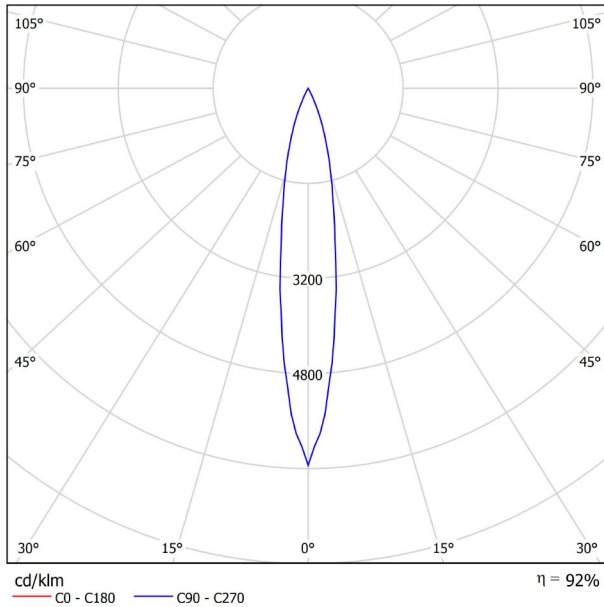

CONICAL DIAGRAM

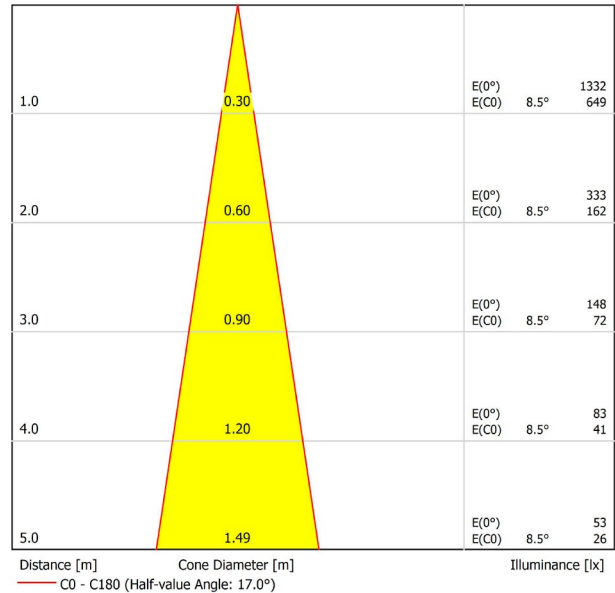


UGR

Glare Evaluation According to UGR												
ρ Ceiling		70	70	50	50	30	70	70	50	50	30	
ρ Walls		50	30	50	30	30	50	30	50	30	30	
ρ Floor		20	20	20	20	20	20	20	20	20	20	
Room Size X Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis					
2H	2H	-6.4	-5.8	-6.2	-5.6	-5.4	-6.4	-5.8	-6.2	-5.6	-5.4	
	3H	-6.6	-6.0	-6.3	-5.8	-5.5	-6.6	-6.0	-6.3	-5.8	-5.5	
	4H	-6.6	-6.1	-6.3	-5.8	-5.6	-6.6	-6.1	-6.3	-5.8	-5.6	
	6H	-6.7	-6.2	-6.4	-5.9	-5.6	-6.7	-6.2	-6.4	-5.9	-5.6	
	8H	-6.7	-6.3	-6.4	-6.0	-5.7	-6.7	-6.3	-6.4	-6.0	-5.7	
4H	12H	-6.8	-6.3	-6.4	-6.0	-5.7	-6.8	-6.3	-6.4	-6.0	-5.7	
	2H	-6.6	-6.1	-6.3	-5.8	-5.6	-6.6	-6.1	-6.3	-5.8	-5.6	
	3H	-6.8	-6.3	-6.4	-6.0	-5.7	-6.8	-6.3	-6.4	-6.0	-5.7	
	4H	-6.8	-6.5	-6.5	-6.1	-5.8	-6.8	-6.5	-6.5	-6.1	-5.8	
	6H	-6.9	-6.6	-6.5	-6.2	-5.9	-6.9	-6.6	-6.5	-6.2	-5.9	
8H	8H	-7.0	-6.7	-6.5	-6.3	-5.9	-7.0	-6.7	-6.5	-6.3	-5.9	
	12H	-7.0	-6.8	-6.6	-6.4	-5.9	-7.0	-6.8	-6.6	-6.4	-5.9	
	4H	-7.0	-6.7	-6.5	-6.3	-5.9	-7.0	-6.7	-6.5	-6.3	-5.9	
	6H	-7.0	-6.8	-6.6	-6.4	-6.0	-7.0	-6.8	-6.6	-6.4	-6.0	
	8H	-7.1	-6.9	-6.6	-6.5	-6.0	-7.1	-6.9	-6.6	-6.5	-6.0	
12H	12H	-7.1	-7.0	-6.7	-6.5	-6.1	-7.1	-7.0	-6.7	-6.5	-6.1	
	4H	-7.0	-6.8	-6.6	-6.4	-5.9	-7.0	-6.8	-6.6	-6.4	-5.9	
	6H	-7.1	-6.9	-6.6	-6.5	-6.0	-7.1	-6.9	-6.6	-6.5	-6.0	
	8H	-7.1	-7.0	-6.7	-6.5	-6.1	-7.1	-7.0	-6.7	-6.5	-6.1	
Variation of the observer position for the luminaire distances S												
S = 1.0H		+0.0 / 0.0					+0.0 / 0.0					
S = 1.5H		+0.0 / 0.0					+0.0 / 0.0					
S = 2.0H		+0.0 / 0.0					+0.0 / 0.0					
Standard table		BK00					BK00					
Correction Summand		-20.0					-20.0					
Corrected Glare Indices referring to 210lm Total Luminous Flux												



DIMENSIONS



AWARDS



Name	SHOT LIGHT CRI 90 17° 4000K G
Reference	A2680112G
Color	Gold
RAL	1036
Category	CEILING RECESSED

PRODUCT

Light source	LED
Gross luminous flux	250 Lm
Power	2,1 W
Power values of the system	3,23 W
Colour temperature	4000 K
Colour Rendering Index	CRI>90
Chromatic stability	Mac Adam Step 3
Light beam angle	17°
Unified Glare Rating	UGR<19
Lighting efficiency	92%
Efficacy	119 Lm/W
Current intensity	700 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included - Connected
Emergency power supply	Please Consult
Electrical insulation class	□
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A++
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


Ingress Protection	IP20
Recess measurements	Ø38 mm.
Weight	100 g.
Packaged weight	120 g.
Packaging dimensions	77 × 70 × 53 mm.
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene

OTHER DATA




A luminary conceived to be a small, discreet point of light in the ceiling that hides the illumination source from sight and aims to offer maximum visual comfort. In order to achieve this, it has an anti-glare screen and a specifically designed micro-reflector that generates a perfectly defined light beam.

POLAR DIAGRAM

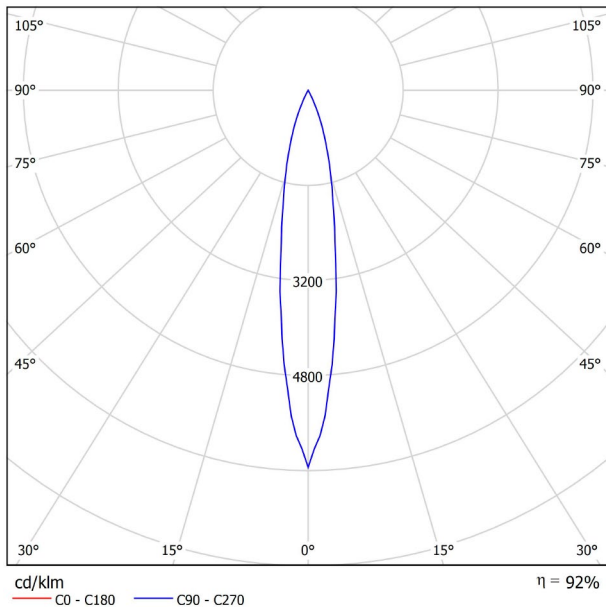

CONICAL DIAGRAM

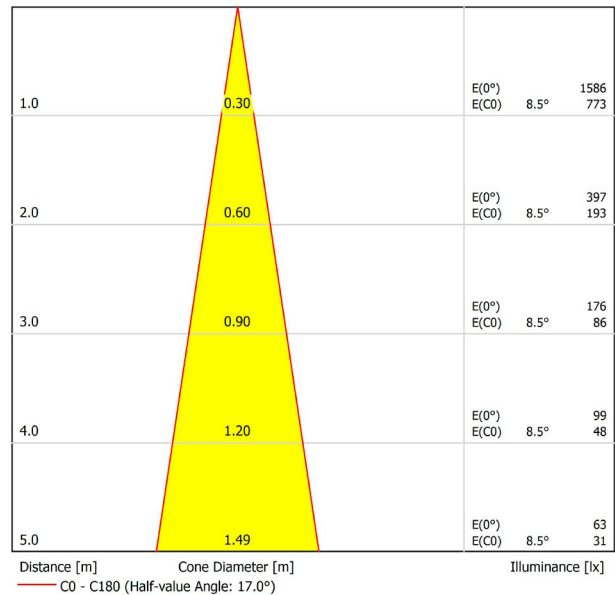


UGR

Glare Evaluation According to UGR												
ρ Ceiling		70	70	50	50	30	70	70	50	50	30	
ρ Walls		50	30	50	30	30	50	30	50	30	30	
ρ Floor		20	20	20	20	20	20	20	20	20	20	
Room Size X Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis					
2H	2H	-5.8	-5.2	-5.6	-5.0	-4.8	-5.8	-5.2	-5.6	-5.0	-4.8	
	3H	-5.9	-5.4	-5.7	-5.1	-4.9	-5.9	-5.4	-5.7	-5.1	-4.9	
	4H	-6.0	-5.5	-5.7	-5.2	-5.0	-6.0	-5.5	-5.7	-5.2	-5.0	
	6H	-6.1	-5.6	-5.8	-5.3	-5.0	-6.1	-5.6	-5.8	-5.3	-5.0	
	8H	-6.1	-5.7	-5.8	-5.4	-5.1	-6.1	-5.7	-5.8	-5.4	-5.1	
4H	12H	-6.2	-5.7	-5.8	-5.4	-5.1	-6.2	-5.7	-5.8	-5.4	-5.1	
	2H	-6.0	-5.5	-5.7	-5.2	-5.0	-6.0	-5.5	-5.7	-5.2	-5.0	
	3H	-6.2	-5.7	-5.8	-5.4	-5.1	-6.2	-5.7	-5.8	-5.4	-5.1	
	4H	-6.2	-5.9	-5.9	-5.5	-5.2	-6.2	-5.9	-5.9	-5.5	-5.2	
	6H	-6.3	-6.0	-5.9	-5.6	-5.3	-6.3	-6.0	-5.9	-5.6	-5.3	
8H	8H	-6.4	-6.1	-5.9	-5.7	-5.3	-6.4	-6.1	-5.9	-5.7	-5.3	
	12H	-6.4	-6.2	-6.0	-5.8	-5.3	-6.4	-6.2	-6.0	-5.8	-5.3	
	4H	-6.4	-6.1	-5.9	-5.7	-5.3	-6.4	-6.1	-5.9	-5.7	-5.3	
	6H	-6.4	-6.2	-6.0	-5.8	-5.4	-6.4	-6.2	-6.0	-5.8	-5.4	
	8H	-6.5	-6.3	-6.0	-5.9	-5.4	-6.5	-6.3	-6.0	-5.9	-5.4	
12H	12H	-6.5	-6.4	-6.1	-5.9	-5.4	-6.5	-6.4	-6.1	-5.9	-5.4	
	4H	-6.4	-6.2	-6.0	-5.8	-5.3	-6.4	-6.2	-6.0	-5.8	-5.3	
	6H	-6.5	-6.3	-6.0	-5.9	-5.4	-6.5	-6.3	-6.0	-5.9	-5.4	
	8H	-6.5	-6.4	-6.1	-5.9	-5.4	-6.5	-6.4	-6.1	-5.9	-5.4	
	Variation of the observer position for the luminaire distances S											
S = 1.0H		+0.0 / 0.0					+0.0 / 0.0					
S = 1.5H		+0.0 / 0.0					+0.0 / 0.0					
S = 2.0H		+0.0 / 0.0					+0.0 / 0.0					
Standard table		BK00					BK00					
Correction Summand		-20.0					-20.0					
Corrected Glare Indices referring to 250lm Total Luminous Flux												



DIMENSIONS



Ø 36

45

MIN. 49

Ø 43

AWARDS



Name	SHOT LIGHT CRI 90 17° 4000K N
Reference	A2680112N
Color	Black
RAL	Colour in the mass looks alike RAL 9005
Category	CEILING RECESSED

PRODUCT

Light source	LED
Gross luminous flux	250 Lm
Power	2,1 W
Power values of the system	3,23 W
Colour temperature	4000 K
Colour Rendering Index	CRI>90
Chromatic stability	Mac Adam Step 3
Light beam angle	17°
Unified Glare Rating	UGR<19
Lighting efficiency	92%
Efficacy	119 Lm/W
Current intensity	700 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included - Connected
Emergency power supply	Please Consult
Electrical insulation class	□
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A++
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


Ingress Protection	IP20
Recess measurements	Ø38 mm.
Weight	100 g.
Packaged weight	120 g.
Packaging dimensions	77 × 70 × 53 mm.
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene

OTHER DATA




A luminary conceived to be a small, discreet point of light in the ceiling that hides the illumination source from sight and aims to offer maximum visual comfort. In order to achieve this, it has an anti-glare screen and a specifically designed micro-reflector that generates a perfectly defined light beam.

POLAR DIAGRAM

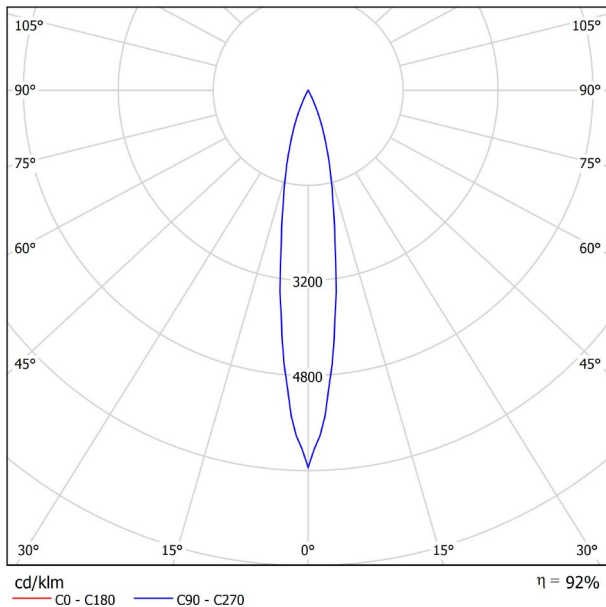

CONICAL DIAGRAM

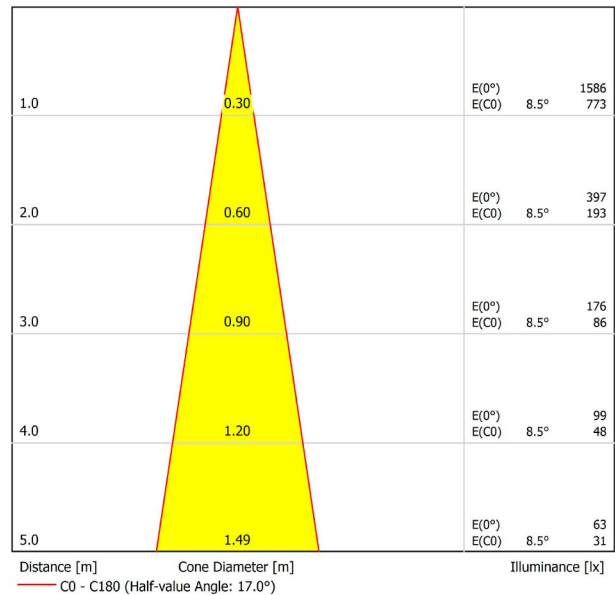


UGR

Glare Evaluation According to UGR												
p Ceiling		70	70	50	50	30	70	70	50	50	30	
p Walls		50	30	50	30	30	50	30	50	30	30	
p Floor		20	20	20	20	20	20	20	20	20	20	
Room Size X Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis					
2H	2H	-5.8	-5.2	-5.6	-5.0	-4.8	-5.8	-5.2	-5.6	-5.0	-4.8	
	3H	-5.9	-5.4	-5.7	-5.1	-4.9	-5.9	-5.4	-5.7	-5.1	-4.9	
	4H	-6.0	-5.5	-5.7	-5.2	-5.0	-6.0	-5.5	-5.7	-5.2	-5.0	
	6H	-6.1	-5.6	-5.8	-5.3	-5.0	-6.1	-5.6	-5.8	-5.3	-5.0	
	8H	-6.1	-5.7	-5.8	-5.4	-5.1	-6.1	-5.7	-5.8	-5.4	-5.1	
4H	12H	-6.2	-5.7	-5.8	-5.4	-5.1	-6.2	-5.7	-5.8	-5.4	-5.1	
	2H	-6.0	-5.5	-5.7	-5.2	-5.0	-6.0	-5.5	-5.7	-5.2	-5.0	
	3H	-6.2	-5.7	-5.8	-5.4	-5.1	-6.2	-5.7	-5.8	-5.4	-5.1	
	4H	-6.2	-5.9	-5.9	-5.5	-5.2	-6.2	-5.9	-5.9	-5.5	-5.2	
	6H	-6.3	-6.0	-5.9	-5.6	-5.3	-6.3	-6.0	-5.9	-5.6	-5.3	
8H	8H	-6.4	-6.1	-5.9	-5.7	-5.3	-6.4	-6.1	-5.9	-5.7	-5.3	
	12H	-6.4	-6.2	-6.0	-5.8	-5.3	-6.4	-6.2	-6.0	-5.8	-5.3	
	4H	-6.4	-6.1	-5.9	-5.7	-5.3	-6.4	-6.1	-5.9	-5.7	-5.3	
	6H	-6.4	-6.2	-6.0	-5.8	-5.4	-6.4	-6.2	-6.0	-5.8	-5.4	
	8H	-6.5	-6.3	-6.0	-5.9	-5.4	-6.5	-6.3	-6.0	-5.9	-5.4	
12H	12H	-6.5	-6.4	-6.1	-5.9	-5.4	-6.5	-6.4	-6.1	-5.9	-5.4	
	4H	-6.4	-6.2	-6.0	-5.8	-5.3	-6.4	-6.2	-6.0	-5.8	-5.3	
	6H	-6.5	-6.3	-6.0	-5.9	-5.4	-6.5	-6.3	-6.0	-5.9	-5.4	
	8H	-6.5	-6.4	-6.1	-5.9	-5.4	-6.5	-6.4	-6.1	-5.9	-5.4	
	Variation of the observer position for the luminaire distances S											
S = 1.0H		+0.0 / 0.0					+0.0 / 0.0					
S = 1.5H		+0.0 / 0.0					+0.0 / 0.0					
S = 2.0H		+0.0 / 0.0					+0.0 / 0.0					
Standard table		BK00					BK00					
Correction Summand		-20.0					-20.0					
Corrected Glare Indices referring to 250lm Total Luminous Flux												



DIMENSIONS



Ø 36

45

MIN. 49

Ø 43

AWARDS



Name	SHOT LIGHT CRI 90 17° 4000K R
Reference	A2680112R
Color	Red
RAL	2004
Category	CEILING RECESSED

PRODUCT

Light source	LED
Gross luminous flux	250 Lm
Power	2,1 W
Power values of the system	3,23 W
Colour temperature	4000 K
Colour Rendering Index	CRI>90
Chromatic stability	Mac Adam Step 3
Light beam angle	17°
Unified Glare Rating	UGR<19
Lighting efficiency	92%
Efficacy	119 Lm/W
Current intensity	700 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included - Connected
Emergency power supply	Please Consult
Electrical insulation class	□
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A++
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


Ingress Protection	IP20
Recess measurements	Ø38 mm.
Weight	100 g.
Packaged weight	120 g.
Packaging dimensions	77 × 70 × 53 mm.
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene

OTHER DATA




A luminary conceived to be a small, discreet point of light in the ceiling that hides the illumination source from sight and aims to offer maximum visual comfort. In order to achieve this, it has an anti-glare screen and a specifically designed micro-reflector that generates a perfectly defined light beam.

POLAR DIAGRAM

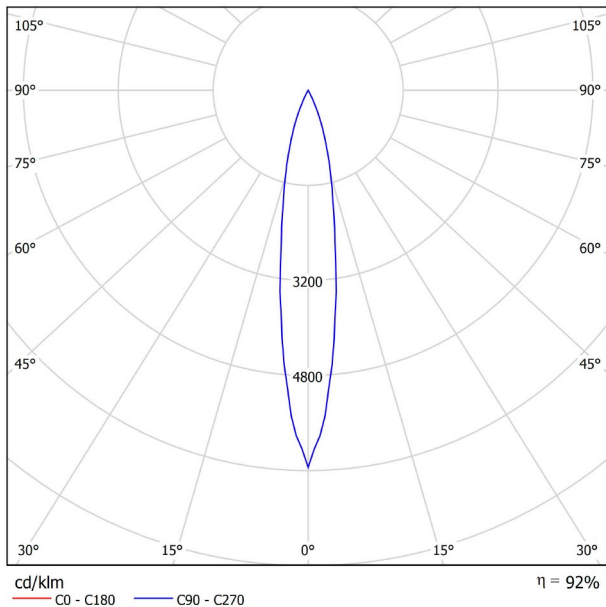

CONICAL DIAGRAM

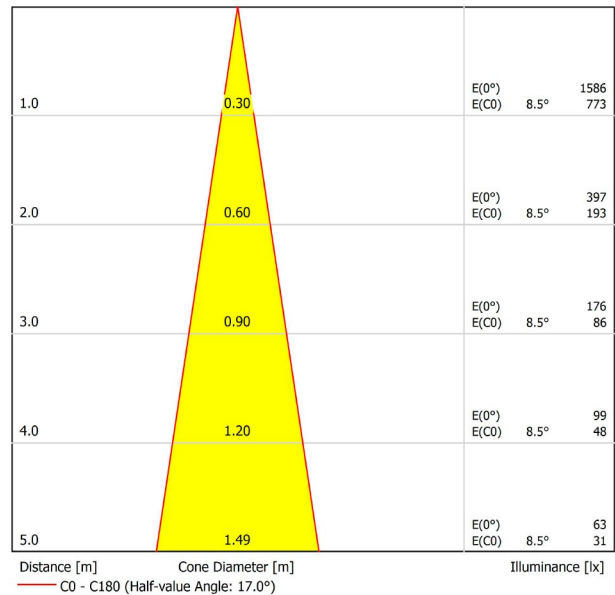


UGR

Glare Evaluation According to UGR												
p Ceiling		70	70	50	50	30	70	70	50	50	30	
p Walls		50	30	50	30	30	50	30	50	30	30	
p Floor		20	20	20	20	20	20	20	20	20	20	
Room Size X Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis					
2H	2H	-5.8	-5.2	-5.6	-5.0	-4.8	-5.8	-5.2	-5.6	-5.0	-4.8	
	3H	-5.9	-5.4	-5.7	-5.1	-4.9	-5.9	-5.4	-5.7	-5.1	-4.9	
	4H	-6.0	-5.5	-5.7	-5.2	-5.0	-6.0	-5.5	-5.7	-5.2	-5.0	
	6H	-6.1	-5.6	-5.8	-5.3	-5.0	-6.1	-5.6	-5.8	-5.3	-5.0	
	8H	-6.1	-5.7	-5.8	-5.4	-5.1	-6.1	-5.7	-5.8	-5.4	-5.1	
4H	12H	-6.2	-5.7	-5.8	-5.4	-5.1	-6.2	-5.7	-5.8	-5.4	-5.1	
	2H	-6.0	-5.5	-5.7	-5.2	-5.0	-6.0	-5.5	-5.7	-5.2	-5.0	
	3H	-6.2	-5.7	-5.8	-5.4	-5.1	-6.2	-5.7	-5.8	-5.4	-5.1	
	4H	-6.2	-5.9	-5.9	-5.5	-5.2	-6.2	-5.9	-5.9	-5.5	-5.2	
	6H	-6.3	-6.0	-5.9	-5.6	-5.3	-6.3	-6.0	-5.9	-5.6	-5.3	
8H	8H	-6.4	-6.1	-5.9	-5.7	-5.3	-6.4	-6.1	-5.9	-5.7	-5.3	
	12H	-6.4	-6.2	-6.0	-5.8	-5.3	-6.4	-6.2	-6.0	-5.8	-5.3	
	4H	-6.4	-6.1	-5.9	-5.7	-5.3	-6.4	-6.1	-5.9	-5.7	-5.3	
	6H	-6.4	-6.2	-6.0	-5.8	-5.4	-6.4	-6.2	-6.0	-5.8	-5.4	
	8H	-6.5	-6.3	-6.0	-5.9	-5.4	-6.5	-6.3	-6.0	-5.9	-5.4	
12H	12H	-6.5	-6.4	-6.1	-5.9	-5.4	-6.5	-6.4	-6.1	-5.9	-5.4	
	4H	-6.4	-6.2	-6.0	-5.8	-5.3	-6.4	-6.2	-6.0	-5.8	-5.3	
	6H	-6.5	-6.3	-6.0	-5.9	-5.4	-6.5	-6.3	-6.0	-5.9	-5.4	
	8H	-6.5	-6.4	-6.1	-5.9	-5.4	-6.5	-6.4	-6.1	-5.9	-5.4	
	Variation of the observer position for the luminaire distances S											
S = 1.0H		+0.0 / 0.0					+0.0 / 0.0					
S = 1.5H		+0.0 / 0.0					+0.0 / 0.0					
S = 2.0H		+0.0 / 0.0					+0.0 / 0.0					
Standard table		BK00					BK00					
Correction Summand		-20.0					-20.0					
Corrected Glare Indices referring to 250lm Total Luminous Flux												

SHOT LIGHT

ARKOSLIGHT®

DIMENSIONS



AWARDS




	PRODUCT
Name	SHOT LIGHT CRI 90 17° 4000K W
Reference	A2680112W
Color	White
RAL	Colour in the mass looks alike RAL 9016
Category	CEILING RECESSED
LIGHTING INFORMATION	
Light source	LED
Gross luminous flux	250 Lm
Power	2,1 W
Power values of the system	3,23 W
Colour temperature	4000 K
Colour Rendering Index	CRI>90
Chromatic stability	Mac Adam Step 3
Light beam angle	17°
Unified Glare Rating	UGR<19
Lighting efficiency	92%
Efficacy	119 Lm/W
Current intensity	700 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included - Connected
Emergency power supply	Please Consult
Electrical insulation class	
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A++
LED lifespan	L80B10 (Tc=85°C) >60.000h
OTHER DATA	
Ingress Protection	IP20
Recess measurements	Ø38 mm.
Weight	100 g.
Packaged weight	120 g.
Packaging dimensions	77 × 70 × 53 mm.
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene




A luminary conceived to be a small, discreet point of light in the ceiling that hides the illumination source from sight and aims to offer maximum visual comfort. In order to achieve this, it has an anti-glare screen and a specifically designed micro-reflector that generates a perfectly defined light beam.

POLAR DIAGRAM

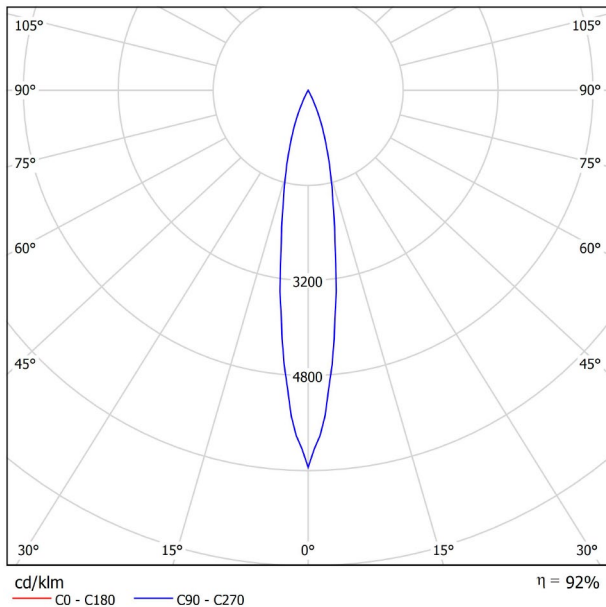

CONICAL DIAGRAM

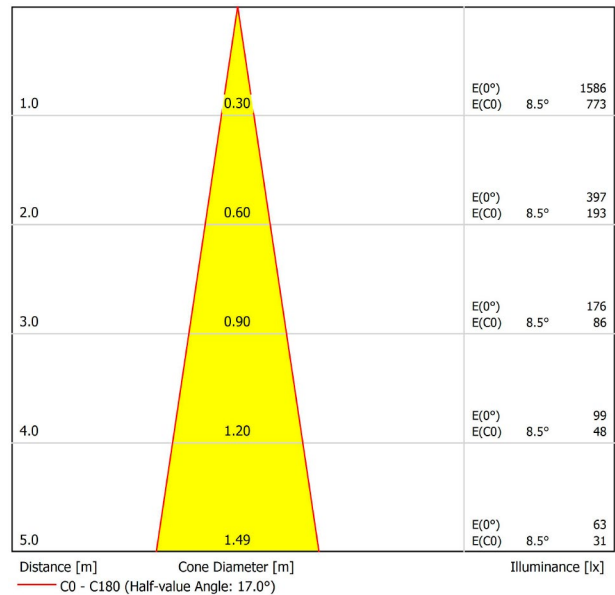


UGR


Glare Evaluation According to UGR												
p Ceiling		70	70	50	50	30	70	70	50	50	30	
p Walls		50	30	50	30	30	50	30	50	30	30	
p Floor		20	20	20	20	20	20	20	20	20	20	
Room Size X Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis					
2H	2H	-5.8	-5.2	-5.6	-5.0	-4.8	-5.8	-5.2	-5.6	-5.0	-4.8	
	3H	-5.9	-5.4	-5.7	-5.1	-4.9	-5.9	-5.4	-5.7	-5.1	-4.9	
	4H	-6.0	-5.5	-5.7	-5.2	-5.0	-6.0	-5.5	-5.7	-5.2	-5.0	
	6H	-6.1	-5.6	-5.8	-5.3	-5.0	-6.1	-5.6	-5.8	-5.3	-5.0	
	8H	-6.1	-5.7	-5.8	-5.4	-5.1	-6.1	-5.7	-5.8	-5.4	-5.1	
4H	12H	-6.2	-5.7	-5.8	-5.4	-5.1	-6.2	-5.7	-5.8	-5.4	-5.1	
	2H	-6.0	-5.5	-5.7	-5.2	-5.0	-6.0	-5.5	-5.7	-5.2	-5.0	
	3H	-6.2	-5.7	-5.8	-5.4	-5.1	-6.2	-5.7	-5.8	-5.4	-5.1	
	4H	-6.2	-5.9	-5.9	-5.5	-5.2	-6.2	-5.9	-5.9	-5.5	-5.2	
	6H	-6.3	-6.0	-5.9	-5.6	-5.3	-6.3	-6.0	-5.9	-5.6	-5.3	
8H	8H	-6.4	-6.1	-5.9	-5.7	-5.3	-6.4	-6.1	-5.9	-5.7	-5.3	
	12H	-6.4	-6.2	-6.0	-5.8	-5.3	-6.4	-6.2	-6.0	-5.8	-5.3	
	4H	-6.4	-6.1	-5.9	-5.7	-5.3	-6.4	-6.1	-5.9	-5.7	-5.3	
	6H	-6.4	-6.2	-6.0	-5.8	-5.4	-6.4	-6.2	-6.0	-5.8	-5.4	
	8H	-6.5	-6.3	-6.0	-5.9	-5.4	-6.5	-6.3	-6.0	-5.9	-5.4	
12H	12H	-6.5	-6.4	-6.1	-5.9	-5.4	-6.5	-6.4	-6.1	-5.9	-5.4	
	4H	-6.4	-6.2	-6.0	-5.8	-5.3	-6.4	-6.2	-6.0	-5.8	-5.3	
	6H	-6.5	-6.3	-6.0	-5.9	-5.4	-6.5	-6.3	-6.0	-5.9	-5.4	
	8H	-6.5	-6.4	-6.1	-5.9	-5.4	-6.5	-6.4	-6.1	-5.9	-5.4	
	Variation of the observer position for the luminaire distances S											
S = 1.0H		+0.0 / 0.0					+0.0 / 0.0					
S = 1.5H		+0.0 / 0.0					+0.0 / 0.0					
S = 2.0H		+0.0 / 0.0					+0.0 / 0.0					
Standard table		BK00					BK00					
Correction Summand		-20.0					-20.0					
Corrected Glare Indices referring to 250lm Total Luminous Flux												



DIMENSIONS



Ø 36



Ø 43

AWARDS



Name	SHOT LIGHT CRI 90 17° 4000K WN
Reference	A2680112WN
Color	White-Black
RAL	Colour in the mass looks alike RAL 9016 & 9005
Category	CEILING RECESSED

PRODUCT

Light source	LED
Gross luminous flux	250 Lm
Power	2,1 W
Power values of the system	3,23 W
Colour temperature	4000 K
Colour Rendering Index	CRI>90
Chromatic stability	Mac Adam Step 3
Light beam angle	17°
Unified Glare Rating	UGR<19
Lighting efficiency	92%
Efficacy	119 Lm/W
Current intensity	700 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included - Connected
Emergency power supply	Please Consult
Electrical insulation class	□
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A++
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


Ingress Protection	IP20
Recess measurements	Ø38 mm.
Weight	100 g.
Packaged weight	120 g.
Packaging dimensions	77 × 70 × 53 mm.
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene

OTHER DATA




A luminary conceived to be a small, discreet point of light in the ceiling that hides the illumination source from sight and aims to offer maximum visual comfort. In order to achieve this, it has an anti-glare screen and a specifically designed micro-reflector that generates a perfectly defined light beam.

POLAR DIAGRAM

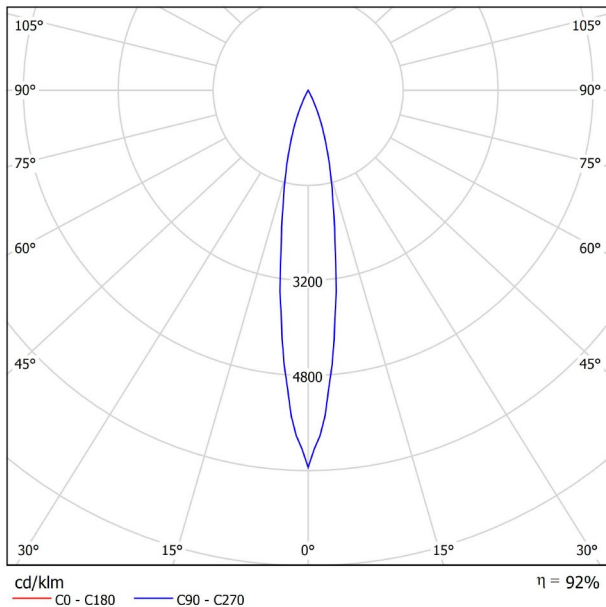

CONICAL DIAGRAM

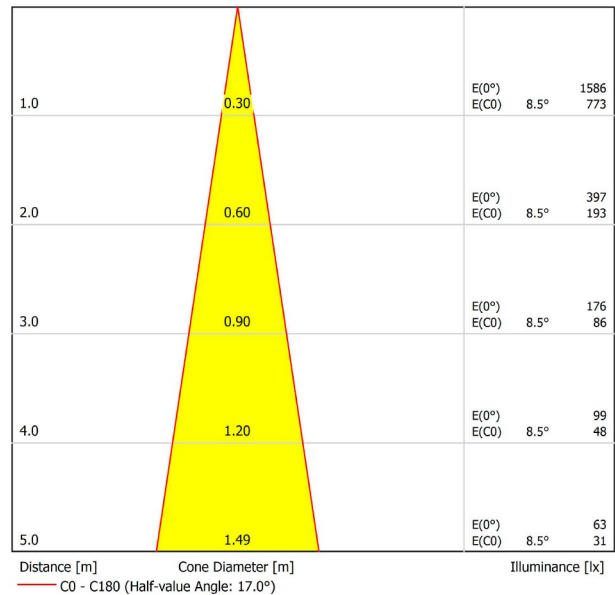


UGR

Glare Evaluation According to UGR												
ρ Ceiling		70	70	50	50	30	70	70	50	50	30	
ρ Walls		50	30	50	50	30	50	30	50	30	30	
ρ Floor		20	20	20	20	20	20	20	20	20	20	
Room Size X Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis					
2H	2H	-5.8	-5.2	-5.6	-5.0	-4.8	-5.8	-5.2	-5.6	-5.0	-4.8	
	3H	-5.9	-5.4	-5.7	-5.1	-4.9	-5.9	-5.4	-5.7	-5.1	-4.9	
	4H	-6.0	-5.5	-5.7	-5.2	-5.0	-6.0	-5.5	-5.7	-5.2	-5.0	
	6H	-6.1	-5.6	-5.8	-5.3	-5.0	-6.1	-5.6	-5.8	-5.3	-5.0	
	8H	-6.1	-5.7	-5.8	-5.4	-5.1	-6.1	-5.7	-5.8	-5.4	-5.1	
4H	12H	-6.2	-5.7	-5.8	-5.4	-5.1	-6.2	-5.7	-5.8	-5.4	-5.1	
	2H	-6.0	-5.5	-5.7	-5.2	-5.0	-6.0	-5.5	-5.7	-5.2	-5.0	
	3H	-6.2	-5.7	-5.8	-5.4	-5.1	-6.2	-5.7	-5.8	-5.4	-5.1	
	4H	-6.2	-5.9	-5.9	-5.5	-5.2	-6.2	-5.9	-5.9	-5.5	-5.2	
	6H	-6.3	-6.0	-5.9	-5.6	-5.3	-6.3	-6.0	-5.9	-5.6	-5.3	
8H	8H	-6.4	-6.1	-5.9	-5.7	-5.3	-6.4	-6.1	-5.9	-5.7	-5.3	
	12H	-6.4	-6.2	-6.0	-5.8	-5.3	-6.4	-6.2	-6.0	-5.8	-5.3	
	4H	-6.4	-6.1	-5.9	-5.7	-5.3	-6.4	-6.1	-5.9	-5.7	-5.3	
	6H	-6.4	-6.2	-6.0	-5.8	-5.4	-6.4	-6.2	-6.0	-5.8	-5.4	
	8H	-6.5	-6.3	-6.0	-5.9	-5.4	-6.5	-6.3	-6.0	-5.9	-5.4	
12H	12H	-6.5	-6.4	-6.1	-5.9	-5.4	-6.5	-6.4	-6.1	-5.9	-5.4	
	4H	-6.4	-6.2	-6.0	-5.8	-5.3	-6.4	-6.2	-6.0	-5.8	-5.3	
	6H	-6.5	-6.3	-6.0	-5.9	-5.4	-6.5	-6.3	-6.0	-5.9	-5.4	
	8H	-6.5	-6.4	-6.1	-5.9	-5.4	-6.5	-6.4	-6.1	-5.9	-5.4	
	Variation of the observer position for the luminaire distances S											
S = 1.0H		+0.0 / 0.0					+0.0 / 0.0					
S = 1.5H		+0.0 / 0.0					+0.0 / 0.0					
S = 2.0H		+0.0 / 0.0					+0.0 / 0.0					
Standard table		BK00					BK00					
Correction Summand		-20.0					-20.0					
Corrected Glare Indices referring to 250lm Total Luminous Flux												



DIMENSIONS



Ø 36

45

MIN. 49

Ø 43

AWARDS



Name	SHOT LIGHT CRI 90 17° 4000K Z
Reference	A2680112Z
Color	Aluminium
RAL	9006
Category	CEILING RECESSED

PRODUCT

Light source	LED
Gross luminous flux	250 Lm
Power	2,1 W
Power values of the system	3,23 W
Colour temperature	4000 K
Colour Rendering Index	CRI>90
Chromatic stability	Mac Adam Step 3
Light beam angle	17°
Unified Glare Rating	UGR<19
Lighting efficiency	92%
Efficacy	119 Lm/W
Current intensity	700 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included - Connected
Emergency power supply	Please Consult
Electrical insulation class	□
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A++
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


Ingress Protection	IP20
Recess measurements	Ø38 mm.
Weight	100 g.
Packaged weight	120 g.
Packaging dimensions	77 × 70 × 53 mm.
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene

OTHER DATA




A luminary conceived to be a small, discreet point of light in the ceiling that hides the illumination source from sight and aims to offer maximum visual comfort. In order to achieve this, it has an anti-glare screen and a specifically designed micro-reflector that generates a perfectly defined light beam.

POLAR DIAGRAM

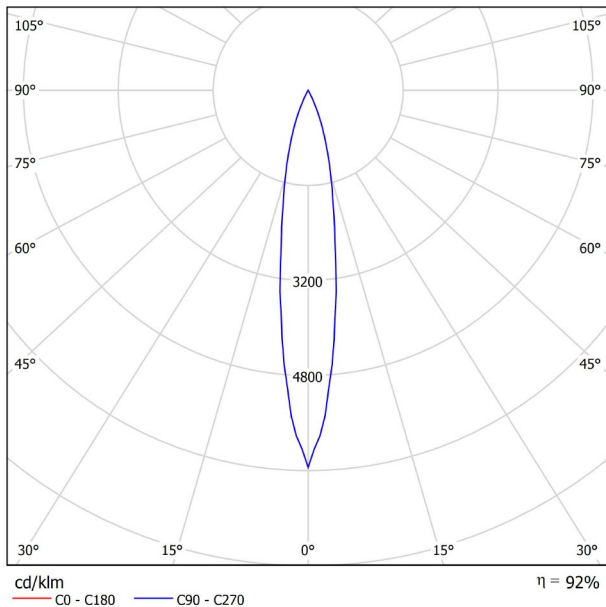

CONICAL DIAGRAM

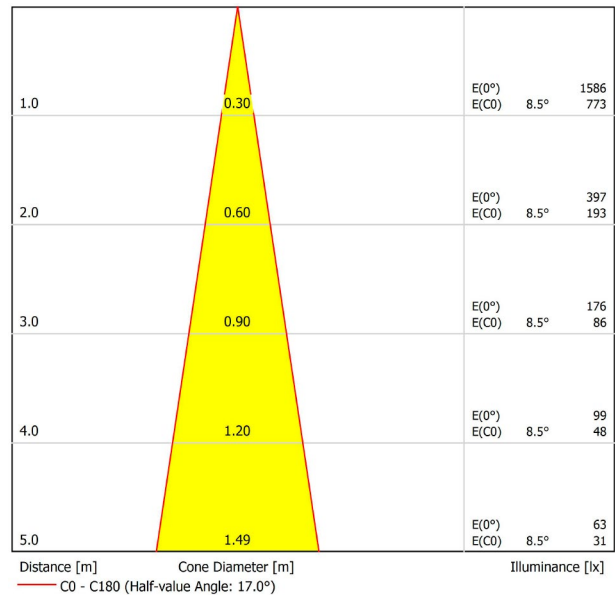


UGR

Glare Evaluation According to UGR												
ρ Ceiling		70	70	50	50	30	70	70	50	50	30	
ρ Walls		50	30	50	50	30	50	30	50	30	30	
ρ Floor		20	20	20	20	20	20	20	20	20	20	
Room Size X Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis					
2H	2H	-5.8	-5.2	-5.6	-5.0	-4.8	-5.8	-5.2	-5.6	-5.0	-4.8	
	3H	-5.9	-5.4	-5.7	-5.1	-4.9	-5.9	-5.4	-5.7	-5.1	-4.9	
	4H	-6.0	-5.5	-5.7	-5.2	-5.0	-6.0	-5.5	-5.7	-5.2	-5.0	
	6H	-6.1	-5.6	-5.8	-5.3	-5.0	-6.1	-5.6	-5.8	-5.3	-5.0	
	8H	-6.1	-5.7	-5.8	-5.4	-5.1	-6.1	-5.7	-5.8	-5.4	-5.1	
4H	12H	-6.2	-5.7	-5.8	-5.4	-5.1	-6.2	-5.7	-5.8	-5.4	-5.1	
	2H	-6.0	-5.5	-5.7	-5.2	-5.0	-6.0	-5.5	-5.7	-5.2	-5.0	
	3H	-6.2	-5.7	-5.8	-5.4	-5.1	-6.2	-5.7	-5.8	-5.4	-5.1	
	4H	-6.2	-5.9	-5.9	-5.5	-5.2	-6.2	-5.9	-5.9	-5.5	-5.2	
	6H	-6.3	-6.0	-5.9	-5.6	-5.3	-6.3	-6.0	-5.9	-5.6	-5.3	
8H	8H	-6.4	-6.1	-5.9	-5.7	-5.3	-6.4	-6.1	-5.9	-5.7	-5.3	
	12H	-6.4	-6.2	-6.0	-5.8	-5.3	-6.4	-6.2	-6.0	-5.8	-5.3	
	4H	-6.4	-6.1	-5.9	-5.7	-5.3	-6.4	-6.1	-5.9	-5.7	-5.3	
	6H	-6.4	-6.2	-6.0	-5.8	-5.4	-6.4	-6.2	-6.0	-5.8	-5.4	
	8H	-6.5	-6.3	-6.0	-5.9	-5.4	-6.5	-6.3	-6.0	-5.9	-5.4	
12H	12H	-6.5	-6.4	-6.1	-5.9	-5.4	-6.5	-6.4	-6.1	-5.9	-5.4	
	4H	-6.4	-6.2	-6.0	-5.8	-5.3	-6.4	-6.2	-6.0	-5.8	-5.3	
	6H	-6.5	-6.3	-6.0	-5.9	-5.4	-6.5	-6.3	-6.0	-5.9	-5.4	
	8H	-6.5	-6.4	-6.1	-5.9	-5.4	-6.5	-6.4	-6.1	-5.9	-5.4	
	Variation of the observer position for the luminaire distances S											
S = 1.0H		+0.0 / 0.0					+0.0 / 0.0					
S = 1.5H		+0.0 / 0.0					+0.0 / 0.0					
S = 2.0H		+0.0 / 0.0					+0.0 / 0.0					
Standard table		BK00					BK00					
Correction Summand		-20.0					-20.0					
Corrected Glare Indices referring to 250lm Total Luminous Flux												



DIMENSIONS



AWARDS



Name	SHOT LIGHT CRI 90 35° 2700K G
Reference	A2680120G
Color	Gold
RAL	1036
Category	CEILING RECESSED

PRODUCT

Light source	LED
Gross luminous flux	190 Lm
Power	2,1 W
Power values of the system	3,23 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	Mac Adam Step 3
Light beam angle	35°
Unified Glare Rating	UGR<19
Lighting efficiency	93%
Efficacy	90 Lm/W
Current intensity	700 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included - Connected
Emergency power supply	Please Consult
Electrical insulation class	□
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A++
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


Ingress Protection	IP20
Recess measurements	Ø38 mm.
Weight	100 g.
Packaged weight	120 g.
Packaging dimensions	77 × 70 × 53 mm.
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene

OTHER DATA




A luminary conceived to be a small, discreet point of light in the ceiling that hides the illumination source from sight and aims to offer maximum visual comfort. In order to achieve this, it has an anti-glare screen and a specifically designed micro-reflector that generates a perfectly defined light beam.

POLAR DIAGRAM

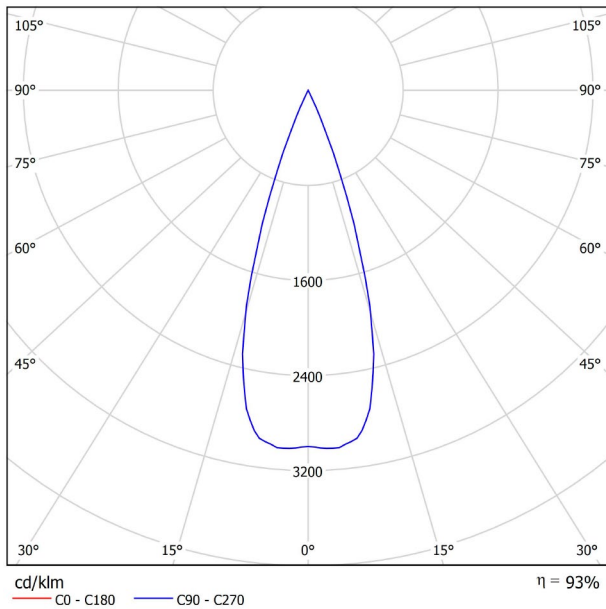

CONICAL DIAGRAM

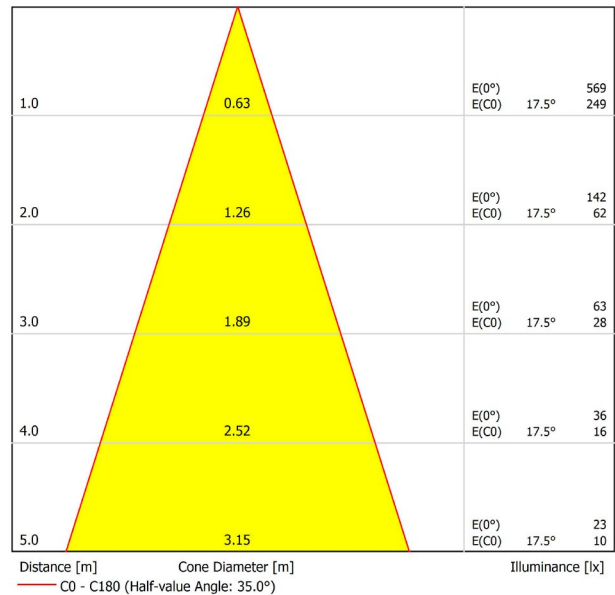


UGR

Glare Evaluation According to UGR												
ρ Ceiling		70	70	50	50	30	70	70	50	50	30	
ρ Walls		50	30	50	30	30	50	30	50	30	30	
ρ Floor		20	20	20	20	20	20	20	20	20	20	
Room Size X Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis					
2H	2H	-6.8	-6.2	-6.6	-6.0	-5.8	-6.8	-6.2	-6.6	-6.0	-5.8	
	3H	-6.9	-6.4	-6.7	-6.1	-5.9	-6.9	-6.4	-6.7	-6.1	-5.9	
	4H	-7.0	-6.5	-6.7	-6.2	-6.0	-7.0	-6.5	-6.7	-6.2	-6.0	
	6H	-7.1	-6.6	-6.8	-6.3	-6.0	-7.1	-6.6	-6.8	-6.3	-6.0	
	8H	-7.1	-6.6	-6.8	-6.4	-6.1	-7.1	-6.6	-6.8	-6.4	-6.1	
4H	12H	-7.2	-6.7	-6.8	-6.4	-6.1	-7.2	-6.7	-6.8	-6.4	-6.1	
	2H	-7.0	-6.5	-6.7	-6.2	-6.0	-7.0	-6.5	-6.7	-6.2	-6.0	
	3H	-7.2	-6.7	-6.8	-6.4	-6.1	-7.2	-6.7	-6.8	-6.4	-6.1	
	4H	-7.2	-6.8	-6.9	-6.5	-6.2	-7.2	-6.8	-6.9	-6.5	-6.2	
	6H	-7.3	-7.0	-6.9	-6.6	-6.2	-7.3	-7.0	-6.9	-6.6	-6.2	
8H	8H	-7.3	-7.1	-6.9	-6.7	-6.3	-7.3	-7.1	-6.9	-6.7	-6.3	
	12H	-7.4	-7.1	-6.9	-6.7	-6.3	-7.4	-7.1	-6.9	-6.7	-6.3	
	4H	-7.3	-7.1	-6.9	-6.7	-6.3	-7.3	-7.1	-6.9	-6.7	-6.3	
	6H	-7.4	-7.2	-7.0	-6.8	-6.4	-7.4	-7.2	-7.0	-6.8	-6.4	
	8H	-7.5	-7.3	-7.0	-6.9	-6.4	-7.5	-7.3	-7.0	-6.9	-6.4	
12H	12H	-7.5	-7.4	-7.0	-6.9	-6.4	-7.5	-7.4	-7.0	-6.9	-6.4	
	4H	-7.4	-7.1	-6.9	-6.7	-6.3	-7.4	-7.1	-6.9	-6.7	-6.3	
	6H	-7.5	-7.3	-7.0	-6.9	-6.4	-7.5	-7.3	-7.0	-6.9	-6.4	
	8H	-7.5	-7.4	-7.0	-6.9	-6.4	-7.5	-7.4	-7.0	-6.9	-6.4	
	Variation of the observer position for the luminaire distances S											
S = 1.0H		+0.0 / 0.0					+0.0 / 0.0					
S = 1.5H		+0.0 / 0.0					+0.0 / 0.0					
S = 2.0H		+0.0 / 0.0					+0.0 / 0.0					
Standard table		BK00					BK00					
Correction Summand		-20.0					-20.0					
Corrected Glare Indices referring to 190lm Total Luminous Flux												



DIMENSIONS



AWARDS



Name	SHOT LIGHT CRI 90 35° 2700K N
Reference	A2680120N
Color	Black
RAL	Colour in the mass looks alike RAL 9005
Category	CEILING RECESSED

PRODUCT

Light source	LED
Gross luminous flux	190 Lm
Power	2,1 W
Power values of the system	3,23 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	Mac Adam Step 3
Light beam angle	35°
Unified Glare Rating	UGR<19
Lighting efficiency	93%
Efficacy	90 Lm/W
Current intensity	700 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included - Connected
Emergency power supply	Please Consult
Electrical insulation class	□
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A++
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


Ingress Protection	IP20
Recess measurements	Ø38 mm.
Weight	100 g.
Packaged weight	120 g.
Packaging dimensions	77 × 70 × 53 mm.
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene

OTHER DATA




A luminary conceived to be a small, discreet point of light in the ceiling that hides the illumination source from sight and aims to offer maximum visual comfort. In order to achieve this, it has an anti-glare screen and a specifically designed micro-reflector that generates a perfectly defined light beam.

POLAR DIAGRAM

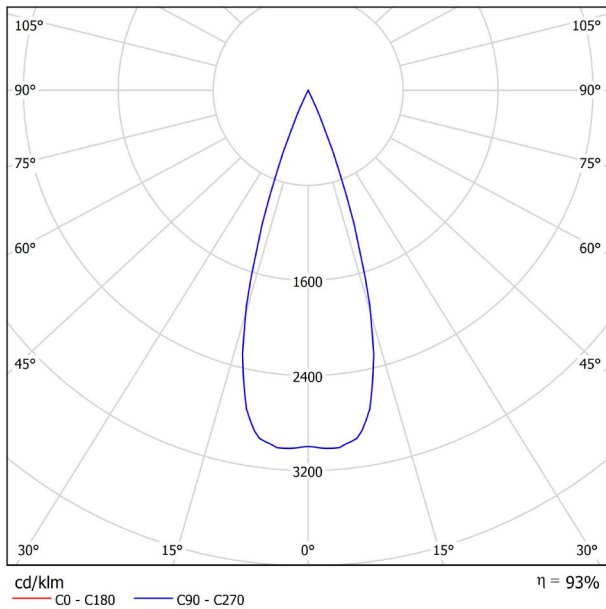

CONICAL DIAGRAM

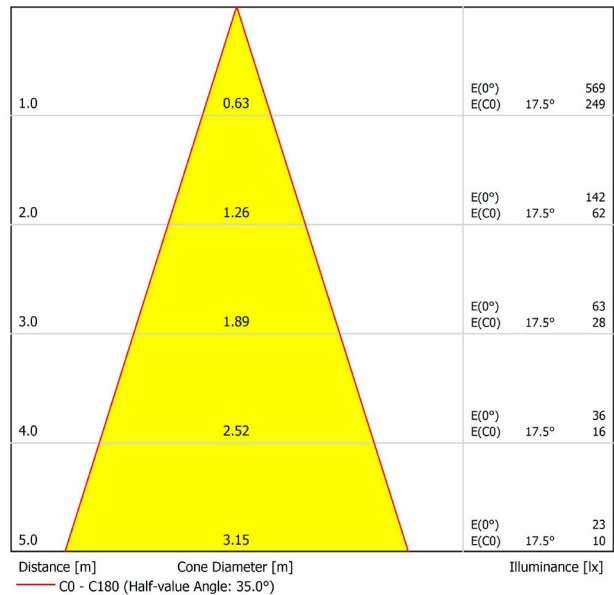


UGR

Glare Evaluation According to UGR												
ρ Ceiling		70	70	50	50	30	70	70	50	50	30	
ρ Walls		50	30	50	30	30	50	30	50	30	30	
ρ Floor		20	20	20	20	20	20	20	20	20	20	
Room Size X Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis					
2H	2H	-6.8	-6.2	-6.6	-6.0	-5.8	-6.8	-6.2	-6.6	-6.0	-5.8	
	3H	-6.9	-6.4	-6.7	-6.1	-5.9	-6.9	-6.4	-6.7	-6.1	-5.9	
	4H	-7.0	-6.5	-6.7	-6.2	-6.0	-7.0	-6.5	-6.7	-6.2	-6.0	
	6H	-7.1	-6.6	-6.8	-6.3	-6.0	-7.1	-6.6	-6.8	-6.3	-6.0	
	8H	-7.1	-6.6	-6.8	-6.4	-6.1	-7.1	-6.6	-6.8	-6.4	-6.1	
4H	12H	-7.2	-6.7	-6.8	-6.4	-6.1	-7.2	-6.7	-6.8	-6.4	-6.1	
	2H	-7.0	-6.5	-6.7	-6.2	-6.0	-7.0	-6.5	-6.7	-6.2	-6.0	
	3H	-7.2	-6.7	-6.8	-6.4	-6.1	-7.2	-6.7	-6.8	-6.4	-6.1	
	4H	-7.2	-6.8	-6.9	-6.5	-6.2	-7.2	-6.8	-6.9	-6.5	-6.2	
	6H	-7.3	-7.0	-6.9	-6.6	-6.2	-7.3	-7.0	-6.9	-6.6	-6.2	
8H	8H	-7.3	-7.1	-6.9	-6.7	-6.3	-7.3	-7.1	-6.9	-6.7	-6.3	
	12H	-7.4	-7.1	-6.9	-6.7	-6.3	-7.4	-7.1	-6.9	-6.7	-6.3	
	4H	-7.3	-7.1	-6.9	-6.7	-6.3	-7.3	-7.1	-6.9	-6.7	-6.3	
	6H	-7.4	-7.2	-7.0	-6.8	-6.4	-7.4	-7.2	-7.0	-6.8	-6.4	
	8H	-7.5	-7.3	-7.0	-6.9	-6.4	-7.5	-7.3	-7.0	-6.9	-6.4	
12H	12H	-7.5	-7.4	-7.0	-6.9	-6.4	-7.5	-7.4	-7.0	-6.9	-6.4	
	4H	-7.4	-7.1	-6.9	-6.7	-6.3	-7.4	-7.1	-6.9	-6.7	-6.3	
	6H	-7.5	-7.3	-7.0	-6.9	-6.4	-7.5	-7.3	-7.0	-6.9	-6.4	
	8H	-7.5	-7.4	-7.0	-6.9	-6.4	-7.5	-7.4	-7.0	-6.9	-6.4	
	Variation of the observer position for the luminaire distances S											
S = 1.0H		+0.0 / 0.0					+0.0 / 0.0					
S = 1.5H		+0.0 / 0.0					+0.0 / 0.0					
S = 2.0H		+0.0 / 0.0					+0.0 / 0.0					
Standard table		BK00					BK00					
Correction Summand		-20.0					-20.0					
Corrected Glare Indices referring to 190lm Total Luminous Flux												



DIMENSIONS



AWARDS



Name	SHOT LIGHT CRI 90 35° 2700K R
Reference	A2680120R
Color	Red
RAL	2004
Category	CEILING RECESSED

PRODUCT

Light source	LED
Gross luminous flux	190 Lm
Power	2,1 W
Power values of the system	3,23 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	Mac Adam Step 3
Light beam angle	35°
Unified Glare Rating	UGR<19
Lighting efficiency	93%
Efficacy	90 Lm/W
Current intensity	700 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included - Connected
Emergency power supply	Please Consult
Electrical insulation class	□
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A++
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


Ingress Protection	IP20
Recess measurements	Ø38 mm.
Weight	100 g.
Packaged weight	120 g.
Packaging dimensions	77 × 70 × 53 mm.
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene

OTHER DATA




A luminary conceived to be a small, discreet point of light in the ceiling that hides the illumination source from sight and aims to offer maximum visual comfort. In order to achieve this, it has an anti-glare screen and a specifically designed micro-reflector that generates a perfectly defined light beam.

POLAR DIAGRAM

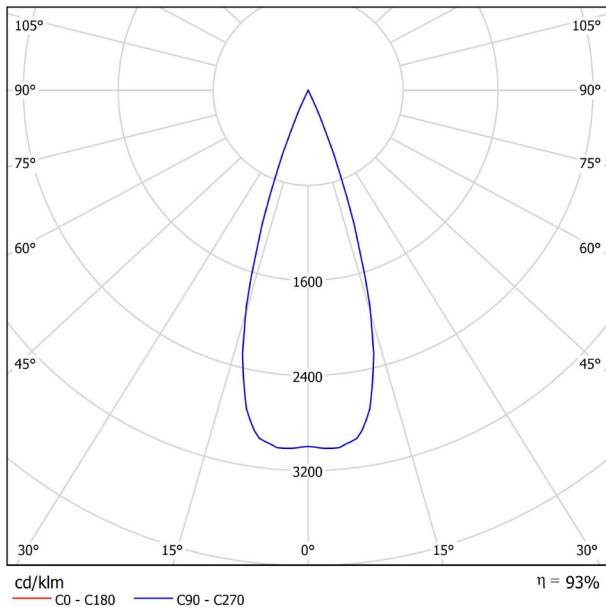

CONICAL DIAGRAM

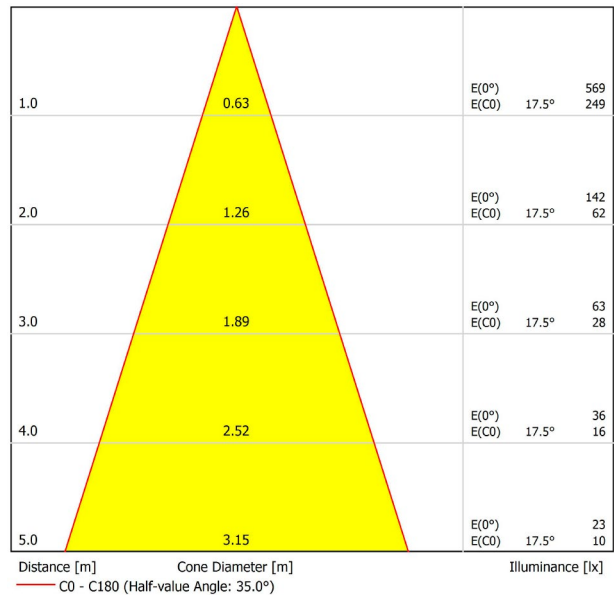


UGR

Glare Evaluation According to UGR												
p Ceiling		70	70	50	50	30	70	70	50	50	30	
p Walls		50	30	50	30	30	50	30	50	30	30	
p Floor		20	20	20	20	20	20	20	20	20	20	
Room Size X Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis					
2H	2H	-6.8	-6.2	-6.6	-6.0	-5.8	-6.8	-6.2	-6.6	-6.0	-5.8	
	3H	-6.9	-6.4	-6.7	-6.1	-5.9	-6.9	-6.4	-6.7	-6.1	-5.9	
	4H	-7.0	-6.5	-6.7	-6.2	-6.0	-7.0	-6.5	-6.7	-6.2	-6.0	
	6H	-7.1	-6.6	-6.8	-6.3	-6.0	-7.1	-6.6	-6.8	-6.3	-6.0	
	8H	-7.1	-6.6	-6.8	-6.4	-6.1	-7.1	-6.6	-6.8	-6.4	-6.1	
4H	12H	-7.2	-6.7	-6.8	-6.4	-6.1	-7.2	-6.7	-6.8	-6.4	-6.1	
	2H	-7.0	-6.5	-6.7	-6.2	-6.0	-7.0	-6.5	-6.7	-6.2	-6.0	
	3H	-7.2	-6.7	-6.8	-6.4	-6.1	-7.2	-6.7	-6.8	-6.4	-6.1	
	4H	-7.2	-6.8	-6.9	-6.5	-6.2	-7.2	-6.8	-6.9	-6.5	-6.2	
	6H	-7.3	-7.0	-6.9	-6.6	-6.2	-7.3	-7.0	-6.9	-6.6	-6.2	
8H	8H	-7.3	-7.1	-6.9	-6.7	-6.3	-7.3	-7.1	-6.9	-6.7	-6.3	
	12H	-7.4	-7.1	-6.9	-6.7	-6.3	-7.4	-7.1	-6.9	-6.7	-6.3	
	4H	-7.3	-7.1	-6.9	-6.7	-6.3	-7.3	-7.1	-6.9	-6.7	-6.3	
	6H	-7.4	-7.2	-7.0	-6.8	-6.4	-7.4	-7.2	-7.0	-6.8	-6.4	
	8H	-7.5	-7.3	-7.0	-6.9	-6.4	-7.5	-7.3	-7.0	-6.9	-6.4	
12H	12H	-7.5	-7.4	-7.0	-6.9	-6.4	-7.5	-7.4	-7.0	-6.9	-6.4	
	4H	-7.4	-7.1	-6.9	-6.7	-6.3	-7.4	-7.1	-6.9	-6.7	-6.3	
	6H	-7.5	-7.3	-7.0	-6.9	-6.4	-7.5	-7.3	-7.0	-6.9	-6.4	
	8H	-7.5	-7.4	-7.0	-6.9	-6.4	-7.5	-7.4	-7.0	-6.9	-6.4	
	Variation of the observer position for the luminaire distances S											
S = 1.0H		+0.0 / 0.0					+0.0 / 0.0					
S = 1.5H		+0.0 / 0.0					+0.0 / 0.0					
S = 2.0H		+0.0 / 0.0					+0.0 / 0.0					
Standard table		BK00					BK00					
Correction Summand		-20.0					-20.0					
Corrected Glare Indices referring to 190lm Total Luminous Flux												



DIMENSIONS



AWARDS



Name	SHOT LIGHT CRI 90 35° 2700K W
Reference	A2680120W
Color	White
RAL	Colour in the mass looks alike RAL 9016
Category	CEILING RECESSED

PRODUCT

Light source	LED
Gross luminous flux	190 Lm
Power	2,1 W
Power values of the system	3,23 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	Mac Adam Step 3
Light beam angle	35°
Unified Glare Rating	UGR<19
Lighting efficiency	93%
Efficacy	90 Lm/W
Current intensity	700 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included - Connected
Emergency power supply	Please Consult
Electrical insulation class	□
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A++
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


Ingress Protection	IP20
Recess measurements	Ø38 mm.
Weight	100 g.
Packaged weight	120 g.
Packaging dimensions	77 × 70 × 53 mm.
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene

OTHER DATA




A luminary conceived to be a small, discreet point of light in the ceiling that hides the illumination source from sight and aims to offer maximum visual comfort. In order to achieve this, it has an anti-glare screen and a specifically designed micro-reflector that generates a perfectly defined light beam.

POLAR DIAGRAM

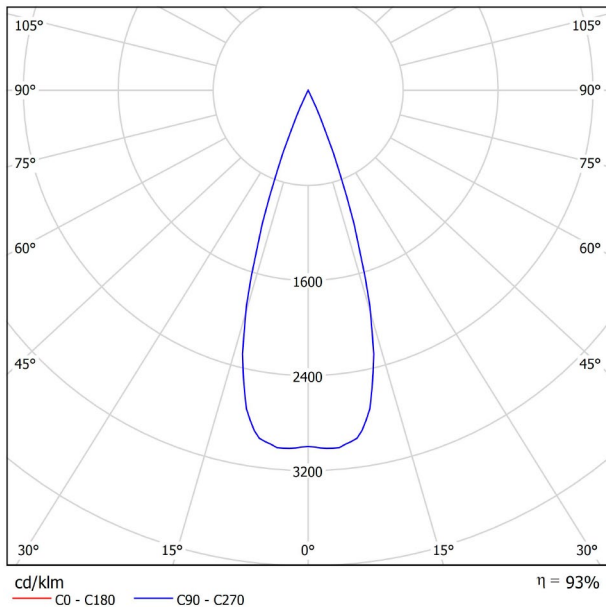

CONICAL DIAGRAM

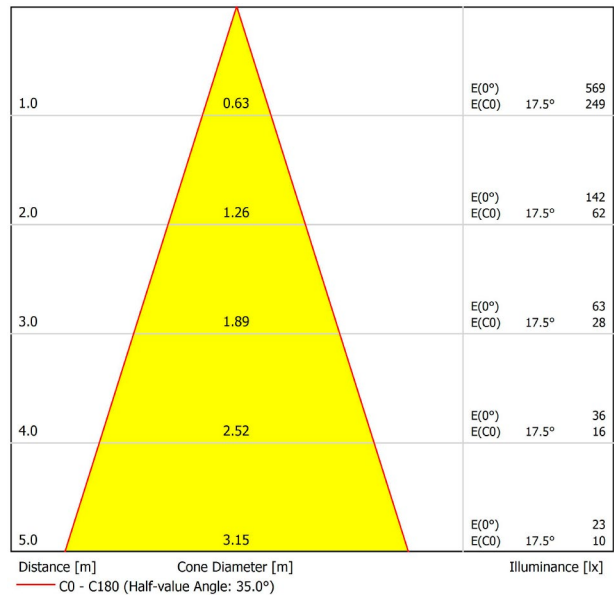


UGR

Glare Evaluation According to UGR											
p Ceiling		70	70	50	50	30	70	70	50	50	30
p Walls		50	30	50	30	30	50	30	50	30	30
p Floor		20	20	20	20	20	20	20	20	20	20
Room Size X Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis				
2H	2H	-6.8	-6.2	-6.6	-6.0	-5.8	-6.8	-6.2	-6.6	-6.0	-5.8
	3H	-6.9	-6.4	-6.7	-6.1	-5.9	-6.9	-6.4	-6.7	-6.1	-5.9
	4H	-7.0	-6.5	-6.7	-6.2	-6.0	-7.0	-6.5	-6.7	-6.2	-6.0
	6H	-7.1	-6.6	-6.8	-6.3	-6.0	-7.1	-6.6	-6.8	-6.3	-6.0
	8H	-7.1	-6.6	-6.8	-6.4	-6.1	-7.1	-6.6	-6.8	-6.4	-6.1
4H	12H	-7.2	-6.7	-6.8	-6.4	-6.1	-7.2	-6.7	-6.8	-6.4	-6.1
	2H	-7.0	-6.5	-6.7	-6.2	-6.0	-7.0	-6.5	-6.7	-6.2	-6.0
	3H	-7.2	-6.7	-6.8	-6.4	-6.1	-7.2	-6.7	-6.8	-6.4	-6.1
	4H	-7.2	-6.8	-6.9	-6.5	-6.2	-7.2	-6.8	-6.9	-6.5	-6.2
	6H	-7.3	-7.0	-6.9	-6.6	-6.2	-7.3	-7.0	-6.9	-6.6	-6.2
8H	8H	-7.3	-7.1	-6.9	-6.7	-6.3	-7.3	-7.1	-6.9	-6.7	-6.3
	12H	-7.4	-7.1	-6.9	-6.7	-6.3	-7.4	-7.1	-6.9	-6.7	-6.3
	4H	-7.3	-7.1	-6.9	-6.7	-6.3	-7.3	-7.1	-6.9	-6.7	-6.3
	6H	-7.4	-7.2	-7.0	-6.8	-6.4	-7.4	-7.2	-7.0	-6.8	-6.4
	8H	-7.5	-7.3	-7.0	-6.9	-6.4	-7.5	-7.3	-7.0	-6.9	-6.4
12H	12H	-7.5	-7.4	-7.0	-6.9	-6.4	-7.5	-7.4	-7.0	-6.9	-6.4
	4H	-7.4	-7.1	-6.9	-6.7	-6.3	-7.4	-7.1	-6.9	-6.7	-6.3
	6H	-7.5	-7.3	-7.0	-6.9	-6.4	-7.5	-7.3	-7.0	-6.9	-6.4
	8H	-7.5	-7.4	-7.0	-6.9	-6.4	-7.5	-7.4	-7.0	-6.9	-6.4
	Variation of the observer position for the luminaire distances S										
S = 1.0H		+0.0 / 0.0					+0.0 / 0.0				
S = 1.5H		+0.0 / 0.0					+0.0 / 0.0				
S = 2.0H		+0.0 / 0.0					+0.0 / 0.0				
Standard table		BK00					BK00				
Correction Summand		-20.0					-20.0				
Corrected Glare Indices referring to 190lm Total Luminous Flux											



DIMENSIONS



AWARDS



Name	SHOT LIGHT CRI 90 35° 2700K WN
Reference	A2680120WN
Color	White-Black
RAL	Colour in the mass looks alike RAL 9016 & 9005
Category	CEILING RECESSED

PRODUCT

Light source	LED
Gross luminous flux	190 Lm
Power	2,1 W
Power values of the system	3,23 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	Mac Adam Step 3
Light beam angle	35°
Unified Glare Rating	UGR<19
Lighting efficiency	93%
Efficacy	90 Lm/W
Current intensity	700 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included - Connected
Emergency power supply	Please Consult
Electrical insulation class	□
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A++
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


Ingress Protection	IP20
Recess measurements	Ø38 mm.
Weight	100 g.
Packaged weight	120 g.
Packaging dimensions	77 × 70 × 53 mm.
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene

OTHER DATA




A luminary conceived to be a small, discreet point of light in the ceiling that hides the illumination source from sight and aims to offer maximum visual comfort. In order to achieve this, it has an anti-glare screen and a specifically designed micro-reflector that generates a perfectly defined light beam.

POLAR DIAGRAM

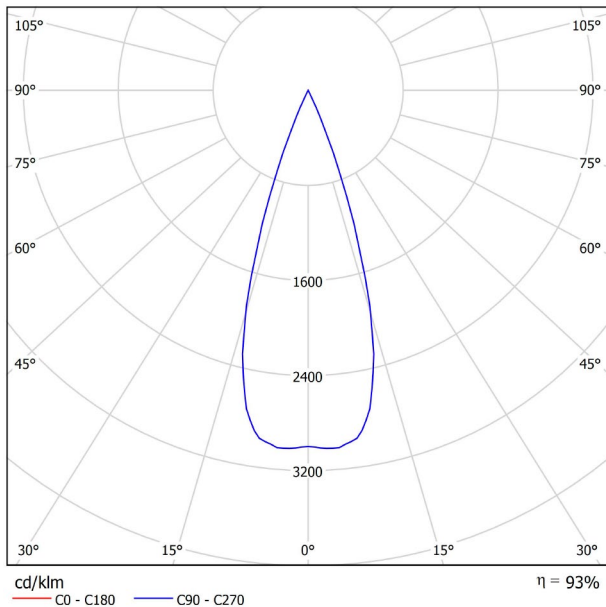

CONICAL DIAGRAM

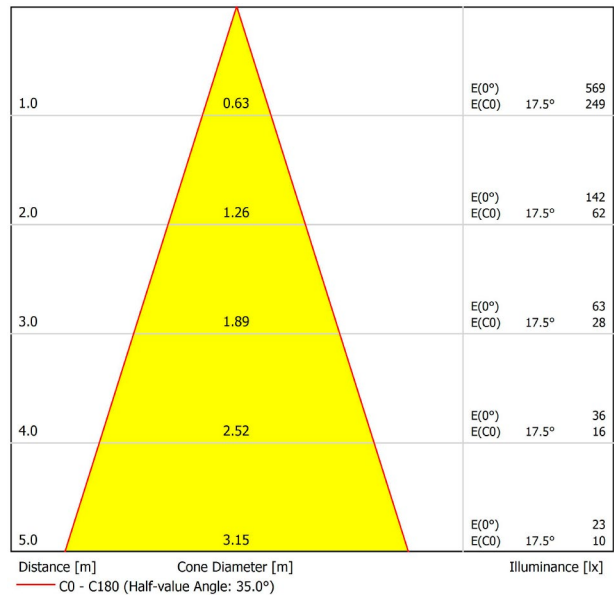


UGR

Glare Evaluation According to UGR												
p Ceiling		70	70	50	50	30	70	70	50	50	30	
p Walls		50	30	50	30	30	50	30	50	30	30	
p Floor		20	20	20	20	20	20	20	20	20	20	
Room Size X Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis					
2H	2H	-6.8	-6.2	-6.6	-6.0	-5.8	-6.8	-6.2	-6.6	-6.0	-5.8	
	3H	-6.9	-6.4	-6.7	-6.1	-5.9	-6.9	-6.4	-6.7	-6.1	-5.9	
	4H	-7.0	-6.5	-6.7	-6.2	-6.0	-7.0	-6.5	-6.7	-6.2	-6.0	
	6H	-7.1	-6.6	-6.8	-6.3	-6.0	-7.1	-6.6	-6.8	-6.3	-6.0	
	8H	-7.1	-6.6	-6.8	-6.4	-6.1	-7.1	-6.6	-6.8	-6.4	-6.1	
4H	12H	-7.2	-6.7	-6.8	-6.4	-6.1	-7.2	-6.7	-6.8	-6.4	-6.1	
	2H	-7.0	-6.5	-6.7	-6.2	-6.0	-7.0	-6.5	-6.7	-6.2	-6.0	
	3H	-7.2	-6.7	-6.8	-6.4	-6.1	-7.2	-6.7	-6.8	-6.4	-6.1	
	4H	-7.2	-6.8	-6.9	-6.5	-6.2	-7.2	-6.8	-6.9	-6.5	-6.2	
	6H	-7.3	-7.0	-6.9	-6.6	-6.2	-7.3	-7.0	-6.9	-6.6	-6.2	
8H	8H	-7.3	-7.1	-6.9	-6.7	-6.3	-7.3	-7.1	-6.9	-6.7	-6.3	
	12H	-7.4	-7.1	-6.9	-6.7	-6.3	-7.4	-7.1	-6.9	-6.7	-6.3	
	4H	-7.3	-7.1	-6.9	-6.7	-6.3	-7.3	-7.1	-6.9	-6.7	-6.3	
	6H	-7.4	-7.2	-7.0	-6.8	-6.4	-7.4	-7.2	-7.0	-6.8	-6.4	
	8H	-7.5	-7.3	-7.0	-6.9	-6.4	-7.5	-7.3	-7.0	-6.9	-6.4	
12H	12H	-7.5	-7.4	-7.0	-6.9	-6.4	-7.5	-7.4	-7.0	-6.9	-6.4	
	4H	-7.4	-7.1	-6.9	-6.7	-6.3	-7.4	-7.1	-6.9	-6.7	-6.3	
	6H	-7.5	-7.3	-7.0	-6.9	-6.4	-7.5	-7.3	-7.0	-6.9	-6.4	
	8H	-7.5	-7.4	-7.0	-6.9	-6.4	-7.5	-7.4	-7.0	-6.9	-6.4	
	Variation of the observer position for the luminaire distances S											
S = 1.0H		+0.0 / 0.0					+0.0 / 0.0					
S = 1.5H		+0.0 / 0.0					+0.0 / 0.0					
S = 2.0H		+0.0 / 0.0					+0.0 / 0.0					
Standard table		BK00					BK00					
Correction Summand		-20.0					-20.0					
Corrected Glare Indices referring to 190lm Total Luminous Flux												



DIMENSIONS



Ø 36



45

MIN. 49

Ø 43

AWARDS



Name	SHOT LIGHT CRI 90 35° 2700K Z
Reference	A2680120Z
Color	Aluminium
RAL	9006
Category	CEILING RECESSED

PRODUCT

Light source	LED
Gross luminous flux	190 Lm
Power	2,1 W
Power values of the system	3,23 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	Mac Adam Step 3
Light beam angle	35°
Unified Glare Rating	UGR<19
Lighting efficiency	93%
Efficacy	90 Lm/W
Current intensity	700 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included - Connected
Emergency power supply	Please Consult
Electrical insulation class	□
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A++
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


Ingress Protection	IP20
Recess measurements	Ø38 mm.
Weight	100 g.
Packaged weight	120 g.
Packaging dimensions	77 × 70 × 53 mm.
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene

OTHER DATA




A luminary conceived to be a small, discreet point of light in the ceiling that hides the illumination source from sight and aims to offer maximum visual comfort. In order to achieve this, it has an anti-glare screen and a specifically designed micro-reflector that generates a perfectly defined light beam.

POLAR DIAGRAM

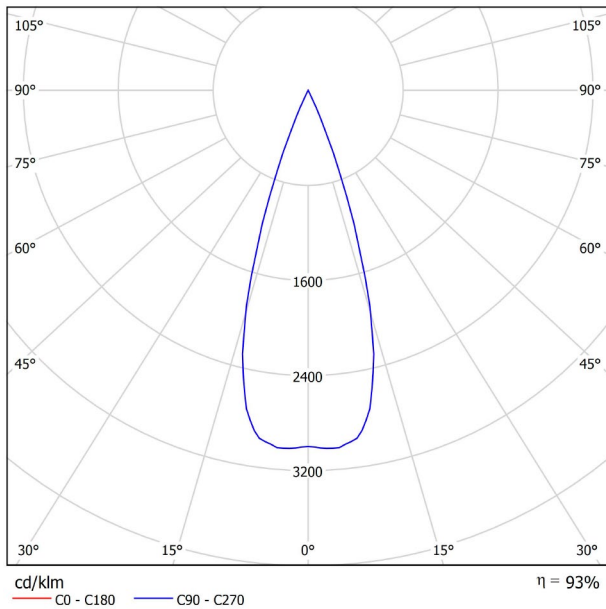

CONICAL DIAGRAM

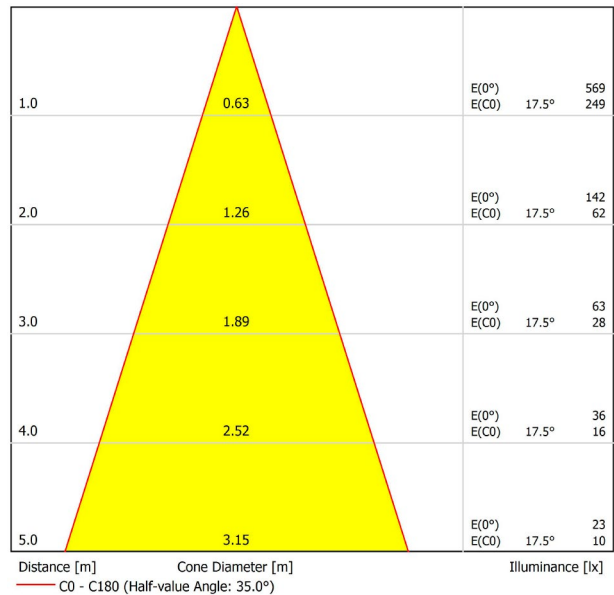


UGR

Glare Evaluation According to UGR												
ρ Ceiling		70	70	50	50	30	70	70	50	50	30	
ρ Walls		50	30	50	30	30	50	30	50	30	30	
ρ Floor		20	20	20	20	20	20	20	20	20	20	
Room Size X Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis					
2H	2H	-6.8	-6.2	-6.6	-6.0	-5.8	-6.8	-6.2	-6.6	-6.0	-5.8	
	3H	-6.9	-6.4	-6.7	-6.1	-5.9	-6.9	-6.4	-6.7	-6.1	-5.9	
	4H	-7.0	-6.5	-6.7	-6.2	-6.0	-7.0	-6.5	-6.7	-6.2	-6.0	
	6H	-7.1	-6.6	-6.8	-6.3	-6.0	-7.1	-6.6	-6.8	-6.3	-6.0	
	8H	-7.1	-6.6	-6.8	-6.4	-6.1	-7.1	-6.6	-6.8	-6.4	-6.1	
4H	12H	-7.2	-6.7	-6.8	-6.4	-6.1	-7.2	-6.7	-6.8	-6.4	-6.1	
	2H	-7.0	-6.5	-6.7	-6.2	-6.0	-7.0	-6.5	-6.7	-6.2	-6.0	
	3H	-7.2	-6.7	-6.8	-6.4	-6.1	-7.2	-6.7	-6.8	-6.4	-6.1	
	4H	-7.2	-6.8	-6.9	-6.5	-6.2	-7.2	-6.8	-6.9	-6.5	-6.2	
	6H	-7.3	-7.0	-6.9	-6.6	-6.2	-7.3	-7.0	-6.9	-6.6	-6.2	
8H	8H	-7.3	-7.1	-6.9	-6.7	-6.3	-7.3	-7.1	-6.9	-6.7	-6.3	
	12H	-7.4	-7.1	-6.9	-6.7	-6.3	-7.4	-7.1	-6.9	-6.7	-6.3	
	4H	-7.3	-7.1	-6.9	-6.7	-6.3	-7.3	-7.1	-6.9	-6.7	-6.3	
	6H	-7.4	-7.2	-7.0	-6.8	-6.4	-7.4	-7.2	-7.0	-6.8	-6.4	
	8H	-7.5	-7.3	-7.0	-6.9	-6.4	-7.5	-7.3	-7.0	-6.9	-6.4	
12H	12H	-7.5	-7.4	-7.0	-6.9	-6.4	-7.5	-7.4	-7.0	-6.9	-6.4	
	4H	-7.4	-7.1	-6.9	-6.7	-6.3	-7.4	-7.1	-6.9	-6.7	-6.3	
	6H	-7.5	-7.3	-7.0	-6.9	-6.4	-7.5	-7.3	-7.0	-6.9	-6.4	
	8H	-7.5	-7.4	-7.0	-6.9	-6.4	-7.5	-7.4	-7.0	-6.9	-6.4	
	Variation of the observer position for the luminaire distances S											
S = 1.0H		+0.0 / 0.0					+0.0 / 0.0					
S = 1.5H		+0.0 / 0.0					+0.0 / 0.0					
S = 2.0H		+0.0 / 0.0					+0.0 / 0.0					
Standard table		BK00					BK00					
Correction Summand		-20.0					-20.0					
Corrected Glare Indices referring to 190lm Total Luminous Flux												



DIMENSIONS



AWARDS



Name	SHOT LIGHT CRI 90 35° 3000K G
Reference	A2680121G
Color	Gold
RAL	1036
Category	CEILING RECESSED

PRODUCT

Light source	LED
Gross luminous flux	210 Lm
Power	2,1 W
Power values of the system	3,23 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	Mac Adam Step 3
Light beam angle	35°
Unified Glare Rating	UGR<19
Lighting efficiency	93%
Efficacy	100 Lm/W
Current intensity	700 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included - Connected
Emergency power supply	Please Consult
Electrical insulation class	□
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A++
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


Ingress Protection	IP20
Recess measurements	Ø38 mm.
Weight	100 g.
Packaged weight	120 g.
Packaging dimensions	77 × 70 × 53 mm.
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene

OTHER DATA




A luminary conceived to be a small, discreet point of light in the ceiling that hides the illumination source from sight and aims to offer maximum visual comfort. In order to achieve this, it has an anti-glare screen and a specifically designed micro-reflector that generates a perfectly defined light beam.

POLAR DIAGRAM

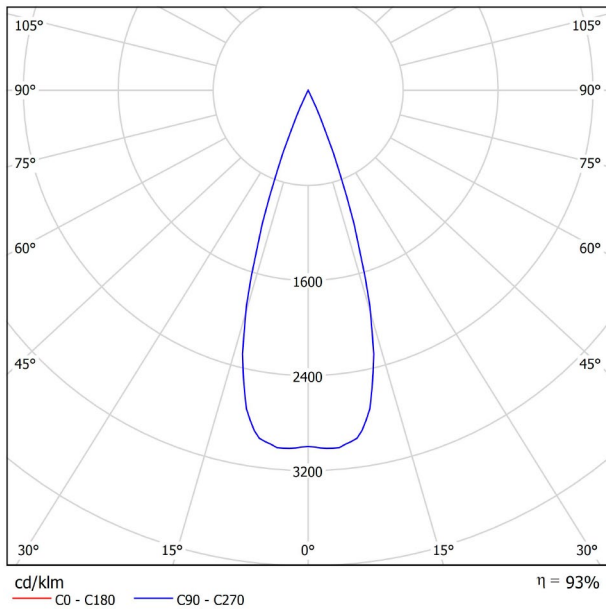

CONICAL DIAGRAM

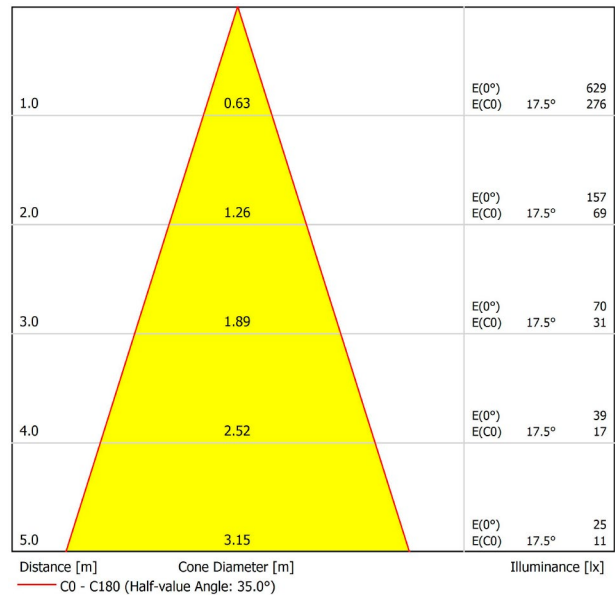


UGR

Glare Evaluation According to UGR												
ρ Ceiling		70	70	50	50	30	70	70	50	50	30	
ρ Walls		50	30	50	30	30	50	30	50	30	30	
ρ Floor		20	20	20	20	20	20	20	20	20	20	
Room Size X Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis					
2H	2H	-6.5	-5.8	-6.2	-5.6	-5.4	-6.5	-5.8	-6.2	-5.6	-5.4	
	3H	-6.6	-6.0	-6.3	-5.8	-5.6	-6.6	-6.0	-6.3	-5.8	-5.6	
	4H	-6.7	-6.1	-6.4	-5.9	-5.6	-6.7	-6.1	-6.4	-5.9	-5.6	
	6H	-6.7	-6.2	-6.4	-6.0	-5.7	-6.7	-6.2	-6.4	-6.0	-5.7	
	8H	-6.8	-6.3	-6.4	-6.0	-5.7	-6.8	-6.3	-6.4	-6.0	-5.7	
4H	12H	-6.8	-6.4	-6.5	-6.1	-5.7	-6.8	-6.4	-6.5	-6.1	-5.7	
	2H	-6.7	-6.1	-6.4	-5.9	-5.6	-6.7	-6.1	-6.4	-5.9	-5.6	
	3H	-6.8	-6.4	-6.5	-6.1	-5.7	-6.8	-6.4	-6.5	-6.1	-5.7	
	4H	-6.9	-6.5	-6.5	-6.2	-5.8	-6.9	-6.5	-6.5	-6.2	-5.8	
	6H	-7.0	-6.6	-6.6	-6.3	-5.9	-7.0	-6.6	-6.6	-6.3	-5.9	
8H	8H	-7.0	-6.7	-6.6	-6.3	-5.9	-7.0	-6.7	-6.6	-6.3	-5.9	
	12H	-7.0	-6.8	-6.6	-6.4	-6.0	-7.0	-6.8	-6.6	-6.4	-6.0	
	4H	-7.0	-6.7	-6.6	-6.3	-5.9	-7.0	-6.7	-6.6	-6.3	-5.9	
	6H	-7.1	-6.9	-6.6	-6.5	-6.0	-7.1	-6.9	-6.6	-6.5	-6.0	
	8H	-7.1	-7.0	-6.7	-6.5	-6.1	-7.1	-7.0	-6.7	-6.5	-6.1	
12H	12H	-7.2	-7.0	-6.7	-6.6	-6.1	-7.2	-7.0	-6.7	-6.6	-6.1	
	4H	-7.0	-6.8	-6.6	-6.4	-6.0	-7.0	-6.8	-6.6	-6.4	-6.0	
	6H	-7.1	-7.0	-6.7	-6.5	-6.1	-7.1	-7.0	-6.7	-6.5	-6.1	
	8H	-7.2	-7.0	-6.7	-6.6	-6.1	-7.2	-7.0	-6.7	-6.6	-6.1	
	Variation of the observer position for the luminaire distances S											
S = 1.0H		+0.0 / 0.0					+0.0 / 0.0					
S = 1.5H		+0.0 / 0.0					+0.0 / 0.0					
S = 2.0H		+0.0 / 0.0					+0.0 / 0.0					
Standard table		BK00					BK00					
Correction Summand		-20.0					-20.0					
Corrected Glare Indices referring to 210lm Total Luminous Flux												



DIMENSIONS



AWARDS



Name	SHOT LIGHT CRI 90 35° 3000K N
Reference	A2680121N
Color	Black
RAL	Colour in the mass looks alike RAL 9005
Category	CEILING RECESSED

PRODUCT

Light source	LED
Gross luminous flux	210 Lm
Power	2,1 W
Power values of the system	3,23 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	Mac Adam Step 3
Light beam angle	35°
Unified Glare Rating	UGR<19
Lighting efficiency	93%
Efficacy	100 Lm/W
Current intensity	700 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included - Connected
Emergency power supply	Please Consult
Electrical insulation class	□
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A++
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


Ingress Protection	IP20
Recess measurements	Ø38 mm.
Weight	100 g.
Packaged weight	120 g.
Packaging dimensions	77 × 70 × 53 mm.
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene

OTHER DATA




A luminary conceived to be a small, discreet point of light in the ceiling that hides the illumination source from sight and aims to offer maximum visual comfort. In order to achieve this, it has an anti-glare screen and a specifically designed micro-reflector that generates a perfectly defined light beam.

POLAR DIAGRAM

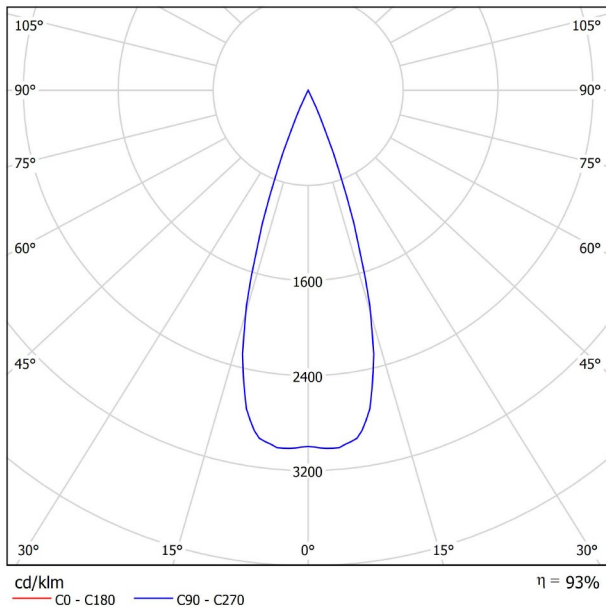

CONICAL DIAGRAM

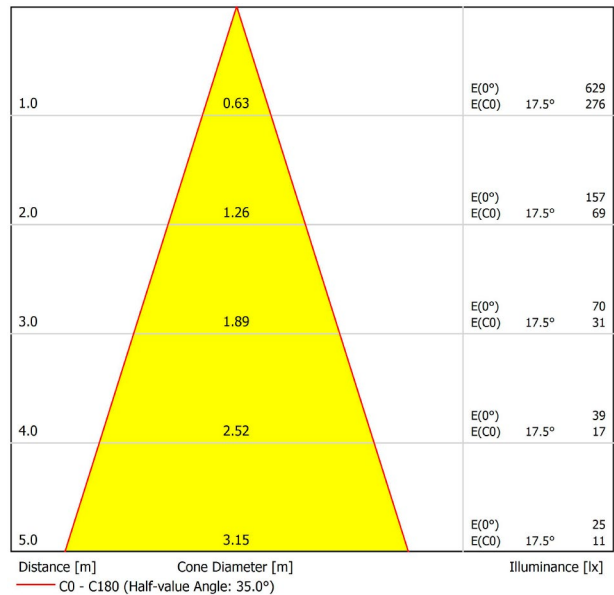


UGR

Glare Evaluation According to UGR											
ρ Ceiling		70	70	50	50	30	70	70	50	50	30
ρ Walls		50	30	50	30	30	50	30	50	30	30
ρ Floor		20	20	20	20	20	20	20	20	20	20
Room Size X Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis				
2H	2H	-6.5	-5.8	-6.2	-5.6	-5.4	-6.5	-5.8	-6.2	-5.6	-5.4
	3H	-6.6	-6.0	-6.3	-5.8	-5.6	-6.6	-6.0	-6.3	-5.8	-5.6
	4H	-6.7	-6.1	-6.4	-5.9	-5.6	-6.7	-6.1	-6.4	-5.9	-5.6
	6H	-6.7	-6.2	-6.4	-6.0	-5.7	-6.7	-6.2	-6.4	-6.0	-5.7
	8H	-6.8	-6.3	-6.4	-6.0	-5.7	-6.8	-6.3	-6.4	-6.0	-5.7
4H	12H	-6.8	-6.4	-6.5	-6.1	-5.7	-6.8	-6.4	-6.5	-6.1	-5.7
	2H	-6.7	-6.1	-6.4	-5.9	-5.6	-6.7	-6.1	-6.4	-5.9	-5.6
	3H	-6.8	-6.4	-6.5	-6.1	-5.7	-6.8	-6.4	-6.5	-6.1	-5.7
	4H	-6.9	-6.5	-6.5	-6.2	-5.8	-6.9	-6.5	-6.5	-6.2	-5.8
	6H	-7.0	-6.6	-6.6	-6.3	-5.9	-7.0	-6.6	-6.6	-6.3	-5.9
8H	8H	-7.0	-6.7	-6.6	-6.3	-5.9	-7.0	-6.7	-6.6	-6.3	-5.9
	12H	-7.0	-6.8	-6.6	-6.4	-6.0	-7.0	-6.8	-6.6	-6.4	-6.0
	4H	-7.0	-6.7	-6.6	-6.3	-5.9	-7.0	-6.7	-6.6	-6.3	-5.9
	6H	-7.1	-6.9	-6.6	-6.5	-6.0	-7.1	-6.9	-6.6	-6.5	-6.0
	8H	-7.1	-7.0	-6.7	-6.5	-6.1	-7.1	-7.0	-6.7	-6.5	-6.1
12H	12H	-7.2	-7.0	-6.7	-6.6	-6.1	-7.2	-7.0	-6.7	-6.6	-6.1
	4H	-7.0	-6.8	-6.6	-6.4	-6.0	-7.0	-6.8	-6.6	-6.4	-6.0
	6H	-7.1	-7.0	-6.7	-6.5	-6.1	-7.1	-7.0	-6.7	-6.5	-6.1
	8H	-7.2	-7.0	-6.7	-6.6	-6.1	-7.2	-7.0	-6.7	-6.6	-6.1
	Variation of the observer position for the luminaire distances S										
S = 1.0H		+0.0 / 0.0					+0.0 / 0.0				
S = 1.5H		+0.0 / 0.0					+0.0 / 0.0				
S = 2.0H		+0.0 / 0.0					+0.0 / 0.0				
Standard table		BK00					BK00				
Correction Summand		-20.0					-20.0				
Corrected Glare Indices referring to 210lm Total Luminous Flux											



DIMENSIONS



AWARDS



Name	SHOT LIGHT CRI 90 35° 3000K R
Reference	A2680121R
Color	Red
RAL	2004
Category	CEILING RECESSED

PRODUCT

Light source	LED
Gross luminous flux	210 Lm
Power	2,1 W
Power values of the system	3,23 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	Mac Adam Step 3
Light beam angle	35°
Unified Glare Rating	UGR<19
Lighting efficiency	93%
Efficacy	100 Lm/W
Current intensity	700 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included - Connected
Emergency power supply	Please Consult
Electrical insulation class	□
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A++
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


Ingress Protection	IP20
Recess measurements	Ø38 mm.
Weight	100 g.
Packaged weight	120 g.
Packaging dimensions	77 × 70 × 53 mm.
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene

OTHER DATA




A luminary conceived to be a small, discreet point of light in the ceiling that hides the illumination source from sight and aims to offer maximum visual comfort. In order to achieve this, it has an anti-glare screen and a specifically designed micro-reflector that generates a perfectly defined light beam.

POLAR DIAGRAM

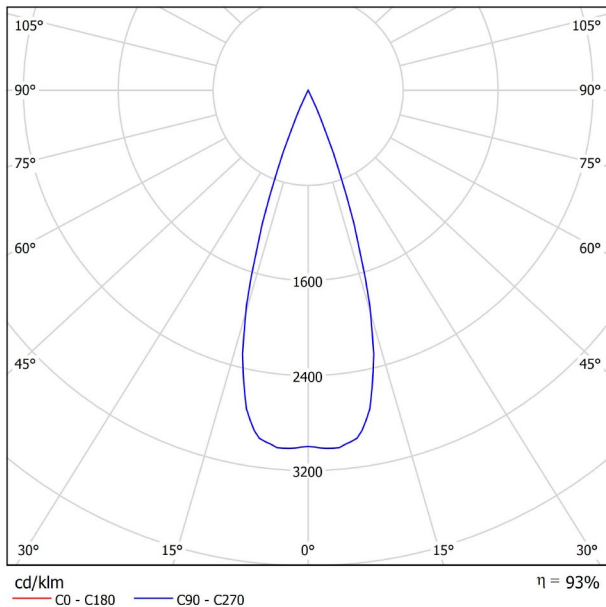

CONICAL DIAGRAM

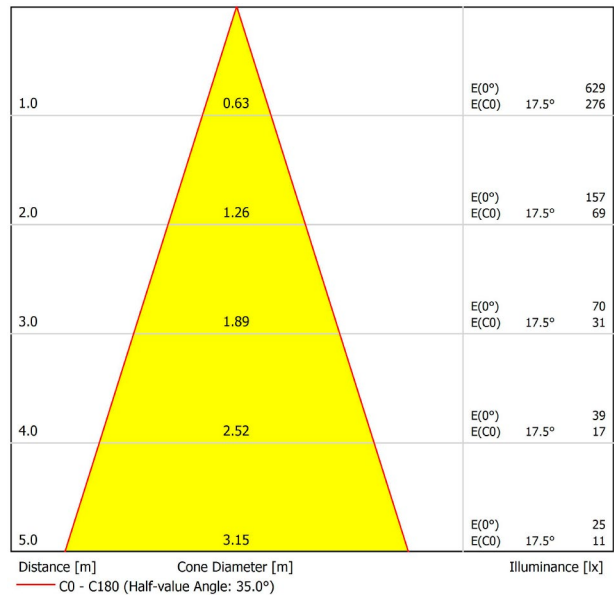


UGR

Glare Evaluation According to UGR												
ρ Ceiling		70	70	50	50	30	70	70	50	50	30	
ρ Walls		50	30	50	30	30	50	30	50	30	30	
ρ Floor		20	20	20	20	20	20	20	20	20	20	
Room Size X Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis					
2H	2H	-6.5	-5.8	-6.2	-5.6	-5.4	-6.5	-5.8	-6.2	-5.6	-5.4	
	3H	-6.6	-6.0	-6.3	-5.8	-5.6	-6.6	-6.0	-6.3	-5.8	-5.6	
	4H	-6.7	-6.1	-6.4	-5.9	-5.6	-6.7	-6.1	-6.4	-5.9	-5.6	
	6H	-6.7	-6.2	-6.4	-6.0	-5.7	-6.7	-6.2	-6.4	-6.0	-5.7	
	8H	-6.8	-6.3	-6.4	-6.0	-5.7	-6.8	-6.3	-6.4	-6.0	-5.7	
4H	12H	-6.8	-6.4	-6.5	-6.1	-5.7	-6.8	-6.4	-6.5	-6.1	-5.7	
	2H	-6.7	-6.1	-6.4	-5.9	-5.6	-6.7	-6.1	-6.4	-5.9	-5.6	
	3H	-6.8	-6.4	-6.5	-6.1	-5.7	-6.8	-6.4	-6.5	-6.1	-5.7	
	4H	-6.9	-6.5	-6.5	-6.2	-5.8	-6.9	-6.5	-6.5	-6.2	-5.8	
	6H	-7.0	-6.6	-6.6	-6.3	-5.9	-7.0	-6.6	-6.6	-6.3	-5.9	
8H	8H	-7.0	-6.7	-6.6	-6.3	-5.9	-7.0	-6.7	-6.6	-6.3	-5.9	
	12H	-7.0	-6.8	-6.6	-6.4	-6.0	-7.0	-6.8	-6.6	-6.4	-6.0	
	4H	-7.0	-6.7	-6.6	-6.3	-5.9	-7.0	-6.7	-6.6	-6.3	-5.9	
	6H	-7.1	-6.9	-6.6	-6.5	-6.0	-7.1	-6.9	-6.6	-6.5	-6.0	
	8H	-7.1	-7.0	-6.7	-6.5	-6.1	-7.1	-7.0	-6.7	-6.5	-6.1	
12H	12H	-7.2	-7.0	-6.7	-6.6	-6.1	-7.2	-7.0	-6.7	-6.6	-6.1	
	4H	-7.0	-6.8	-6.6	-6.4	-6.0	-7.0	-6.8	-6.6	-6.4	-6.0	
	6H	-7.1	-7.0	-6.7	-6.5	-6.1	-7.1	-7.0	-6.7	-6.5	-6.1	
	8H	-7.2	-7.0	-6.7	-6.6	-6.1	-7.2	-7.0	-6.7	-6.6	-6.1	
	Variation of the observer position for the luminaire distances S											
S = 1.0H		+0.0 / 0.0					+0.0 / 0.0					
S = 1.5H		+0.0 / 0.0					+0.0 / 0.0					
S = 2.0H		+0.0 / 0.0					+0.0 / 0.0					
Standard table		BK00					BK00					
Correction Summand		-20.0					-20.0					
Corrected Glare Indices referring to 210lm Total Luminous Flux												



DIMENSIONS



Ø 36

45

MIN. 49

Ø 43

AWARDS



Name	SHOT LIGHT CRI 90 35° 3000K W
Reference	A2680121W
Color	White
RAL	Colour in the mass looks alike RAL 9016
Category	CEILING RECESSED

PRODUCT

Light source	LED
Gross luminous flux	210 Lm
Power	2,1 W
Power values of the system	3,23 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	Mac Adam Step 3
Light beam angle	35°
Unified Glare Rating	UGR<19
Lighting efficiency	93%
Efficacy	100 Lm/W
Current intensity	700 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included - Connected
Emergency power supply	Please Consult
Electrical insulation class	□
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A++
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


Ingress Protection	IP20
Recess measurements	Ø38 mm.
Weight	100 g.
Packaged weight	120 g.
Packaging dimensions	77 × 70 × 53 mm.
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene

OTHER DATA




A luminary conceived to be a small, discreet point of light in the ceiling that hides the illumination source from sight and aims to offer maximum visual comfort. In order to achieve this, it has an anti-glare screen and a specifically designed micro-reflector that generates a perfectly defined light beam.

POLAR DIAGRAM

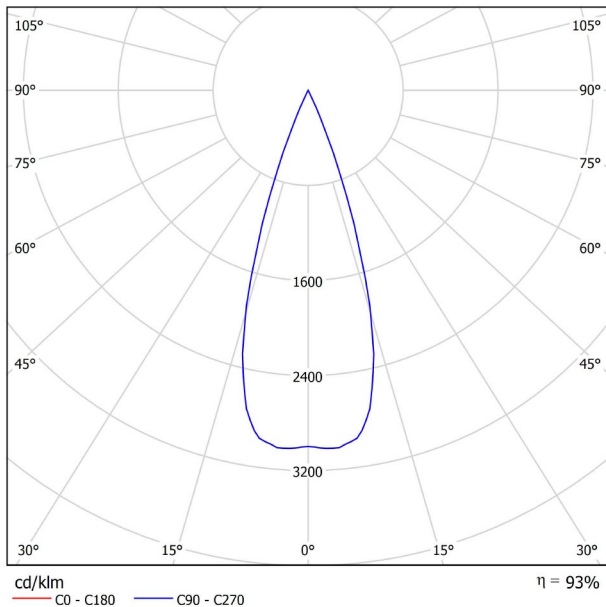

CONICAL DIAGRAM

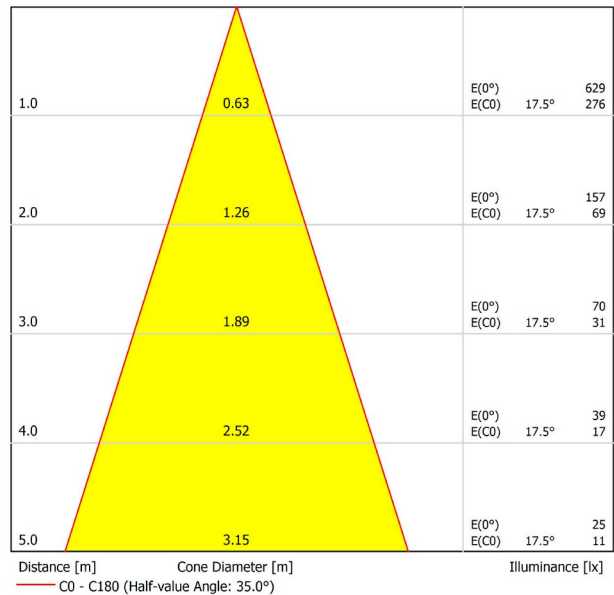


UGR

Glare Evaluation According to UGR												
ρ Ceiling		70	70	50	50	30	70	70	50	50	30	
ρ Walls		50	30	50	30	30	50	30	50	30	30	
ρ Floor		20	20	20	20	20	20	20	20	20	20	
Room Size X Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis					
2H	2H	-6.5	-5.8	-6.2	-5.6	-5.4	-6.5	-5.8	-6.2	-5.6	-5.4	
	3H	-6.6	-6.0	-6.3	-5.8	-5.6	-6.6	-6.0	-6.3	-5.8	-5.6	
	4H	-6.7	-6.1	-6.4	-5.9	-5.6	-6.7	-6.1	-6.4	-5.9	-5.6	
	6H	-6.7	-6.2	-6.4	-6.0	-5.7	-6.7	-6.2	-6.4	-6.0	-5.7	
	8H	-6.8	-6.3	-6.4	-6.0	-5.7	-6.8	-6.3	-6.4	-6.0	-5.7	
4H	12H	-6.8	-6.4	-6.5	-6.1	-5.7	-6.8	-6.4	-6.5	-6.1	-5.7	
	2H	-6.7	-6.1	-6.4	-5.9	-5.6	-6.7	-6.1	-6.4	-5.9	-5.6	
	3H	-6.8	-6.4	-6.5	-6.1	-5.7	-6.8	-6.4	-6.5	-6.1	-5.7	
	4H	-6.9	-6.5	-6.5	-6.2	-5.8	-6.9	-6.5	-6.5	-6.2	-5.8	
	6H	-7.0	-6.6	-6.6	-6.3	-5.9	-7.0	-6.6	-6.6	-6.3	-5.9	
8H	8H	-7.0	-6.7	-6.6	-6.3	-5.9	-7.0	-6.7	-6.6	-6.3	-5.9	
	12H	-7.0	-6.8	-6.6	-6.4	-6.0	-7.0	-6.8	-6.6	-6.4	-6.0	
	4H	-7.0	-6.7	-6.6	-6.3	-5.9	-7.0	-6.7	-6.6	-6.3	-5.9	
	6H	-7.1	-6.9	-6.6	-6.5	-6.0	-7.1	-6.9	-6.6	-6.5	-6.0	
	8H	-7.1	-7.0	-6.7	-6.5	-6.1	-7.1	-7.0	-6.7	-6.5	-6.1	
12H	12H	-7.2	-7.0	-6.7	-6.6	-6.1	-7.2	-7.0	-6.7	-6.6	-6.1	
	4H	-7.0	-6.8	-6.6	-6.4	-6.0	-7.0	-6.8	-6.6	-6.4	-6.0	
	6H	-7.1	-7.0	-6.7	-6.5	-6.1	-7.1	-7.0	-6.7	-6.5	-6.1	
	8H	-7.2	-7.0	-6.7	-6.6	-6.1	-7.2	-7.0	-6.7	-6.6	-6.1	
	Variation of the observer position for the luminaire distances S											
S = 1.0H		+0.0 / 0.0					+0.0 / 0.0					
S = 1.5H		+0.0 / 0.0					+0.0 / 0.0					
S = 2.0H		+0.0 / 0.0					+0.0 / 0.0					
Standard table		BK00					BK00					
Correction Summand		-20.0					-20.0					
Corrected Glare Indices referring to 210lm Total Luminous Flux												



DIMENSIONS



AWARDS



Name	SHOT LIGHT CRI 90 35° 3000K WN
Reference	A2680121WN
Color	White-Black
RAL	Colour in the mass looks alike RAL 9016 & 9005
Category	CEILING RECESSED

PRODUCT

Light source	LED
Gross luminous flux	210 Lm
Power	2,1 W
Power values of the system	3,23 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	Mac Adam Step 3
Light beam angle	35°
Unified Glare Rating	UGR<19
Lighting efficiency	93%
Efficacy	100 Lm/W
Current intensity	700 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included - Connected
Emergency power supply	Please Consult
Electrical insulation class	□
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A++
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


Ingress Protection	IP20
Recess measurements	Ø38 mm.
Weight	100 g.
Packaged weight	120 g.
Packaging dimensions	77 × 70 × 53 mm.
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene

OTHER DATA




A luminary conceived to be a small, discreet point of light in the ceiling that hides the illumination source from sight and aims to offer maximum visual comfort. In order to achieve this, it has an anti-glare screen and a specifically designed micro-reflector that generates a perfectly defined light beam.

POLAR DIAGRAM

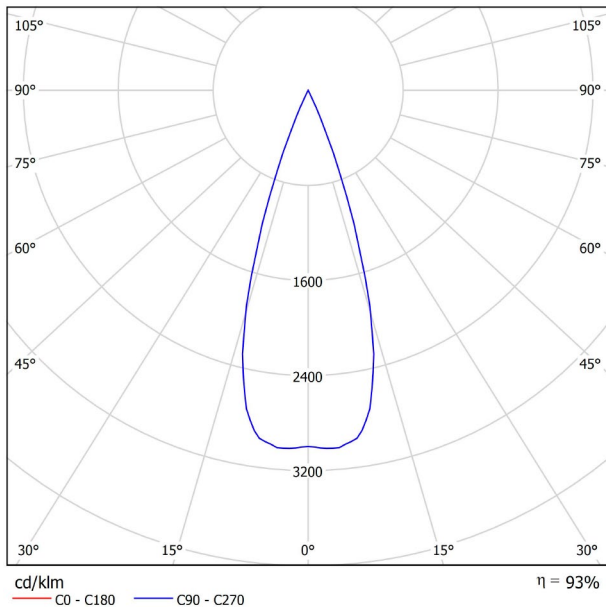

CONICAL DIAGRAM

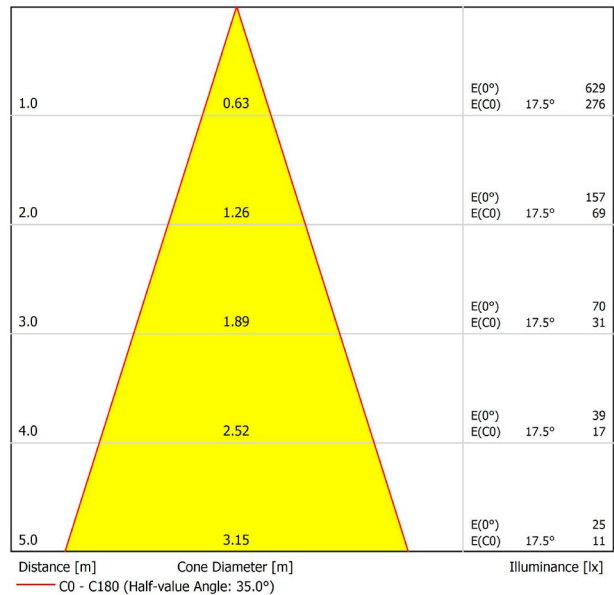


UGR

Glare Evaluation According to UGR												
ρ Ceiling		70	70	50	50	30	70	70	50	50	30	30
ρ Walls		50	30	50	30	30	50	30	50	30	30	30
ρ Floor		20	20	20	20	20	20	20	20	20	20	20
Room Size X Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis					
2H	2H	-6.5	-5.8	-6.2	-5.6	-5.4	-6.5	-5.8	-6.2	-5.6	-5.4	
	3H	-6.6	-6.0	-6.3	-5.8	-5.6	-6.6	-6.0	-6.3	-5.8	-5.6	
	4H	-6.7	-6.1	-6.4	-5.9	-5.6	-6.7	-6.1	-6.4	-5.9	-5.6	
	6H	-6.7	-6.2	-6.4	-6.0	-5.7	-6.7	-6.2	-6.4	-6.0	-5.7	
	8H	-6.8	-6.3	-6.4	-6.0	-5.7	-6.8	-6.3	-6.4	-6.0	-5.7	
4H	12H	-6.8	-6.4	-6.5	-6.1	-5.7	-6.8	-6.4	-6.5	-6.1	-5.7	
	2H	-6.7	-6.1	-6.4	-5.9	-5.6	-6.7	-6.1	-6.4	-5.9	-5.6	
	3H	-6.8	-6.4	-6.5	-6.1	-5.7	-6.8	-6.4	-6.5	-6.1	-5.7	
	4H	-6.9	-6.5	-6.5	-6.2	-5.8	-6.9	-6.5	-6.5	-6.2	-5.8	
	6H	-7.0	-6.6	-6.6	-6.3	-5.9	-7.0	-6.6	-6.6	-6.3	-5.9	
8H	8H	-7.0	-6.7	-6.6	-6.3	-5.9	-7.0	-6.7	-6.6	-6.3	-5.9	
	12H	-7.0	-6.8	-6.6	-6.4	-6.0	-7.0	-6.8	-6.6	-6.4	-6.0	
	4H	-7.0	-6.7	-6.6	-6.3	-5.9	-7.0	-6.7	-6.6	-6.3	-5.9	
	6H	-7.1	-6.9	-6.6	-6.5	-6.0	-7.1	-6.9	-6.6	-6.5	-6.0	
	8H	-7.1	-7.0	-6.7	-6.5	-6.1	-7.1	-7.0	-6.7	-6.5	-6.1	
12H	12H	-7.2	-7.0	-6.7	-6.6	-6.1	-7.2	-7.0	-6.7	-6.6	-6.1	
	4H	-7.0	-6.8	-6.6	-6.4	-6.0	-7.0	-6.8	-6.6	-6.4	-6.0	
	6H	-7.1	-7.0	-6.7	-6.5	-6.1	-7.1	-7.0	-6.7	-6.5	-6.1	
	8H	-7.2	-7.0	-6.7	-6.6	-6.1	-7.2	-7.0	-6.7	-6.6	-6.1	
	Variation of the observer position for the luminaire distances S											
S = 1.0H		+0.0 / 0.0					+0.0 / 0.0					
S = 1.5H		+0.0 / 0.0					+0.0 / 0.0					
S = 2.0H		+0.0 / 0.0					+0.0 / 0.0					
Standard table		BK00					BK00					
Correction Summand		-20.0					-20.0					
Corrected Glare Indices referring to 210lm Total Luminous Flux												



DIMENSIONS



AWARDS



Name	SHOT LIGHT CRI 90 35° 3000K Z
Reference	A2680121Z
Color	Aluminium
RAL	9006
Category	CEILING RECESSED

PRODUCT

Light source	LED
Gross luminous flux	210 Lm
Power	2,1 W
Power values of the system	3,23 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	Mac Adam Step 3
Light beam angle	35°
Unified Glare Rating	UGR<19
Lighting efficiency	93%
Efficacy	100 Lm/W
Current intensity	700 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included - Connected
Emergency power supply	Please Consult
Electrical insulation class	□
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A++
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


Ingress Protection	IP20
Recess measurements	Ø38 mm.
Weight	100 g.
Packaged weight	120 g.
Packaging dimensions	77 × 70 × 53 mm.
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene

OTHER DATA




A luminary conceived to be a small, discreet point of light in the ceiling that hides the illumination source from sight and aims to offer maximum visual comfort. In order to achieve this, it has an anti-glare screen and a specifically designed micro-reflector that generates a perfectly defined light beam.

POLAR DIAGRAM

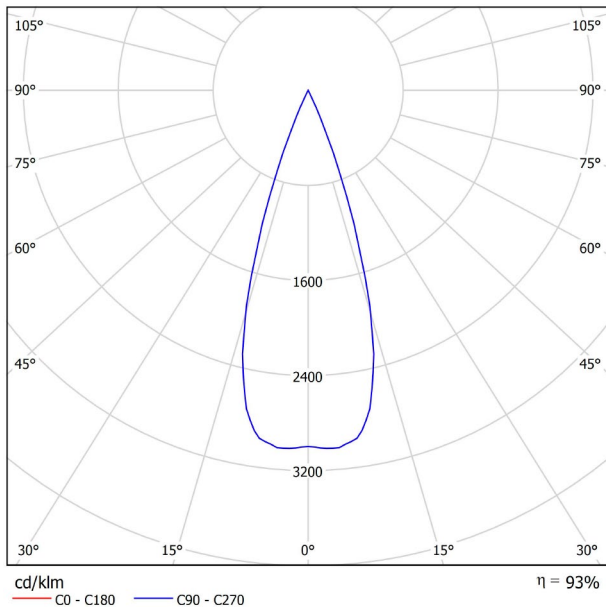

CONICAL DIAGRAM

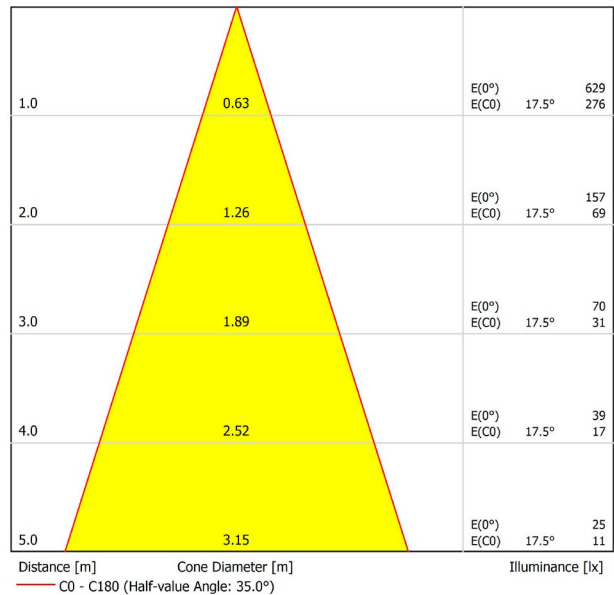


UGR

Glare Evaluation According to UGR											
ρ Ceiling		70	70	50	50	30	70	70	50	50	30
ρ Walls		50	30	50	30	30	50	30	50	30	30
ρ Floor		20	20	20	20	20	20	20	20	20	20
Room Size X Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis				
2H	2H	-6.5	-5.8	-6.2	-5.6	-5.4	-6.5	-5.8	-6.2	-5.6	-5.4
	3H	-6.6	-6.0	-6.3	-5.8	-5.6	-6.6	-6.0	-6.3	-5.8	-5.6
	4H	-6.7	-6.1	-6.4	-5.9	-5.6	-6.7	-6.1	-6.4	-5.9	-5.6
	6H	-6.7	-6.2	-6.4	-6.0	-5.7	-6.7	-6.2	-6.4	-6.0	-5.7
	8H	-6.8	-6.3	-6.4	-6.0	-5.7	-6.8	-6.3	-6.4	-6.0	-5.7
4H	12H	-6.8	-6.4	-6.5	-6.1	-5.7	-6.8	-6.4	-6.5	-6.1	-5.7
	2H	-6.7	-6.1	-6.4	-5.9	-5.6	-6.7	-6.1	-6.4	-5.9	-5.6
	3H	-6.8	-6.4	-6.5	-6.1	-5.7	-6.8	-6.4	-6.5	-6.1	-5.7
	4H	-6.9	-6.5	-6.5	-6.2	-5.8	-6.9	-6.5	-6.5	-6.2	-5.8
	6H	-7.0	-6.6	-6.6	-6.3	-5.9	-7.0	-6.6	-6.6	-6.3	-5.9
8H	8H	-7.0	-6.7	-6.6	-6.3	-5.9	-7.0	-6.7	-6.6	-6.3	-5.9
	12H	-7.0	-6.8	-6.6	-6.4	-6.0	-7.0	-6.8	-6.6	-6.4	-6.0
	4H	-7.0	-6.7	-6.6	-6.3	-5.9	-7.0	-6.7	-6.6	-6.3	-5.9
	6H	-7.1	-6.9	-6.6	-6.5	-6.0	-7.1	-6.9	-6.6	-6.5	-6.0
	8H	-7.1	-7.0	-6.7	-6.5	-6.1	-7.1	-7.0	-6.7	-6.5	-6.1
12H	12H	-7.2	-7.0	-6.7	-6.6	-6.1	-7.2	-7.0	-6.7	-6.6	-6.1
	4H	-7.0	-6.8	-6.6	-6.4	-6.0	-7.0	-6.8	-6.6	-6.4	-6.0
	6H	-7.1	-7.0	-6.7	-6.5	-6.1	-7.1	-7.0	-6.7	-6.5	-6.1
	8H	-7.2	-7.0	-6.7	-6.6	-6.1	-7.2	-7.0	-6.7	-6.6	-6.1
	Variation of the observer position for the luminaire distances S										
S = 1.0H		+0.0 / 0.0					+0.0 / 0.0				
S = 1.5H		+0.0 / 0.0					+0.0 / 0.0				
S = 2.0H		+0.0 / 0.0					+0.0 / 0.0				
Standard table		BK00					BK00				
Correction Summand		-20.0					-20.0				
Corrected Glare Indices referring to 210lm Total Luminous Flux											



DIMENSIONS



AWARDS



Name	SHOT LIGHT CRI 90 35° 4000K G
Reference	A2680122G
Color	Gold
RAL	1036
Category	CEILING RECESSED

PRODUCT

Light source	LED
Gross luminous flux	250 Lm
Power	2,1 W
Power values of the system	3,23 W
Colour temperature	4000 K
Colour Rendering Index	CRI>90
Chromatic stability	Mac Adam Step 3
Light beam angle	35°
Unified Glare Rating	UGR<19
Lighting efficiency	93%
Efficacy	119 Lm/W
Current intensity	700 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included - Connected
Emergency power supply	Please Consult
Electrical insulation class	□
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A++
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


Ingress Protection	IP20
Recess measurements	Ø38 mm.
Weight	100 g.
Packaged weight	120 g.
Packaging dimensions	77 × 70 × 53 mm.
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene

OTHER DATA




A luminary conceived to be a small, discreet point of light in the ceiling that hides the illumination source from sight and aims to offer maximum visual comfort. In order to achieve this, it has an anti-glare screen and a specifically designed micro-reflector that generates a perfectly defined light beam.

POLAR DIAGRAM

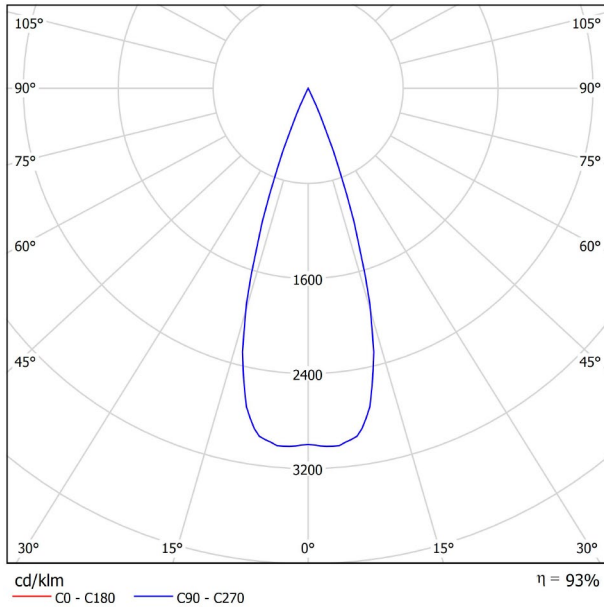

CONICAL DIAGRAM

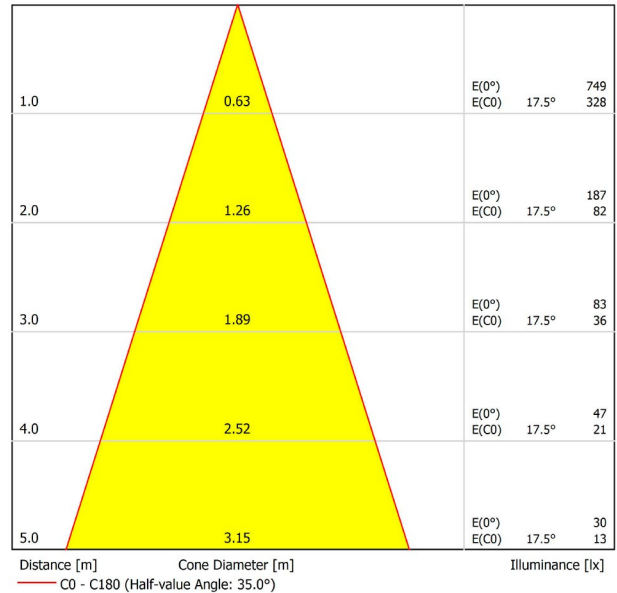


UGR


Glare Evaluation According to UGR												
ρ Ceiling		70	70	50	50	30	70	70	50	50	30	
ρ Walls		50	30	50	30	30	50	30	50	30	30	
ρ Floor		20	20	20	20	20	20	20	20	20	20	
Room Size X Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis					
2H	2H	-5.8	-5.2	-5.6	-5.0	-4.8	-5.8	-5.2	-5.6	-5.0	-4.8	
	3H	-6.0	-5.4	-5.7	-5.2	-4.9	-6.0	-5.4	-5.7	-5.2	-4.9	
	4H	-6.1	-5.5	-5.8	-5.3	-5.0	-6.1	-5.5	-5.8	-5.3	-5.0	
	6H	-6.1	-5.6	-5.8	-5.4	-5.1	-6.1	-5.6	-5.8	-5.4	-5.1	
	8H	-6.2	-5.7	-5.8	-5.4	-5.1	-6.2	-5.7	-5.8	-5.4	-5.1	
4H	12H	-6.2	-5.7	-5.9	-5.4	-5.1	-6.2	-5.7	-5.9	-5.4	-5.1	
	2H	-6.1	-5.5	-5.8	-5.3	-5.0	-6.1	-5.5	-5.8	-5.3	-5.0	
	3H	-6.2	-5.7	-5.9	-5.4	-5.1	-6.2	-5.7	-5.9	-5.4	-5.1	
	4H	-6.3	-5.9	-5.9	-5.6	-5.2	-6.3	-5.9	-5.9	-5.6	-5.2	
	6H	-6.3	-6.0	-5.9	-5.7	-5.3	-6.3	-6.0	-5.9	-5.7	-5.3	
8H	8H	-6.4	-6.1	-6.0	-5.7	-5.3	-6.4	-6.1	-6.0	-5.7	-5.3	
	12H	-6.4	-6.2	-6.0	-5.8	-5.4	-6.4	-6.2	-6.0	-5.8	-5.4	
	4H	-6.4	-6.1	-6.0	-5.7	-5.3	-6.4	-6.1	-6.0	-5.7	-5.3	
	6H	-6.5	-6.3	-6.0	-5.8	-5.4	-6.5	-6.3	-6.0	-5.8	-5.4	
	8H	-6.5	-6.4	-6.1	-5.9	-5.4	-6.5	-6.4	-6.1	-5.9	-5.4	
12H	12H	-6.6	-6.4	-6.1	-6.0	-5.5	-6.6	-6.4	-6.1	-6.0	-5.5	
	4H	-6.4	-6.2	-6.0	-5.8	-5.4	-6.4	-6.2	-6.0	-5.8	-5.4	
	6H	-6.5	-6.4	-6.1	-5.9	-5.4	-6.5	-6.4	-6.1	-5.9	-5.4	
	8H	-6.6	-6.4	-6.1	-6.0	-5.5	-6.6	-6.4	-6.1	-6.0	-5.5	
	Variation of the observer position for the luminaire distances S											
S = 1.0H		+0.0 / 0.0					+0.0 / 0.0					
S = 1.5H		+0.0 / 0.0					+0.0 / 0.0					
S = 2.0H		+0.0 / 0.0					+0.0 / 0.0					
Standard table		BK00					BK00					
Correction Summand		-20.0					-20.0					
Corrected Glare Indices referring to 250lm Total Luminous Flux												



DIMENSIONS



Ø 36



Ø 43

AWARDS



Name	SHOT LIGHT CRI 90 35° 4000K N
Reference	A2680122N
Color	Black
RAL	Colour in the mass looks alike RAL 9005
Category	CEILING RECESSED

PRODUCT

Light source	LED
Gross luminous flux	250 Lm
Power	2,1 W
Power values of the system	3,23 W
Colour temperature	4000 K
Colour Rendering Index	CRI>90
Chromatic stability	Mac Adam Step 3
Light beam angle	35°
Unified Glare Rating	UGR<19
Lighting efficiency	93%
Efficacy	119 Lm/W
Current intensity	700 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included - Connected
Emergency power supply	Please Consult
Electrical insulation class	□
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A++
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


Ingress Protection	IP20
Recess measurements	Ø38 mm.
Weight	100 g.
Packaged weight	120 g.
Packaging dimensions	77 × 70 × 53 mm.
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene

OTHER DATA




A luminary conceived to be a small, discreet point of light in the ceiling that hides the illumination source from sight and aims to offer maximum visual comfort. In order to achieve this, it has an anti-glare screen and a specifically designed micro-reflector that generates a perfectly defined light beam.

POLAR DIAGRAM

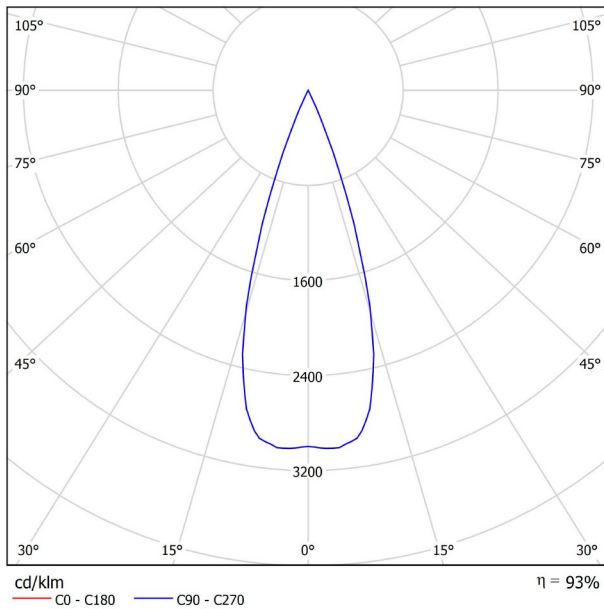

CONICAL DIAGRAM

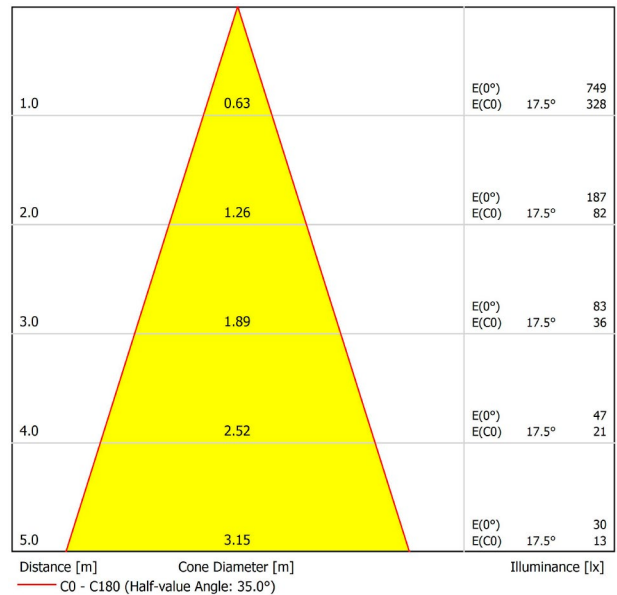


UGR

Glare Evaluation According to UGR												
ρ Ceiling		70	70	50	50	30	70	70	50	50	30	
ρ Walls		50	30	50	30	30	50	30	50	30	30	
ρ Floor		20	20	20	20	20	20	20	20	20	20	
Room Size X Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis					
2H	2H	-5.8	-5.2	-5.6	-5.0	-4.8	-5.8	-5.2	-5.6	-5.0	-4.8	
	3H	-6.0	-5.4	-5.7	-5.2	-4.9	-6.0	-5.4	-5.7	-5.2	-4.9	
	4H	-6.1	-5.5	-5.8	-5.3	-5.0	-6.1	-5.5	-5.8	-5.3	-5.0	
	6H	-6.1	-5.6	-5.8	-5.4	-5.1	-6.1	-5.6	-5.8	-5.4	-5.1	
	8H	-6.2	-5.7	-5.8	-5.4	-5.1	-6.2	-5.7	-5.8	-5.4	-5.1	
4H	12H	-6.2	-5.7	-5.9	-5.4	-5.1	-6.2	-5.7	-5.9	-5.4	-5.1	
	2H	-6.1	-5.5	-5.8	-5.3	-5.0	-6.1	-5.5	-5.8	-5.3	-5.0	
	3H	-6.2	-5.7	-5.9	-5.4	-5.1	-6.2	-5.7	-5.9	-5.4	-5.1	
	4H	-6.3	-5.9	-5.9	-5.6	-5.2	-6.3	-5.9	-5.9	-5.6	-5.2	
	6H	-6.3	-6.0	-5.9	-5.7	-5.3	-6.3	-6.0	-5.9	-5.7	-5.3	
8H	8H	-6.4	-6.1	-6.0	-5.7	-5.3	-6.4	-6.1	-6.0	-5.7	-5.3	
	12H	-6.4	-6.2	-6.0	-5.8	-5.4	-6.4	-6.2	-6.0	-5.8	-5.4	
	4H	-6.4	-6.1	-6.0	-5.7	-5.3	-6.4	-6.1	-6.0	-5.7	-5.3	
	6H	-6.5	-6.3	-6.0	-5.8	-5.4	-6.5	-6.3	-6.0	-5.8	-5.4	
	8H	-6.5	-6.4	-6.1	-5.9	-5.4	-6.5	-6.4	-6.1	-5.9	-5.4	
12H	12H	-6.6	-6.4	-6.1	-6.0	-5.5	-6.6	-6.4	-6.1	-6.0	-5.5	
	4H	-6.4	-6.2	-6.0	-5.8	-5.4	-6.4	-6.2	-6.0	-5.8	-5.4	
	6H	-6.5	-6.4	-6.1	-5.9	-5.4	-6.5	-6.4	-6.1	-5.9	-5.4	
	8H	-6.6	-6.4	-6.1	-6.0	-5.5	-6.6	-6.4	-6.1	-6.0	-5.5	
	Variation of the observer position for the luminaire distances S											
S = 1.0H		+0.0 / 0.0					+0.0 / 0.0					
S = 1.5H		+0.0 / 0.0					+0.0 / 0.0					
S = 2.0H		+0.0 / 0.0					+0.0 / 0.0					
Standard table		BK00					BK00					
Correction Summand		-20.0					-20.0					
Corrected Glare Indices referring to 250lm Total Luminous Flux												



DIMENSIONS



AWARDS



Name	SHOT LIGHT CRI 90 35° 4000K R
Reference	A2680122R
Color	Red
RAL	2004
Category	CEILING RECESSED

PRODUCT

Light source	LED
Gross luminous flux	250 Lm
Power	2,1 W
Power values of the system	3,23 W
Colour temperature	4000 K
Colour Rendering Index	CRI>90
Chromatic stability	Mac Adam Step 3
Light beam angle	35°
Unified Glare Rating	UGR<19
Lighting efficiency	93%
Efficacy	119 Lm/W
Current intensity	700 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included - Connected
Emergency power supply	Please Consult
Electrical insulation class	□
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A++
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


Ingress Protection	IP20
Recess measurements	Ø38 mm.
Weight	100 g.
Packaged weight	120 g.
Packaging dimensions	77 × 70 × 53 mm.
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene

OTHER DATA




A luminary conceived to be a small, discreet point of light in the ceiling that hides the illumination source from sight and aims to offer maximum visual comfort. In order to achieve this, it has an anti-glare screen and a specifically designed micro-reflector that generates a perfectly defined light beam.

POLAR DIAGRAM

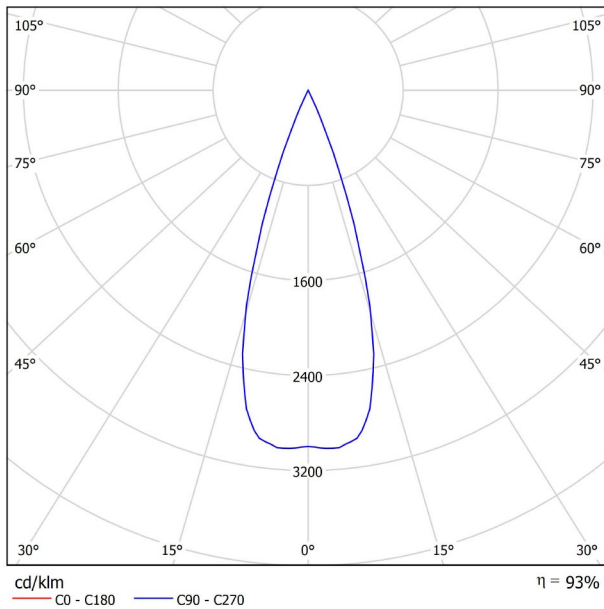

CONICAL DIAGRAM

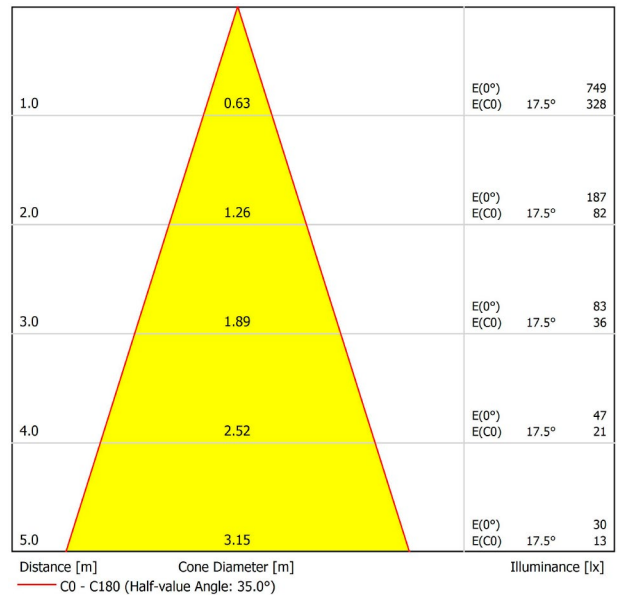


UGR

Glare Evaluation According to UGR												
ρ Ceiling		70	70	50	50	30	70	70	50	50	30	
ρ Walls		50	30	50	30	30	50	30	50	30	30	
ρ Floor		20	20	20	20	20	20	20	20	20	20	
Room Size X Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis					
2H	2H	-5.8	-5.2	-5.6	-5.0	-4.8	-5.8	-5.2	-5.6	-5.0	-4.8	
	3H	-6.0	-5.4	-5.7	-5.2	-4.9	-6.0	-5.4	-5.7	-5.2	-4.9	
	4H	-6.1	-5.5	-5.8	-5.3	-5.0	-6.1	-5.5	-5.8	-5.3	-5.0	
	6H	-6.1	-5.6	-5.8	-5.4	-5.1	-6.1	-5.6	-5.8	-5.4	-5.1	
	8H	-6.2	-5.7	-5.8	-5.4	-5.1	-6.2	-5.7	-5.8	-5.4	-5.1	
4H	12H	-6.2	-5.7	-5.9	-5.4	-5.1	-6.2	-5.7	-5.9	-5.4	-5.1	
	2H	-6.1	-5.5	-5.8	-5.3	-5.0	-6.1	-5.5	-5.8	-5.3	-5.0	
	3H	-6.2	-5.7	-5.9	-5.4	-5.1	-6.2	-5.7	-5.9	-5.4	-5.1	
	4H	-6.3	-5.9	-5.9	-5.6	-5.2	-6.3	-5.9	-5.9	-5.6	-5.2	
	6H	-6.3	-6.0	-5.9	-5.7	-5.3	-6.3	-6.0	-5.9	-5.7	-5.3	
8H	8H	-6.4	-6.1	-6.0	-5.7	-5.3	-6.4	-6.1	-6.0	-5.7	-5.3	
	12H	-6.4	-6.2	-6.0	-5.8	-5.4	-6.4	-6.2	-6.0	-5.8	-5.4	
	4H	-6.4	-6.1	-6.0	-5.7	-5.3	-6.4	-6.1	-6.0	-5.7	-5.3	
	6H	-6.5	-6.3	-6.0	-5.8	-5.4	-6.5	-6.3	-6.0	-5.8	-5.4	
	8H	-6.5	-6.4	-6.1	-5.9	-5.4	-6.5	-6.4	-6.1	-5.9	-5.4	
12H	12H	-6.6	-6.4	-6.1	-6.0	-5.5	-6.6	-6.4	-6.1	-6.0	-5.5	
	4H	-6.4	-6.2	-6.0	-5.8	-5.4	-6.4	-6.2	-6.0	-5.8	-5.4	
	6H	-6.5	-6.4	-6.1	-5.9	-5.4	-6.5	-6.4	-6.1	-5.9	-5.4	
	8H	-6.6	-6.4	-6.1	-6.0	-5.5	-6.6	-6.4	-6.1	-6.0	-5.5	
Variation of the observer position for the luminaire distances S												
S = 1.0H		+0.0 / 0.0					+0.0 / 0.0					
S = 1.5H		+0.0 / 0.0					+0.0 / 0.0					
S = 2.0H		+0.0 / 0.0					+0.0 / 0.0					
Standard table		BK00					BK00					
Correction Summand		-20.0					-20.0					
Corrected Glare Indices referring to 250lm Total Luminous Flux												



DIMENSIONS



Ø 36



45

Ø 43

MIN. 49

AWARDS



Name	SHOT LIGHT CRI 90 35° 4000K W
Reference	A2680122W
Color	White
RAL	Colour in the mass looks alike RAL 9016
Category	CEILING RECESSED

PRODUCT

Light source	LED
Gross luminous flux	250 Lm
Power	2,1 W
Power values of the system	3,23 W
Colour temperature	4000 K
Colour Rendering Index	CRI>90
Chromatic stability	Mac Adam Step 3
Light beam angle	35°
Unified Glare Rating	UGR<19
Lighting efficiency	93%
Efficacy	119 Lm/W
Current intensity	700 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included - Connected
Emergency power supply	Please Consult
Electrical insulation class	□
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A++
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


Ingress Protection	IP20
Recess measurements	Ø38 mm.
Weight	100 g.
Packaged weight	120 g.
Packaging dimensions	77 × 70 × 53 mm.
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene

OTHER DATA




A luminary conceived to be a small, discreet point of light in the ceiling that hides the illumination source from sight and aims to offer maximum visual comfort. In order to achieve this, it has an anti-glare screen and a specifically designed micro-reflector that generates a perfectly defined light beam.

POLAR DIAGRAM

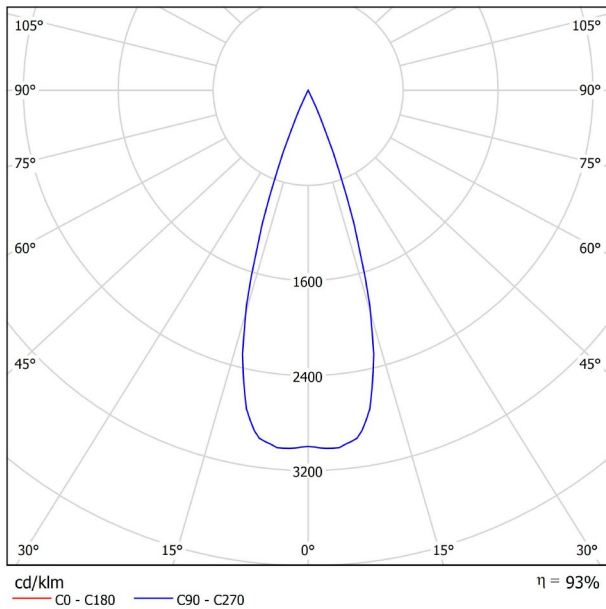

CONICAL DIAGRAM

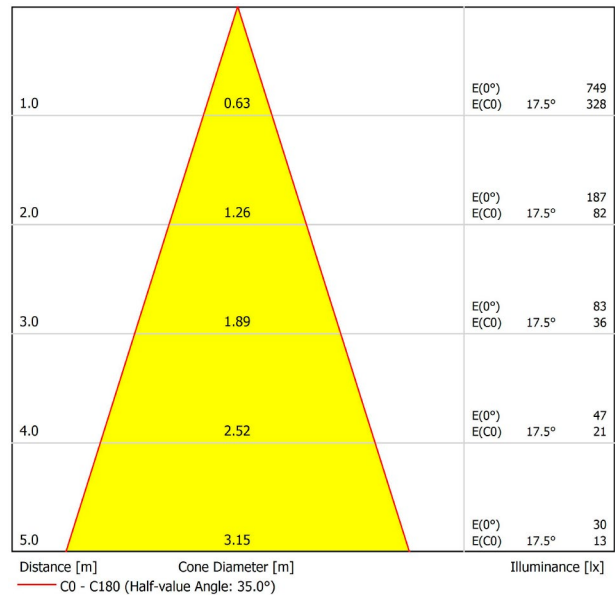


UGR

Glare Evaluation According to UGR												
ρ Ceiling		70	70	50	50	30	70	70	50	50	30	
ρ Walls		50	30	50	30	30	50	30	50	30	30	
ρ Floor		20	20	20	20	20	20	20	20	20	20	
Room Size X Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis					
2H	2H	-5.8	-5.2	-5.6	-5.0	-4.8	-5.8	-5.2	-5.6	-5.0	-4.8	
	3H	-6.0	-5.4	-5.7	-5.2	-4.9	-6.0	-5.4	-5.7	-5.2	-4.9	
	4H	-6.1	-5.5	-5.8	-5.3	-5.0	-6.1	-5.5	-5.8	-5.3	-5.0	
	6H	-6.1	-5.6	-5.8	-5.4	-5.1	-6.1	-5.6	-5.8	-5.4	-5.1	
	8H	-6.2	-5.7	-5.8	-5.4	-5.1	-6.2	-5.7	-5.8	-5.4	-5.1	
4H	12H	-6.2	-5.7	-5.9	-5.4	-5.1	-6.2	-5.7	-5.9	-5.4	-5.1	
	2H	-6.1	-5.5	-5.8	-5.3	-5.0	-6.1	-5.5	-5.8	-5.3	-5.0	
	3H	-6.2	-5.7	-5.9	-5.4	-5.1	-6.2	-5.7	-5.9	-5.4	-5.1	
	4H	-6.3	-5.9	-5.9	-5.6	-5.2	-6.3	-5.9	-5.9	-5.6	-5.2	
	6H	-6.3	-6.0	-5.9	-5.7	-5.3	-6.3	-6.0	-5.9	-5.7	-5.3	
8H	8H	-6.4	-6.1	-6.0	-5.7	-5.3	-6.4	-6.1	-6.0	-5.7	-5.3	
	12H	-6.4	-6.2	-6.0	-5.8	-5.4	-6.4	-6.2	-6.0	-5.8	-5.4	
	4H	-6.4	-6.1	-6.0	-5.7	-5.3	-6.4	-6.1	-6.0	-5.7	-5.3	
	6H	-6.5	-6.3	-6.0	-5.8	-5.4	-6.5	-6.3	-6.0	-5.8	-5.4	
	8H	-6.5	-6.4	-6.1	-5.9	-5.4	-6.5	-6.4	-6.1	-5.9	-5.4	
12H	12H	-6.6	-6.4	-6.1	-6.0	-5.5	-6.6	-6.4	-6.1	-6.0	-5.5	
	4H	-6.4	-6.2	-6.0	-5.8	-5.4	-6.4	-6.2	-6.0	-5.8	-5.4	
	6H	-6.5	-6.4	-6.1	-5.9	-5.4	-6.5	-6.4	-6.1	-5.9	-5.4	
	8H	-6.6	-6.4	-6.1	-6.0	-5.5	-6.6	-6.4	-6.1	-6.0	-5.5	
	Variation of the observer position for the luminaire distances S											
S = 1.0H		+0.0 / 0.0					+0.0 / 0.0					
S = 1.5H		+0.0 / 0.0					+0.0 / 0.0					
S = 2.0H		+0.0 / 0.0					+0.0 / 0.0					
Standard table		BK00					BK00					
Correction Summand		-20.0					-20.0					
Corrected Glare Indices referring to 250lm Total Luminous Flux												



DIMENSIONS



Ø 36

45

MIN. 49

Ø 43

AWARDS



Name	SHOT LIGHT CRI 90 35° 4000K WN
Reference	A2680122WN
Color	White-Black
RAL	Colour in the mass looks alike RAL 9016 & 9005
Category	CEILING RECESSED

PRODUCT

SHOT LIGHT CRI 90 35° 4000K WN

A2680122WN

White-Black

Colour in the mass looks alike RAL 9016 & 9005

CEILING RECESSED

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	250 Lm
Power	2,1 W
Power values of the system	3,23 W
Colour temperature	4000 K
Colour Rendering Index	CRI>90
Chromatic stability	Mac Adam Step 3
Light beam angle	35°
Unified Glare Rating	UGR<19
Lighting efficiency	93%
Efficacy	119 Lm/W
Current intensity	700 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included - Connected
Emergency power supply	Please Consult
Electrical insulation class	□
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A++
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Recess measurements	Ø38 mm.
Weight	100 g.
Packaged weight	120 g.
Packaging dimensions	77 × 70 × 53 mm.
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene




A luminary conceived to be a small, discreet point of light in the ceiling that hides the illumination source from sight and aims to offer maximum visual comfort. In order to achieve this, it has an anti-glare screen and a specifically designed micro-reflector that generates a perfectly defined light beam.

POLAR DIAGRAM

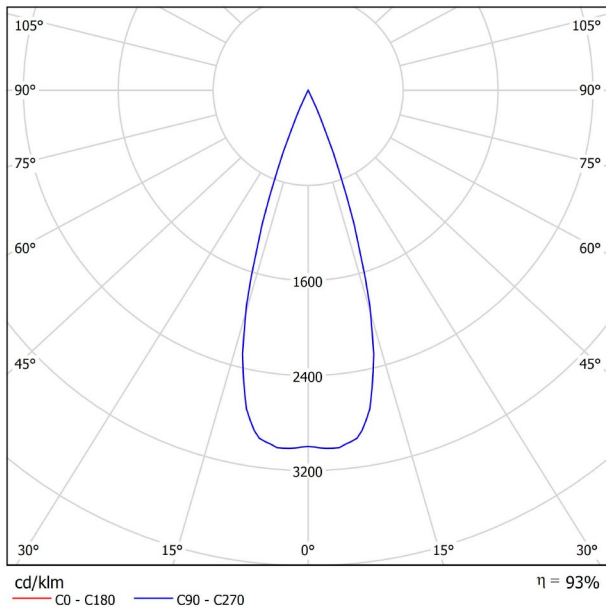

CONICAL DIAGRAM

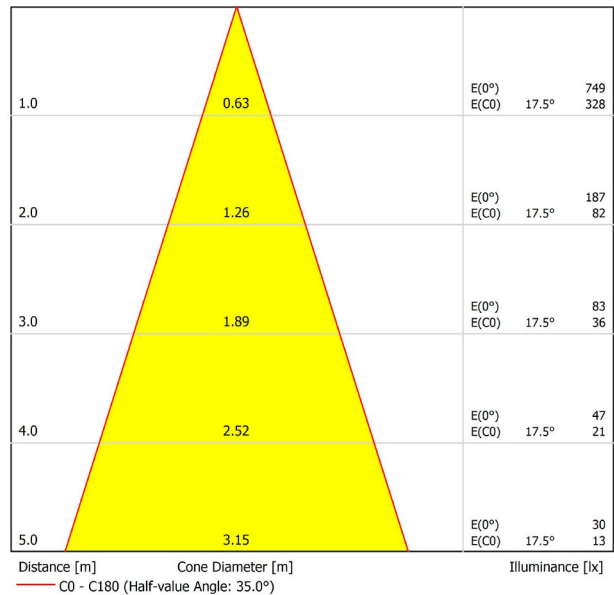


UGR


Glare Evaluation According to UGR												
p Ceiling		70	70	50	50	30	70	70	50	50	30	30
p Walls		50	30	50	30	30	50	30	50	30	30	30
p Floor		20	20	20	20	20	20	20	20	20	20	20
Room Size X Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis					
2H	2H	-5.8	-5.2	-5.6	-5.0	-4.8	-5.8	-5.2	-5.6	-5.0	-4.8	
	3H	-6.0	-5.4	-5.7	-5.2	-4.9	-6.0	-5.4	-5.7	-5.2	-4.9	
	4H	-6.1	-5.5	-5.8	-5.3	-5.0	-6.1	-5.5	-5.8	-5.3	-5.0	
	6H	-6.1	-5.6	-5.8	-5.4	-5.1	-6.1	-5.6	-5.8	-5.4	-5.1	
	8H	-6.2	-5.7	-5.8	-5.4	-5.1	-6.2	-5.7	-5.8	-5.4	-5.1	
4H	12H	-6.2	-5.7	-5.9	-5.4	-5.1	-6.2	-5.7	-5.9	-5.4	-5.1	
	2H	-6.1	-5.5	-5.8	-5.3	-5.0	-6.1	-5.5	-5.8	-5.3	-5.0	
	3H	-6.2	-5.7	-5.9	-5.4	-5.1	-6.2	-5.7	-5.9	-5.4	-5.1	
	4H	-6.3	-5.9	-5.9	-5.6	-5.2	-6.3	-5.9	-5.9	-5.6	-5.2	
	6H	-6.3	-6.0	-5.9	-5.7	-5.3	-6.3	-6.0	-5.9	-5.7	-5.3	
8H	8H	-6.4	-6.1	-6.0	-5.7	-5.3	-6.4	-6.1	-6.0	-5.7	-5.3	
	12H	-6.4	-6.2	-6.0	-5.8	-5.4	-6.4	-6.2	-6.0	-5.8	-5.4	
	4H	-6.4	-6.1	-6.0	-5.7	-5.3	-6.4	-6.1	-6.0	-5.7	-5.3	
	6H	-6.5	-6.3	-6.0	-5.8	-5.4	-6.5	-6.3	-6.0	-5.8	-5.4	
	8H	-6.5	-6.4	-6.1	-5.9	-5.4	-6.5	-6.4	-6.1	-5.9	-5.4	
12H	12H	-6.6	-6.4	-6.1	-6.0	-5.5	-6.6	-6.4	-6.1	-6.0	-5.5	
	4H	-6.4	-6.2	-6.0	-5.8	-5.4	-6.4	-6.2	-6.0	-5.8	-5.4	
	6H	-6.5	-6.4	-6.1	-5.9	-5.4	-6.5	-6.4	-6.1	-5.9	-5.4	
	8H	-6.6	-6.4	-6.1	-6.0	-5.5	-6.6	-6.4	-6.1	-6.0	-5.5	
	Variation of the observer position for the luminaire distances S											
S = 1.0H		+0.0 / 0.0					+0.0 / 0.0					
S = 1.5H		+0.0 / 0.0					+0.0 / 0.0					
S = 2.0H		+0.0 / 0.0					+0.0 / 0.0					
Standard table		BK00					BK00					
Correction Summand		-20.0					-20.0					
Corrected Glare Indices referring to 250lm Total Luminous Flux												



DIMENSIONS



Ø 36



Ø 43

AWARDS



Name	SHOT LIGHT CRI 90 35° 4000K Z
Reference	A2680122Z
Color	Aluminium
RAL	9006
Category	CEILING RECESSED

PRODUCT

Light source	LED
Gross luminous flux	250 Lm
Power	2,1 W
Power values of the system	3,23 W
Colour temperature	4000 K
Colour Rendering Index	CRI>90
Chromatic stability	Mac Adam Step 3
Light beam angle	35°
Unified Glare Rating	UGR<19
Lighting efficiency	93%
Efficacy	119 Lm/W
Current intensity	700 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included - Connected
Emergency power supply	Please Consult
Electrical insulation class	□
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A++
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


Ingress Protection	IP20
Recess measurements	Ø38 mm.
Weight	100 g.
Packaged weight	120 g.
Packaging dimensions	77 × 70 × 53 mm.
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene

OTHER DATA




A luminary conceived to be a small, discreet point of light in the ceiling that hides the illumination source from sight and aims to offer maximum visual comfort. In order to achieve this, it has an anti-glare screen and a specifically designed micro-reflector that generates a perfectly defined light beam.

POLAR DIAGRAM

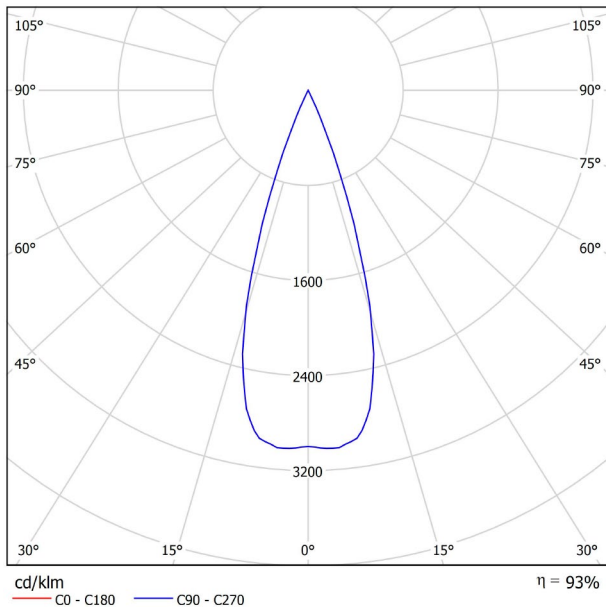

CONICAL DIAGRAM

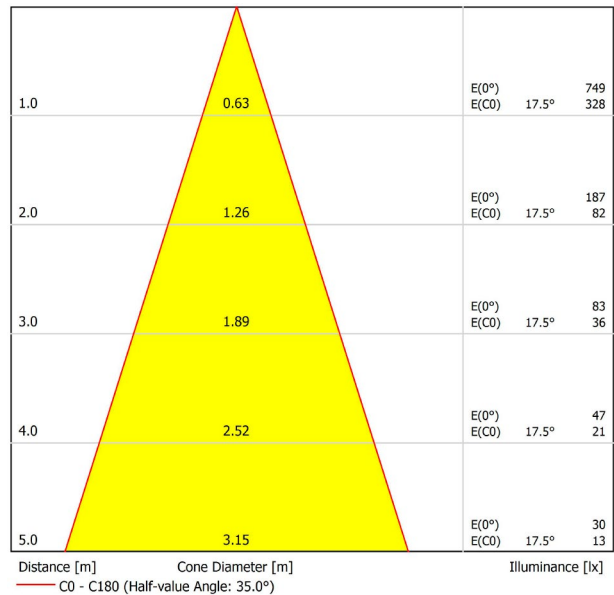


UGR

Glare Evaluation According to UGR												
p Ceiling		70	70	50	50	30	70	70	50	50	30	
p Walls		50	30	50	30	30	50	30	50	30	30	
p Floor		20	20	20	20	20	20	20	20	20	20	
Room Size X Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis					
2H	2H	-5.8	-5.2	-5.6	-5.0	-4.8	-5.8	-5.2	-5.6	-5.0	-4.8	
	3H	-6.0	-5.4	-5.7	-5.2	-4.9	-6.0	-5.4	-5.7	-5.2	-4.9	
	4H	-6.1	-5.5	-5.8	-5.3	-5.0	-6.1	-5.5	-5.8	-5.3	-5.0	
	6H	-6.1	-5.6	-5.8	-5.4	-5.1	-6.1	-5.6	-5.8	-5.4	-5.1	
	8H	-6.2	-5.7	-5.8	-5.4	-5.1	-6.2	-5.7	-5.8	-5.4	-5.1	
4H	12H	-6.2	-5.7	-5.9	-5.4	-5.1	-6.2	-5.7	-5.9	-5.4	-5.1	
	2H	-6.1	-5.5	-5.8	-5.3	-5.0	-6.1	-5.5	-5.8	-5.3	-5.0	
	3H	-6.2	-5.7	-5.9	-5.4	-5.1	-6.2	-5.7	-5.9	-5.4	-5.1	
	4H	-6.3	-5.9	-5.9	-5.6	-5.2	-6.3	-5.9	-5.9	-5.6	-5.2	
	6H	-6.3	-6.0	-5.9	-5.7	-5.3	-6.3	-6.0	-5.9	-5.7	-5.3	
8H	8H	-6.4	-6.1	-6.0	-5.7	-5.3	-6.4	-6.1	-6.0	-5.7	-5.3	
	12H	-6.4	-6.2	-6.0	-5.8	-5.4	-6.4	-6.2	-6.0	-5.8	-5.4	
	4H	-6.4	-6.1	-6.0	-5.7	-5.3	-6.4	-6.1	-6.0	-5.7	-5.3	
	6H	-6.5	-6.3	-6.0	-5.8	-5.4	-6.5	-6.3	-6.0	-5.8	-5.4	
	8H	-6.5	-6.4	-6.1	-5.9	-5.4	-6.5	-6.4	-6.1	-5.9	-5.4	
12H	12H	-6.6	-6.4	-6.1	-6.0	-5.5	-6.6	-6.4	-6.1	-6.0	-5.5	
	4H	-6.4	-6.2	-6.0	-5.8	-5.4	-6.4	-6.2	-6.0	-5.8	-5.4	
	6H	-6.5	-6.4	-6.1	-5.9	-5.4	-6.5	-6.4	-6.1	-5.9	-5.4	
	8H	-6.6	-6.4	-6.1	-6.0	-5.5	-6.6	-6.4	-6.1	-6.0	-5.5	
	Variation of the observer position for the luminaire distances S											
S = 1.0H		+0.0 / 0.0					+0.0 / 0.0					
S = 1.5H		+0.0 / 0.0					+0.0 / 0.0					
S = 2.0H		+0.0 / 0.0					+0.0 / 0.0					
Standard table		BK00					BK00					
Correction Summand		-20.0					-20.0					
Corrected Glare Indices referring to 250lm Total Luminous Flux												



DIMENSIONS



AWARDS



Name	SHOT LIGHT CRI 90 17° 2700K G
Reference	A2680110G
Color	Gold
RAL	1036
Category	CEILING RECESSED

PRODUCT

Light source	LED
Gross luminous flux	190 Lm
Power	2,1 W
Power values of the system	3,23 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	Mac Adam Step 3
Light beam angle	17°
Unified Glare Rating	UGR<19
Lighting efficiency	92%
Efficacy	90 Lm/W
Current intensity	700 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included - Connected
Emergency power supply	Please Consult
Electrical insulation class	□
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A++
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


Ingress Protection	IP20
Recess measurements	Ø38 mm.
Weight	100 g.
Packaged weight	120 g.
Packaging dimensions	77 × 70 × 53 mm.
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene

OTHER DATA




A luminary conceived to be a small, discreet point of light in the ceiling that hides the illumination source from sight and aims to offer maximum visual comfort. In order to achieve this, it has an anti-glare screen and a specifically designed micro-reflector that generates a perfectly defined light beam.

POLAR DIAGRAM

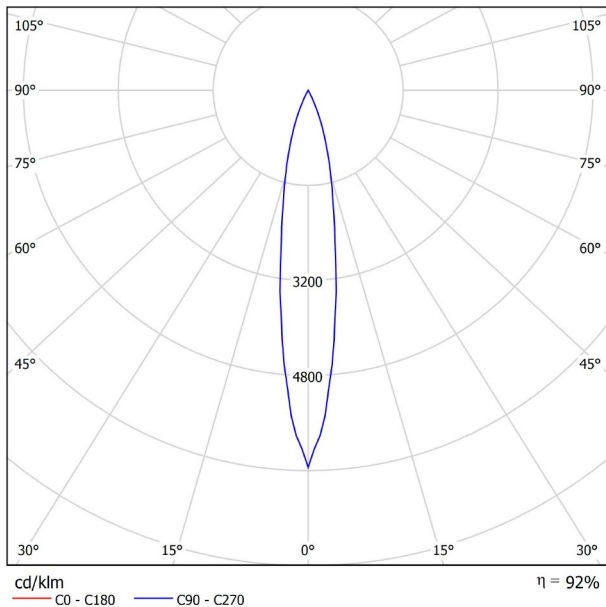

CONICAL DIAGRAM

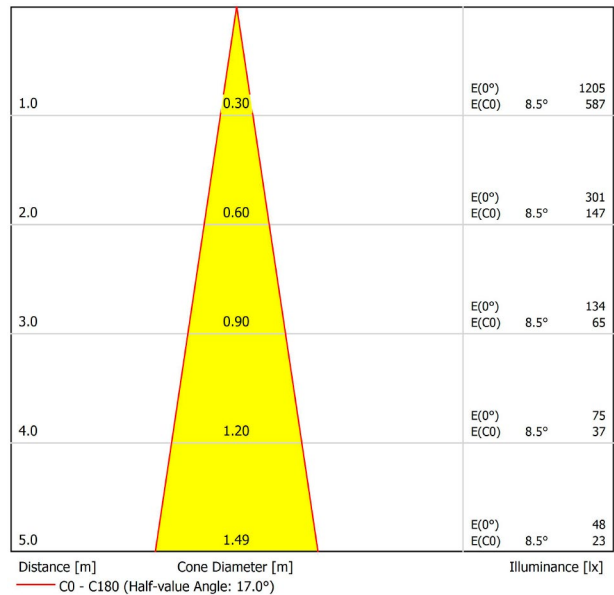


UGR

Glare Evaluation According to UGR												
p Ceiling		70	70	50	50	30	70	70	50	50	30	
p Walls		50	30	50	30	30	50	30	50	30	30	
p Floor		20	20	20	20	20	20	20	20	20	20	
Room Size X Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis					
2H	2H	-6.8	-6.1	-6.5	-5.9	-5.8	-6.8	-6.1	-6.5	-5.9	-5.8	
	3H	-6.9	-6.3	-6.6	-6.1	-5.9	-6.9	-6.3	-6.6	-6.1	-5.9	
	4H	-7.0	-6.4	-6.7	-6.2	-5.9	-7.0	-6.4	-6.7	-6.2	-5.9	
	6H	-7.0	-6.5	-6.7	-6.3	-6.0	-7.0	-6.5	-6.7	-6.3	-6.0	
	8H	-7.1	-6.6	-6.7	-6.3	-6.0	-7.1	-6.6	-6.7	-6.3	-6.0	
4H	12H	-7.1	-6.7	-6.8	-6.4	-6.1	-7.1	-6.7	-6.8	-6.4	-6.1	
	2H	-7.0	-6.4	-6.7	-6.2	-5.9	-7.0	-6.4	-6.7	-6.2	-5.9	
	3H	-7.1	-6.7	-6.8	-6.4	-6.1	-7.1	-6.7	-6.8	-6.4	-6.1	
	4H	-7.2	-6.8	-6.8	-6.5	-6.1	-7.2	-6.8	-6.8	-6.5	-6.1	
	6H	-7.3	-6.9	-6.9	-6.6	-6.2	-7.3	-6.9	-6.9	-6.6	-6.2	
8H	8H	-7.3	-7.0	-6.9	-6.6	-6.2	-7.3	-7.0	-6.9	-6.6	-6.2	
	12H	-7.3	-7.1	-6.9	-6.7	-6.3	-7.3	-7.1	-6.9	-6.7	-6.3	
	4H	-7.3	-7.0	-6.9	-6.6	-6.2	-7.3	-7.0	-6.9	-6.6	-6.2	
	6H	-7.4	-7.2	-6.9	-6.8	-6.3	-7.4	-7.2	-6.9	-6.8	-6.3	
	8H	-7.4	-7.3	-7.0	-6.8	-6.4	-7.4	-7.3	-7.0	-6.8	-6.4	
12H	12H	-7.5	-7.4	-7.0	-6.9	-6.4	-7.5	-7.4	-7.0	-6.9	-6.4	
	4H	-7.3	-7.1	-6.9	-6.7	-6.3	-7.3	-7.1	-6.9	-6.7	-6.3	
	6H	-7.4	-7.3	-7.0	-6.8	-6.4	-7.4	-7.3	-7.0	-6.8	-6.4	
	8H	-7.5	-7.4	-7.0	-6.9	-6.4	-7.5	-7.4	-7.0	-6.9	-6.4	
	Variation of the observer position for the luminaire distances S											
S = 1.0H		+0.0 / 0.0					+0.0 / 0.0					
S = 1.5H		+0.0 / 0.0					+0.0 / 0.0					
S = 2.0H		+0.0 / 0.0					+0.0 / 0.0					
Standard table		BK00					BK00					
Correction Summand		-20.0					-20.0					
Corrected Glare Indices referring to 190lm Total Luminous Flux												



DIMENSIONS



AWARDS



Name	SHOT LIGHT CRI 90 17° 2700K N
Reference	A2680110N
Color	Black
RAL	Colour in the mass looks alike RAL 9005
Category	CEILING RECESSED

PRODUCT

Light source	LED
Gross luminous flux	190 Lm
Power	2,1 W
Power values of the system	3,23 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	Mac Adam Step 3
Light beam angle	17°
Unified Glare Rating	UGR<19
Lighting efficiency	92%
Efficacy	90 Lm/W
Current intensity	700 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included - Connected
Emergency power supply	Please Consult
Electrical insulation class	□
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A++
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


Ingress Protection	IP20
Recess measurements	Ø38 mm.
Weight	100 g.
Packaged weight	120 g.
Packaging dimensions	77 × 70 × 53 mm.
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene

OTHER DATA




A luminary conceived to be a small, discreet point of light in the ceiling that hides the illumination source from sight and aims to offer maximum visual comfort. In order to achieve this, it has an anti-glare screen and a specifically designed micro-reflector that generates a perfectly defined light beam.

POLAR DIAGRAM

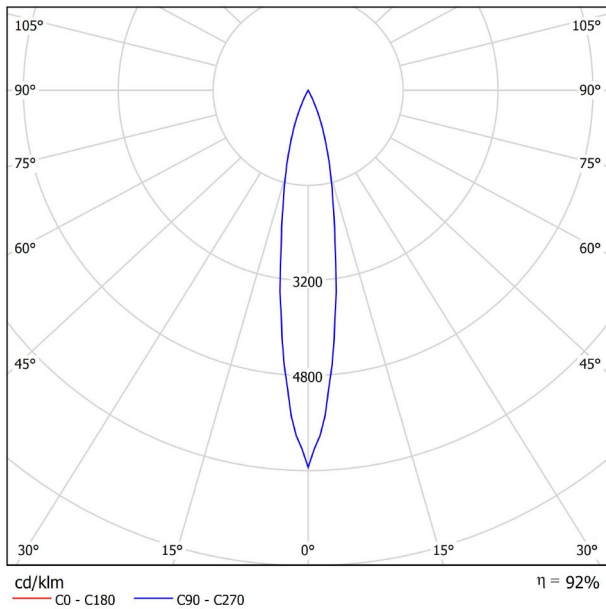

CONICAL DIAGRAM

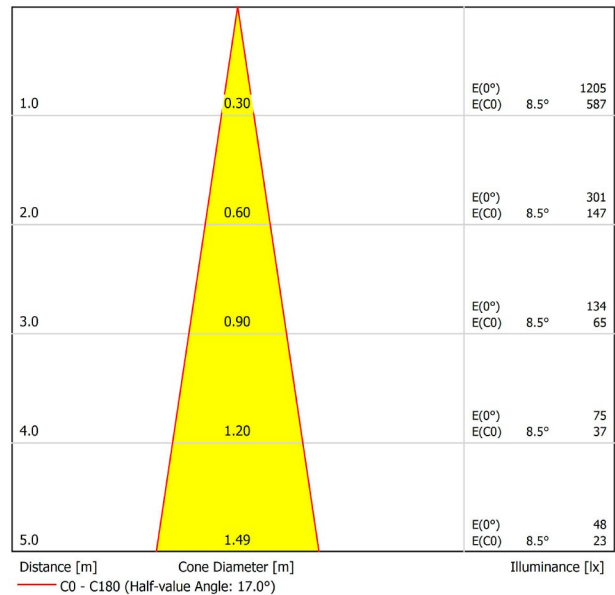


UGR

Glare Evaluation According to UGR												
ρ Ceiling		70	70	50	50	30	70	70	50	50	30	30
ρ Walls		50	30	50	30	30	50	30	50	30	30	30
ρ Floor		20	20	20	20	20	20	20	20	20	20	20
Room Size X Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis					
2H	2H	-6.8	-6.1	-6.5	-5.9	-5.8	-6.8	-6.1	-6.5	-5.9	-5.8	
	3H	-6.9	-6.3	-6.6	-6.1	-5.9	-6.9	-6.3	-6.6	-6.1	-5.9	
	4H	-7.0	-6.4	-6.7	-6.2	-5.9	-7.0	-6.4	-6.7	-6.2	-5.9	
	6H	-7.0	-6.5	-6.7	-6.3	-6.0	-7.0	-6.5	-6.7	-6.3	-6.0	
	8H	-7.1	-6.6	-6.7	-6.3	-6.0	-7.1	-6.6	-6.7	-6.3	-6.0	
4H	12H	-7.1	-6.7	-6.8	-6.4	-6.1	-7.1	-6.7	-6.8	-6.4	-6.1	
	2H	-7.0	-6.4	-6.7	-6.2	-5.9	-7.0	-6.4	-6.7	-6.2	-5.9	
	3H	-7.1	-6.7	-6.8	-6.4	-6.1	-7.1	-6.7	-6.8	-6.4	-6.1	
	4H	-7.2	-6.8	-6.8	-6.5	-6.1	-7.2	-6.8	-6.8	-6.5	-6.1	
	6H	-7.3	-6.9	-6.9	-6.6	-6.2	-7.3	-6.9	-6.9	-6.6	-6.2	
8H	8H	-7.3	-7.0	-6.9	-6.6	-6.2	-7.3	-7.0	-6.9	-6.6	-6.2	
	12H	-7.3	-7.1	-6.9	-6.7	-6.3	-7.3	-7.1	-6.9	-6.7	-6.3	
	4H	-7.3	-7.0	-6.9	-6.6	-6.2	-7.3	-7.0	-6.9	-6.6	-6.2	
	6H	-7.4	-7.2	-6.9	-6.8	-6.3	-7.4	-7.2	-6.9	-6.8	-6.3	
	8H	-7.4	-7.3	-7.0	-6.8	-6.4	-7.4	-7.3	-7.0	-6.8	-6.4	
12H	12H	-7.5	-7.4	-7.0	-6.9	-6.4	-7.5	-7.4	-7.0	-6.9	-6.4	
	4H	-7.3	-7.1	-6.9	-6.7	-6.3	-7.3	-7.1	-6.9	-6.7	-6.3	
	6H	-7.4	-7.3	-7.0	-6.8	-6.4	-7.4	-7.3	-7.0	-6.8	-6.4	
	8H	-7.5	-7.4	-7.0	-6.9	-6.4	-7.5	-7.4	-7.0	-6.9	-6.4	
	Variation of the observer position for the luminaire distances S											
S = 1.0H		+0.0 / 0.0					+0.0 / 0.0					
S = 1.5H		+0.0 / 0.0					+0.0 / 0.0					
S = 2.0H		+0.0 / 0.0					+0.0 / 0.0					
Standard table		BK00					BK00					
Correction Summand		-20.0					-20.0					
Corrected Glare Indices referring to 190lm Total Luminous Flux												



DIMENSIONS



AWARDS



Name	SHOT LIGHT CRI 90 17° 2700K R
Reference	A2680110R
Color	Red
RAL	2004
Category	CEILING RECESSED

PRODUCT

Light source	LED
Gross luminous flux	190 Lm
Power	2,1 W
Power values of the system	3,23 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	Mac Adam Step 3
Light beam angle	17°
Unified Glare Rating	UGR<19
Lighting efficiency	92%
Efficacy	90 Lm/W
Current intensity	700 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included - Connected
Emergency power supply	Please Consult
Electrical insulation class	□
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A++
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


Ingress Protection	IP20
Recess measurements	Ø38 mm.
Weight	100 g.
Packaged weight	120 g.
Packaging dimensions	77 × 70 × 53 mm.
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene

OTHER DATA




A luminary conceived to be a small, discreet point of light in the ceiling that hides the illumination source from sight and aims to offer maximum visual comfort. In order to achieve this, it has an anti-glare screen and a specifically designed micro-reflector that generates a perfectly defined light beam.

POLAR DIAGRAM

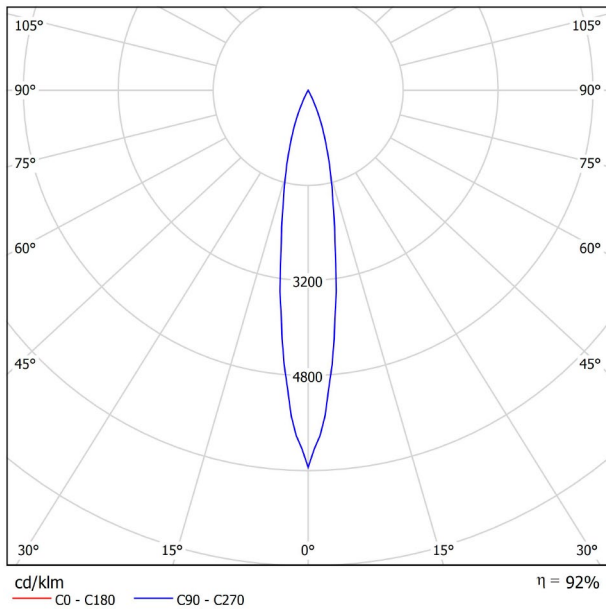

CONICAL DIAGRAM

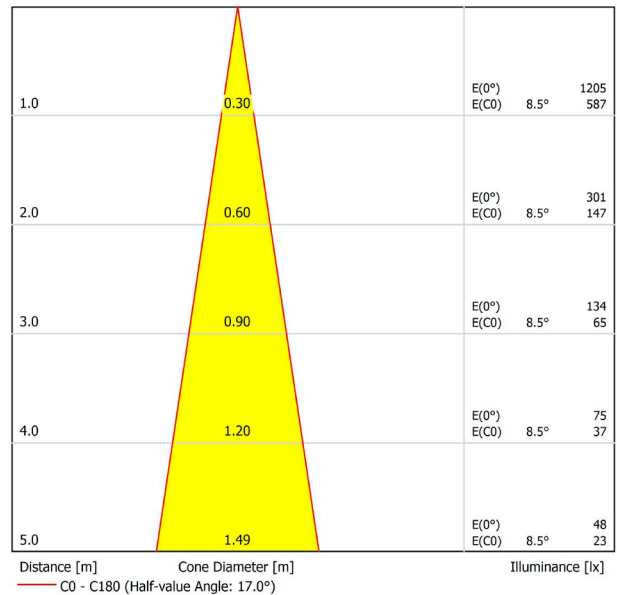


UGR

Glare Evaluation According to UGR												
p Ceiling		70	70	50	50	30	70	70	50	50	30	
p Walls		50	30	50	30	30	50	30	50	30	30	
p Floor		20	20	20	20	20	20	20	20	20	20	
Room Size X Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis					
2H	2H	-6.8	-6.1	-6.5	-5.9	-5.8	-6.8	-6.1	-6.5	-5.9	-5.8	
	3H	-6.9	-6.3	-6.6	-6.1	-5.9	-6.9	-6.3	-6.6	-6.1	-5.9	
	4H	-7.0	-6.4	-6.7	-6.2	-5.9	-7.0	-6.4	-6.7	-6.2	-5.9	
	6H	-7.0	-6.5	-6.7	-6.3	-6.0	-7.0	-6.5	-6.7	-6.3	-6.0	
	8H	-7.1	-6.6	-6.7	-6.3	-6.0	-7.1	-6.6	-6.7	-6.3	-6.0	
4H	12H	-7.1	-6.7	-6.8	-6.4	-6.1	-7.1	-6.7	-6.8	-6.4	-6.1	
	2H	-7.0	-6.4	-6.7	-6.2	-5.9	-7.0	-6.4	-6.7	-6.2	-5.9	
	3H	-7.1	-6.7	-6.8	-6.4	-6.1	-7.1	-6.7	-6.8	-6.4	-6.1	
	4H	-7.2	-6.8	-6.8	-6.5	-6.1	-7.2	-6.8	-6.8	-6.5	-6.1	
	6H	-7.3	-6.9	-6.9	-6.6	-6.2	-7.3	-6.9	-6.9	-6.6	-6.2	
8H	8H	-7.3	-7.0	-6.9	-6.6	-6.2	-7.3	-7.0	-6.9	-6.6	-6.2	
	12H	-7.3	-7.1	-6.9	-6.7	-6.3	-7.3	-7.1	-6.9	-6.7	-6.3	
	4H	-7.3	-7.0	-6.9	-6.6	-6.2	-7.3	-7.0	-6.9	-6.6	-6.2	
	6H	-7.4	-7.2	-6.9	-6.8	-6.3	-7.4	-7.2	-6.9	-6.8	-6.3	
	8H	-7.4	-7.3	-7.0	-6.8	-6.4	-7.4	-7.3	-7.0	-6.8	-6.4	
12H	12H	-7.5	-7.4	-7.0	-6.9	-6.4	-7.5	-7.4	-7.0	-6.9	-6.4	
	4H	-7.3	-7.1	-6.9	-6.7	-6.3	-7.3	-7.1	-6.9	-6.7	-6.3	
	6H	-7.4	-7.3	-7.0	-6.8	-6.4	-7.4	-7.3	-7.0	-6.8	-6.4	
	8H	-7.5	-7.4	-7.0	-6.9	-6.4	-7.5	-7.4	-7.0	-6.9	-6.4	
	Variation of the observer position for the luminaire distances S											
S = 1.0H		+0.0 / 0.0					+0.0 / 0.0					
S = 1.5H		+0.0 / 0.0					+0.0 / 0.0					
S = 2.0H		+0.0 / 0.0					+0.0 / 0.0					
Standard table		BK00					BK00					
Correction Summand		-20.0					-20.0					
Corrected Glare Indices referring to 190lm Total Luminous Flux												



DIMENSIONS



AWARDS



Name	SHOT LIGHT CRI 90 17° 2700K W
Reference	A2680110W
Color	White
RAL	Colour in the mass looks alike RAL 9016
Category	CEILING RECESSED

PRODUCT

Light source	LED
Gross luminous flux	190 Lm
Power	2,1 W
Power values of the system	3,23 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	Mac Adam Step 3
Light beam angle	17°
Unified Glare Rating	UGR<19
Lighting efficiency	92%
Efficacy	90 Lm/W
Current intensity	700 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included - Connected
Emergency power supply	Please Consult
Electrical insulation class	□
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A++
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


Ingress Protection	IP20
Recess measurements	Ø38 mm.
Weight	100 g.
Packaged weight	120 g.
Packaging dimensions	77 × 70 × 53 mm.
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene

OTHER DATA




A luminary conceived to be a small, discreet point of light in the ceiling that hides the illumination source from sight and aims to offer maximum visual comfort. In order to achieve this, it has an anti-glare screen and a specifically designed micro-reflector that generates a perfectly defined light beam.

POLAR DIAGRAM

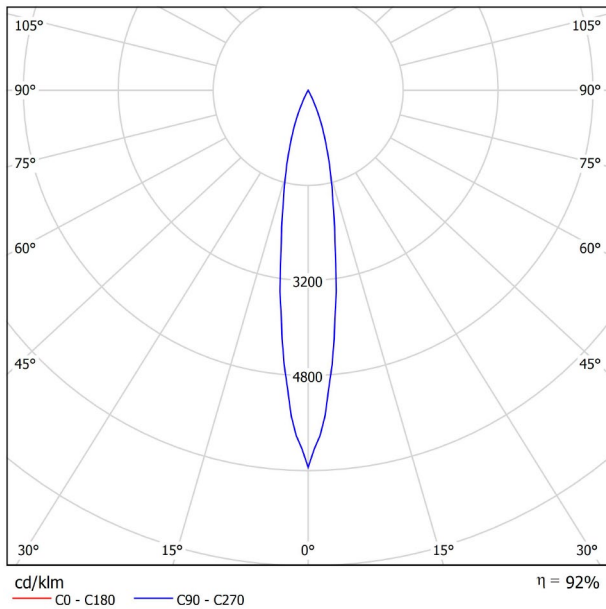

CONICAL DIAGRAM

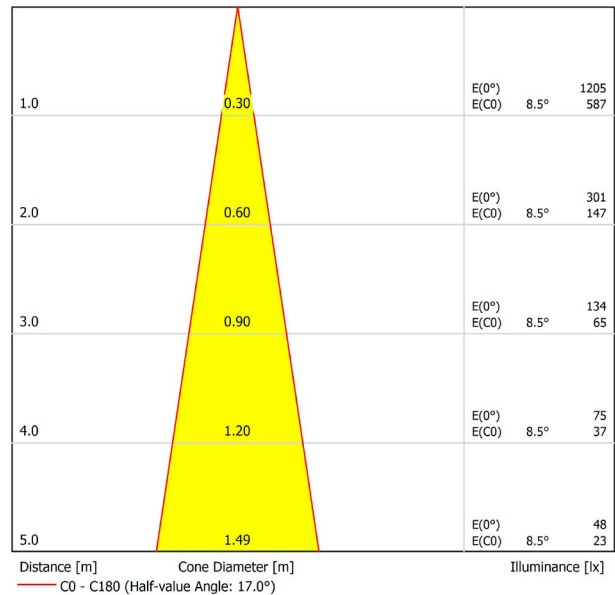


UGR


Glare Evaluation According to UGR												
p Ceiling		70	70	50	50	30	70	70	50	50	30	
p Walls		50	30	50	30	30	50	30	50	30	30	
p Floor		20	20	20	20	20	20	20	20	20	20	
Room Size X Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis					
2H	2H	-6.8	-6.1	-6.5	-5.9	-5.8	-6.8	-6.1	-6.5	-5.9	-5.8	
	3H	-6.9	-6.3	-6.6	-6.1	-5.9	-6.9	-6.3	-6.6	-6.1	-5.9	
	4H	-7.0	-6.4	-6.7	-6.2	-5.9	-7.0	-6.4	-6.7	-6.2	-5.9	
	6H	-7.0	-6.5	-6.7	-6.3	-6.0	-7.0	-6.5	-6.7	-6.3	-6.0	
	8H	-7.1	-6.6	-6.7	-6.3	-6.0	-7.1	-6.6	-6.7	-6.3	-6.0	
4H	12H	-7.1	-6.7	-6.8	-6.4	-6.1	-7.1	-6.7	-6.8	-6.4	-6.1	
	2H	-7.0	-6.4	-6.7	-6.2	-5.9	-7.0	-6.4	-6.7	-6.2	-5.9	
	3H	-7.1	-6.7	-6.8	-6.4	-6.1	-7.1	-6.7	-6.8	-6.4	-6.1	
	4H	-7.2	-6.8	-6.8	-6.5	-6.1	-7.2	-6.8	-6.8	-6.5	-6.1	
	6H	-7.3	-6.9	-6.9	-6.6	-6.2	-7.3	-6.9	-6.9	-6.6	-6.2	
8H	8H	-7.3	-7.0	-6.9	-6.6	-6.2	-7.3	-7.0	-6.9	-6.6	-6.2	
	12H	-7.3	-7.1	-6.9	-6.7	-6.3	-7.3	-7.1	-6.9	-6.7	-6.3	
	4H	-7.3	-7.0	-6.9	-6.6	-6.2	-7.3	-7.0	-6.9	-6.6	-6.2	
	6H	-7.4	-7.2	-6.9	-6.8	-6.3	-7.4	-7.2	-6.9	-6.8	-6.3	
	8H	-7.4	-7.3	-7.0	-6.8	-6.4	-7.4	-7.3	-7.0	-6.8	-6.4	
12H	12H	-7.5	-7.4	-7.0	-6.9	-6.4	-7.5	-7.4	-7.0	-6.9	-6.4	
	4H	-7.3	-7.1	-6.9	-6.7	-6.3	-7.3	-7.1	-6.9	-6.7	-6.3	
	6H	-7.4	-7.3	-7.0	-6.8	-6.4	-7.4	-7.3	-7.0	-6.8	-6.4	
	8H	-7.5	-7.4	-7.0	-6.9	-6.4	-7.5	-7.4	-7.0	-6.9	-6.4	
	Variation of the observer position for the luminaire distances S											
S = 1.0H		+0.0 / 0.0					+0.0 / 0.0					
S = 1.5H		+0.0 / 0.0					+0.0 / 0.0					
S = 2.0H		+0.0 / 0.0					+0.0 / 0.0					
Standard table		BK00					BK00					
Correction Summand		-20.0					-20.0					
Corrected Glare Indices referring to 190lm Total Luminous Flux												



DIMENSIONS



Ø 36



Ø 43

AWARDS



Name	SHOT LIGHT CRI 90 17° 2700K WN
Reference	A2680110WN
Color	White-Black
RAL	Colour in the mass looks alike RAL 9016 & 9005
Category	CEILING RECESSED

PRODUCT

Light source	LED
Gross luminous flux	190 Lm
Power	2,1 W
Power values of the system	3,23 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	Mac Adam Step 3
Light beam angle	17°
Unified Glare Rating	UGR<19
Lighting efficiency	92%
Efficacy	90 Lm/W
Current intensity	700 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included - Connected
Emergency power supply	Please Consult
Electrical insulation class	□
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A++
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


Ingress Protection	IP20
Recess measurements	Ø38 mm.
Weight	100 g.
Packaged weight	120 g.
Packaging dimensions	77 × 70 × 53 mm.
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene

OTHER DATA




A luminary conceived to be a small, discreet point of light in the ceiling that hides the illumination source from sight and aims to offer maximum visual comfort. In order to achieve this, it has an anti-glare screen and a specifically designed micro-reflector that generates a perfectly defined light beam.

POLAR DIAGRAM

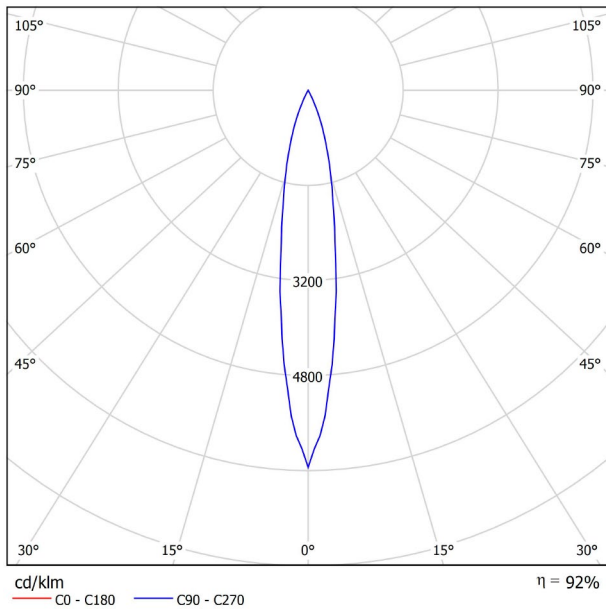

CONICAL DIAGRAM

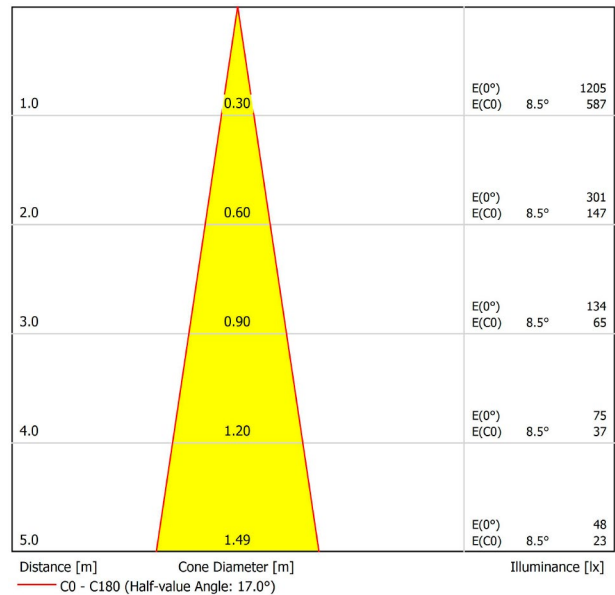


UGR

Glare Evaluation According to UGR												
p Ceiling		70	70	50	50	30	70	70	50	50	30	
p Walls		50	30	50	30	30	50	30	50	30	30	
p Floor		20	20	20	20	20	20	20	20	20	20	
Room Size X Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis					
2H	2H	-6.8	-6.1	-6.5	-5.9	-5.8	-6.8	-6.1	-6.5	-5.9	-5.8	
	3H	-6.9	-6.3	-6.6	-6.1	-5.9	-6.9	-6.3	-6.6	-6.1	-5.9	
	4H	-7.0	-6.4	-6.7	-6.2	-5.9	-7.0	-6.4	-6.7	-6.2	-5.9	
	6H	-7.0	-6.5	-6.7	-6.3	-6.0	-7.0	-6.5	-6.7	-6.3	-6.0	
	8H	-7.1	-6.6	-6.7	-6.3	-6.0	-7.1	-6.6	-6.7	-6.3	-6.0	
4H	12H	-7.1	-6.7	-6.8	-6.4	-6.1	-7.1	-6.7	-6.8	-6.4	-6.1	
	2H	-7.0	-6.4	-6.7	-6.2	-5.9	-7.0	-6.4	-6.7	-6.2	-5.9	
	3H	-7.1	-6.7	-6.8	-6.4	-6.1	-7.1	-6.7	-6.8	-6.4	-6.1	
	4H	-7.2	-6.8	-6.8	-6.5	-6.1	-7.2	-6.8	-6.8	-6.5	-6.1	
	6H	-7.3	-6.9	-6.9	-6.6	-6.2	-7.3	-6.9	-6.9	-6.6	-6.2	
8H	8H	-7.3	-7.0	-6.9	-6.6	-6.2	-7.3	-7.0	-6.9	-6.6	-6.2	
	12H	-7.3	-7.1	-6.9	-6.7	-6.3	-7.3	-7.1	-6.9	-6.7	-6.3	
	4H	-7.3	-7.0	-6.9	-6.6	-6.2	-7.3	-7.0	-6.9	-6.6	-6.2	
	6H	-7.4	-7.2	-6.9	-6.8	-6.3	-7.4	-7.2	-6.9	-6.8	-6.3	
	8H	-7.4	-7.3	-7.0	-6.8	-6.4	-7.4	-7.3	-7.0	-6.8	-6.4	
12H	12H	-7.5	-7.4	-7.0	-6.9	-6.4	-7.5	-7.4	-7.0	-6.9	-6.4	
	4H	-7.3	-7.1	-6.9	-6.7	-6.3	-7.3	-7.1	-6.9	-6.7	-6.3	
	6H	-7.4	-7.3	-7.0	-6.8	-6.4	-7.4	-7.3	-7.0	-6.8	-6.4	
	8H	-7.5	-7.4	-7.0	-6.9	-6.4	-7.5	-7.4	-7.0	-6.9	-6.4	
	Variation of the observer position for the luminaire distances S											
S = 1.0H		+0.0 / 0.0					+0.0 / 0.0					
S = 1.5H		+0.0 / 0.0					+0.0 / 0.0					
S = 2.0H		+0.0 / 0.0					+0.0 / 0.0					
Standard table		BK00					BK00					
Correction Summand		-20.0					-20.0					
Corrected Glare Indices referring to 190lm Total Luminous Flux												



DIMENSIONS



Ø 36



45

MIN. 49

Ø 43

AWARDS



Name	SHOT LIGHT CRI 90 17° 2700K Z
Reference	A2680110Z
Color	Aluminium
RAL	9006
Category	CEILING RECESSED

PRODUCT

Light source	LED
Gross luminous flux	190 Lm
Power	2,1 W
Power values of the system	3,23 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	Mac Adam Step 3
Light beam angle	17°
Unified Glare Rating	UGR<19
Lighting efficiency	92%
Efficacy	90 Lm/W
Current intensity	700 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included - Connected
Emergency power supply	Please Consult
Electrical insulation class	□
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A++
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


Ingress Protection	IP20
Recess measurements	Ø38 mm.
Weight	100 g.
Packaged weight	120 g.
Packaging dimensions	77 × 70 × 53 mm.
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene

OTHER DATA




A luminary conceived to be a small, discreet point of light in the ceiling that hides the illumination source from sight and aims to offer maximum visual comfort. In order to achieve this, it has an anti-glare screen and a specifically designed micro-reflector that generates a perfectly defined light beam.

POLAR DIAGRAM

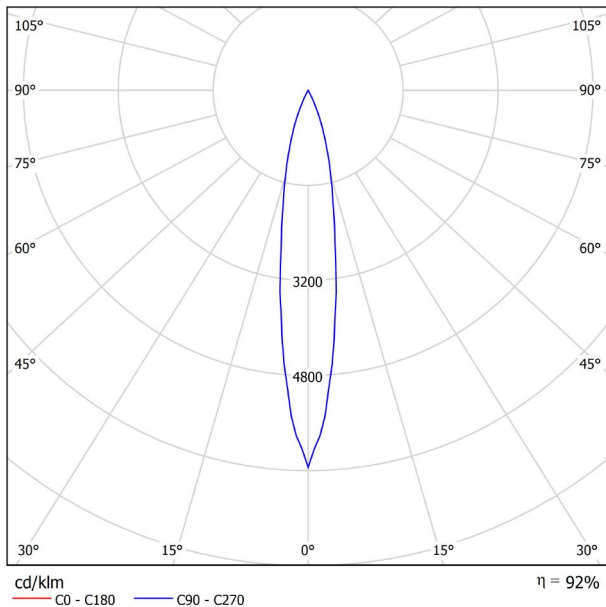

CONICAL DIAGRAM

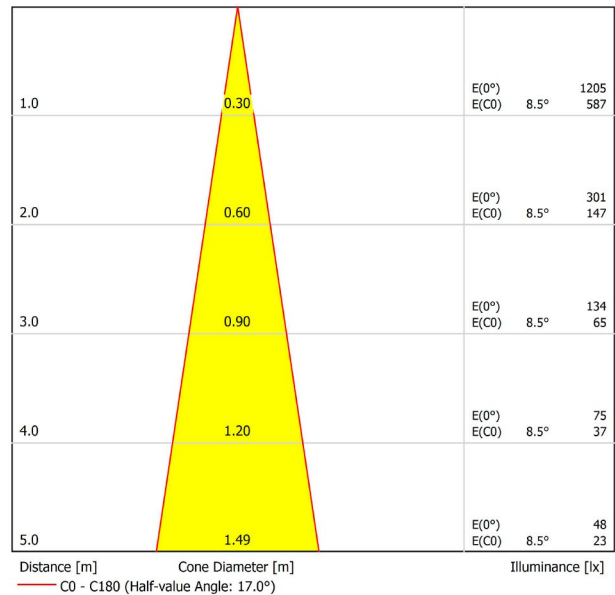


UGR

Glare Evaluation According to UGR												
ρ Ceiling		70	70	50	50	30	70	70	50	50	30	
ρ Walls		50	30	50	30	30	50	30	50	30	30	
ρ Floor		20	20	20	20	20	20	20	20	20	20	
Room Size X Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis					
2H	2H	-6.8	-6.1	-6.5	-5.9	-5.8	-6.8	-6.1	-6.5	-5.9	-5.8	
	3H	-6.9	-6.3	-6.6	-6.1	-5.9	-6.9	-6.3	-6.6	-6.1	-5.9	
	4H	-7.0	-6.4	-6.7	-6.2	-5.9	-7.0	-6.4	-6.7	-6.2	-5.9	
	6H	-7.0	-6.5	-6.7	-6.3	-6.0	-7.0	-6.5	-6.7	-6.3	-6.0	
	8H	-7.1	-6.6	-6.7	-6.3	-6.0	-7.1	-6.6	-6.7	-6.3	-6.0	
4H	12H	-7.1	-6.7	-6.8	-6.4	-6.1	-7.1	-6.7	-6.8	-6.4	-6.1	
	2H	-7.0	-6.4	-6.7	-6.2	-5.9	-7.0	-6.4	-6.7	-6.2	-5.9	
	3H	-7.1	-6.7	-6.8	-6.4	-6.1	-7.1	-6.7	-6.8	-6.4	-6.1	
	4H	-7.2	-6.8	-6.8	-6.5	-6.1	-7.2	-6.8	-6.8	-6.5	-6.1	
	6H	-7.3	-6.9	-6.9	-6.6	-6.2	-7.3	-6.9	-6.9	-6.6	-6.2	
8H	8H	-7.3	-7.0	-6.9	-6.6	-6.2	-7.3	-7.0	-6.9	-6.6	-6.2	
	12H	-7.3	-7.1	-6.9	-6.7	-6.3	-7.3	-7.1	-6.9	-6.7	-6.3	
	4H	-7.3	-7.0	-6.9	-6.6	-6.2	-7.3	-7.0	-6.9	-6.6	-6.2	
	6H	-7.4	-7.2	-6.9	-6.8	-6.3	-7.4	-7.2	-6.9	-6.8	-6.3	
	8H	-7.4	-7.3	-7.0	-6.8	-6.4	-7.4	-7.3	-7.0	-6.8	-6.4	
12H	12H	-7.5	-7.4	-7.0	-6.9	-6.4	-7.5	-7.4	-7.0	-6.9	-6.4	
	4H	-7.3	-7.1	-6.9	-6.7	-6.3	-7.3	-7.1	-6.9	-6.7	-6.3	
	6H	-7.4	-7.3	-7.0	-6.8	-6.4	-7.4	-7.3	-7.0	-6.8	-6.4	
	8H	-7.5	-7.4	-7.0	-6.9	-6.4	-7.5	-7.4	-7.0	-6.9	-6.4	
	Variation of the observer position for the luminaire distances S											
S = 1.0H		+0.0 / 0.0					+0.0 / 0.0					
S = 1.5H		+0.0 / 0.0					+0.0 / 0.0					
S = 2.0H		+0.0 / 0.0					+0.0 / 0.0					
Standard table		BK00					BK00					
Correction Summand		-20.0					-20.0					
Corrected Glare Indices referring to 190lm Total Luminous Flux												



DIMENSIONS



Ø 36

45

MIN. 49

Ø 43

AWARDS



Name	SHOT LIGHT CRI 90 17° 3000K G
Reference	A2680111G
Color	Gold
RAL	1036
Category	CEILING RECESSED

PRODUCT

Light source	LED
Gross luminous flux	210 Lm
Power	2,1 W
Power values of the system	3,23 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	Mac Adam Step 3
Light beam angle	17°
Unified Glare Rating	UGR<19
Lighting efficiency	92%
Efficacy	100 Lm/W
Current intensity	700 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included - Connected
Emergency power supply	Please Consult
Electrical insulation class	□
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A++
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


Ingress Protection	IP20
Recess measurements	Ø38 mm.
Weight	100 g.
Packaged weight	120 g.
Packaging dimensions	77 × 70 × 53 mm.
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene

OTHER DATA




A luminary conceived to be a small, discreet point of light in the ceiling that hides the illumination source from sight and aims to offer maximum visual comfort. In order to achieve this, it has an anti-glare screen and a specifically designed micro-reflector that generates a perfectly defined light beam.

POLAR DIAGRAM

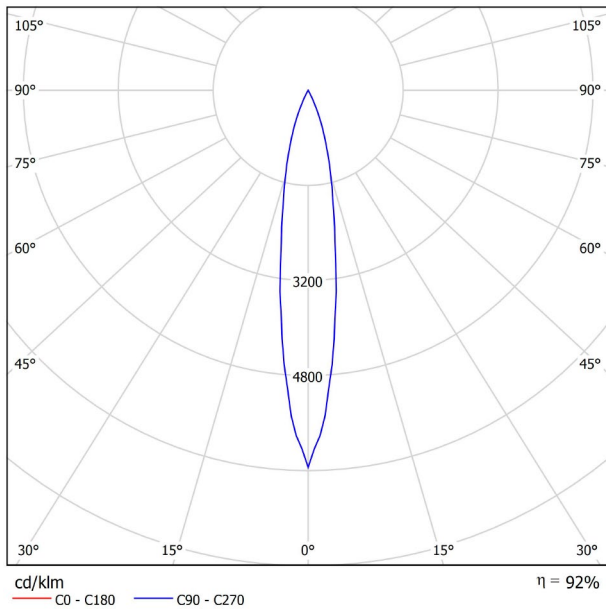

CONICAL DIAGRAM

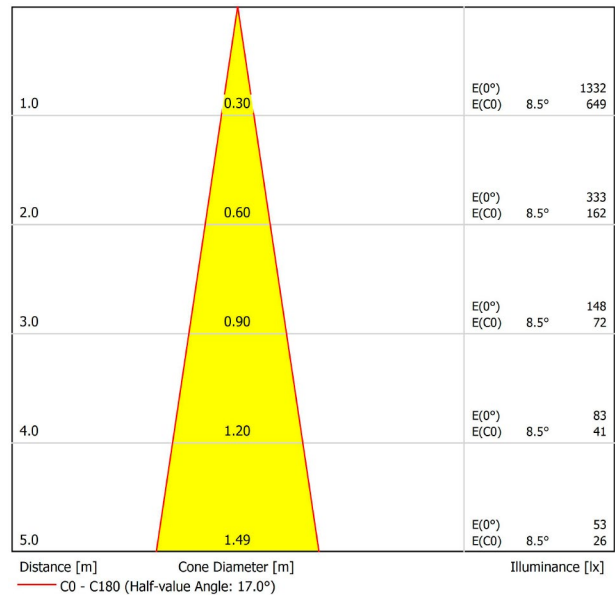


UGR

Glare Evaluation According to UGR												
ρ Ceiling		70	70	50	50	30	70	70	50	50	30	30
ρ Walls		50	30	50	30	30	50	30	50	30	30	30
ρ Floor		20	20	20	20	20	20	20	20	20	20	20
Room Size X Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis					
2H	2H	-6.4	-5.8	-6.2	-5.6	-5.4	-6.4	-5.8	-6.2	-5.6	-5.4	
	3H	-6.6	-6.0	-6.3	-5.8	-5.5	-6.6	-6.0	-6.3	-5.8	-5.5	
	4H	-6.6	-6.1	-6.3	-5.8	-5.6	-6.6	-6.1	-6.3	-5.8	-5.6	
	6H	-6.7	-6.2	-6.4	-5.9	-5.6	-6.7	-6.2	-6.4	-5.9	-5.6	
	8H	-6.7	-6.3	-6.4	-6.0	-5.7	-6.7	-6.3	-6.4	-6.0	-5.7	
4H	12H	-6.8	-6.3	-6.4	-6.0	-5.7	-6.8	-6.3	-6.4	-6.0	-5.7	
	2H	-6.6	-6.1	-6.3	-5.8	-5.6	-6.6	-6.1	-6.3	-5.8	-5.6	
	3H	-6.8	-6.3	-6.4	-6.0	-5.7	-6.8	-6.3	-6.4	-6.0	-5.7	
	4H	-6.8	-6.5	-6.5	-6.1	-5.8	-6.8	-6.5	-6.5	-6.1	-5.8	
	6H	-6.9	-6.6	-6.5	-6.2	-5.9	-6.9	-6.6	-6.5	-6.2	-5.9	
8H	8H	-7.0	-6.7	-6.5	-6.3	-5.9	-7.0	-6.7	-6.5	-6.3	-5.9	
	12H	-7.0	-6.8	-6.6	-6.4	-5.9	-7.0	-6.8	-6.6	-6.4	-5.9	
	4H	-7.0	-6.7	-6.5	-6.3	-5.9	-7.0	-6.7	-6.5	-6.3	-5.9	
	6H	-7.0	-6.8	-6.6	-6.4	-6.0	-7.0	-6.8	-6.6	-6.4	-6.0	
	8H	-7.1	-6.9	-6.6	-6.5	-6.0	-7.1	-6.9	-6.6	-6.5	-6.0	
12H	12H	-7.1	-7.0	-6.7	-6.5	-6.1	-7.1	-7.0	-6.7	-6.5	-6.1	
	4H	-7.0	-6.8	-6.6	-6.4	-5.9	-7.0	-6.8	-6.6	-6.4	-5.9	
	6H	-7.1	-6.9	-6.6	-6.5	-6.0	-7.1	-6.9	-6.6	-6.5	-6.0	
	8H	-7.1	-7.0	-6.7	-6.5	-6.1	-7.1	-7.0	-6.7	-6.5	-6.1	
	Variation of the observer position for the luminaire distances S											
S = 1.0H		+0.0 / 0.0					+0.0 / 0.0					
S = 1.5H		+0.0 / 0.0					+0.0 / 0.0					
S = 2.0H		+0.0 / 0.0					+0.0 / 0.0					
Standard table		BK00					BK00					
Correction Summand		-20.0					-20.0					
Corrected Glare Indices referring to 210lm Total Luminous Flux												



DIMENSIONS



AWARDS



Name	SHOT LIGHT IP54 CRI 90 38° 2700K NMG
Reference	A2680220NMG
Color	Black-Metallized gold
RAL	Metallic finish
Category	CEILING RECESSED

PRODUCT

Light source	LED
Gross luminous flux	190 Lm
Power	2,1 W
Power values of the system	3,23 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 3
Light beam angle	38°
Lighting efficiency	86%
Efficacy	90 Lm/W
Current intensity	700 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included - Connected
Emergency power supply	Please Consult
Electrical insulation class	□
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A++
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


Ingress Protection	IP54
Recess measurements	Ø38 mm.
Weight	100 g.
Packaged weight	120 g.
Packaging dimensions	77 × 70 × 53 mm
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene / Polycarbonate

OTHER DATA




A luminary conceived to be a small, discreet point of light in the ceiling that hides the illumination source from sight and aims to offer maximum visual comfort. In order to achieve this, it has an anti-glare screen and a specifically designed micro-reflector that generates a perfectly defined light beam.

POLAR DIAGRAM

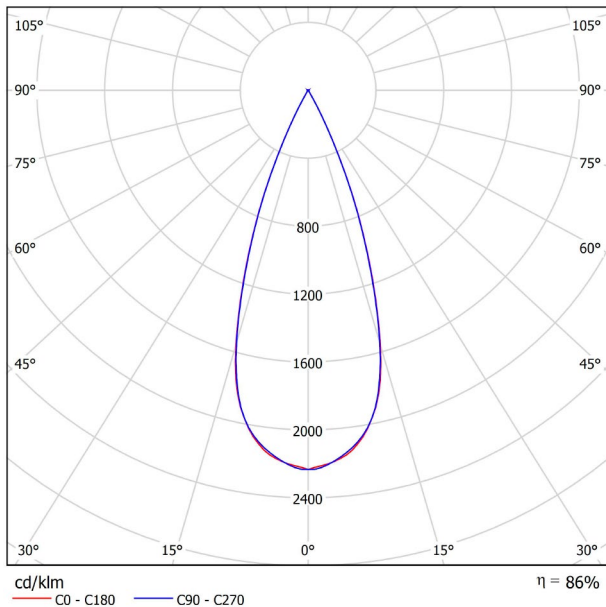

CONICAL DIAGRAM

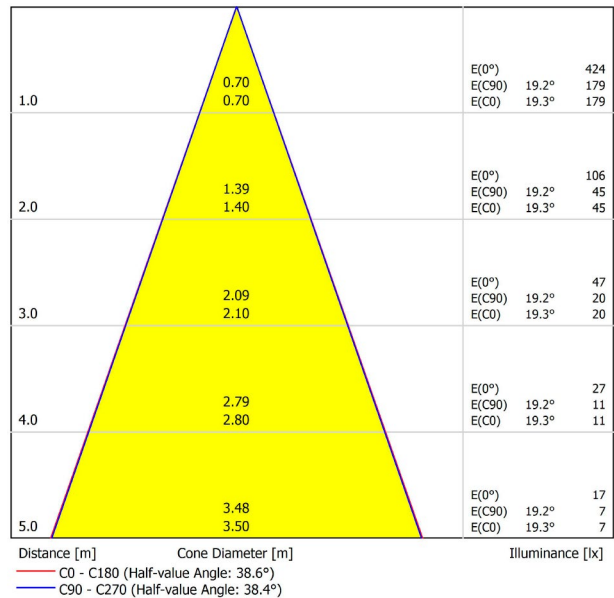


UGR

Glare Evaluation According to UGR												
ρ Ceiling		70	70	50	50	30	70	70	50	50	30	
ρ Walls		50	30	50	30	30	50	30	50	30	30	
ρ Floor		20	20	20	20	20	20	20	20	20	20	
Room Size X Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis					
2H	2H	-5.1	-4.5	-4.9	-4.3	-4.1	-4.9	-4.3	-4.7	-4.1	-3.9	
	3H	-1.3	-0.7	-1.0	-0.5	-0.3	-1.5	-0.9	-1.2	-0.7	-0.4	
	4H	0.5	1.0	0.8	1.3	1.5	0.6	1.2	0.9	1.4	1.7	
	6H	2.6	3.1	2.9	3.4	3.7	2.9	3.4	3.2	3.7	4.0	
	8H	3.9	4.4	4.3	4.7	5.0	4.1	4.6	4.4	4.9	5.2	
4H	12H	5.3	5.7	5.6	6.0	6.4	5.4	5.9	5.8	6.2	6.5	
	2H	-4.0	-3.4	-3.7	-3.2	-2.9	-3.8	-3.3	-3.5	-3.0	-2.8	
	3H	-0.1	0.4	0.2	0.7	1.0	-0.1	0.4	0.3	0.7	1.0	
	4H	1.9	2.3	2.3	2.7	3.0	2.1	2.5	2.5	2.9	3.2	
	6H	4.3	4.6	4.7	5.0	5.3	4.6	4.9	5.0	5.3	5.7	
8H	8H	5.7	6.0	6.1	6.4	6.8	5.9	6.1	6.3	6.5	6.9	
	12H	7.1	7.4	7.6	7.8	8.2	7.3	7.6	7.7	8.0	8.4	
	4H	2.9	3.2	3.3	3.6	4.0	3.1	3.3	3.5	3.7	4.1	
	6H	5.5	5.7	5.9	6.1	6.6	5.7	5.9	6.1	6.3	6.8	
	8H	7.0	7.2	7.5	7.6	8.1	7.1	7.3	7.6	7.7	8.2	
12H	12H	8.7	8.8	9.2	9.3	9.8	8.8	8.9	9.3	9.4	9.9	
	4H	3.2	3.4	3.6	3.8	4.3	3.3	3.6	3.7	4.0	4.4	
	6H	5.8	6.0	6.3	6.4	6.9	6.0	6.2	6.5	6.6	7.1	
	8H	7.5	7.6	8.0	8.1	8.6	7.6	7.7	8.1	8.2	8.7	
	Variation of the observer position for the luminaire distances S											
S = 1.0H		+0.4 / -0.2					+0.4 / -0.2					
S = 1.5H		+0.9 / -0.5					+0.9 / -0.4					
S = 2.0H		+1.6 / -0.6					+1.6 / -0.6					
Standard table		---					---					
Correction		---					---					
Summand		---					---					
Corrected Glare Indices referring to 190lm Total Luminous Flux												



DIMENSIONS



AWARDS



Name	SHOT LIGHT IP54 CRI 90 38° 2700K R
Reference	A2680220R
Color	Red
RAL	2004
Category	CEILING RECESSED

PRODUCT

Light source	LED
Gross luminous flux	190 Lm
Power	2,1 W
Power values of the system	3,23 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 3
Light beam angle	38°
Lighting efficiency	86%
Efficacy	90 Lm/W
Current intensity	700 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included - Connected
Emergency power supply	Please Consult
Electrical insulation class	□
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A++
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


Ingress Protection	IP54
Recess measurements	Ø38 mm.
Weight	100 g.
Packaged weight	120 g.
Packaging dimensions	77 × 70 × 53 mm
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene / Polycarbonate

OTHER DATA




A luminary conceived to be a small, discreet point of light in the ceiling that hides the illumination source from sight and aims to offer maximum visual comfort. In order to achieve this, it has an anti-glare screen and a specifically designed micro-reflector that generates a perfectly defined light beam.

POLAR DIAGRAM

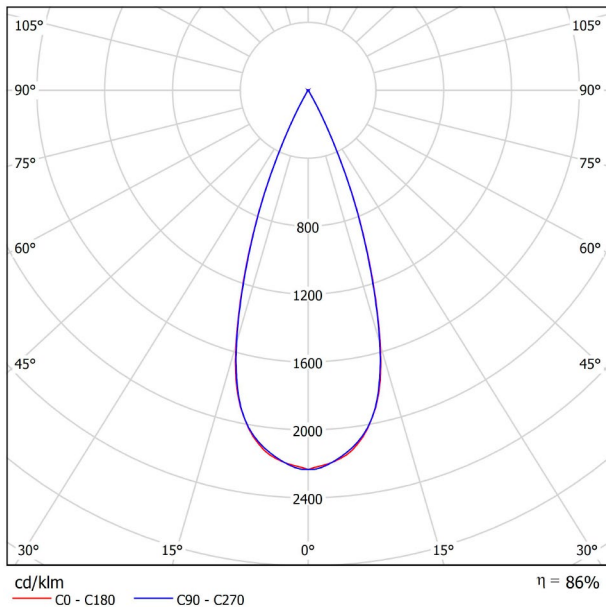

CONICAL DIAGRAM

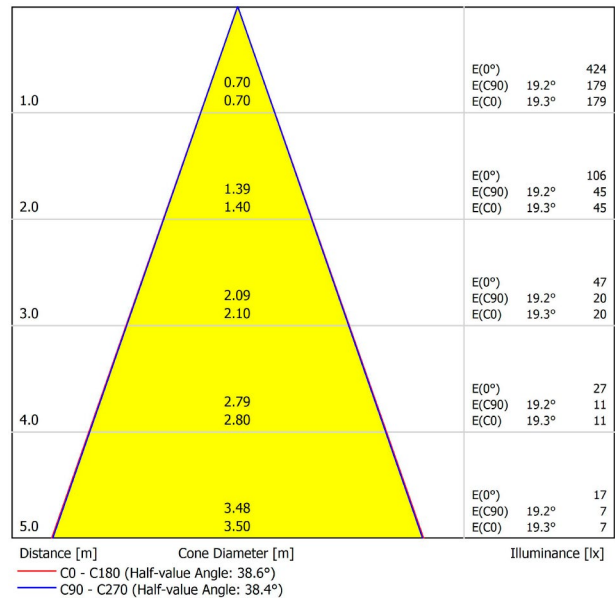


UGR

Glare Evaluation According to UGR												
ρ Ceiling		70	70	50	50	30	70	70	50	50	30	
ρ Walls		50	30	50	30	30	50	30	50	30	30	
ρ Floor		20	20	20	20	20	20	20	20	20	20	
Room Size X Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis					
2H	2H	-5.1	-4.5	-4.9	-4.3	-4.1	-4.9	-4.3	-4.7	-4.1	-3.9	
	3H	-1.3	-0.7	-1.0	-0.5	-0.3	-1.5	-0.9	-1.2	-0.7	-0.4	
	4H	0.5	1.0	0.8	1.3	1.5	0.6	1.2	0.9	1.4	1.7	
	6H	2.6	3.1	2.9	3.4	3.7	2.9	3.4	3.2	3.7	4.0	
	8H	3.9	4.4	4.3	4.7	5.0	4.1	4.6	4.4	4.9	5.2	
4H	12H	5.3	5.7	5.6	6.0	6.4	5.4	5.9	5.8	6.2	6.5	
	2H	-4.0	-3.4	-3.7	-3.2	-2.9	-3.8	-3.3	-3.5	-3.0	-2.8	
	3H	-0.1	0.4	0.2	0.7	1.0	-0.1	0.4	0.3	0.7	1.0	
	4H	1.9	2.3	2.3	2.7	3.0	2.1	2.5	2.5	2.9	3.2	
	6H	4.3	4.6	4.7	5.0	5.3	4.6	4.9	5.0	5.3	5.7	
8H	8H	5.7	6.0	6.1	6.4	6.8	5.9	6.1	6.3	6.5	6.9	
	12H	7.1	7.4	7.6	7.8	8.2	7.3	7.6	7.7	8.0	8.4	
	4H	2.9	3.2	3.3	3.6	4.0	3.1	3.3	3.5	3.7	4.1	
	6H	5.5	5.7	5.9	6.1	6.6	5.7	5.9	6.1	6.3	6.8	
	8H	7.0	7.2	7.5	7.6	8.1	7.1	7.3	7.6	7.7	8.2	
12H	12H	8.7	8.8	9.2	9.3	9.8	8.8	8.9	9.3	9.4	9.9	
	4H	3.2	3.4	3.6	3.8	4.3	3.3	3.6	3.7	4.0	4.4	
	6H	5.8	6.0	6.3	6.4	6.9	6.0	6.2	6.5	6.6	7.1	
	8H	7.5	7.6	8.0	8.1	8.6	7.6	7.7	8.1	8.2	8.7	
	Variation of the observer position for the luminaire distances S											
S = 1.0H		+0.4 / -0.2					+0.4 / -0.2					
S = 1.5H		+0.9 / -0.5					+0.9 / -0.4					
S = 2.0H		+1.6 / -0.6					+1.6 / -0.6					
Standard table		---					---					
Correction Summand		---					---					
Corrected Glare Indices referring to 190lm Total Luminous Flux												



DIMENSIONS



AWARDS



Name	SHOT LIGHT IP54 CRI 90 38° 2700K W
Reference	A2680220W
Color	White
RAL	Colour in the mass looks alike RAL 9016
Category	CEILING RECESSED

PRODUCT

Light source	LED
Gross luminous flux	190 Lm
Power	2,1 W
Power values of the system	3,23 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 3
Light beam angle	38°
Lighting efficiency	86%
Efficacy	90 Lm/W
Current intensity	700 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included - Connected
Emergency power supply	Please Consult
Electrical insulation class	□
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A++
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


Ingress Protection	IP54
Recess measurements	Ø38 mm.
Weight	100 g.
Packaged weight	120 g.
Packaging dimensions	77 × 70 × 53 mm
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene / Polycarbonate

OTHER DATA




A luminary conceived to be a small, discreet point of light in the ceiling that hides the illumination source from sight and aims to offer maximum visual comfort. In order to achieve this, it has an anti-glare screen and a specifically designed micro-reflector that generates a perfectly defined light beam.

POLAR DIAGRAM

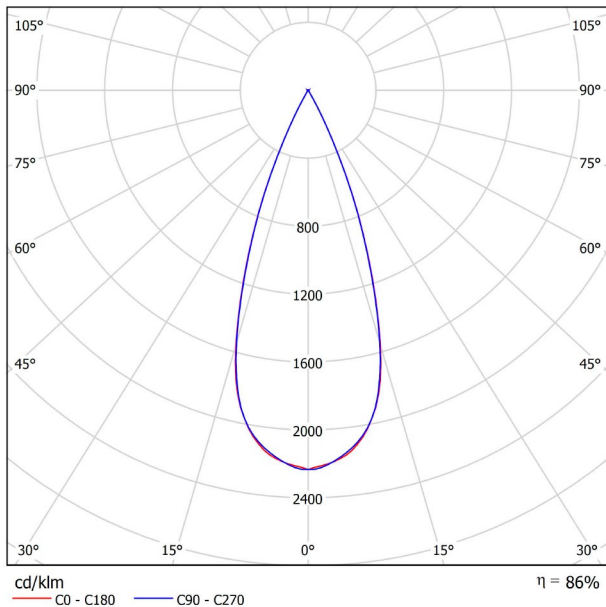

CONICAL DIAGRAM

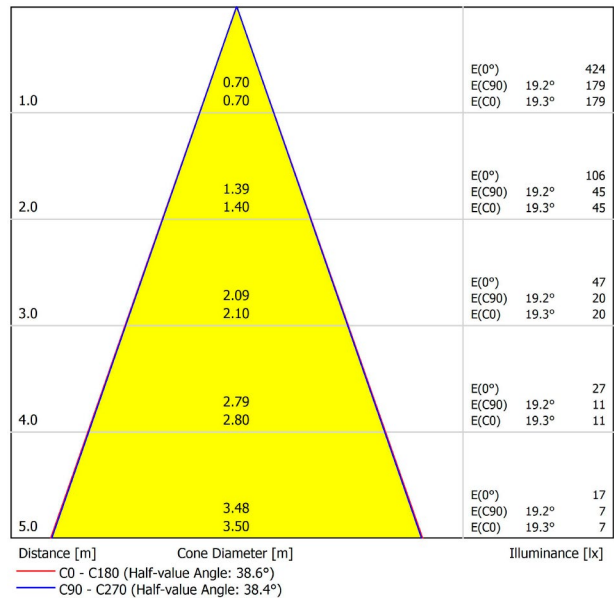


UGR

Glare Evaluation According to UGR												
ρ Ceiling		70	70	50	50	30	70	70	50	50	30	
ρ Walls		50	30	50	30	30	50	30	50	30	30	
ρ Floor		20	20	20	20	20	20	20	20	20	20	
Room Size X Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis					
2H	2H	-5.1	-4.5	-4.9	-4.3	-4.1	-4.9	-4.3	-4.7	-4.1	-3.9	
	3H	-1.3	-0.7	-1.0	-0.5	-0.3	-1.5	-0.9	-1.2	-0.7	-0.4	
	4H	0.5	1.0	0.8	1.3	1.5	0.6	1.2	0.9	1.4	1.7	
	6H	2.6	3.1	2.9	3.4	3.7	2.9	3.4	3.2	3.7	4.0	
	8H	3.9	4.4	4.3	4.7	5.0	4.1	4.6	4.4	4.9	5.2	
4H	12H	5.3	5.7	5.6	6.0	6.4	5.4	5.9	5.8	6.2	6.5	
	2H	-4.0	-3.4	-3.7	-3.2	-2.9	-3.8	-3.3	-3.5	-3.0	-2.8	
	3H	-0.1	0.4	0.2	0.7	1.0	-0.1	0.4	0.3	0.7	1.0	
	4H	1.9	2.3	2.3	2.7	3.0	2.1	2.5	2.5	2.9	3.2	
	6H	4.3	4.6	4.7	5.0	5.3	4.6	4.9	5.0	5.3	5.7	
8H	8H	5.7	6.0	6.1	6.4	6.8	5.9	6.1	6.3	6.5	6.9	
	12H	7.1	7.4	7.6	7.8	8.2	7.3	7.6	7.7	8.0	8.4	
	4H	2.9	3.2	3.3	3.6	4.0	3.1	3.3	3.5	3.7	4.1	
	6H	5.5	5.7	5.9	6.1	6.6	5.7	5.9	6.1	6.3	6.8	
	8H	7.0	7.2	7.5	7.6	8.1	7.1	7.3	7.6	7.7	8.2	
12H	12H	8.7	8.8	9.2	9.3	9.8	8.8	8.9	9.3	9.4	9.9	
	4H	3.2	3.4	3.6	3.8	4.3	3.3	3.6	3.7	4.0	4.4	
	6H	5.8	6.0	6.3	6.4	6.9	6.0	6.2	6.5	6.6	7.1	
	8H	7.5	7.6	8.0	8.1	8.6	7.6	7.7	8.1	8.2	8.7	
	Variation of the observer position for the luminaire distances S											
S = 1.0H		+0.4 / -0.2					+0.4 / -0.2					
S = 1.5H		+0.9 / -0.5					+0.9 / -0.4					
S = 2.0H		+1.6 / -0.6					+1.6 / -0.6					
Standard table		---					---					
Correction Summand		---					---					
Corrected Glare Indices referring to 190lm Total Luminous Flux												



DIMENSIONS



AWARDS



Name	SHOT LIGHT IP54 CRI 90 38° 2700K WMG
Reference	A2680220WMG
Color	White-Metallized gold
RAL	Metallic finish
Category	CEILING RECESSED

PRODUCT

Light source	LED
Gross luminous flux	190 Lm
Power	2,1 W
Power values of the system	3,23 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 3
Light beam angle	38°
Lighting efficiency	86%
Efficacy	90 Lm/W
Current intensity	700 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included - Connected
Emergency power supply	Please Consult
Electrical insulation class	□
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A++
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


Ingress Protection	IP54
Recess measurements	Ø38 mm.
Weight	100 g.
Packaged weight	120 g.
Packaging dimensions	77 × 70 × 53 mm
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene / Polycarbonate

OTHER DATA




A luminary conceived to be a small, discreet point of light in the ceiling that hides the illumination source from sight and aims to offer maximum visual comfort. In order to achieve this, it has an anti-glare screen and a specifically designed micro-reflector that generates a perfectly defined light beam.

POLAR DIAGRAM

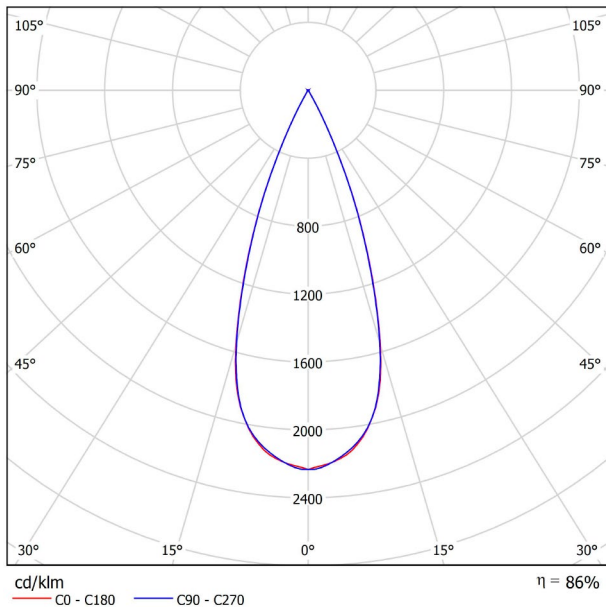

CONICAL DIAGRAM

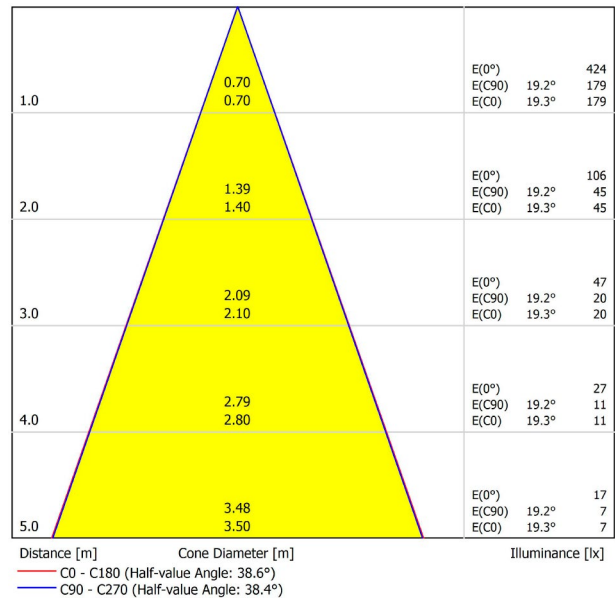


UGR

Glare Evaluation According to UGR												
ρ Ceiling		70	70	50	50	30	70	70	50	50	30	
ρ Walls		50	30	50	30	30	50	30	50	30	30	
ρ Floor		20	20	20	20	20	20	20	20	20	20	
Room Size X Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis					
2H	2H	-5.1	-4.5	-4.9	-4.3	-4.1	-4.9	-4.3	-4.7	-4.1	-3.9	
	3H	-1.3	-0.7	-1.0	-0.5	-0.3	-1.5	-0.9	-1.2	-0.7	-0.4	
	4H	0.5	1.0	0.8	1.3	1.5	0.6	1.2	0.9	1.4	1.7	
	6H	2.6	3.1	2.9	3.4	3.7	2.9	3.4	3.2	3.7	4.0	
	8H	3.9	4.4	4.3	4.7	5.0	4.1	4.6	4.4	4.9	5.2	
4H	12H	5.3	5.7	5.6	6.0	6.4	5.4	5.9	5.8	6.2	6.5	
	2H	-4.0	-3.4	-3.7	-3.2	-2.9	-3.8	-3.3	-3.5	-3.0	-2.8	
	3H	-0.1	0.4	0.2	0.7	1.0	-0.1	0.4	0.3	0.7	1.0	
	4H	1.9	2.3	2.3	2.7	3.0	2.1	2.5	2.5	2.9	3.2	
	6H	4.3	4.6	4.7	5.0	5.3	4.6	4.9	5.0	5.3	5.7	
8H	8H	5.7	6.0	6.1	6.4	6.8	5.9	6.1	6.3	6.5	6.9	
	12H	7.1	7.4	7.6	7.8	8.2	7.3	7.6	7.7	8.0	8.4	
	2H	2.9	3.2	3.3	3.6	4.0	3.1	3.3	3.5	3.7	4.1	
	6H	5.5	5.7	5.9	6.1	6.6	5.7	5.9	6.1	6.3	6.8	
	8H	7.0	7.2	7.5	7.6	8.1	7.1	7.3	7.6	7.7	8.2	
12H	8H	8.7	8.8	9.2	9.3	9.8	8.8	8.9	9.3	9.4	9.9	
	4H	3.2	3.4	3.6	3.8	4.3	3.3	3.6	3.7	4.0	4.4	
	6H	5.8	6.0	6.3	6.4	6.9	6.0	6.2	6.5	6.6	7.1	
	8H	7.5	7.6	8.0	8.1	8.6	7.6	7.7	8.1	8.2	8.7	
	Variation of the observer position for the luminaire distances S											
S = 1.0H		+0.4 / -0.2					+0.4 / -0.2					
S = 1.5H		+0.9 / -0.5					+0.9 / -0.4					
S = 2.0H		+1.6 / -0.6					+1.6 / -0.6					
Standard table		---					---					
Correction		---					---					
Summand		---					---					
Corrected Glare Indices referring to 190lm Total Luminous Flux												



DIMENSIONS



↑↑↑ IP54 / IP20

AWARDS



Name	SHOT LIGHT IP54 CRI 90 38° 2700K WN
Reference	A2680220WN
Color	White-Black
RAL	Colour in the mass looks alike RAL 9016 & 9005
Category	CEILING RECESSED

PRODUCT

Light source	LED
Gross luminous flux	190 Lm
Power	2,1 W
Power values of the system	3,23 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 3
Light beam angle	38°
Lighting efficiency	86%
Efficacy	90 Lm/W
Current intensity	700 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included - Connected
Emergency power supply	Please Consult
Electrical insulation class	□
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A++
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


Ingress Protection	IP54
Recess measurements	Ø38 mm.
Weight	100 g.
Packaged weight	120 g.
Packaging dimensions	77 × 70 × 53 mm
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene / Polycarbonate

OTHER DATA




A luminary conceived to be a small, discreet point of light in the ceiling that hides the illumination source from sight and aims to offer maximum visual comfort. In order to achieve this, it has an anti-glare screen and a specifically designed micro-reflector that generates a perfectly defined light beam.

POLAR DIAGRAM

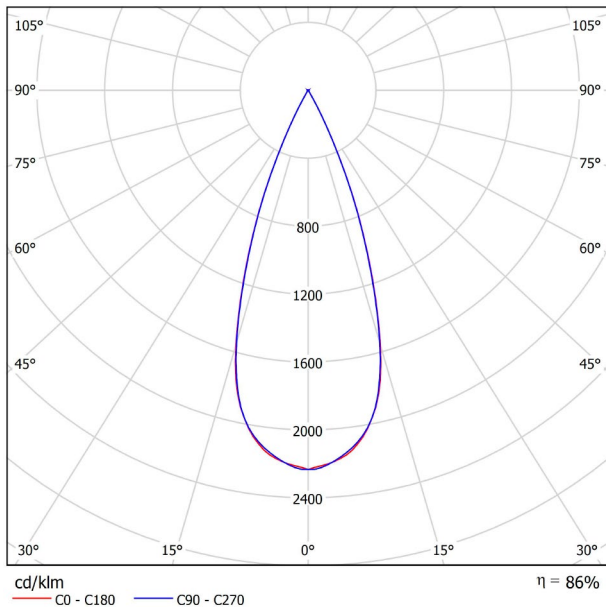

CONICAL DIAGRAM

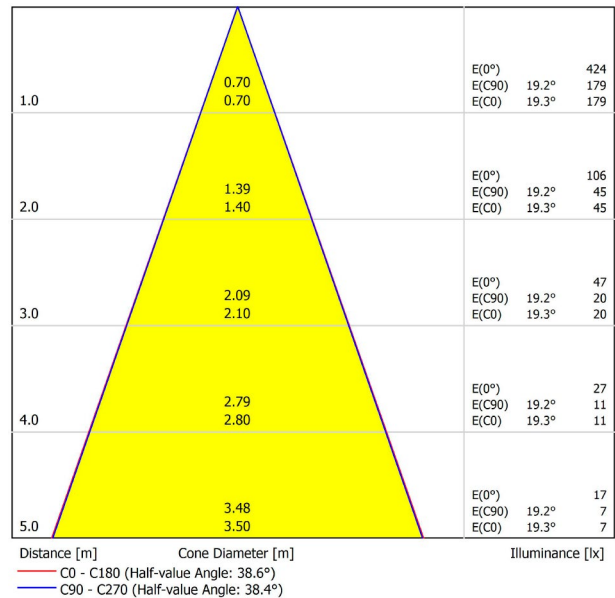


UGR

Glare Evaluation According to UGR												
ρ Ceiling		70	70	50	50	30	70	70	50	50	30	
ρ Walls		50	30	50	30	30	50	30	50	30	30	
ρ Floor		20	20	20	20	20	20	20	20	20	20	
Room Size X Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis					
2H	2H	-5.1	-4.5	-4.9	-4.3	-4.1	-4.9	-4.3	-4.7	-4.1	-3.9	
	3H	-1.3	-0.7	-1.0	-0.5	-0.3	-1.5	-0.9	-1.2	-0.7	-0.4	
	4H	0.5	1.0	0.8	1.3	1.5	0.6	1.2	0.9	1.4	1.7	
	6H	2.6	3.1	2.9	3.4	3.7	2.9	3.4	3.2	3.7	4.0	
	8H	3.9	4.4	4.3	4.7	5.0	4.1	4.6	4.4	4.9	5.2	
4H	12H	5.3	5.7	5.6	6.0	6.4	5.4	5.9	5.8	6.2	6.5	
	2H	-4.0	-3.4	-3.7	-3.2	-2.9	-3.8	-3.3	-3.5	-3.0	-2.8	
	3H	-0.1	0.4	0.2	0.7	1.0	-0.1	0.4	0.3	0.7	1.0	
	4H	1.9	2.3	2.3	2.7	3.0	2.1	2.5	2.5	2.9	3.2	
	6H	4.3	4.6	4.7	5.0	5.3	4.6	4.9	5.0	5.3	5.7	
8H	8H	5.7	6.0	6.1	6.4	6.8	5.9	6.1	6.3	6.5	6.9	
	12H	7.1	7.4	7.6	7.8	8.2	7.3	7.6	7.7	8.0	8.4	
	2H	2.9	3.2	3.3	3.6	4.0	3.1	3.3	3.5	3.7	4.1	
	6H	5.5	5.7	5.9	6.1	6.6	5.7	5.9	6.1	6.3	6.8	
	8H	7.0	7.2	7.5	7.6	8.1	7.1	7.3	7.6	7.7	8.2	
12H	8H	8.7	8.8	9.2	9.3	9.8	8.8	8.9	9.3	9.4	9.9	
	4H	3.2	3.4	3.6	3.8	4.3	3.3	3.6	3.7	4.0	4.4	
	6H	5.8	6.0	6.3	6.4	6.9	6.0	6.2	6.5	6.6	7.1	
	8H	7.5	7.6	8.0	8.1	8.6	7.6	7.7	8.1	8.2	8.7	
	Variation of the observer position for the luminaire distances S											
S = 1.0H		+0.4 / -0.2					+0.4 / -0.2					
S = 1.5H		+0.9 / -0.5					+0.9 / -0.4					
S = 2.0H		+1.6 / -0.6					+1.6 / -0.6					
Standard table		---					---					
Correction		---					---					
Summand		---					---					
Corrected Glare Indices referring to 190lm Total Luminous Flux												



DIMENSIONS



AWARDS



Name	SHOT LIGHT IP54 CRI 90 38° 2700K Z
Reference	A2680220Z
Color	Aluminium
RAL	9006
Category	CEILING RECESSED

PRODUCT

Light source	LED
Gross luminous flux	190 Lm
Power	2,1 W
Power values of the system	3,23 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 3
Light beam angle	38°
Lighting efficiency	86%
Efficacy	90 Lm/W
Current intensity	700 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included - Connected
Emergency power supply	Please Consult
Electrical insulation class	□
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A++
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


Ingress Protection	IP54
Recess measurements	Ø38 mm.
Weight	100 g.
Packaged weight	120 g.
Packaging dimensions	77 × 70 × 53 mm
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene / Polycarbonate

OTHER DATA




A luminary conceived to be a small, discreet point of light in the ceiling that hides the illumination source from sight and aims to offer maximum visual comfort. In order to achieve this, it has an anti-glare screen and a specifically designed micro-reflector that generates a perfectly defined light beam.

POLAR DIAGRAM

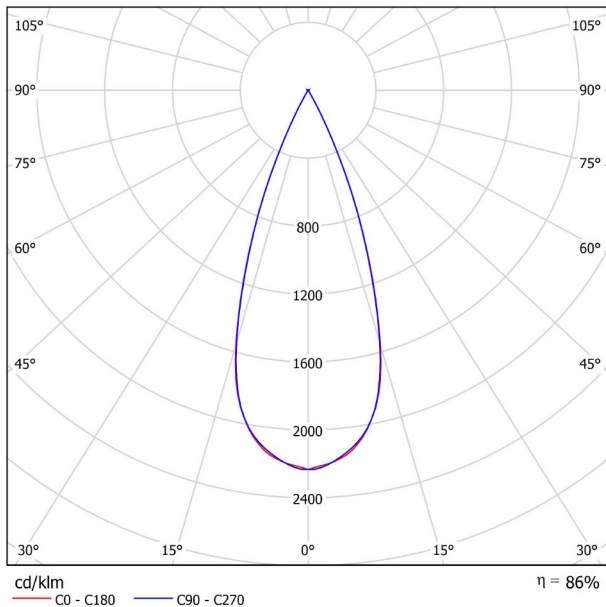

CONICAL DIAGRAM

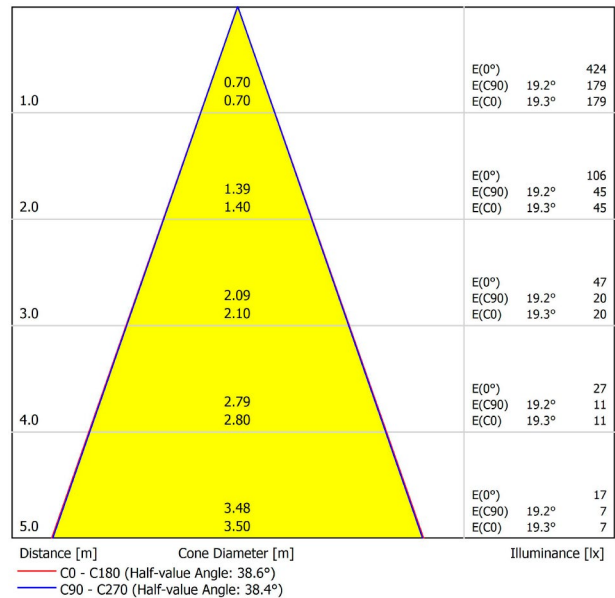


UGR

Glare Evaluation According to UGR												
ρ Ceiling		70	70	50	50	30	70	70	50	50	30	
ρ Walls		50	30	50	30	30	50	30	50	30	30	
ρ Floor		20	20	20	20	20	20	20	20	20	20	
Room Size X Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis					
2H	2H	-5.1	-4.5	-4.9	-4.3	-4.1	-4.9	-4.3	-4.7	-4.1	-3.9	
	3H	-1.3	-0.7	-1.0	-0.5	-0.3	-1.5	-0.9	-1.2	-0.7	-0.4	
	4H	0.5	1.0	0.8	1.3	1.5	0.6	1.2	0.9	1.4	1.7	
	6H	2.6	3.1	2.9	3.4	3.7	2.9	3.4	3.2	3.7	4.0	
	8H	3.9	4.4	4.3	4.7	5.0	4.1	4.6	4.4	4.9	5.2	
4H	12H	5.3	5.7	5.6	6.0	6.4	5.4	5.9	5.8	6.2	6.5	
	2H	-4.0	-3.4	-3.7	-3.2	-2.9	-3.8	-3.3	-3.5	-3.0	-2.8	
	3H	-0.1	0.4	0.2	0.7	1.0	-0.1	0.4	0.3	0.7	1.0	
	4H	1.9	2.3	2.3	2.7	3.0	2.1	2.5	2.5	2.9	3.2	
	6H	4.3	4.6	4.7	5.0	5.3	4.6	4.9	5.0	5.3	5.7	
8H	8H	5.7	6.0	6.1	6.4	6.8	5.9	6.1	6.3	6.5	6.9	
	12H	7.1	7.4	7.6	7.8	8.2	7.3	7.6	7.7	8.0	8.4	
	2H	2.9	3.2	3.3	3.6	4.0	3.1	3.3	3.5	3.7	4.1	
	6H	5.5	5.7	5.9	6.1	6.6	5.7	5.9	6.1	6.3	6.8	
	8H	7.0	7.2	7.5	7.6	8.1	7.1	7.3	7.6	7.7	8.2	
12H	12H	8.7	8.8	9.2	9.3	9.8	8.8	8.9	9.3	9.4	9.9	
	4H	3.2	3.4	3.6	3.8	4.3	3.3	3.6	3.7	4.0	4.4	
	6H	5.8	6.0	6.3	6.4	6.9	6.0	6.2	6.5	6.6	7.1	
	8H	7.5	7.6	8.0	8.1	8.6	7.6	7.7	8.1	8.2	8.7	
	Variation of the observer position for the luminaire distances S											
S = 1.0H		+0.4 / -0.2					+0.4 / -0.2					
S = 1.5H		+0.9 / -0.5					+0.9 / -0.4					
S = 2.0H		+1.6 / -0.6					+1.6 / -0.6					
Standard table		---					---					
Correction		---					---					
Summand		---					---					
Corrected Glare Indices referring to 190lm Total Luminous Flux												



DIMENSIONS



↑ ↑ ↑ IP54 / IP20

AWARDS




PRODUCT	
Name	SHOT LIGHT IP54 CRI 90 38° 3000K G
Reference	A2680221G
Color	Gold
RAL	1036
Category	CEILING RECESSED
LIGHTING INFORMATION	
Light source	LED
Gross luminous flux	210 Lm
Power	2,1 W
Power values of the system	3,23 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 3
Light beam angle	38°
Lighting efficiency	86%
Efficacy	100 Lm/W
Current intensity	700 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included - Connected
Emergency power supply	Please Consult
Electrical insulation class	□
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A++
LED lifespan	L80B10 (Tc=85°C) >60.000h
OTHER DATA	
Ingress Protection	IP54
Recess measurements	Ø38 mm.
Weight	100 g.
Packaged weight	120 g.
Packaging dimensions	77 × 70 × 53 mm
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene / Polycarbonate




A luminary conceived to be a small, discreet point of light in the ceiling that hides the illumination source from sight and aims to offer maximum visual comfort. In order to achieve this, it has an anti-glare screen and a specifically designed micro-reflector that generates a perfectly defined light beam.

POLAR DIAGRAM

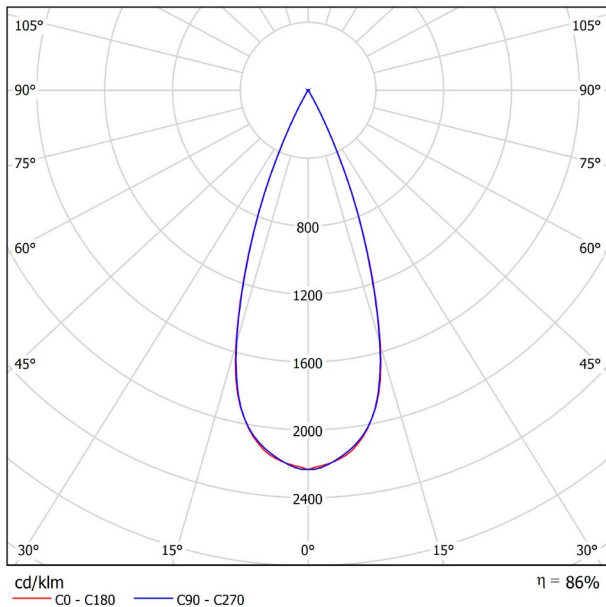

CONICAL DIAGRAM

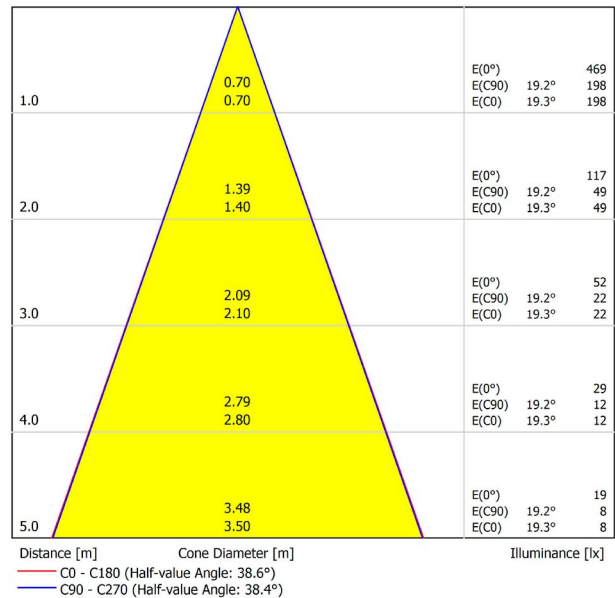


UGR

Glare Evaluation According to UGR													
ρ Ceiling		70	70	50	50	30	70	70	50	50	30		
ρ Walls		50	30	50	30	30	50	30	50	30	30		
ρ Floor		20	20	20	20	20	20	20	20	20	20		
Room Size X Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis						
2H	2H	-4.8	-4.1	-4.5	-3.9	-3.7	-4.6	-4.0	-4.4	-3.8	-3.6		
	3H	-1.0	-0.4	-0.7	-0.2	0.1	-1.1	-0.6	-0.9	-0.3	-0.1		
	4H	0.8	1.4	1.1	1.6	1.9	1.0	1.5	1.3	1.8	2.0		
	6H	3.0	3.5	3.3	3.8	4.0	3.3	3.8	3.6	4.1	4.3		
	8H	4.3	4.8	4.6	5.1	5.4	4.4	4.9	4.8	5.2	5.5		
12H	12H	5.6	6.1	6.0	6.4	6.7	5.8	6.2	6.1	6.5	6.9		
	4H	2H	-3.6	-3.1	-3.3	-2.8	-2.6	-3.5	-2.9	-3.2	-2.7	-2.4	
		3H	0.2	0.7	0.6	1.0	1.3	0.3	0.7	0.6	1.0	1.3	
		4H	2.3	2.7	2.7	3.0	3.4	2.5	2.9	2.9	3.2	3.6	
		6H	4.6	4.9	5.0	5.3	5.7	4.9	5.3	5.3	5.6	6.0	
8H		6.0	6.3	6.4	6.7	7.1	6.2	6.5	6.6	6.9	7.3		
12H	12H	7.5	7.7	7.9	8.1	8.6	7.7	7.9	8.1	8.3	8.7		
	8H	4H	3.3	3.6	3.7	3.9	4.3	3.4	3.7	3.8	4.1	4.5	
		6H	5.8	6.0	6.3	6.5	6.9	6.0	6.3	6.5	6.7	7.1	
		8H	7.4	7.5	7.8	8.0	8.5	7.5	7.7	7.9	8.1	8.6	
		12H	9.0	9.2	9.5	9.6	10.1	9.1	9.3	9.6	9.7	10.2	
12H	4H	3.5	3.8	4.0	4.2	4.6	3.7	3.9	4.1	4.3	4.7		
	6H	6.2	6.4	6.6	6.8	7.3	6.4	6.5	6.8	7.0	7.5		
	8H	7.8	8.0	8.3	8.4	8.9	7.9	8.1	8.4	8.5	9.0		
Variation of the observer position for the luminaire distances S													
S = 1.0H		+0.4 / -0.2					+0.4 / -0.2						
S = 1.5H		+0.9 / -0.5					+0.9 / -0.4						
S = 2.0H		+1.6 / -0.6					+1.6 / -0.6						
Standard table		---					---						
Correction		---					---						
Summand		---					---						
Corrected Glare Indices referring to 210lm Total Luminous Flux													



DIMENSIONS



↑↑↑ IP54 / IP20

AWARDS



Name	SHOT LIGHT IP54 CRI 90 38° 3000K N
Reference	A2680221N
Color	Black
RAL	Colour in the mass looks alike RAL 9005
Category	CEILING RECESSED

PRODUCT

Light source	LED
Gross luminous flux	210 Lm
Power	2,1 W
Power values of the system	3,23 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 3
Light beam angle	38°
Lighting efficiency	86%
Efficacy	100 Lm/W
Current intensity	700 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included - Connected
Emergency power supply	Please Consult
Electrical insulation class	□
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A++
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


Ingress Protection	IP54
Recess measurements	Ø38 mm.
Weight	100 g.
Packaged weight	120 g.
Packaging dimensions	77 × 70 × 53 mm
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene / Polycarbonate

OTHER DATA




A luminary conceived to be a small, discreet point of light in the ceiling that hides the illumination source from sight and aims to offer maximum visual comfort. In order to achieve this, it has an anti-glare screen and a specifically designed micro-reflector that generates a perfectly defined light beam.

POLAR DIAGRAM

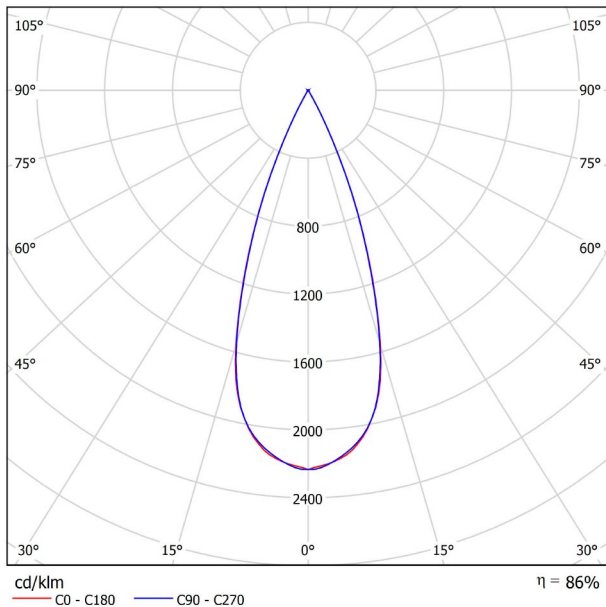

CONICAL DIAGRAM

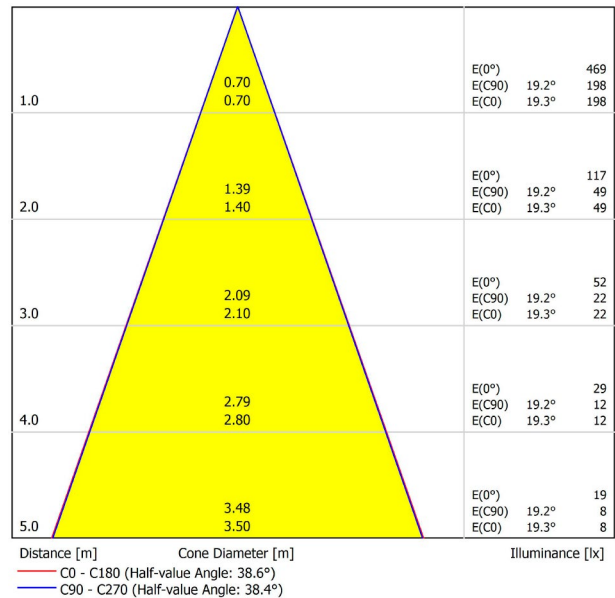


UGR

Glare Evaluation According to UGR													
ρ Ceiling		70	70	50	50	30	70	70	50	50	30		
ρ Walls		50	30	50	30	30	50	30	50	30	30		
ρ Floor		20	20	20	20	20	20	20	20	20	20		
Room Size X Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis						
2H	2H	-4.8	-4.1	-4.5	-3.9	-3.7	-4.6	-4.0	-4.4	-3.8	-3.6		
	3H	-1.0	-0.4	-0.7	-0.2	0.1	-1.1	-0.6	-0.9	-0.3	-0.1		
	4H	0.8	1.4	1.1	1.6	1.9	1.0	1.5	1.3	1.8	2.0		
	6H	3.0	3.5	3.3	3.8	4.0	3.3	3.8	3.6	4.1	4.3		
	8H	4.3	4.8	4.6	5.1	5.4	4.4	4.9	4.8	5.2	5.5		
12H	12H	5.6	6.1	6.0	6.4	6.7	5.8	6.2	6.1	6.5	6.9		
	4H	2H	-3.6	-3.1	-3.3	-2.8	-2.6	-3.5	-2.9	-3.2	-2.7	-2.4	
		3H	0.2	0.7	0.6	1.0	1.3	0.3	0.7	0.6	1.0	1.3	
		4H	2.3	2.7	2.7	3.0	3.4	2.5	2.9	2.9	3.2	3.6	
		6H	4.6	4.9	5.0	5.3	5.7	4.9	5.3	5.3	5.6	6.0	
8H		6.0	6.3	6.4	6.7	7.1	6.2	6.5	6.6	6.9	7.3		
12H	12H	7.5	7.7	7.9	8.1	8.6	7.7	7.9	8.1	8.3	8.7		
	8H	4H	3.3	3.6	3.7	3.9	4.3	3.4	3.7	3.8	4.1	4.5	
		6H	5.8	6.0	6.3	6.5	6.9	6.0	6.3	6.5	6.7	7.1	
		8H	7.4	7.5	7.8	8.0	8.5	7.5	7.7	7.9	8.1	8.6	
		12H	9.0	9.2	9.5	9.6	10.1	9.1	9.3	9.6	9.7	10.2	
12H	4H	3.5	3.8	4.0	4.2	4.6	3.7	3.9	4.1	4.3	4.7		
	6H	6.2	6.4	6.6	6.8	7.3	6.4	6.5	6.8	7.0	7.5		
	8H	7.8	8.0	8.3	8.4	8.9	7.9	8.1	8.4	8.5	9.0		
Variation of the observer position for the luminaire distances S													
S = 1.0H		+0.4 / -0.2					+0.4 / -0.2						
S = 1.5H		+0.9 / -0.5					+0.9 / -0.4						
S = 2.0H		+1.6 / -0.6					+1.6 / -0.6						
Standard table		---					---						
Correction		---					---						
Summand		---					---						
Corrected Glare Indices referring to 210lm Total Luminous Flux													



DIMENSIONS



↑↑↑ IP54 / IP20

AWARDS



Name	SHOT LIGHT IP54 CRI 90 38° 3000K NMG
Reference	A2680221NMG
Color	Black-Metallized gold
RAL	Metallic finish
Category	CEILING RECESSED

PRODUCT

Light source	LED
Gross luminous flux	210 Lm
Power	2,1 W
Power values of the system	3,23 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 3
Light beam angle	38°
Lighting efficiency	86%
Efficacy	100 Lm/W
Current intensity	700 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included - Connected
Emergency power supply	Please Consult
Electrical insulation class	□
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A++
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


OTHER DATA

Ingress Protection	IP54
Recess measurements	Ø38 mm.
Weight	100 g.
Packaged weight	120 g.
Packaging dimensions	77 × 70 × 53 mm
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene / Polycarbonate




A luminary conceived to be a small, discreet point of light in the ceiling that hides the illumination source from sight and aims to offer maximum visual comfort. In order to achieve this, it has an anti-glare screen and a specifically designed micro-reflector that generates a perfectly defined light beam.

POLAR DIAGRAM

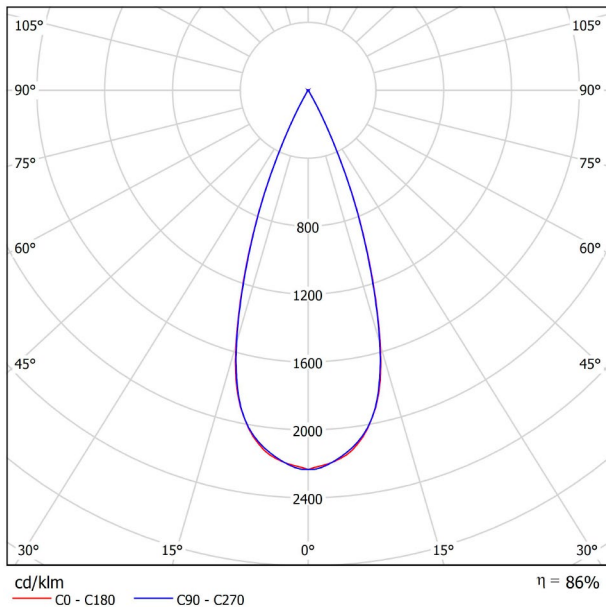

CONICAL DIAGRAM

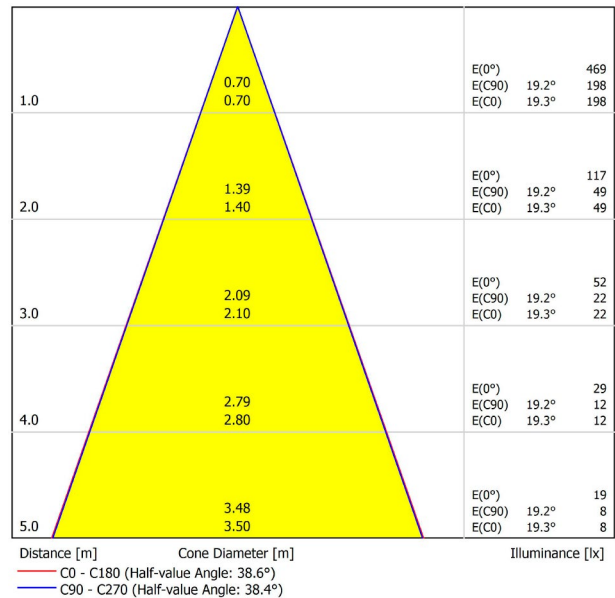


UGR

Glare Evaluation According to UGR												
ρ Ceiling		70	70	50	50	30	70	70	50	50	30	
ρ Walls		50	30	50	30	30	50	30	50	30	30	
ρ Floor		20	20	20	20	20	20	20	20	20	20	
Room Size X Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis					
2H	2H	-4.8	-4.1	-4.5	-3.9	-3.7	-4.6	-4.0	-4.4	-3.8	-3.6	
	3H	-1.0	-0.4	-0.7	-0.2	0.1	-1.1	-0.6	-0.9	-0.3	-0.1	
	4H	0.8	1.4	1.1	1.6	1.9	1.0	1.5	1.3	1.8	2.0	
	6H	3.0	3.5	3.3	3.8	4.0	3.3	3.8	3.6	4.1	4.3	
	8H	4.3	4.8	4.6	5.1	5.4	4.4	4.9	4.8	5.2	5.5	
4H	12H	5.6	6.1	6.0	6.4	6.7	5.8	6.2	6.1	6.5	6.9	
	2H	-3.6	-3.1	-3.3	-2.8	-2.6	-3.5	-2.9	-3.2	-2.7	-2.4	
	3H	0.2	0.7	0.6	1.0	1.3	0.3	0.7	0.6	1.0	1.3	
	4H	2.3	2.7	2.7	3.0	3.4	2.5	2.9	2.9	3.2	3.6	
	6H	4.6	4.9	5.0	5.3	5.7	4.9	5.3	5.3	5.6	6.0	
8H	8H	6.0	6.3	6.4	6.7	7.1	6.2	6.5	6.6	6.9	7.3	
	12H	7.5	7.7	7.9	8.1	8.6	7.7	7.9	8.1	8.3	8.7	
	4H	3.3	3.6	3.7	3.9	4.3	3.4	3.7	3.8	4.1	4.5	
	6H	5.8	6.0	6.3	6.5	6.9	6.0	6.3	6.5	6.7	7.1	
	8H	7.4	7.5	7.8	8.0	8.5	7.5	7.7	7.9	8.1	8.6	
12H	12H	9.0	9.2	9.5	9.6	10.1	9.1	9.3	9.6	9.7	10.2	
	4H	3.5	3.8	4.0	4.2	4.6	3.7	3.9	4.1	4.3	4.7	
	6H	6.2	6.4	6.6	6.8	7.3	6.4	6.5	6.8	7.0	7.5	
	8H	7.8	8.0	8.3	8.4	8.9	7.9	8.1	8.4	8.5	9.0	
	Variation of the observer position for the luminaire distances S											
S = 1.0H		+0.4 / -0.2					+0.4 / -0.2					
S = 1.5H		+0.9 / -0.5					+0.9 / -0.4					
S = 2.0H		+1.6 / -0.6					+1.6 / -0.6					
Standard table		---					---					
Correction		---					---					
Summand		---					---					
Corrected Glare Indices referring to 210lm Total Luminous Flux												



DIMENSIONS



AWARDS



Name	SHOT LIGHT IP54 CRI 90 38° 3000K R
Reference	A2680221R
Color	Red
RAL	2004
Category	CEILING RECESSED

PRODUCT

Light source	LED
Gross luminous flux	210 Lm
Power	2,1 W
Power values of the system	3,23 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 3
Light beam angle	38°
Lighting efficiency	86%
Efficacy	100 Lm/W
Current intensity	700 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included - Connected
Emergency power supply	Please Consult
Electrical insulation class	□
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A++
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


Ingress Protection	IP54
Recess measurements	Ø38 mm.
Weight	100 g.
Packaged weight	120 g.
Packaging dimensions	77 × 70 × 53 mm
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene / Polycarbonate

OTHER DATA




A luminary conceived to be a small, discreet point of light in the ceiling that hides the illumination source from sight and aims to offer maximum visual comfort. In order to achieve this, it has an anti-glare screen and a specifically designed micro-reflector that generates a perfectly defined light beam.

POLAR DIAGRAM

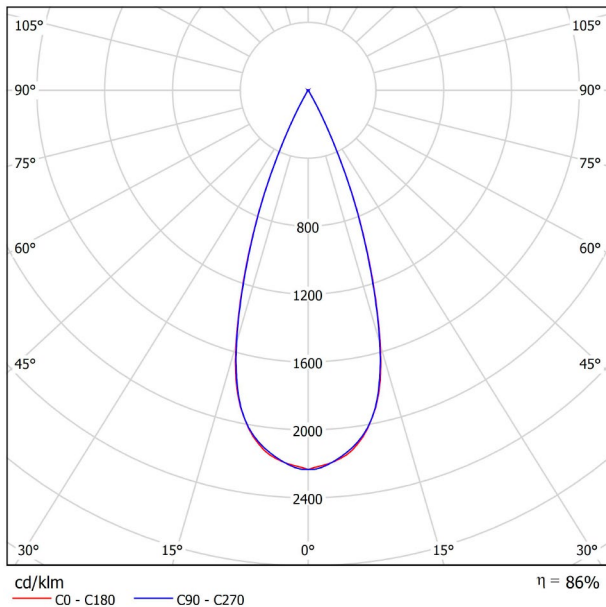

CONICAL DIAGRAM

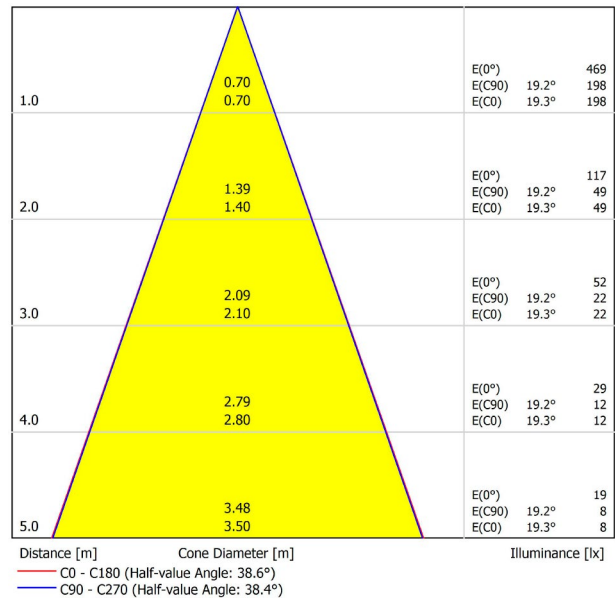


UGR

Glare Evaluation According to UGR													
ρ Ceiling		70	70	50	50	30	70	70	50	50	30		
ρ Walls		50	30	50	30	30	50	30	50	30	30		
ρ Floor		20	20	20	20	20	20	20	20	20	20		
Room Size X Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis						
2H	2H	-4.8	-4.1	-4.5	-3.9	-3.7	-4.6	-4.0	-4.4	-3.8	-3.6		
	3H	-1.0	-0.4	-0.7	-0.2	0.1	-1.1	-0.6	-0.9	-0.3	-0.1		
	4H	0.8	1.4	1.1	1.6	1.9	1.0	1.5	1.3	1.8	2.0		
	6H	3.0	3.5	3.3	3.8	4.0	3.3	3.8	3.6	4.1	4.3		
	8H	4.3	4.8	4.6	5.1	5.4	4.4	4.9	4.8	5.2	5.5		
12H	12H	5.6	6.1	6.0	6.4	6.7	5.8	6.2	6.1	6.5	6.9		
	4H	2H	-3.6	-3.1	-3.3	-2.8	-2.6	-3.5	-2.9	-3.2	-2.7	-2.4	
		3H	0.2	0.7	0.6	1.0	1.3	0.3	0.7	0.6	1.0	1.3	
		4H	2.3	2.7	2.7	3.0	3.4	2.5	2.9	2.9	3.2	3.6	
		6H	4.6	4.9	5.0	5.3	5.7	4.9	5.3	5.3	5.6	6.0	
8H		6.0	6.3	6.4	6.7	7.1	6.2	6.5	6.6	6.9	7.3		
12H	12H	7.5	7.7	7.9	8.1	8.6	7.7	7.9	8.1	8.3	8.7		
	8H	4H	3.3	3.6	3.7	3.9	4.3	3.4	3.7	3.8	4.1	4.5	
		6H	5.8	6.0	6.3	6.5	6.9	6.0	6.3	6.5	6.7	7.1	
		8H	7.4	7.5	7.8	8.0	8.5	7.5	7.7	7.9	8.1	8.6	
		12H	9.0	9.2	9.5	9.6	10.1	9.1	9.3	9.6	9.7	10.2	
12H	4H	3.5	3.8	4.0	4.2	4.6	3.7	3.9	4.1	4.3	4.7		
	6H	6.2	6.4	6.6	6.8	7.3	6.4	6.5	6.8	7.0	7.5		
	8H	7.8	8.0	8.3	8.4	8.9	7.9	8.1	8.4	8.5	9.0		
Variation of the observer position for the luminaire distances S													
S = 1.0H		+0.4 / -0.2					+0.4 / -0.2						
S = 1.5H		+0.9 / -0.5					+0.9 / -0.4						
S = 2.0H		+1.6 / -0.6					+1.6 / -0.6						
Standard table		---					---						
Correction		---					---						
Summand		---					---						
Corrected Glare Indices referring to 210lm Total Luminous Flux													



DIMENSIONS



↑↑↑ IP54 / IP20

AWARDS



Name	SHOT LIGHT IP54 CRI 90 38° 3000K W
Reference	A2680221W
Color	White
RAL	Colour in the mass looks alike RAL 9016
Category	CEILING RECESSED

PRODUCT

Light source	LED
Gross luminous flux	210 Lm
Power	2,1 W
Power values of the system	3,23 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 3
Light beam angle	38°
Lighting efficiency	86%
Efficacy	100 Lm/W
Current intensity	700 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included - Connected
Emergency power supply	Please Consult
Electrical insulation class	□
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A++
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


Ingress Protection	IP54
Recess measurements	Ø38 mm.
Weight	100 g.
Packaged weight	120 g.
Packaging dimensions	77 × 70 × 53 mm
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene / Polycarbonate

OTHER DATA




A luminary conceived to be a small, discreet point of light in the ceiling that hides the illumination source from sight and aims to offer maximum visual comfort. In order to achieve this, it has an anti-glare screen and a specifically designed micro-reflector that generates a perfectly defined light beam.

POLAR DIAGRAM

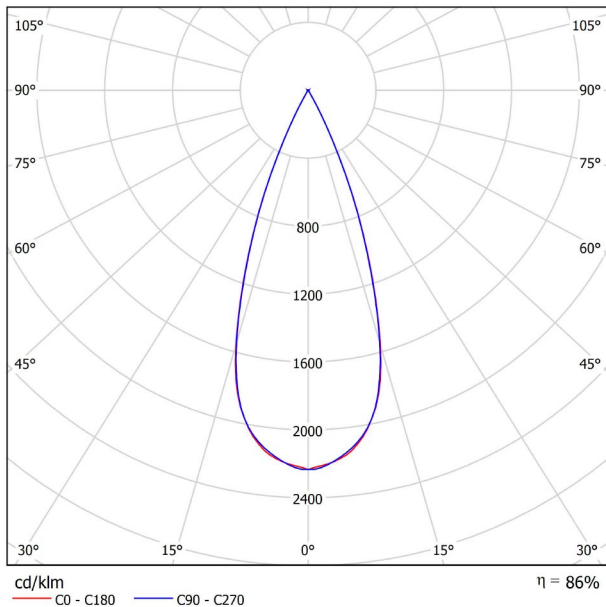

CONICAL DIAGRAM

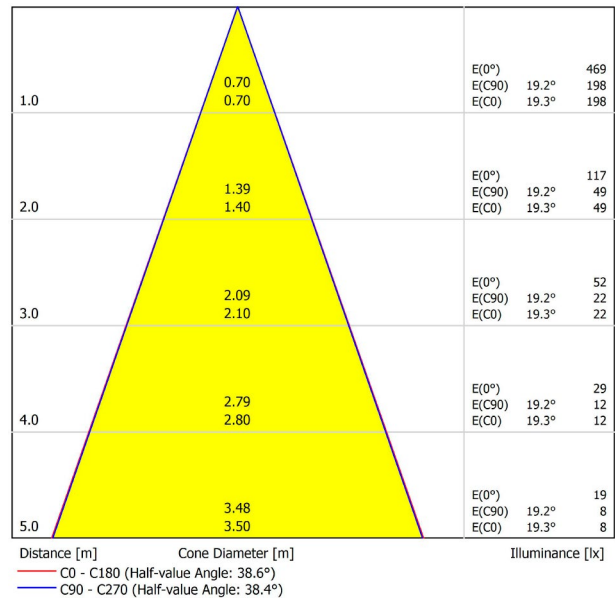


UGR

Glare Evaluation According to UGR													
ρ Ceiling		70	70	50	50	30	70	70	50	50	30		
ρ Walls		50	30	50	30	30	50	30	50	30	30		
ρ Floor		20	20	20	20	20	20	20	20	20	20		
Room Size X Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis						
2H	2H	-4.8	-4.1	-4.5	-3.9	-3.7	-4.6	-4.0	-4.4	-3.8	-3.6		
	3H	-1.0	-0.4	-0.7	-0.2	0.1	-1.1	-0.6	-0.9	-0.3	-0.1		
	4H	0.8	1.4	1.1	1.6	1.9	1.0	1.5	1.3	1.8	2.0		
	6H	3.0	3.5	3.3	3.8	4.0	3.3	3.8	3.6	4.1	4.3		
	8H	4.3	4.8	4.6	5.1	5.4	4.4	4.9	4.8	5.2	5.5		
12H	12H	5.6	6.1	6.0	6.4	6.7	5.8	6.2	6.1	6.5	6.9		
	4H	2H	-3.6	-3.1	-3.3	-2.8	-2.6	-3.5	-2.9	-3.2	-2.7	-2.4	
		3H	0.2	0.7	0.6	1.0	1.3	0.3	0.7	0.6	1.0	1.3	
		4H	2.3	2.7	2.7	3.0	3.4	2.5	2.9	2.9	3.2	3.6	
		6H	4.6	4.9	5.0	5.3	5.7	4.9	5.3	5.3	5.6	6.0	
8H		6.0	6.3	6.4	6.7	7.1	6.2	6.5	6.6	6.9	7.3		
12H	12H	7.5	7.7	7.9	8.1	8.6	7.7	7.9	8.1	8.3	8.7		
	8H	4H	3.3	3.6	3.7	3.9	4.3	3.4	3.7	3.8	4.1	4.5	
		6H	5.8	6.0	6.3	6.5	6.9	6.0	6.3	6.5	6.7	7.1	
		8H	7.4	7.5	7.8	8.0	8.5	7.5	7.7	7.9	8.1	8.6	
		12H	9.0	9.2	9.5	9.6	10.1	9.1	9.3	9.6	9.7	10.2	
12H	4H	3.5	3.8	4.0	4.2	4.6	3.7	3.9	4.1	4.3	4.7		
	6H	6.2	6.4	6.6	6.8	7.3	6.4	6.5	6.8	7.0	7.5		
	8H	7.8	8.0	8.3	8.4	8.9	7.9	8.1	8.4	8.5	9.0		
Variation of the observer position for the luminaire distances S													
S = 1.0H		+0.4 / -0.2					+0.4 / -0.2						
S = 1.5H		+0.9 / -0.5					+0.9 / -0.4						
S = 2.0H		+1.6 / -0.6					+1.6 / -0.6						
Standard table		---					---						
Correction		---					---						
Summand		---					---						
Corrected Glare Indices referring to 210lm Total Luminous Flux													



DIMENSIONS



↑↑↑ IP54 / IP20

AWARDS



Name	SHOT LIGHT IP54 CRI 90 38° 3000K WMG
Reference	A2680221WMG
Color	White-Metallized gold
RAL	Metallic finish
Category	CEILING RECESSED

PRODUCT

Light source	LED
Gross luminous flux	210 Lm
Power	2,1 W
Power values of the system	3,23 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 3
Light beam angle	38°
Lighting efficiency	86%
Efficacy	100 Lm/W
Current intensity	700 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included - Connected
Emergency power supply	Please Consult
Electrical insulation class	□
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A++
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


Ingress Protection	IP54
Recess measurements	Ø38 mm.
Weight	100 g.
Packaged weight	120 g.
Packaging dimensions	77 × 70 × 53 mm
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene / Polycarbonate

OTHER DATA




A luminary conceived to be a small, discreet point of light in the ceiling that hides the illumination source from sight and aims to offer maximum visual comfort. In order to achieve this, it has an anti-glare screen and a specifically designed micro-reflector that generates a perfectly defined light beam.

POLAR DIAGRAM

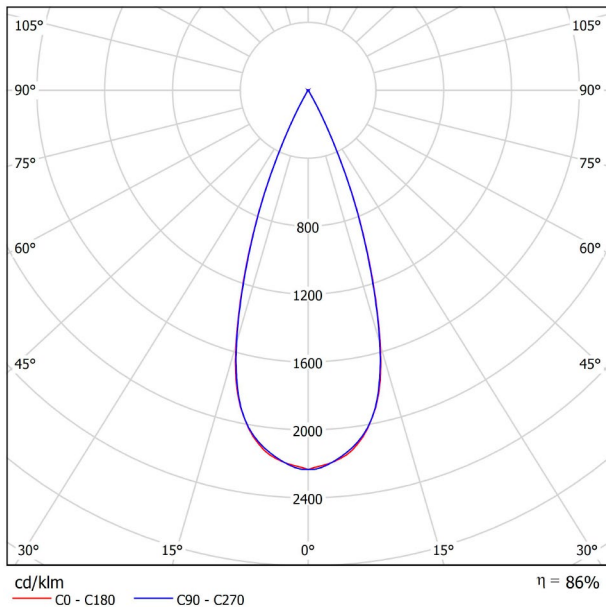

CONICAL DIAGRAM

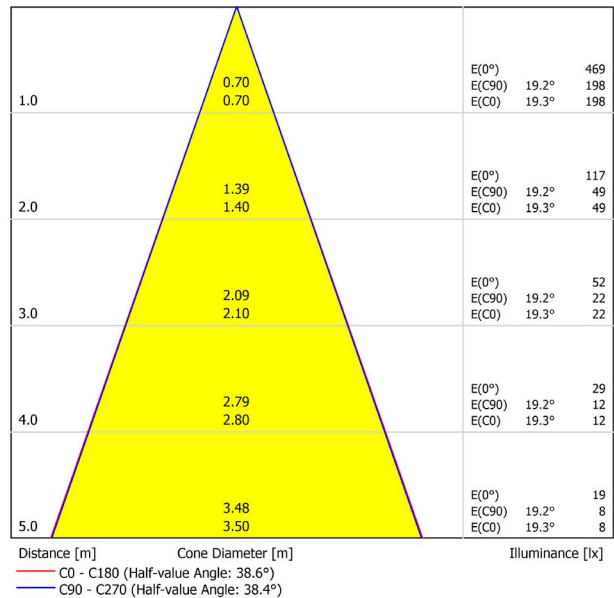


UGR

Glare Evaluation According to UGR												
p Ceiling		70	70	50	50	30	70	70	50	50	30	
p Walls		50	30	50	30	30	50	30	50	30	30	
p Floor		20	20	20	20	20	20	20	20	20	20	
Room Size X Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis					
2H	2H	-4.8	-4.1	-4.5	-3.9	-3.7	-4.6	-4.0	-4.4	-3.8	-3.6	
	3H	-1.0	-0.4	-0.7	-0.2	0.1	-1.1	-0.6	-0.9	-0.3	-0.1	
	4H	0.8	1.4	1.1	1.6	1.9	1.0	1.5	1.3	1.8	2.0	
	6H	3.0	3.5	3.3	3.8	4.0	3.3	3.8	3.6	4.1	4.3	
	8H	4.3	4.8	4.6	5.1	5.4	4.4	4.9	4.8	5.2	5.5	
12H	5.6	6.1	6.0	6.4	6.7	5.8	6.2	6.1	6.5	6.9		
4H	2H	-3.6	-3.1	-3.3	-2.8	-2.6	-3.5	-2.9	-3.2	-2.7	-2.4	
	3H	0.2	0.7	0.6	1.0	1.3	0.3	0.7	0.6	1.0	1.3	
	4H	2.3	2.7	2.7	3.0	3.4	2.5	2.9	2.9	3.2	3.6	
	6H	4.6	4.9	5.0	5.3	5.7	4.9	5.3	5.3	5.6	6.0	
	8H	6.0	6.3	6.4	6.7	7.1	6.2	6.5	6.6	6.9	7.3	
12H	7.5	7.7	7.9	8.1	8.6	7.7	7.9	8.1	8.3	8.7		
8H	4H	3.3	3.6	3.7	3.9	4.3	3.4	3.7	3.8	4.1	4.5	
	6H	5.8	6.0	6.3	6.5	6.9	6.0	6.3	6.5	6.7	7.1	
	8H	7.4	7.5	7.8	8.0	8.5	7.5	7.7	7.9	8.1	8.6	
	12H	9.0	9.2	9.5	9.6	10.1	9.1	9.3	9.6	9.7	10.2	
12H	4H	3.5	3.8	4.0	4.2	4.6	3.7	3.9	4.1	4.3	4.7	
	6H	6.2	6.4	6.6	6.8	7.3	6.4	6.5	6.8	7.0	7.5	
	8H	7.8	8.0	8.3	8.4	8.9	7.9	8.1	8.4	8.5	9.0	
Variation of the observer position for the luminaire distances S												
S = 1.0H		+0.4 / -0.2					+0.4 / -0.2					
S = 1.5H		+0.9 / -0.5					+0.9 / -0.4					
S = 2.0H		+1.6 / -0.6					+1.6 / -0.6					
Standard table		---					---					
Correction		---					---					
Summand												
Corrected Glare Indices referring to 210lm Total Luminous Flux												



DIMENSIONS



↑↑↑ IP54 / IP20

AWARDS



Name	SHOT LIGHT IP54 CRI 90 38° 3000K WN
Reference	A2680221WN
Color	White-Black
RAL	Colour in the mass looks alike RAL 9016 & 9005
Category	CEILING RECESSED

PRODUCT

Light source	LED
Gross luminous flux	210 Lm
Power	2,1 W
Power values of the system	3,23 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 3
Light beam angle	38°
Lighting efficiency	86%
Efficacy	100 Lm/W
Current intensity	700 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included - Connected
Emergency power supply	Please Consult
Electrical insulation class	□
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A++
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


Ingress Protection	IP54
Recess measurements	Ø38 mm.
Weight	100 g.
Packaged weight	120 g.
Packaging dimensions	77 × 70 × 53 mm
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene / Polycarbonate

OTHER DATA




A luminary conceived to be a small, discreet point of light in the ceiling that hides the illumination source from sight and aims to offer maximum visual comfort. In order to achieve this, it has an anti-glare screen and a specifically designed micro-reflector that generates a perfectly defined light beam.

POLAR DIAGRAM

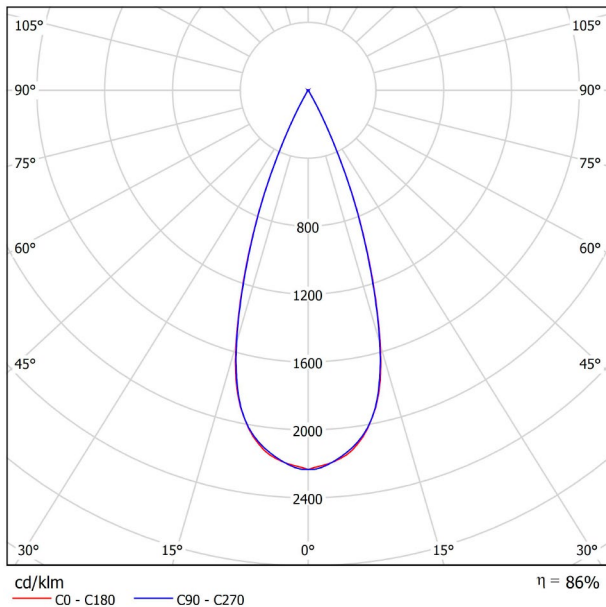

CONICAL DIAGRAM

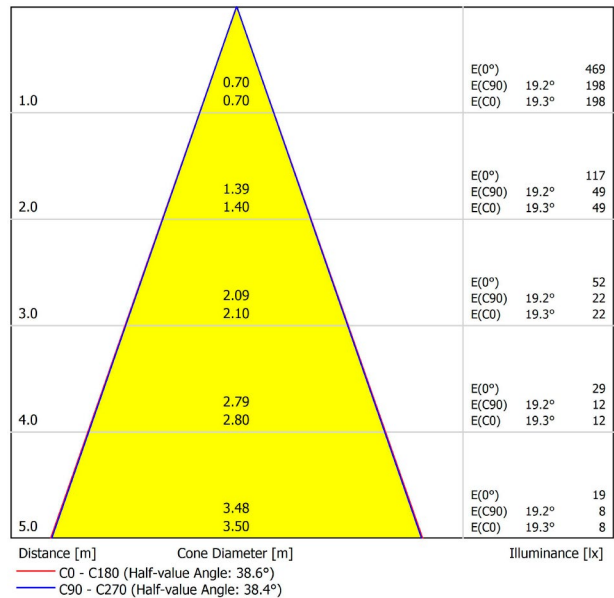


UGR

Glare Evaluation According to UGR												
p Ceiling		70	70	50	50	30	70	70	50	50	30	
p Walls		50	30	50	30	30	50	30	50	30	30	
p Floor		20	20	20	20	20	20	20	20	20	20	
Room Size X Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis					
2H	2H	-4.8	-4.1	-4.5	-3.9	-3.7	-4.6	-4.0	-4.4	-3.8	-3.6	
	3H	-1.0	-0.4	-0.7	-0.2	0.1	-1.1	-0.6	-0.9	-0.3	-0.1	
	4H	0.8	1.4	1.1	1.6	1.9	1.0	1.5	1.3	1.8	2.0	
	6H	3.0	3.5	3.3	3.8	4.0	3.3	3.8	3.6	4.1	4.3	
	8H	4.3	4.8	4.6	5.1	5.4	4.4	4.9	4.8	5.2	5.5	
	12H	5.6	6.1	6.0	6.4	6.7	5.8	6.2	6.1	6.5	6.9	
4H	2H	-3.6	-3.1	-3.3	-2.8	-2.6	-3.5	-2.9	-3.2	-2.7	-2.4	
	3H	0.2	0.7	0.6	1.0	1.3	0.3	0.7	0.6	1.0	1.3	
	4H	2.3	2.7	2.7	3.0	3.4	2.5	2.9	2.9	3.2	3.6	
	6H	4.6	4.9	5.0	5.3	5.7	4.9	5.3	5.3	5.6	6.0	
	8H	6.0	6.3	6.4	6.7	7.1	6.2	6.5	6.6	6.9	7.3	
	12H	7.5	7.7	7.9	8.1	8.6	7.7	7.9	8.1	8.3	8.7	
8H	4H	3.3	3.6	3.7	3.9	4.3	3.4	3.7	3.8	4.1	4.5	
	6H	5.8	6.0	6.3	6.5	6.9	6.0	6.3	6.5	6.7	7.1	
	8H	7.4	7.5	7.8	8.0	8.5	7.5	7.7	7.9	8.1	8.6	
	12H	9.0	9.2	9.5	9.6	10.1	9.1	9.3	9.6	9.7	10.2	
12H	4H	3.5	3.8	4.0	4.2	4.6	3.7	3.9	4.1	4.3	4.7	
	6H	6.2	6.4	6.6	6.8	7.3	6.4	6.5	6.8	7.0	7.5	
	8H	7.8	8.0	8.3	8.4	8.9	7.9	8.1	8.4	8.5	9.0	
Variation of the observer position for the luminaire distances S												
S = 1.0H		+0.4 / -0.2					+0.4 / -0.2					
S = 1.5H		+0.9 / -0.5					+0.9 / -0.4					
S = 2.0H		+1.6 / -0.6					+1.6 / -0.6					
Standard table		---					---					
Correction		---					---					
Summand		---					---					
Corrected Glare Indices referring to 210lm Total Luminous Flux												



DIMENSIONS



↑↑↑ IP54 / IP20

AWARDS



Name	SHOT LIGHT IP54 CRI 90 38° 3000K Z
Reference	A2680221Z
Color	Aluminium
RAL	9006
Category	CEILING RECESSED

PRODUCT

Light source	LED
Gross luminous flux	210 Lm
Power	2,1 W
Power values of the system	3,23 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 3
Light beam angle	38°
Lighting efficiency	86%
Efficacy	100 Lm/W
Current intensity	700 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included - Connected
Emergency power supply	Please Consult
Electrical insulation class	□
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A++
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


Ingress Protection	IP54
Recess measurements	Ø38 mm.
Weight	100 g.
Packaged weight	120 g.
Packaging dimensions	77 × 70 × 53 mm
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene / Polycarbonate

OTHER DATA




A luminary conceived to be a small, discreet point of light in the ceiling that hides the illumination source from sight and aims to offer maximum visual comfort. In order to achieve this, it has an anti-glare screen and a specifically designed micro-reflector that generates a perfectly defined light beam.

POLAR DIAGRAM

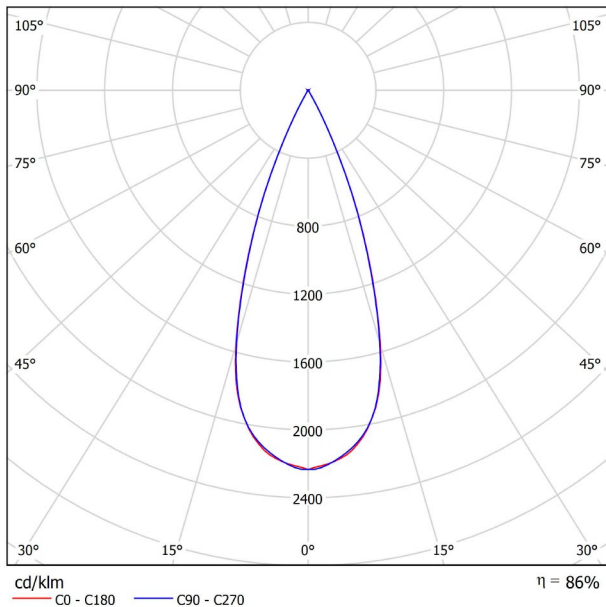

CONICAL DIAGRAM

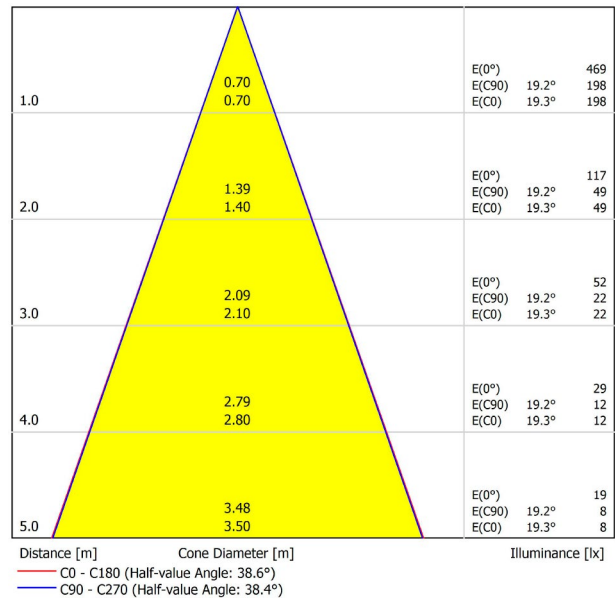


UGR

Glare Evaluation According to UGR													
ρ Ceiling		70	70	50	50	30	70	70	50	50	30		
ρ Walls		50	30	50	30	30	50	30	50	30	30		
ρ Floor		20	20	20	20	20	20	20	20	20	20		
Room Size X Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis						
2H	2H	-4.8	-4.1	-4.5	-3.9	-3.7	-4.6	-4.0	-4.4	-3.8	-3.6		
	3H	-1.0	-0.4	-0.7	-0.2	0.1	-1.1	-0.6	-0.9	-0.3	-0.1		
	4H	0.8	1.4	1.1	1.6	1.9	1.0	1.5	1.3	1.8	2.0		
	6H	3.0	3.5	3.3	3.8	4.0	3.3	3.8	3.6	4.1	4.3		
	8H	4.3	4.8	4.6	5.1	5.4	4.4	4.9	4.8	5.2	5.5		
12H	12H	5.6	6.1	6.0	6.4	6.7	5.8	6.2	6.1	6.5	6.9		
	4H	2H	-3.6	-3.1	-3.3	-2.8	-2.6	-3.5	-2.9	-3.2	-2.7	-2.4	
		3H	0.2	0.7	0.6	1.0	1.3	0.3	0.7	0.6	1.0	1.3	
		4H	2.3	2.7	2.7	3.0	3.4	2.5	2.9	2.9	3.2	3.6	
		6H	4.6	4.9	5.0	5.3	5.7	4.9	5.3	5.3	5.6	6.0	
8H		6.0	6.3	6.4	6.7	7.1	6.2	6.5	6.6	6.9	7.3		
12H	12H	7.5	7.7	7.9	8.1	8.6	7.7	7.9	8.1	8.3	8.7		
	8H	4H	3.3	3.6	3.7	3.9	4.3	3.4	3.7	3.8	4.1	4.5	
		6H	5.8	6.0	6.3	6.5	6.9	6.0	6.3	6.5	6.7	7.1	
		8H	7.4	7.5	7.8	8.0	8.5	7.5	7.7	7.9	8.1	8.6	
		12H	9.0	9.2	9.5	9.6	10.1	9.1	9.3	9.6	9.7	10.2	
12H		4H	3.5	3.8	4.0	4.2	4.6	3.7	3.9	4.1	4.3	4.7	
	6H	6.2	6.4	6.6	6.8	7.3	6.4	6.5	6.8	7.0	7.5		
	8H	7.8	8.0	8.3	8.4	8.9	7.9	8.1	8.4	8.5	9.0		
Variation of the observer position for the luminaire distances S													
S = 1.0H		+0.4 / -0.2					+0.4 / -0.2						
S = 1.5H		+0.9 / -0.5					+0.9 / -0.4						
S = 2.0H		+1.6 / -0.6					+1.6 / -0.6						
Standard table		---					---						
Correction		---					---						
Summand		---					---						
Corrected Glare Indices referring to 210lm Total Luminous Flux													



DIMENSIONS



AWARDS




PRODUCT	
Name	SHOT LIGHT IP54 CRI 90 38° 4000K G
Reference	A2680222G
Color	Gold
RAL	1036
Category	CEILING RECESSED
LIGHTING INFORMATION	
Light source	LED
Gross luminous flux	250 Lm
Power	2,1 W
Power values of the system	3,23 W
Colour temperature	4000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 3
Light beam angle	38°
Lighting efficiency	86%
Efficacy	119 Lm/W
Current intensity	700 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included - Connected
Emergency power supply	Please Consult
Electrical insulation class	□
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A++
LED lifespan	L80B10 (Tc=85°C) >60.000h
OTHER DATA	
Ingress Protection	IP54
Recess measurements	Ø38 mm.
Weight	100 g.
Packaged weight	120 g.
Packaging dimensions	77 × 70 × 53 mm
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene / Polycarbonate




A luminary conceived to be a small, discreet point of light in the ceiling that hides the illumination source from sight and aims to offer maximum visual comfort. In order to achieve this, it has an anti-glare screen and a specifically designed micro-reflector that generates a perfectly defined light beam.

POLAR DIAGRAM

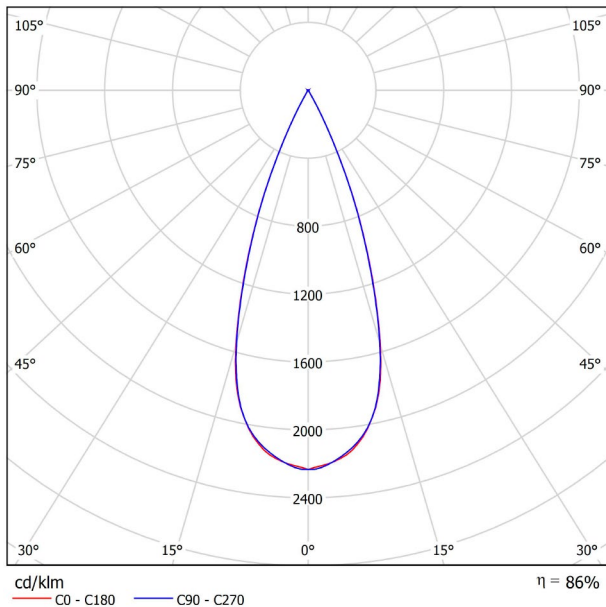

CONICAL DIAGRAM

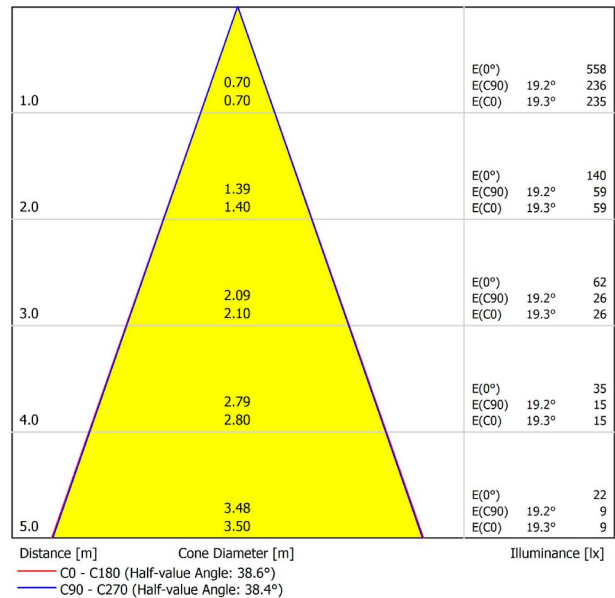


UGR

Glare Evaluation According to UGR												
ρ Ceiling		70	70	50	50	30	70	70	50	50	30	
ρ Walls		50	30	50	30	30	50	30	50	30	30	
ρ Floor		20	20	20	20	20	20	20	20	20	20	
Room Size X Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis					
2H	2H	-4.2	-3.5	-3.9	-3.3	-3.1	-4.0	-3.4	-3.8	-3.2	-3.0	
	3H	-0.4	0.2	-0.1	0.4	0.7	-0.5	0.1	-0.3	0.3	0.5	
	4H	1.4	2.0	1.7	2.2	2.5	1.6	2.1	1.9	2.4	2.6	
	6H	3.6	4.1	3.9	4.4	4.6	3.9	4.4	4.2	4.7	4.9	
	8H	4.9	5.4	5.2	5.7	6.0	5.0	5.5	5.4	5.8	6.1	
	12H	6.2	6.7	6.6	7.0	7.3	6.4	6.9	6.7	7.2	7.5	
4H	2H	-3.0	-2.5	-2.7	-2.2	-1.9	-2.9	-2.3	-2.6	-2.1	-1.8	
	3H	0.9	1.3	1.2	1.6	1.9	0.9	1.3	1.2	1.6	2.0	
	4H	2.9	3.3	3.3	3.6	4.0	3.1	3.5	3.5	3.8	4.2	
	6H	5.2	5.5	5.6	5.9	6.3	5.5	5.9	5.9	6.2	6.6	
	8H	6.6	6.9	7.1	7.3	7.7	6.8	7.1	7.2	7.5	7.9	
	12H	8.1	8.3	8.5	8.7	9.2	8.3	8.5	8.7	8.9	9.3	
8H	4H	3.9	4.2	4.3	4.5	4.9	4.0	4.3	4.4	4.7	5.1	
	6H	6.4	6.6	6.9	7.1	7.5	6.6	6.9	7.1	7.3	7.7	
	8H	8.0	8.2	8.4	8.6	9.1	8.1	8.3	8.5	8.7	9.2	
	12H	9.6	9.8	10.1	10.2	10.7	9.7	9.9	10.2	10.3	10.8	
12H	4H	4.1	4.4	4.6	4.8	5.2	4.3	4.5	4.7	4.9	5.3	
	6H	6.8	7.0	7.2	7.4	7.9	7.0	7.2	7.4	7.6	8.1	
	8H	8.4	8.6	8.9	9.0	9.5	8.5	8.7	9.0	9.1	9.6	
Variation of the observer position for the luminaire distances S												
S = 1.0H		+0.4 / -0.2					+0.4 / -0.2					
S = 1.5H		+0.9 / -0.5					+0.9 / -0.4					
S = 2.0H		+1.6 / -0.6					+1.6 / -0.6					
Standard table		---					---					
Correction		---					---					
Summand												
Corrected Glare Indices referring to 250lm Total Luminous Flux												



DIMENSIONS



AWARDS



Name	SHOT LIGHT IP54 CRI 90 38° 4000K N
Reference	A2680222N
Color	Black
RAL	Colour in the mass looks alike RAL 9005
Category	CEILING RECESSED

PRODUCT

Light source	LED
Gross luminous flux	250 Lm
Power	2,1 W
Power values of the system	3,23 W
Colour temperature	4000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 3
Light beam angle	38°
Lighting efficiency	86%
Efficacy	119 Lm/W
Current intensity	700 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included - Connected
Emergency power supply	Please Consult
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A++
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


Ingress Protection	IP54
Recess measurements	Ø38 mm.
Weight	100 g.
Packaged weight	120 g.
Packaging dimensions	77 × 70 × 53 mm
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene / Polycarbonate

OTHER DATA




A luminary conceived to be a small, discreet point of light in the ceiling that hides the illumination source from sight and aims to offer maximum visual comfort. In order to achieve this, it has an anti-glare screen and a specifically designed micro-reflector that generates a perfectly defined light beam.

POLAR DIAGRAM

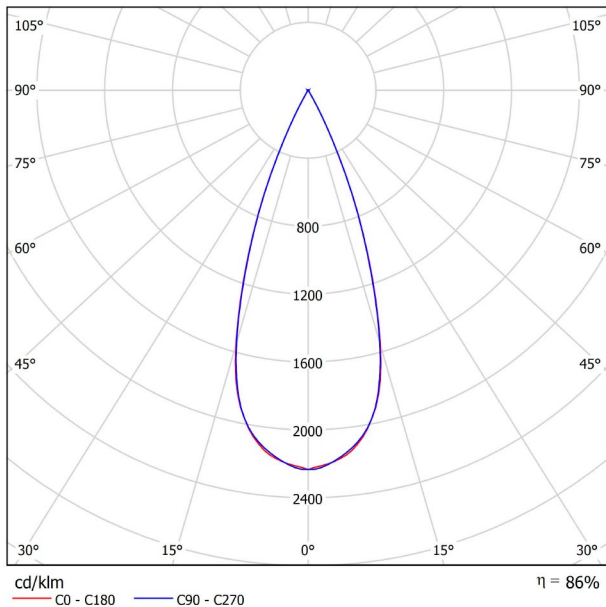

CONICAL DIAGRAM

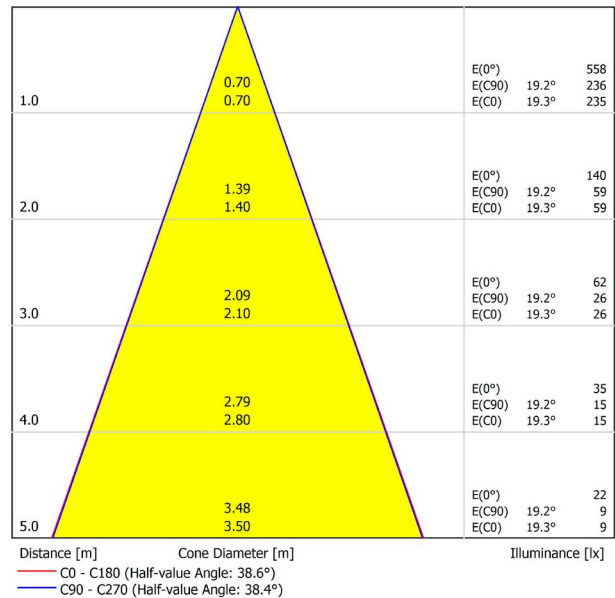


UGR

Glare Evaluation According to UGR												
ρ Ceiling		70	70	50	50	30	70	70	50	50	30	
ρ Walls		50	30	50	30	30	50	30	50	30	30	
ρ Floor		20	20	20	20	20	20	20	20	20	20	
Room Size X Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis					
2H	2H	-4.2	-3.5	-3.9	-3.3	-3.1	-4.0	-3.4	-3.8	-3.2	-3.0	
	3H	-0.4	0.2	-0.1	0.4	0.7	-0.5	0.1	-0.3	0.3	0.5	
	4H	1.4	2.0	1.7	2.2	2.5	1.6	2.1	1.9	2.4	2.6	
	6H	3.6	4.1	3.9	4.4	4.6	3.9	4.4	4.2	4.7	4.9	
	8H	4.9	5.4	5.2	5.7	6.0	5.0	5.5	5.4	5.8	6.1	
	12H	6.2	6.7	6.6	7.0	7.3	6.4	6.9	6.7	7.2	7.5	
4H	2H	-3.0	-2.5	-2.7	-2.2	-1.9	-2.9	-2.3	-2.6	-2.1	-1.8	
	3H	0.9	1.3	1.2	1.6	1.9	0.9	1.3	1.2	1.6	2.0	
	4H	2.9	3.3	3.3	3.6	4.0	3.1	3.5	3.5	3.8	4.2	
	6H	5.2	5.5	5.6	5.9	6.3	5.5	5.9	5.9	6.2	6.6	
	8H	6.6	6.9	7.1	7.3	7.7	6.8	7.1	7.2	7.5	7.9	
	12H	8.1	8.3	8.5	8.7	9.2	8.3	8.5	8.7	8.9	9.3	
8H	4H	3.9	4.2	4.3	4.5	4.9	4.0	4.3	4.4	4.7	5.1	
	6H	6.4	6.6	6.9	7.1	7.5	6.6	6.9	7.1	7.3	7.7	
	8H	8.0	8.2	8.4	8.6	9.1	8.1	8.3	8.5	8.7	9.2	
	12H	9.6	9.8	10.1	10.2	10.7	9.7	9.9	10.2	10.3	10.8	
12H	4H	4.1	4.4	4.6	4.8	5.2	4.3	4.5	4.7	4.9	5.3	
	6H	6.8	7.0	7.2	7.4	7.9	7.0	7.2	7.4	7.6	8.1	
	8H	8.4	8.6	8.9	9.0	9.5	8.5	8.7	9.0	9.1	9.6	
Variation of the observer position for the luminaire distances S												
S = 1.0H		+0.4 / -0.2					+0.4 / -0.2					
S = 1.5H		+0.9 / -0.5					+0.9 / -0.4					
S = 2.0H		+1.6 / -0.6					+1.6 / -0.6					
Standard table		---					---					
Correction		---					---					
Summand		---					---					
Corrected Glare Indices referring to 250lm Total Luminous Flux												



DIMENSIONS



AWARDS



Name	SHOT LIGHT IP54 CRI 90 38° 4000K NMG
Reference	A2680222NMG
Color	Black-Metallized gold
RAL	Metalllic finish
Category	CEILING RECESSED

PRODUCT

Light source	LED
Gross luminous flux	250 Lm
Power	2,1 W
Power values of the system	3,23 W
Colour temperature	4000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 3
Light beam angle	38°
Lighting efficiency	86%
Efficacy	119 Lm/W
Current intensity	700 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included - Connected
Emergency power supply	Please Consult
Electrical insulation class	□
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A++
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


Ingress Protection	IP54
Recess measurements	Ø38 mm.
Weight	100 g.
Packaged weight	120 g.
Packaging dimensions	77 × 70 × 53 mm
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene / Polycarbonate

OTHER DATA




A luminary conceived to be a small, discreet point of light in the ceiling that hides the illumination source from sight and aims to offer maximum visual comfort. In order to achieve this, it has an anti-glare screen and a specifically designed micro-reflector that generates a perfectly defined light beam.

POLAR DIAGRAM

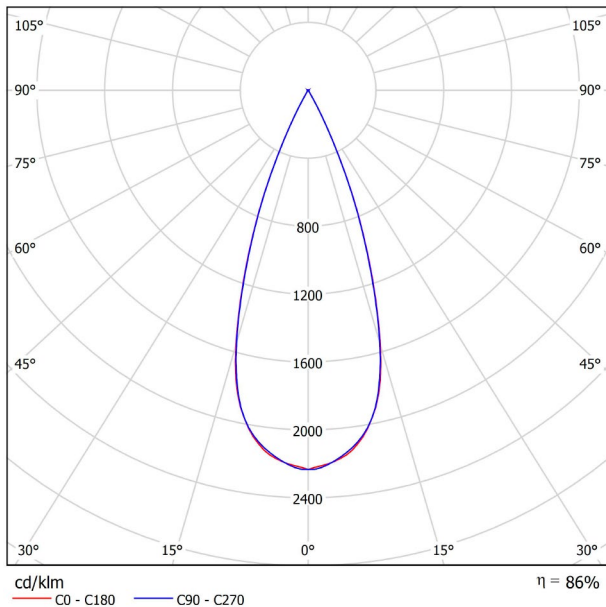

CONICAL DIAGRAM

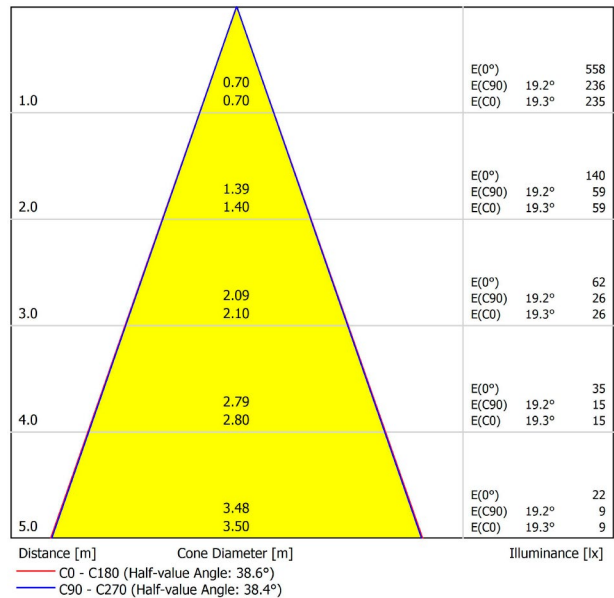


UGR

Glare Evaluation According to UGR												
ρ Ceiling		70	70	50	50	30	70	70	50	50	30	
ρ Walls		50	30	50	30	30	50	30	50	30	30	
ρ Floor		20	20	20	20	20	20	20	20	20	20	
Room Size X Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis					
2H	2H	-4.2	-3.5	-3.9	-3.3	-3.1	-4.0	-3.4	-3.8	-3.2	-3.0	
	3H	-0.4	0.2	-0.1	0.4	0.7	-0.5	0.1	-0.3	0.3	0.5	
	4H	1.4	2.0	1.7	2.2	2.5	1.6	2.1	1.9	2.4	2.6	
	6H	3.6	4.1	3.9	4.4	4.6	3.9	4.4	4.2	4.7	4.9	
	8H	4.9	5.4	5.2	5.7	6.0	5.0	5.5	5.4	5.8	6.1	
	12H	6.2	6.7	6.6	7.0	7.3	6.4	6.9	6.7	7.2	7.5	
4H	2H	-3.0	-2.5	-2.7	-2.2	-1.9	-2.9	-2.3	-2.6	-2.1	-1.8	
	3H	0.9	1.3	1.2	1.6	1.9	0.9	1.3	1.2	1.6	2.0	
	4H	2.9	3.3	3.3	3.6	4.0	3.1	3.5	3.5	3.8	4.2	
	6H	5.2	5.5	5.6	5.9	6.3	5.5	5.9	5.9	6.2	6.6	
	8H	6.6	6.9	7.1	7.3	7.7	6.8	7.1	7.2	7.5	7.9	
	12H	8.1	8.3	8.5	8.7	9.2	8.3	8.5	8.7	8.9	9.3	
8H	4H	3.9	4.2	4.3	4.5	4.9	4.0	4.3	4.4	4.7	5.1	
	6H	6.4	6.6	6.9	7.1	7.5	6.6	6.9	7.1	7.3	7.7	
	8H	8.0	8.2	8.4	8.6	9.1	8.1	8.3	8.5	8.7	9.2	
	12H	9.6	9.8	10.1	10.2	10.7	9.7	9.9	10.2	10.3	10.8	
12H	4H	4.1	4.4	4.6	4.8	5.2	4.3	4.5	4.7	4.9	5.3	
	6H	6.8	7.0	7.2	7.4	7.9	7.0	7.2	7.4	7.6	8.1	
	8H	8.4	8.6	8.9	9.0	9.5	8.5	8.7	9.0	9.1	9.6	
Variation of the observer position for the luminaire distances S												
S = 1.0H		+0.4 / -0.2					+0.4 / -0.2					
S = 1.5H		+0.9 / -0.5					+0.9 / -0.4					
S = 2.0H		+1.6 / -0.6					+1.6 / -0.6					
Standard table		---					---					
Correction		---					---					
Summand		---					---					
Corrected Glare Indices referring to 250lm Total Luminous Flux												



DIMENSIONS



AWARDS




PRODUCT	
Name	SHOT LIGHT IP54 CRI 90 38° 4000K R
Reference	A2680222R
Color	Red
RAL	2004
Category	CEILING RECESSED
LIGHTING INFORMATION	
Light source	LED
Gross luminous flux	250 Lm
Power	2,1 W
Power values of the system	3,23 W
Colour temperature	4000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 3
Light beam angle	38°
Lighting efficiency	86%
Efficacy	119 Lm/W
Current intensity	700 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included - Connected
Emergency power supply	Please Consult
Electrical insulation class	□
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A++
LED lifespan	L80B10 (Tc=85°C) >60.000h
OTHER DATA	
Ingress Protection	IP54
Recess measurements	Ø38 mm.
Weight	100 g.
Packaged weight	120 g.
Packaging dimensions	77 × 70 × 53 mm
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene / Polycarbonate




A luminary conceived to be a small, discreet point of light in the ceiling that hides the illumination source from sight and aims to offer maximum visual comfort. In order to achieve this, it has an anti-glare screen and a specifically designed micro-reflector that generates a perfectly defined light beam.

POLAR DIAGRAM

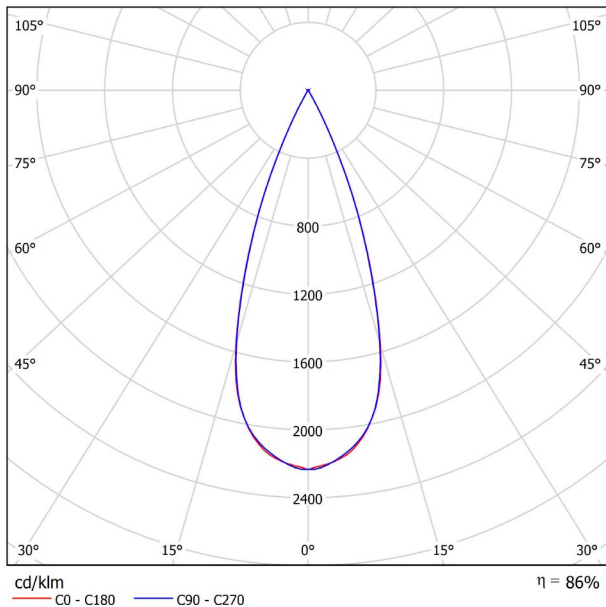

CONICAL DIAGRAM

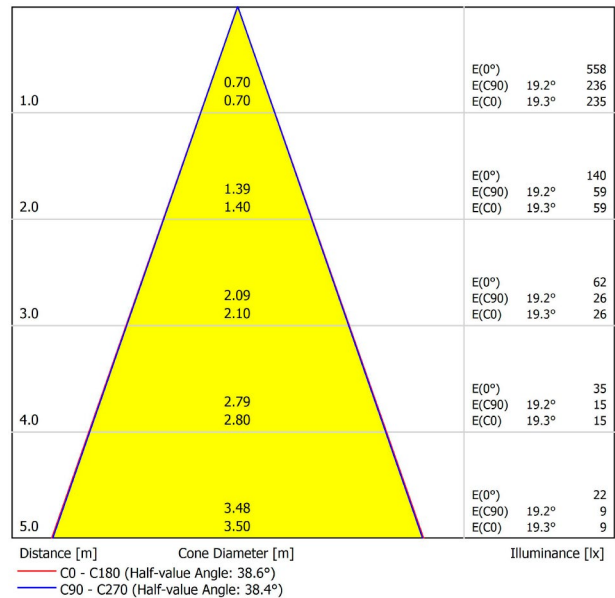


UGR

Glare Evaluation According to UGR												
ρ Ceiling		70	70	50	50	30	70	70	50	50	30	
ρ Walls		50	30	50	30	30	50	30	50	30	30	
ρ Floor		20	20	20	20	20	20	20	20	20	20	
Room Size X Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis					
2H	2H	-4.2	-3.5	-3.9	-3.3	-3.1	-4.0	-3.4	-3.8	-3.2	-3.0	
	3H	-0.4	0.2	-0.1	0.4	0.7	-0.5	0.1	-0.3	0.3	0.5	
	4H	1.4	2.0	1.7	2.2	2.5	1.6	2.1	1.9	2.4	2.6	
	6H	3.6	4.1	3.9	4.4	4.6	3.9	4.4	4.2	4.7	4.9	
	8H	4.9	5.4	5.2	5.7	6.0	5.0	5.5	5.4	5.8	6.1	
4H	12H	6.2	6.7	6.6	7.0	7.3	6.4	6.9	6.7	7.2	7.5	
	2H	-3.0	-2.5	-2.7	-2.2	-1.9	-2.9	-2.3	-2.6	-2.1	-1.8	
	3H	0.9	1.3	1.2	1.6	1.9	0.9	1.3	1.2	1.6	2.0	
	4H	2.9	3.3	3.3	3.6	4.0	3.1	3.5	3.5	3.8	4.2	
	6H	5.2	5.5	5.6	5.9	6.3	5.5	5.9	5.9	6.2	6.6	
8H	8H	6.6	6.9	7.1	7.3	7.7	6.8	7.1	7.2	7.5	7.9	
	12H	8.1	8.3	8.5	8.7	9.2	8.3	8.5	8.7	8.9	9.3	
	4H	3.9	4.2	4.3	4.5	4.9	4.0	4.3	4.4	4.7	5.1	
	6H	6.4	6.6	6.9	7.1	7.5	6.6	6.9	7.1	7.3	7.7	
	8H	8.0	8.2	8.4	8.6	9.1	8.1	8.3	8.5	8.7	9.2	
12H	12H	9.6	9.8	10.1	10.2	10.7	9.7	9.9	10.2	10.3	10.8	
	4H	4.1	4.4	4.6	4.8	5.2	4.3	4.5	4.7	4.9	5.3	
	6H	6.8	7.0	7.2	7.4	7.9	7.0	7.2	7.4	7.6	8.1	
	8H	8.4	8.6	8.9	9.0	9.5	8.5	8.7	9.0	9.1	9.6	
	Variation of the observer position for the luminaire distances S											
S = 1.0H		+0.4 / -0.2					+0.4 / -0.2					
S = 1.5H		+0.9 / -0.5					+0.9 / -0.4					
S = 2.0H		+1.6 / -0.6					+1.6 / -0.6					
Standard table		---					---					
Correction		---					---					
Summand		---					---					
Corrected Glare Indices referring to 250lm Total Luminous Flux												



DIMENSIONS



AWARDS



Name	SHOT LIGHT IP54 CRI 90 38° 4000K W
Reference	A2680222W
Color	White
RAL	Colour in the mass looks alike RAL 9016
Category	CEILING RECESSED

PRODUCT

Light source	LED
Gross luminous flux	250 Lm
Power	2,1 W
Power values of the system	3,23 W
Colour temperature	4000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 3
Light beam angle	38°
Lighting efficiency	86%
Efficacy	119 Lm/W
Current intensity	700 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included - Connected
Emergency power supply	Please Consult
Electrical insulation class	□
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A++
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


Ingress Protection	IP54
Recess measurements	Ø38 mm.
Weight	100 g.
Packaged weight	120 g.
Packaging dimensions	77 × 70 × 53 mm
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene / Polycarbonate

OTHER DATA




A luminary conceived to be a small, discreet point of light in the ceiling that hides the illumination source from sight and aims to offer maximum visual comfort. In order to achieve this, it has an anti-glare screen and a specifically designed micro-reflector that generates a perfectly defined light beam.

POLAR DIAGRAM

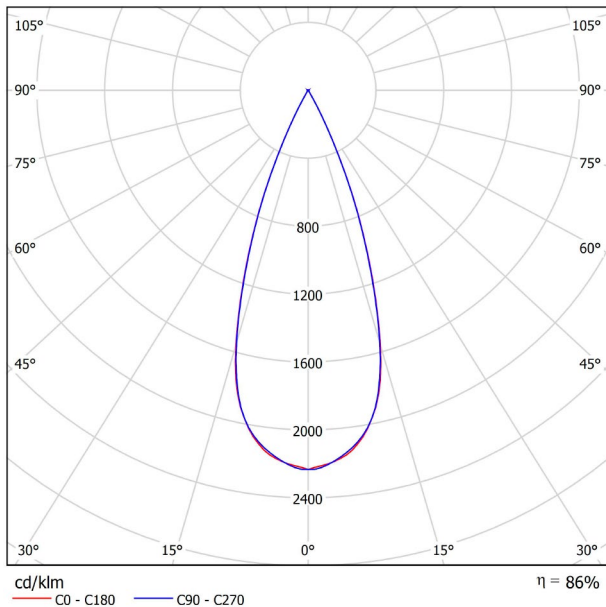

CONICAL DIAGRAM

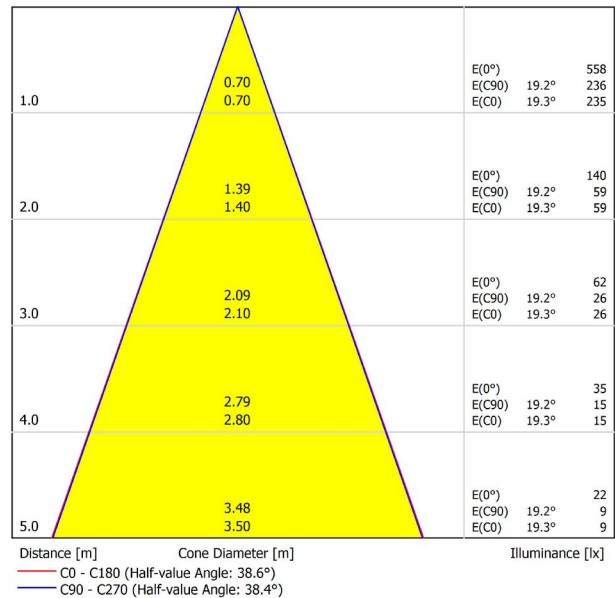


UGR

Glare Evaluation According to UGR												
ρ Ceiling		70	70	50	50	30	70	70	50	50	30	
ρ Walls		50	30	50	30	30	50	30	50	30	30	
ρ Floor		20	20	20	20	20	20	20	20	20	20	
Room Size X Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis					
2H	2H	-4.2	-3.5	-3.9	-3.3	-3.1	-4.0	-3.4	-3.8	-3.2	-3.0	
	3H	-0.4	0.2	-0.1	0.4	0.7	-0.5	0.1	-0.3	0.3	0.5	
	4H	1.4	2.0	1.7	2.2	2.5	1.6	2.1	1.9	2.4	2.6	
	6H	3.6	4.1	3.9	4.4	4.6	3.9	4.4	4.2	4.7	4.9	
	8H	4.9	5.4	5.2	5.7	6.0	5.0	5.5	5.4	5.8	6.1	
	12H	6.2	6.7	6.6	7.0	7.3	6.4	6.9	6.7	7.2	7.5	
4H	2H	-3.0	-2.5	-2.7	-2.2	-1.9	-2.9	-2.3	-2.6	-2.1	-1.8	
	3H	0.9	1.3	1.2	1.6	1.9	0.9	1.3	1.2	1.6	2.0	
	4H	2.9	3.3	3.3	3.6	4.0	3.1	3.5	3.5	3.8	4.2	
	6H	5.2	5.5	5.6	5.9	6.3	5.5	5.9	5.9	6.2	6.6	
	8H	6.6	6.9	7.1	7.3	7.7	6.8	7.1	7.2	7.5	7.9	
	12H	8.1	8.3	8.5	8.7	9.2	8.3	8.5	8.7	8.9	9.3	
8H	4H	3.9	4.2	4.3	4.5	4.9	4.0	4.3	4.4	4.7	5.1	
	6H	6.4	6.6	6.9	7.1	7.5	6.6	6.9	7.1	7.3	7.7	
	8H	8.0	8.2	8.4	8.6	9.1	8.1	8.3	8.5	8.7	9.2	
	12H	9.6	9.8	10.1	10.2	10.7	9.7	9.9	10.2	10.3	10.8	
12H	4H	4.1	4.4	4.6	4.8	5.2	4.3	4.5	4.7	4.9	5.3	
	6H	6.8	7.0	7.2	7.4	7.9	7.0	7.2	7.4	7.6	8.1	
	8H	8.4	8.6	8.9	9.0	9.5	8.5	8.7	9.0	9.1	9.6	
Variation of the observer position for the luminaire distances S												
S = 1.0H		+0.4 / -0.2					+0.4 / -0.2					
S = 1.5H		+0.9 / -0.5					+0.9 / -0.4					
S = 2.0H		+1.6 / -0.6					+1.6 / -0.6					
Standard table		---					---					
Correction Summand		---					---					
Corrected Glare Indices referring to 250lm Total Luminous Flux												



DIMENSIONS



AWARDS



Name	SHOT LIGHT IP54 CRI 90 38° 4000K WMG
Reference	A2680222WMG
Color	White-Metallized gold
RAL	Metallic finish
Category	CEILING RECESSED

PRODUCT

Light source	LED
Gross luminous flux	250 Lm
Power	2,1 W
Power values of the system	3,23 W
Colour temperature	4000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 3
Light beam angle	38°
Lighting efficiency	86%
Efficacy	119 Lm/W
Current intensity	700 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included - Connected
Emergency power supply	Please Consult
Electrical insulation class	□
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A++
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


Ingress Protection	IP54
Recess measurements	Ø38 mm.
Weight	100 g.
Packaged weight	120 g.
Packaging dimensions	77 × 70 × 53 mm
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene / Polycarbonate

OTHER DATA




A luminary conceived to be a small, discreet point of light in the ceiling that hides the illumination source from sight and aims to offer maximum visual comfort. In order to achieve this, it has an anti-glare screen and a specifically designed micro-reflector that generates a perfectly defined light beam.

POLAR DIAGRAM

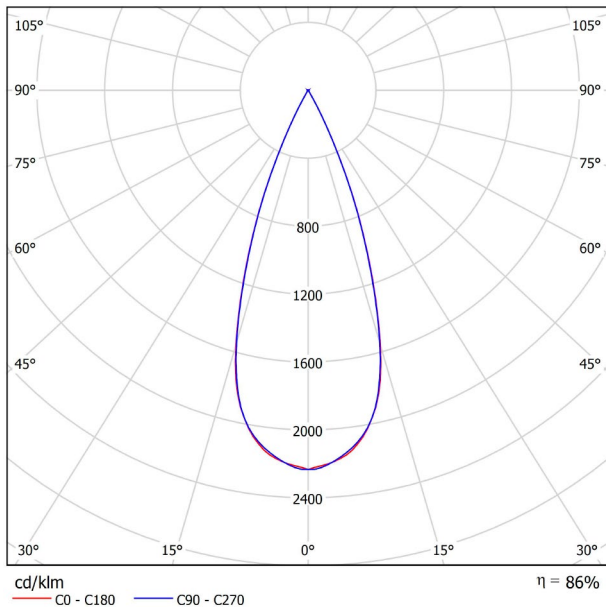

CONICAL DIAGRAM

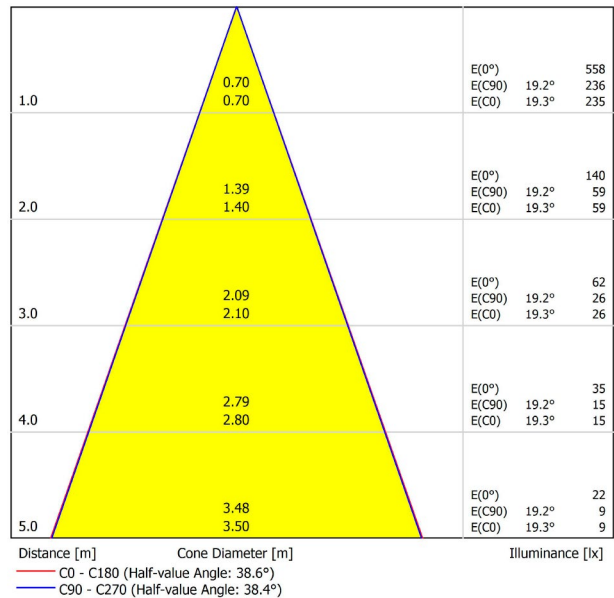


UGR

Glare Evaluation According to UGR												
ρ Ceiling		70	70	50	50	30	70	70	50	50	30	
ρ Walls		50	30	50	30	30	50	30	50	30	30	
ρ Floor		20	20	20	20	20	20	20	20	20	20	
Room Size X Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis					
2H	2H	-4.2	-3.5	-3.9	-3.3	-3.1	-4.0	-3.4	-3.8	-3.2	-3.0	
	3H	-0.4	0.2	-0.1	0.4	0.7	-0.5	0.1	-0.3	0.3	0.5	
	4H	1.4	2.0	1.7	2.2	2.5	1.6	2.1	1.9	2.4	2.6	
	6H	3.6	4.1	3.9	4.4	4.6	3.9	4.4	4.2	4.7	4.9	
	8H	4.9	5.4	5.2	5.7	6.0	5.0	5.5	5.4	5.8	6.1	
	12H	6.2	6.7	6.6	7.0	7.3	6.4	6.9	6.7	7.2	7.5	
4H	2H	-3.0	-2.5	-2.7	-2.2	-1.9	-2.9	-2.3	-2.6	-2.1	-1.8	
	3H	0.9	1.3	1.2	1.6	1.9	0.9	1.3	1.2	1.6	2.0	
	4H	2.9	3.3	3.3	3.6	4.0	3.1	3.5	3.5	3.8	4.2	
	6H	5.2	5.5	5.6	5.9	6.3	5.5	5.9	5.9	6.2	6.6	
	8H	6.6	6.9	7.1	7.3	7.7	6.8	7.1	7.2	7.5	7.9	
	12H	8.1	8.3	8.5	8.7	9.2	8.3	8.5	8.7	8.9	9.3	
8H	4H	3.9	4.2	4.3	4.5	4.9	4.0	4.3	4.4	4.7	5.1	
	6H	6.4	6.6	6.9	7.1	7.5	6.6	6.9	7.1	7.3	7.7	
	8H	8.0	8.2	8.4	8.6	9.1	8.1	8.3	8.5	8.7	9.2	
	12H	9.6	9.8	10.1	10.2	10.7	9.7	9.9	10.2	10.3	10.8	
12H	4H	4.1	4.4	4.6	4.8	5.2	4.3	4.5	4.7	4.9	5.3	
	6H	6.8	7.0	7.2	7.4	7.9	7.0	7.2	7.4	7.6	8.1	
	8H	8.4	8.6	8.9	9.0	9.5	8.5	8.7	9.0	9.1	9.6	
Variation of the observer position for the luminaire distances S												
S = 1.0H		+0.4 / -0.2					+0.4 / -0.2					
S = 1.5H		+0.9 / -0.5					+0.9 / -0.4					
S = 2.0H		+1.6 / -0.6					+1.6 / -0.6					
Standard table		---					---					
Correction		---					---					
Summand		---					---					
Corrected Glare Indices referring to 250lm Total Luminous Flux												



DIMENSIONS



↑↑↑ IP54 / IP20

AWARDS



Name	SHOT LIGHT IP54 CRI 90 38° 4000K WN
Reference	A2680222WN
Color	White-Black
RAL	Colour in the mass looks alike RAL 9016 & 9005
Category	CEILING RECESSED

PRODUCT

Light source	LED
Gross luminous flux	250 Lm
Power	2,1 W
Power values of the system	3,23 W
Colour temperature	4000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 3
Light beam angle	38°
Lighting efficiency	86%
Efficacy	119 Lm/W
Current intensity	700 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included - Connected
Emergency power supply	Please Consult
Electrical insulation class	□
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A++
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


OTHER DATA

Ingress Protection	IP54
Recess measurements	Ø38 mm.
Weight	100 g.
Packaged weight	120 g.
Packaging dimensions	77 × 70 × 53 mm
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene / Polycarbonate




A luminary conceived to be a small, discreet point of light in the ceiling that hides the illumination source from sight and aims to offer maximum visual comfort. In order to achieve this, it has an anti-glare screen and a specifically designed micro-reflector that generates a perfectly defined light beam.

POLAR DIAGRAM

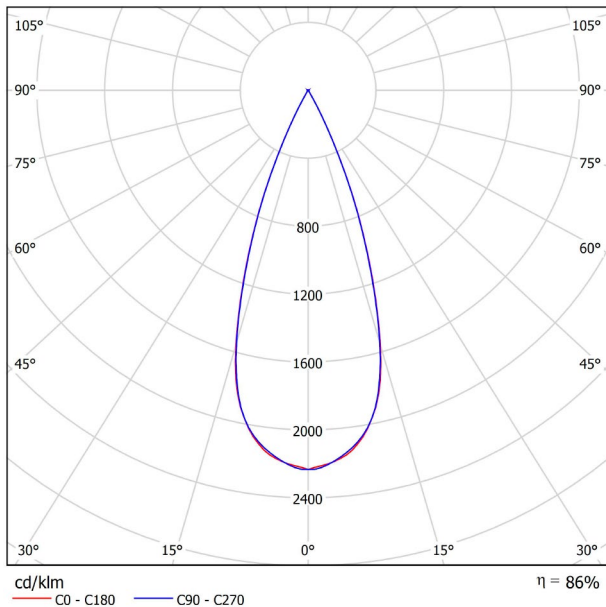

CONICAL DIAGRAM

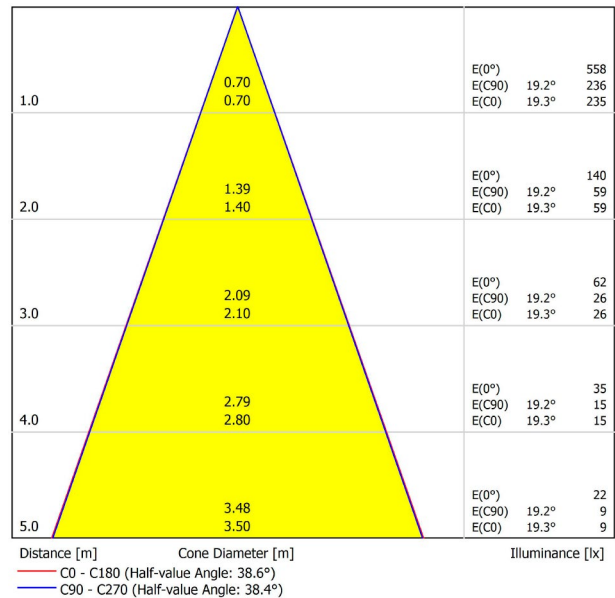


UGR

Glare Evaluation According to UGR												
ρ Ceiling		70	70	50	50	30	70	70	50	50	30	
ρ Walls		50	30	50	30	30	50	30	50	30	30	
ρ Floor		20	20	20	20	20	20	20	20	20	20	
Room Size X Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis					
2H	2H	-4.2	-3.5	-3.9	-3.3	-3.1	-4.0	-3.4	-3.8	-3.2	-3.0	
	3H	-0.4	0.2	-0.1	0.4	0.7	-0.5	0.1	-0.3	0.3	0.5	
	4H	1.4	2.0	1.7	2.2	2.5	1.6	2.1	1.9	2.4	2.6	
	6H	3.6	4.1	3.9	4.4	4.6	3.9	4.4	4.2	4.7	4.9	
	8H	4.9	5.4	5.2	5.7	6.0	5.0	5.5	5.4	5.8	6.1	
	12H	6.2	6.7	6.6	7.0	7.3	6.4	6.9	6.7	7.2	7.5	
4H	2H	-3.0	-2.5	-2.7	-2.2	-1.9	-2.9	-2.3	-2.6	-2.1	-1.8	
	3H	0.9	1.3	1.2	1.6	1.9	0.9	1.3	1.2	1.6	2.0	
	4H	2.9	3.3	3.3	3.6	4.0	3.1	3.5	3.5	3.8	4.2	
	6H	5.2	5.5	5.6	5.9	6.3	5.5	5.9	5.9	6.2	6.6	
	8H	6.6	6.9	7.1	7.3	7.7	6.8	7.1	7.2	7.5	7.9	
	12H	8.1	8.3	8.5	8.7	9.2	8.3	8.5	8.7	8.9	9.3	
8H	4H	3.9	4.2	4.3	4.5	4.9	4.0	4.3	4.4	4.7	5.1	
	6H	6.4	6.6	6.9	7.1	7.5	6.6	6.9	7.1	7.3	7.7	
	8H	8.0	8.2	8.4	8.6	9.1	8.1	8.3	8.5	8.7	9.2	
	12H	9.6	9.8	10.1	10.2	10.7	9.7	9.9	10.2	10.3	10.8	
12H	4H	4.1	4.4	4.6	4.8	5.2	4.3	4.5	4.7	4.9	5.3	
	6H	6.8	7.0	7.2	7.4	7.9	7.0	7.2	7.4	7.6	8.1	
	8H	8.4	8.6	8.9	9.0	9.5	8.5	8.7	9.0	9.1	9.6	
Variation of the observer position for the luminaire distances S												
S = 1.0H		+0.4 / -0.2					+0.4 / -0.2					
S = 1.5H		+0.9 / -0.5					+0.9 / -0.4					
S = 2.0H		+1.6 / -0.6					+1.6 / -0.6					
Standard table		---					---					
Correction		---					---					
Summand		---					---					
Corrected Glare Indices referring to 250lm Total Luminous Flux												



DIMENSIONS



AWARDS



Name	SHOT LIGHT IP54 CRI 90 38° 4000K Z
Reference	A2680222Z
Color	Aluminium
RAL	9006
Category	CEILING RECESSED

PRODUCT

Light source	LED
Gross luminous flux	250 Lm
Power	2,1 W
Power values of the system	3,23 W
Colour temperature	4000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 3
Light beam angle	38°
Lighting efficiency	86%
Efficacy	119 Lm/W
Current intensity	700 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included - Connected
Emergency power supply	Please Consult
Electrical insulation class	□
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A++
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


Ingress Protection	IP54
Recess measurements	Ø38 mm.
Weight	100 g.
Packaged weight	120 g.
Packaging dimensions	77 × 70 × 53 mm
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene / Polycarbonate

OTHER DATA




A luminary conceived to be a small, discreet point of light in the ceiling that hides the illumination source from sight and aims to offer maximum visual comfort. In order to achieve this, it has an anti-glare screen and a specifically designed micro-reflector that generates a perfectly defined light beam.

POLAR DIAGRAM

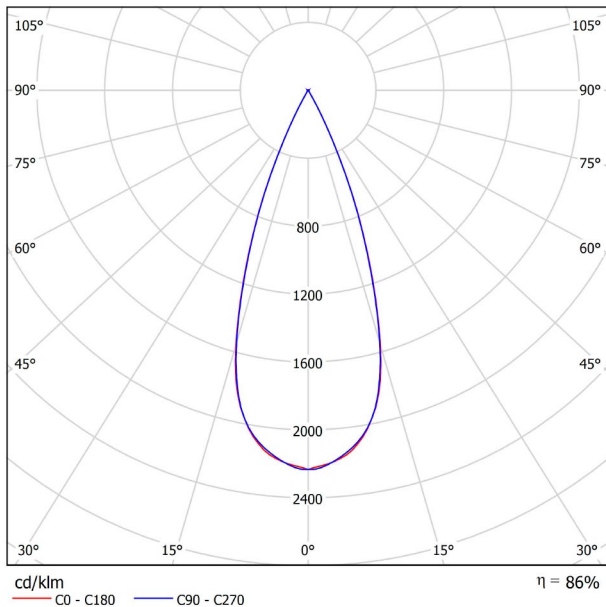

CONICAL DIAGRAM

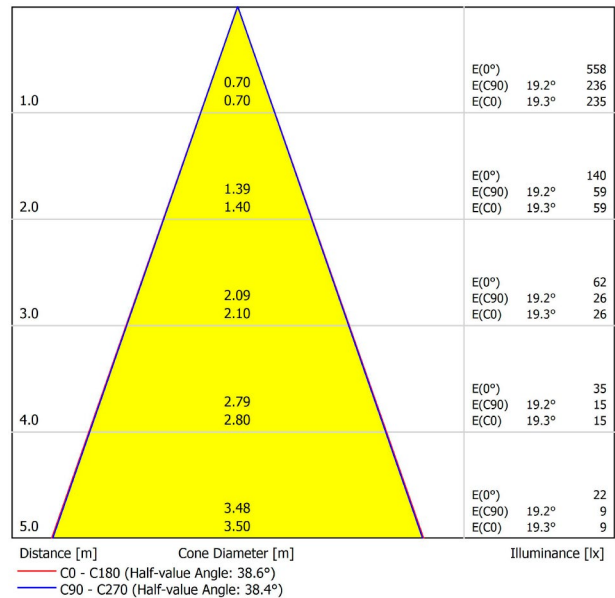


UGR

Glare Evaluation According to UGR												
ρ Ceiling		70	70	50	50	30	70	70	50	50	30	
ρ Walls		50	30	50	30	30	50	30	50	30	30	
ρ Floor		20	20	20	20	20	20	20	20	20	20	
Room Size X Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis					
2H	2H	-4.2	-3.5	-3.9	-3.3	-3.1	-4.0	-3.4	-3.8	-3.2	-3.0	
	3H	-0.4	0.2	-0.1	0.4	0.7	-0.5	0.1	-0.3	0.3	0.5	
	4H	1.4	2.0	1.7	2.2	2.5	1.6	2.1	1.9	2.4	2.6	
	6H	3.6	4.1	3.9	4.4	4.6	3.9	4.4	4.2	4.7	4.9	
	8H	4.9	5.4	5.2	5.7	6.0	5.0	5.5	5.4	5.8	6.1	
4H	12H	6.2	6.7	6.6	7.0	7.3	6.4	6.9	6.7	7.2	7.5	
	2H	-3.0	-2.5	-2.7	-2.2	-1.9	-2.9	-2.3	-2.6	-2.1	-1.8	
	3H	0.9	1.3	1.2	1.6	1.9	0.9	1.3	1.2	1.6	2.0	
	4H	2.9	3.3	3.3	3.6	4.0	3.1	3.5	3.5	3.8	4.2	
	6H	5.2	5.5	5.6	5.9	6.3	5.5	5.9	5.9	6.2	6.6	
8H	8H	6.6	6.9	7.1	7.3	7.7	6.8	7.1	7.2	7.5	7.9	
	12H	8.1	8.3	8.5	8.7	9.2	8.3	8.5	8.7	8.9	9.3	
	4H	3.9	4.2	4.3	4.5	4.9	4.0	4.3	4.4	4.7	5.1	
	6H	6.4	6.6	6.9	7.1	7.5	6.6	6.9	7.1	7.3	7.7	
	8H	8.0	8.2	8.4	8.6	9.1	8.1	8.3	8.5	8.7	9.2	
12H	12H	9.6	9.8	10.1	10.2	10.7	9.7	9.9	10.2	10.3	10.8	
	4H	4.1	4.4	4.6	4.8	5.2	4.3	4.5	4.7	4.9	5.3	
	6H	6.8	7.0	7.2	7.4	7.9	7.0	7.2	7.4	7.6	8.1	
	8H	8.4	8.6	8.9	9.0	9.5	8.5	8.7	9.0	9.1	9.6	
	Variation of the observer position for the luminaire distances S											
S = 1.0H		+0.4 / -0.2					+0.4 / -0.2					
S = 1.5H		+0.9 / -0.5					+0.9 / -0.4					
S = 2.0H		+1.6 / -0.6					+1.6 / -0.6					
Standard table		---					---					
Correction		---					---					
Summand		---					---					
Corrected Glare Indices referring to 250lm Total Luminous Flux												



DIMENSIONS



↑↑↑ IP54 / IP20

AWARDS




PRODUCT	
Name	SHOT LIGHT IP54 CRI 90 38° 2700K G
Reference	A2680220G
Color	Gold
RAL	1036
Category	CEILING RECESSED
LIGHTING INFORMATION	
Light source	LED
Gross luminous flux	190 Lm
Power	2,1 W
Power values of the system	3,23 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 3
Light beam angle	38°
Lighting efficiency	86%
Efficacy	90 Lm/W
Current intensity	700 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included - Connected
Emergency power supply	Please Consult
Electrical insulation class	□
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A++
LED lifespan	L80B10 (Tc=85°C) >60.000h
OTHER DATA	
Ingress Protection	IP54
Recess measurements	Ø38 mm.
Weight	100 g.
Packaged weight	120 g.
Packaging dimensions	77 × 70 × 53 mm
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene / Polycarbonate




A luminary conceived to be a small, discreet point of light in the ceiling that hides the illumination source from sight and aims to offer maximum visual comfort. In order to achieve this, it has an anti-glare screen and a specifically designed micro-reflector that generates a perfectly defined light beam.

POLAR DIAGRAM

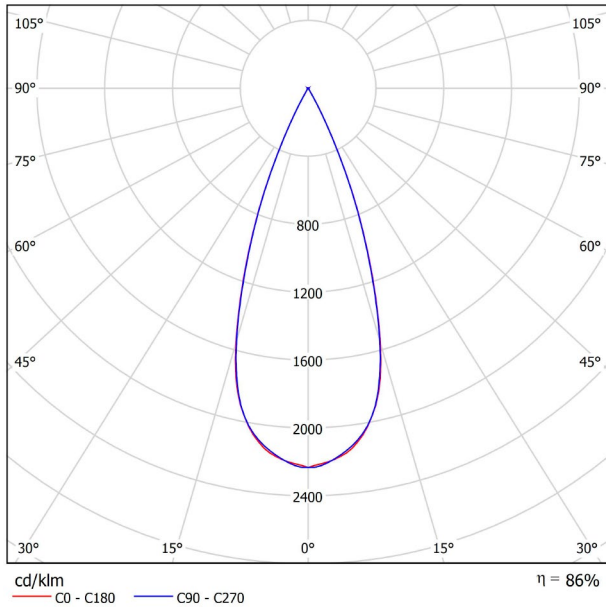

CONICAL DIAGRAM

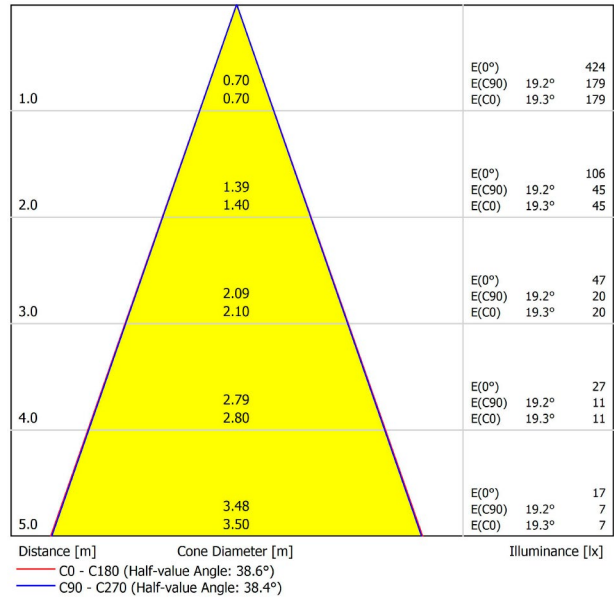


UGR

Glare Evaluation According to UGR												
ρ Ceiling		70	70	50	50	30	70	70	50	50	30	
ρ Walls		50	30	50	30	30	50	30	50	30	30	
ρ Floor		20	20	20	20	20	20	20	20	20	20	
Room Size X Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis					
2H	2H	-5.1	-4.5	-4.9	-4.3	-4.1	-4.9	-4.3	-4.7	-4.1	-3.9	
	3H	-1.3	-0.7	-1.0	-0.5	-0.3	-1.5	-0.9	-1.2	-0.7	-0.4	
	4H	0.5	1.0	0.8	1.3	1.5	0.6	1.2	0.9	1.4	1.7	
	6H	2.6	3.1	2.9	3.4	3.7	2.9	3.4	3.2	3.7	4.0	
	8H	3.9	4.4	4.3	4.7	5.0	4.1	4.6	4.4	4.9	5.2	
4H	12H	5.3	5.7	5.6	6.0	6.4	5.4	5.9	5.8	6.2	6.5	
	2H	-4.0	-3.4	-3.7	-3.2	-2.9	-3.8	-3.3	-3.5	-3.0	-2.8	
	3H	-0.1	0.4	0.2	0.7	1.0	-0.1	0.4	0.3	0.7	1.0	
	4H	1.9	2.3	2.3	2.7	3.0	2.1	2.5	2.5	2.9	3.2	
	6H	4.3	4.6	4.7	5.0	5.3	4.6	4.9	5.0	5.3	5.7	
8H	8H	5.7	6.0	6.1	6.4	6.8	5.9	6.1	6.3	6.5	6.9	
	12H	7.1	7.4	7.6	7.8	8.2	7.3	7.6	7.7	8.0	8.4	
	4H	2.9	3.2	3.3	3.6	4.0	3.1	3.3	3.5	3.7	4.1	
	6H	5.5	5.7	5.9	6.1	6.6	5.7	5.9	6.1	6.3	6.8	
	8H	7.0	7.2	7.5	7.6	8.1	7.1	7.3	7.6	7.7	8.2	
12H	12H	8.7	8.8	9.2	9.3	9.8	8.8	8.9	9.3	9.4	9.9	
	4H	3.2	3.4	3.6	3.8	4.3	3.3	3.6	3.7	4.0	4.4	
	6H	5.8	6.0	6.3	6.4	6.9	6.0	6.2	6.5	6.6	7.1	
	8H	7.5	7.6	8.0	8.1	8.6	7.6	7.7	8.1	8.2	8.7	
	Variation of the observer position for the luminaire distances S											
S = 1.0H		+0.4 / -0.2					+0.4 / -0.2					
S = 1.5H		+0.9 / -0.5					+0.9 / -0.4					
S = 2.0H		+1.6 / -0.6					+1.6 / -0.6					
Standard table		---					---					
Correction		---					---					
Summand		---					---					
Corrected Glare Indices referring to 190lm Total Luminous Flux												



DIMENSIONS



AWARDS



Name	SHOT LIGHT IP54 CRI 90 38° 2700K N
Reference	A2680220N
Color	Black
RAL	Colour in the mass looks alike RAL 9005
Category	CEILING RECESSED

PRODUCT

SHOT LIGHT IP54 CRI 90 38° 2700K N
A2680220N
Black
Colour in the mass looks alike RAL 9005
CEILING RECESSED

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	190 Lm
Power	2,1 W
Power values of the system	3,23 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 3
Light beam angle	38°
Lighting efficiency	86%
Efficacy	90 Lm/W
Current intensity	700 mA
Dimming	No Dim - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Included - Connected
Emergency power supply	Please Consult
Electrical insulation class	□
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A++
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP54
Recess measurements	Ø38 mm.
Weight	100 g.
Packaged weight	120 g.
Packaging dimensions	77 × 70 × 53 mm
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene / Polycarbonate




A luminary conceived to be a small, discreet point of light in the ceiling that hides the illumination source from sight and aims to offer maximum visual comfort. In order to achieve this, it has an anti-glare screen and a specifically designed micro-reflector that generates a perfectly defined light beam.

POLAR DIAGRAM

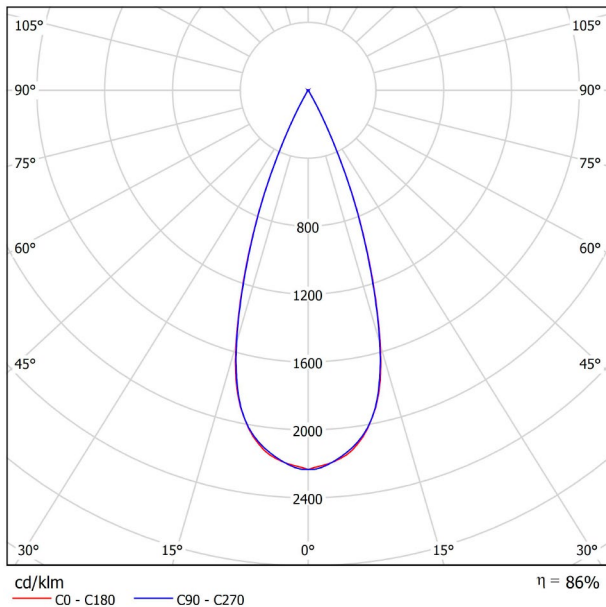

CONICAL DIAGRAM

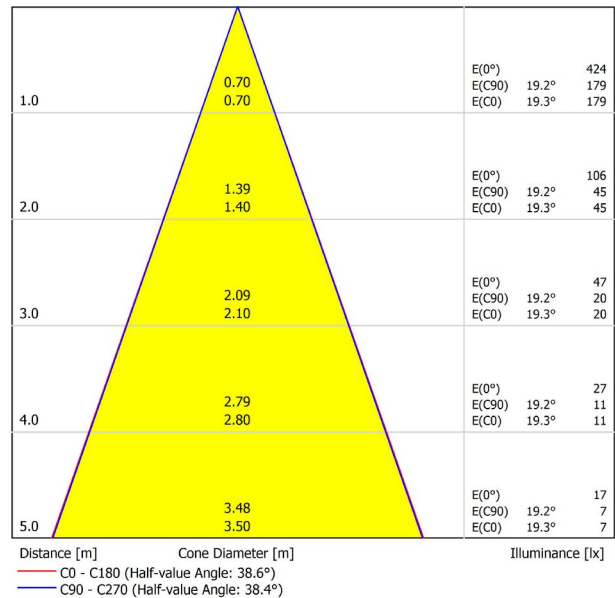

UGR

Glare Evaluation According to UGR												
ρ Ceiling		70	70	50	50	30	70	70	50	50	30	
ρ Walls		50	30	50	30	30	50	30	50	30	30	
ρ Floor		20	20	20	20	20	20	20	20	20	20	
Room Size X Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis					
2H	2H	-5.1	-4.5	-4.9	-4.3	-4.1	-4.9	-4.3	-4.7	-4.1	-3.9	
	3H	-1.3	-0.7	-1.0	-0.5	-0.3	-1.5	-0.9	-1.2	-0.7	-0.4	
	4H	0.5	1.0	0.8	1.3	1.5	0.6	1.2	0.9	1.4	1.7	
	6H	2.6	3.1	2.9	3.4	3.7	2.9	3.4	3.2	3.7	4.0	
	8H	3.9	4.4	4.3	4.7	5.0	4.1	4.6	4.4	4.9	5.2	
4H	12H	5.3	5.7	5.6	6.0	6.4	5.4	5.9	5.8	6.2	6.5	
	2H	-4.0	-3.4	-3.7	-3.2	-2.9	-3.8	-3.3	-3.5	-3.0	-2.8	
	3H	-0.1	0.4	0.2	0.7	1.0	-0.1	0.4	0.3	0.7	1.0	
	4H	1.9	2.3	2.3	2.7	3.0	2.1	2.5	2.5	2.9	3.2	
	6H	4.3	4.6	4.7	5.0	5.3	4.6	4.9	5.0	5.3	5.7	
8H	8H	5.7	6.0	6.1	6.4	6.8	5.9	6.1	6.3	6.5	6.9	
	12H	7.1	7.4	7.6	7.8	8.2	7.3	7.6	7.7	8.0	8.4	
	4H	2.9	3.2	3.3	3.6	4.0	3.1	3.3	3.5	3.7	4.1	
	6H	5.5	5.7	5.9	6.1	6.6	5.7	5.9	6.1	6.3	6.8	
	8H	7.0	7.2	7.5	7.6	8.1	7.1	7.3	7.6	7.7	8.2	
12H	12H	8.7	8.8	9.2	9.3	9.8	8.8	8.9	9.3	9.4	9.9	
	4H	3.2	3.4	3.6	3.8	4.3	3.3	3.6	3.7	4.0	4.4	
	6H	5.8	6.0	6.3	6.4	6.9	6.0	6.2	6.5	6.6	7.1	
	8H	7.5	7.6	8.0	8.1	8.6	7.6	7.7	8.1	8.2	8.7	
	Variation of the observer position for the luminaire distances S											
S = 1.0H		+0.4 / -0.2					+0.4 / -0.2					
S = 1.5H		+0.9 / -0.5					+0.9 / -0.4					
S = 2.0H		+1.6 / -0.6					+1.6 / -0.6					
Standard table		---					---					
Correction Summand		---					---					
Corrected Glare Indices referring to 190lm Total Luminous Flux												