




DIMENSIONS



ACCESSORIES



DRIVER OPTIONS



CONCRETE BOX ACCESSORY

AWARDS



PRODUCT

Name	RHINO W/O DRIVER 2700K NT
Reference	A3510000NT
Color	Textured black
RAL	9005
Category	WALL & FLOOR LIGHTS

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	105 / 190 / 255 Lm
Power	1 / 2 / 3 W
Power values of the system	1 / 2 / 3 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 3
Light beam angle	35°
Lighting efficiency	90%
Efficacy	105 / 95 / 85 Lm/W
Dimming	No Dim - DALI / Push
Control through bluetooth	Please Consult
Driver	Excluded
Electrical insulation class	III
Energy efficiency	A++
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Recess measurements	Ø79 mm.
Weight	149 g.
Packaged weight	190 g.
Packaging dimensions	110 x 100 x 72 mm
Units per package	1
Materials	Aluminium / Polycarbonate





Rhino is a floor wash light that stands out slightly from the wall, cleanly and directly projecting the light obliquely. By doing so, it breaks away from the two design dogmas of this type of luminaire: it relinquishes absolute recessed installation and avoids directing the beam to the exterior, availing itself of rebound surfaces. With this, it has the advantage of being a luminaire with outstanding light efficiency –among its alternatives – defining it from the aesthetic viewpoint.

POLAR DIAGRAM

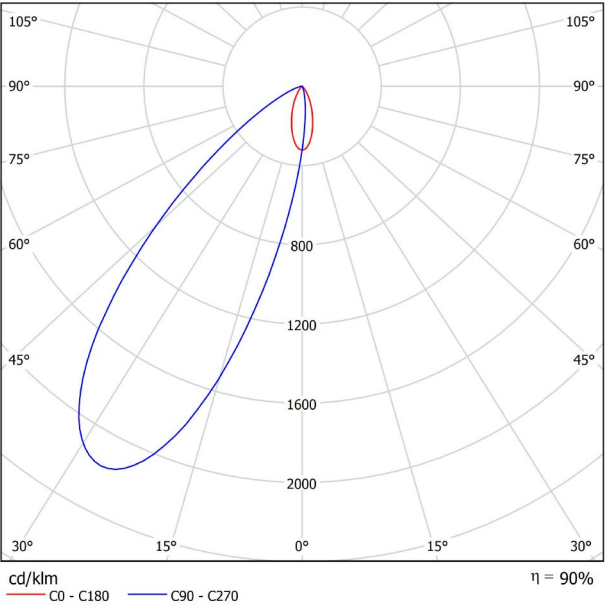

CONICAL DIAGRAM

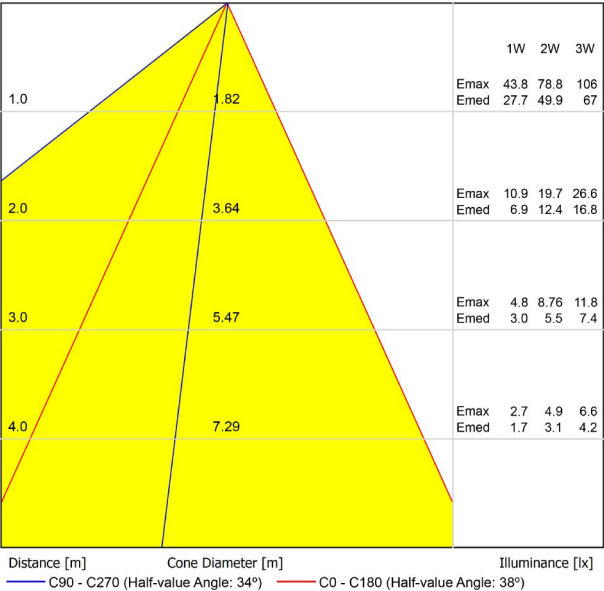




DRIVER OPTIONS*

		P	I	
 NO DIM	0434-00-39	1W	350mA	1 to 12 RHINO
	0434-00-40	2W	700mA	1 to 12 RHINO
	0434-00-41	3W	1050mA	1 to 11 RHINO
 DALI / PUSH	0434-01-23	1W	350mA	1 to 20 RHINO
	0434-01-25	2W	700mA	1 to 20 RHINO
	0434-01-26	3W	1050mA	1 to 16 RHINO

220
240 V~ | 50/60 Hz | 

Driver must be placed on remote

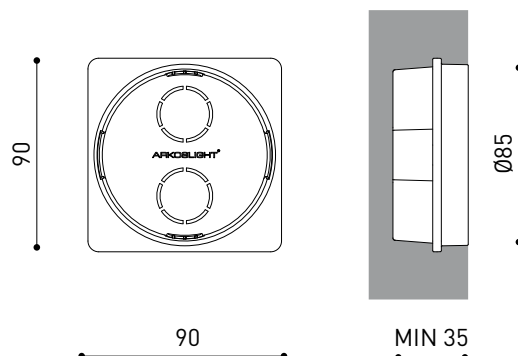

PRODUCT	
Model	Rhino Concrete box Accessory
Reference	A351-90-00
Category	Accessories




Rhino's auxiliary box allows it to be installed inside concrete walls. (It is not needed when installed in cardboard or plaster walls).

This accessory can be purchased independently, for the subsequent placement of Rhino once the works have been finished.



DIMENSIONS



ACCESSORIES



DRIVER OPTIONS



CONCRETE BOX ACCESSORY

AWARDS



PRODUCT

Name	RHINO W/O DRIVER 2700K WT
Reference	A3510000WT
Color	Textured white
RAL	9016
Category	WALL & FLOOR LIGHTS

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	105 / 190 / 255 Lm
Power	1 / 2 / 3 W
Power values of the system	1 / 2 / 3 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 3
Light beam angle	35°
Lighting efficiency	90%
Efficacy	105 / 95 / 85 Lm/W
Dimming	No Dim - DALI / Push
Control through bluetooth	Please Consult
Driver	Excluded
Electrical insulation class	III
Energy efficiency	A++
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Recess measurements	Ø79 mm.
Weight	149 g.
Packaged weight	190 g.
Packaging dimensions	110 x 100 x 72 mm
Units per package	1
Materials	Aluminium / Polycarbonate





Rhino is a floor wash light that stands out slightly from the wall, cleanly and directly projecting the light obliquely. By doing so, it breaks away from the two design dogmas of this type of luminaire: it relinquishes absolute recessed installation and avoids directing the beam to the exterior, availing itself of rebound surfaces. With this, it has the advantage of being a luminaire with outstanding light efficiency –among its alternatives – defining it from the aesthetic viewpoint.

POLAR DIAGRAM

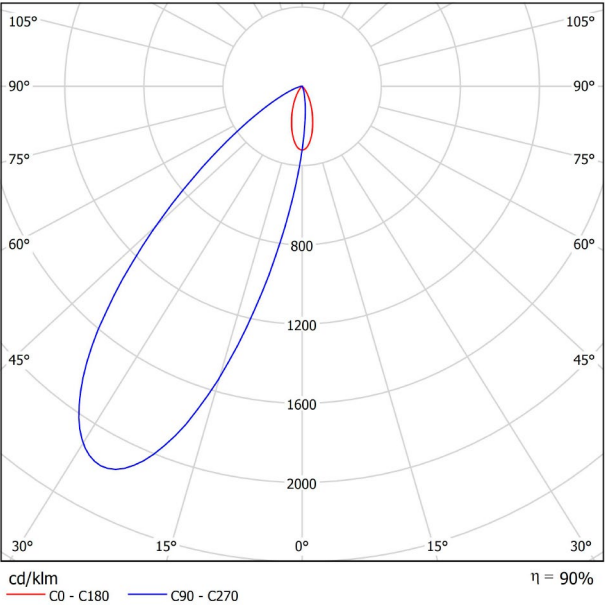

CONICAL DIAGRAM

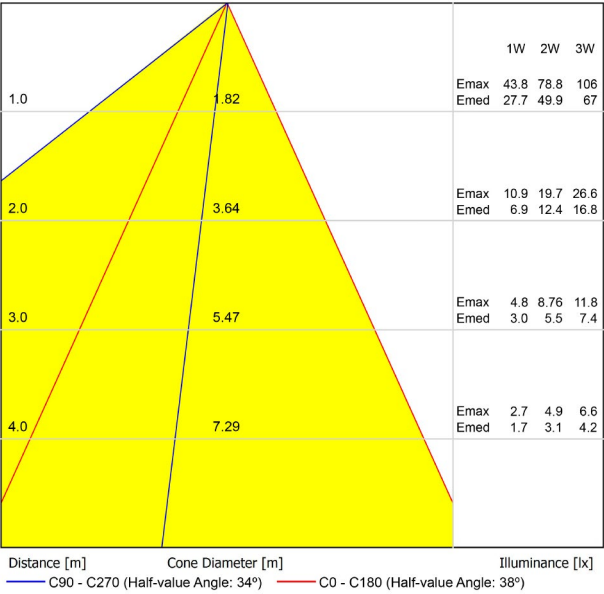




DRIVER OPTIONS*

		P	I	
 NO DIM	0434-00-39	1W	350mA	1 to 12 RHINO
	0434-00-40	2W	700mA	1 to 12 RHINO
	0434-00-41	3W	1050mA	1 to 11 RHINO
 DALI / PUSH	0434-01-23	1W	350mA	1 to 20 RHINO
	0434-01-25	2W	700mA	1 to 20 RHINO
	0434-01-26	3W	1050mA	1 to 16 RHINO

220
240 V~ | 50/60 Hz | 

Driver must be placed on remote

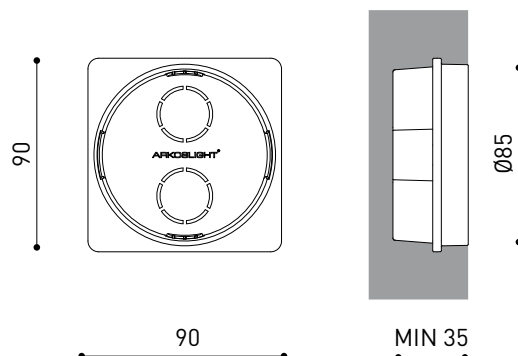

PRODUCT	
Model	Rhino Concrete box Accessory
Reference	A351-90-00
Category	Accessories




Rhino's auxiliary box allows it to be installed inside concrete walls. (It is not needed when installed in cardboard or plaster walls).

This accessory can be purchased independently, for the subsequent placement of Rhino once the works have been finished.



DIMENSIONS



ACCESSORIES



DRIVER OPTIONS



CONCRETE BOX ACCESSORY

AWARDS



PRODUCT

Name	RHINO W/O DRIVER 3000K NT
Reference	A3510001NT
Color	Textured black
RAL	9005
Category	WALL & FLOOR LIGHTS

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	115 / 205 / 280 Lm
Power	1 / 2 / 3 W
Power values of the system	1 / 2 / 3 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 3
Light beam angle	35°
Lighting efficiency	90%
Efficacy	115 / 103 / 93 Lm/W
Dimming	No Dim - DALI / Push
Control through bluetooth	Please Consult
Driver	Excluded
Electrical insulation class	III
Energy efficiency	A++
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Recess measurements	Ø79 mm.
Weight	149 g.
Packaged weight	190 g.
Packaging dimensions	110 x 100 x 72 mm
Units per package	1
Materials	Aluminium / Polycarbonate





Rhino is a floor wash light that stands out slightly from the wall, cleanly and directly projecting the light obliquely. By doing so, it breaks away from the two design dogmas of this type of luminaire: it relinquishes absolute recessed installation and avoids directing the beam to the exterior, availing itself of rebound surfaces. With this, it has the advantage of being a luminaire with outstanding light efficiency –among its alternatives – defining it from the aesthetic viewpoint.

POLAR DIAGRAM

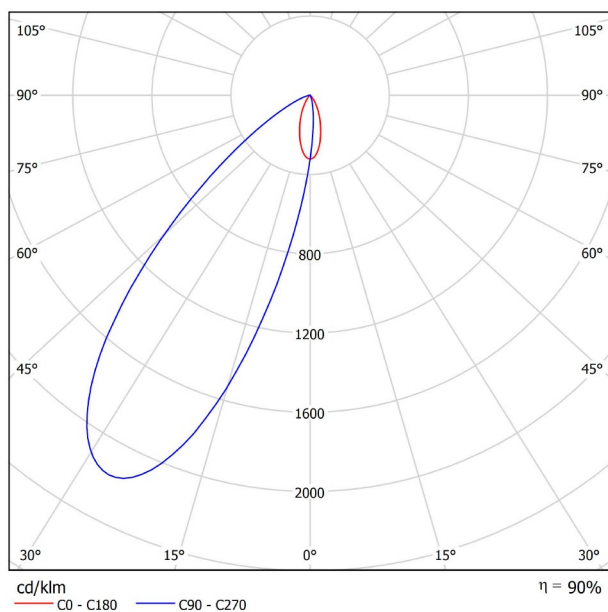

CONICAL DIAGRAM

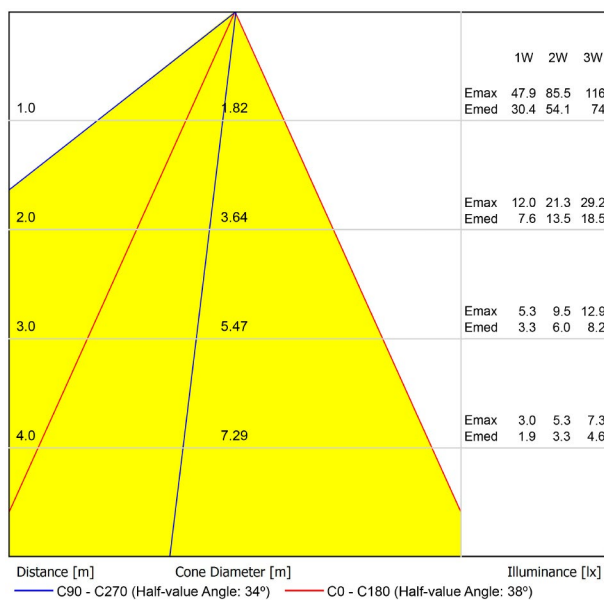




DRIVER OPTIONS*

		P	I	
 NO DIM	0434-00-39	1W	350mA	1 to 12 RHINO
	0434-00-40	2W	700mA	1 to 12 RHINO
	0434-00-41	3W	1050mA	1 to 11 RHINO
 DALI / PUSH	0434-01-23	1W	350mA	1 to 20 RHINO
	0434-01-25	2W	700mA	1 to 20 RHINO
	0434-01-26	3W	1050mA	1 to 16 RHINO

220
240 V~ | 50/60 Hz | 

Driver must be placed on remote

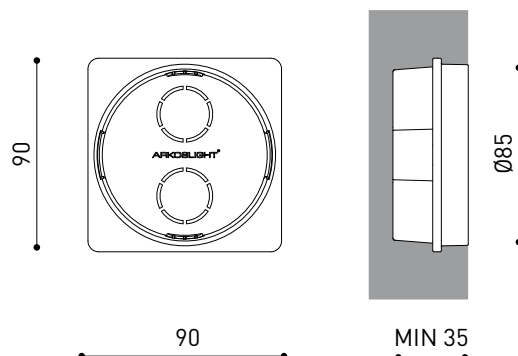

PRODUCT	
Model	Rhino Concrete box Accessory
Reference	A351-90-00
Category	Accessories




Rhino's auxiliary box allows it to be installed inside concrete walls. (It is not needed when installed in cardboard or plaster walls).

This accessory can be purchased independently, for the subsequent placement of Rhino once the works have been finished.



DIMENSIONS



ACCESSORIES



DRIVER OPTIONS



CONCRETE BOX ACCESSORY

AWARDS



PRODUCT

Name	RHINO W/O DRIVER 3000K WT
Reference	A3510001WT
Color	Textured white
RAL	9016
Category	WALL & FLOOR LIGHTS

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	115 / 205 / 280 Lm
Power	1 / 2 / 3 W
Power values of the system	1 / 2 / 3 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 3
Light beam angle	35°
Lighting efficiency	90%
Efficacy	115 / 103 / 93 Lm/W
Dimming	No Dim - DALI / Push
Control through bluetooth	Please Consult
Driver	Excluded
Electrical insulation class	III
Energy efficiency	A++
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Recess measurements	Ø79 mm.
Weight	149 g.
Packaged weight	190 g.
Packaging dimensions	110 x 100 x 72 mm
Units per package	1
Materials	Aluminium / Polycarbonate





Rhino is a floor wash light that stands out slightly from the wall, cleanly and directly projecting the light obliquely. By doing so, it breaks away from the two design dogmas of this type of luminaire: it relinquishes absolute recessed installation and avoids directing the beam to the exterior, availing itself of rebound surfaces. With this, it has the advantage of being a luminaire with outstanding light efficiency –among its alternatives – defining it from the aesthetic viewpoint.

POLAR DIAGRAM

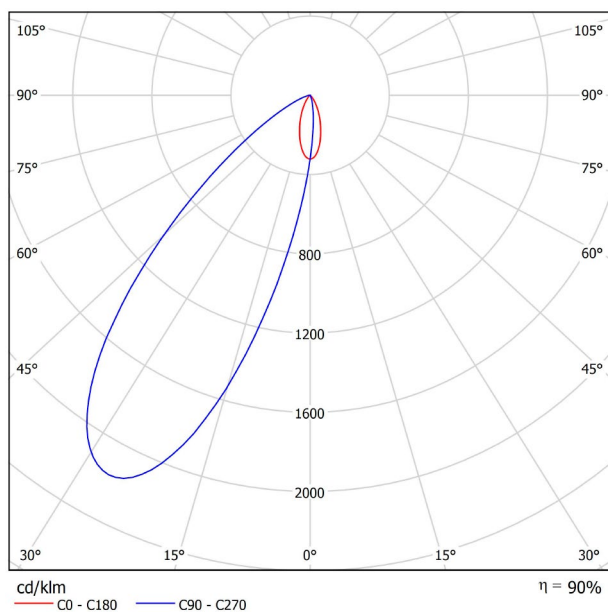

CONICAL DIAGRAM

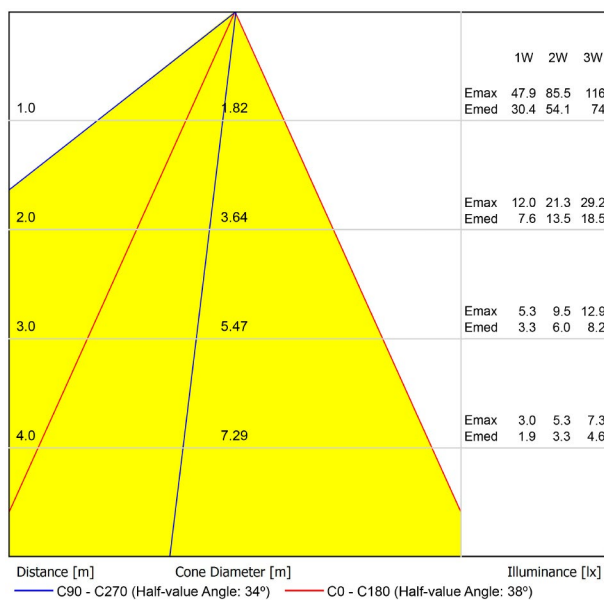




DRIVER OPTIONS*

		P	I	
 NO DIM	0434-00-39	1W	350mA	1 to 12 RHINO
	0434-00-40	2W	700mA	1 to 12 RHINO
	0434-00-41	3W	1050mA	1 to 11 RHINO
 DALI / PUSH	0434-01-23	1W	350mA	1 to 20 RHINO
	0434-01-25	2W	700mA	1 to 20 RHINO
	0434-01-26	3W	1050mA	1 to 16 RHINO

220
240 V~ | 50/60 Hz | 

Driver must be placed on remote

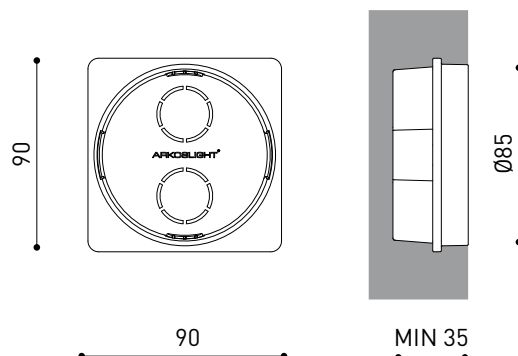

PRODUCT	
Model	Rhino Concrete box Accessory
Reference	A351-90-00
Category	Accessories




Rhino's auxiliary box allows it to be installed inside concrete walls. (It is not needed when installed in cardboard or plaster walls).

This accessory can be purchased independently, for the subsequent placement of Rhino once the works have been finished.



DIMENSIONS



ACCESSORIES



CONCRETE BOX ACCESSORY

AWARDS



PRODUCT

Name	RHINO 2700K NT
Reference	A3510010NT
Color	Textured black
RAL	9005
Category	WALL & FLOOR LIGHTS

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	190 Lm
Power	2 W
Power values of the system	3,08 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 3
Light beam angle	35°
Lighting efficiency	90%
Efficacy	95 Lm/W
Current intensity	700 mA
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	□
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A++
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Recess measurements	Ø79 mm.
Weight	169 g.
Packaged weight	210 g.
Packaging dimensions	110 x 100 x 72 mm
Units per package	1
Materials	Aluminium / Polycarbonate





Rhino is a floor wash light that stands out slightly from the wall, cleanly and directly projecting the light obliquely. By doing so, it breaks away from the two design dogmas of this type of luminaire: it relinquishes absolute recessed installation and avoids directing the beam to the exterior, availing itself of rebound surfaces. With this, it has the advantage of being a luminaire with outstanding light efficiency –among its alternatives – defining it from the aesthetic viewpoint.

POLAR DIAGRAM

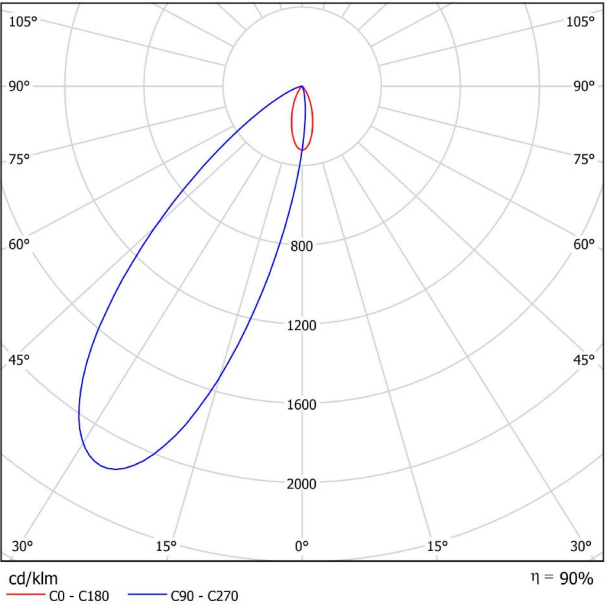

CONICAL DIAGRAM

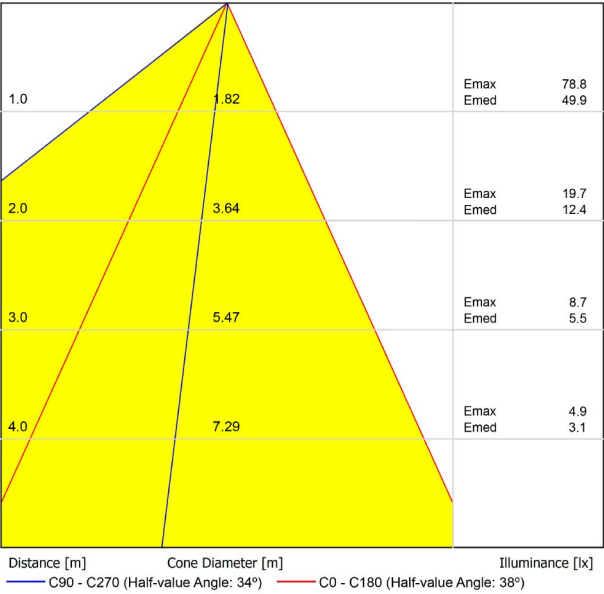

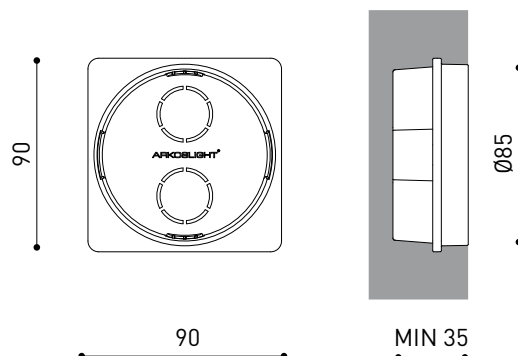

PRODUCT	
Model	Rhino Concrete box Accessory
Reference	A351-90-00
Category	Accessories




Rhino's auxiliary box allows it to be installed inside concrete walls. (It is not needed when installed in cardboard or plaster walls).

This accessory can be purchased independently, for the subsequent placement of Rhino once the works have been finished.



DIMENSIONS



ACCESSORIES



CONCRETE BOX ACCESSORY

AWARDS



Name	RHINO 2700K WT
Reference	A3510010WT
Color	Textured white
RAL	9016
Category	WALL & FLOOR LIGHTS

PRODUCT

RHINO 2700K WT

A3510010WT

Textured white

9016

WALL & FLOOR LIGHTS

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	190 Lm
Power	2 W
Power values of the system	3,08 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 3
Light beam angle	35°
Lighting efficiency	90%
Efficacy	95 Lm/W
Current intensity	700 mA
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A++
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Recess measurements	Ø79 mm.
Weight	169 g.
Packaged weight	210 g.
Packaging dimensions	110 × 100 × 72 mm
Units per package	1
Materials	Aluminium / Polycarbonate





Rhino is a floor wash light that stands out slightly from the wall, cleanly and directly projecting the light obliquely. By doing so, it breaks away from the two design dogmas of this type of luminaire: it relinquishes absolute recessed installation and avoids directing the beam to the exterior, availing itself of rebound surfaces. With this, it has the advantage of being a luminaire with outstanding light efficiency –among its alternatives – defining it from the aesthetic viewpoint.

POLAR DIAGRAM

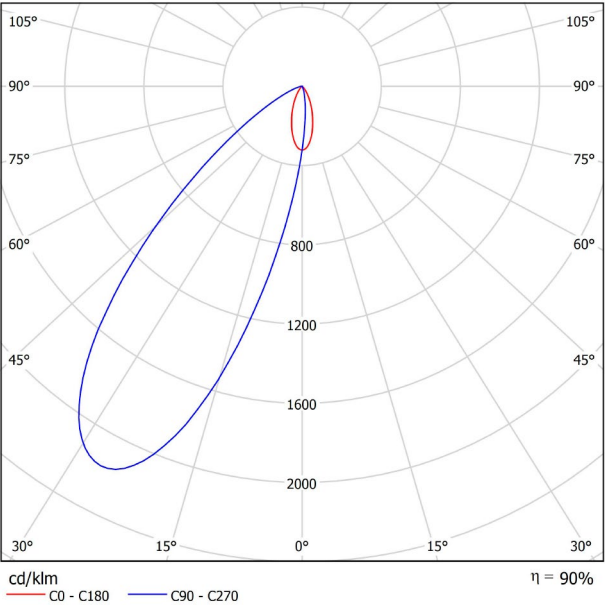

CONICAL DIAGRAM

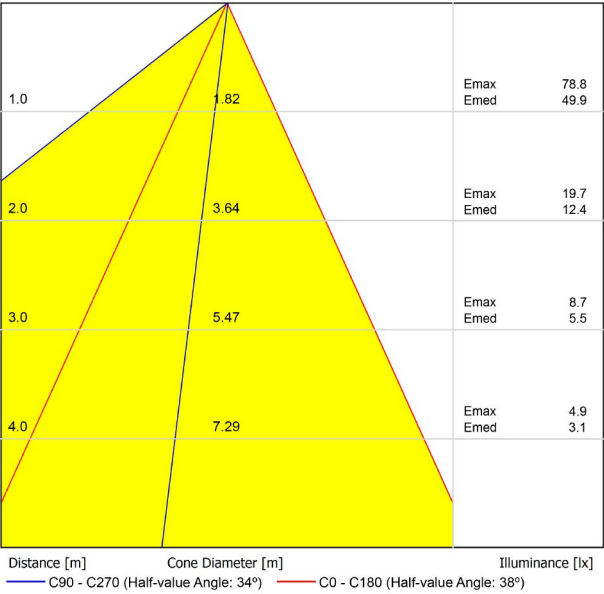

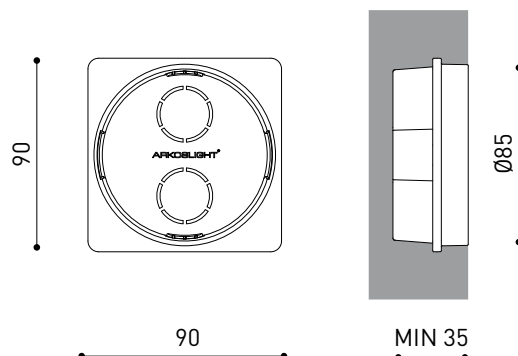

PRODUCT	
Model	Rhino Concrete box Accessory
Reference	A351-90-00
Category	Accessories




Rhino's auxiliary box allows it to be installed inside concrete walls. (It is not needed when installed in cardboard or plaster walls).

This accessory can be purchased independently, for the subsequent placement of Rhino once the works have been finished.



DIMENSIONS



ACCESSORIES



CONCRETE BOX ACCESSORY

AWARDS



Name	RHINO 3000K NT
Reference	A3510011NT
Color	Textured black
RAL	9005
Category	WALL & FLOOR LIGHTS

PRODUCT

Light source	LED
Gross luminous flux	205 Lm
Power	2 W
Power values of the system	3,08 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 3
Light beam angle	35°
Lighting efficiency	90%
Efficacy	103 Lm/W
Current intensity	700 mA
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	□
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A++
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


OTHER DATA

Ingress Protection	IP20
Recess measurements	Ø79 mm.
Weight	169 g.
Packaged weight	210 g.
Packaging dimensions	110 × 100 × 72 mm
Units per package	1
Materials	Aluminium / Polycarbonate





Rhino is a floor wash light that stands out slightly from the wall, cleanly and directly projecting the light obliquely. By doing so, it breaks away from the two design dogmas of this type of luminaire: it relinquishes absolute recessed installation and avoids directing the beam to the exterior, availing itself of rebound surfaces. With this, it has the advantage of being a luminaire with outstanding light efficiency –among its alternatives – defining it from the aesthetic viewpoint.

POLAR DIAGRAM

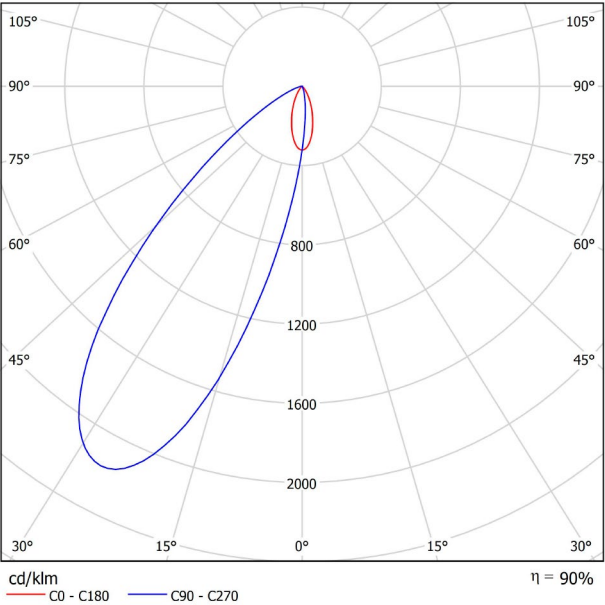

CONICAL DIAGRAM

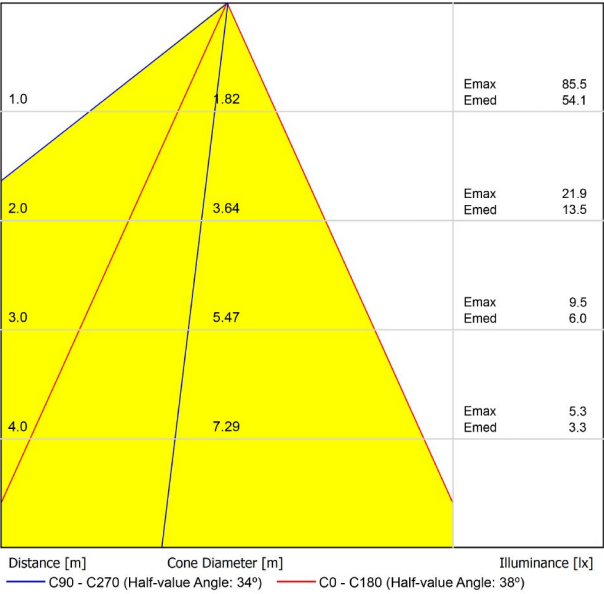

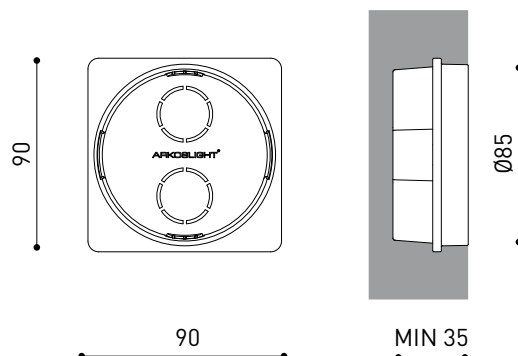

PRODUCT	
Model	Rhino Concrete box Accessory
Reference	A351-90-00
Category	Accessories




Rhino's auxiliary box allows it to be installed inside concrete walls. (It is not needed when installed in cardboard or plaster walls).

This accessory can be purchased independently, for the subsequent placement of Rhino once the works have been finished.



DIMENSIONS



ACCESSORIES



CONCRETE BOX ACCESSORY

AWARDS



Name	RHINO 3000K WT
Reference	A3510011WT
Color	Textured white
RAL	9016
Category	WALL & FLOOR LIGHTS

PRODUCT

Light source	LED
Gross luminous flux	205 Lm
Power	2 W
Power values of the system	3,08 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 3
Light beam angle	35°
Lighting efficiency	90%
Efficacy	103 Lm/W
Current intensity	700 mA
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A++
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


OTHER DATA

Ingress Protection	IP20
Recess measurements	Ø79 mm.
Weight	169 g.
Packaged weight	210 g.
Packaging dimensions	110 x 100 x 72 mm
Units per package	1
Materials	Aluminium / Polycarbonate





Rhino is a floor wash light that stands out slightly from the wall, cleanly and directly projecting the light obliquely. By doing so, it breaks away from the two design dogmas of this type of luminaire: it relinquishes absolute recessed installation and avoids directing the beam to the exterior, availing itself of rebound surfaces. With this, it has the advantage of being a luminaire with outstanding light efficiency –among its alternatives – defining it from the aesthetic viewpoint.

POLAR DIAGRAM

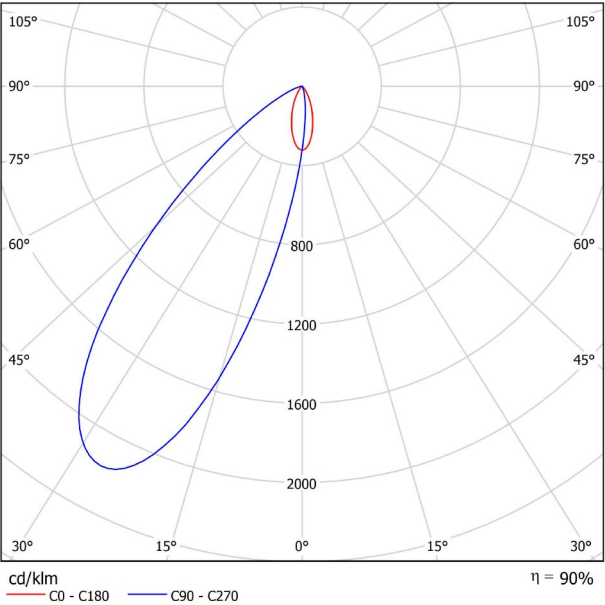

CONICAL DIAGRAM

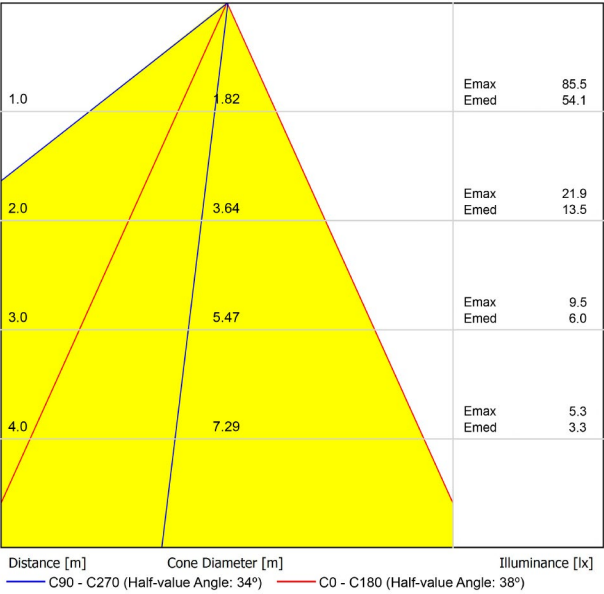

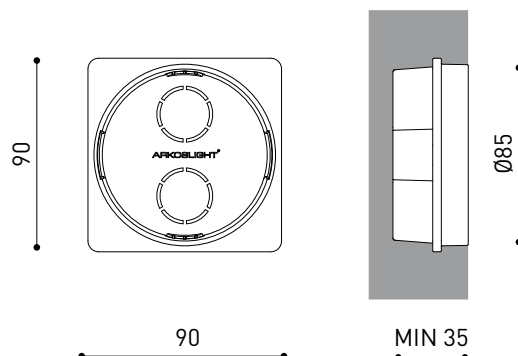

PRODUCT	
Model	Rhino Concrete box Accessory
Reference	A351-90-00
Category	Accessories



Rhino's auxiliary box allows it to be installed inside concrete walls. (It is not needed when installed in cardboard or plaster walls).

This accessory can be purchased independently, for the subsequent placement of Rhino once the works have been finished.