


DIMENSIONS



AWARDS



Name	BLACK FOSTER SURF 3 SPOT 4000K WTMG
Reference	A3203112WTMG
Color	Textured white-Metallized gold
RAL	Metallic finish
Category	SURFACE

PRODUCT

Light source	LED
Gross luminous flux	750 Lm
Power	6,3 W
Power values of the system	8,40 W
Colour temperature	4000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 3
Light beam angle	19°
Lighting efficiency	90%
Efficacy	119 Lm/W
Current intensity	700 mA
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


Ingress Protection	IP20
Weight	490 g.
Packaged weight	530 g.
Packaging dimensions	175 × 93 × 70 mm
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene / Polycarbonate

OTHER DATA




Black Foster Surface is the product that transfers the claimed effect “The Invisible Black” to a linear system in surface application. Black Foster has a very discrete presence in the interior design due to its reduced dimensions and its extremely low glare helping the piece not to gain much prominence.

POLAR DIAGRAM

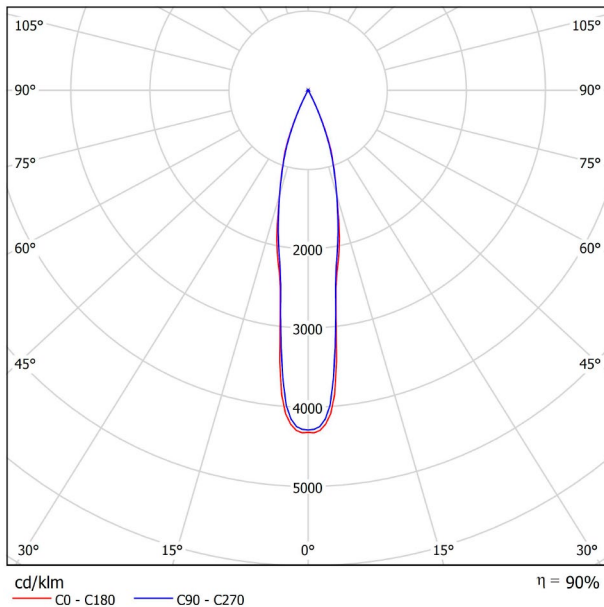

CONICAL DIAGRAM

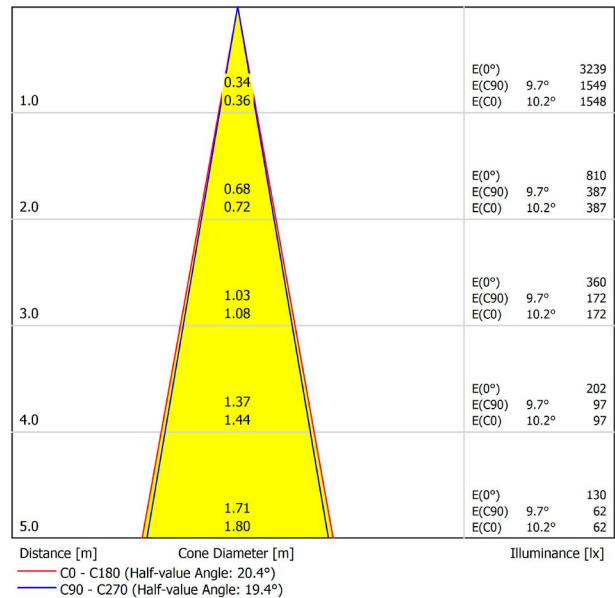


UGR

Glare Evaluation According to UGR												
ρ Ceiling		70	70	50	50	30	70	70	50	50	30	30
ρ Walls		50	30	50	30	30	50	30	50	30	30	30
ρ Floor		20	20	20	20	20	20	20	20	20	20	20
Room Size X Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis					
2H	2H	6.1	6.7	6.3	6.9	7.1	6.1	6.8	6.4	7.0	7.2	
	3H	9.6	10.2	9.9	10.5	10.7	9.7	10.3	10.0	10.5	10.8	
	4H	11.5	12.1	11.8	12.3	12.6	11.6	12.2	11.9	12.4	12.7	
	6H	13.6	14.2	13.9	14.4	14.7	13.6	14.2	13.9	14.4	14.7	
	8H	14.8	15.3	15.2	15.6	15.9	14.9	15.4	15.2	15.7	16.0	
4H	12H	16.2	16.7	16.5	17.0	17.3	16.3	16.8	16.6	17.1	17.4	
	2H	7.1	7.7	7.4	7.9	8.2	7.2	7.8	7.5	8.0	8.3	
	3H	10.9	11.4	11.3	11.7	12.0	11.0	11.5	11.3	11.8	12.1	
	4H	13.0	13.4	13.3	13.7	14.1	13.1	13.5	13.5	13.9	14.2	
	6H	15.2	15.6	15.6	16.0	16.3	15.3	15.6	15.7	16.0	16.4	
8H	8H	16.6	16.9	17.0	17.3	17.7	16.7	17.0	17.1	17.4	17.8	
	12H	18.0	18.3	18.5	18.7	19.1	18.1	18.4	18.6	18.8	19.2	
	4H	13.8	14.1	14.2	14.5	14.9	13.9	14.2	14.3	14.6	15.0	
	6H	16.3	16.6	16.8	17.0	17.4	16.4	16.6	16.8	17.0	17.5	
	8H	17.8	18.0	18.3	18.5	18.9	17.9	18.1	18.4	18.6	19.0	
12H	12H	19.5	19.7	20.0	20.1	20.6	19.6	19.8	20.1	20.2	20.7	
	4H	14.0	14.3	14.5	14.7	15.1	14.1	14.4	14.6	14.8	15.2	
	6H	16.7	16.9	17.2	17.3	17.8	16.7	16.9	17.2	17.4	17.8	
	8H	18.3	18.5	18.8	18.9	19.4	18.4	18.5	18.8	19.0	19.5	
	Variation of the observer position for the luminaire distances S											
S = 1.0H		+0.2 / -0.2					+0.2 / -0.2					
S = 1.5H		+0.3 / -0.3					+0.3 / -0.3					
S = 2.0H		+0.5 / -0.6					+0.5 / -0.6					
Standard table		---					---					
Correction Summand		---					---					
Corrected Glare Indices referring to 750lm Total Luminous Flux												



DIMENSIONS



AWARDS



Name	BLACK FOSTER SURF 3 SPOT 2700K NT
Reference	A3203110NT
Color	Textured black
RAL	9005
Category	SURFACE

PRODUCT

Light source	LED
Gross luminous flux	570 Lm
Power	6,3 W
Power values of the system	8,40 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 3
Light beam angle	19°
Lighting efficiency	90%
Efficacy	90 Lm/W
Current intensity	700 mA
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


Ingress Protection	IP20
Weight	490 g.
Packaged weight	530 g.
Packaging dimensions	175 x 93 x 70 mm
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene / Polycarbonate

OTHER DATA




Black Foster Surface is the product that transfers the claimed effect "The Invisible Black" to a linear system in surface application. Black Foster has a very discrete presence in the interior design due to its reduced dimensions and its extremely low glare helping the piece not to gain much prominence.

POLAR DIAGRAM

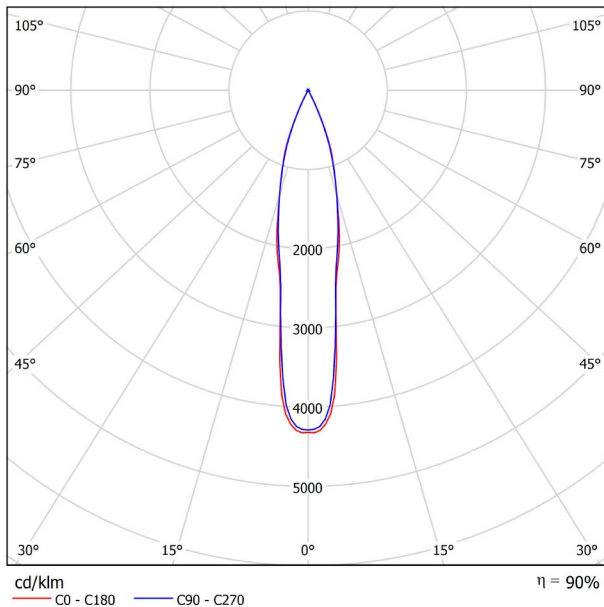

CONICAL DIAGRAM

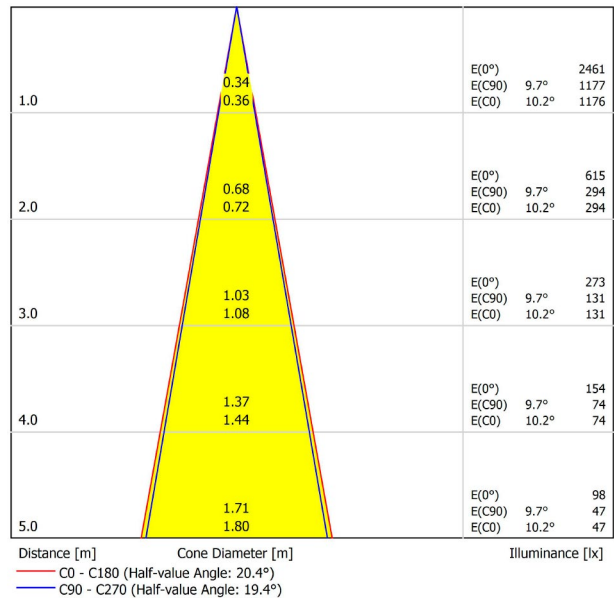


UGR

Glare Evaluation According to UGR												
ρ Ceiling		70	70	50	50	30	70	70	50	50	30	
ρ Walls		50	30	50	30	30	50	30	50	30	30	
ρ Floor		20	20	20	20	20	20	20	20	20	20	
Room Size X Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis					
2H	2H	5.1	5.8	5.4	6.0	6.2	5.2	5.9	5.4	6.1	6.3	
	3H	8.7	9.3	8.9	9.5	9.8	8.7	9.4	9.0	9.6	9.8	
	4H	10.5	11.1	10.8	11.4	11.6	10.6	11.2	10.9	11.5	11.7	
	6H	12.6	13.2	13.0	13.5	13.8	12.7	13.2	13.0	13.5	13.8	
	8H	13.9	14.4	14.2	14.7	15.0	14.0	14.5	14.3	14.8	15.1	
4H	12H	15.2	15.7	15.6	16.0	16.3	15.3	15.8	15.7	16.1	16.4	
	2H	6.1	6.7	6.4	7.0	7.2	6.2	6.8	6.5	7.0	7.3	
	3H	10.0	10.5	10.3	10.8	11.1	10.0	10.5	10.4	10.8	11.1	
	4H	12.0	12.4	12.4	12.8	13.1	12.1	12.6	12.5	12.9	13.2	
	6H	14.3	14.7	14.7	15.0	15.4	14.3	14.7	14.7	15.0	15.4	
8H	8H	15.6	15.9	16.0	16.3	16.7	15.7	16.0	16.1	16.4	16.8	
	12H	17.1	17.4	17.5	17.8	18.2	17.2	17.5	17.6	17.9	18.3	
	4H	12.8	13.2	13.3	13.6	14.0	12.9	13.3	13.4	13.7	14.1	
	6H	15.4	15.6	15.8	16.1	16.5	15.4	15.6	15.8	16.1	16.5	
	8H	16.9	17.1	17.3	17.5	18.0	17.0	17.2	17.4	17.6	18.1	
12H	12H	18.5	18.7	19.0	19.2	19.7	18.6	18.8	19.1	19.3	19.8	
	4H	13.1	13.4	13.5	13.8	14.2	13.2	13.5	13.6	13.9	14.3	
	6H	15.7	16.0	16.2	16.4	16.9	15.8	16.0	16.2	16.4	16.9	
	8H	17.3	17.5	17.8	18.0	18.5	17.4	17.6	17.9	18.0	18.5	
Variation of the observer position for the luminaire distances S												
S = 1.0H		+0.2 / -0.2					+0.2 / -0.2					
S = 1.5H		+0.3 / -0.3					+0.3 / -0.3					
S = 2.0H		+0.5 / -0.6					+0.5 / -0.6					
Standard table		---					---					
Correction		---					---					
Summand												
Corrected Glare Indices referring to 570lm Total Luminous Flux												



DIMENSIONS



AWARDS



Name	BLACK FOSTER SURF 3 SPOT 2700K NTMG
Reference	A3203110NTMG
Color	Textured black-Metallized gold
RAL	Metallic finish
Category	SURFACE

PRODUCT

Light source	LED
Gross luminous flux	570 Lm
Power	6,3 W
Power values of the system	8,40 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 3
Light beam angle	19°
Lighting efficiency	90%
Efficacy	90 Lm/W
Current intensity	700 mA
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	□
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


Ingress Protection	IP20
Weight	490 g.
Packaged weight	530 g.
Packaging dimensions	175 × 93 × 70 mm
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene / Polycarbonate

OTHER DATA




Black Foster Surface is the product that transfers the claimed effect "The Invisible Black" to a linear system in surface application. Black Foster has a very discrete presence in the interior design due to its reduced dimensions and its extremely low glare helping the piece not to gain much prominence.

POLAR DIAGRAM

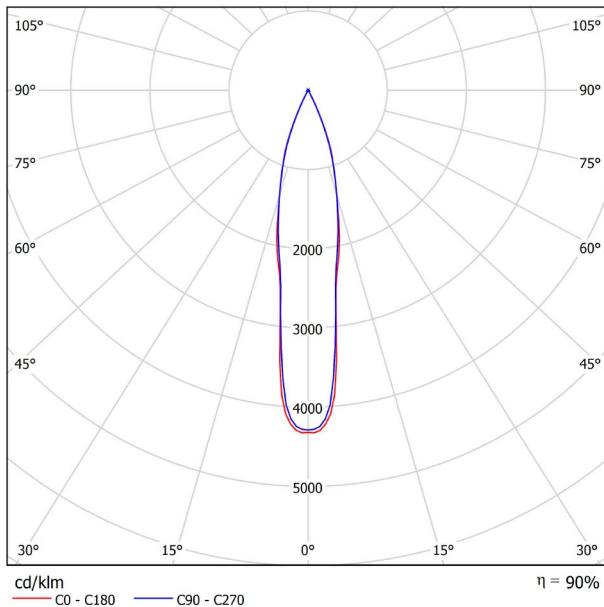

CONICAL DIAGRAM

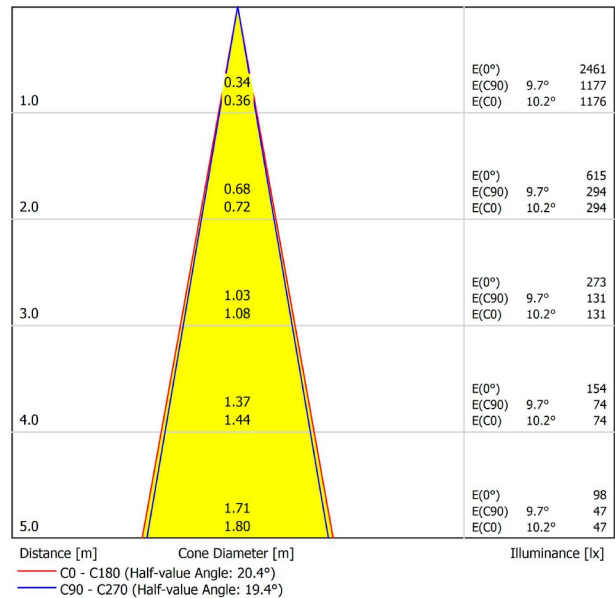


UGR

Glare Evaluation According to UGR												
ρ Ceiling		70	70	50	50	30	70	70	50	50	30	
ρ Walls		50	30	50	30	30	50	30	50	30	30	
ρ Floor		20	20	20	20	20	20	20	20	20	20	
Room Size X Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis					
2H	2H	5.1	5.8	5.4	6.0	6.2	5.2	5.9	5.4	6.1	6.3	
	3H	8.7	9.3	8.9	9.5	9.8	8.7	9.4	9.0	9.6	9.8	
	4H	10.5	11.1	10.8	11.4	11.6	10.6	11.2	10.9	11.5	11.7	
	6H	12.6	13.2	13.0	13.5	13.8	12.7	13.2	13.0	13.5	13.8	
	8H	13.9	14.4	14.2	14.7	15.0	14.0	14.5	14.3	14.8	15.1	
4H	12H	15.2	15.7	15.6	16.0	16.3	15.3	15.8	15.7	16.1	16.4	
	2H	6.1	6.7	6.4	7.0	7.2	6.2	6.8	6.5	7.0	7.3	
	3H	10.0	10.5	10.3	10.8	11.1	10.0	10.5	10.4	10.8	11.1	
	4H	12.0	12.4	12.4	12.8	13.1	12.1	12.6	12.5	12.9	13.2	
	6H	14.3	14.7	14.7	15.0	15.4	14.3	14.7	14.7	15.0	15.4	
8H	8H	15.6	15.9	16.0	16.3	16.7	15.7	16.0	16.1	16.4	16.8	
	12H	17.1	17.4	17.5	17.8	18.2	17.2	17.5	17.6	17.9	18.3	
	4H	12.8	13.2	13.3	13.6	14.0	12.9	13.3	13.4	13.7	14.1	
	6H	15.4	15.6	15.8	16.1	16.5	15.4	15.6	15.8	16.1	16.5	
	8H	16.9	17.1	17.3	17.5	18.0	17.0	17.2	17.4	17.6	18.1	
12H	12H	18.5	18.7	19.0	19.2	19.7	18.6	18.8	19.1	19.3	19.8	
	4H	13.1	13.4	13.5	13.8	14.2	13.2	13.5	13.6	13.9	14.3	
	6H	15.7	16.0	16.2	16.4	16.9	15.8	16.0	16.2	16.4	16.9	
	8H	17.3	17.5	17.8	18.0	18.5	17.4	17.6	17.9	18.0	18.5	
Variation of the observer position for the luminaire distances S												
S = 1.0H		+0.2 / -0.2					+0.2 / -0.2					
S = 1.5H		+0.3 / -0.3					+0.3 / -0.3					
S = 2.0H		+0.5 / -0.6					+0.5 / -0.6					
Standard table		---					---					
Correction Summand		---					---					
Corrected Glare Indices referring to 570lm Total Luminous Flux												



DIMENSIONS



AWARDS



Name	BLACK FOSTER SURF 3 SPOT 2700K WT
Reference	A3203110WT
Color	Textured white
RAL	9016
Category	SURFACE

PRODUCT

Light source	LED
Gross luminous flux	570 Lm
Power	6,3 W
Power values of the system	8,40 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 3
Light beam angle	19°
Lighting efficiency	90%
Efficacy	90 Lm/W
Current intensity	700 mA
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


Ingress Protection	IP20
Weight	490 g.
Packaged weight	530 g.
Packaging dimensions	175 x 93 x 70 mm
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene / Polycarbonate

OTHER DATA




Black Foster Surface is the product that transfers the claimed effect "The Invisible Black" to a linear system in surface application. Black Foster has a very discrete presence in the interior design due to its reduced dimensions and its extremely low glare helping the piece not to gain much prominence.

POLAR DIAGRAM

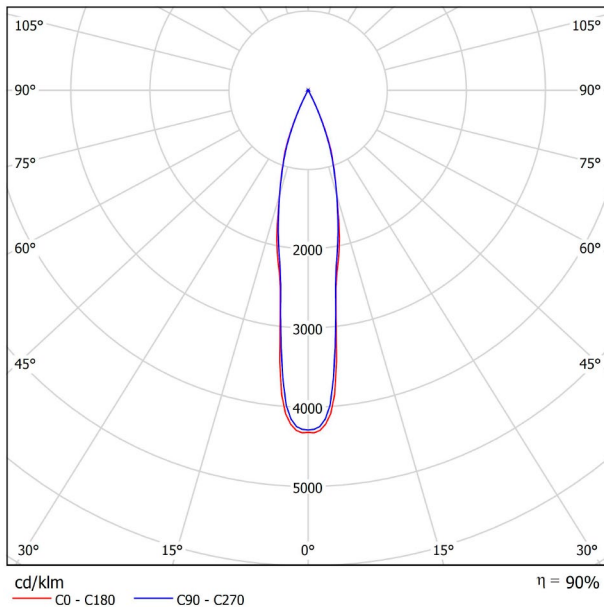


CONICAL DIAGRAM

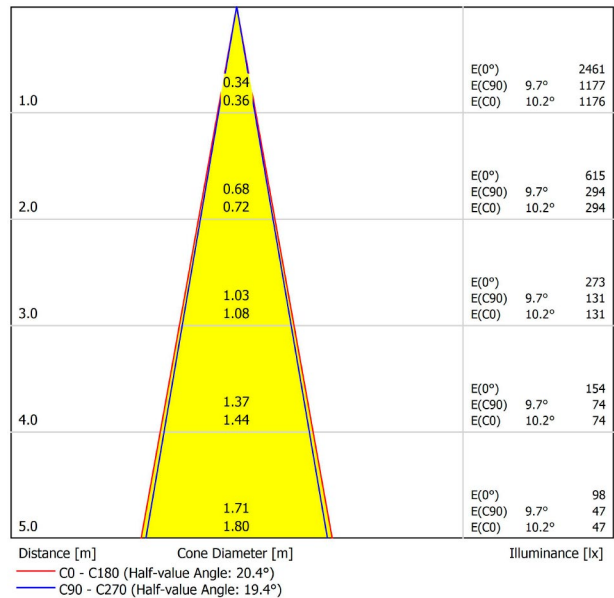


UGR

Glare Evaluation According to UGR												
ρ Ceiling		70	70	50	50	30	70	70	50	50	30	
ρ Walls		50	30	50	30	30	50	30	50	30	30	
ρ Floor		20	20	20	20	20	20	20	20	20	20	
Room Size X Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis					
2H	2H	5.1	5.8	5.4	6.0	6.2	5.2	5.9	5.4	6.1	6.3	
	3H	8.7	9.3	8.9	9.5	9.8	8.7	9.4	9.0	9.6	9.8	
	4H	10.5	11.1	10.8	11.4	11.6	10.6	11.2	10.9	11.5	11.7	
	6H	12.6	13.2	13.0	13.5	13.8	12.7	13.2	13.0	13.5	13.8	
	8H	13.9	14.4	14.2	14.7	15.0	14.0	14.5	14.3	14.8	15.1	
4H	12H	15.2	15.7	15.6	16.0	16.3	15.3	15.8	15.7	16.1	16.4	
	2H	6.1	6.7	6.4	7.0	7.2	6.2	6.8	6.5	7.0	7.3	
	3H	10.0	10.5	10.3	10.8	11.1	10.0	10.5	10.4	10.8	11.1	
	4H	12.0	12.4	12.4	12.8	13.1	12.1	12.6	12.5	12.9	13.2	
	6H	14.3	14.7	14.7	15.0	15.4	14.3	14.7	14.7	15.0	15.4	
8H	8H	15.6	15.9	16.0	16.3	16.7	15.7	16.0	16.1	16.4	16.8	
	12H	17.1	17.4	17.5	17.8	18.2	17.2	17.5	17.6	17.9	18.3	
	4H	12.8	13.2	13.3	13.6	14.0	12.9	13.3	13.4	13.7	14.1	
	6H	15.4	15.6	15.8	16.1	16.5	15.4	15.6	15.8	16.1	16.5	
	8H	16.9	17.1	17.3	17.5	18.0	17.0	17.2	17.4	17.6	18.1	
12H	12H	18.5	18.7	19.0	19.2	19.7	18.6	18.8	19.1	19.3	19.8	
	4H	13.1	13.4	13.5	13.8	14.2	13.2	13.5	13.6	13.9	14.3	
	6H	15.7	16.0	16.2	16.4	16.9	15.8	16.0	16.2	16.4	16.9	
	8H	17.3	17.5	17.8	18.0	18.5	17.4	17.6	17.9	18.0	18.5	
	Variation of the observer position for the luminaire distances S											
S = 1.0H		+0.2 / -0.2					+0.2 / -0.2					
S = 1.5H		+0.3 / -0.3					+0.3 / -0.3					
S = 2.0H		+0.5 / -0.6					+0.5 / -0.6					
Standard table		---					---					
Correction		---					---					
Summand		---					---					
Corrected Glare Indices referring to 570lm Total Luminous Flux												



DIMENSIONS



AWARDS



Name	BLACK FOSTER SURF 3 SPOT 2700K WTMG
Reference	A3203110WTMG
Color	Textured white-Metallized gold
RAL	Metallic finish
Category	SURFACE

PRODUCT

Light source	LED
Gross luminous flux	570 Lm
Power	6,3 W
Power values of the system	8,40 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 3
Light beam angle	19°
Lighting efficiency	90%
Efficacy	90 Lm/W
Current intensity	700 mA
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


Ingress Protection	IP20
Weight	490 g.
Packaged weight	530 g.
Packaging dimensions	175 x 93 x 70 mm
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene / Polycarbonate

OTHER DATA




Black Foster Surface is the product that transfers the claimed effect "The Invisible Black" to a linear system in surface application. Black Foster has a very discrete presence in the interior design due to its reduced dimensions and its extremely low glare helping the piece not to gain much prominence.

POLAR DIAGRAM

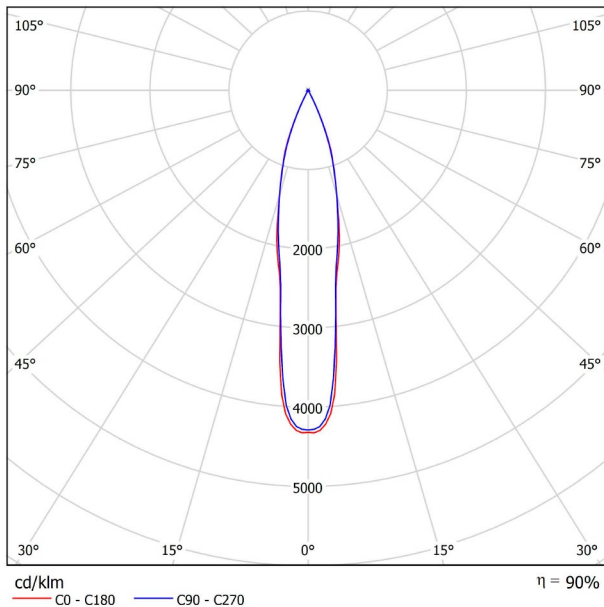

CONICAL DIAGRAM

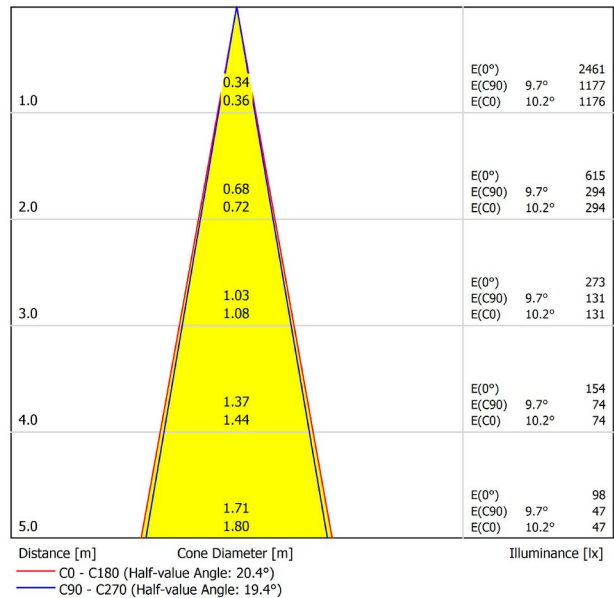


UGR

Glare Evaluation According to UGR												
ρ Ceiling		70	70	50	50	30	70	70	50	50	30	
ρ Walls		50	30	50	30	30	50	30	50	30	30	
ρ Floor		20	20	20	20	20	20	20	20	20	20	
Room Size X Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis					
2H	2H	5.1	5.8	5.4	6.0	6.2	5.2	5.9	5.4	6.1	6.3	
	3H	8.7	9.3	8.9	9.5	9.8	8.7	9.4	9.0	9.6	9.8	
	4H	10.5	11.1	10.8	11.4	11.6	10.6	11.2	10.9	11.5	11.7	
	6H	12.6	13.2	13.0	13.5	13.8	12.7	13.2	13.0	13.5	13.8	
	8H	13.9	14.4	14.2	14.7	15.0	14.0	14.5	14.3	14.8	15.1	
4H	12H	15.2	15.7	15.6	16.0	16.3	15.3	15.8	15.7	16.1	16.4	
	2H	6.1	6.7	6.4	7.0	7.2	6.2	6.8	6.5	7.0	7.3	
	3H	10.0	10.5	10.3	10.8	11.1	10.0	10.5	10.4	10.8	11.1	
	4H	12.0	12.4	12.4	12.8	13.1	12.1	12.6	12.5	12.9	13.2	
	6H	14.3	14.7	14.7	15.0	15.4	14.3	14.7	14.7	15.0	15.4	
8H	8H	15.6	15.9	16.0	16.3	16.7	15.7	16.0	16.1	16.4	16.8	
	12H	17.1	17.4	17.5	17.8	18.2	17.2	17.5	17.6	17.9	18.3	
	4H	12.8	13.2	13.3	13.6	14.0	12.9	13.3	13.4	13.7	14.1	
	6H	15.4	15.6	15.8	16.1	16.5	15.4	15.6	15.8	16.1	16.5	
	8H	16.9	17.1	17.3	17.5	18.0	17.0	17.2	17.4	17.6	18.1	
12H	12H	18.5	18.7	19.0	19.2	19.7	18.6	18.8	19.1	19.3	19.8	
	4H	13.1	13.4	13.5	13.8	14.2	13.2	13.5	13.6	13.9	14.3	
	6H	15.7	16.0	16.2	16.4	16.9	15.8	16.0	16.2	16.4	16.9	
	8H	17.3	17.5	17.8	18.0	18.5	17.4	17.6	17.9	18.0	18.5	
	Variation of the observer position for the luminaire distances S											
S = 1.0H		+0.2 / -0.2					+0.2 / -0.2					
S = 1.5H		+0.3 / -0.3					+0.3 / -0.3					
S = 2.0H		+0.5 / -0.6					+0.5 / -0.6					
Standard table		---					---					
Correction		---					---					
Summand		---					---					
Corrected Glare Indices referring to 570lm Total Luminous Flux												



DIMENSIONS



AWARDS



Name	BLACK FOSTER SURF 3 SPOT 3000K NT
Reference	A3203111NT
Color	Textured black
RAL	9005
Category	SURFACE

PRODUCT

Light source	LED
Gross luminous flux	630 Lm
Power	6,3 W
Power values of the system	8,40 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 3
Light beam angle	19°
Lighting efficiency	90%
Efficacy	100 Lm/W
Current intensity	700 mA
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	□
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


Ingress Protection	IP20
Weight	490 g.
Packaged weight	530 g.
Packaging dimensions	175 × 93 × 70 mm
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene / Polycarbonate

OTHER DATA




Black Foster Surface is the product that transfers the claimed effect "The Invisible Black" to a linear system in surface application. Black Foster has a very discrete presence in the interior design due to its reduced dimensions and its extremely low glare helping the piece not to gain much prominence.

POLAR DIAGRAM

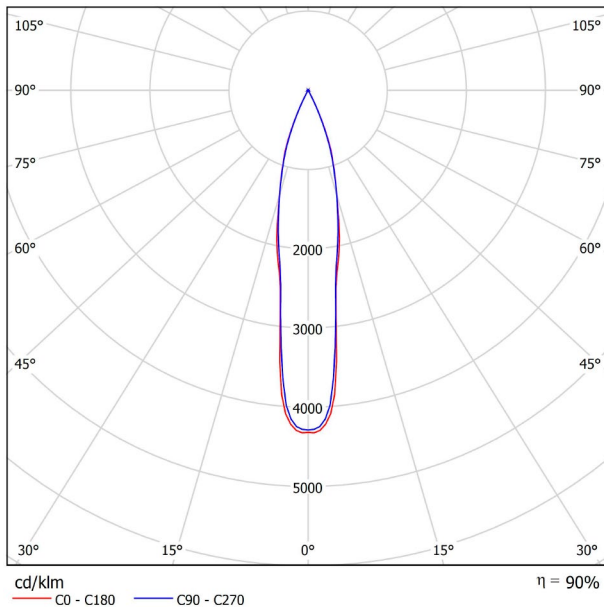

CONICAL DIAGRAM

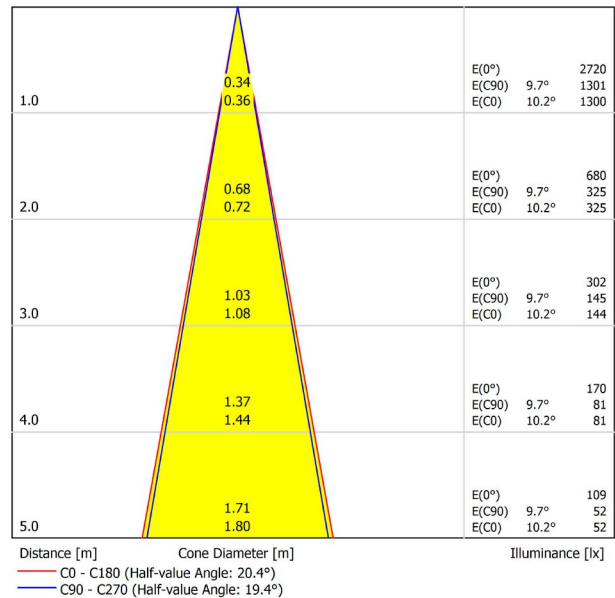


UGR

Glare Evaluation According to UGR												
ρ Ceiling		70	70	50	50	30	70	70	50	50	30	
ρ Walls		50	30	50	30	30	50	30	50	30	30	
ρ Floor		20	20	20	20	20	20	20	20	20	20	
Room Size X Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis					
2H	2H	5.5	6.1	5.7	6.3	6.5	5.5	6.2	5.8	6.4	6.6	
	3H	9.0	9.6	9.3	9.9	10.1	9.1	9.7	9.4	9.9	10.2	
	4H	10.9	11.5	11.2	11.7	12.0	11.0	11.6	11.3	11.8	12.1	
	6H	13.0	13.5	13.3	13.8	14.1	13.0	13.6	13.3	13.8	14.1	
	8H	14.2	14.7	14.6	15.0	15.3	14.3	14.8	14.6	15.1	15.4	
4H	12H	15.6	16.1	15.9	16.4	16.7	15.7	16.2	16.0	16.5	16.8	
	2H	6.5	7.1	6.8	7.3	7.6	6.6	7.1	6.9	7.4	7.7	
	3H	10.3	10.8	10.7	11.1	11.4	10.4	10.9	10.7	11.2	11.5	
	4H	12.4	12.8	12.7	13.1	13.5	12.5	12.9	12.9	13.3	13.6	
	6H	14.6	15.0	15.0	15.4	15.7	14.7	15.0	15.1	15.4	15.8	
8H	8H	16.0	16.3	16.4	16.7	17.1	16.1	16.4	16.5	16.8	17.2	
	12H	17.4	17.7	17.9	18.1	18.5	17.5	17.8	18.0	18.2	18.6	
	4H	13.2	13.5	13.6	13.9	14.3	13.3	13.6	13.7	14.0	14.4	
	6H	15.7	16.0	16.2	16.4	16.8	15.7	16.0	16.2	16.4	16.9	
	8H	17.2	17.4	17.7	17.9	18.3	17.3	17.5	17.8	18.0	18.4	
12H	12H	18.9	19.1	19.4	19.5	20.0	19.0	19.2	19.5	19.6	20.1	
	4H	13.4	13.7	13.9	14.1	14.5	13.5	13.8	14.0	14.2	14.6	
	6H	16.1	16.3	16.6	16.7	17.2	16.1	16.3	16.6	16.8	17.2	
	8H	17.7	17.8	18.2	18.3	18.8	17.7	17.9	18.2	18.4	18.9	
Variation of the observer position for the luminaire distances S												
S = 1.0H		+0.2 / -0.2					+0.2 / -0.2					
S = 1.5H		+0.3 / -0.3					+0.3 / -0.3					
S = 2.0H		+0.5 / -0.6					+0.5 / -0.6					
Standard table		---					---					
Correction		---					---					
Summand												
Corrected Glare Indices referring to 630lm Total Luminous Flux												



DIMENSIONS



AWARDS



Name	BLACK FOSTER SURF 3 SPOT 3000K NTMG
Reference	A3203111NTMG
Color	Textured black-Metallized gold
RAL	Metallic finish
Category	SURFACE

PRODUCT

Light source	LED
Gross luminous flux	630 Lm
Power	6,3 W
Power values of the system	8,40 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 3
Light beam angle	19°
Lighting efficiency	90%
Efficacy	100 Lm/W
Current intensity	700 mA
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


Ingress Protection	IP20
Weight	490 g.
Packaged weight	530 g.
Packaging dimensions	175 × 93 × 70 mm
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene / Polycarbonate

OTHER DATA




Black Foster Surface is the product that transfers the claimed effect "The Invisible Black" to a linear system in surface application. Black Foster has a very discrete presence in the interior design due to its reduced dimensions and its extremely low glare helping the piece not to gain much prominence.

POLAR DIAGRAM

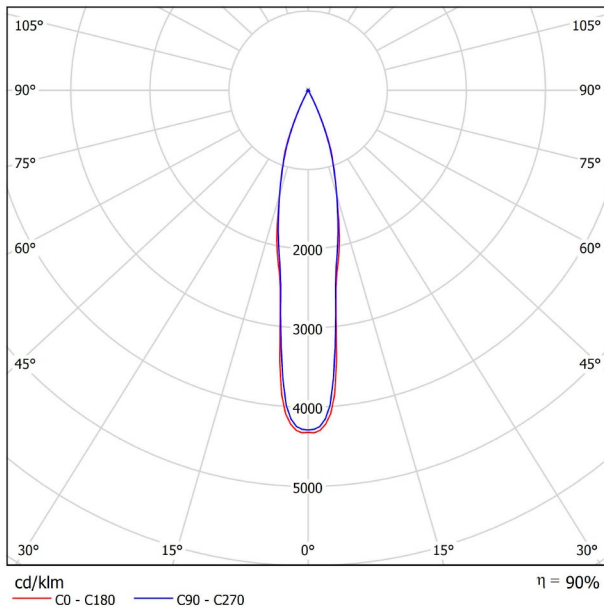

CONICAL DIAGRAM

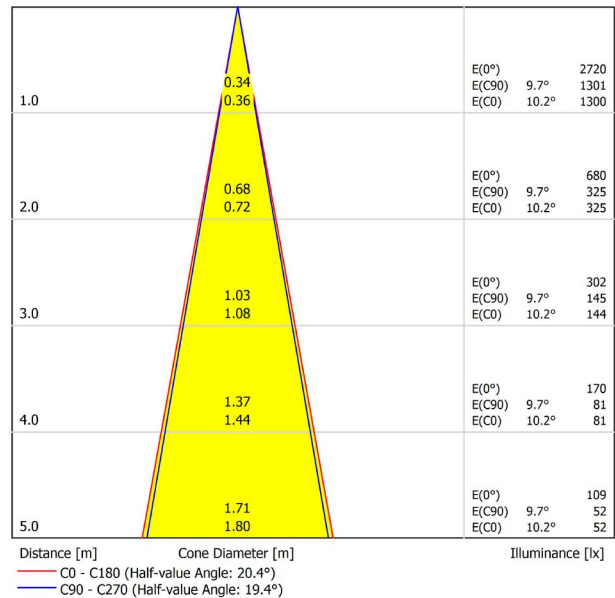


UGR

Glare Evaluation According to UGR												
ρ Ceiling		70	70	50	50	30	70	70	50	50	30	
ρ Walls		50	30	50	30	30	50	30	50	30	30	
ρ Floor		20	20	20	20	20	20	20	20	20	20	
Room Size X Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis					
2H	2H	5.5	6.1	5.7	6.3	6.5	5.5	6.2	5.8	6.4	6.6	
	3H	9.0	9.6	9.3	9.9	10.1	9.1	9.7	9.4	9.9	10.2	
	4H	10.9	11.5	11.2	11.7	12.0	11.0	11.6	11.3	11.8	12.1	
	6H	13.0	13.5	13.3	13.8	14.1	13.0	13.6	13.3	13.8	14.1	
	8H	14.2	14.7	14.6	15.0	15.3	14.3	14.8	14.6	15.1	15.4	
4H	12H	15.6	16.1	15.9	16.4	16.7	15.7	16.2	16.0	16.5	16.8	
	2H	6.5	7.1	6.8	7.3	7.6	6.6	7.1	6.9	7.4	7.7	
	3H	10.3	10.8	10.7	11.1	11.4	10.4	10.9	10.7	11.2	11.5	
	4H	12.4	12.8	12.7	13.1	13.5	12.5	12.9	12.9	13.3	13.6	
	6H	14.6	15.0	15.0	15.4	15.7	14.7	15.0	15.1	15.4	15.8	
8H	8H	16.0	16.3	16.4	16.7	17.1	16.1	16.4	16.5	16.8	17.2	
	12H	17.4	17.7	17.9	18.1	18.5	17.5	17.8	18.0	18.2	18.6	
	4H	13.2	13.5	13.6	13.9	14.3	13.3	13.6	13.7	14.0	14.4	
	6H	15.7	16.0	16.2	16.4	16.8	15.7	16.0	16.2	16.4	16.9	
	8H	17.2	17.4	17.7	17.9	18.3	17.3	17.5	17.8	18.0	18.4	
12H	12H	18.9	19.1	19.4	19.5	20.0	19.0	19.2	19.5	19.6	20.1	
	4H	13.4	13.7	13.9	14.1	14.5	13.5	13.8	14.0	14.2	14.6	
	6H	16.1	16.3	16.6	16.7	17.2	16.1	16.3	16.6	16.8	17.2	
	8H	17.7	17.8	18.2	18.3	18.8	17.7	17.9	18.2	18.4	18.9	
Variation of the observer position for the luminaire distances S												
S = 1.0H		+0.2 / -0.2					+0.2 / -0.2					
S = 1.5H		+0.3 / -0.3					+0.3 / -0.3					
S = 2.0H		+0.5 / -0.6					+0.5 / -0.6					
Standard table		---					---					
Correction		---					---					
Summand												
Corrected Glare Indices referring to 630lm Total Luminous Flux												



DIMENSIONS



AWARDS



Name	BLACK FOSTER SURF 3 SPOT 3000K WT
Reference	A3203111WT
Color	Textured white
RAL	9016
Category	SURFACE

PRODUCT

Light source	LED
Gross luminous flux	630 Lm
Power	6,3 W
Power values of the system	8,40 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 3
Light beam angle	19°
Lighting efficiency	90%
Efficacy	100 Lm/W
Current intensity	700 mA
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


Ingress Protection	IP20
Weight	490 g.
Packaged weight	530 g.
Packaging dimensions	175 × 93 × 70 mm
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene / Polycarbonate

OTHER DATA




Black Foster Surface is the product that transfers the claimed effect “The Invisible Black” to a linear system in surface application. Black Foster has a very discrete presence in the interior design due to its reduced dimensions and its extremely low glare helping the piece not to gain much prominence.

POLAR DIAGRAM

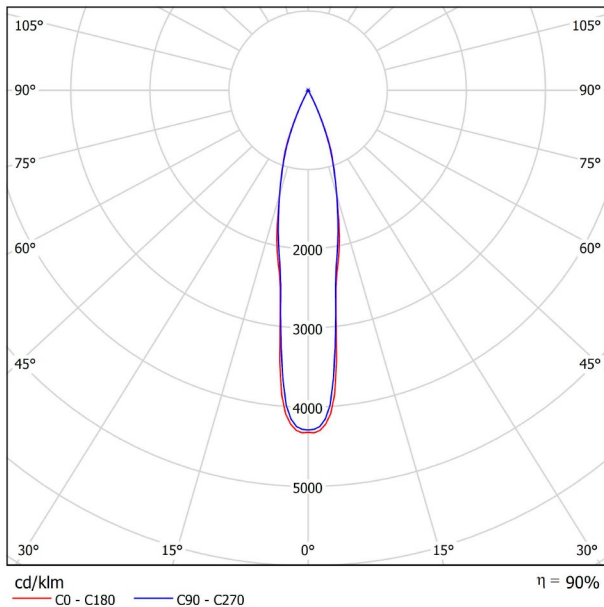


CONICAL DIAGRAM

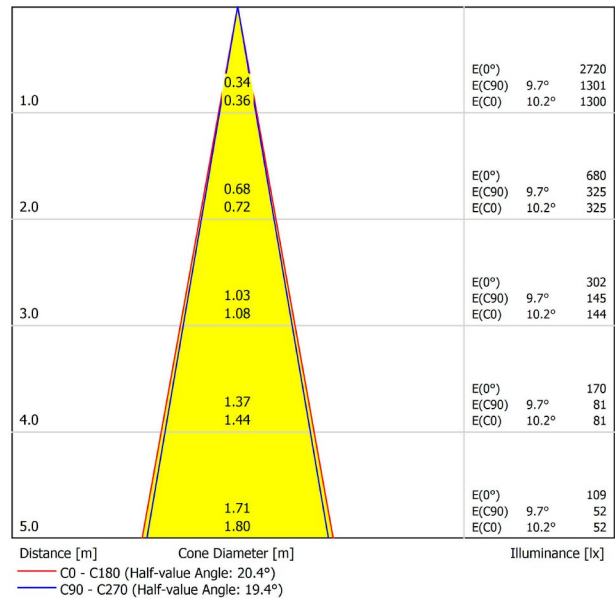


UGR

Glare Evaluation According to UGR												
ρ Ceiling		70	70	50	50	30	70	70	50	50	30	
ρ Walls		50	30	50	30	30	50	30	50	30	30	
ρ Floor		20	20	20	20	20	20	20	20	20	20	
Room Size X Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis					
2H	2H	5.5	6.1	5.7	6.3	6.5	5.5	6.2	5.8	6.4	6.6	
	3H	9.0	9.6	9.3	9.9	10.1	9.1	9.7	9.4	9.9	10.2	
	4H	10.9	11.5	11.2	11.7	12.0	11.0	11.6	11.3	11.8	12.1	
	6H	13.0	13.5	13.3	13.8	14.1	13.0	13.6	13.3	13.8	14.1	
	8H	14.2	14.7	14.6	15.0	15.3	14.3	14.8	14.6	15.1	15.4	
4H	12H	15.6	16.1	15.9	16.4	16.7	15.7	16.2	16.0	16.5	16.8	
	2H	6.5	7.1	6.8	7.3	7.6	6.6	7.1	6.9	7.4	7.7	
	3H	10.3	10.8	10.7	11.1	11.4	10.4	10.9	10.7	11.2	11.5	
	4H	12.4	12.8	12.7	13.1	13.5	12.5	12.9	12.9	13.3	13.6	
	6H	14.6	15.0	15.0	15.4	15.7	14.7	15.0	15.1	15.4	15.8	
8H	8H	16.0	16.3	16.4	16.7	17.1	16.1	16.4	16.5	16.8	17.2	
	12H	17.4	17.7	17.9	18.1	18.5	17.5	17.8	18.0	18.2	18.6	
	4H	13.2	13.5	13.6	13.9	14.3	13.3	13.6	13.7	14.0	14.4	
	6H	15.7	16.0	16.2	16.4	16.8	15.7	16.0	16.2	16.4	16.9	
	8H	17.2	17.4	17.7	17.9	18.3	17.3	17.5	17.8	18.0	18.4	
12H	12H	18.9	19.1	19.4	19.5	20.0	19.0	19.2	19.5	19.6	20.1	
	4H	13.4	13.7	13.9	14.1	14.5	13.5	13.8	14.0	14.2	14.6	
	6H	16.1	16.3	16.6	16.7	17.2	16.1	16.3	16.6	16.8	17.2	
	8H	17.7	17.8	18.2	18.3	18.8	17.7	17.9	18.2	18.4	18.9	
Variation of the observer position for the luminaire distances S												
S = 1.0H		+0.2 / -0.2					+0.2 / -0.2					
S = 1.5H		+0.3 / -0.3					+0.3 / -0.3					
S = 2.0H		+0.5 / -0.6					+0.5 / -0.6					
Standard table		---					---					
Correction		---					---					
Summand												
Corrected Glare Indices referring to 630lm Total Luminous Flux												



DIMENSIONS



AWARDS



Name	BLACK FOSTER SURF 3 SPOT 3000K WTMG
Reference	A3203111WTMG
Color	Textured white-Metallized gold
RAL	Metallic finish
Category	SURFACE

PRODUCT

Light source	LED
Gross luminous flux	630 Lm
Power	6,3 W
Power values of the system	8,40 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 3
Light beam angle	19°
Lighting efficiency	90%
Efficacy	100 Lm/W
Current intensity	700 mA
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


Ingress Protection	IP20
Weight	490 g.
Packaged weight	530 g.
Packaging dimensions	175 × 93 × 70 mm
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene / Polycarbonate

OTHER DATA




Black Foster Surface is the product that transfers the claimed effect “The Invisible Black” to a linear system in surface application. Black Foster has a very discrete presence in the interior design due to its reduced dimensions and its extremely low glare helping the piece not to gain much prominence.

POLAR DIAGRAM

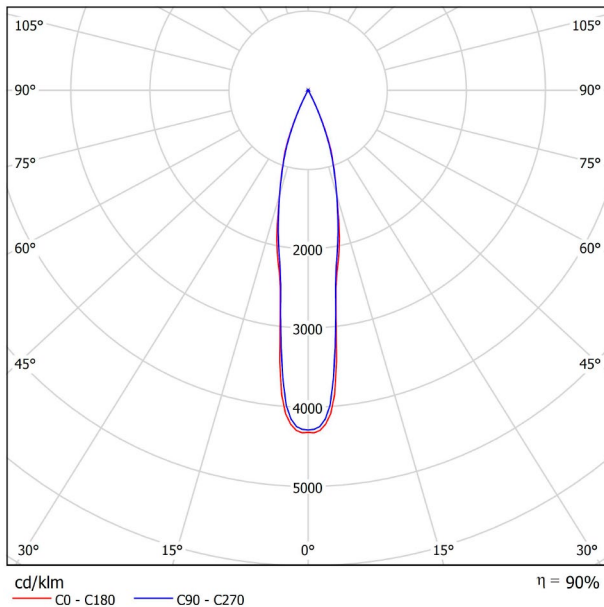

CONICAL DIAGRAM

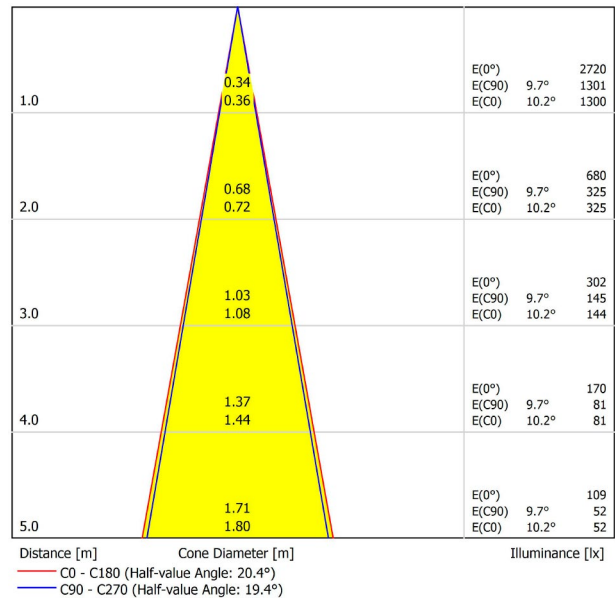


UGR

Glare Evaluation According to UGR												
ρ Ceiling		70	70	50	50	30		70	70	50	50	30
ρ Walls		50	30	50	30	30		50	30	50	30	30
ρ Floor		20	20	20	20	20		20	20	20	20	20
Room Size X Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis					
2H	2H	5.5	6.1	5.7	6.3	6.5	5.5	6.2	5.8	6.4	6.6	
	3H	9.0	9.6	9.3	9.9	10.1	9.1	9.7	9.4	9.9	10.2	
	4H	10.9	11.5	11.2	11.7	12.0	11.0	11.6	11.3	11.8	12.1	
	6H	13.0	13.5	13.3	13.8	14.1	13.0	13.6	13.3	13.8	14.1	
	8H	14.2	14.7	14.6	15.0	15.3	14.3	14.8	14.6	15.1	15.4	
4H	12H	15.6	16.1	15.9	16.4	16.7	15.7	16.2	16.0	16.5	16.8	
	2H	6.5	7.1	6.8	7.3	7.6	6.6	7.1	6.9	7.4	7.7	
	3H	10.3	10.8	10.7	11.1	11.4	10.4	10.9	10.7	11.2	11.5	
	4H	12.4	12.8	12.7	13.1	13.5	12.5	12.9	12.9	13.3	13.6	
	6H	14.6	15.0	15.0	15.4	15.7	14.7	15.0	15.1	15.4	15.8	
8H	8H	16.0	16.3	16.4	16.7	17.1	16.1	16.4	16.5	16.8	17.2	
	12H	17.4	17.7	17.9	18.1	18.5	17.5	17.8	18.0	18.2	18.6	
	4H	13.2	13.5	13.6	13.9	14.3	13.3	13.6	13.7	14.0	14.4	
	6H	15.7	16.0	16.2	16.4	16.8	15.7	16.0	16.2	16.4	16.9	
	8H	17.2	17.4	17.7	17.9	18.3	17.3	17.5	17.8	18.0	18.4	
12H	12H	18.9	19.1	19.4	19.5	20.0	19.0	19.2	19.5	19.6	20.1	
	4H	13.4	13.7	13.9	14.1	14.5	13.5	13.8	14.0	14.2	14.6	
	6H	16.1	16.3	16.6	16.7	17.2	16.1	16.3	16.6	16.8	17.2	
	8H	17.7	17.8	18.2	18.3	18.8	17.7	17.9	18.2	18.4	18.9	
Variation of the observer position for the luminaire distances S												
S = 1.0H		+0.2 / -0.2					+0.2 / -0.2					
S = 1.5H		+0.3 / -0.3					+0.3 / -0.3					
S = 2.0H		+0.5 / -0.6					+0.5 / -0.6					
Standard table		---					---					
Correction Summand		---					---					
Corrected Glare Indices referring to 630lm Total Luminous Flux												



DIMENSIONS



AWARDS



Name	BLACK FOSTER SURF 3 SPOT 4000K NT
Reference	A3203112NT
Color	Textured black
RAL	9005
Category	SURFACE

PRODUCT

Light source	LED
Gross luminous flux	750 Lm
Power	6,3 W
Power values of the system	8,40 W
Colour temperature	4000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 3
Light beam angle	19°
Lighting efficiency	90%
Efficacy	119 Lm/W
Current intensity	700 mA
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	□
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


Ingress Protection	IP20
Weight	490 g.
Packaged weight	530 g.
Packaging dimensions	175 × 93 × 70 mm
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene / Polycarbonate

OTHER DATA




Black Foster Surface is the product that transfers the claimed effect "The Invisible Black" to a linear system in surface application. Black Foster has a very discrete presence in the interior design due to its reduced dimensions and its extremely low glare helping the piece not to gain much prominence.

POLAR DIAGRAM

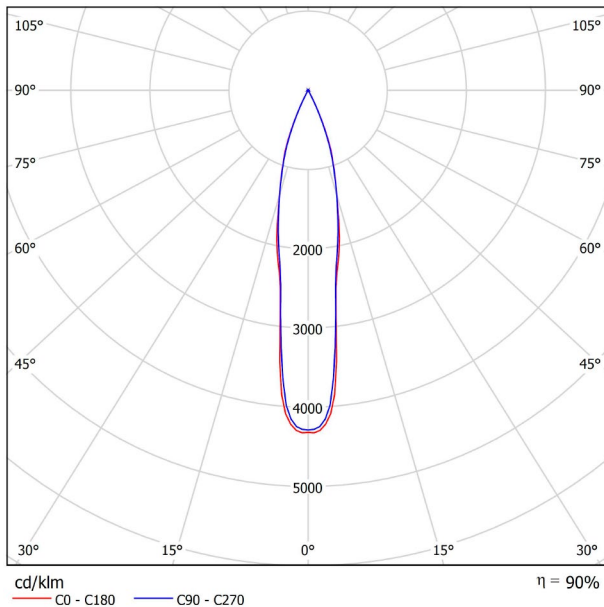

CONICAL DIAGRAM

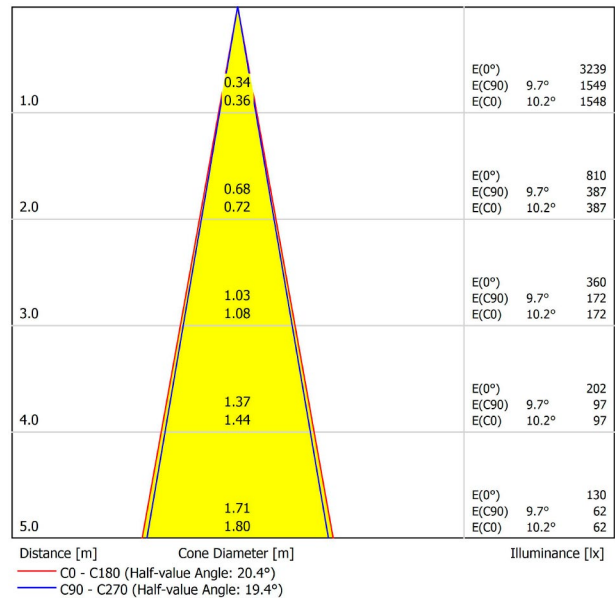


UGR

Glare Evaluation According to UGR												
ρ Ceiling		70	70	50	50	30	70	70	50	50	30	30
ρ Walls		50	30	50	30	30	50	30	50	30	30	30
ρ Floor		20	20	20	20	20	20	20	20	20	20	20
Room Size X Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis					
2H	2H	6.1	6.7	6.3	6.9	7.1	6.1	6.8	6.4	7.0	7.2	
	3H	9.6	10.2	9.9	10.5	10.7	9.7	10.3	10.0	10.5	10.8	
	4H	11.5	12.1	11.8	12.3	12.6	11.6	12.2	11.9	12.4	12.7	
	6H	13.6	14.2	13.9	14.4	14.7	13.6	14.2	13.9	14.4	14.7	
	8H	14.8	15.3	15.2	15.6	15.9	14.9	15.4	15.2	15.7	16.0	
	12H	16.2	16.7	16.5	17.0	17.3	16.3	16.8	16.6	17.1	17.4	
4H	2H	7.1	7.7	7.4	7.9	8.2	7.2	7.8	7.5	8.0	8.3	
	3H	10.9	11.4	11.3	11.7	12.0	11.0	11.5	11.3	11.8	12.1	
	4H	13.0	13.4	13.3	13.7	14.1	13.1	13.5	13.5	13.9	14.2	
	6H	15.2	15.6	15.6	16.0	16.3	15.3	15.6	15.7	16.0	16.4	
	8H	16.6	16.9	17.0	17.3	17.7	16.7	17.0	17.1	17.4	17.8	
	12H	18.0	18.3	18.5	18.7	19.1	18.1	18.4	18.6	18.8	19.2	
8H	4H	13.8	14.1	14.2	14.5	14.9	13.9	14.2	14.3	14.6	15.0	
	6H	16.3	16.6	16.8	17.0	17.4	16.4	16.6	16.8	17.0	17.5	
	8H	17.8	18.0	18.3	18.5	18.9	17.9	18.1	18.4	18.6	19.0	
	12H	19.5	19.7	20.0	20.1	20.6	19.6	19.8	20.1	20.2	20.7	
12H	4H	14.0	14.3	14.5	14.7	15.1	14.1	14.4	14.6	14.8	15.2	
	6H	16.7	16.9	17.2	17.3	17.8	16.7	16.9	17.2	17.4	17.8	
	8H	18.3	18.5	18.8	18.9	19.4	18.4	18.5	18.8	19.0	19.5	
Variation of the observer position for the luminaire distances S												
S = 1.0H		+0.2 / -0.2					+0.2 / -0.2					
S = 1.5H		+0.3 / -0.3					+0.3 / -0.3					
S = 2.0H		+0.5 / -0.6					+0.5 / -0.6					
Standard table		---					---					
Correction		---					---					
Summand												
Corrected Glare Indices referring to 750lm Total Luminous Flux												



DIMENSIONS



AWARDS



Name	BLACK FOSTER SURF 3 SPOT 4000K NTMG
Reference	A3203112NTMG
Color	Textured black-Metallized gold
RAL	Metallic finish
Category	SURFACE

PRODUCT

Light source	LED
Gross luminous flux	750 Lm
Power	6,3 W
Power values of the system	8,40 W
Colour temperature	4000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 3
Light beam angle	19°
Lighting efficiency	90%
Efficacy	119 Lm/W
Current intensity	700 mA
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	□
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


Ingress Protection	IP20
Weight	490 g.
Packaged weight	530 g.
Packaging dimensions	175 × 93 × 70 mm
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene / Polycarbonate

OTHER DATA




Black Foster Surface is the product that transfers the claimed effect "The Invisible Black" to a linear system in surface application. Black Foster has a very discrete presence in the interior design due to its reduced dimensions and its extremely low glare helping the piece not to gain much prominence.

POLAR DIAGRAM

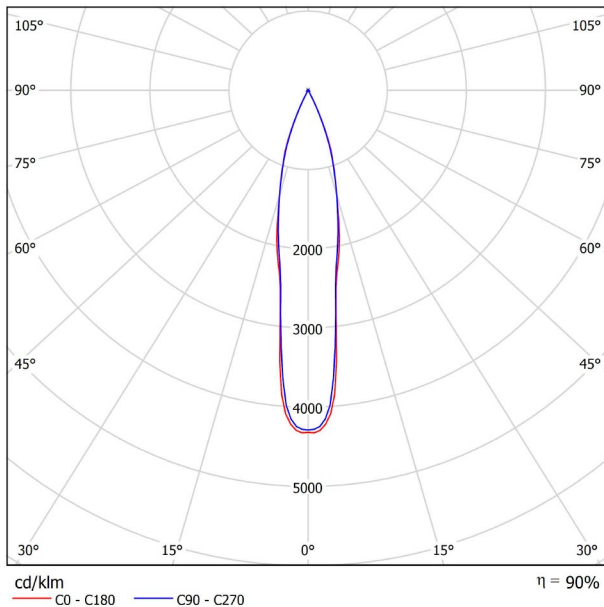

CONICAL DIAGRAM

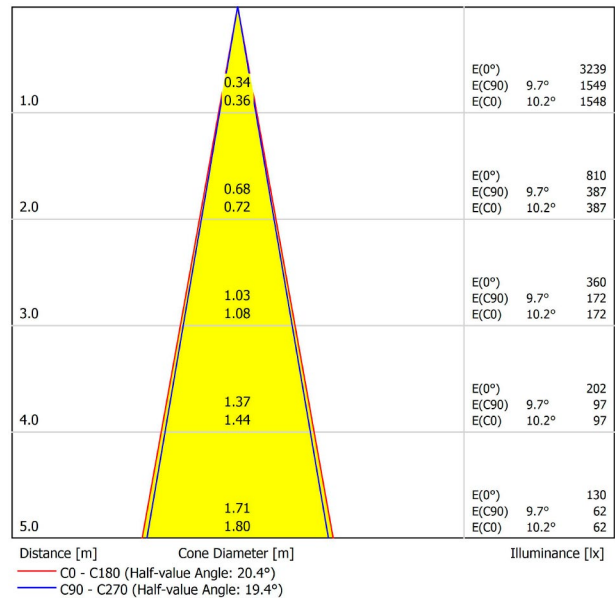


UGR

Glare Evaluation According to UGR												
p Ceiling		70	70	50	50	30	70	70	50	50	30	30
p Walls		50	30	50	30	30	50	30	50	30	30	30
p Floor		20	20	20	20	20	20	20	20	20	20	20
Room Size X Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis					
2H	2H	6.1	6.7	6.3	6.9	7.1	6.1	6.8	6.4	7.0	7.2	
	3H	9.6	10.2	9.9	10.5	10.7	9.7	10.3	10.0	10.5	10.8	
	4H	11.5	12.1	11.8	12.3	12.6	11.6	12.2	11.9	12.4	12.7	
	6H	13.6	14.2	13.9	14.4	14.7	13.6	14.2	13.9	14.4	14.7	
	8H	14.8	15.3	15.2	15.6	15.9	14.9	15.4	15.2	15.7	16.0	
	12H	16.2	16.7	16.5	17.0	17.3	16.3	16.8	16.6	17.1	17.4	
4H	2H	7.1	7.7	7.4	7.9	8.2	7.2	7.8	7.5	8.0	8.3	
	3H	10.9	11.4	11.3	11.7	12.0	11.0	11.5	11.3	11.8	12.1	
	4H	13.0	13.4	13.3	13.7	14.1	13.1	13.5	13.5	13.9	14.2	
	6H	15.2	15.6	15.6	16.0	16.3	15.3	15.6	15.7	16.0	16.4	
	8H	16.6	16.9	17.0	17.3	17.7	16.7	17.0	17.1	17.4	17.8	
	12H	18.0	18.3	18.5	18.7	19.1	18.1	18.4	18.6	18.8	19.2	
8H	4H	13.8	14.1	14.2	14.5	14.9	13.9	14.2	14.3	14.6	15.0	
	6H	16.3	16.6	16.8	17.0	17.4	16.4	16.6	16.8	17.0	17.5	
	8H	17.8	18.0	18.3	18.5	18.9	17.9	18.1	18.4	18.6	19.0	
	12H	19.5	19.7	20.0	20.1	20.6	19.6	19.8	20.1	20.2	20.7	
12H	4H	14.0	14.3	14.5	14.7	15.1	14.1	14.4	14.6	14.8	15.2	
	6H	16.7	16.9	17.2	17.3	17.8	16.7	16.9	17.2	17.4	17.8	
	8H	18.3	18.5	18.8	18.9	19.4	18.4	18.5	18.8	19.0	19.5	
Variation of the observer position for the luminaire distances S												
S = 1.0H		+0.2 / -0.2					+0.2 / -0.2					
S = 1.5H		+0.3 / -0.3					+0.3 / -0.3					
S = 2.0H		+0.5 / -0.6					+0.5 / -0.6					
Standard table		---					---					
Correction Summand		---					---					
Corrected Glare Indices referring to 750lm Total Luminous Flux												



DIMENSIONS



AWARDS



Name	BLACK FOSTER SURF 3 SPOT 4000K WT
Reference	A3203112WT
Color	Textured white
RAL	9016
Category	SURFACE

PRODUCT

Light source	LED
Gross luminous flux	750 Lm
Power	6,3 W
Power values of the system	8,40 W
Colour temperature	4000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 3
Light beam angle	19°
Lighting efficiency	90%
Efficacy	119 Lm/W
Current intensity	700 mA
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	□
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


Ingress Protection	IP20
Weight	490 g.
Packaged weight	530 g.
Packaging dimensions	175 × 93 × 70 mm
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene / Polycarbonate

OTHER DATA




Black Foster Surface is the product that transfers the claimed effect “The Invisible Black” to a linear system in surface application. Black Foster has a very discrete presence in the interior design due to its reduced dimensions and its extremely low glare helping the piece not to gain much prominence.

POLAR DIAGRAM

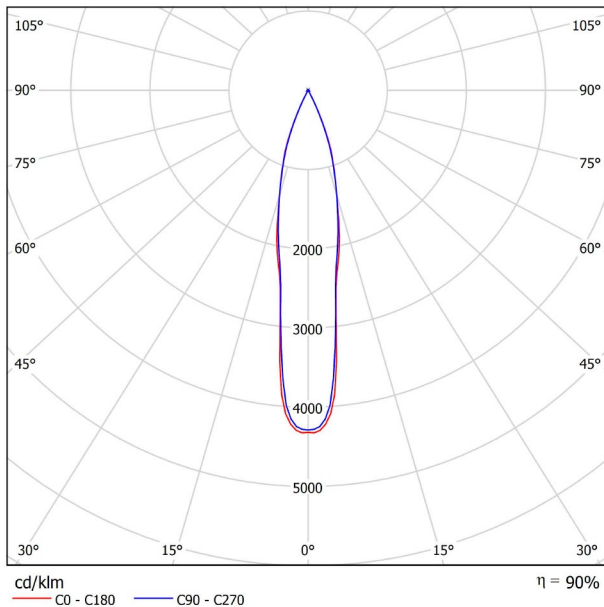

CONICAL DIAGRAM

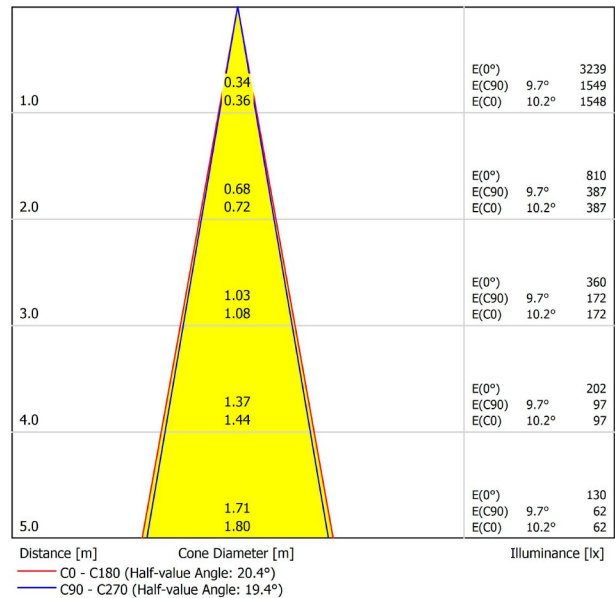

UGR

Glare Evaluation According to UGR												
ρ Ceiling		70	70	50	50	30	70	70	50	50	30	30
ρ Walls		50	30	50	30	30	50	30	50	30	30	30
ρ Floor		20	20	20	20	20	20	20	20	20	20	20
Room Size X Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis					
2H	2H	6.1	6.7	6.3	6.9	7.1	6.1	6.8	6.4	7.0	7.2	
	3H	9.6	10.2	9.9	10.5	10.7	9.7	10.3	10.0	10.5	10.8	
	4H	11.5	12.1	11.8	12.3	12.6	11.6	12.2	11.9	12.4	12.7	
	6H	13.6	14.2	13.9	14.4	14.7	13.6	14.2	13.9	14.4	14.7	
	8H	14.8	15.3	15.2	15.6	15.9	14.9	15.4	15.2	15.7	16.0	
	12H	16.2	16.7	16.5	17.0	17.3	16.3	16.8	16.6	17.1	17.4	
4H	2H	7.1	7.7	7.4	7.9	8.2	7.2	7.8	7.5	8.0	8.3	
	3H	10.9	11.4	11.3	11.7	12.0	11.0	11.5	11.3	11.8	12.1	
	4H	13.0	13.4	13.3	13.7	14.1	13.1	13.5	13.5	13.9	14.2	
	6H	15.2	15.6	15.6	16.0	16.3	15.3	15.6	15.7	16.0	16.4	
	8H	16.6	16.9	17.0	17.3	17.7	16.7	17.0	17.1	17.4	17.8	
	12H	18.0	18.3	18.5	18.7	19.1	18.1	18.4	18.6	18.8	19.2	
8H	4H	13.8	14.1	14.2	14.5	14.9	13.9	14.2	14.3	14.6	15.0	
	6H	16.3	16.6	16.8	17.0	17.4	16.4	16.6	16.8	17.0	17.5	
	8H	17.8	18.0	18.3	18.5	18.9	17.9	18.1	18.4	18.6	19.0	
	12H	19.5	19.7	20.0	20.1	20.6	19.6	19.8	20.1	20.2	20.7	
12H	4H	14.0	14.3	14.5	14.7	15.1	14.1	14.4	14.6	14.8	15.2	
	6H	16.7	16.9	17.2	17.3	17.8	16.7	16.9	17.2	17.4	17.8	
	8H	18.3	18.5	18.8	18.9	19.4	18.4	18.5	18.8	19.0	19.5	
Variation of the observer position for the luminaire distances S												
S = 1.0H		+0.2 / -0.2					+0.2 / -0.2					
S = 1.5H		+0.3 / -0.3					+0.3 / -0.3					
S = 2.0H		+0.5 / -0.6					+0.5 / -0.6					
Standard table		---					---					
Correction Summand		---					---					
Corrected Glare Indices referring to 750lm Total Luminous Flux												