




DIMENSIONS



Name	BLACK FOSTER MICRO RECESSED 5 DIM DALI 3000K N
Reference	A4142021N
Color	Matt black
RAL	9005
Category	CEILING RECESSED

PRODUCT

LIGHTING INFORMATION

LED

800 Lm

7 W

8,54 W

3000 K

CRI>90

MacAdam Step 3

37°

87%

114 Lm/W

500 mA

DALI

Please Consult

Included



220 V/240 V

50/60 Hz

A+

L90B10 (Tc=85°C) >60.000h

OTHER DATA

IP20

24 × 96 mm.

160 g.

220 g.

176 × 61 × 50 mm

1


Aluminium / Acrylonitrile Butadiene Styrene /
Polycarbonate

Light source	LED
Gross luminous flux	800 Lm
Power	7 W
Power values of the system	8,54 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 3
Light beam angle	37°
Lighting efficiency	87%
Efficacy	114 Lm/W
Current intensity	500 mA
Dimming	DALI
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L90B10 (Tc=85°C) >60.000h


Ingress Protection	IP20
Recess measurements	24 × 96 mm.
Weight	160 g.
Packaged weight	220 g.
Packaging dimensions	176 × 61 × 50 mm
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene / Polycarbonate

Black Foster Micro is a feat of engineering which brings the acclaimed 'The Invisible Black' effect to a hyper-reduced light. Its tiny size and thin trim offer a 'trimless visual' aesthetic which combines with its almost imperceptible presence as a result of its compact dimensions. Black Foster Micro is designed for general or accent lighting and can be used in projects that seek ceiling lighting that plays a minimal role.

POLAR DIAGRAM

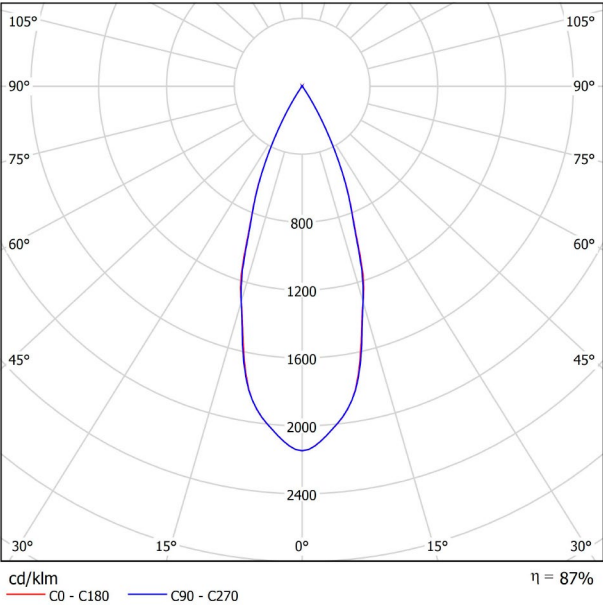


CONICAL DIAGRAM

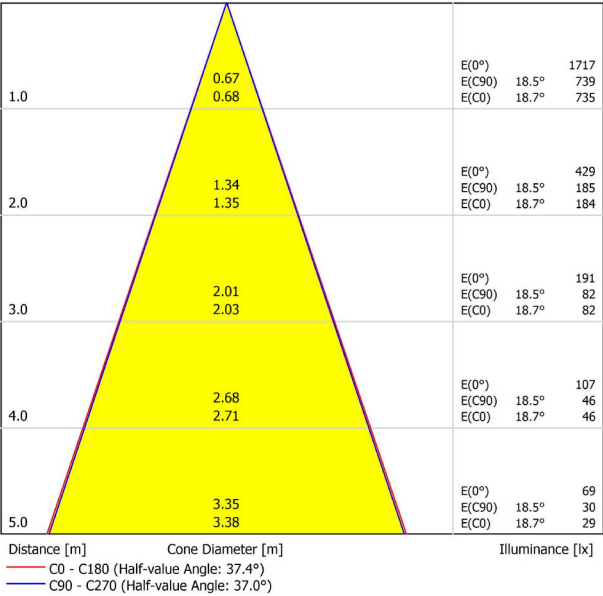



DIMENSIONS



Name	BLACK FOSTER MICRO RECESSED 5 DIM PUSH 2700K N
Reference	A4142030N
Color	Matt black
RAL	9005
Category	CEILING RECESSED

PRODUCT

Name	BLACK FOSTER MICRO RECESSED 5 DIM PUSH 2700K N
Reference	A4142030N
Color	Matt black
RAL	9005
Category	CEILING RECESSED

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	775 Lm
Power	7 W
Power values of the system	8,54 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 3
Light beam angle	37°
Lighting efficiency	87%
Efficacy	111 Lm/W
Current intensity	500 mA
Dimming	Push
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L90B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Recess measurements	24 × 96 mm.
Weight	160 g.
Packaged weight	220 g.
Packaging dimensions	176 × 61 × 50 mm
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene / Polycarbonate




Black Foster Micro is a feat of engineering which brings the acclaimed 'The Invisible Black' effect to a hyper-reduced light. Its tiny size and thin trim offer a 'trimless visual' aesthetic which combines with its almost imperceptible presence as a result of its compact dimensions. Black Foster Micro is designed for general or accent lighting and can be used in projects that seek ceiling lighting that plays a minimal role.

POLAR DIAGRAM

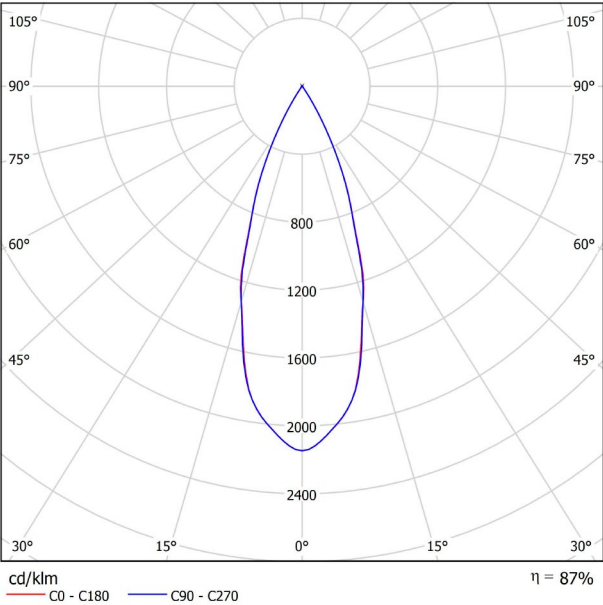


CONICAL DIAGRAM

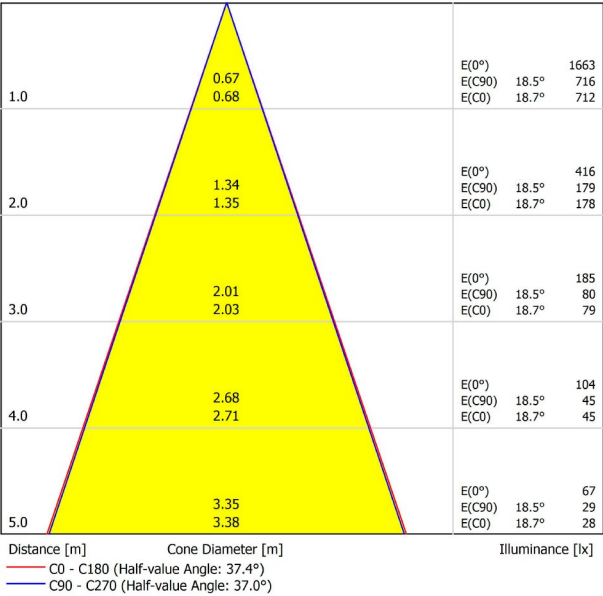



DIMENSIONS



PRODUCT

Name	BLACK FOSTER MICRO RECESSED 5 DIM PUSH 3000K N
Reference	A4142031N
Color	Matt black
RAL	9005
Category	CEILING RECESSED

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	800 Lm
Power	7 W
Power values of the system	8,54 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 3
Light beam angle	37°
Lighting efficiency	87%
Efficacy	114 Lm/W
Current intensity	500 mA
Dimming	Push
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L90B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Recess measurements	24 × 96 mm.
Weight	160 g.
Packaged weight	220 g.
Packaging dimensions	176 × 61 × 50 mm
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene / Polycarbonate




Black Foster Micro is a feat of engineering which brings the acclaimed 'The Invisible Black' effect to a hyper-reduced light. Its tiny size and thin trim offer a 'trimless visual' aesthetic which combines with its almost imperceptible presence as a result of its compact dimensions. Black Foster Micro is designed for general or accent lighting and can be used in projects that seek ceiling lighting that plays a minimal role.

POLAR DIAGRAM

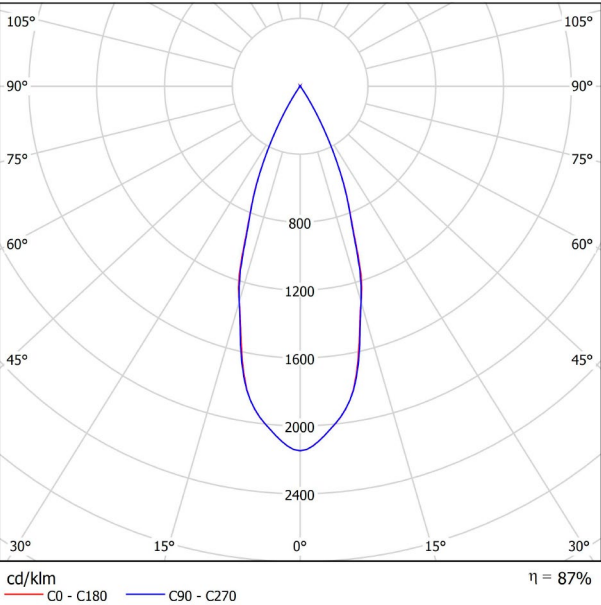


CONICAL DIAGRAM

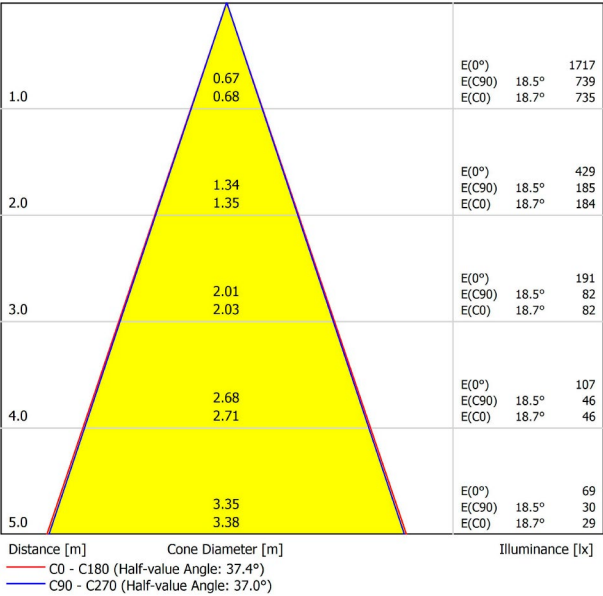



DIMENSIONS



Name	BLACK FOSTER MICRO RECESSED 5 2700K N
Reference	A4142010N
Color	Matt black
RAL	9005
Category	CEILING RECESSED

PRODUCT

BLACK FOSTER MICRO RECESSED 5 2700K N

A4142010N

Matt black

9005

CEILING RECESSED

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	775 Lm
Power	7 W
Power values of the system	7,87 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 3
Light beam angle	37°
Lighting efficiency	87%
Efficacy	111 Lm/W
Current intensity	500 mA
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L90B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Recess measurements	24 × 96 mm.
Weight	223 g.
Packaged weight	283 g.
Packaging dimensions	176 × 61 × 50 mm
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene / Polycarbonate




Black Foster Micro is a feat of engineering which brings the acclaimed 'The Invisible Black' effect to a hyper-reduced light. Its tiny size and thin trim offer a 'trimless visual' aesthetic which combines with its almost imperceptible presence as a result of its compact dimensions. Black Foster Micro is designed for general or accent lighting and can be used in projects that seek ceiling lighting that plays a minimal role.

POLAR DIAGRAM

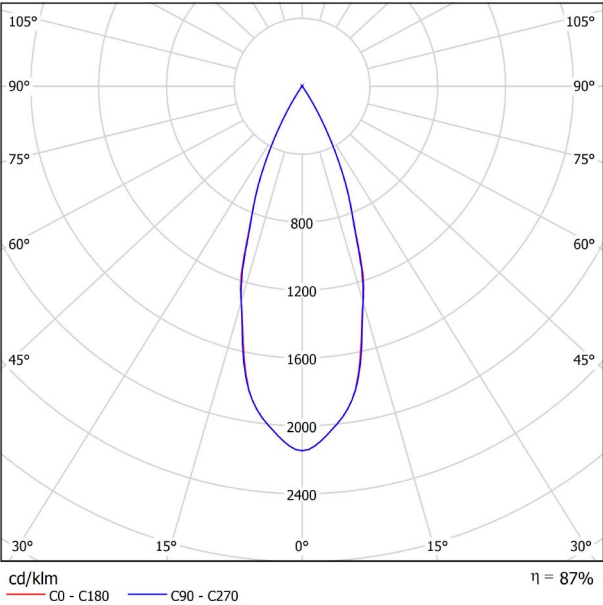


CONICAL DIAGRAM

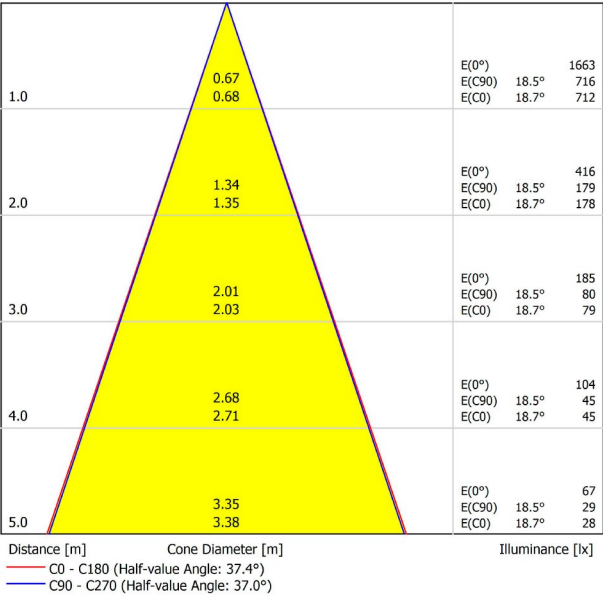



DIMENSIONS



Name	BLACK FOSTER MICRO RECESSED 5 3000K N
Reference	A4142011N
Color	Matt black
RAL	9005
Category	CEILING RECESSED

PRODUCT

BLACK FOSTER MICRO RECESSED 5 3000K N

A4142011N

Matt black

9005

CEILING RECESSED

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	800 Lm
Power	7 W
Power values of the system	7,87 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 3
Light beam angle	37°
Lighting efficiency	87%
Efficacy	114 Lm/W
Current intensity	500 mA
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L90B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Recess measurements	24 × 96 mm.
Weight	223 g.
Packaged weight	283 g.
Packaging dimensions	176 × 61 × 50 mm
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene / Polycarbonate




Black Foster Micro is a feat of engineering which brings the acclaimed 'The Invisible Black' effect to a hyper-reduced light. Its tiny size and thin trim offer a 'trimless visual' aesthetic which combines with its almost imperceptible presence as a result of its compact dimensions. Black Foster Micro is designed for general or accent lighting and can be used in projects that seek ceiling lighting that plays a minimal role.

POLAR DIAGRAM

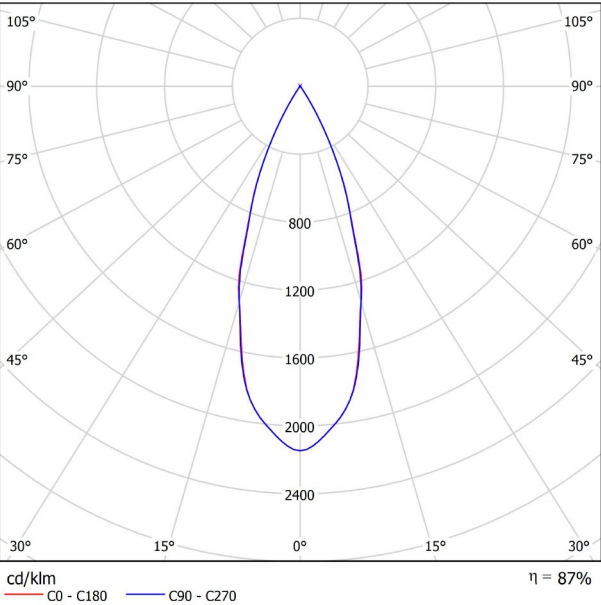


CONICAL DIAGRAM

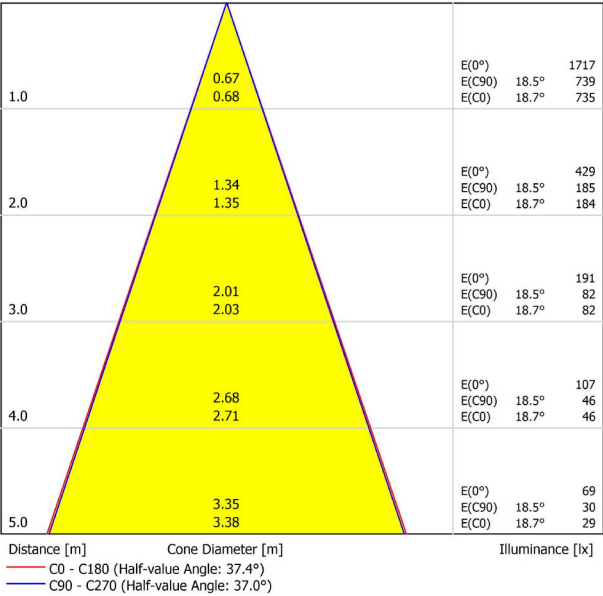



DIMENSIONS



Name	BLACK FOSTER MICRO RECESSED 5 DIM DALI 2700K N
Reference	A4142020N
Color	Matt black
RAL	9005
Category	CEILING RECESSED

PRODUCT

LIGHTING INFORMATION

LED

775 Lm

7 W

8,54 W

2700 K

CRI>90

MacAdam Step 3

37°

87%

111 Lm/W

500 mA

DALI

Please Consult

Included



220 V/240 V

50/60 Hz

A+

L90B10 (Tc=85°C) >60.000h

OTHER DATA

IP20

24 × 96 mm.

160 g.

220 g.

176 × 61 × 50 mm

1


Aluminium / Acrylonitrile Butadiene Styrene /
Polycarbonate

Light source	LED
Gross luminous flux	775 Lm
Power	7 W
Power values of the system	8,54 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 3
Light beam angle	37°
Lighting efficiency	87%
Efficacy	111 Lm/W
Current intensity	500 mA
Dimming	DALI
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L90B10 (Tc=85°C) >60.000h

Ingress Protection	IP20
Recess measurements	24 × 96 mm.
Weight	160 g.
Packaged weight	220 g.
Packaging dimensions	176 × 61 × 50 mm
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene / Polycarbonate

Black Foster Micro is a feat of engineering which brings the acclaimed 'The Invisible Black' effect to a hyper-reduced light. Its tiny size and thin trim offer a 'trimless visual' aesthetic which combines with its almost imperceptible presence as a result of its compact dimensions. Black Foster Micro is designed for general or accent lighting and can be used in projects that seek ceiling lighting that plays a minimal role.

POLAR DIAGRAM

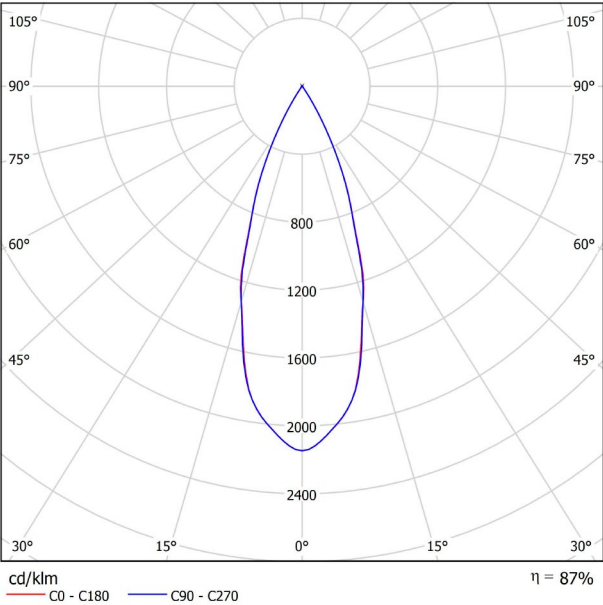

CONICAL DIAGRAM

