




DIMENSIONS



ACCESSORIES



MINIMAL TRACK OPTIONS

AWARDS




PRODUCT	
Name	PLUS MICRO 24V 2700K WT
Reference	A3880000WT
Color	Textured white
RAL	9016
Category	TRACKLIGHTS
LIGHTING INFORMATION	
Light source	LED
Gross luminous flux	500 Lm
Power	4,7 W
Power values of the system	4,70 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 3
Light beam angle	10°-35°
Lighting efficiency	10-17%
Efficacy	106 Lm/W
Current intensity	400 mA
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	III
Voltage	24 Vdc
Energy efficiency	B
OTHER DATA	
Ingress Protection	IP20
Swivel angle	180°
Rotation angle	355°
Track type	Minimal Track
Weight	90 g.
Packaged weight	130 g.
Packaging dimensions	113 × 100 × 48 mm
Units per package	1
Materials	Aluminium / Optical Polymethyl Methacrylate




Plus Micro 24V is a projector for the Minimal Track system that offers the possibility of expanding or concentrating the beam light with just a smooth manual gesture. This characteristic makes Plus the ideal alternative for applications where the precision within the beam of light is essential.

POLAR DIAGRAM


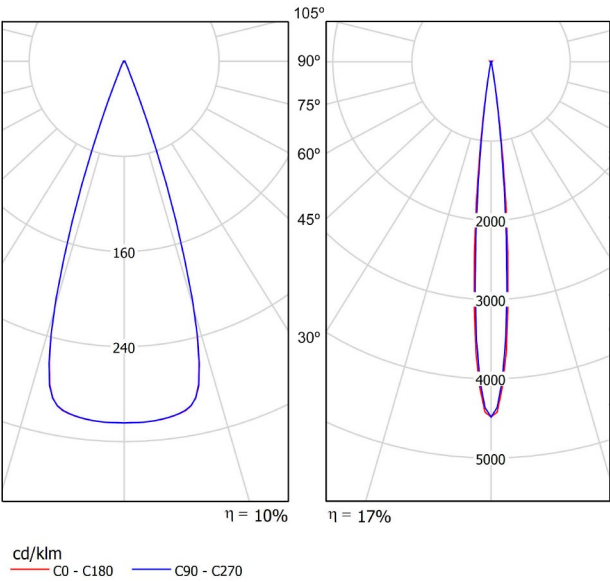


CONICAL DIAGRAM

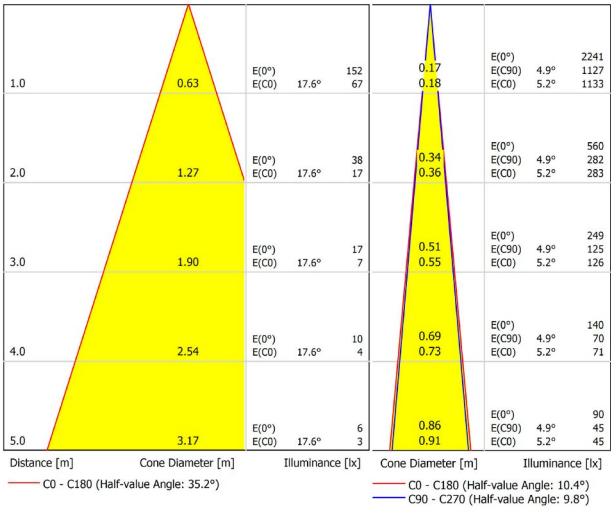

24V SYSTEM

MINIMAL TRACK



MINIMAL TRACK 24V Profile 2m A384-02-00- | N |


MINIMAL TRACK 24V Rubber Cable n x 1m A384-00-01- | N |

n = Total Length of System.



24V | Max. 4A


MINIMAL TRACK 24V Corner 90° 1 Plane
A384-00-02- | N |
Cable Length = 35mm.




MINIMAL TRACK 24V End Cap
A384-00-05- | N |




MINIMAL TRACK 24V Corner 90° 1 Plane Rounded
A384-00-03- | N |
Cable Length = 35mm.



MINIMAL TRACK 24V Connection Box
A384-00-06- | N |



MINIMAL TRACK 24V Corner 90° 2 Planes
A384-00-04- | N |
Cable Length = 100mm.




			P	V	D (A x B x C)
MINIMAL TRACK 24V Power Supply Box	ON/OFF	A384-00-07- N	40W	24V	280 x 30 x 24mm
		A384-00-08- N	100W	24V	280 x 30 x 24mm



Driver must be placed adjacently to the Minimal Track 24Vdc Profile. Included ON/OFF 24Vdc Power Supply.

MINIMAL TRACK 24V Remote Power Supply	ON/OFF	0434-01-37	60W	24V	180 x 52 x 30mm
		0433-10-22	100W	24V	295 x 43 x 30mm

Driver must be placed on Remote. Included ON/OFF 24Vdc Power Supply.



DROP VOLTAGE TABLE		CABLE LENGHT (m)			
		<5	<10	<20	<30
POWER (W)	CABLE SECTION (mm²)	TRACK LENGHT (m)			
40	0,75	30	30	30	30
	1,5	30	30	30	30
60	0,75	30	30	20	10
	1,5	30	30	30	20
100	0,75	20	10	X	X
	1,5	20	20	10	X

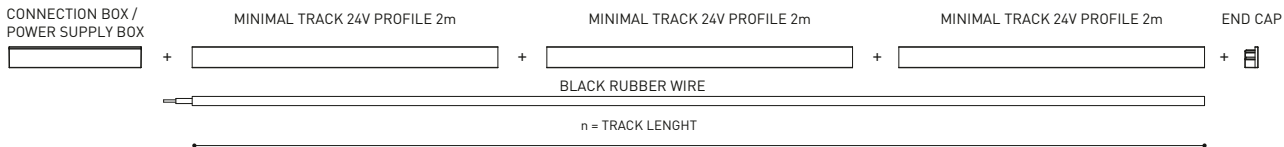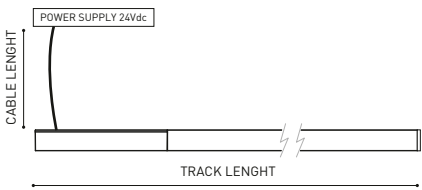


COLOUR | N ■ RAL 9005 |

DIM OPTIONS PLEASE CONSULT



DIMENSIONS



ACCESSORIES



MINIMAL TRACK OPTIONS

AWARDS



PRODUCT

Name	PLUS MICRO 24V 2700K NT
Reference	A3880000NT
Color	Textured black
RAL	9005
Category	TRACKLIGHTS

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	500 Lm
Power	4,7 W
Power values of the system	4,70 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 3
Light beam angle	10°-35°
Lighting efficiency	10-17%
Efficacy	106 Lm/W
Current intensity	400 mA
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	III
Voltage	24 Vdc
Energy efficiency	B


OTHER DATA

Ingress Protection	IP20
Swivel angle	180°
Rotation angle	355°
Track type	Minimal Track
Weight	90 g.
Packaged weight	130 g.
Packaging dimensions	113 x 100 x 48 mm
Units per package	1
Materials	Aluminium / Optical Polymethyl Methacrylate




Plus Micro 24V is a projector for the Minimal Track system that offers the possibility of expanding or concentrating the beam light with just a smooth manual gesture. This characteristic makes Plus the ideal alternative for applications where the precision within the beam of light is essential.

POLAR DIAGRAM


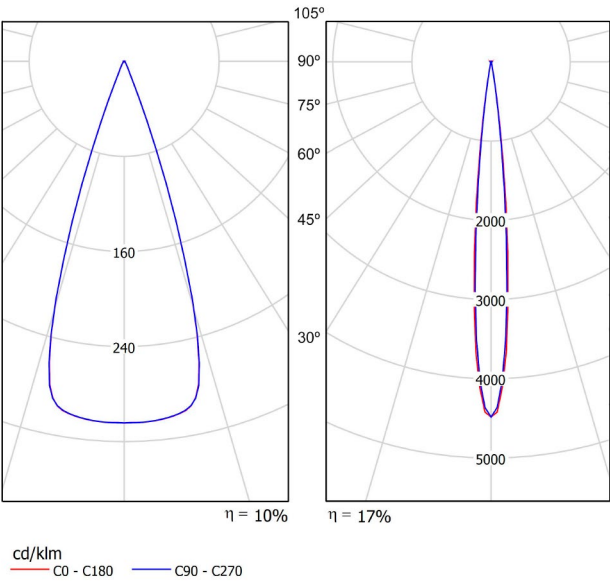


CONICAL DIAGRAM

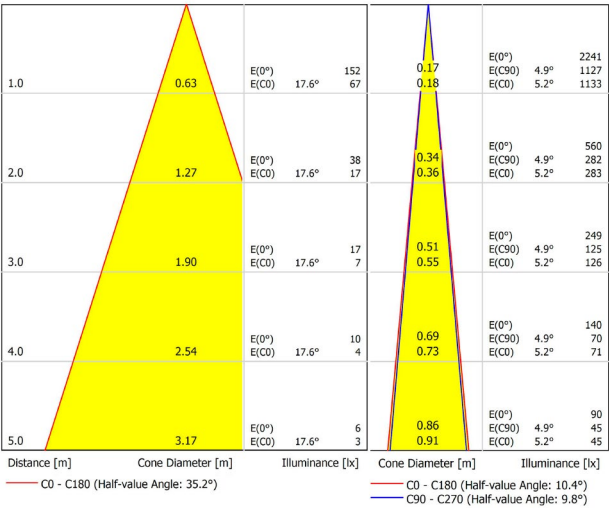

24V SYSTEM

MINIMAL TRACK



MINIMAL TRACK 24V Profile 2m A384-02-00- | N |


MINIMAL TRACK 24V Rubber Cable n x 1m A384-00-01- | N |

n = Total Length of System.



24V | Max. 4A


MINIMAL TRACK 24V Corner 90° 1 Plane
A384-00-02- | N |
Cable Length = 35mm.




MINIMAL TRACK 24V End Cap
A384-00-05- | N |




MINIMAL TRACK 24V Corner 90° 1 Plane Rounded
A384-00-03- | N |
Cable Length = 35mm.



MINIMAL TRACK 24V Connection Box
A384-00-06- | N |



MINIMAL TRACK 24V Corner 90° 2 Planes
A384-00-04- | N |
Cable Length = 100mm.




			P	V	D (A x B x C)
MINIMAL TRACK 24V Power Supply Box	ON/OFF	A384-00-07- N	40W	24V	280 x 30 x 24mm
		A384-00-08- N	100W	24V	280 x 30 x 24mm

Driver must be placed adjacently to the Minimal Track 24Vdc Profile. Included ON/OFF 24Vdc Power Supply.



MINIMAL TRACK 24V Remote Power Supply	ON/OFF	0434-01-37	60W	24V	180 x 52 x 30mm
		0433-10-22	100W	24V	295 x 43 x 30mm

Driver must be placed on Remote. Included ON/OFF 24Vdc Power Supply.



DROP VOLTAGE TABLE

		CABLE LENGHT (m)			
		<5	<10	<20	<30
POWER (W)	CABLE SECTION (mm²)	TRACK LENGHT (m)			
		<5	<10	<20	<30
40	0,75	30	30	30	30
	1,5	30	30	30	30
60	0,75	30	30	20	10
	1,5	30	30	30	20
100	0,75	20	10	X	X
	1,5	20	20	10	X

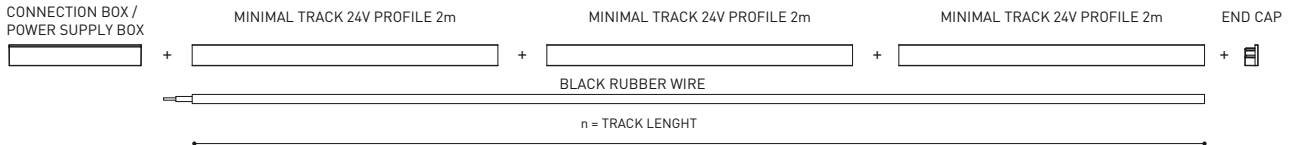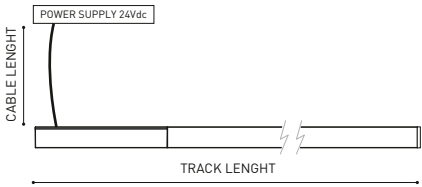

COLOUR | N ■ RAL 9005 |

DIM OPTIONS PLEASE CONSULT