


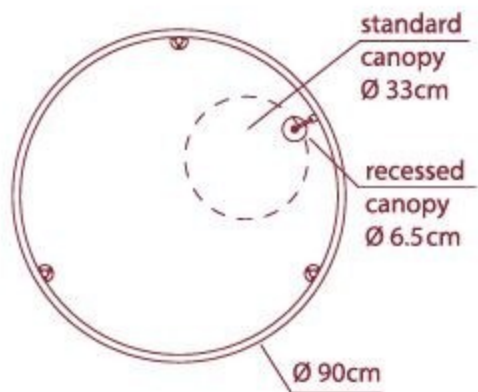

PL UL X 090

application: both as ceiling
(downlight or uplight mounting) or wall
lamp (only wallward light)

Source:

LED 57,6W - diffused beam - 3000K
CRI 90 - ~4413 lm - 77 lm/W

CE IP20 LED

RECESSED CANOPY




STANDARD CANOPY




for drivers and dimming technology,
please refer to our Axo Light pricelist
or contact our representatives


recessed canopy

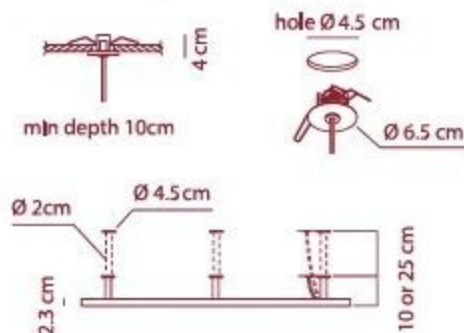

standard canopy

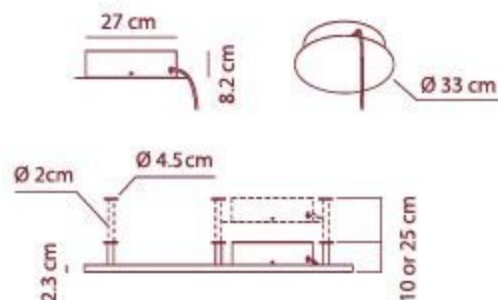


available heights



COLOURS

 anthracite grey

 rust brown

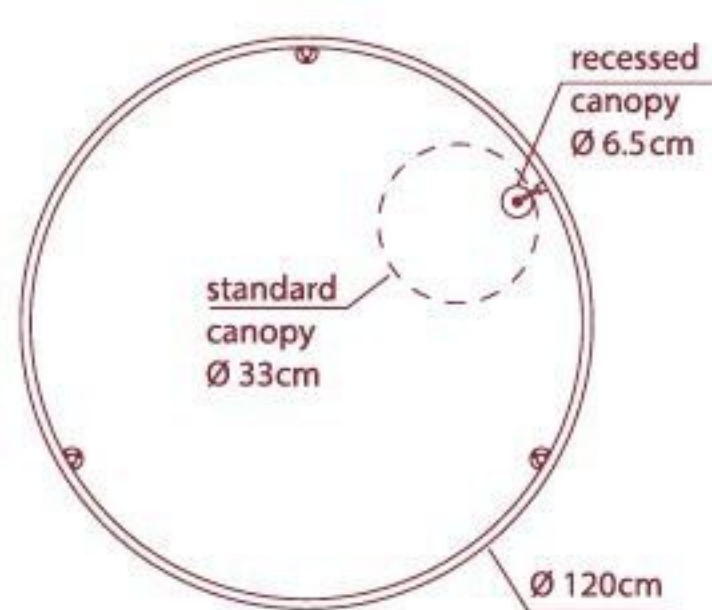

PL UL X 120

application: both as ceiling
(downlight or uplight mounting) or wall
lamp (only wallward light)

Source:

LED 86,4W - diffused beam - 3000K
CRI 90 - ~6618 lm - 77 lm/W

CE IP20 LED

RECESSED CANOPY



STANDARD CANOPY





for drivers and dimming technology,
please refer to our Axo Light pricelist
or contact our representatives


COLOURS



recessed canopy

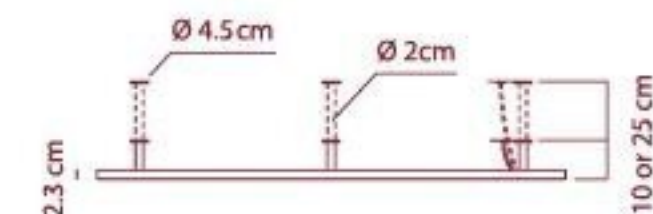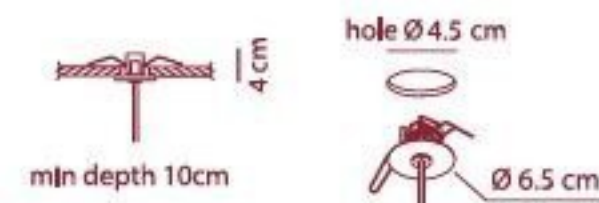

available heights

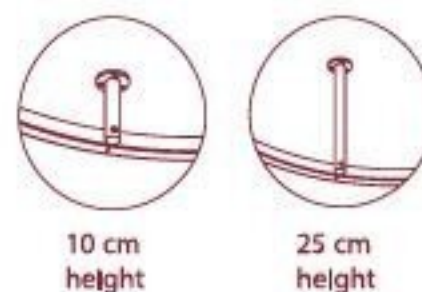

standard canopy

