



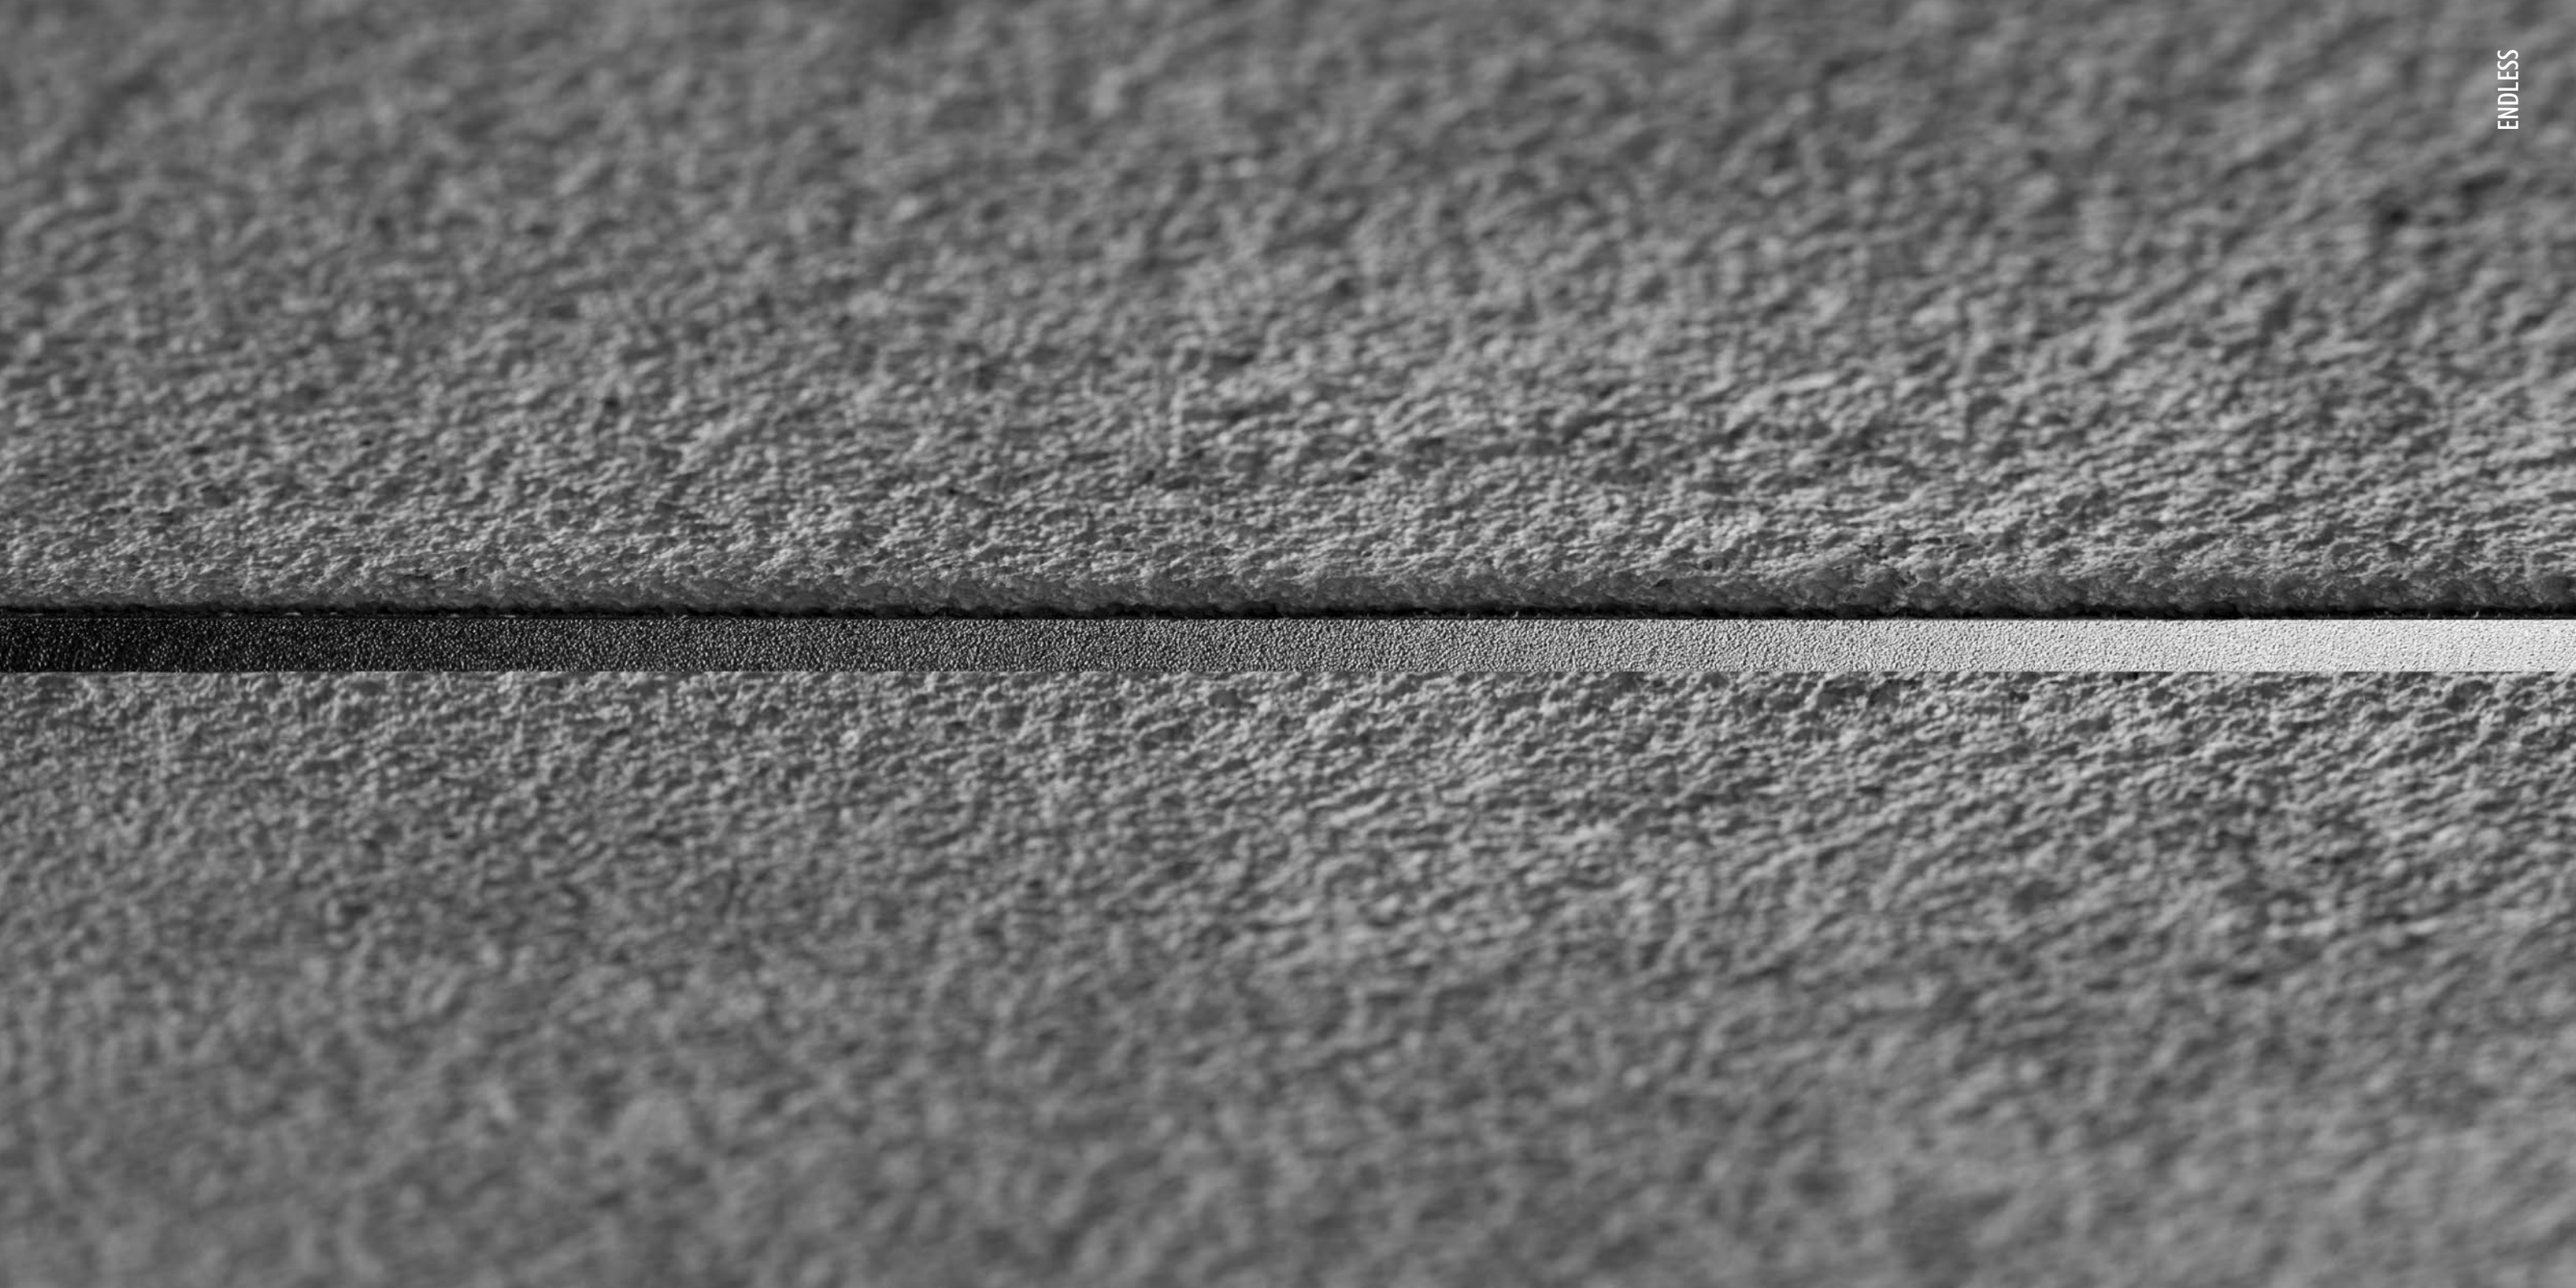

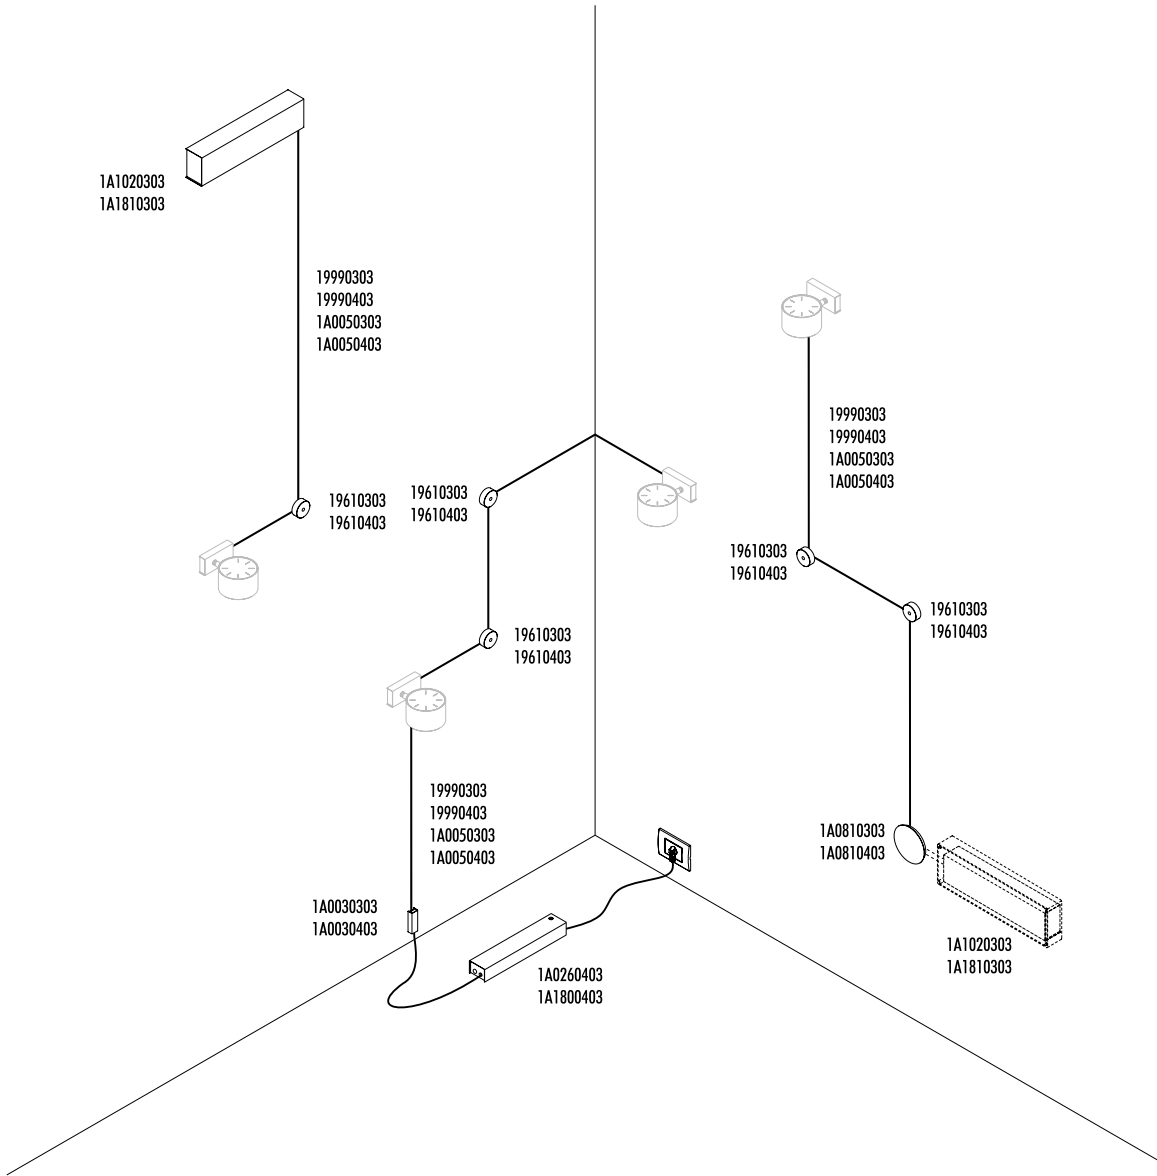


The sizes are expressed in millimeters / inches.


DESIGN DAVIDE GROPPI - 2018
WALL AND CEILING SYSTEM - METAL - PVC

ENDLESS


19990303	MATT WHITE - 5 m	ENDLESS - MAX 150 W - MAX 48 V DC - MAX 4 A	8 / 0.31" 5000 / 10000 196.85 / 393.70
19990403	MATT BLACK - 5 m		
1A0050303	MATT WHITE - 10 m		
1A0050403	MATT BLACK - 10 m		
1A0370003	STANDARD	FIXING ROUGH WALLS - 2,5 m	
19610303	MATT WHITE	TERMINALS BOX WITH 2 TERMINALS INCLUDED	20 / 0.79" 55 / 2.16"
19610403	MATT BLACK		
1A0030303	MATT WHITE	POWER BASE	90 / 3.54" 30 / 1.18" 20 / 0.79"
1A0030403	MATT BLACK		
19690003	STANDARD	TERMINALS - 2 PIECES	
1A0810303	MATT WHITE	POWER BASE - REMOTE VERSION	11 / 0.43" 120 / 4.73"
1A0810403	MATT BLACK		

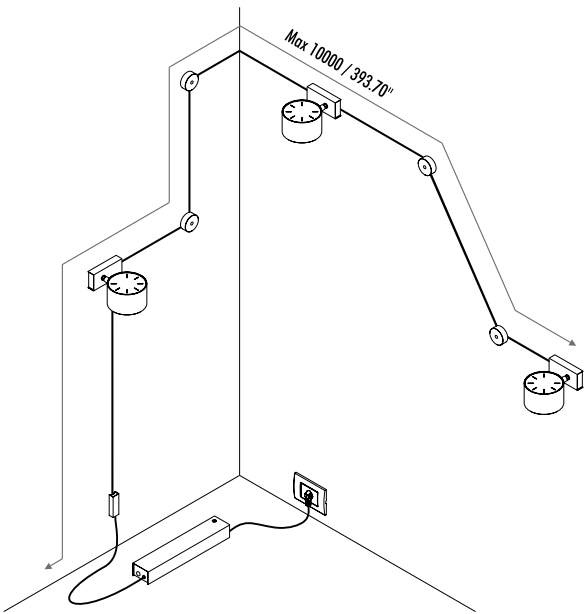

WALL AND CEILING ROSE KIT

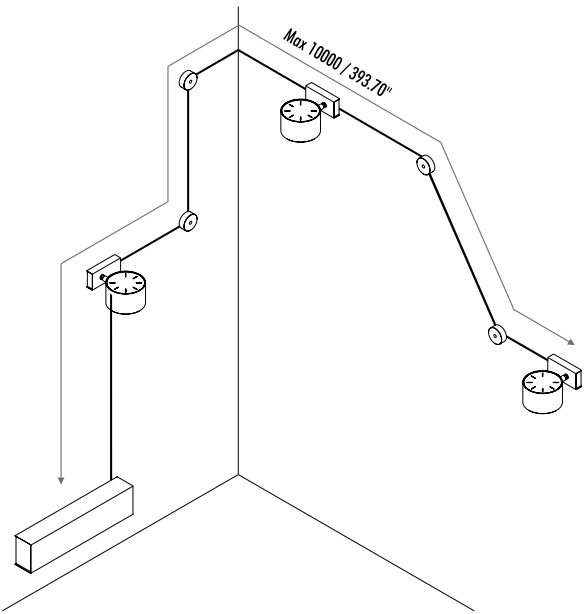

REMOTE POWER SUPPLY KIT

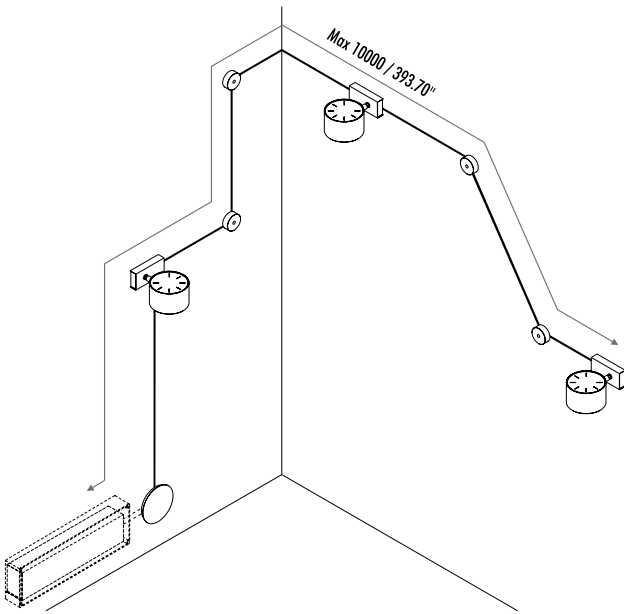

COMPULSORY POWER SUPPLY FOR ENDLESS ON/OFF SYSTEM - SPOT ENDLESS IOT - DOT ENDLESS IOT

1A0260403	MATT BLACK	POWER SUPPLY KIT WITH PLUG INPUT 120 V - 60 Hz - OUTPUT 48 V DC - 90 W NOT DIMMABLE	

1A1020303	MATT WHITE	WALL-CEILING ROSE-REMOTE KIT INPUT 120 V - 60 Hz - OUTPUT 48 V DC - 90 W - IP20 NOT DIMMABLE	

COMPULSORY POWER SUPPLY FOR DIMMING SPOT ENDLESS AND DOT ENDLESS

1A1800403	MATT BLACK	POWER SUPPLY KIT WITH PLUG INPUT 120 V - 60 Hz - OUTPUT 48 V DC - 90 W DIMMABLE	

1A1810303	MATT WHITE	WALL-CEILING ROSE-REMOTE KIT INPUT 120 V - 60 Hz - OUTPUT 48 V DC - 90 W - IP20 DALI - PUSH - 0/1-10 V DIMMABLE	



Libertà assoluta, spazialità assoluta, creatività assoluta. / Absolute freedom, absolute spatiality, absolute creativity.

La possibilità di portare la luce ovunque, liberamente.

La tecnologia aiuta a cancellare i confini.

Materiali impalpabili, talvolta invisibili, conduttori nascosti, travestiti, ragnatele sottili di filamenti che conducono e disegnano la luce.

Luce che corre su binari digitali, su fili leggeri e quasi invisibili, su nastri modulabili che possono posarsi su scale, finestre, vetrate, senza più limiti.

Circuiti che si chiudono, luci d'accento, diodi leggerissimi.

Tutto questo è **Sistemi**, una struttura che integra quattro diversi progetti, modulabili e compatibili tra loro.

The possibility to take light anywhere, freely.


Technology helps to break down the boundaries.


Intangible, almost invisible materials, hidden, camouflages conductors, thin cobwebs of filaments that carry and draw the light.

Light running on digital tracks, ultra-light and almost invisible wires, modular tapes that can be laid limitlessly on stairs, windows, glass panels.

Circuit that close, accent lighting, ultra-light diodes.

All this is **Sistemi**, a structure integrating four different, modular and compatible designs.

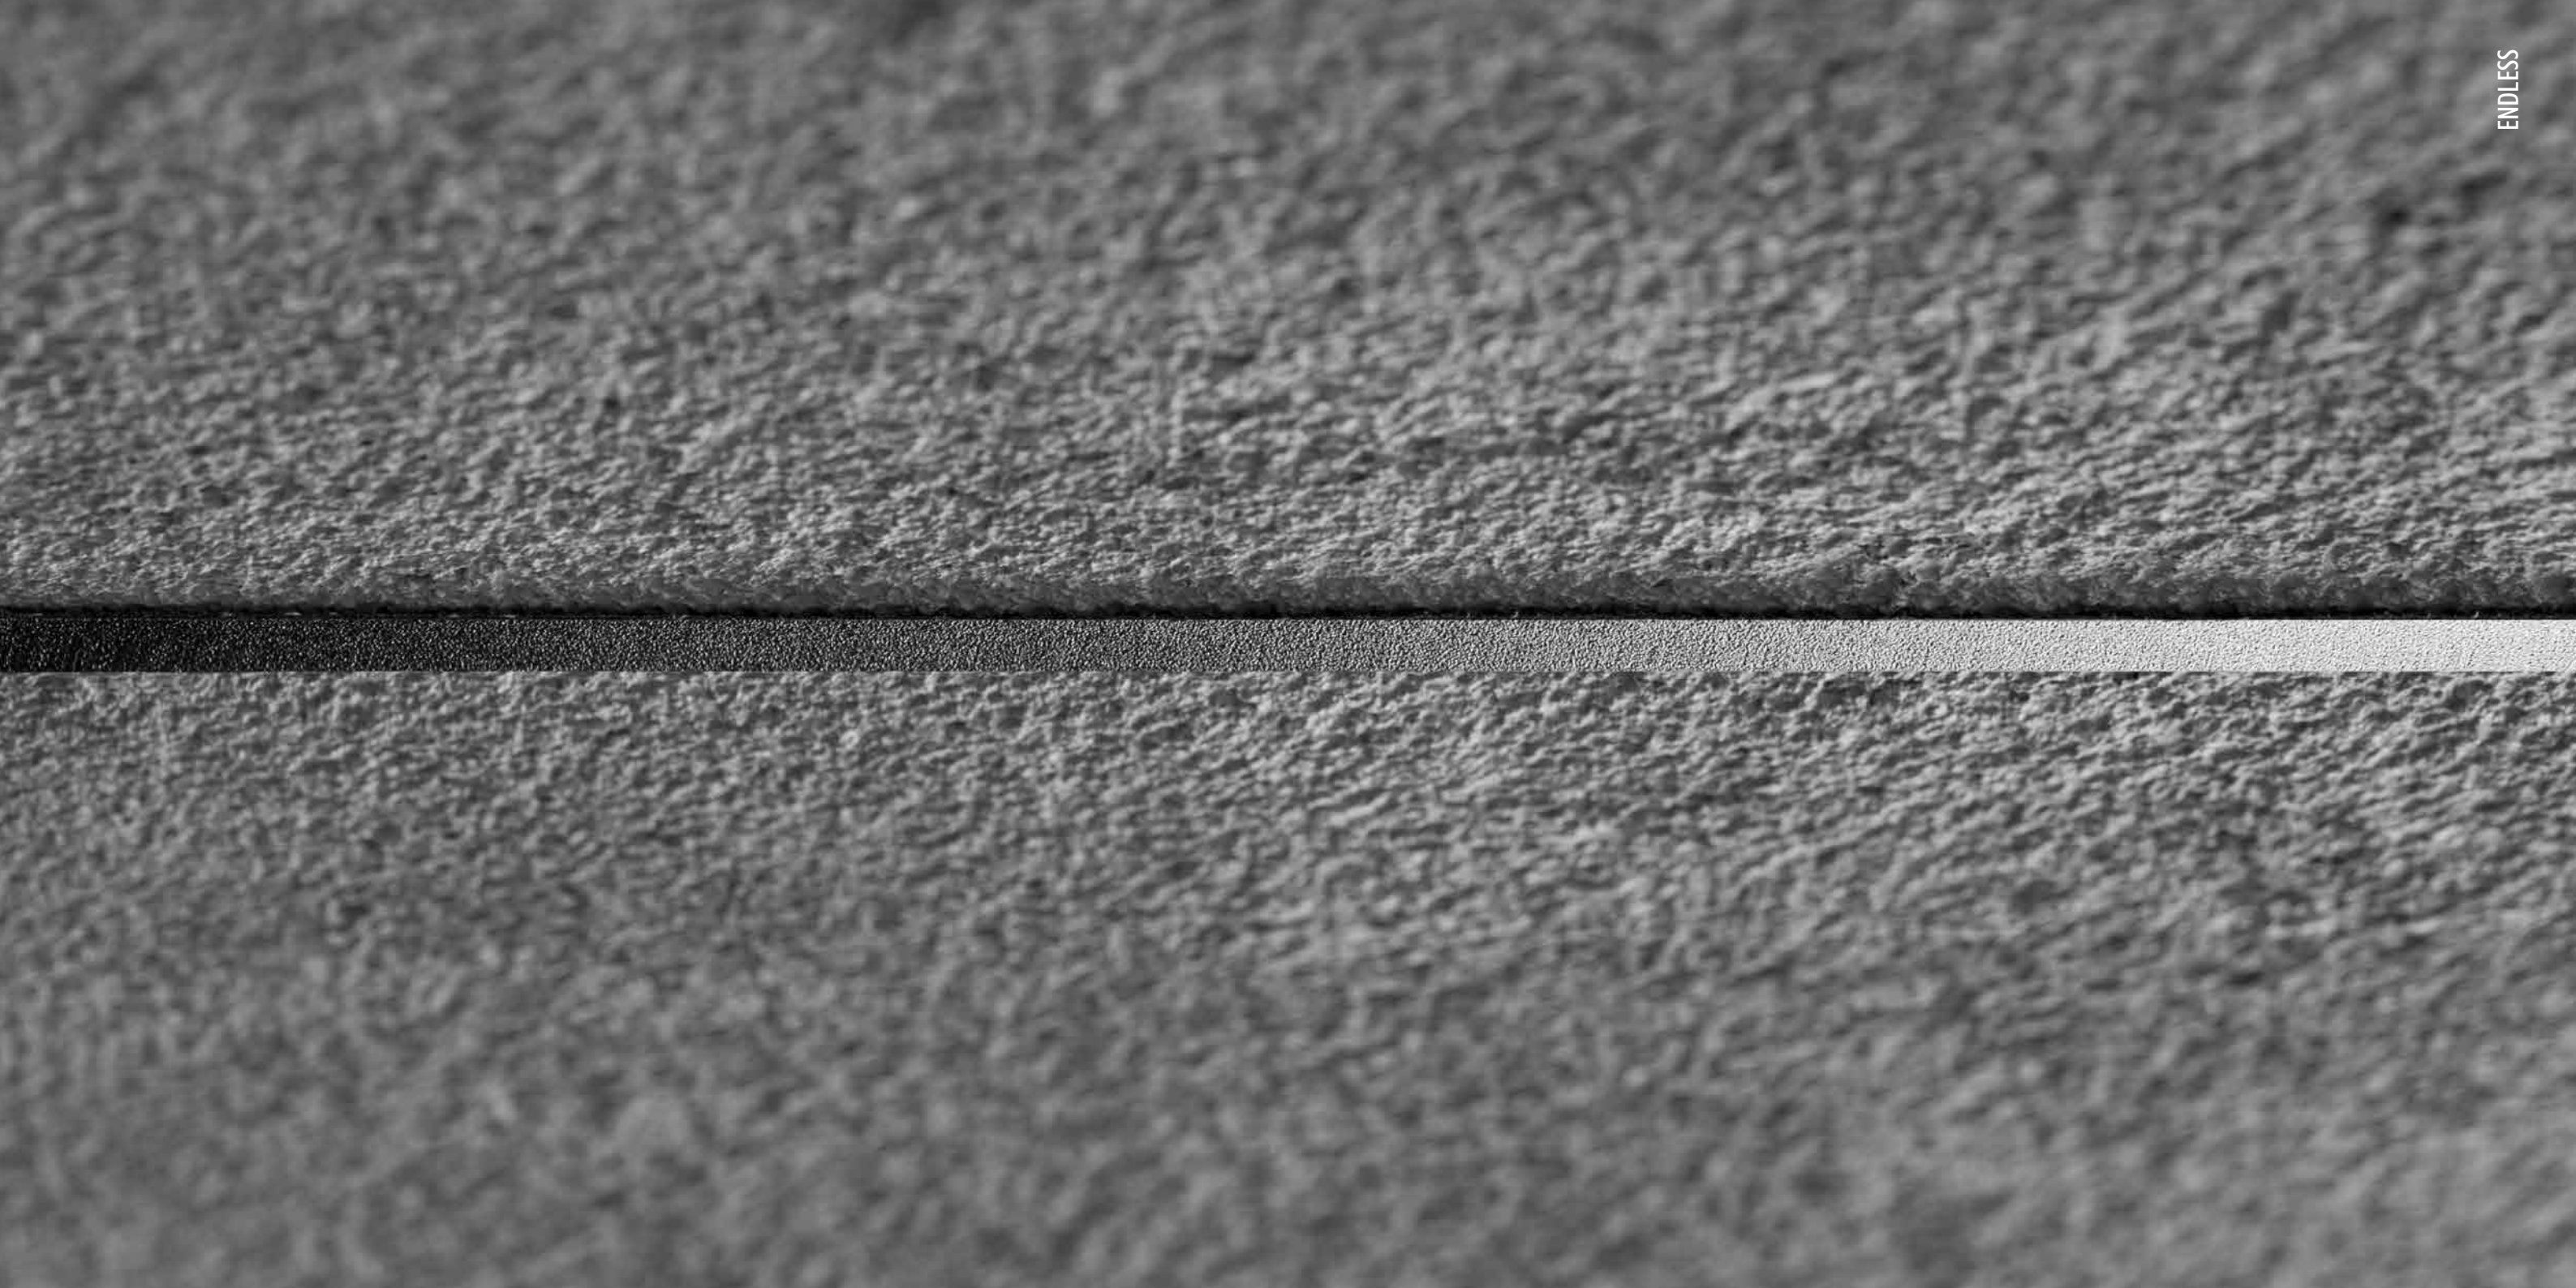

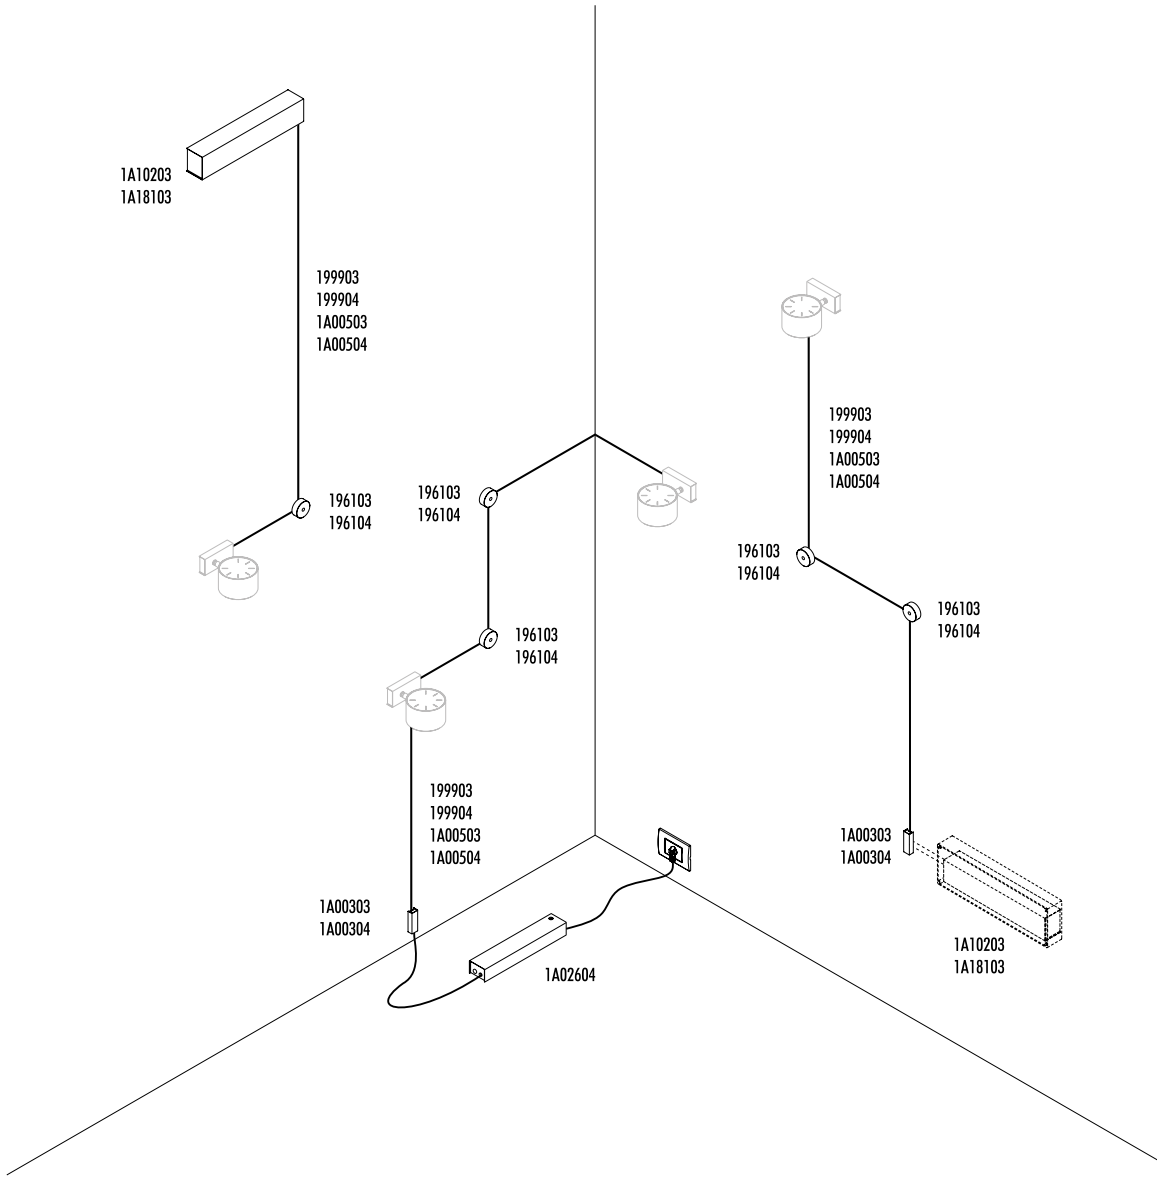


The sizes are expressed in millimeters.

DESIGN DAVIDE GROPPÌ - 2018
SISTEMA DA PARETE E DA SOFFITTO - METALLO - PVC
WALL AND CEILING SYSTEM - METAL - PVC


ENDLESS

C € IP 20


199903	BIANCO OPACO / MATT WHITE - 5 m	ENDLESS - MAX 150 W - MAX 48 V DC - MAX 4 A	
199904	NERO OPACO / MATT BLACK - 5 m		
1A00503	BIANCO OPACO / MATT WHITE - 10 m		
1A00504	NERO OPACO / MATT BLACK - 10 m		
1A03700	STANDARD	KIT FISSAGGIO PARETI RUVIDE / FIXING ROUGH WALLS - 2,5 m	
196103	BIANCO OPACO / MATT WHITE	BOX MORSETTI CON 2 MORSETTI INCLUSI TERMINALS BOX WITH 2 TERMINALS INCLUDED	
196104	NERO OPACO / MATT BLACK		
1A00303	BIANCO OPACO / MATT WHITE	BASE ALIMENTAZIONE / POWER BASE	
1A00304	NERO OPACO / MATT BLACK		
196900	STANDARD	MORSETTI - 2 PEZZI / TERMINALS - 2 PIECES	

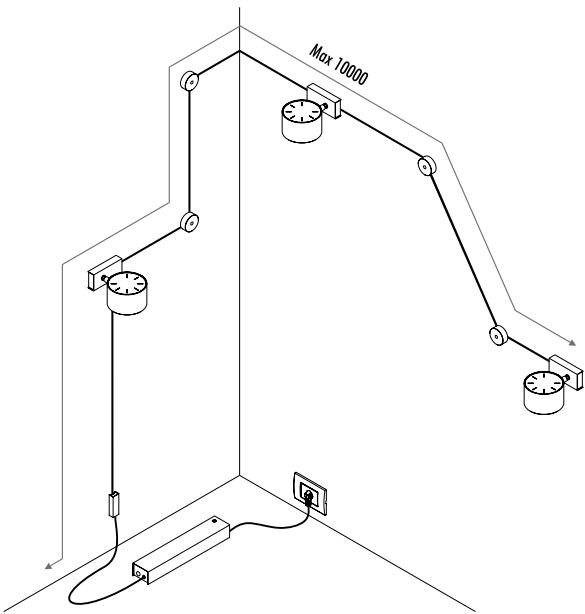

KIT ROSONE DA PARETE E SOFFITTO / WALL AND CEILING ROSE KIT

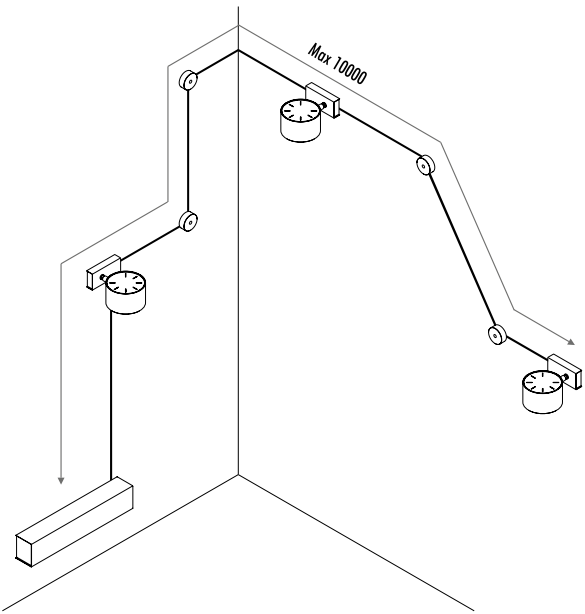

KIT DI ALIMENTAZIONE REMOTO / REMOTE POWER SUPPLY KIT

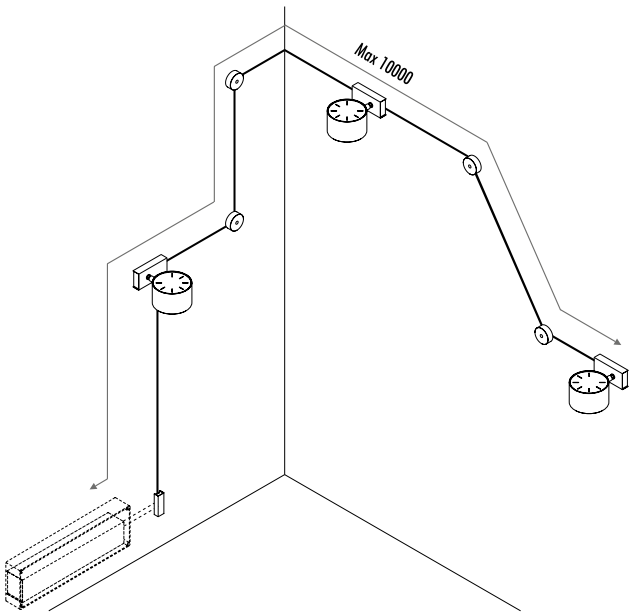

KIT ALIMENTAZIONE OBBLIGATORIO PER SISTEMA ENDLESS ON/OFF - SPOT ENDLESS IOT - DOT ENDLESS IOT / COMPULSORY POWER SUPPLY FOR ENDLESS ON/OFF SYSTEM - SPOT ENDLESS IOT - DOT ENDLESS IOT


1A02604	NERO OPACO / MATT BLACK	KIT DI ALIMENTAZIONE CON SPINA / POWER SUPPLY KIT WITH PLUG INPUT 100-240 V - 50/60 Hz - OUTPUT 48 V DC - 150 W NON DIMMERABILE - NOT DIMMABLE	

1A10203	BIANCO OPACO / MATT WHITE	KIT ROSONE PARETE - SOFFITTO - REMOTO / WALL - CEILING ROSE - REMOTE KIT INPUT 220-240 V - 50/60 Hz - OUTPUT 48 V DC - 150 W - IP20 NON DIMMERABILE - NOT DIMMABLE	

KIT ALIMENTAZIONE OBBLIGATORIO PER DIMMERAZIONE SPOT ENDLESS E DOT ENDLESS / COMPULSORY POWER SUPPLY FOR DIMMING SPOT ENDLESS AND DOT ENDLESS

1A18004	NERO OPACO / MATT BLACK	KIT DI ALIMENTAZIONE CON SPINA / POWER SUPPLY KIT WITH PLUG INPUT 100-240 V - 50/60 Hz - OUTPUT 48 V DC - 150 W DIMMERABILE - DIMMABLE	

1A18103	BIANCO OPACO / MATT WHITE	KIT ROSONE PARETE - SOFFITTO - REMOTO / WALL - CEILING ROSE - REMOTE KIT INPUT 220-240 V - 50/60 Hz - OUTPUT 48 V DC - 150 W - IP20 DALI - PUSH - 0/1-10 V DIMMABLE	

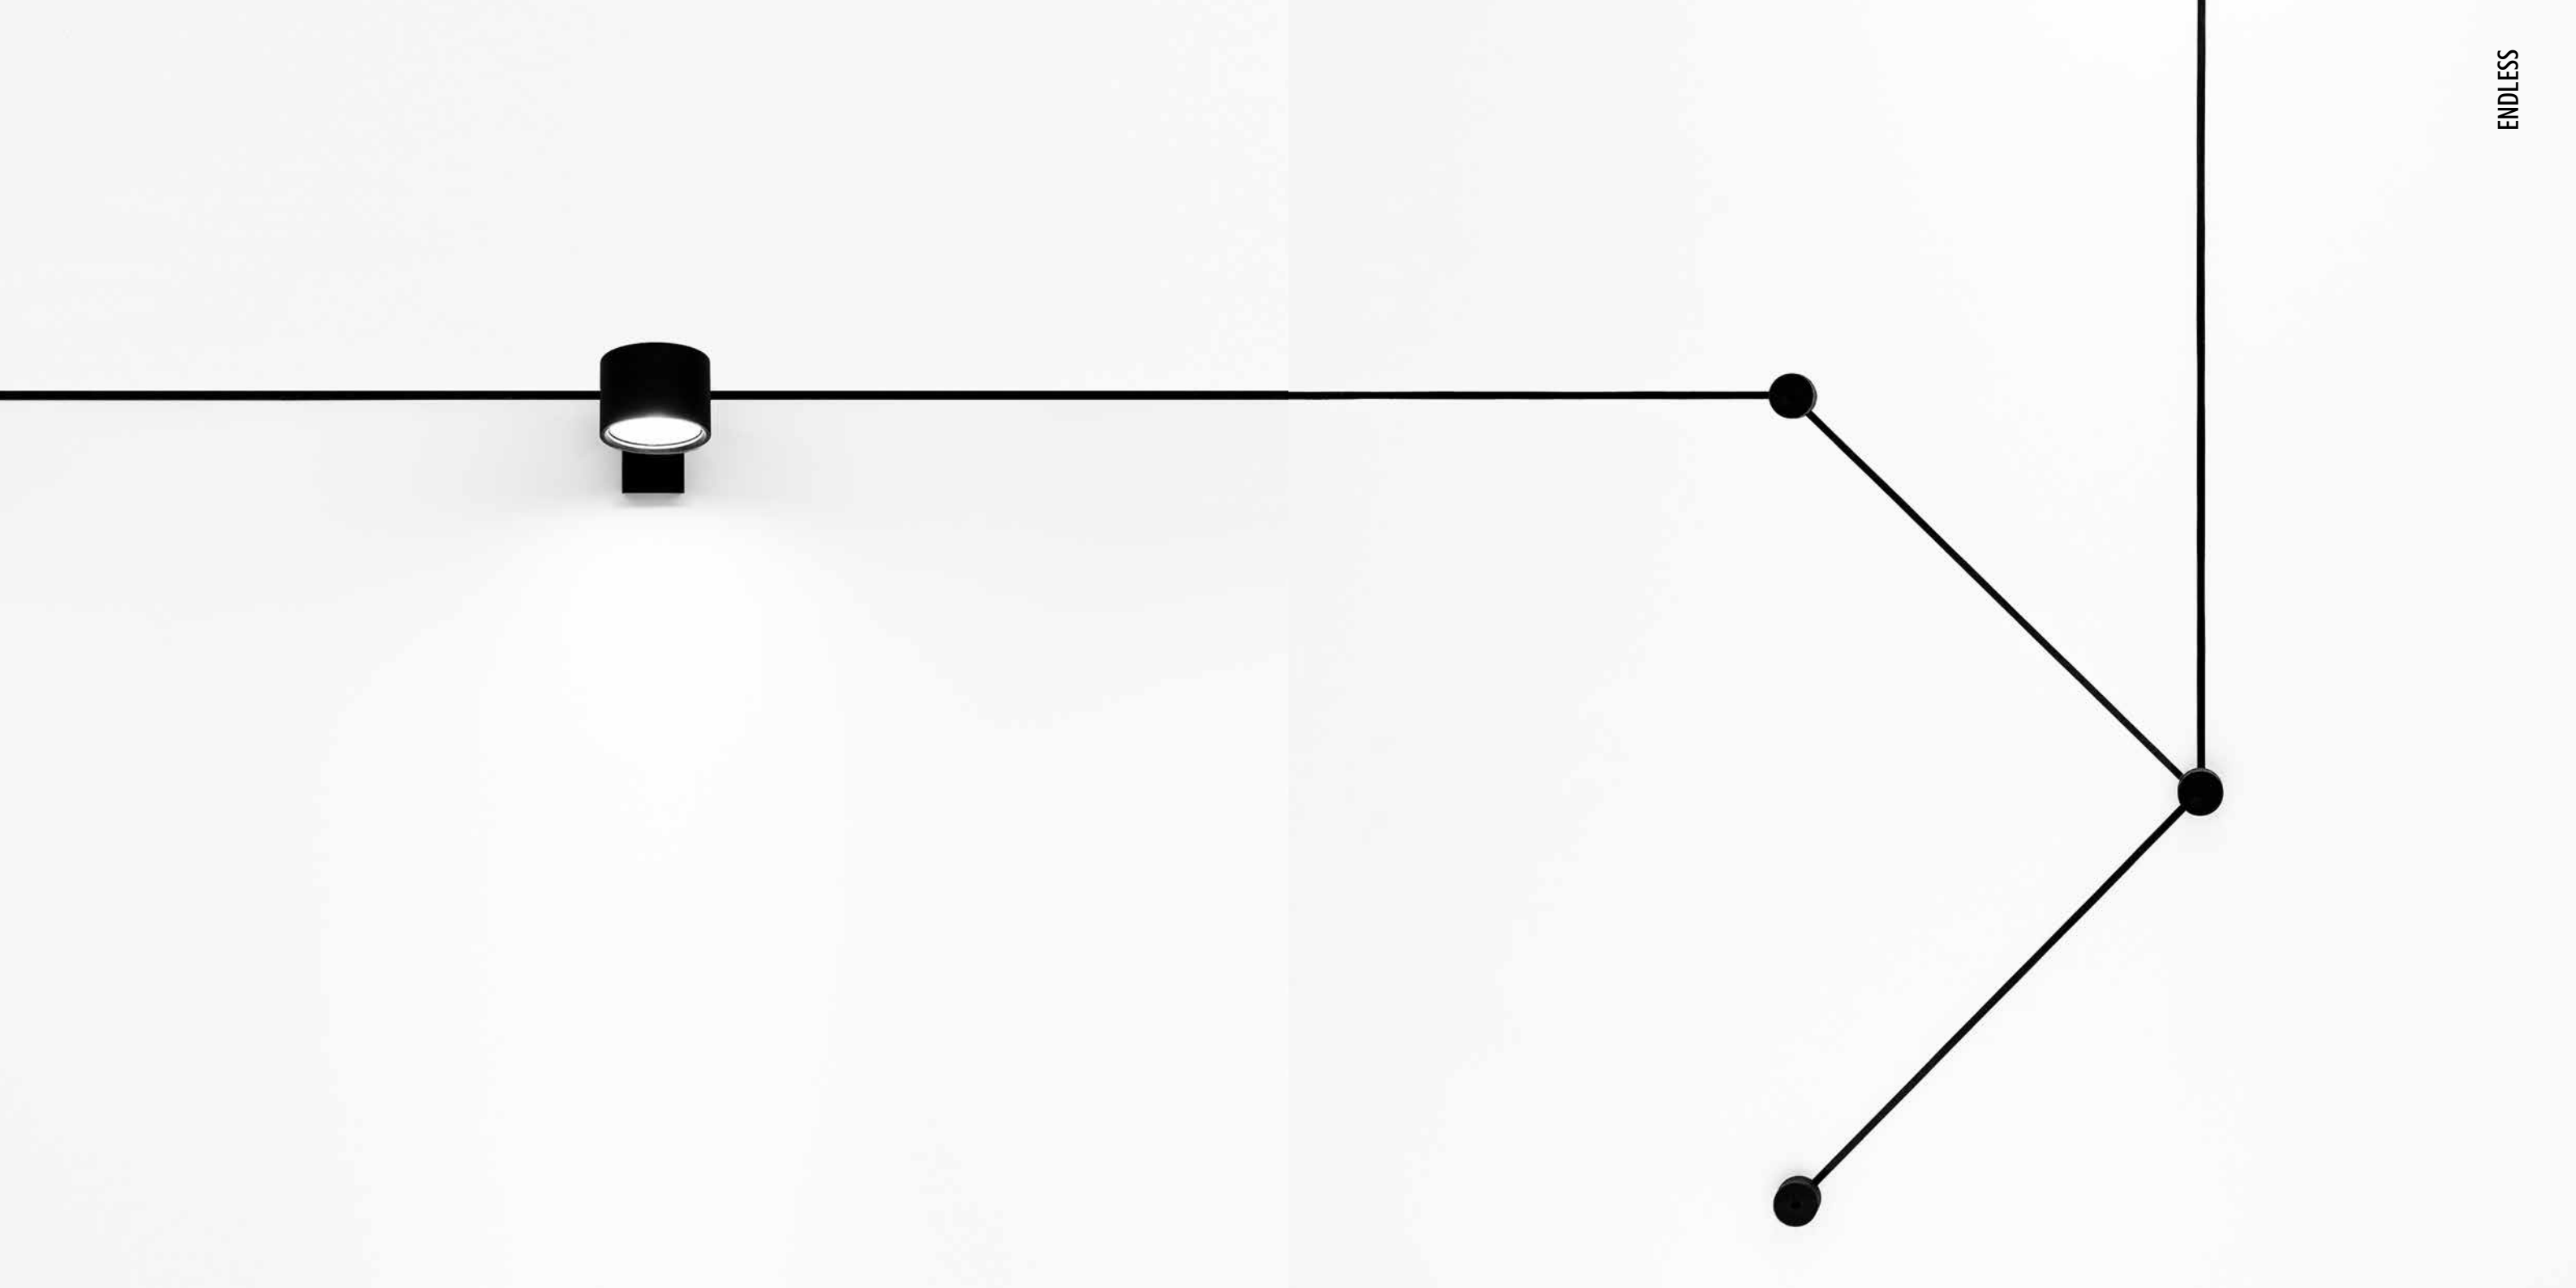

ENDLESS





The sizes are expressed in millimeters.

DESIGN DAVIDE GROPPI - 2018
LAMPADA DA PARETE E DA SOFFITTO - METALLO
WALL AND CEILING LAMP - METAL

CE IP 20

SPOT ENDLESS



1A10703	BIANCO OPACO / MATT WHITE	48 V DC - MAX 12,6 W LED
1A10704	NERO OPACO / MATT BLACK	MAX 7 SPOT SU ENDLESS
		KIT DI ALIMENTAZIONE OBBLIGATORIO NON INCLUSO
		MODULO LED NON INCLUSO
		ACCESSORI OPZIONALI MODULO LED NON INCLUSI
		MAX 7 SPOT ON ENDLESS
		COMPULSORY POWER SUPPLY KIT NOT INCLUDED
		LED MODULE NOT INCLUDED
		OPTIONAL LED MODULE ACCESSORIES NOT INCLUDED





The sizes are expressed in millimeters.

DESIGN DAVIDE GROPPI - 2020
LAMPADA DA PARETE E DA SOFFITTO - METALLO
WALL AND CEILING LAMP - METAL

CE IP 20

DOT ENDLESS



1A03303	BIANCO OPACO / MATT WHITE - 3000K	48 V DC - MAX 12,6 W LED 3000K - 930 lm - CRI 97 / 2700K - 880 lm - CRI 97 MAX 7 DOT SU ENDLESS KIT DI ALIMENTAZIONE OBBLIGATORIO NON INCLUSO ACCESSORI OBBLIGATORI NON INCLUSI MAX 7 DOT ON ENDLESS COMPULSORY POWER SUPPLY KIT NOT INCLUDED COMPULSORY ACCESSORIES NOT INCLUDED
1A03303-27	BIANCO OPACO / MATT WHITE - 2700K	
1A03304	NERO OPACO / MATT BLACK - 3000K	
1A03304-27	NERO OPACO / MATT BLACK - 2700K	

ACCESSORI OBBLIGATORI / COMPULSORY ACCESSORIES



1A16400	LENS NARROW BEAM	DOT ENDLESS LENS
1A16500	LENS MEDIUM BEAM	



DESIGN DAVIDE GROPPI - 2020
LAMPADA DA PARETE E DA SOFFITTO - METALLO
WALL AND CEILING LAMP - METAL

CE IP 20


DOT ENDLESS IOT




1A14603	BIANCO OPACO / MATT WHITE - 3000K	48 V DC - MAX 12,6 W LED
1A14603-27	BIANCO OPACO / MATT WHITE - 2700K	3000K - 930 lm - CRI 97 / 2700K - 880 lm - CRI 97
1A14604	NERO OPACO / MATT BLACK - 3000K	MAX 7 DOT SU ENDLESS
1A14604-27	NERO OPACO / MATT BLACK - 2700K	DIMMERABILE CON CONTROLLO WIRELESS SOLO TRAMITE APP DEDICATA by DAVIDE GROPPI
		KIT DI ALIMENTAZIONE OBBLIGATORIO NON INCLUSO
		ACCESSORI OBBLIGATORI NON INCLUSI
		MAX 7 DOT ON ENDLESS
		DIMMABLE WIRELESS CONTROL ONLY WITH DEDICATED APP by DAVIDE GROPPI
		COMPULSORY POWER SUPPLY KIT NOT INCLUDED
		COMPULSORY ACCESSORIES NOT INCLUDED

ACCESSORI OBBLIGATORI / COMPULSORY ACCESSORIES


1A16400	LENS NARROW BEAM	DOT ENDLESS LENS
1A16500	LENS MEDIUM BEAM	




NETWORK



GROUPS



DYNAMIC SCENES

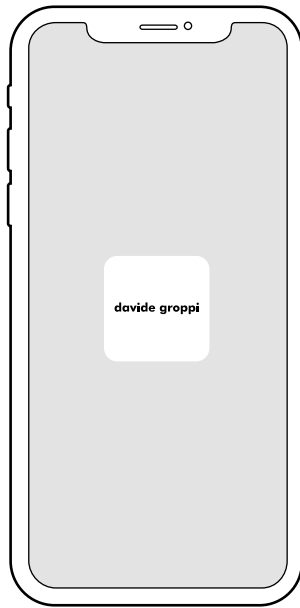


davide groppi IOT

C O N T R O L A P P



DISCOVER



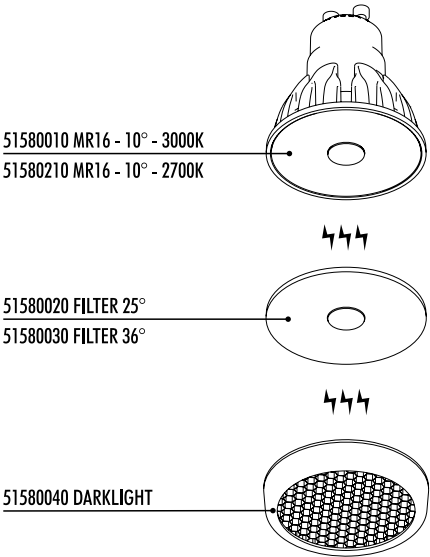

	CODE	SOCKET	TENSION	WATTAGE	BEAM ANGLE (°)	TEMPERATURE (K)	SOURCE LUMENS	BULB EFFICIENCY	CRI (Ra)	DIMMABLE	PRODUCT REFERENCE
🔔	LAMPADINE LED SORAA MR16 - DIMMERABILE IGBT / SORAA LED BULBS MR16 - IGBT DIMMABLE										
	51580010	GU10	230 V	7,5 W	10°	3000K	410 lm	A	95	X	DOT P DOT PL DOT R DOT SISTEMA MINI 51 MINI BIT 51 MINI PL TRICK TRACK
	51580210	GU10	230 V	7,5 W	10°	2700K	390 lm	A	95	X	

ACCESSORI "POINT SOURCE OPTICS" PER GENERARE FASCI UNIFORMI E DI ALTA INTENSITA' / "POINT SOURCE OPTICS" ACCESSORIES FOR UNIFORM AND HIGH INTENSITY BEAMS

51580020	FILTER - MR16	25°	DOT FRAMELESS DOT P DOT PL DOT R DOT SISTEMA
51580030	FILTER - MR16	36°	MINI MINI 51 MINI BIT MINI BIT 51 MINI PL TRICK TRACK
51580040	DARKLIGHT - MR16	-	

MODULI LED / LED MODULES

50041500	500 mA DC	18 W	15°	3000K	1829 lm	A+	90	X	PUNTO PUNTO PL PUNTO 2 PL SPOT SPOT SISTEMA
50041510	500 mA DC	18 W	15°	2700K	1719 lm	A+	90	X	
50041350	500 mA DC	18 W	24°	3000K	1869 lm	A+	90	X	
50041450	500 mA DC	18 W	24°	2700K	1759 lm	A+	90	X	
50041500	350 mA DC	12,6 W	15°	3000K	1350 lm	A+	90	X	SPOT ENDLESS SPOT ENDLESS IOT
50041510	350 mA DC	12,6 W	15°	2700K	1269 lm	A+	90	X	
50041350	350 mA DC	12,6 W	24°	3000K	1361 lm	A+	90	X	
50041450	350 mA DC	12,6 W	24°	2700K	1281 lm	A+	90	X	

ACCESSORI OPZIONALI MODULO LED / OPTIONAL LED MODULE ACCESSORIES

1A12100	STANDARD	DARKLIGHT	PUNTO PUNTO PL PUNTO 2 PL SPOT SPOT ENDLESS SPOT ENDLESS IOT SPOT SISTEMA
---------	----------	-----------	---