

# PANZERI

## ARENA

220-240V AC dimmable (DALI/Push DIM) + ON-OFF  
L07401.150.0518



Suspension lighting fixture for interiors, with direct and indirect light emission and swivelling accent light.  
Bended extruded aluminium structure in white, black, bronze, matt brass or titanium polyacrylic paint.  
Extruded polycarbonate diffuser with opaline finish.  
Die-cast aluminium joints in polyacrylic paint.  
Die-cast aluminium projectors rotating on two axes in polyacrylic paint.  
Reflectors in thermoplastic material with chrome plated finish.  
Textured glass screens.  
Anti-glare snoots in black thermoplastic material.  
5m (196,9") long steel suspension cables.  
5m (196,9") long power cable in transparent PVC.  
Power canopy with pickled sheet metal ceiling bracket and covering in white, black, bronze, matt brass or titanium polyacrylic paint.

### Data sheet


CODE	L07401.150.0518
SYSTEM POWER CONSUMPTION	129W
EFFICACY	75lm/W
LIGHT SOURCE	LED
LIGHT SOURCE LIFETIME	L70 (B50) 60.000h
COLOUR TEMPERATURE	2700K Ra>90
LIGHT DISTRIBUTION	Diffused + Adjustable
POWER SUPPLY	220-240V AC
FREQUENCY	50/60Hz
ELECTRICAL CONFIGURATION	Dimmable (DALI/Push DIM) + ON-OFF
DRIVER	Integrated Included
NOMINAL LUMINOUS FLUX	14065lm
LUMEN OUTPUT	9675lm
EFFICIENCY	68.788%
WEIGHT	7,5200Kg
PROTECTION DEGREE	IP20
COLOUR TOLLERANCES	SDCM 3
PACKING DIMENSIONS (CM)	0 x 0 x 0

### Finish

White



Technical drawing

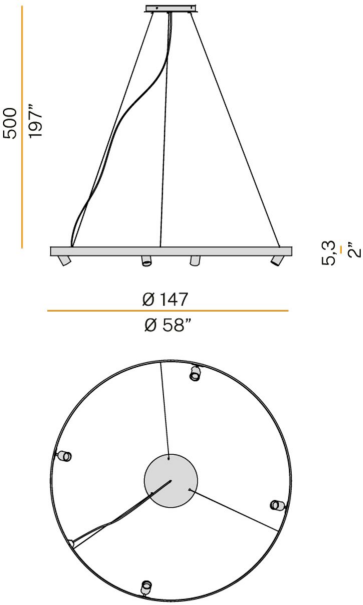

# PANZERI

## ARENA

220-240V AC dimmable (DALI/Push DIM) + ON-OFF  
L07401.200.0518



Suspension lighting fixture for interiors, with direct and indirect light emission and swivelling accent light.  
Bended extruded aluminium structure in white, black, bronze, matt brass or titanium polyacrylic paint.  
Extruded polycarbonate diffuser with opaline finish.  
Die-cast aluminium joints in polyacrylic paint.  
Die-cast aluminium projectors rotating on two axes in polyacrylic paint.  
Reflectors in thermoplastic material with chrome plated finish.  
Textured glass screens.  
Anti-glare snoots in black thermoplastic material.  
5m (196,9") long steel suspension cables.  
5m (196,9") long power cable in transparent PVC.  
Power canopy with pickled sheet metal ceiling bracket and covering in white, black, bronze, matt brass or titanium polyacrylic paint.

### Data sheet

CODE	L07401.200.0518
SYSTEM POWER CONSUMPTION	154W
EFFICACY	81.94lm/W
LIGHT SOURCE	LED
LIGHT SOURCE LIFETIME	L70 (B50) 60.000h
COLOUR TEMPERATURE	2700K Ra>90
LIGHT DISTRIBUTION	Diffused + Adjustable
POWER SUPPLY	220-240V AC
FREQUENCY	50/60Hz
ELECTRICAL CONFIGURATION	Dimmable (DALI/Push DIM) + ON-OFF
DRIVER	Integrated Included
NOMINAL LUMINOUS FLUX	18290lm
LUMEN OUTPUT	12618lm
EFFICIENCY	68.989%
WEIGHT	8,8000Kg
PROTECTION DEGREE	IP20
COLOUR TOLLERANCES	SDCM 3
PACKING DIMENSIONS (CM)	0 x 0 x 0

### Finish

White



Technical drawing

