

APRILIA ROUND ADJ

astro

GENERAL

CLASS:	CE (Class 3)
IP RATING:	IP20
BATHROOM ZONE:	Zone 3
VOLTAGE:	Constant Current 350mA
INSTALLATION ORIENTATION:	Ceiling mount
MAIN MATERIAL:	Metal - mild steel
DIMENSIONS:	D: 97mm Ø: 105mm
CUT OUT HOLE:	Ø: 92mm / 3-5/8"
RECESS DEPTH:	150mm
FIRE RATING:	90 min BS476 part 21
CABLE LENGTH:	Not applicable
GROSS WEIGHT:	0.45Kg

LAMP

LIGHT SOURCE:	COB LED
MAXIMUM WATTAGE:	6.1W
LAMP INCLUDED:	Yes (Integral)
MAXIMUM LAMP LENGTH:	Not applicable
LUMINOUS FLUX:	604.8 lm
COLOUR TEMP:	2700K
CRI:	80
R9:	8.0
MACADAM ELLIPSE:	3-Step
TILT ADJUSTABLE ANGLE:	15°
ROTATION ADJUSTABLE ANGLE:	360°
AVERAGE LIFESPAN:	36,300hrs
L70:	To be advised
BEAM ANGLE:	35.95°

ELECTRICAL



SWITCHED:	No
DIMMABLE:	Yes
DIMMING METHOD:	Control Gear Dependent
DRIVER INCLUDED:	Not applicable
DRIVER OUTPUT CURRENT:	Not applicable
DRIVER OUTPUT VOLTAGE:	Not applicable
SUPPLY FREQUENCY:	Not applicable
DRIVER / BALLAST VOLTAGE:	Not applicable
DRIVER AVERAGE LIFESPAN:	Not applicable
EFFICACY:	97.55lm/W

ADDITIONAL INFORMATION

SHADE INCLUDED	Not applicable
SHADE MATERIAL	Not applicable



CODE: 5725
SKU: 1256013
FINISH: MATT WHITE

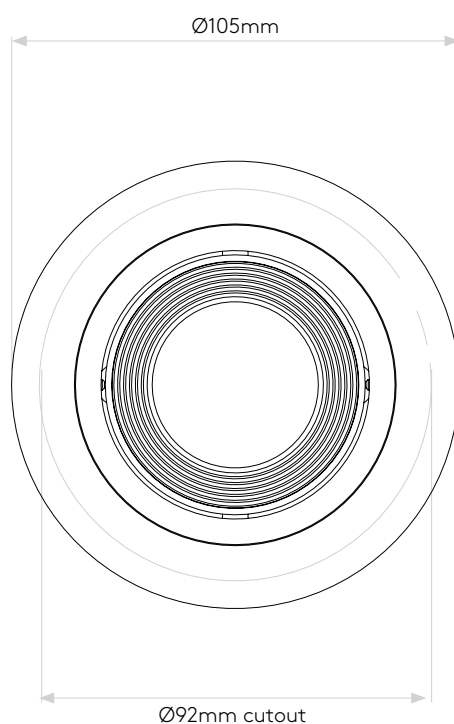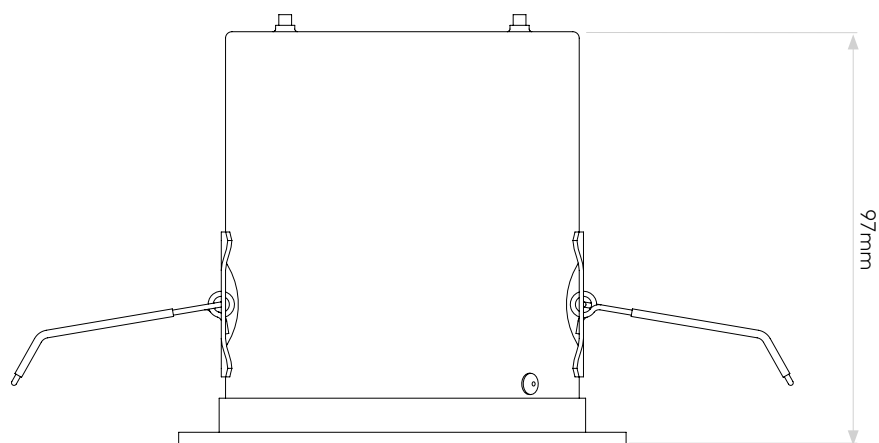

Please note that some dimensions may vary slightly due to manufacturing tolerances, this includes cable entry and fixing holes

Veuillez noter que certaines dimensions peuvent varier légèrement en raison des tolérances de fabrication, y compris l'entrée de câble et les trous de fixation.

Bitte beachten Sie, dass die Maße Fertigungstoleranzen unterliegen und daher in geringem Umfang von der angegebenen Größe abweichen können. Dies gilt auch für Kabeleingänge und Befestigungslöcher.

Si prega notare che possono esserci piccole variazioni in alcune dimensioni dovute alle tolleranze di produzione, queste includono l'ingresso del cavo e i fori di fissaggio.

APRILIA ROUND ADJ

astro

GENERAL

CLASS:	CE (Class 3)
IP RATING:	IP21
BATHROOM ZONE:	Zone 3
VOLTAGE:	Constant Current 350mA
INSTALLATION ORIENTATION:	Ceiling mount
MAIN MATERIAL:	Metal - Aluminium
DIMENSIONS:	D: 68.5mm Ø: 95mm
CUT OUT HOLE:	Ø: 86mm/3-3/8"
RECESS DEPTH:	150mm
FIRE RATING:	Not applicable
CABLE LENGTH:	Not applicable
GROSS WEIGHT:	0.30Kg

LAMP

LIGHT SOURCE:	COB LED
MAXIMUM WATTAGE:	6.1W
LAMP INCLUDED:	Yes (Integral)
MAXIMUM LAMP LENGTH:	Not applicable
LUMINOUS FLUX:	604.8 lm
COLOUR TEMP:	2700K
CRI:	80
R9:	8.0
MACADAM ELLIPSE:	3-Step
TILT ADJUSTABLE ANGLE:	35°
ROTATION ADJUSTABLE ANGLE:	360°
AVERAGE LIFESPAN:	36,300hrs
L70:	To be advised
BEAM ANGLE:	35.95°

ELECTRICAL

SWITCHED:	No
DIMMABLE:	Yes
DIMMING METHOD:	Control Gear Dependent
DRIVER INCLUDED:	Not applicable
DRIVER OUTPUT CURRENT:	Not applicable
DRIVER OUTPUT VOLTAGE:	Not applicable
SUPPLY FREQUENCY:	Not applicable
DRIVER / BALLAST VOLTAGE:	Not applicable
DRIVER AVERAGE LIFESPAN:	Not applicable
EFFICACY:	97.55lm/W

ADDITIONAL INFORMATION





SHADE INCLUDED	Not applicable
SHADE MATERIAL	Not applicable



CODE: 5759
SKU: 1256024
FINISH: MATT WHITE



CODE: 5760
SKU: 1256025
FINISH: ANODISED ALUMINIUM

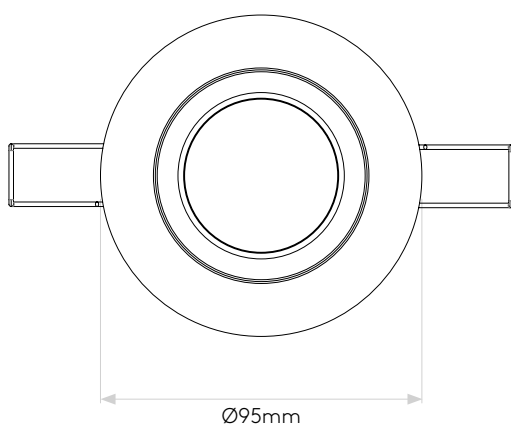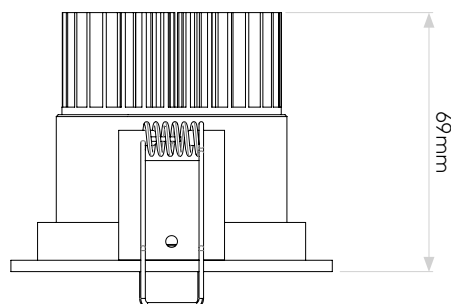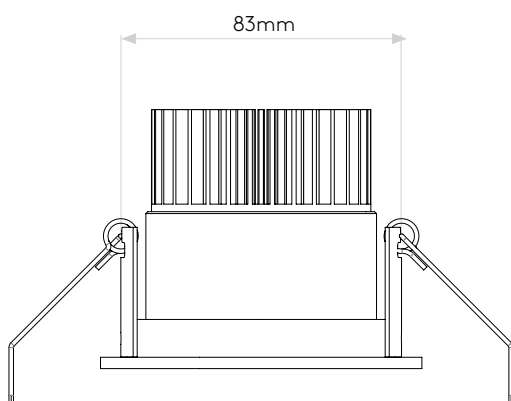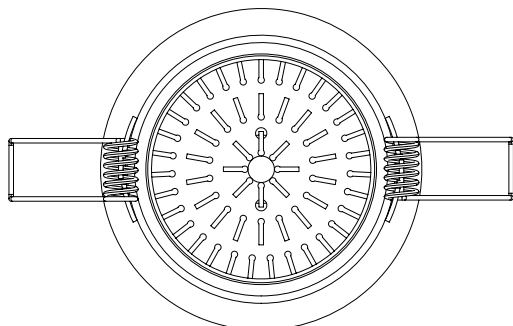

Please note that some dimensions may vary slightly due to manufacturing tolerances, this includes cable entry and fixing holes

Veuillez noter que certaines dimensions peuvent varier légèrement en raison des tolérances de fabrication, y compris l'entrée de câble et les trous de fixation.

Bitte beachten Sie, dass die Maße Fertigungstoleranzen unterliegen und daher in geringem Umfang von der angegebenen Größe abweichen können. Dies gilt auch für Kabeleingänge und Befestigungslöcher.

Si prega notare che possono esserci piccole variazioni in alcune dimensioni dovute alle tolleranze di produzione, queste includono l'ingresso del cavo e i fori di fissaggio.